


Typical Mic Input Powering Scheme

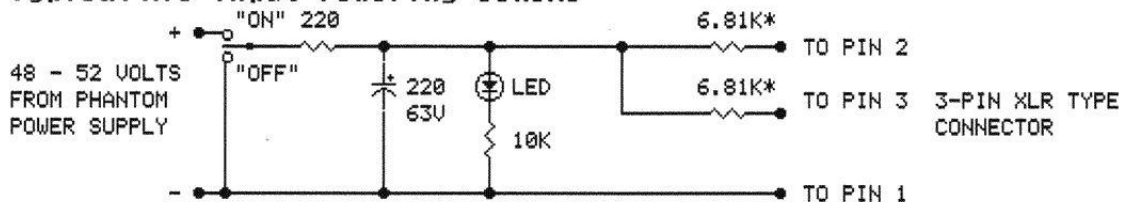

Simple Phantom Power Supply

* SHOULD BE
 1% TOLERANCE
 CLOSELY MATCHED
 FOR BEST CMRR