

CS-2100A


100MHz 4-CHANNEL  
OSCILLOSCOPE

KENWOOD CORPORATION

DELAYED SWEEP OSCILLOSCOPE

# CS-2100A

## 100MHz 4-CHANNEL OSCILLOSCOPE

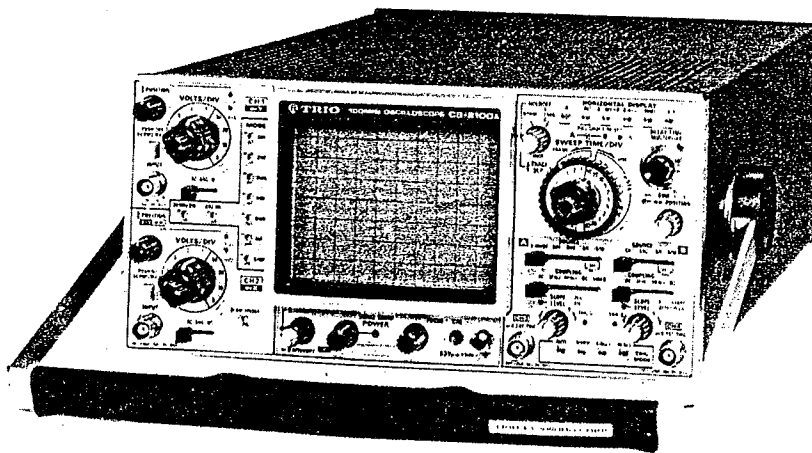

Serial Number 2110001~3030200

 **TRIO**

# CONTENTS

<b>SPECIFICATIONS</b> .....	1-1	<b>VERTICAL ATTENUATOR</b> .....	6-9
<b>CIRCUIT DESCRIPTION</b> .....	2-1	<b>VERTICAL PREAMPLIFIER</b> .....	6-11
<b>BLOCK DIAGRAM</b> .....	2-5	<b>VERTICAL OUTPUT AMP</b> .....	6-17
<b>MAINTENANCE</b> .....	3-1	<b>SWEEP ROTARY</b> .....	6-18
<b>REMOVAL OF CASE</b> .....	3-1	<b>TRIG SWEEP</b> .....	6-19
<b>REMOVING/INSTALLING CRT</b> .....	3-1	<b>HORIZONTAL OUTPUT AMP</b> .....	6-25
<b>TROUBLESHOOTING</b> .....	3-1	<b>HORIZONTAL MODE CONTROL</b> .....	6-26
<b>REPLACING SWITCHING</b>		<b>A TRIG SWITCH</b> .....	6-28
<b>POWER SUPPLY</b> .....	3-2	<b>B TRIG SWITCH</b> .....	6-29
<b>REPLACING BATTERY</b> .....	3-2	<b>POWER BLANKING</b> .....	6-30
<b>ADJUSTMENT</b> .....	4-1	<b>PC BOARD AND SCHEMATIC</b>	
<b>ADJUSTMENT OF POWER SUPPLY AND CRT</b> .....	4-2	<b>DIAGRAM</b> .....	7-1
<b>ADJUSTMENT OF VERTICAL AXIS (I)</b> .....	4-5	<b>VERTICAL ATTENUATOR</b> .....	7-2
<b>ADJUSTMENT OF A, B TRIG AMPLIFIER</b> .....	4-9	<b>VERTICAL PREAMPLIFIER</b> .....	7-4
<b>ADJUSTMENT OF VERTICAL AXIS (II)</b> .....	4-10	<b>VERTICAL OUTPUT AMP</b> .....	7-6
<b>ADJUSTMENT OF HORIZONTAL SWEEP</b> .....	4-12	<b>SWEEP ROTARY</b> .....	7-8
<b>ADJUSTMENT OF X-Y OPERATION</b> .....	4-16	<b>TRIG SWEEP</b> .....	7-10
<b>ADJUSTMENT OF TRIGGERING</b> .....	4-16	<b>HORIZONTAL OUTPUT AMP</b> .....	7-12
<b>OPERATING CHECKS</b> .....	4-19	<b>HORIZONTAL MODE CONTROL</b> .....	7-14
<b>TROUBLESHOOTING</b> .....	5-1	<b>A TRIG SWITCH</b> .....	7-16
<b>PARTS LIST AND DISASSEMBLY</b> .....	6-1	<b>B TRIG SWITCH</b> .....	7-18
<b>MAIN CHASSIS</b> .....	6-1	<b>POWER BLANKING</b> .....	7-20
		<b>SEMICONDUCTOR</b> .....	8-1

# SPECIFICATIONS

**CRT**

Model: 150ATM31A

Display area: 8 × 10 div (1 div = 1 cm)

Type: Rectangular, with internal graticule

Accelerating potential: 16kV

**VERTICAL AXIS (Channel 1 and Channel 2 identical specifications)**

Sensitivity: 5 mV/div to 5V/div (X1 mode)  
1 mV/div to 1V/div (X5 mode)  
500 μV/div (Cascaded operation, CH1 to CH2)

Accuracy: ±3% (10 ~ 35°C)  
±5% (0 ~ 50°C)  
±8% (Cascaded operation, CH1 to CH2)

Attenuator: 5 mV/div to 5V/div in 1-2-5 sequence, all 10 ranges with fine adjustment.

Input resistance: 1 MΩ ±2% (1 MΩ mode)  
50Ω ±2% (50Ω mode)

Input capacitance: Approx. 28pF

Frequency response: (Include × 5 GAIN mode)

DC: DC to 100 MHz (-3 dB)  
DC to 120 MHz (-6 dB)  
DC to 70 MHz (-3 dB), (Cascaded operation, CH1 to CH2)

AC: 5 Hz to 100 MHz (-3 dB)  
5 Hz to 120 MHz (-6 dB)  
7 Hz to 70 MHz (-3 dB), (Cascaded operation, CH1, to CH2)

Risetime: 3.5ns

Signal delay time: Approx 30ns as displayed on CRT screen

Crosstalk: -40 dB minimum

Operating modes:

CH1 CH1, single trace

CH2 CH2, single trace

DUAL CH1 and CH2, dual trace

ADD CH1 + CH2 (added) display

QUAD CH1 ~ CH4, four trace

ALT Two or four waveforms, alternating

CHOP Two or four waveforms, chopped

CHOP frequency: Approx 250 kHz, switchable

Polarity reversal: CH2 only

Maximum input voltage: 500 Vp-p or 250V (DC + AC peak) in 1 MΩ mode.  
5 Vrms or DC ±5V in 50Ω mode.

Maximum undistorted amplitude: 8 division, minimum (DC to 100 MHz)

Bandwidth limiting: Vertical system bandwidth with the 20 MHz BW pushbutton switch pushed is approximately 20 MHz

**VERTICAL AXIS (Channel 3 and Channel 4 common specifications)**

Sensitivity: 0.1V/div, 1V/div ±3%

Attenuator: 1/1, 1/10

Input resistance: 1 MΩ ±2%

Input capacitance: Approx. 28 pF

Input coupling mode: DC only

Frequency response: DC to 100 MHz (-3 dB)  
DC to 120 MHz (-6 dB)

Risetime: 3.5ns

Signal delay time: Same as CH1 and CH2

Maximum allowable voltage

DC component: ±0.5V or less (AC + DC) (±5V, 1/10 attenuated)

AC component: 1 Vp-p (10 Vp-p, 1/10 attenuated) or less

Maximum input voltage: 50V (DC + AC peak)

**HORIZONTAL AXIS (CH2 input)**

Modes: X-Y mode is switch selectable (HORIZONTAL DISPLAY)

X-Y mode: CH1: Y-axis  
CH2: X-axis

Sensitivity: Same as CH2

Accuracy: Same as CH2

Input resistance: Same as CH2

Input capacitance: Same as CH2

Frequency response:

DC: DC to 5 MHz (-3 dB)  
DC to 6 MHz (-6 dB)

AC: 5 Hz to 5 MHz (-3 dB)  
5 Hz to 6 MHz (-6 dB)

X-Y phase difference: Less than 3° at 100 kHz

**SWEEP**

Modes (switchable with the HORIZONTAL DISPLAY switch):

A A Sweep

ALT B Sweep waveform is displayed as an intensified portion of the A Sweep and B Sweep alternating

A-INT-B Duration of the B Sweep is displayed as an intensified portion of the A Sweep.

B DLY'D Delayed B sweep

DUAL Dual sweep — A and B sweeps, in dependently

X-Y X-Y display mode

# SPECIFICATIONS

**A Sweep time:** 20ns/div to 0.5s/div in 23 ranges, in 1-2-5 sequence, vernier control provides fully adjustable sweep time between steps.

**B Sweep time:** 20ns/div to 50ms/div in 20 ranges, in 1-2-5 sequence.

**Accuracy:** ±3% (10 ~ 35°C)  
±6% (0 ~ 50°C)

**Sweep magnification:** X10 ±5% (10 ~ 35°C)  
±7% (0 ~ 50°C)

**Linearity:** 20ns/div to 0.5s/div ±3% (±5% with X10 magnification)

**HOLD OFF:** Continuously adjustable for A Sweep hold off time from NORM to X5

**Trace separation:** B positionable up to 4 divisions separated from A Sweep, continuously adjustable.

**Delay method:** Continuous delay, SYNC delay

**Delay time:** 0.2 to 10 times the sweep time from 200ns to 0.5s, continuously adjustable.

**Time difference measurement accuracy:** ±2% (10 ~ 35 °C)  
±4% (0 ~ 50°C)

**Delay jitter:** 1/20000 of the full scale sweep time.

## TRIGGERING

### A TRIG

**A trigger modes:** AUTO, NORM, SINGLE, FIX: at the center of the waveform

**Trigger source:** V MODE, CH1, CH2, (EXT) CH3 1/1 and 1/10

**Coupling modes:** AC, LF<sub>REJ</sub>, HF<sub>REJ</sub>, DC, VIDEO VIDEO-LINE sync automatically selected at sweep times of 50 μs/div to 20ns/div. VIDEO-FRAME sync automatically selected at sweep times of 0.5s/div to 0.1ms/div.

**Trigger level:** ±90° adjustable

**Polarity:** +/—

### B TRIG

**B trigger modes** STARTS AFTER DELAY, TRIGGERABLE AFTER DELAY

**Trigger source:** CH1, CH2, (EXT) CH4 1/1 and 1/10

**Coupling modes:** AC, LF<sub>REJ</sub>, HF<sub>REJ</sub>, DC

**Trigger level:** ±90° adjustable

**Polarity:** +/—

**Trigger sensitivity (A and B)**

COUPLING	FREQ RANGE	MINIMUM SYNC AMPLITUDE		
		INT	EXT	EXT1 10
DC	DC ~ 20 MHz	0.5div	50 mV	0.5V
	DC ~ 50 MHz	1.0div	100 mV	1.0V
	DC ~ 100 MHz	1.5div	150 mV	1.5V
AC	Same as for DC but with increased minimum level for below 20 Hz			
AC HF <sub>REJ</sub>	Increased minimum level below 20 Hz and above 30 kHz			
AC LF <sub>REJ</sub>	Increased minimum level below 30 kHz			
VIDEO	FRAME LINE	0.5div	50 mV	0.5V

**AUTO:** Same as above specifications for above 30 Hz.

**FIX:** 40 Hz ~ 20 MHz 1.0 div (100 mV)  
40 Hz ~ 80 MHz 1.5 div (150 mV)

**Jitter:** 0.5ns maximum at 100 MHz at 2ns/div sweep rate (X10 MAG on)

## CALIBRATING VOLTAGE AND CURRENT

1 kHz ±3% Positive square wave  
0.3V ±1% (10 ~ 35 C)  
±2% (0 ~ 50 C)  
10 mA ±2% (10 ~ 35 C)  
±4% (0 ~ 50 C)

## INTENSITY MODULATION

**Input signal:** TTL level, intensity increasing with more positive levels

**Input impedance:** Approx. 10 kΩ

**Usable frequency range:** DC to 10 MHz

**Maximum input voltage:** 50V (DC + AC peak)

## VERTICAL AXIS OUTPUT

Sampled CH1 output

**Output voltage:** 50 mVp-p/div (into 50Ω load)

**Output impedance:** Approx. 50Ω

**Frequency response:** DC to 100 MHz (−3 dB) (into 50Ω load)

## GATE OUTPUT (A and B)

**Output voltage:** Approx. 1.5V positive gate (into 500Ω load)

## TRACE ROTATION

Electrical, adjustable

## POWER SUPPLY

**Line voltage:** LOW: 90 ~ 132V  
HIGH: 180 ~ 264V

**Line frequency:** 50/60 Hz

**Power consumption:** Approx. 56W

## DIMENSIONS

**Width:** 284 mm (328 mm)

**Height:** 138 mm (150 mm)

**Depth:** 400 mm (471 mm)

( ) dimensions include protrusions from basic case outline dimensions.

# SPECIFICATIONS

**WEIGHT** 7.4 kg

## ACCESSORIES

- PC-29 Probes..... 2
- Instruction Manual..... 1
- Hand Book..... 1
- AC power cord..... 1
- Panel Cover..... 1
- Probe holder..... 1

## OPTION

- Accessory Bag (MC-78)

## ENVIRONMENT

Operating temperature and humidity for guaranteed specifications: 10 ~ 35°C, 85% maximum RH  
Full operating range: 0 ~ 50°C, 90% maximum RH  
Storage temperature and humidity range: -20° ~ 55°C, 80% maximum  
Altitude:  
Operating: 5000 m  
Non-operating: 12000 m

## CIRCUIT DESCRIPTION

### VERTICAL ATTENUATOR

The CS-2100A input attenuator consists of two stages of attenuation having 1/2, 1/4 and 1/10 steps and the other having either 1/10 or 1/100 attenuation to form an overall ten point attenuator in 1-2-5 sequence.

The signal from the attenuator is passed to a dual FET impedance conversion circuit (Q1). Its output is sent to IC12. Variable gain is achieved by varying the emitter resistance of IC12.

The output of IC12 is sent to the vertical pre-amp.

The arrangement for CH2 is the same as for CH1.

Each channel has a 50Ω termination that can be switch selected.

### VERTICAL MODE LOGIC CIRCUIT

Instead of the usual mechanical switches used on other instruments the CS-2100A makes use of electronic switching. The switches themselves generate a single pulse output when operated so that the various combinations of switches and holding of selected modes must be done with external logic circuitry. The circuit that accomplishes this is the Vertical Mode Logic Circuit. The pulses generated when the switches are operated are shaped by a schmitt trigger circuit and sent to the rest of the circuitry. IC6 is a latch used to hold a single pulse. The input signal, passing through the circuit formed by D5-D11 and IC3, IC2 and IC7 is a delayed pulse which acts as the trigger for IC6. In this way IC6 holds the data that represents the fact that a switch has been depressed. IC4 acts as a logical single pole double throw switch to select one of DUAL/QUAD and ALT/CHOP. CH2 inverter and 20MHz BW switching functions are managed (ON-OFF) by IC10 which acts as a SPST switch. The output of IC4 is also latched into IC6. The output of IC6 is used to drive the vertical mode LED's through IC8, IC11, IC5 and IC9.

### VERTICAL PRE-AMP CIRCUIT

The CS-2100A has four pre-amp circuits to allow 4-channel operation. The output of the vertical attenuator is fed to IC1, an amplifier.

For CH2 an inverting stage, IC2, is provided to allow switched inversion of that channel only. Q2 and Q3 form the CH1 position circuit.

Q50 and Q51 form the CH2 position circuit which operates in a similar fashion to the circuit for CH1. Q4 and Q5 are x1 amplifier stages (for CH1) and Q6, Q7 are x5 amplifier stages. The circuit formed by Q8 and Q9 is used to switch between x1 and x5 gain for CH1. For CH2, Q52/Q53 and Q54/Q55 along with Q56 and Q57 have the same functions. Q10/Q11 and Q19/Q20 for a cascoded amplifier. Q18 and Q21 in combination with Q19 and Q20 form a switching circuit. This circuit is used to turn the CH1 signal on and off.

Q12 and Q13 form the trigger amplifier. The trigger signal passes through the buffer output amplifier formed by Q14

and Q15, being converted to 50Ω impedance and is sent to the A trigger switch circuit. For channel 1 only, the vertical signal passes through the stage formed by Q16 and Q17 to the rear panel connector for CH1 output. The circuit configuration for CH2, CH3 and CH4 is similar except that the CH3 and CH4 position adjustment is accomplished by means of PCB mounted trimmers VR1 and VR2.

The CH1 through CH4 signals are amplified by the output amplifier formed at the base side of the emitter follower formed by Q42 and Q43. This amplifier consists of Q44 and Q45 whose output is sent to the delay line.

Q38/Q39 and Q40/Q41 for the trigger amplifier which sends the signal of the output amplifier to the A trigger switch circuit and acts as the V MODE trigger source. Q37 acts as the load resistance switch for the ADD mode. Q33-Q36 form the 20MHz bandwidth circuit which limit the vertical bandwidth to -3dB down at 20MHz.

CH1 through CH4 signals are switched by the logic circuit formed by IC3 - IC7 in accordance with the vertical mode and horizontal mode selected.

### VERTICAL OUTPUT AMPLIFIER

The signal from the delay line is sent to the vertical output amplifier. Q1, Q2, Q3 and Q4 form a cascoded differential input amplifier. Q11 forms a bias current stabilization circuit which in conjunction with Q12 forms the beam finder circuit. Q7 - Q10 form the final output stage. Q5 forms the trace separation circuit.

### A TRIGGER SWITCH CIRCUIT

The CH1-CH4, V MODE signals are sent to the A trigger switch circuit. S1 is the trigger source switch with S2 acting as the trigger coupling selection switch. Q1 and Q2 form the FIX synchronization circuit, which detects the peak value of the signal and acts as an automatic trigger level control.

Q3 and Q4 form the VIDEO sync circuit which detects the trigger signal of the TV picture signal for stable display. Q6 and Q7 form an impedance converting emitter follower circuit to lower the output impedance to drive the next stage. Q8 and Q9 form a circuit which is used to improve the CMRR. This circuit is a feedback amplifier. IC1 is a cascode amplifier used as the polarity reversal (inversion) circuit for the trigger signal. Q10 forms an impedance conversion stage used to convert the output of the IC1 stage to 50Ω for output to the horizontal sweep unit.

### B TRIGGER SWITCH CIRCUIT

Basically this circuit operates as does the A trigger switch circuit. Q1 accepts the CH2 trigger input and uses this signal to form the X signal for X-Y operation. Other aspects of operation are the same as the A trigger switch circuit.

## CIRCUIT DESCRIPTION

### SWEEP ROTARY CIRCUIT

This circuit is a part of the sweep circuit, but is located on a separate board. It is composed of a rotary switch to select the sweep time and resistors of the HOLDOFF circuit.

### HORIZONTAL SWEEP CIRCUIT

This sweep circuit uses a constant current integrated circuit to obtain sawtooth waveform by charging capacitor with constant current:

Q14, Q16, Q18 form the circuit that switches the sweep time capacitors for A sweep.

For the B sweep, this function is managed by Q43, Q45, Q47 in the same manner.

Q13, Q15 and Q17 form the circuit that switches HOLDOFF capacitor for the A sweep, and in the case of B sweep the same operation is carried out by transistors Q42, Q44 and Q46. The voltage supplied by the constant voltage circuit is converted to a constant current source by the voltage setting circuit comprised of IC3a and transistor Q8 and the resistor which is selected by the rotary switch.

This current is used to charge the sweep time capacitor, and result in a rise voltage at the capacitor terminals. This voltage is sent to a high impedance buffer amplifier composed of Q19 and Q20.

When the output of this amplifier reaches a constant voltage value, IC7d is switched on and IC2b flip-flop is reset. At the same time IC2a is set.

The output of IC2a turns on Q7 and enshorts the sweep time capacitor. The terminal output voltage of the capacitor falls. At the same time the constant current circuit which is composed of Q22 changes one of the following HOLDOFF capacitors; C13, C19, or C23.

The terminal voltage of the capacitor increases step by step. When this terminal voltage goes beyond the threshold level Q23 is turned on. The output of Q23 turns on the SCHMIDT trigger circuit which is composed of IC2b. The output of IC2b cancels the set condition of IC2a and sweep is once again started. The trigger signal synchronizes IC2a through IC1a, IC1b. It cancels the set of the flip-flop when it is in the set state and starts the sweep which is synchronized to the trigger signal.

The SCHMIDT trigger circuit is composed of IC1a and IC1b. The trigger signal which is smoothed by IC1a and IC1b is supplied to IC1c, Q3 and Q4. When there is a trigger signal, IC1d gate is closed and IC2a operates as the master slave flip-flop.

When there is no trigger signal IC2a opens the gate of IC1d and operates R-S flip-flop. This is the auto free run circuit.

Q24 to Q26 form the delay sweep level detection circuit.

When the voltage level increases as set by DELAY TIME MULTIPLIER, Q24 is turned on and triggers IC8a gate, IC8a and IC10b compose the logic differential circuit. It makes constant width pulse which activates IC5b and starts B sweep circuit is approximately the same as A sweep circuit, but it does not have 3 low speed ranges. IC4d gate is selected from master slave flip-flop using B START AFTER DELAY switch,

and has trigger priority to R-S flip-flop.

The sweep can be started from the voltage level set by the DELAY TIME MULTIPLIER. A sweep horizontal position adjustment is carried out by Q53, and B sweep by Q54. The selection of HORIZONTAL DISPLAY is carried out by Q55 and Q58. A and B sweep waveform is synthesized by Q55 and Q58 collectors and X-Y signal is also synthesized at this point by Q59.

The signal through Q60 enhances CMRR and is sent to next stage by Q62 and Q63; Q64 and Q65, and Q66 and Q67 are selected times one and times ten (x1 and x10) by Q69 and Q68 respectively. The impedance is converted to 50 ohms and is sent to the horizontal output amplifier by Q70 and Q71.

The trace SEP circuit is composed of Q78 to Q80 and two different bias voltages are sent to the vertical output amplifier by the A and B sweep signals. IC8d is the reset-pulse generator circuit in the case of signal sweep operation and also produces the blanking control signal when it is necessary to produce horizontal display using IC13a, IC14a and IC14e.

This circuit combines the sweep and chop signal using IC11a, IC11b, IC11c, IC11d and IC12d. The impedance is converted in Q72 to Q75.

This signal becomes the input signal of the blanking circuit. The signal in the case of DUAL or QUAD setting of the vertical axis mode produced in IC12a, IC12b, IC13b, IC14c, IC14d, IC15a, IC15b, IC15c and IC15d and D48 to D50.

IC12a and IC12b comprise the chop oscillator. The vertical mode logic and horizontal mode logic signal switch this oscillator on and off. In the case of oscillation stopping this oscillator produces an alternate signal output.

On receiving a signal from IC14e, the output of IC12a and IC12b is turned off in the case of vertical axis single trace operation by IC15d.

However this output can be supplied in another case. The output of Q77 is supplied to the vertical amplifier and the output is separated into chop and alternate signals.

### HORIZONTAL MODE CONTROL CIRCUIT

The switch states are latched by IC4 and IC7 which effectively makes these non-locking switches into locking types functionally.

For horizontal display D1-D9 and IC1d—IC1f are used to hold 3 bits of coded status information. Waveform shaping is used in the IC1 circuit to prevent misoperation. Diodes D10—D12 and IC2c—IC2e and IC3d form a circuit that is used to detect what switch of the horizontal group has been depressed.

The detected switch data is entered into the register IC4 which then holds the switch status. IC5 is a tri-state buffer. IC6 is used to restore the encoded switches status information on a one to one basis for all functions. Switch status held until a particular switch is pressed for a second time.



## CIRCUIT DESCRIPTION

The output of IC6 is used to drive an LED and as a control signal for blanking and sweep switching. The operation of the trigger mode switch input is the same as for the horizontal display switch group. Diodes D13-D16 and IC1a and IC1b are used to encode 2 bits of switch status information for this switch group after pulse shaping is done. D17, D18, IC2a, IC2b, IC2f and IC3a determine whether an input is present, writing into the register IC7a and IC7b the appropriate status information.

This register holds the switch status encoded information until IC8 is used to cancel, or return the status information based on alternate operation of the switches. Similar to the horizontal display switch group, once depressed a switch mode is maintained until the switch is depressed once more. IC5a, IC5b, and IC5c are tri-state buffers. IC9a, IC9b, and IC9d—IC9f along with Q1—Q3 form buffers for the switch LED's and sweep circuit. The output from the trigger mode reset switch is pulse shaped and sent to the trigger sweep circuit.

This circuit holds data even when the instrument's power supply switch is turned OFF. That control is performed by Q4, D19, D20, IC3 and IC8a.

D19 and D20 form a power supply based on the internal lithium battery for memory backup. IC3b and IC3c detect the power OFF condition and generate a memory save signal. The output of the above circuit forms the set of control signals used to control the vertical mode logic circuitry.

### CALIBRATING VOLTAGE CIRCUIT

Q11 and Q12 form a multivibrator circuit which generates a signal which is subsequently converted to a low impedance by means of Q10 for output as the calibration signal. It is also used for creation of a current calibration signal by means of R70 and R71. The current calibration signal is output via a rear panel terminal. IC17 is used to regulate the voltage generated by this calibration circuit.

### CH3 and CH4 INPUT CIRCUITS

These circuits consist of an attenuator and buffer amplifier. Q16 drives a relay to switch the attenuation between 1/1 and 1/10. The signal from the attenuator is impedance converted with the circuit formed by Q13a, Q13b, Q14 and Q15 and sent to the vertical pre-amplifier. The operation and configuration of the CH4 circuit is similar to the CH3 circuit.

### HORIZONTAL OUTPUT AMPLIFIER

The signal from the horizontal sweep circuit is amplified by the differential amplifier formed by Q1 and Q2. The output signal of this circuit is then passed to the emitter follower circuit formed by Q5 and Q6 for impedance conversion to enable driving the circuit formed by Q7 and Q8. Q9 and Q10 form a voltage regulation circuit which serves as the DC load for Q7 and Q8 respectively with AC peaking performed by means of C15 and C16. Q11 and Q12 form an auto-bias circuit which automatically controls the operating point of the output stage. It also serves as the beam finder

circuit such that when the base of Q13 is grounded the operating point of the output stage is lowered, resulting in a shrunken display.

### SWITCHING POWER SUPPLY UNIT

Although the CS-2100A is light and compact, and make use of a switching regulator type power supply.

Input of either 100V or 200V is rectified and a smoothing capacitor is used to generate a smooth DC output of approximately 200V.

Next, a power transistor is used to convert this output to an AC voltage which is used to drive a compact type converter transformer. The transformer used has 6 bifilar windings which create six separate outputs which are then rectified and smoothed to provide the supply for the blanking unit directly. One of the outputs is compared with a reference voltage to form an error voltage used for regulation. The error voltage is sent to the error voltage amplifier, the output of which is used to control the base of the power transistor. This output is isolated from the primary by means of a photocoupler.

### POWER BLANKING UNIT

The five remaining outputs from the switching regulator power supply are further regulated using a series regulation method. This accomplished with Q1, Q3—Q6. IC1a, IC1b, IC2a and IC2b are error voltage amplifiers. The +20V derived by use of a resistance voltage divider. A conventional high voltage DC-DC converter is used. Q25—Q27 are error voltage amplifiers with Q29 acting as a control transistor. The CS-2100A provides independent A and B sweep intensity controls. This function is implemented by means of the circuit formed by Q13—Q15. Q16 forms the beam finder circuit which allows the beam to be seen even if the intensity control has been inadvertently turned to minimum. Q17 forms the external intensity (Z-axis) modulation circuit which accepts an input and results in brighter displays for increasing inputs.

The signals from these circuits are combined at the base of Q18 to drive Q19. Q20 forms the DC load for Q19 with C25 acting to provide AC peaking for this circuit. Q21 and Q22 form the auto-focus circuit which apply a signal to the focus electrodes of a reverse phase from the blanking signal. Q23 and Q24 act to restore the DC component of the blanking and auto-focus circuits by using differential amplifiers for isolation. Q8 controls scale illumination with Q9 and Q10 controlling the adjustment of trace rotation. Q11 and Q12 are used to adjust perpendicularity.

# CIRCUIT DESCRIPTION

## HIGH VOLTAGE UNIT

The post-acceleration voltage of the CS-2100A is 16kV requiring the high voltage unit to be protected from the hands of the user if safety is to be maintained.

This protection also is required to prevent leakage.

To achieve this goal, the high voltage unit of the CS-2100A has been encapsulated in resin to form a high voltage "block". In the block are the high voltage DC to DC converter as well as the 1.75kV cathode voltage supplies rectifier. In addition to the anode cap which makes available 14kV, the block has 1.75kV DC and 6.3V AC outputs.

The high voltage unit is a self-contained unit which provides the post-acceleration voltage of the CS-2100A. It is designed to be protected from the hands of the user if safety is to be maintained. This protection also is required to prevent leakage. To achieve this goal, the high voltage unit of the CS-2100A has been encapsulated in resin to form a high voltage "block". In the block are the high voltage DC to DC converter as well as the 1.75kV cathode voltage supplies rectifier. In addition to the anode cap which makes available 14kV, the block has 1.75kV DC and 6.3V AC outputs.

The high voltage unit is a self-contained unit which provides the post-acceleration voltage of the CS-2100A. It is designed to be protected from the hands of the user if safety is to be maintained. This protection also is required to prevent leakage. To achieve this goal, the high voltage unit of the CS-2100A has been encapsulated in resin to form a high voltage "block". In the block are the high voltage DC to DC converter as well as the 1.75kV cathode voltage supplies rectifier. In addition to the anode cap which makes available 14kV, the block has 1.75kV DC and 6.3V AC outputs.


The high voltage unit is a self-contained unit which provides the post-acceleration voltage of the CS-2100A. It is designed to be protected from the hands of the user if safety is to be maintained. This protection also is required to prevent leakage. To achieve this goal, the high voltage unit of the CS-2100A has been encapsulated in resin to form a high voltage "block". In the block are the high voltage DC to DC converter as well as the 1.75kV cathode voltage supplies rectifier. In addition to the anode cap which makes available 14kV, the block has 1.75kV DC and 6.3V AC outputs.

The high voltage unit is a self-contained unit which provides the post-acceleration voltage of the CS-2100A. It is designed to be protected from the hands of the user if safety is to be maintained. This protection also is required to prevent leakage. To achieve this goal, the high voltage unit of the CS-2100A has been encapsulated in resin to form a high voltage "block". In the block are the high voltage DC to DC converter as well as the 1.75kV cathode voltage supplies rectifier. In addition to the anode cap which makes available 14kV, the block has 1.75kV DC and 6.3V AC outputs.

The high voltage unit is a self-contained unit which provides the post-acceleration voltage of the CS-2100A. It is designed to be protected from the hands of the user if safety is to be maintained. This protection also is required to prevent leakage. To achieve this goal, the high voltage unit of the CS-2100A has been encapsulated in resin to form a high voltage "block". In the block are the high voltage DC to DC converter as well as the 1.75kV cathode voltage supplies rectifier. In addition to the anode cap which makes available 14kV, the block has 1.75kV DC and 6.3V AC outputs.

The high voltage unit is a self-contained unit which provides the post-acceleration voltage of the CS-2100A. It is designed to be protected from the hands of the user if safety is to be maintained. This protection also is required to prevent leakage. To achieve this goal, the high voltage unit of the CS-2100A has been encapsulated in resin to form a high voltage "block". In the block are the high voltage DC to DC converter as well as the 1.75kV cathode voltage supplies rectifier. In addition to the anode cap which makes available 14kV, the block has 1.75kV DC and 6.3V AC outputs.

# BLOCK DIAGRAM

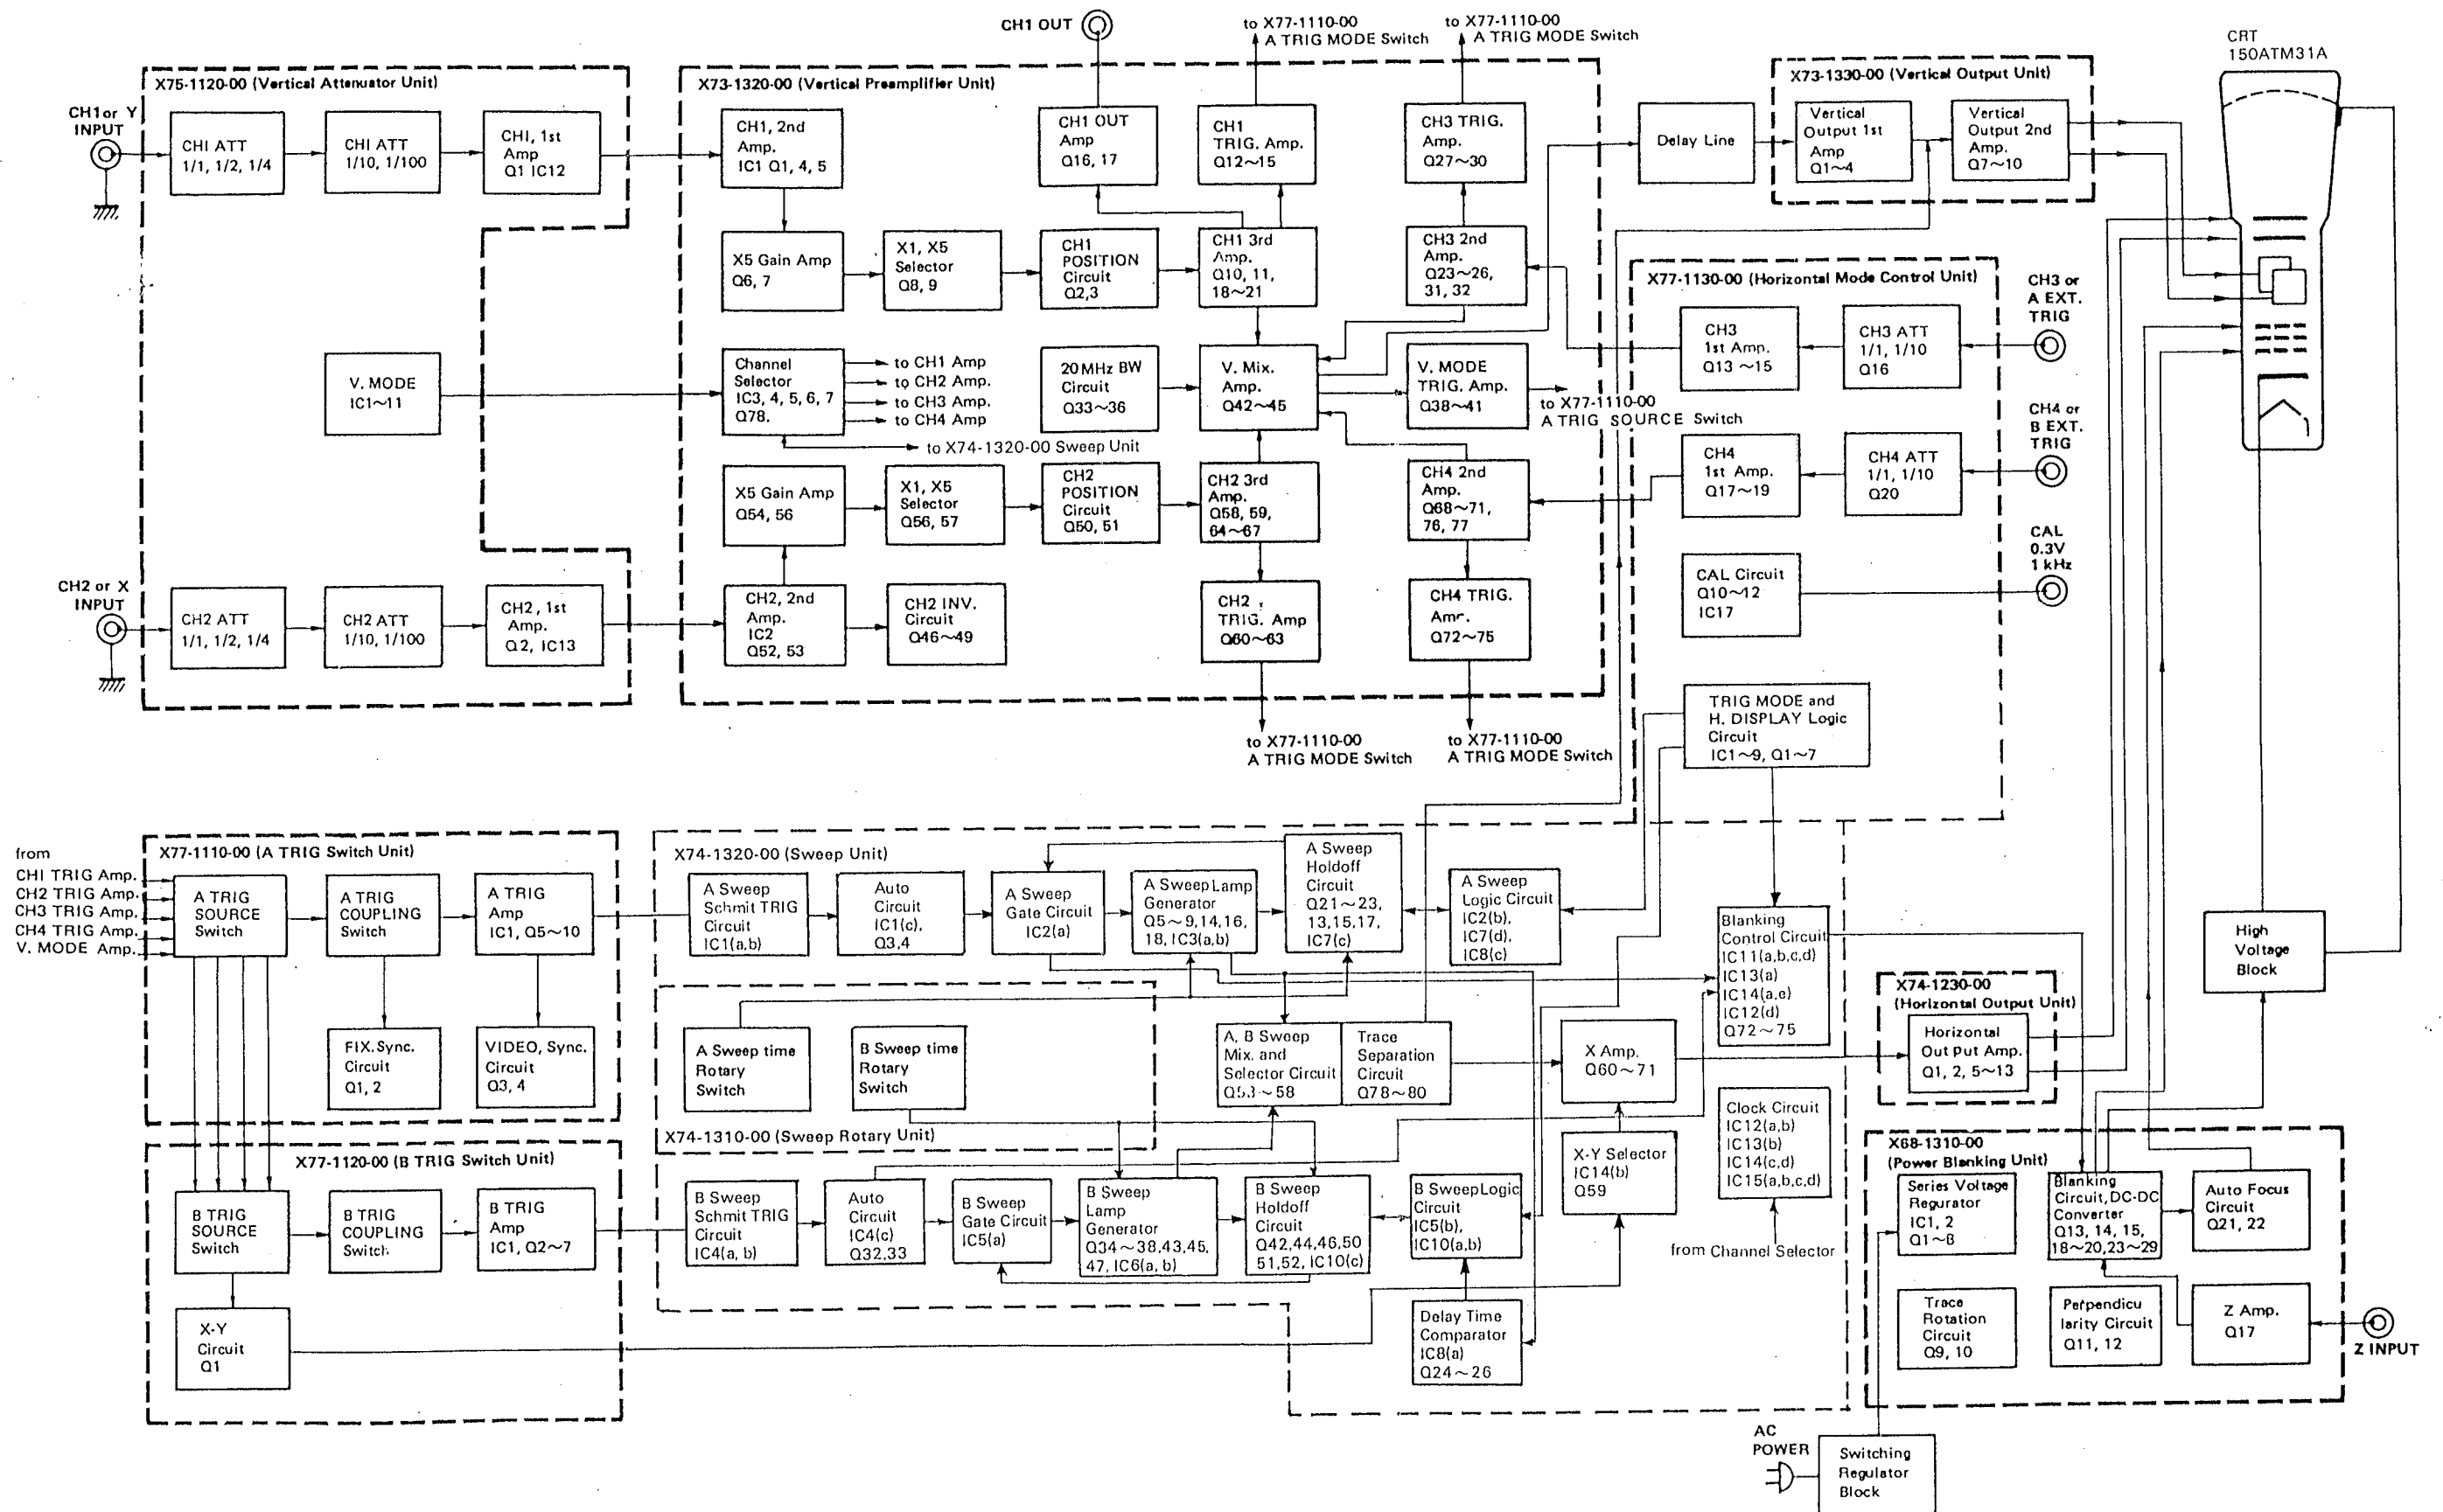

# MAINTENANCE


## REMOVAL OF CASE

1. Pull out CH3 and CH4 POSITION knobs.
2. Remove the 4 screws located at the rear of the case and the 1 located at bottom with a  $\oplus$  screwdriver. Carefully slide the body forward from the case.
3. To install the body in the case, place the case horizontally and slide the body into the case using the rails located at the bottom of the case. Then, place the body vertically and engage the case front edge into the front panel groove.

4. Temporarily insert the case retaining screws and then tighten them evenly.
5. Install the CH3 and CH4 POSITION knobs.

### CAUTION:

A voltage of 16kV is applied to the CRT socket and anode cap. Before removing the case, turn the power off and pull out the power plug. After removing the case, take care not to touch them.

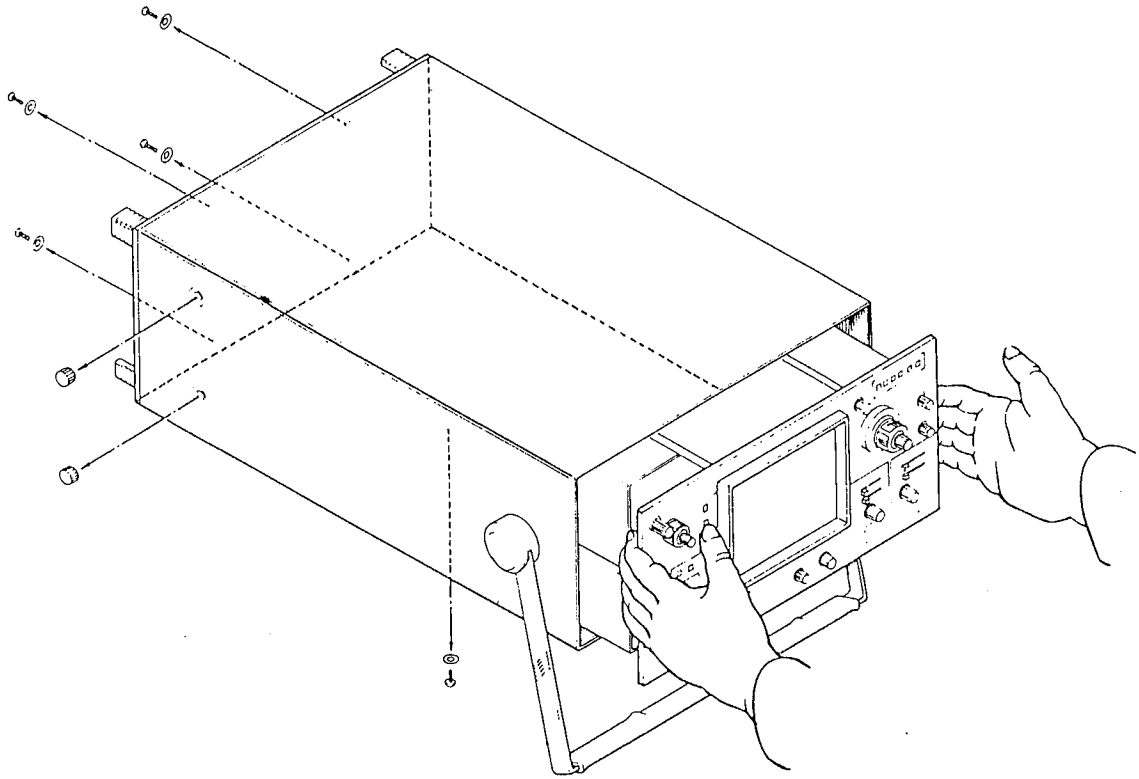

## REMOVING/INSTALLING CRT

1. When servicing CRT, do not loosen the CRT band. Only remove the CRT retaining screws, then slide the CRT backward and raise the socket. The CRT can be removed easily.
2. Insert the CRT from the socket side until the CRT comes in contact with the shield plate and tighten the CRT band retaining screws.
3. As slots are provided in the CRT bracket, the CRT can be moved right and left, and back and forth. As the bracket is inclined by 45°, the CRT can be positioned in an arbitrary position. To fix the CRT, fix the CRT band, then fix the bracket.

### CAUTION:

A high tension voltage is remained at the anode of the CRT. Before removing the CRT, connect the anode to the ground via a 100 k $\Omega$  load for 5 seconds to discharge the voltage.


## TROUBLESHOOTING

1. Confirm that the voltage selector is set to the correct position.
2. If one of the mode LEDs does not light, the unit will not operate correctly. When using the unit, confirm that the LED lights up.
3. To service the unit effectively, isolate the failure first. Then, remove the case and check the wiring, P.C.B. pattern and parts.
4. A low voltage power supply will affect the circuitry. Do not use the low voltage power supply for checking.

# MAINTENANCE

## REPLACING SWITCHING POWER SUPPLY

The switching power supply is housed in the shield case located at the rear. To remove the switching power supply, remove the horizontal logic circuitry (right) and vertical preamplifier (left) and remove the retaining screws which fix the shield case to the frame.

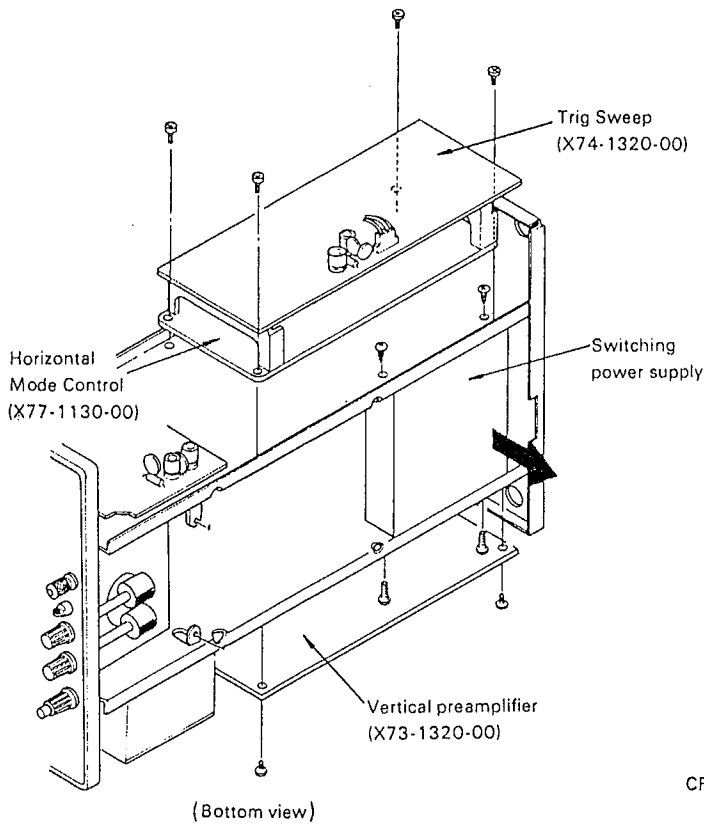


## REPLACING BATTERY

A disc type Lithium battery is installed in the horizontal mode control unit (X77-1130-00). The voltage of the battery is 2.7V. When the voltage drops to 2.0V, replace the battery.

Before replacing the battery, set the unit to the operation mode and confirm that each switch with built-in LED is set correctly.

To remove or install the battery, apply a soldering iron to the parts side of the P.C.B. When installing the battery, observe the polarity. The polarity is indicated on the parts side of the P.C.B.

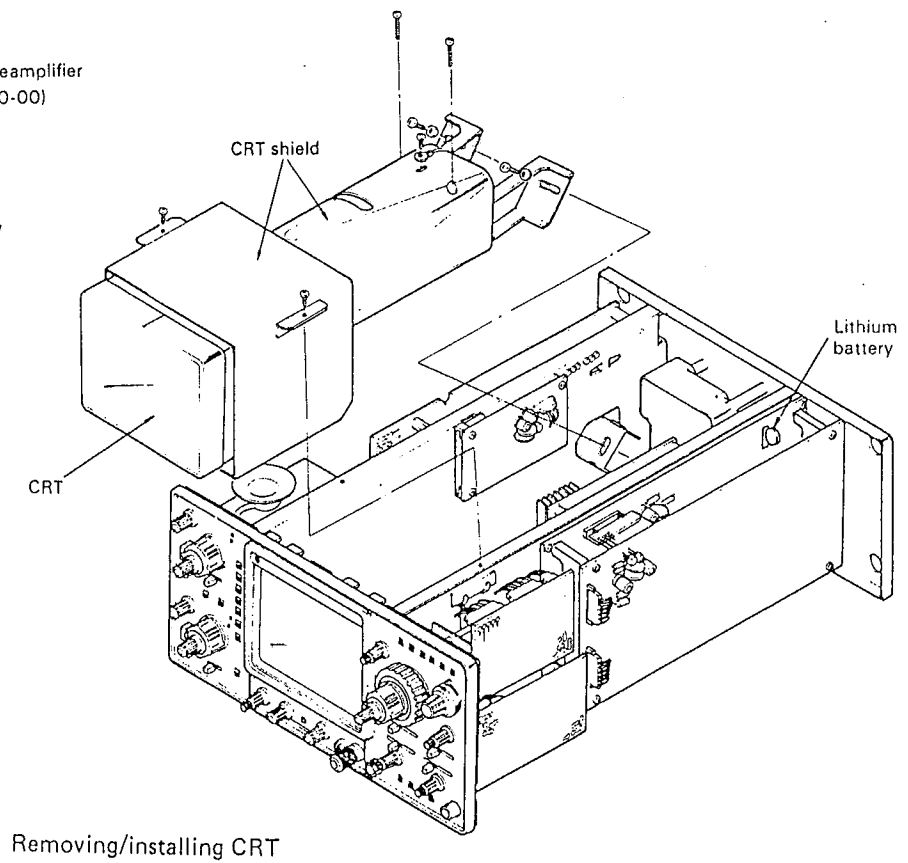

# ADJUSTMENT

To obtain the best performance, periodically accurately calibrate the unit.

Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated.

When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer.

For optimum adjustment, turn the power on and warm up the CS-2100 sufficiently (more than 30 minutes) before starting.

## CAUTION:

Calibrate the unit under the following condition.

Temperature: 10 — 35°C

Humidity: Less than 85%

## POWER SUPPLY VOLTAGE

Before calibrating the unit, check the power supply voltage.

Voltage selector: LOW: 90 — 132V

HIGH: 180 — 264V

50/60 Hz

## TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustments.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-720 (TRIO)	Impedance: More than 10 MΩ, Measuring range: 0.01V to 199V
Sine-Wave Generator	SG-502 (Tektronix)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50Ω, constant voltage over tuning range.
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within ±1%, Rise time: 35ns or less (1 MHz, 1ns or less)
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-911A (TRIO)	—
Oscilloscope	475A (Tektronix)	Sensitivity: More than 5 mV Frequency response: More than 250 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5s to 0.1μs repetitive waveform, accuracy: within 0.1%
High-Voltage Probe	—	Input Impedance: 1000 MΩ
Termination	TA-57 (TRIO)	Impedance: 50Ω
Attenuator	011-0059-02 (Tektronix)	—20 dB attenuation (50Ω)

Test Equipment	Model	Minimum Specification
Power Meter	2041 (YEW)	—
Auto transformer (variable)	SD-265 (Matsunaga)	—
Current Probe	P6302 AM-503 (Tektronix)	—
Frequency Counter	FC-754A (TRIO)	—

## PREPARATION FOR ADJUSTMENT

### Control Setting

The control settings listed below must be used for each adjustment procedure. Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.

### Power Section

POWER ON

### CRT Control Section

A INTEN Between 12 and 3 o'clock position  
 B INTEN Between 12 and 3 o'clock position  
 FOCUS Optimum position  
 SCALE ILLUM Arbitrary position  
 BEAM FINDER OFF

### Vertical Section

VARIABLE (CH1 and CH2) CAL  
 ↕ POSITION (CH1 and CH2) 12 o'clock position  
 AC-GND-DC (CH1 and CH2) AC  
 PUSH 50Ω (CH1 and CH2) OFF ( — )  
 VOLTS/DIV (CH1 and CH2) 5V/DIV  
 × 5 GAIN OFF

### Horizontal Sweep Section

A SWEEP TIME/DIV 0.1ms/DIV  
 B SWEEP TIME/DIV 0.1ms/DIV  
 A VAR CAL  
 DELAY TIME MULTIPLIER Arbitrary position  
 ↕ TRACE SEP. Fully CCW  
 HOLDOFF NORM  
 B ENDS A OFF  
 ◀ POSITION 12 o'clock position  
 FINE PULL × 10 MAG 12 o'clock position ( × 10 MAG OFF)  
 PULL CHOP F. SELECT OFF


### TRIG. Section

A TRIG SOURCE V. MODE  
 A COUPLING AC  
 A TRIG LEVEL 12 o'clock position  
 A TRIG SLOPE +  
 FIX (PUSH)  
 B TRIG SOURCE CH1  
 B COUPLING AC  
 B TRIG LEVEL 12 o'clock position  
 B TRIG.SLOPE +  
 STARTS AFTER DELAY (PUSH)




### Mode Section

V. MODE CH1  
 20MHz BW OFF  
 CH2 INV OFF  
 TRIG. MODE AUTO  
 HORIZONTAL DISPLAY A

## ADJUSTMENT

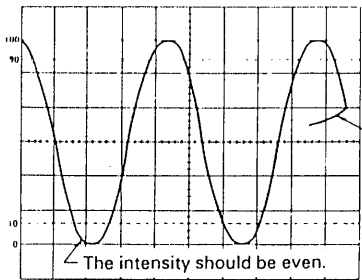
Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark																											
<b>ADJUSTMENT OF POWER SUPPLY AND CRT</b>																																		
Checking of Power Supply		X68-1310	475A DL-720		(1) Measurement and checking of voltages at P27 and P30 pins <table border="1" style="margin-left: 20px; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th>1P</th> <th>2P</th> <th>3P</th> <th>4P</th> <th>5P</th> <th>6P</th> <th>7P</th> <th>8P</th> </tr> </thead> <tbody> <tr> <td>P27</td> <td>+120V</td> <td>+55±1V</td> <td>20V</td> <td></td> <td></td> <td>5.2V</td> <td>10V</td> <td>-10V</td> </tr> <tr> <td>P30</td> <td>24V±2V</td> <td>55V</td> <td>+130V ±3V</td> <td></td> <td>7V±0.5V</td> <td>12V +1.5V-0.5V</td> <td>-12V +0.5V-1.5V</td> <td></td> </tr> </tbody> </table>		1P	2P	3P	4P	5P	6P	7P	8P	P27	+120V	+55±1V	20V			5.2V	10V	-10V	P30	24V±2V	55V	+130V ±3V		7V±0.5V	12V +1.5V-0.5V	-12V +0.5V-1.5V			
	1P	2P	3P	4P	5P	6P	7P	8P																										
P27	+120V	+55±1V	20V			5.2V	10V	-10V																										
P30	24V±2V	55V	+130V ±3V		7V±0.5V	12V +1.5V-0.5V	-12V +0.5V-1.5V																											
Adjustment of 1.7kV	VR7	X68-1310	DL-720 High voltage probe		(2) Measure the voltage on 2P of P33 and adjust VR7 to obtain 1.75 kV (1.75kV~1.755 kV).																													
Coarse adjustment of ASTIG and FOCUS	VR9 FOCUS Knob	X68-1310		H. DISPLAY: X-Y CH1, CH2 AC-GND-DC: GND A INTENSITY: 3 o'clock 20MHz BW: ON	(1) Operate $\updownarrow$ POSITION knobs for CH1 and CH2 to position the spot in the center of the CRT screen. (2) Adjust VR9 to make the spot round and smaller.																													
Adjustment of A INTENSITY	VR5	X68-1310		H.DISPLAY: X-Y A. INTENSITY: 9 o'clock CH1, CH2 AC-GND-DC: GND 20MHz BW: ON	Adjust VR5 so that the spot on the CRT screen disappears when A INTENSITY is set in the position of 9 o'clock. < Check > (1) Make sure that the spot on the CRT screen increases in brightness when A INTENSITY is turned CW and that the trace becomes almost extinguished when A INTENSITY is turned CCW (9 o'clock position).																													
Checking of B INTENSITY				H. DISPLAY: ALT V. MODE: CH1 TRIG. MODE: AUTO STARTS AFTER DELAY: PULL CH1, AC-GND-DC: AC B SWEEP TIME/DIV: 0.1ms	(1) Operate $\updownarrow$ TRACE SEP to cause B sweep line in the center of the CRT screen. (2) Make adjust so that the trace becomes extinguished when B INTENSITY is turned to fully CCW. when B INTENSITY is turned CCW. (3) Make adjust so that the trace becomes extinguished when B INTENSITY is turned to fully CCW.																													
Adjustment of Blanking	TC2	X68-1310	SG-502	H.DISPLAY: A V.MODE: CH1 TRIG. MODE: AUTO A TRIG SOURCE: V.MODE A COUPLING: AC A INTENSITY: Fully CW CH1, AC-GND-DC: AC A SWEEP TIME/DIV: 0.02 $\mu$ s	(1) Apply a sine wave signal of 10 MHz to CH1 INPUT and operate $\updownarrow$ POSITION, $\leftrightarrow$ POSITION and CH1 VOLTS/DIV to bring out a waveform with a vertical amplitude of 6 div on the screen. (2) Make adjustment so that there is no unevenness in intensity of the trace at the waveform starting point and there is no retrace.																													
Adjustment of Z-axis Input Blanking	TC1	X68-1310	SG-503	H. DISPLAY: A V. MODE: CH1 : TRIG. MODE: AUTO A. TRIG; SOURCE: V. MODE CH1 AC-GND-DC: DC VOLTS/DIV: 2V	(1) Set A SWEEP TIME/DIV at 5 $\mu$ s and apply a 1MHz sine wave signal of 10Vp-p to CH1 INPUT so that a waveform with a vertical amplitude of 5 div appears on the screen. (2) Apply the same signal above to the Z INPUT, and turn A INTENSITY CCW so that the dark and bright area of the waveform are distinct. (3) Adjust so that the bright area of the sine waveform is symmetrical to the peak point.																													

## ADJUSTMENT

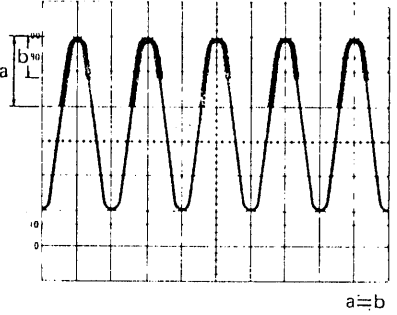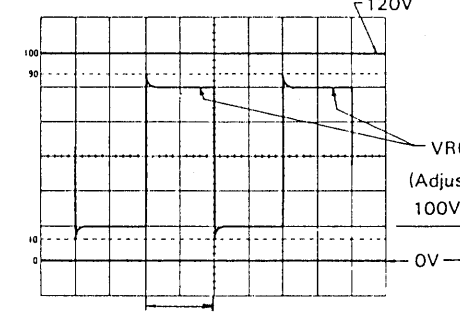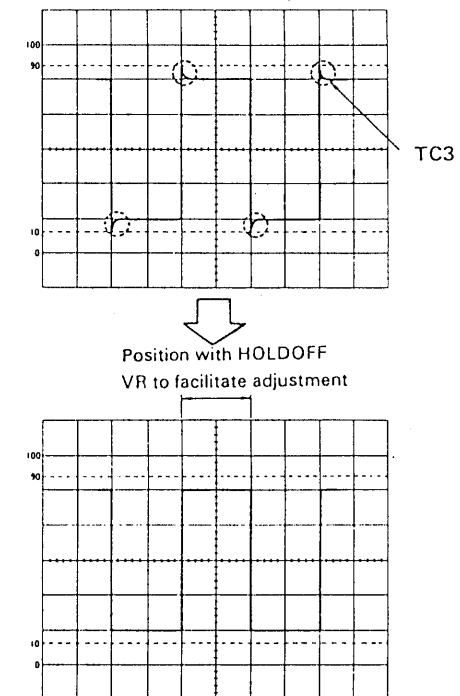Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
							
Adjustment of Auto FOCUS Level	VR6	X68-1310	475A Probe (1/10)	H. DISPLAY: A A. INTENSITY: Fully CW TRIG. MODE: AUTO V. MODE: CH1: A. TRIG SOURCE: V. MODE A. SWEEP TIME/DIV: 20 $\mu$ s HOLDOFF: NORM	<ol style="list-style-type: none"> <li>(1) Set the oscilloscope (475A) for the vertical axis sensitivity at 2V/div.</li> <li>(2) Observe the waveform of AUTO FOCUS circuit (Autofocus test point FTP marked pattern) with a probe and make adjustment so that DC level of top of the square wave is approx. 100V (4.5~5 div.)</li> </ol>		<p>&lt; Note &gt; Be sure that the AC-GND-DC selector switch of the oscilloscope (475A) is at "DC" position.</p>
Adjustment of Auto FOCUS wave Forming	TC3	X68-1310		H. DISPLAY: A A INTENSITY: Fully CW TRIG MODE: AUTO V. MODE: CH1 A. TRIG SOURCE: V.MODE A SWEEP TIME/DIV: 20 $\mu$ s HOLD OFF: NORM	Make adjustment so that the above-mentioned circuit has an ideal waveform.		
Adjustment of ASTIG and FOCUS	VR9 FOCUS knob	X68-1310		H. DISPLAY: X-Y CH1, CH2 AC-GND-DC: GND A. INTENSITY: 3 o'clock	<ol style="list-style-type: none"> <li>(1) Operate <math>\updownarrow</math> POSITION for CH1 and CH2 so that the bright spot is brought into the center of the CRT screen.</li> <li>(2) Make adjustment to make the spot round and smaller.</li> </ol> <p>&lt; Check &gt;</p> <ol style="list-style-type: none"> <li>(1) Make sure that the bright spot grows larger when the FOCUS knob is turned CW or CCW.</li> <li>(2) Make sure that the FOCUS knob is in a position within the range of 9 and 3 o'clock when the spot is smallest.</li> <li>(3) The most ideal point should be obtained by repeating the above operations and adjustment.</li> </ol>		<p>&lt; Note &gt; Be sure to bring the bright spot into the center of the CRT screen. It may be difficult to obtain the correct adjusting position near the edge of the screen due to the CRT peripheral blur.</p>



## ADJUSTMENT

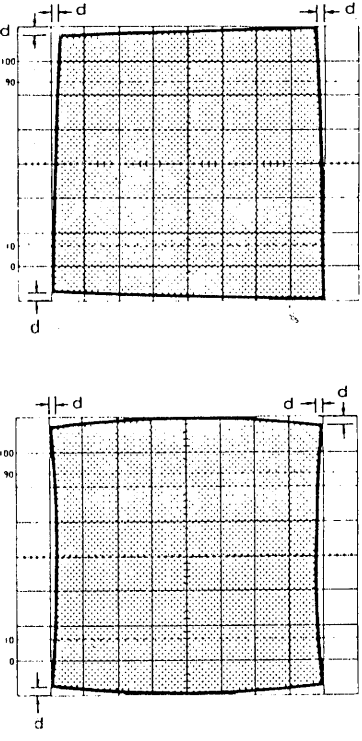Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of Trace Rotation	VR2	X68-1310		H.DISPLAY: A V. MODE: CH1 TRIG. MODE: AUTO CH1, AC-GND-DC; GND	(1) Operate $\updownarrow$ POSITION for CH1 to move the trace to the center of the CRT screen. (2) Make adjustment to align the trace with the horizontal center graticule line. < Check > (1) Make sure that the trace moves more than 0.5 div ( $10^\circ$ ) up and down from the horizontal center graticule line at its righthand end.		< Note > When the trace does not appear fully across the screen, make proper adjustment by operating VR9 (X74-1320) and VR7 (X74-1320)
Adjustment of Perpendicularity	VR3	X68-1310	SG-502	H. DISPLAY: X-Y CH1, CH2 AC-GND-DC: AC	(1) Apply a 1 kHz sine wave to CH1 INPUT and adjust the oscillator (SG-502) output to produce a waveform with a vertical amplitude of 8 div. (2) Operate $\updownarrow$ POSITION knobs for CH1 and CH2 to produce a trace in the center of the CRT screen. (3) Make adjustment so that the trace is vertical (within $90^\circ \pm 1^\circ$ ) < Check > Make sure that the trace moves more than 0.1 div left and right at the topmost end of the vertical center graticule line. Readjust the trace rotation.		
Adjustment of Pattern Distortion	VR10	X68-1310	SG-502	H.DISPLAY: X-Y CH1, CH2 AC-GND-DC: AC	(1) Apply a sine wave signal of 100 kHz to CH1 INPUT and a sine wave signal of 1 kHz to CH2 INPUT and adjust the oscillator output to produce a square with the sides of 8 div on the CRT screen. (2) Adjust VR10 so that the horizontal and vertical bendings are less than 0.2 div.	 <p style="text-align: center;"><math>d = 0.2 \text{ div. or less}</math></p>	




## ADJUSTMENT

Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of CRT Center	VR1	X73-1330		H. DISPLAY: A V. MODE: CH1 TRIG. MODE: AUTO CH1. AC-GND-DC: GND	Short-circuit the test point of X73-1320 and adjust VR1 so that the trace becomes aligned with the horizontal center graticule line.		
ADJUSTMENT OF VERTICAL AXIS (I)							
Adjustment of CH1 DC BAL	VR1	X75-1120		H. DISPLAY: A V. MODE: CH1 TRIG. MODE: AUTO CH1. AC-GND-DC: GND CH1. VOLTS/DIV: 5mV	(1) Turn CH1 VARIABLE knob to fully CCW. (2) Adjust CH1 $\downarrow$ POSITION so that the trace becomes aligned with the horizontal center graticule line on the CRT screen. (3) Turn VARIABLE to CAL and make adjustment so that the trace becomes aligned with the horizontal center graticule line on the CRT screen. (4) Repeat the above procedure.  < Check > Movement of trace Less than 0.2 div.		< Note > If the trace does not come to the center of the screen even when $\downarrow$ POSITION is operated, adjust VR4 (X73-1320).
Adjustment of CH2 DC BAL	VR2	X75-1120		H. DISPLAY: A V. MODE: CH2 TRIG. MODE: AUTO CH2. AC-GND-DC: GND CH2. VOLTS/DIV: 5 mV	Same with the adjustment of CH1 DC BAL		< Note > CH2 position center can be adjusted by VR14 (X73-1-320).
Adjustment of CH1 Gain	VR3	X73-1320	BNC-BNC cord T junction PG-506	H. DISPLAY: A V. MODE: CH1 TRIG. MODE: AUTO A. TRIG SOURCE: V.MODE CH1. AC-GND-DC: DC CH1. VOLTS/DIV: 5mV V. VAR: CAL PUSH 50 $\Omega$ : OFF 20 MHz BW: ON	(1) Apply a square wave signal of 20 mVp-p, 1 kHz to CH1 and CH2 INPUT. (2) V. MODE select to CH1 and operate CH1 and CH2 $\downarrow$ POSITION to produce a waveform in the center of the CRT screen. (3) Synchronize by operating A TRIG LEVEL. (4) Adjust VR3 so that the vertical amplitude of the waveform becomes 4 div.  < Check > Turn CH1 VOLTS/DIV and input a reference signal so that the vertical amplitude will be 4 to 6 div in each range. Sensitivity error within $\pm 3\%$		< Reference > Method of calculation of sensitivity error Sensitivity error = $\frac{a - b}{b} \times 100\%$ a = CRT screen amplitude b = Input signal voltage / (VOLTS/DIV) (Example): CRT screen amplitude: 4.2 div Input signal: 20mVp-p 1 kHz square wave VOLTS/DIV: 5mV Sensitivity error = $\frac{4.2 \text{ div} - 20\text{mV}/5\text{mV}}{20\text{mV}/5\text{mV}} \times 100 = 5\%$
Adjustment of CH2 Gain	VR13	X73-1320		H. DISPLAY: A V. MODE: CH2 TRIG MODE: AUTO A TRIG SOURCE: V.MODE CH2 AC-GND-DC: DC CH2 VOLTS/DIV: 5mV V. VAR: CAL PUSH 50 $\Omega$ : OFF 20 MHz BW: ON	(1) With V. MODE selected to CH2, turn VOLTS/DIV to 5mV and perform the same operations as described above to make adjustment and check.  < Check > (1) Select V. MODE to DUAL and ALT position and turn VOLTS/DIV for CH1 and CH2 and apply a square wave of 20mVp-p, 1 kHz to CH1 INPUT. Make sure that CH1 and CH2 have the same amplitude.		< Note > Overshoot or tilt might appear to the reference signal of 1 kHz square wave. In this case, make coarse adjustment of square wave characteristics.



## ADJUSTMENT

Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
					(2) Switch V. MODE to ADD and A. TRIG SOURCE to CH1 (CH2) and press CH2 INV pushbutton switch (the lamp will go on when this switch is pressed and it will go off when pressed again). Operate $\downarrow$ POSITION for CH1 and CH2 to produce a single trace in the center of the CRT screen. If a single and straight trace cannot be obtained, adjust VR3 again. Channel error: Within 3%		
Adjustment of CH1 $\downarrow$ POSITION and CH2 $\downarrow$ POSITION	VR4 VR14	X73-1320 X73-1320		V. MODE: DUAL, ALT H.DISPLAY: A TRIG.MODE: AUTO CH1, CH2 VOLTS/DIV: 5mV CH1, CH2 AC-GND-DC: GND CH1, CH2 $\downarrow$ POSITION: 12 o'clock A SWEEP TIME/DIV: 0.1ms	Adjust VR4 and VR14 so that the CH1 and CH2 traces become aligned with the horizontal center graticule line on the CRT screen. < Check > (1) The deviation from the horizontal center graticule line on the CRT screen must be within $\pm 1$ div. (2) When $\downarrow$ POSITION for both CH1 and CH2 is turned fully CW, the trace must move upward more than 4 div and when the knob is turned fully CCW the trace must move downward more than 4 div.		
Adjustment of CH2 INV Position	VR15	X73-1320			Press CH2 INV (the lamp is on) and adjust VR15 to bring the trace to its position at CH2 NORM (the lamp is off). < Check > (1) Vertical deviation between CH2 NORM and INV : within $\pm 0.5$ div (2) Press CH2 INV and turn CH2 $\downarrow$ POSITION fully CW and see if the trace moves more than 4. div upward and it moves more than 4 div downward when the knob is turned fully CCW.		
Adjustment of CH1 X5 Gain and CH2 X5 Gain	VR6 VR17	X73-1320 X73-1320	PG-506	H. DISPLAY: A V. MODE: DUAL, ALT TRIG.MODE: AUTO CH1, CH2 VOLTS/DIV: 5mV CH1, CH2 AC-GND-DC: DC CH1, CH2 X5 GAIN: PULL A SWEEP TIME/DIV: 0.2ms V.VAR: CAL CH1, CH2 PUSH 50 $\Omega$ : OFF	(1) Apply a square wave signal of 5 mVp-p to CH1 INPUT and make adjustment so that the CRT screen amplitude becomes 5 div. (2) Apply the same signal to CH2 and make the similar adjustment. < Check > (1) The sensitivity error must be within $\pm 3\%$ . (2) For both CH1 and CH2, the lamp must go on when PULL X5 GAIN is pulled and go off when the button is pressed. (3) The UNCAL lamp must go off when VARIABLE is operated to CAL and go on when the knob is turned to UNCAL. (CCW)		< Note > If no waveform appears on the screen when the knob is pulled, make coarse adjustment by operating X5 Gain Position Adjustment. CH1: VR5 (X73-1320) CH2: VR16 (X73-1320)
Adjustment of CH1 X 5 Gain Position and CH2 X 5 Gain Position	VR5 VR16	X73-1320 X73-1320		H. DISPLAY: A V. MODE: DUAL, ALT TRIG. MODE: AUTO CH1, CH2 VOLTS/DIV: 5mV CH1, CH2 AC-GND-DC: GND CH1, CH2 X5 GAIN: PULL CH1, CH2 $\downarrow$ POSITION: 12 o'clock A SWEEP TIME/DIV: 0.1ms	Adjust VR5 and VR16 so that the trace of CH1 and CH2 become aligned with the horizontal center graticule line on the CRT screen. < Check > The distance from the center graticule line must be within $\pm 1$ div.		< Note > If sometimes happens that the trace grows thicker at X5 GAIN, thus making it difficult to obtain proper adjustment. In this case, press 20 MHz BW (the lamp is on) button switch to make the line thinner.


## ADJUSTMENT

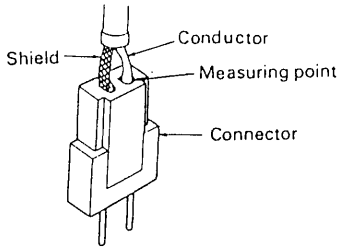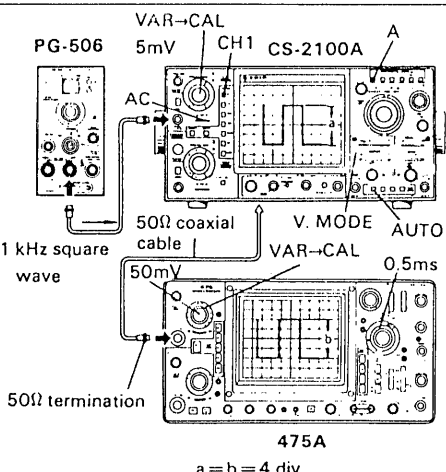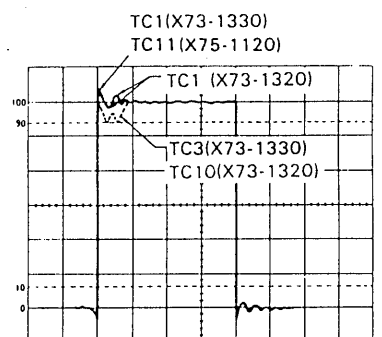Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark															
Adjustment of CH1 DC Trig Level CH2 DC Trig Level CH3 DC Trig Level CH4 DC Trig Level	VR7 VR19 VR10 VR20	X73-1320 X73-1320 X73-1320 X73-1320	DL-720	H. DISPLAY: A V. MODE: QUAD CH1, CH2 AC-GND-DC: GND TRIG. MODE: AUTO	(1) Operate CH1 and CH2 $\updownarrow$ POSITION and CH3 and CH4 $\updownarrow$ POSITION to align the trace with each other on the center of the CRT screen. (2) Make adjustment so that the voltage at all the check points may be zero ( $-0.008 \sim +0.008V$ ). <table border="1" style="margin: 5px auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Item of Adj.</th> <th>Adj. Control</th> <th>Check point</th> </tr> </thead> <tbody> <tr> <td>CH1 DC Trig Level</td> <td>VR7</td> <td>P15 (X73-1320)</td> </tr> <tr> <td>CH2 DC Trig Level</td> <td>VR19</td> <td>P16 (X73-1320)</td> </tr> <tr> <td>CH3 DC Trig Level</td> <td>VR10</td> <td>P17 (X73-1320)</td> </tr> <tr> <td>CH4 DC Trig Level</td> <td>VR20</td> <td>P18 (X73-1320)</td> </tr> </tbody> </table>	Item of Adj.	Adj. Control	Check point	CH1 DC Trig Level	VR7	P15 (X73-1320)	CH2 DC Trig Level	VR19	P16 (X73-1320)	CH3 DC Trig Level	VR10	P17 (X73-1320)	CH4 DC Trig Level	VR20	P18 (X73-1320)		< Note > Use the connector lead for making measurement at the check points. Adjust the voltage in the conductor to zero.
Item of Adj.	Adj. Control	Check point																				
CH1 DC Trig Level	VR7	P15 (X73-1320)																				
CH2 DC Trig Level	VR19	P16 (X73-1320)																				
CH3 DC Trig Level	VR10	P17 (X73-1320)																				
CH4 DC Trig Level	VR20	P18 (X73-1320)																				
Adjustment of V. MODE Trig DC Level	VR22	X73-1320		V. MODE: CH1 CH1, AC-GND-DC: GND	(1) Operate CH1 $\updownarrow$ POSITION to align the trace with horizontal center graticule line on the CRT screen. (2) Make adjustment so that the voltage in the conductor of the connector P19 is zero ( $-0.008 \sim +0.008V$ ).																	
Adjustment of CH1 OUT Gain	VR8	X73-1320	475A 50 $\Omega$ Termination 50 $\Omega$ coaxial cable PG-506	H.DISPLAY: A V. MODE: CH1 TRIG MODE: AUTO CH1 AC-GND-DC: AC CH1 VOLTS/DIV: 5mV V. VAR: CAL	(1) Set the vertical axis sensitivity of oscilloscope (475A) to 50mV and AC-GND-DC to DC. (2) Connect the cable to CH1 OUT on the rear panel of CS-2100 and oscilloscope (475A) via the 50 $\Omega$ termination. (3) Apply a 1 kHz square wave signal to CH1 INPUT and adjust the oscillator output and $\updownarrow$ POSITION so that the amplitude may be 2 div upward and downward from the horizontal center graticule line on the CRT screen. (4) Make adjustment so that the oscilloscope (475A) waveform becomes 4 div.																	
Adjustment of CH1 OUT DC Level	VR9	X73-1320	DL-720	H.DISPLAY: A V. MODE: CH1 CH1 AC-GND-DC: GND TRIG. MODE: AUTO	(1) Operate CH1 $\updownarrow$ POSITION to align the trace with the horizontal center graticule line on the CRT screen. (2) Make adjustment so that the voltage in the connector P21 (X73-1320) becomes less than 0V ( $\pm 10mV$ ).																	
Adjustment of Square wave Characteristics of CH1 5mV and 0.5V Ranges	TC3 TC1 TC10 TC11 TC1 TC9 TC7 TC23	X73-1330 X73-1320 X73-1320 X75-1120 X73-1330 X73-1320 X75-1120 X75-1120	PG-506 50 $\Omega$ 20dB Attenuator 50 $\Omega$ coaxial cable (BNC-BNC)	H. DISPLAY: A TRIG MODE: AUTO CH1, AC-GND-DC: DC CH1, VOLTS/DIV: 5mV A TRIG SOURCE: CH1 COUPLING: AC A TRIG SLOPE : + V VAR: CAL PUSH 50 $\Omega$ : ON	(1) Set V. MODE to CH1 and repeatedly apply a 1 MHz squarewave signal to CH1 INPUT from the squarewave oscillator and adjust the oscillator output so that the amplitude becomes 6 div. In doing this, the input terminal must be terminated to match the output impedance of the oscillator. When the output impedance is 50 $\Omega$ termination or depress the PUSH 50 $\Omega$ button. (2) Adjust TC3, TC1, TC10, TC11 and TC1 to shape the square wave on the CRT screen (CS-2100A) as illustrated at right. (3) Rotate VOLTS/DIV to 0.5V and adjust TC7, TC23 so that the quality of square waveform becomes the best.		(1) Adjust A SWEEP TIME/DIV between 0.02 $\mu s$ and 0.2 $\mu s$ so that the waveform is visible. (2) As all measuring instruments are affected, repeat the adjustment individually.															


## ADJUSTMENT

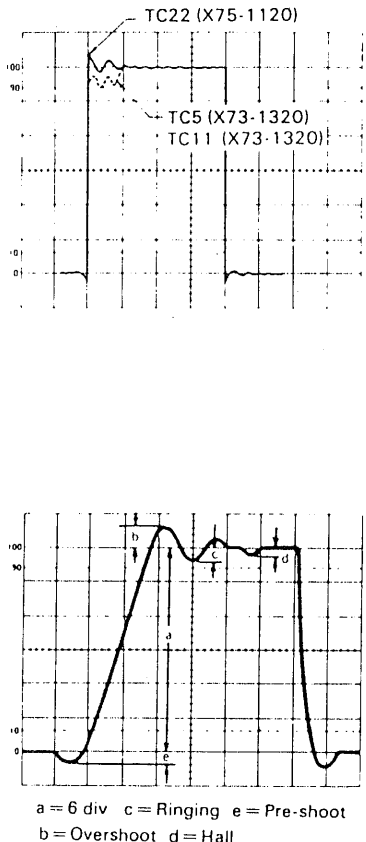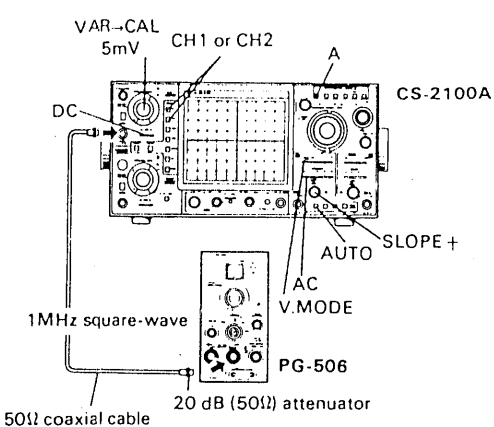Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of Square wave Characteristics of CH2 5mV and 0.5V Ranges	TC5 TC22 TC11 TC18 TC24	X73-1320 X75-1120 X73-1320 X75-1120 X75-1120	PG-506 50Ω, 20dB Attenuator 50Ω coaxial cable (BNC-BNC)	H. DISPLAY: A TRIG MODE: AUTO CH2, AC-GND-DC: DC CH2, VOLTS/DIV: 5mV A TRIG SOURCE: CH2 COUPLING: AC A TRIG SLOPE: + V. VAR: CAL PUSH 50Ω: ON	<p>(1) Set V. MODE to CH2 and make adjustment to obtain the same waveform as in the case of CH1.</p> <p>(2) Rotate the VOLTS/DIN to 0.5V and adjust TC18 and TC24 to obtain the same waveform as in the case of CH1</p> <p>&lt; Check &gt;</p> <p>(1) With VOLTS/DIV remaining at 5mV, check the waveform quality when A. SWEEP TIME/DIV is changed by varying the squarewave frequency, from 100kHz to 10kHz, 1kHz and back to 100Hz sequentially.</p> <p style="border: 1px solid black; display: inline-block; padding: 2px;">Overshoot Less than 8%</p>	 <p style="font-size: small;">a = 6 div c = Ringing e = Pre-shoot b = Overshoot d = Hall</p>	
Adjustment of Square wave Characteristics of CH1 X5 GAIN	TC2	X73-1320	PG-506 50Ω, 20dB Attenuator 50Ω coaxial cable (BNC-BNC)	H. DISPLAY: A TRIG MODE: AUTO CH1, AC-GND-DC: DC CH1, VOLTS/DIV: 5mV A TRIG SOURCE: CH1 COUPLING: AC A TRIG SLOPE: + V. VAR: CAL PUSH 50Ω: ON	<p>(1) With V. MODE being set to CH1, pull the PULL X5 GAIN and apply 1 MHz squarewave signal to CH1 INPUT to produce a waveform quality of 6 div on the CRT screen.</p> <p>(2) Make adjustment to improve the waveform quality</p> <p>&lt; Check &gt;</p> <p style="border: 1px solid black; display: inline-block; padding: 2px;">Overshoot less than 8%.</p>		< Note > Terminate the input terminal of oscilloscope to match the output impedance of the oscillator.
Adjustment of Square wave Characteristics of CH2 X5 GAIN	TC6	X73-1320		A TRIG SOURCE: CH2 Same as CH1 setting	<p>(1) With V. MODE set to CH2, apply 1 MHz square wave signal to CH2 INPUT and make the same adjustment as in the case of CH1.</p> <p>&lt; Check &gt;</p> <p style="border: 1px solid black; display: inline-block; padding: 2px;">Overshoot less than 8%.</p>		

## ADJUSTMENT

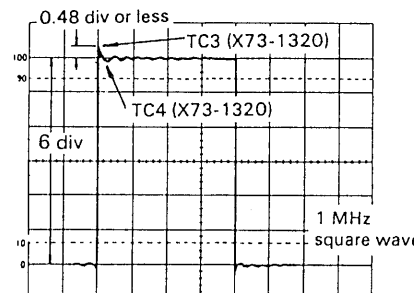Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark																																																																								
Adjustment of CH1 ATT CH2 ATT		X75-1120	4343B PG-506	H.DISPLAY: A CH1 AC-GND-DC: DC A TRIG SOURCE: V. MODE A SWEEP TIME/DIV: 0.2ms V.VAR: CAL	<p>(1) Shaping of waveform Apply 1 kHz squarewave signal to CH1 and CH2 INPUT and adjust the oscillator output to produce a waveform of 5~6 div. In doing this, make adjustment so that the waveform quality of each range is equal to that of the 5mV range.</p> <p>(2) Input capacity (28 pF±2 pF) Connect a Q-meter (4343B) to CH1 and CH2 INPUT and make adjustment so that the input capacity of each range is equal to that of the 5mV range.</p> <p>CH1 Reference range: 5mV Range      CH2 Reference range: 5mV Range</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Sequence</th> <th colspan="2">Adjustment</th> <th>Adj. control</th> <th>Sequence</th> <th colspan="2">Adjustment</th> <th>Adj. control</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10mV range</td> <td>Wave Shape</td> <td>TC4</td> <td>1</td> <td>10mV range</td> <td>Wave Shape</td> <td>TC15</td> </tr> <tr> <td>2</td> <td>20mV range</td> <td>Wave Shape</td> <td>TC5</td> <td>2</td> <td>20mV range</td> <td>Wave Shape</td> <td>TC16</td> </tr> <tr> <td>3</td> <td>50mV range</td> <td>Wave Shape</td> <td>TC6</td> <td>3</td> <td>50mV range</td> <td>Wave Shape</td> <td>TC17</td> </tr> <tr> <td>4</td> <td>0.5V range</td> <td>Wave Shape</td> <td>TC10</td> <td>4</td> <td>0.5V range</td> <td>Wave Shape</td> <td>TC21</td> </tr> <tr> <td>5</td> <td>10mV range</td> <td>Input Capacity</td> <td>TC1</td> <td>5</td> <td>10mV range</td> <td>Input Capacity</td> <td>TC12</td> </tr> <tr> <td>6</td> <td>20mV range</td> <td>Input Capacity</td> <td>TC2</td> <td>6</td> <td>20mV range</td> <td>Input Capacity</td> <td>TC13</td> </tr> <tr> <td>7</td> <td>50mV range</td> <td>Input Capacity</td> <td>TC3</td> <td>7</td> <td>50mV range</td> <td>Input Capacity</td> <td>TC14</td> </tr> <tr> <td>8</td> <td>0.5V range</td> <td>Input Capacity</td> <td>TC8</td> <td>8</td> <td>0.5V range</td> <td>Input Capacity</td> <td>TC19</td> </tr> </tbody> </table>	Sequence	Adjustment		Adj. control	Sequence	Adjustment		Adj. control	1	10mV range	Wave Shape	TC4	1	10mV range	Wave Shape	TC15	2	20mV range	Wave Shape	TC5	2	20mV range	Wave Shape	TC16	3	50mV range	Wave Shape	TC6	3	50mV range	Wave Shape	TC17	4	0.5V range	Wave Shape	TC10	4	0.5V range	Wave Shape	TC21	5	10mV range	Input Capacity	TC1	5	10mV range	Input Capacity	TC12	6	20mV range	Input Capacity	TC2	6	20mV range	Input Capacity	TC13	7	50mV range	Input Capacity	TC3	7	50mV range	Input Capacity	TC14	8	0.5V range	Input Capacity	TC8	8	0.5V range	Input Capacity	TC19		<p>&lt; Note &gt;</p> <p>(1) Be sure to make the adjustment with the shield case being fitted in place.</p> <p>(2) If smearing or overshoot occurs to the square wave at 0.1V or 0.2V range, at 0.1V range, adjust TC1 (CH1) or TC12 (CH2) and at 0.2V range, TC2 (CH1) or TC13 (CH2)</p> <p>*Input capacity should be in the specification.</p>
Sequence	Adjustment		Adj. control	Sequence	Adjustment		Adj. control																																																																								
1	10mV range	Wave Shape	TC4	1	10mV range	Wave Shape	TC15																																																																								
2	20mV range	Wave Shape	TC5	2	20mV range	Wave Shape	TC16																																																																								
3	50mV range	Wave Shape	TC6	3	50mV range	Wave Shape	TC17																																																																								
4	0.5V range	Wave Shape	TC10	4	0.5V range	Wave Shape	TC21																																																																								
5	10mV range	Input Capacity	TC1	5	10mV range	Input Capacity	TC12																																																																								
6	20mV range	Input Capacity	TC2	6	20mV range	Input Capacity	TC13																																																																								
7	50mV range	Input Capacity	TC3	7	50mV range	Input Capacity	TC14																																																																								
8	0.5V range	Input Capacity	TC8	8	0.5V range	Input Capacity	TC19																																																																								
<b>ADJUSTMENT OF A, B TRIG AMPLIFIERS</b>																																																																															
Adjustment of CH3 Gain and CH4 Gain	VR11 VR21	X73-1320 X73-1320	PG506	H.DISPLAY: A V.MODE: QUAD. ALT A TRIG SOURCE: 1/1 B TRIG SOURCE: 1/1 A SWEEP TIME/DIV: 0.2ms TRIG MODE: AUTO CH1, CH2 AC-GND-DC: GND	<p>(1) Apply a 1 kHz squarewave signal simultaneously to CH3 and CH4 INPUT and adjust A TRIG LEVEL and B TRIG LEVEL to obtain synchronization. Operate CH3 and CH4 POSITION to bring the pattern to the center of the CRT screen.</p> <p>(2) Make adjustment so that the amplitude of CH3 and CH4 becomes 5 div., respectively.</p> <p>&lt; Check &gt;</p> <p>(1) Sensitivity error must be within ±3%. (See to Reference for the adjustment of CH1 Gain)</p> <p>(2) With A. TRIG SOURCE and B. TRIG SOURCE set to 1/10, make the 1 kHz squarewave signal 5 Vp-p and operate CH3 and CH4 POSITION to bring the waveform to the center of the CRT screen. The amplitude at this time must be within the range of 4.85~5.15 div.</p> <p style="border: 1px solid black; display: inline-block; padding: 2px;">Sensitivity error    within ±3%.</p>		<p>&lt; Note &gt;</p> <p>If tilt or overshoot occurs to the 1 kHz waveform, refer to the section devoted to CH3 and CH4 waveform shaping.</p>																																																																								
CH3 Waveform Shaping	TC3 (A SOURCE 1/10) TC4(Medium range) TC3(Ultra high range)	X77-1130 X73-1320 X73-1320	PG-506	H.DISPLAY: A V. MODE: QUAD. ALT A TRIG SOURCE: 1/1 A SWEEP TIME/DIV: 0.2ms TRIG MODE: AUTO CH1, CH2 AC-GND-DC: GND	<p>(1) Apply a 1 kHz square wave signal of fast rise time to CH3 INPUT and adjust the oscillator output to produce a waveform of 6 div on the CRT screen.</p> <p>(2) With A. SOURCE set to 1/10, produce a waveform of 6 div in the same manner and adjust TC3 to obtain the similar waveform as (1) above.</p> <p>(3) With A. SOURCE to 1/1 adjust the oscillator output and frequency to produce a square waveform of 1 MHz 6 div on the CRT screen and shape the waveform in the medium and ultra-high ranges.</p> <p>&lt; Check &gt;</p> <p style="border: 1px solid black; display: inline-block; padding: 2px;">Overshoot    less than 8%.</p>		<p>&lt; Note &gt;</p> <p>(1) When shaping the waveform, terminate the output terminal of oscillator to match the impedance of the oscillator.</p> <p>(2) Before making 1 MHz wave shape, be sure to adjust input capacity (1/1 and 1/10) (TC1 and TC2)</p>																																																																								

## ADJUSTMENT

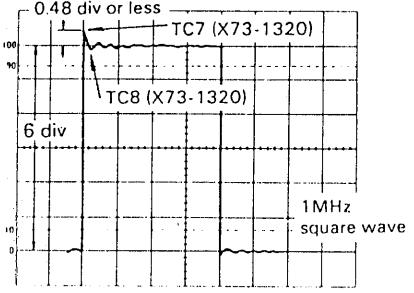Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
CH4 Wave form Shapping	TC6 (B SOURCE 1/10) TC8(Medium range) TC7(Ultra high range)	X77-1130 X73-1320 X73-1320	PG-506	H.DISPLAY: DUAL V.MODE: QUAD.ALT A TRIG SOURCE: 1/1 B TRIG SOURCE: 1/1 A SWEEP TIME/DIV: 0.2ms B SWEEP TIME/DIV: 0.2ms	(1) Apply a 1kHz and 1 MHz square wave signals of fast rise time to CH4 INPUT and take the same steps as in (1) above to shape the waveform.  < Check > Overshoot less than 8%.		< Note > (1) Before making 1 MHz wave shape, be sure to adjust input capacity (1/1 and 1/10) (TC4 and TC5)
Adjustment of CH3 Input Capacity	TC1(1/1) TC2(1/10)	X77-1130 X77-1130	4343B	A TRIG SOURCE: 1/1 B TRIG SOURCE: 1/1	(1) Make adjustment so that the input capacity of CH3 becomes equal to the value of CH1 5mV range ( $28 \pm 2\text{pF}$ ). (2) Adjust the input capacity to become equal to that at 1/1.  < Check > The difference between A SOURCE 1/1 and A SOURCE 1/10 less than 1pF.  It shall be the same with B SOURCE.		< Note > Be sure to make adjustment of input capacity after making 1 kHz square wave waveshape.
Adjustment of CH4 Input Capacity	TC4 (1/1) TC5 (1/10)	X77-1130 X77-1130			Adjust the input capacity in the same manner as CH3.  < Check > Check the input capacity in the same manner as CH3.  Overshoot less than 8%.		< Note > Be sure to make adjustment of input capacity after making 1 kHz square wave waveshape.
ADJUSTMENT OF VERTICAL AXIS (II)							
Check of 1 MHz Square wave Characteristics Square wave Characteristics of CH1 and CH2			PG-506	H.DISPLAY: A A. TRIG SOURCE: V.MODE A.SWEEP TIME/DIV: $0.2\mu\text{s} \sim 0.02\mu\text{s}$  TRIG.MODE: AUTO A COUPLING: AC PUSH 50Ω: ON	(1) Check the squarewave characteristics of CH1 and CH2 5mV range. Turn the VOLTS/DIV knob for each channel to adjust the oscillator output so that CH1 and CH2 will produce a waveform of 6 div, respectively. (2) The overshoot must be less than 8% for each range.		< Note > As the VOLTS/DIV is manually rotated, the amplitude of 6 divs cannot be obtained amplitude.
Square wave Characteristics of CH3 and CH4			50Ω Termination	H. DISPLAY: DUAL V. MODE: QUAD. ALT A. TRIG SOURCE: 1/1 B. TRIG SOURCE: 1/1	(1) Apply a 1 MHz squarewave signal to CH3 and CH4 INPUT and see if the overshoot is less than 8% at this time. (2) The overshoot must be less than 8% when A TRIG SOURCE is turned from 1/1 to 1/10 and B TRIG SOURCE from 1/1 to 1/10.		
Check of CH1 and CH2 Frequency Characteristics			SG-503 50Ω coaxial cable (BNC-BNC) 50Ω 20dB attenuator	H. DISPLAY: A TRIG MODE: AUTO A. TRIG SOURCE: V. MODE A COUPLING: AC CH1, CH2 AC-GND-DC: DC A SWEEP TIME/DIV: $2\mu\text{s} \sim 0.02\mu\text{s}$ PUSH 50Ω: ON	(1) With CH1 VOLTS/DIV set to 5 mV, apply a sine wave signal of 50kHz to INPUT and adjust the oscillator output to produce a waveform of 6 div on the CRT screen. (2) When the frequency is varied to 100 MHz with the oscillator output remaining unchanged, the amplitude on the screen must be over 4.25 div and there must be no sudden dips and peaks during attenuation. (3) Perform the same operations for CH2.  Frequency characteristic 100MHz: less than -3 dB  (4) When the specification are not satisfied, readjust the 1 MHz squarewave characteristics.		

## ADJUSTMENT

Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of CH3 and CH4 Frequency Characteristics	TC7 (CH3, 1/10) VR5 (CH4, 1/10)	X77-1130	SG-503  50Ω Termination	H. DISPLAY: DUAL V.MODE: QUAD.ALT TRIG. MODE: AUTO A TRIG SOURCE: 1/1 B. TRIG SOURCE: 1/1	<ol style="list-style-type: none"> <li>Apply a sine wave signal of 50 kHz to CH3 INPUT and adjust the oscillator output to produce a waveform of 6 div on the CRT screen.</li> <li>When the frequency is changed to 100MHz with the oscillator output remaining unchanged, the amplitude on the screen must be over 4.25 div.</li> <li>With A. TRIG SOURCE to 1/10 position adjust TC7 so that the amplitudes at 100MHz are within the specification limits. <span style="border: 1px solid black; padding: 2px;">Frequency characteristic 100MHz : less than -3 dB</span></li> <li>Perform the same operations for CH4.</li> <li>When the specification are not satisfied, readjust the 1 MHz squarewave characteristics.</li> <li>Perform the same adjustment for B TRIG SOURCE (VR5).</li> </ol>		
Check of CH1 and CH2 X5 GAIN Frequency Characteristics			SG-503	H.DISPLAY: A A TRIG SOURCE: V. MODE TRIG.MODE: AUTO CH1, CH2 AC-GND-DC: DC CH1, CH2 VOLTS/DIV: 5mV CH1, CH2 X5 GAIN: PULL PUSH 50Ω: ON	<ol style="list-style-type: none"> <li>With V. MODE set to CH1, apply a sine wave signal of 50 kHz to CH1 INPUT and adjust the oscillator output to produce a waveform of 6 div on the CRT screen.</li> <li>When the frequency is varied to 100MHz with the oscillator output remaining unchanged, the amplitude on the screen must be over 4.25 div.</li> <li>Set V. MODE to CH2 and make a similar check. <span style="border: 1px solid black; padding: 2px;">X5 GAIN frequency characteristic 100 MHz: less than -3 dB.</span></li> </ol>		
Check of 20MHz BW Frequency Characteristics			SG-503	H.DISPLAY: A V.MODE: CH1 A TRIG SOURCE: V.MODE CH1 AC-GND-DC: DC CH1 VOLTS/DIV: 5mV 20MHz BW: ON TRIG MODE: AUTO PUSH 50Ω: ON	<ol style="list-style-type: none"> <li>Apply a sine wave signal of 50kHz to CH1 INPUT to produce a waveform of 6 div.</li> <li>Vary the frequency of the input signal without changing the oscillator output and read the frequency at which the amplitude on the screen becomes 4.25 div. This frequency must be within the specification limits. <span style="border: 1px solid black; padding: 2px;">20MHz BW Frequency characteristics Frequency of -3 dB: 16 MHz - 24 MHz.</span></li> </ol>		
Adjustment of CH1 OUT Frequency Characteristics	TC9	X73-1320	475A 50Ω Termination (through type) 50Ω coaxial cord (BNC-BNC) SG-503	CH1 AC-GND-DC: AC CH1 VOLTS/DIV: 5mV CH1 POSITION: 12 o'clock PUSH 50Ω: ON	<ol style="list-style-type: none"> <li>With the vertical axis sensitivity of 475A set to 50mV, lead a 50Ω coaxial cable from CH1 OUT and terminate it with 50Ω termination and connect it to CH1 OUT of 475A.</li> <li>Apply a sine wave signal of 50kHz to CH1 INPUT and adjust the oscillator output so that the vertical amplitude of 475A becomes 6 div. When the frequency is varied to 100MHz without changing the oscillator output adjust TC9 so that, the amplitude on the CRT screen of 475A becomes over 4.25 div. <span style="border: 1px solid black; padding: 2px;">CH1 OUT frequency characteristic 100 MHz: less than -3 dB</span></li> </ol>		<p>&lt; Note &gt; If the squarewave characteristics of CH1 PREAMP and V OUTPUT AMP are readjusted the squarewave characteristic and frequency characteristic will also change.</p>







## ADJUSTMENT

Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of CAL Output	VR1 VR2	X77-1130 X77-1130	475A FC-754A DL-720		<ol style="list-style-type: none"> <li>Short-circuit TP2 (X77-1130) and adjust VR1 so that the voltage at CAL output terminal becomes <math>0.3 \pm 1\%</math>.</li> <li>Set the vertical axis sensitivity of 475A to 5mV and the sweep time to 0.2 ms.</li> <li>Lead a probe from the calibration voltage output terminal (CAL) of CS-2100 and connect it to CH1 INPUT of 475A.</li> <li>Adjust VR2 so that the frequency becomes 1 kHz.</li> </ol> <p>&lt; Check &gt;                      Check the duty ratio.                      Frequency: Within 1 kHz <math>\pm 3\%</math>.                      Output voltage: Within 0.3 Vp-p <math>\pm 1\%</math>.                      Duty ratio: Within (50 <math>\pm 2</math>)%</p>		<p>&lt; Note &gt;                      For checking the frequency, a frequency counter (FC-754A) may be used.</p>
<b>ADJUSTMENT OF HORIZONTAL SWEEP</b>							
Coarse Adjustment of A and B Trigger Center and SLOPE  (Coarse Adjustment of A Trigger Center and SLOPE)	VR2	X77-1110	SG-502	H.DISPLAY: A V.MODE: CH1 TRIG MODE: AUTO CH1 AC-GND-DC: AC A SWEEP TIME/DIV: 0.2ms A TRIG SOURCE: V. MODE A COUPLING: AC TRIG LEVEL: 12 o'clock TRIG SLOPE: +	<ol style="list-style-type: none"> <li>Apply a sine wave signal of 1 kHz to CH1 INPUT and adjust the oscilloscope output and <math>\updownarrow</math> position to produce a waveform of amplitude 3 div above and below the horizontal center graticule line on the CRT screen.</li> <li>Adjust VR2 so that the starting point of the waveform is aligned with the horizontal center graticule line on the CRT screen.</li> <li>Set TRIG. SLOPE to (-) and adjust VR3 to bring the starting point to the position of the starting point of the waveform produced when TRIG. SLOPE is set to (+).</li> </ol>	<p>Align the starting point with the horizontal center graticule line</p>	
	VR3	X77-1110					
Coarse Adjustment of B Trigger Center and SLOPE	VR2	X77-1120	SG-502	H.DISPLAY: DUAL V.MODE: CH1 A TRIG SOURCE: V. MODE B TRIG SOURCE: CH1 B COUPLING: AC B TRIG LEVEL: 12 o'clock B TRIG SLOPE: + A SWEEP TIME/DIV: 0.5ms B SWEEP TIME/DIV: 0.2ms TRIG. MODE: AUTO $\updownarrow$ TRACE SEP: NORM	<ol style="list-style-type: none"> <li>Set A. INTEN to Fully CCW.</li> <li>Apply a sine wave signal of 1 kHz to CH1 INPUT and adjust the oscillator output and <math>\updownarrow</math> position to produce a waveform of amplitude 3 div above and below the horizontal center graticule line on the CRT screen.</li> <li>Next, set TRIG. SLOPE to (-) and make adjustment to bring the starting point of the waveform to the position of the starting point of the waveform produce when TRIG. SLOPE is set to (+).</li> </ol>		
	VR3	X77-1120					

## ADJUSTMENT

Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of A Sweep Time	VR9	X74-1320	TG-501	H.DISPLAY: A V.MODE: CH1 A TRIG SOURCE: V. MODE A SWEEP TIME/DIV: 0.5ms TRIG MODE: AUTO A. VAR: CAL	(1) Apply a marker signal of 0.5 ms to CH1 INPUT. (2) Operate $\blacktriangleleft$ POSITION to bring the first peak of the marker signal to the left end of the graticule line and adjust VR9 for the 11th peak to the right end of the graticule line.		< Note > When TG-501 is used, set CH1 AC-GND-DC to AC, VOLTS/DIV to 0.5V/div, depress PUSH 50Ω to obtain an input impedance of 50Ω.
Adjustment of B Sweep Time	VR10	X74-1320	TG-501	H.DISPLAY: DUAL V.MODE: CH1 A. TRIG SOURCE: V. MODE B. TRIG SOURCE: CH1 A SWEEP TIME/DIV: 0.5ms B SWEEP TIME/DIV: 0.5ms TRIG.MODE: AUTO A,B TRIG.SLOPE: + A,B INTEN: Fully CW	(1) Apply a marker signal of 0.5 ms to CH1 INPUT. (2) On the screen A and B sweeps of CH1 input signal will appear. Operate $\blacktriangledown$ TRACE SEP to bring these sweeps into the positions where they can be easily adjusted. (3) Make adjustment so that the first peak of B sweep is brought to the left end of the graticule line on the screen and the 11th peak to the right end of graticule line on the screen. (4) Make sure that A and B TRIG'D lamps are on.		< Note > 1. When TG-501 is used, the knobs must be operated in the same manner as described above. 2. If the 11th peak is not visible, adjust VR5 (X74-1220) Sweep Length 3. The B sweep time will not change even if A VAR is turned.
Adjustment of A Sweep Length	VR7	X74-1320		H. DISPLAY: A V. MODE: CH1 A TRIG SOURCE: V. MODE A SWEEP TIME/DIV: 0.5ms TRIG MODE: AUTO	(1) Apply a marker signal of 0.5 ms to CH1 INPUT. (2) Make adjustment so that the total length is 11 div.		< Note > Turn $\blacktriangleleft$ POSITION to shift the base line two markers to the left then you can see the 12th time marker with the graticule area.
Adjustment of B Sweep Length	VR8	X74-1320		H. DISPLAY: DUAL V. MODE: CH1 A TRIG SOURCE: V. MODE B TRIG SOURCE: CH1 A SWEEP TIME/DIV: 0.5 ms B SWEEP TIME/DIV: 0.5 ms TRIG MODE: AUTO A, B TRIG SLOPE: + A, B INTEN: Fully CW	(1) Apply a marker signal of 0.5 ms to CH1 INPUT. (2) A and B sweeps will appear on the screen. Use $\blacktriangledown$ TRACE SEP to separate them. (3) Make adjustment so that the total length of B sweep is 11 div.		


## ADJUSTMENT

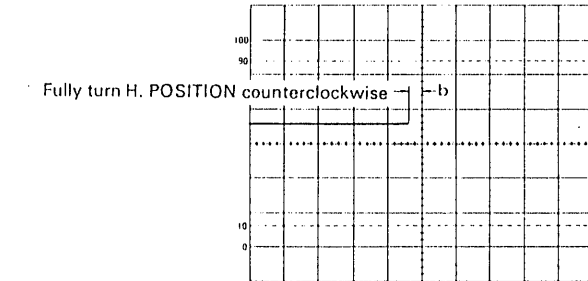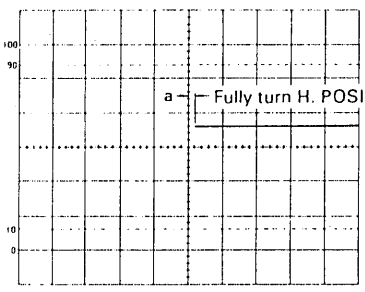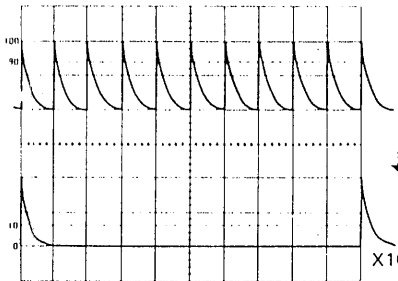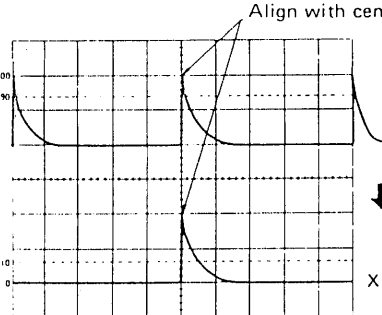Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of A Sweep Position	VR12	X74-1320		H.DISPLAY: A V. MODE: CH1 A TRIG SOURCE: V. MODE A SWEEP TIME/DIV: 0.5 ms TRIG MODE: AUTO	<p>(1) Set CH1 AC-GND-DC to GND to bring the trace to the center of the CRT screen.</p> <p>(2) Set the FINE knob of ◀▶ POSITION to 12 o'clock.</p> <p>(3) Turn ⚡ POSITION fully CW without turning the FINE knob and note the deviation between the starting point of the trace and the center of the screen. Next, turn ◀▶ POSITION fully CCW and measure the distance between the ending point of the trace and the center of the screen. Make adjustment so that these deviations will have the same width.</p> <p>Width error less than 1 div.</p> 	 <p style="text-align: center;">a = b</p>	
Adjustment of B Sweep Position	VR11	X74-1320	TG-501	H.DISPLAY: DUAL V.MODE: CH1 A TRIG SOURCE: V. MODE B TRIG SOURCE: CH1 A,B SWEEP TIME/DIV: 0.5ms TRIG MODE: AUTO A, B TRIG SLOPE: + A, B INTEN: Fully CW	<p>(1) Apply a marker signal of 0.5 ms to CH1 INPUT and align the first peak of A sweep to the leftmost division of the CRT screen.</p> <p>(2) Operate ⚡ TRACE SEP to separate A sweep and B sweep and set A. VAR to CAL.</p> <p>(3) Make adjustment so that the starting point of B sweep is aligned with that of A sweep in the horizontal position.</p> <p>&lt; Check &gt; Operate ⚡ TRACE SEP so that A sweep and B sweep are superimposed on one another and make sure that their starting points coincide with each other.</p>		
Adjustment of X10 MAG Gain	VR13	X74-1320	TG-501	H.DISPLAY: A V.MODE: CH1 A TRIG SOURCE: V.MODE A SWEEP TIME/DIV: 0.1ms TRIG MODE: AUTO CH1, VOLTS/DIV: 1V CH1, AC-GND-DC: DC PUSH 50Ω: PUSH	<p>(1) Apply a marker signal of 0.1 ms to CH1 INPUT to produce a waveform of vertical amplitude of about 2 div.</p> <p>(2) Align the first peak of the marker signal with the left end of the graticule line on the CRT screen and the 11th peak with the right end and pull the X10 MAG switch.</p> <p>(3) Make adjustment so that the peak-to-peak distance is 10 div.</p> <p>&lt; Check &gt; Specification 10 times ±5%</p>	 <p style="text-align: right;">X10 MAG</p>	
Adjustment of X10 MAG Center	VR14	X74-1320		H. DISPLAY: A V. MODE: CH1 A TRIG SOURCE: V. MODE A SWEEP TIME/DIV: 0.1ms A. VAR: CAL TRIG. MODE: AUTO A, TRIG SLOPE: +	<p>(1) Apply a marker signal of 0.5 ms to CH1 INPUT to produce 3 peaks waveform on the CRT screen.</p> <p>(2) Operate ◀▶ POSITION to bring the central peak to the vertical center graticule line on the screen.</p> <p>(3) Make adjustment so that the waveform will be aligned with the vertical center graticule line on the screen when the FINE knob is pulled out (X10 MAG position).</p> <p>&lt; Check &gt; Repeatedly push and pull the FINE knob to make sure that the center of the waveform does not move.</p> <p>Deviation less than 1 div.</p>	 <p style="text-align: right;">X10 MAG</p>	Align with center vertical graticule line.
Adjustment of MAG Center and Gain					Recheck the center at × 10 MAG and Gain.		





## ADJUSTMENT

Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment of A Sweep Time, 50ms, 5 $\mu$ s and 0.1 $\mu$ s.	VR2 (50ms) VR1 (5 $\mu$ s) TC1 (0.1 $\mu$ s)	X74-1320	TG-501	H. DISPLAY: A V. MODE: CH1 A. TRIG SOURCE: V. MODE TRIG. MODE: AUTO A VAR: CAL	(1) With A SWEEP TIME/DIV set to 50ms apply a marker signal of 50ms to CH1 INPUT. (2) Adjust VR2 so that the first peak of the marker signal is aligned with the left end of the graticule on the screen and the 11th peak with the right end. (3) Next, Rotate the A SWEEP TIME/DIV to 5 $\mu$ s and apply a 5 $\mu$ s time marker to CH1 INPUT and adjust VR1 in the same manner as (2). (4) Next, A SWEEP TIME/DIV to 0.1 $\mu$ s and with 0.1 $\mu$ s time marker to CH1 INPUT, adjust TC1 in the same manner as (2).		
Adjustment of B Sweep Time 50ms, 5 $\mu$ s and 0.1 $\mu$ s	VR4 (50ms) VR3 (5 $\mu$ s) TC2 (0.1 $\mu$ s)	X74-1320		H.DISPLAY: DUAL V.MODE: CH1 A TRIG SOURCE: V. MODE B TRIG SOURCE: CH1 A, B TRIG MODE: AUTO A, B TRIG SLOPE: + A, B INTEN: Fully CW	(1) Set A and B SWEEP TIME/DIV to 50ms and apply a marker signal of 50ms to CH1. (2) Operate $\updownarrow$ TRACE SEP to separate A sweep and B sweep to be in the positions where adjustment can be made easily. (3) Adjust VR4 so that the first peak of the marker signal is aligned with the left end of the graticule line on the screen and the 11th peak with the right end. (4) Rotate A. and B. SWEEP TIME/DIV to 5 $\mu$ s and apply a 5 $\mu$ s time marker to CH1 INPUT and adjust VR3 in the same manner as (3). (5) Next, A and B SWEEP TIME/DIV to 0.1 $\mu$ s and with 0.1 $\mu$ s time marker to CH1 INPUT, adjust TC2 in the same manner as (3).		
Adjustment of 0.02 $\mu$ s A Sweep Linearity	TC3	X74-1320		H.DISPLAY: A V.MODE: CH1 A TRIG SOURCE: V MODE A SWEEP TIME/DIV: 0.02 $\mu$ s A. VAR: CAL TRIG. MODE: AUTO A. TRIG SLOPE: +	(1) Apply a marker signal to CH1 INPUT. (2) Make adjustment so that the total length of the waveform is 11 div.		
Adjustment of 0.02 $\mu$ s B Sweep Linearity	TC4	X74-1320		H.DISPLAY: DUAL V.MODE: CH1 A TRIG SOURCE: V. MODE B TRIG SOURCE: CH1 TRIG MODE: AUTO A, B TRIG SLOPE: + A,B INTEN: Fully CW	(1) With A and B SWEEP TIME/DIV to 0.02 $\mu$ s, apply a marker signal of 0.02 $\mu$ s to CH1 INPUT. (2) Operate $\updownarrow$ TRACE SEP to separate A sweep and B sweep into the positions where they can be easily adjusted. (3) Make adjustment so that the total length of the waveform is 11 div.		
Check of Sweep Time Error in All the Range  [I]          [II]				H.DISPLAY: A V. MODE: CH1 A TRIG SOURCE: V. MODE TRIG. MODE: AUTO A VAR: CAL	(1) Apply a reference time marker signal for each range of A SWEEP TIME/DIV. (2) Measure the time error rate and make sure it is within the specification limits. <u>Specification</u> Within $\pm 3\%$ .		
				H. DISPLAY: DUAL V. MODE: CH1 A TRIG SOURCE: V. MODE B TRIG SOURCE: CH1 A. VAR: CAL TRIG. MODE: AUTO A, B TRIG SLOPE: + A, B INTEN: Fully CW	(1) Operate $\updownarrow$ TRACE SEP to separate A sweep and B sweep into the positions where they can be easily adjusted. (2) Apply a reference time marker signal in each of all the ranges (50 ms—0.02 $\mu$ s) of B sweep. (3) Measure the time error rate and make sure it is within the specification limits. <u>Specification</u> Within $\pm 3\%$ .		

## ADJUSTMENT

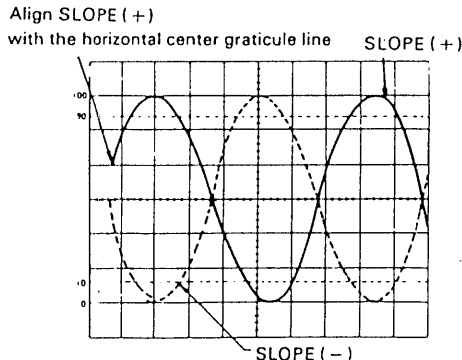Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
<b>ADJUSTMENT OF X - Y OPERATION</b>							
Adjustment of X Position Center	VR15	X74-1320		H.DISPLAY: A V. MODE: DUAL, ALT CH1, CH2 VOLTS/DIV: 5mV CH1, CH2 AC-GND-DC: GND A TRIG SOURCE: CH1 TRIG. MODE: AUTO A SWEEP TIME/DIV: 0.1ms	(1) Operate $\updownarrow$ POSITION for both CH1 and CH2 to superimpose the two traces on one another in the center of the CRT screen. (2) Make adjustment so that the bright spot comes to the center of the screen when H. DISPLAY is switched in X-Y. < Check > Operate CH2 $\updownarrow$ POSITION and make sure that the spot will move as described below. (1) When the knob is turned counterclockwise, the spot moves leftward more than 5 div. (2) When the knob is turned clockwise, the spot moves rightward more than 5 div.		< Note > When making X-Y adjustment, do not set both CH1 and CH2 to X5. GAIN.
Adjustment of X Gain	VR18	X73-1320	PG-506	H.DISPLAY: X-Y CH2 AC-GND-DC: AC CH2 VOLTS/DIV: 5mV	(1) Apply a square wave signal of 20 mVp-p 1 kHz to CH2 INPUT and make adjustment so that the horizontal amplitude is 4 div.		
Readjustment of X Position Center and X Gain					Readjust X position Center and X Gain.		
Check of X Axis Frequency Characteristic			SG-502	H. DISPLAY: X-Y CH2 AC-GND-DC: DC CH2 VOLTS/DIV: 5mV	(1) Apply a sine wave signal of 1 kHz to CH2 INPUT and adjust the oscillator output to produce a waveform of 10 div. (2) When the frequency is varied to 5 MHz without changing the oscillator output, the amplitude must be over 7.1 div (-3 dB).		
<b>ADJUSTMENT OF TRIGGERING</b>							
Adjustment of A Trig Slope	VR3	X77-1110	SG-502	H.DISPLAY: A V.MODE: CH1 A TRIG SOURCE: V. MODE A COUPLING: AC CH1, CH2 AC-GND-DC: AC CH1, CH2 VOLTS/DIV: 5mV A SWEEP TIME/DIV: 0.2ms A TRIG SLOPE: + TRIG MODE: AUTO	(1) Apply a sine wave signal of 1 kHz to CH1 INPUT and adjust the oscillator output to produce a waveform of 4~6 div on the CRT screen. (2) Operate A TRIG LEVEL and CH1 $\updownarrow$ POSITION so that the waveform may have an amplitude equally above and below the horizontal center graticule line on the CRT screen. (3) Set A TRIG SLOPE to (-) and make adjustment so that the starting point of the waveform will be in the position of the starting point of the waveform when A TRIG SLOPE is in the (+) position. < Check > (1) Repeatedly turn the A TRIG SLOPE knob from (+) to (-) and make sure that the starting points are in the same positions. (2) Make sure that the rise slope of the waveform will be synchronized when the A TRIG SLOPE knob is in the (+) position and the fall slope will be synchronized when the knob is in the (-) position. (3) Feed the same signal to CH2 and set V MODE to CH2 to produce a waveform of CH2 and make sure that the rise slope of the waveform is synchronized when the A TRIG SLOPE knob is at (+) and the fall slope is synchronized when it is at (-) position.	Align SLOPE (+) with the horizontal center graticule line SLOPE (+) 	

## ADJUSTMENT

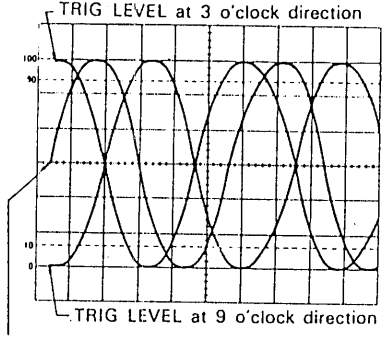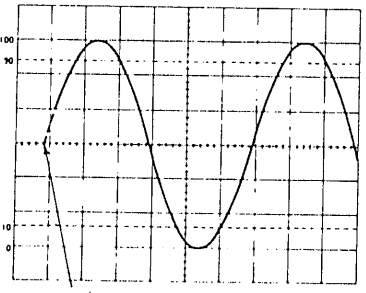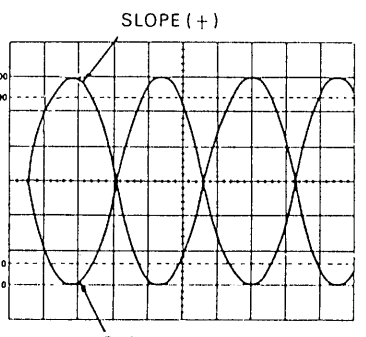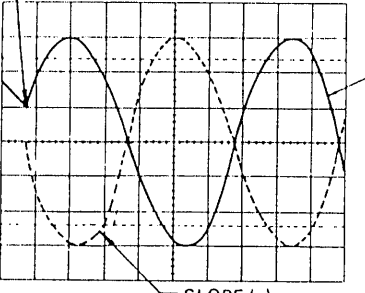Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
Adjustment A Trig Level Center and Fix Sensitivity	VR2 VR4	X77-1110 X77-1110	SG-502	H.DISPLAY: A V.MODE: CH1 A TRIG SOURCE: V. MODE A. COUPLING: AC CH1, CH2 AC-GND-DC: AC CH1, CH2 VOLTS/DIV: 5mV A SWEEP TIME/DIV: 0.2ms A TRIG SLOPE: + TRIG MODE: AUTO	<p>(1) Set A TRIG LEVEL to 12 o'clock.</p> <p>(2) Apply a sine wave signal of 1 kHz to CH1 INPUT and adjust the oscillator output to produce a waveform of 4~6 div on the CRT screen.</p> <p>(3) Operate CH1 <math>\updownarrow</math> POSITION to move the waveform so that its amplitude is equally above and below the horizontal center graticule line on the CRT screen.</p> <p>(4) Adjust VR2 so that the starting point of the waveform is on the horizontal center graticule line on the CRT screen.</p> <p>(5) Pull Fix knob and adjust the sine wave input signal of CH1 to obtain a waveform of 1 div.</p> <p>(6) When A TRIG SLOPE is alternately turned to (+) and (-), adjust VR4 to synchronize.</p> <p>(7) Repeat (2)~(6) procedures for several times.</p> <p>&lt; Check &gt;</p> <p>(1) When A TRIG SLOPE is alternately turned to (+) and (-), the starting point must be always on the horizontal center graticule line.</p> <p>(2) With A TRIG SLOPE remaining in the position of (+), turn TRIG LEVEL clockwise toward 3 o'clock from near 9 o'clock and see if the waveform is as shown at right.</p> <p>(3) Adjust the oscillator output so that the waveform amplitude becomes 0.5 div and make sure that synchronization can be obtained by A TRIG LEVEL.</p> <div style="text-align: center;">  <p>TRIG LEVEL at 3 o'clock direction</p> <p>TRIG LEVEL at 9 o'clock direction</p> <p>TRIG LEVEL at 12 o'clock position</p> </div>	<div style="text-align: center;">  <p>Align the starting point with the horizontal center graticule line</p> </div> <div style="text-align: center;">  <p>SLOPE (+)</p> <p>SLOPE (-)</p> </div>	
Adjustment of B Trig Slope	VR3	X77-1120	SG-502	H.DISPLAY: DUAL V.MODE: CH1 A TRIG SOURCE: V. MODE B TRIG SOURCE: CH1 A,B COUPLING: AC CH1, CH2 AC-GND-DC: AC CH1, CH2 VOLTS/DIV: 5mV A, B SWEEP TIME/DIV: 0.2ms A. VAR: CAL A, B TRIG.SLOPE: + TRIG MODE: AUTO A, B INTEN: Fully CW	<p>(1) Apply a sine wave signal of 1 kHz to CH1 INPUT and adjust the oscillator output to produce a waveform of 4~6 div on the CRT screen.</p> <p>(2) Operate A TRIG LEVEL, B TRIG LEVEL and CH1 <math>\updownarrow</math> POSITION to move waveform so that its amplitude is equally above and below the horizontal center graticule line on the screen.</p> <p>(3) Set A INTEN to CCW and B INTEN to an arbitrary position near 3 o'clock.</p> <p>(4) Set B TRIG SLOPE to (-) and make adjustment so that the starting point of the waveform comes to the same position of the starting point of waveform when B TRIG SLOPE is in the (-) position.</p> <p>&lt; Check &gt;</p> <p>(1) Turn B TRIG SLOPE knob alternately to (+) and (-) and make sure that the starting point is always on the horizontal center graticule line.</p> <p>(2) When B TRIG SLOPE is in the (+) position, the rise slope of the waveform should be synchronized and its fall slope be synchronized at (-).</p> <p>(3) Apply the same signal to CH2 and set V. MODE to CH2 to produce a waveform of B sweep of CH2 on the screen to make sure that the rise slope of the waveform is synchronized when B TRIG SLOPE is at (+) and the fall slope is synchronized at (-).</p>	<div style="text-align: center;">  <p>Align SLOPE (+) with the horizontal center graticule line</p> <p>SLOPE (+)</p> <p>SLOPE (-)</p> </div>	



## ADJUSTMENT




Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark
OPERATING CHECKS							
Check of Current CAL			Current probe P6302 AM503 475A		(1) Touch a current probe to current CAL terminal on the rear side to make sure that the calibration current is 1 kHz $\pm 3\%$ and 10 mA $\pm 2\%$ .		
Check of Triggering Sensitivity			SG-502 SG-503 475A	V.MODE: CH1 CH1 VOLTS/DIV: 5mV A,B SWEEP TIME/DIV: arbitrary position CH1 AC-GND-DC: AC TRIG MODE: NORM	<p>(1) Make measurements of triggering sensitivity according to the table given below. (For both A and B sweeps)</p> <p><b>[I] A Sweep, INT</b></p> <p>(1) Set H DISPLAY to A and A TRIG SOURCE to CH1.</p> <p>(2) Apply a sine wave signal to CH1 INPUT, vary the oscillator output and operate A TRIG LEVEL to measure the minimum synchronizing amplitude on the CRT screen. When doing this, make sure that the A TRIG' D lamp is on.</p> <p>Check synchronization by each check frequency.</p> <p><b>[II] B Sweep, INT</b></p> <p>(1) Set H DISPLAY to B DLY'D, A TRIG SOURCE to CH1 and B TRIG SOURCE to CH1.</p> <p>(2) Apply a sine wave to CH1 INPUT, vary the oscillator output and operate B TRIG LEVEL to measure the minimum synchronizing amplitude. When doing this, make sure that the A TRIG'D and B TRIG'D lamps are on.</p> <p>Check synchronization by each frequency.</p> <p><b>[III] A Sweep, Ext</b></p> <p>(1) Set H DISPLAY to A and A TRIG SOURCE to EXT 1/1 or 1/10.</p> <p>(2) Apply a signal of the same voltage simultaneously to CH1 and CH4 INPUT.</p> <p>(3) Operate CH1 VOLTS/DIV to produce a waveform of 6 div on the CRT screen.</p> <p>(4) Vary the oscillator output and operate A TRIG LEVEL to measure the minimum synchronizing amplitude by the oscilloscope (475A).</p> <p>Check synchronization by each check frequency.</p> <p>When doing this, make sure that A TRIG'D lamp is on.</p> <p><b>[IV] B Sweep, EXT</b></p> <p>(1) Set H DISPLAY to ALT, A TRIG SOURCE to CH1 and B TRIG SOURCE to EXT 1/1 or 1/10.</p> <p>(2) Apply a signal of the same voltage simultaneously to CH1 and CH4 INPUT.</p> <p>(3) Operate CH1 VOLTS/DIV to produce a waveform of 6 div on the CRT screen.</p> <p>(4) Operate B TRIG LEVEL and A TRIG LEVEL to synchronize both A sweep and B sweep.</p> <p>(5) Vary the oscillator output and operate B TRIG LEVEL and measure the minimum synchronizing amplitude by the oscilloscope (475A). Check synchronization by each check frequency.</p> <p>(6) Make sure that the B TRIG'D lamp is on.</p>		





## ADJUSTMENT

Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark																																																																																											
					<p><b>[V] Check of triggering sensitivity</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">COUPLING (TRIG. SOURCE)</th> <th rowspan="2">FREQ RANGE (Hz)</th> <th colspan="3">Trig. sensitivity (Min. sync amplitude)</th> </tr> <tr> <th>TRIG. SOURCE V.MODE (CH1 or CH2)</th> <th>TRIG SOURCE EXT 1/1</th> <th>TRIG SOURCE EXT 1/10</th> </tr> </thead> <tbody> <tr> <td rowspan="3">AC</td> <td>20Hz ~ 20MHz</td> <td>0.5div</td> <td>50mVp-p</td> <td>0.5Vp-p</td> </tr> <tr> <td>~ 50MHz</td> <td>1 div</td> <td>100mVp-p</td> <td>1 Vp-p</td> </tr> <tr> <td>~ 100MHz</td> <td>1.5div</td> <td>150mVp-p</td> <td>1.5Vp-p</td> </tr> <tr> <td rowspan="3">DC</td> <td>DC ~ 20MHz</td> <td>0.5div</td> <td>50mVp-p</td> <td>0.5Vp-p</td> </tr> <tr> <td>~ 50MHz</td> <td>1 div</td> <td>100mVp-p</td> <td>1 Vp-p</td> </tr> <tr> <td>~ 100MHz</td> <td>1.5div</td> <td>150mVp-p</td> <td>1.5Vp-p</td> </tr> <tr> <td>AC HF<sub>REJ</sub></td> <td>1kHz 1MHz</td> <td>0.5div Not to be synchronized at 1 div</td> <td>50mVp-p Not to be synchronized at 100mVp-p</td> <td>0.5Vp-p Not to be synchronized at 1Vp-p</td> </tr> <tr> <td>AC LF<sub>REJ</sub></td> <td>1MHz 1kHz</td> <td>0.5div Not to be synchronized at 1 div</td> <td>50mVp-p Not to be synchronized at 100mVp-p</td> <td>0.5Vp-p Not to be synchronized at 1Vp-p</td> </tr> <tr> <td>VIDEO</td> <td>VIDEO signal FRAME LINE</td> <td>0.5div</td> <td>50mVp-p</td> <td>0.5Vp-p</td> </tr> </tbody> </table> <p><b>[VI] Check of triggering sensitivity by TRIG. MODE</b> H.DISPLAY : A, A SOURCE : AC</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">COUPLING (TRIG. SOURCE)</th> <th rowspan="2">FREQ RANGE (Hz)</th> <th colspan="3">Trig. sensitivity (Min. sync. amplitude)</th> </tr> <tr> <th>TRIG SOURCE V.MODE (CH1 or CH2)</th> <th>TRIG. SOURCE EXT 1/1</th> <th>TRIG. SOURCE EXT 1/10</th> </tr> </thead> <tbody> <tr> <td rowspan="3">AUTO</td> <td>30Hz ~ 20MHz</td> <td>0.5div</td> <td>50mVp-p</td> <td>0.5Vp-p</td> </tr> <tr> <td>~ 50MHz</td> <td>1 div</td> <td>100mVp-p</td> <td>1 Vp-p</td> </tr> <tr> <td>~ 100MHz</td> <td>1.5div</td> <td>150mVp-p</td> <td>1.5Vp-p</td> </tr> <tr> <td rowspan="2">FIX</td> <td>40Hz ~ 20MHz</td> <td>1.0div</td> <td>100mVp-p</td> <td>1.0Vp-p</td> </tr> <tr> <td>~ 80MHz</td> <td>1.5div</td> <td>150mVp-p</td> <td>1.5Vp-p</td> </tr> </tbody> </table> <p><b>[VII] Check of trig source (A sweep)</b>                      ① TRIG MODE: AUTO, H.DISPLAY: A                      ② Applied different signals to CH1 ~ CH4 and operate A SOURCE as described below and make sure to operate as follow.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>A SOURCE</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td>V.MODE</td> <td>                     V.MODE→ CH1 The signal of CH1 is synchronized with A sweep                      V.MODE→ CH2 The signal of CH2 is synchronized with A sweep                      V.MODE→ DUAL, ALT                      When the signals of CH1 and CH2 are superimposed on one another they are synchronized with the A sweep of CH1 and CH2, respectively, but there will be no synchronization when there is no signal                      V.MODE→DUAL, CHOP No Sync.                      V.MODE→ADD                      Synchronized with the signal of CH2 when CH1 + CH2 (CH1 - CH2 at CH2 INV)                      V.MODE→ QUAD, ALT                      When the signals of CH1 ~ CH4 are superimposed on one another on the CRT screen, the signals will be synchronized with the A sweep of CH1 ~ CH4 respectively but there will be no sync when there is no signal.                      V.MODE→QUAD, CHOP No Sync.                 </td> </tr> <tr> <td>CH1</td> <td>The signal of CH1 is synchronized with A sweep</td> </tr> <tr> <td>CH2</td> <td>The signal of CH2 is synchronized with A sweep</td> </tr> <tr> <td>EXT 1/1</td> <td>The signal of CH3 is synchronized with A sweep</td> </tr> <tr> <td>EXT 1/10</td> <td>The signal of CH3 is attenuated to 1/10 and synchronized with A sweep.</td> </tr> </tbody> </table> <p>③ Check sync by the lighting of A TRIG'D lamp</p>	COUPLING (TRIG. SOURCE)	FREQ RANGE (Hz)	Trig. sensitivity (Min. sync amplitude)			TRIG. SOURCE V.MODE (CH1 or CH2)	TRIG SOURCE EXT 1/1	TRIG SOURCE EXT 1/10	AC	20Hz ~ 20MHz	0.5div	50mVp-p	0.5Vp-p	~ 50MHz	1 div	100mVp-p	1 Vp-p	~ 100MHz	1.5div	150mVp-p	1.5Vp-p	DC	DC ~ 20MHz	0.5div	50mVp-p	0.5Vp-p	~ 50MHz	1 div	100mVp-p	1 Vp-p	~ 100MHz	1.5div	150mVp-p	1.5Vp-p	AC HF <sub>REJ</sub>	1kHz 1MHz	0.5div Not to be synchronized at 1 div	50mVp-p Not to be synchronized at 100mVp-p	0.5Vp-p Not to be synchronized at 1Vp-p	AC LF <sub>REJ</sub>	1MHz 1kHz	0.5div Not to be synchronized at 1 div	50mVp-p Not to be synchronized at 100mVp-p	0.5Vp-p Not to be synchronized at 1Vp-p	VIDEO	VIDEO signal FRAME LINE	0.5div	50mVp-p	0.5Vp-p	COUPLING (TRIG. SOURCE)	FREQ RANGE (Hz)	Trig. sensitivity (Min. sync. amplitude)			TRIG SOURCE V.MODE (CH1 or CH2)	TRIG. SOURCE EXT 1/1	TRIG. SOURCE EXT 1/10	AUTO	30Hz ~ 20MHz	0.5div	50mVp-p	0.5Vp-p	~ 50MHz	1 div	100mVp-p	1 Vp-p	~ 100MHz	1.5div	150mVp-p	1.5Vp-p	FIX	40Hz ~ 20MHz	1.0div	100mVp-p	1.0Vp-p	~ 80MHz	1.5div	150mVp-p	1.5Vp-p	A SOURCE	Operation	V.MODE	V.MODE→ CH1 The signal of CH1 is synchronized with A sweep V.MODE→ CH2 The signal of CH2 is synchronized with A sweep V.MODE→ DUAL, ALT When the signals of CH1 and CH2 are superimposed on one another they are synchronized with the A sweep of CH1 and CH2, respectively, but there will be no synchronization when there is no signal V.MODE→DUAL, CHOP No Sync. V.MODE→ADD Synchronized with the signal of CH2 when CH1 + CH2 (CH1 - CH2 at CH2 INV) V.MODE→ QUAD, ALT When the signals of CH1 ~ CH4 are superimposed on one another on the CRT screen, the signals will be synchronized with the A sweep of CH1 ~ CH4 respectively but there will be no sync when there is no signal. V.MODE→QUAD, CHOP No Sync.	CH1	The signal of CH1 is synchronized with A sweep	CH2	The signal of CH2 is synchronized with A sweep	EXT 1/1	The signal of CH3 is synchronized with A sweep	EXT 1/10	The signal of CH3 is attenuated to 1/10 and synchronized with A sweep.		
COUPLING (TRIG. SOURCE)	FREQ RANGE (Hz)	Trig. sensitivity (Min. sync amplitude)																																																																																																
		TRIG. SOURCE V.MODE (CH1 or CH2)	TRIG SOURCE EXT 1/1	TRIG SOURCE EXT 1/10																																																																																														
AC	20Hz ~ 20MHz	0.5div	50mVp-p	0.5Vp-p																																																																																														
	~ 50MHz	1 div	100mVp-p	1 Vp-p																																																																																														
	~ 100MHz	1.5div	150mVp-p	1.5Vp-p																																																																																														
DC	DC ~ 20MHz	0.5div	50mVp-p	0.5Vp-p																																																																																														
	~ 50MHz	1 div	100mVp-p	1 Vp-p																																																																																														
	~ 100MHz	1.5div	150mVp-p	1.5Vp-p																																																																																														
AC HF <sub>REJ</sub>	1kHz 1MHz	0.5div Not to be synchronized at 1 div	50mVp-p Not to be synchronized at 100mVp-p	0.5Vp-p Not to be synchronized at 1Vp-p																																																																																														
AC LF <sub>REJ</sub>	1MHz 1kHz	0.5div Not to be synchronized at 1 div	50mVp-p Not to be synchronized at 100mVp-p	0.5Vp-p Not to be synchronized at 1Vp-p																																																																																														
VIDEO	VIDEO signal FRAME LINE	0.5div	50mVp-p	0.5Vp-p																																																																																														
COUPLING (TRIG. SOURCE)	FREQ RANGE (Hz)	Trig. sensitivity (Min. sync. amplitude)																																																																																																
		TRIG SOURCE V.MODE (CH1 or CH2)	TRIG. SOURCE EXT 1/1	TRIG. SOURCE EXT 1/10																																																																																														
AUTO	30Hz ~ 20MHz	0.5div	50mVp-p	0.5Vp-p																																																																																														
	~ 50MHz	1 div	100mVp-p	1 Vp-p																																																																																														
	~ 100MHz	1.5div	150mVp-p	1.5Vp-p																																																																																														
FIX	40Hz ~ 20MHz	1.0div	100mVp-p	1.0Vp-p																																																																																														
	~ 80MHz	1.5div	150mVp-p	1.5Vp-p																																																																																														
A SOURCE	Operation																																																																																																	
V.MODE	V.MODE→ CH1 The signal of CH1 is synchronized with A sweep V.MODE→ CH2 The signal of CH2 is synchronized with A sweep V.MODE→ DUAL, ALT When the signals of CH1 and CH2 are superimposed on one another they are synchronized with the A sweep of CH1 and CH2, respectively, but there will be no synchronization when there is no signal V.MODE→DUAL, CHOP No Sync. V.MODE→ADD Synchronized with the signal of CH2 when CH1 + CH2 (CH1 - CH2 at CH2 INV) V.MODE→ QUAD, ALT When the signals of CH1 ~ CH4 are superimposed on one another on the CRT screen, the signals will be synchronized with the A sweep of CH1 ~ CH4 respectively but there will be no sync when there is no signal. V.MODE→QUAD, CHOP No Sync.																																																																																																	
CH1	The signal of CH1 is synchronized with A sweep																																																																																																	
CH2	The signal of CH2 is synchronized with A sweep																																																																																																	
EXT 1/1	The signal of CH3 is synchronized with A sweep																																																																																																	
EXT 1/10	The signal of CH3 is attenuated to 1/10 and synchronized with A sweep.																																																																																																	

## ADJUSTMENT

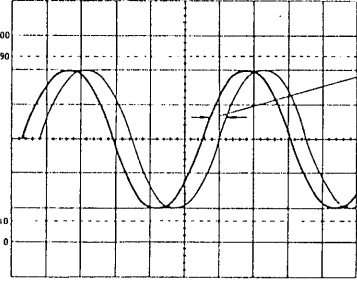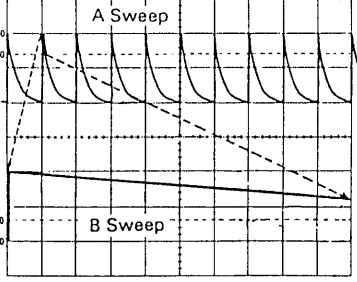
Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark										
					<p>[VIII] Check of trig source (B sweep)</p> <p>(1) Set H DISPLAY to A, TRIG MODE to AUTO, V MODE to DUAL, ALT and A TRIG SOURCE to V MODE.</p> <p>(2) Apply different signals to CH1, CH2 and CH4 and superimpose the signals of CH1 and CH2 on one another on the CRT screen and synchronize them by A TRIG LEVEL.</p> <p>(3) Set H DISPLAY to B DLY'D and operate B SOURCE as described below to check the synchronization.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>B TRIG SOURCE</th> <th>Operation</th> </tr> </thead> <tbody> <tr> <td>CH1</td> <td>The signal of CH1 is synchronized with B sweep.</td> </tr> <tr> <td>CH2</td> <td>The signal of CH2 is synchronized with B sweep.</td> </tr> <tr> <td>EXT 1/1</td> <td>The signal of CH4 is synchronized with B sweep.</td> </tr> <tr> <td>1/10</td> <td>The signal of CH4 is attenuated to 1/10 and synchronized with B sweep.</td> </tr> </tbody> </table> <p>(4) Make sure that the B TRIG'D lamp is on.</p>	B TRIG SOURCE	Operation	CH1	The signal of CH1 is synchronized with B sweep.	CH2	The signal of CH2 is synchronized with B sweep.	EXT 1/1	The signal of CH4 is synchronized with B sweep.	1/10	The signal of CH4 is attenuated to 1/10 and synchronized with B sweep.		
B TRIG SOURCE	Operation																
CH1	The signal of CH1 is synchronized with B sweep.																
CH2	The signal of CH2 is synchronized with B sweep.																
EXT 1/1	The signal of CH4 is synchronized with B sweep.																
1/10	The signal of CH4 is attenuated to 1/10 and synchronized with B sweep.																
Check of Jitter			SG503	<p>H.DISPLAY: A  A.TRIG SOURCE: CH1  TRIG MODE: NORM  A COUPLING: AC  A SWEEP TIME/DIV: 0.02<math>\mu</math>s  CH1 VOLTS/DIV: 0.1V  CH1 AC-GND-DC: AC  X10 MAG: PULL  CH1 PUSH 50<math>\Omega</math>: PUSH  HOLDOFF: NORM</p>	<p>(1) Apply a sine wave signal of 100 MHz to CH1 INPUT and adjust the oscillator output to produce a waveform of 4 div on the CRT screen.</p> <p>(2) Operate A TRIG LEVEL to find a point where the jitter is minimized.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Jitter</td> <td>Less than 0.25 div</td> </tr> </table>	Jitter	Less than 0.25 div	 <p style="text-align: right;">Jitter within 0.25 div.</p>									
Jitter	Less than 0.25 div																
Operational Check of DELAY TIME MULTIPLIER			TG-501	<p>H.DISPLAY: ALT  A, B TRIG SOURCE: CH1  TRIG MODE: AUTO  V. MODE: CH1  STARTS AFTER DELAY: PULL  CH1 AC-GND-DC: AC  A SWEEP TIME/DIV: 1ms  B SWEEP TIME/DIV: 5<math>\mu</math>s</p>	<p>(1) Apply a marker signal of 1 ms to CH1 INPUT produce a waveform of 2~3 div on the CRT screen.</p> <p>(2) Operate <math>\blacktriangle</math> TRACE SEP to separate B sweep and A sweep.</p> <p>(3) Operate <math>\blacktriangleleft</math> POSITION to align the first peak of the waveform with the left end of the screen.</p> <p>(4) Adjust A INTEN and B INTEN to bring the waveform into the positions where they can be easily visible.</p> <p>(5) Operate DELAY TIME MULTIPLIER so that the patterns of the screen appear as shown at right (the second peak of the A sweep should be intensity modulated and should be aligned with the left end of B sweep scale) and note the dial reading at this time.</p>	 <p style="text-align: right;">Measure the dial reading.</p> <div style="text-align: center;">  <p>DELAY TIME MULTIPLIER</p> </div>	<p>&lt; Note &gt;  When TG-501 is used, CH1 VOLTS/DIV should be set to 0.5V and PUSH 50<math>\Omega</math> be depressed.</p>										

## ADJUSTMENT

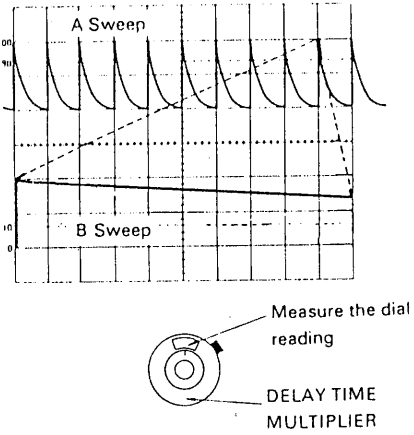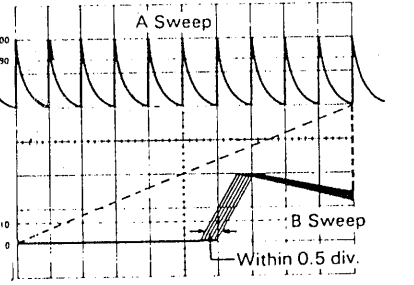
Item	Adjustment Control	P.C.B No.	Test Equipment	Control Setting	Adjustment and Check	Illustration	Remark		
					<p>(6) Turn DELAY TIME MULTIPLIER and operate ◀▶ POSITION so that what is shown at right will happen at the 10th peak and note the dial reading at this time.</p> <p>(7) Make the following calculation from the dial reading to make sure that the error is within the specification limits.  <math>(B) - (A) = 8.00 \pm 0.2</math></p> <table border="1" data-bbox="1329 478 1816 520"> <tr> <td>Time multiplication error</td> <td>within <math>\pm 2\%</math></td> </tr> </table>	Time multiplication error	within $\pm 2\%$	 <p style="text-align: center;">Measure the dial reading          DELAY TIME MULTIPLIER</p>	
Time multiplication error	within $\pm 2\%$								
Check of DELAY TIME Jitter			TG-501	H.DISPLAY: ALT A TRIG SOURCE: CH1 B TRIG SOURCE: CH2 TRIG MODE: AUTO V. MODE: CH1 STARTS AFTER DELAY: PULL B ENDS A: ON CH1 AC-GND-DC: AC A SWEEP TIME/DIV: 1ms B SWEEP TIME/DIV: 1μs	<p>(1) Apply a marker signal of 1 ms to CH1 INPUT to produce a waveform of 2~3 div on the CRT screen</p> <p>(2) Operate ⚡ TRACE SEP to separate A sweep and B sweep.</p> <p>(3) Operate DELAY TIME MULTIPLIER to obtain the patterns as shown at right. (DELAY TIME MULTIPLIER is to be set to about 10.00).</p> <p>(4) Make sure that the jitter of B sweep is less than 0.5 div at this time.</p> <table border="1" data-bbox="1329 968 1774 1010"> <tr> <td>Specification</td> <td>Less than 1/20,000</td> </tr> </table>	Specification	Less than 1/20,000		
Specification	Less than 1/20,000								
Adjustment of Beam Finder	VR 1	X74-1230		H. DISPLAY: A A TRIG SOURCE: V.MODE TRIG MODE: AUTO V.MODE: CH1 CH1, AC-GND-DC: GND A. SWEEP TIME/DIV: 0.1ms ◀▶ POSITION: 12 o'clock A. INTEN: 12 o'clock	<p>(1) Adjust VR1 so that the trace length becomes 6 div while depressing BEAM FINDER.</p> <p>(2) Make sure that the trace length is fully covered the screen when rotated SWEEP TIME/DIV to each range:</p>				

# ADJUSTMENT


X73-1320-00

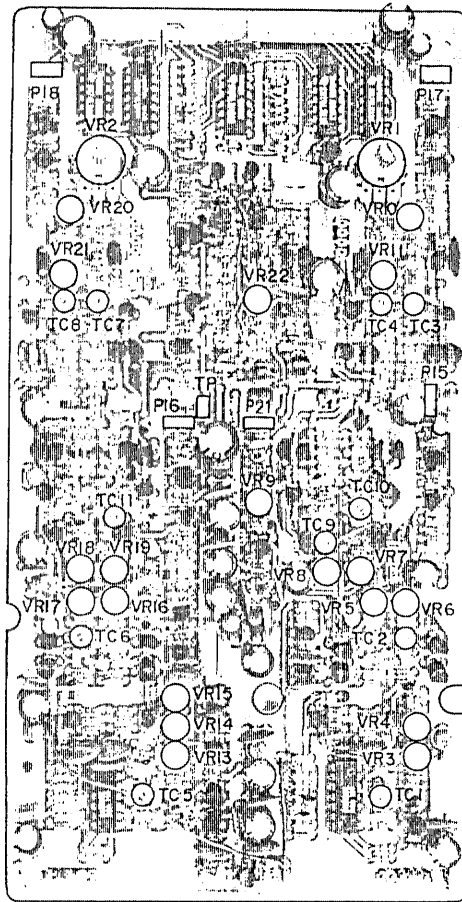


X74-1320-00

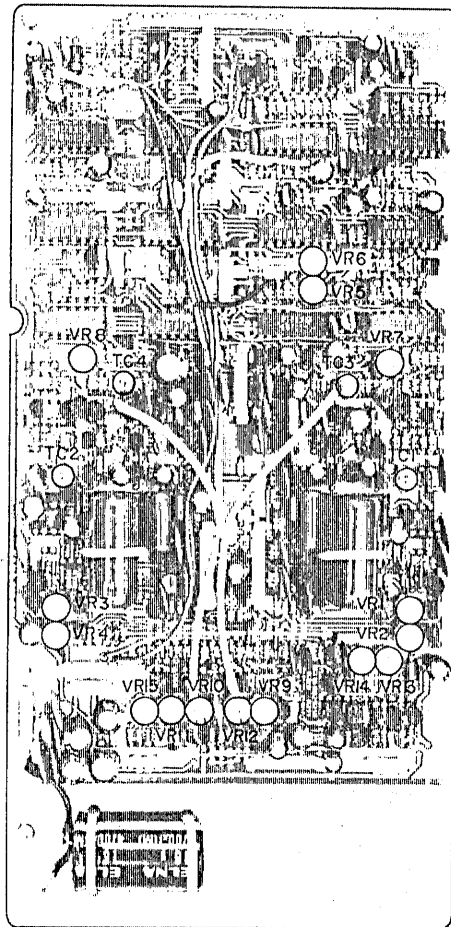


X75-1120-00

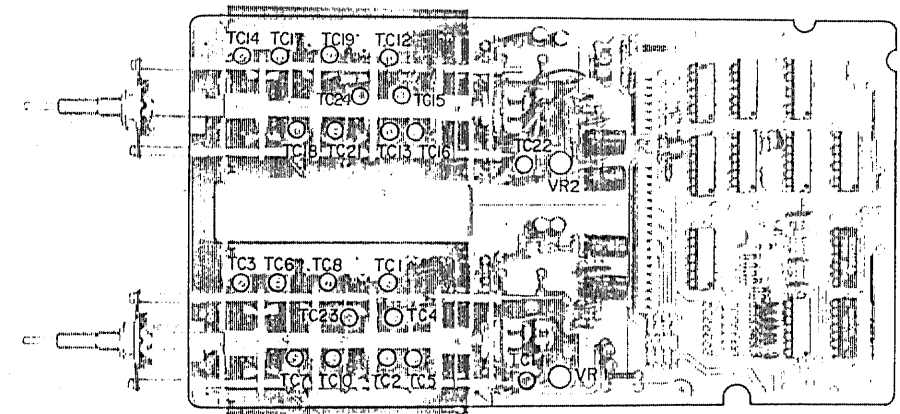


X77-1130-00

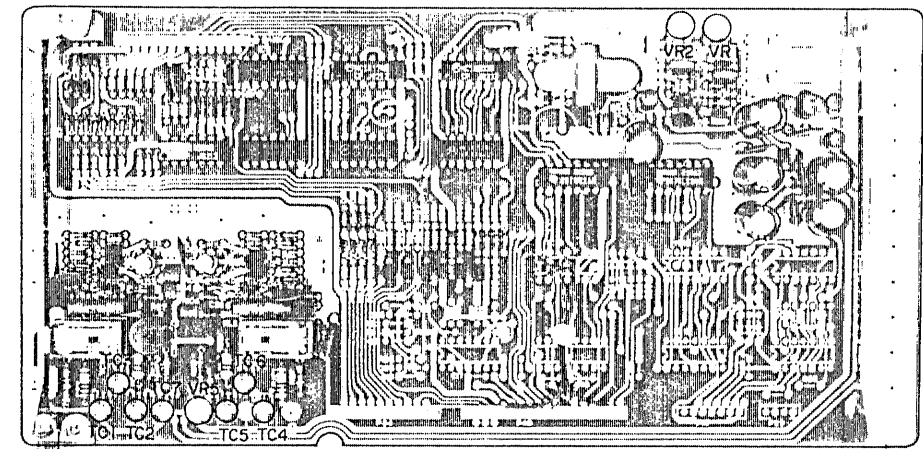


X73-1330-00

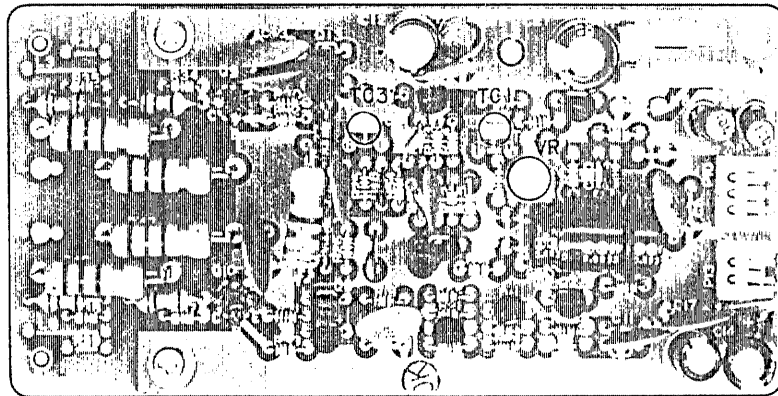


X77-1110-00

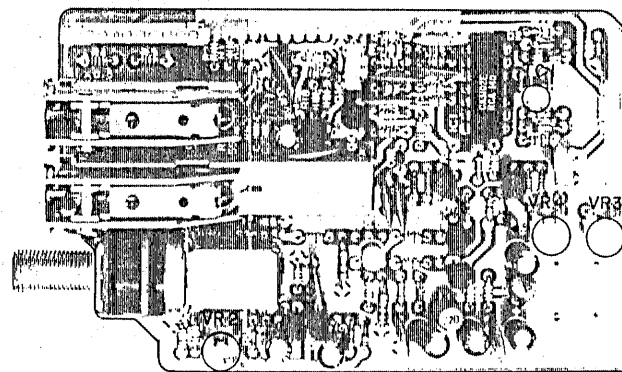


X68-1310-00

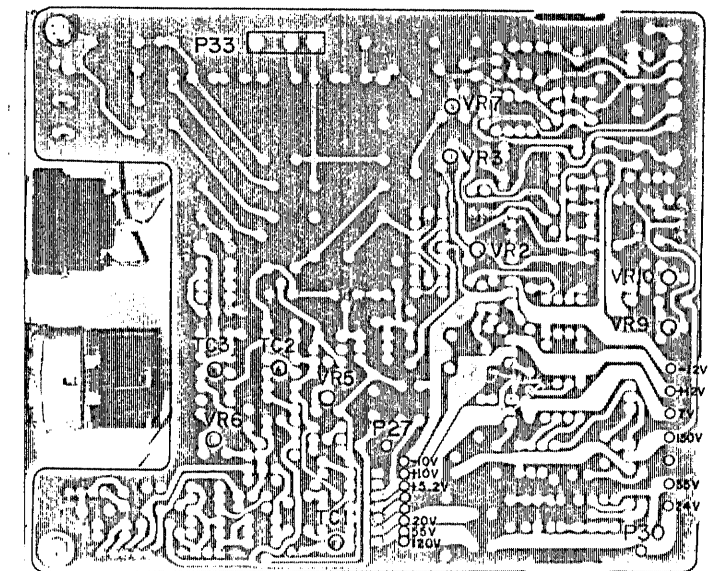


X74-1220-00

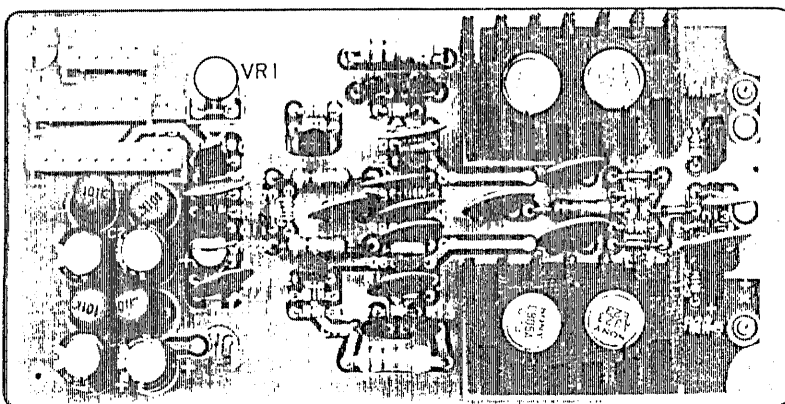





X77-1120-00

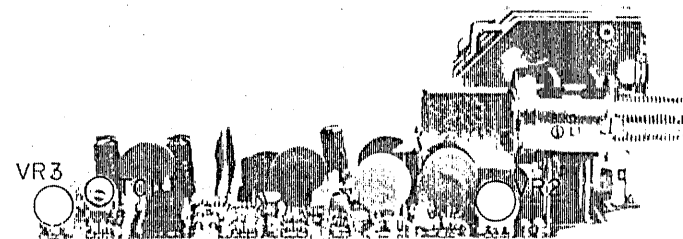

## TROUBLESHOOTING



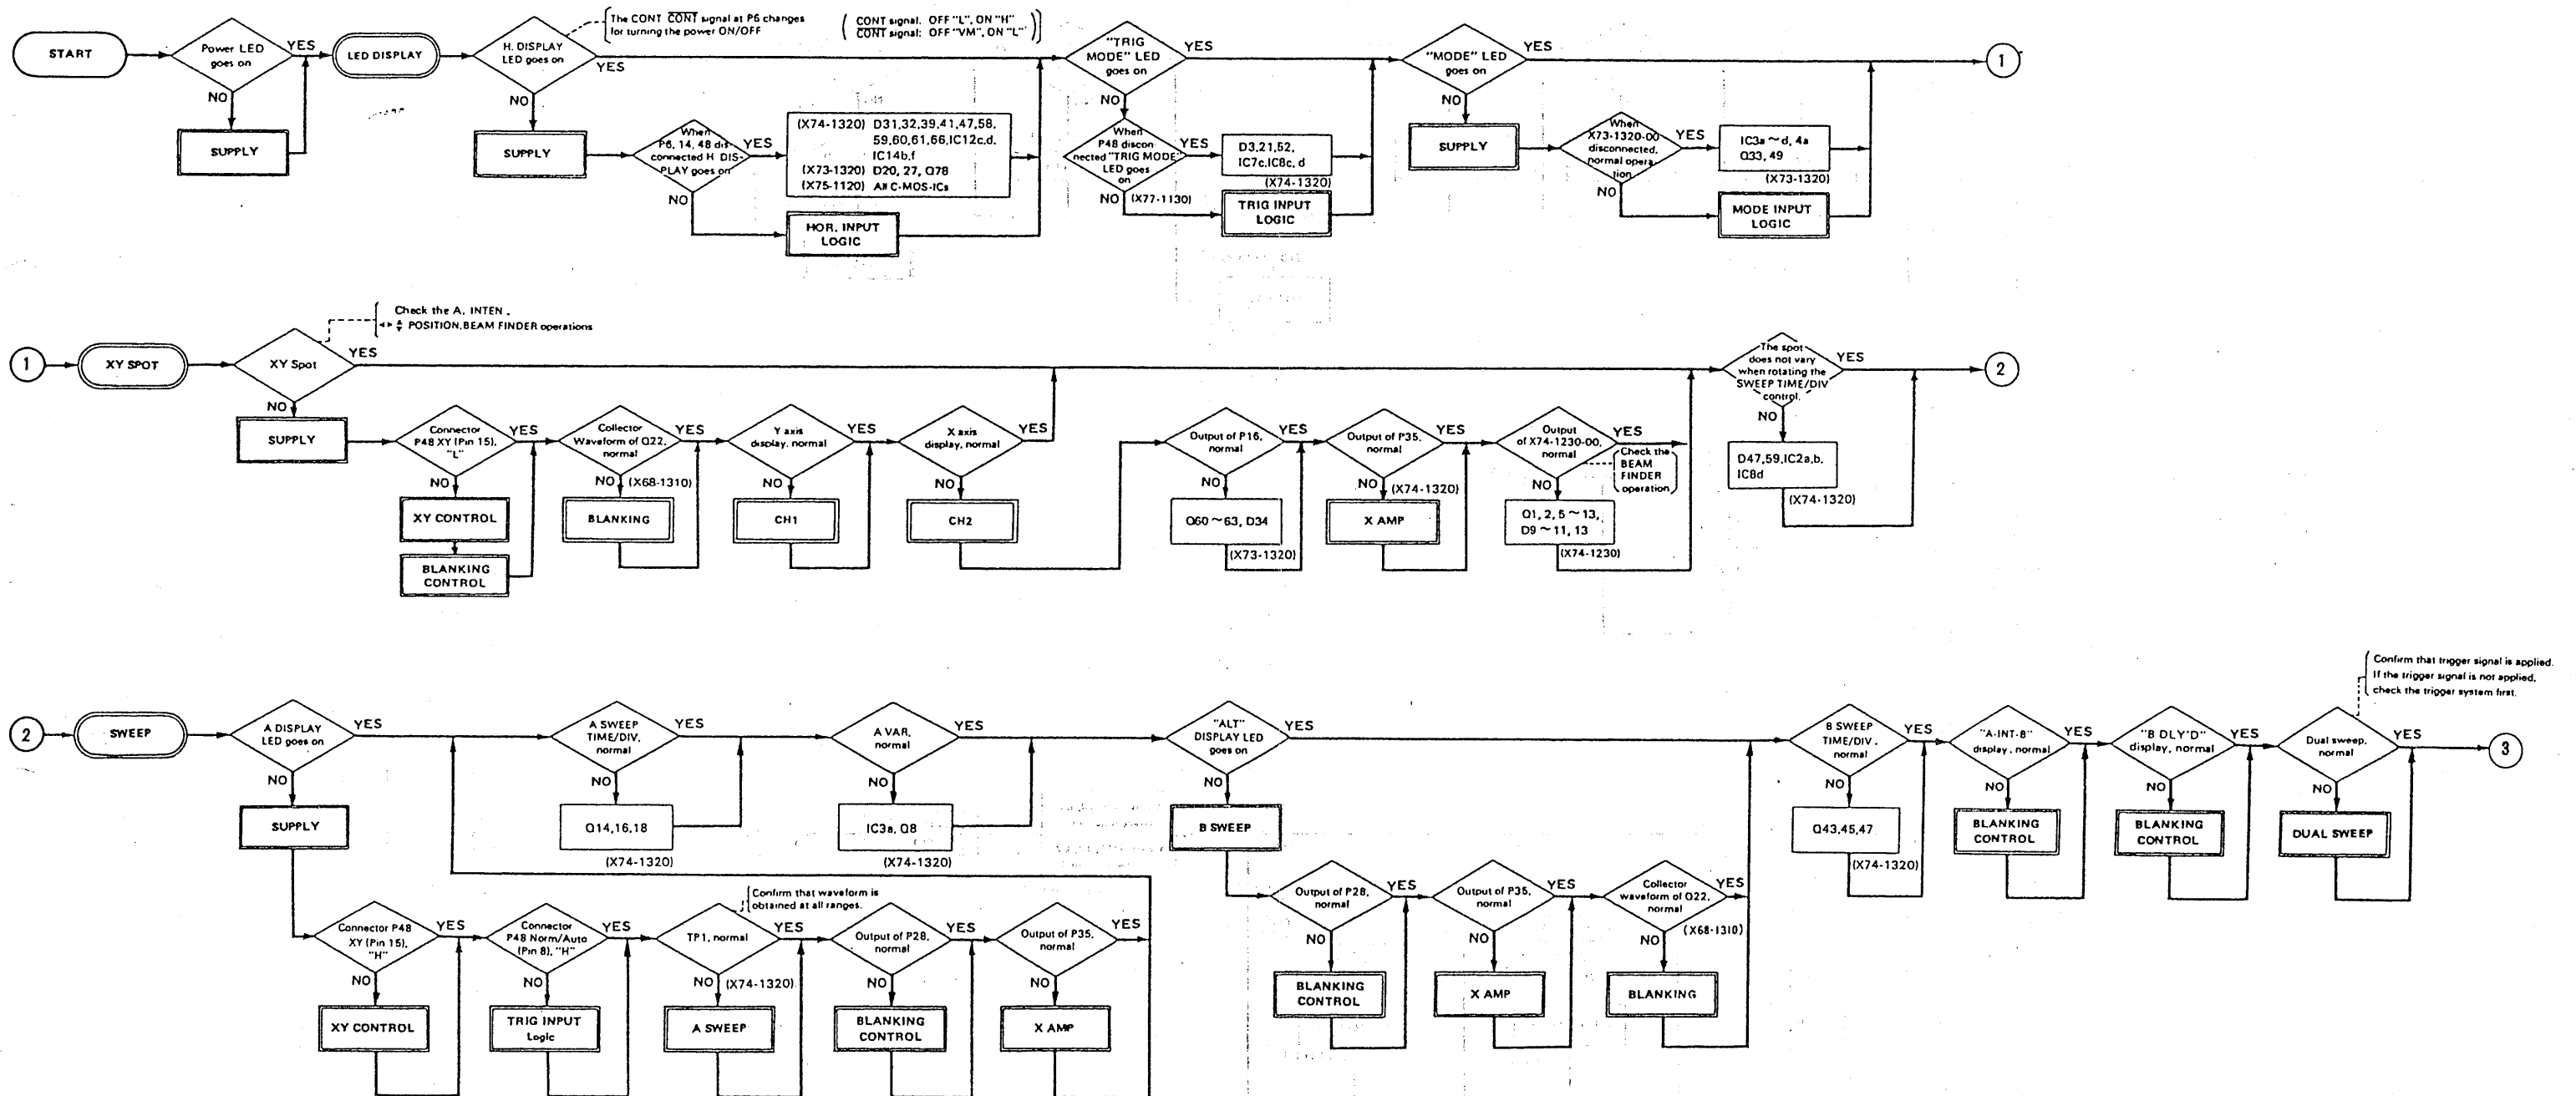


TRUBLESHOOTING

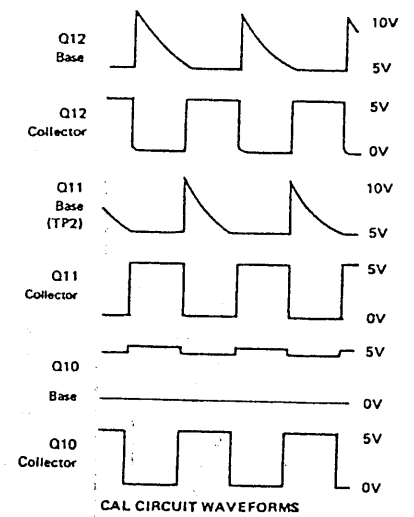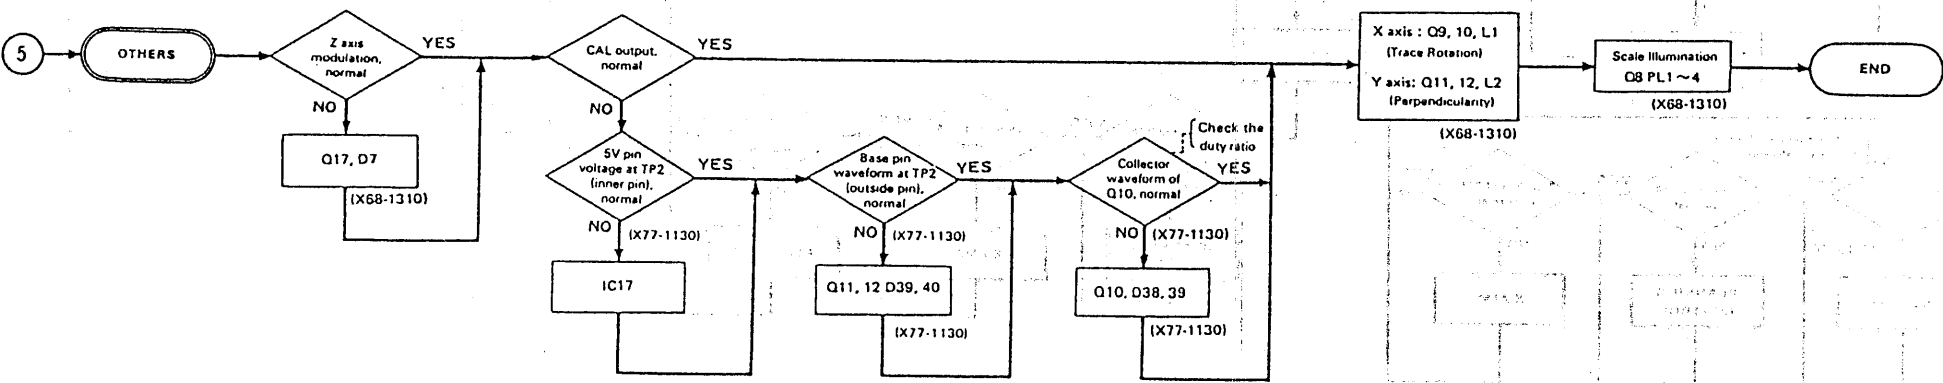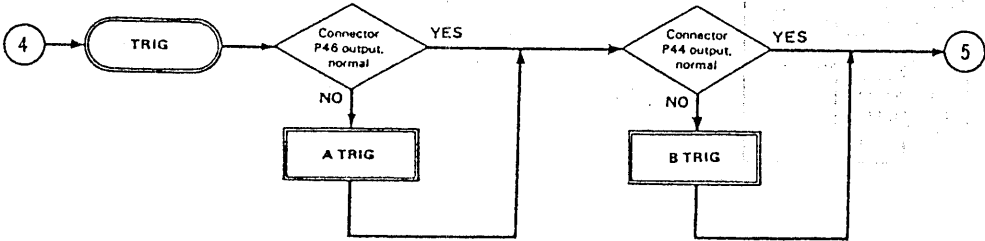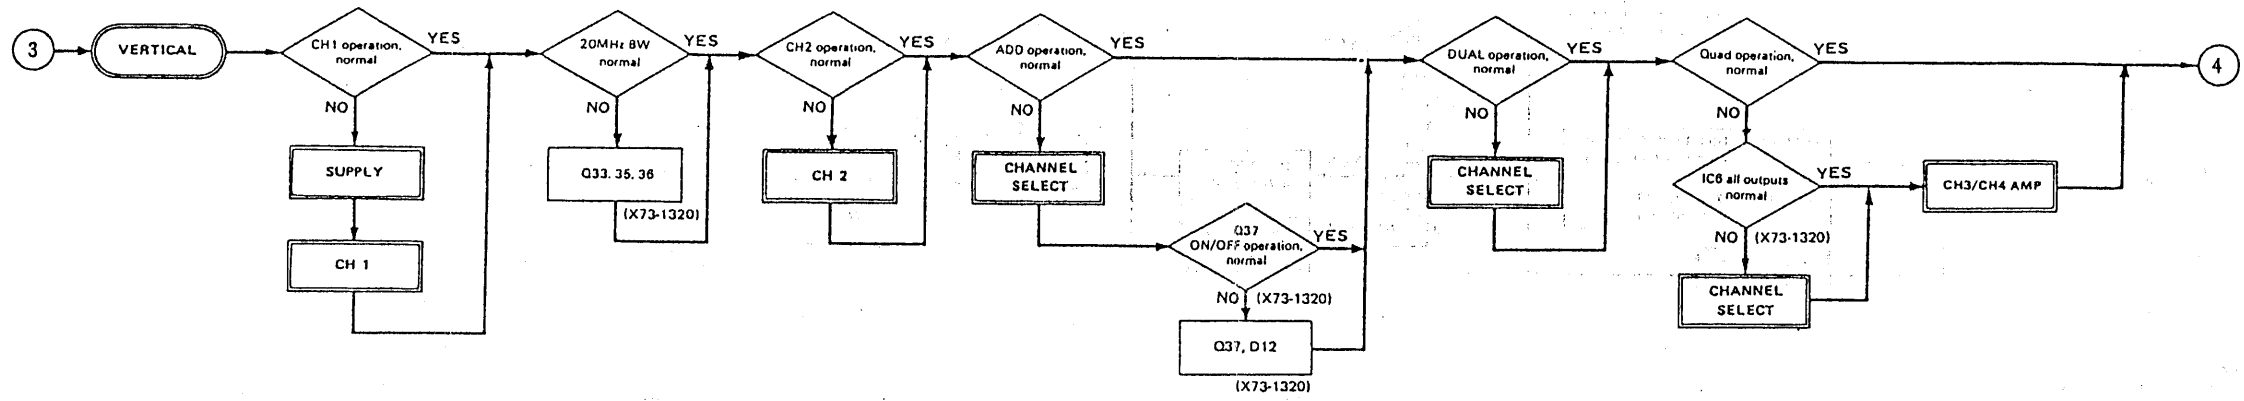


## TROUBLESHOOTING

### ( POWER SUPPLY OF EACH VOLTAGE )

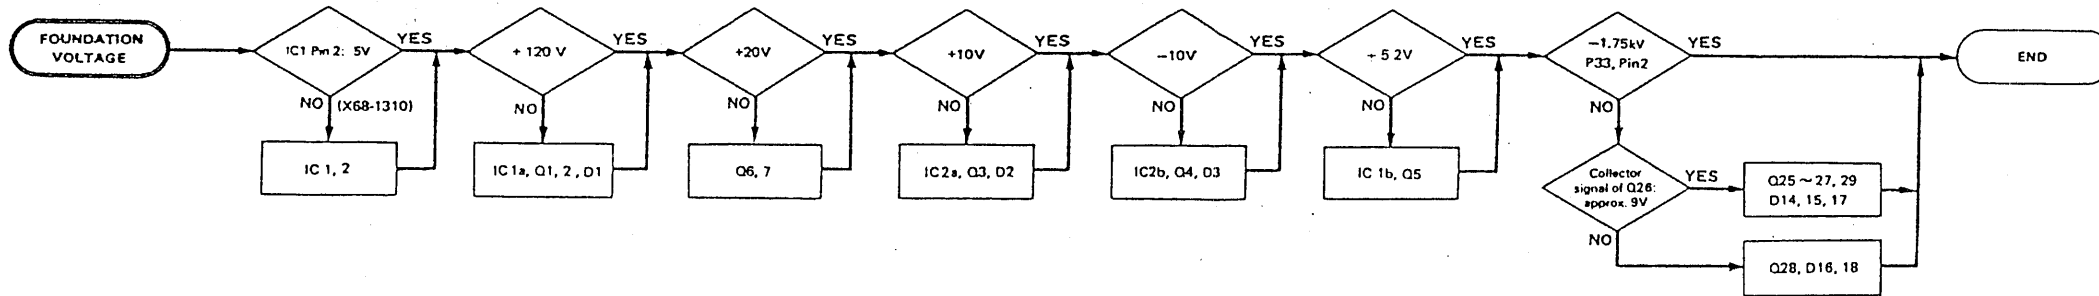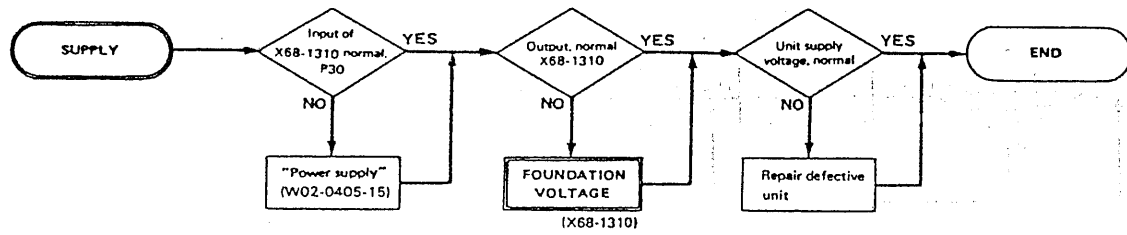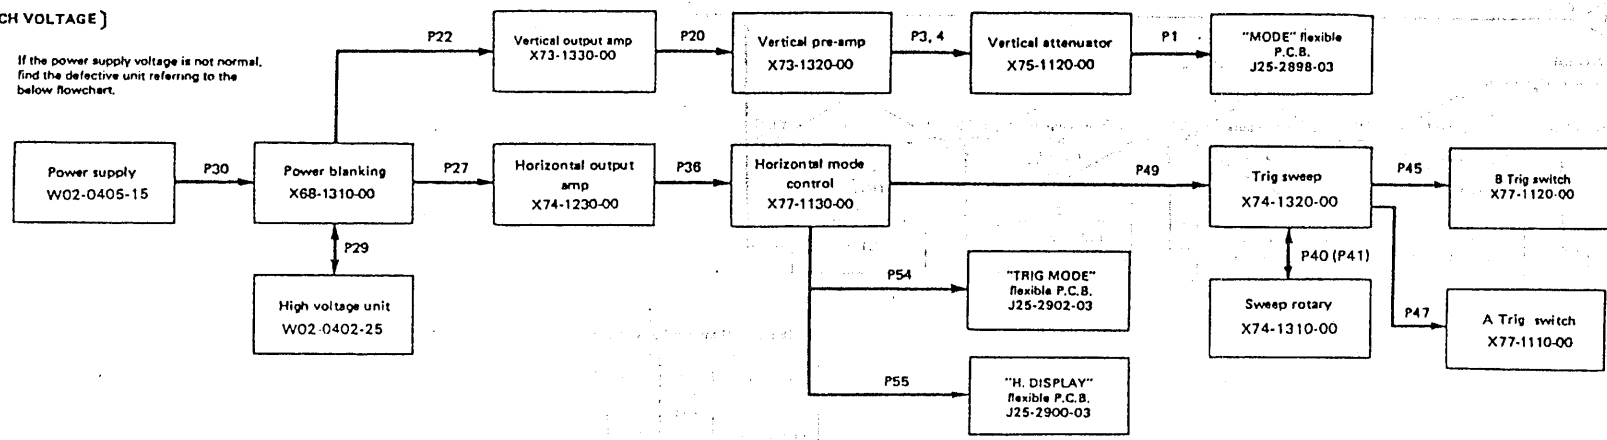

## TROUBLESHOOTING

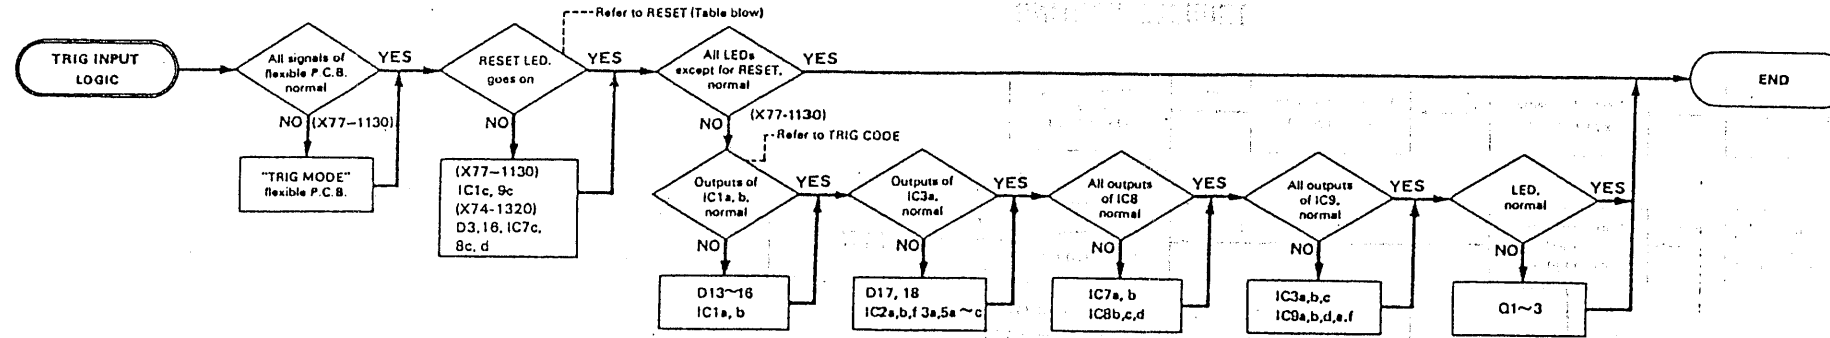


RESET (TRIG MODE "SINGLE")

RESET	Qt	Qt+1
PUSH (TRIG MODE SINGLE)	P48 10Pin	IC2b 3Pin IC3a 3Pin
		L L

TRIG CODE

TRIG MODE PUSH	Qt			Qt+1														
	IC1	IC3	IC7	IC8-4		IC8-11		IC8-10		IC9								
	4 Pin	2 Pin	3 Pin	13 Pin	12 Pin	1 Pin	2 Pin	IC5-3		IC5-5		IC5-7		8 Pin	10 Pin	12 Pin	4 Pin	2 Pin
AUTO		L		H	L	L	H	L	L	H	L	L	H	H	L	L	H	H
NORM	L			L	H	H	L	L	H	L	H	L	L	H	L	L	H	H
SINGLE				H	L	H	L	H	H	L	L	L	L	H	L	H	H	L

Qt : Logical value when the switch is depressed.  
Qt + 1: Logical value after the switch is depressed.

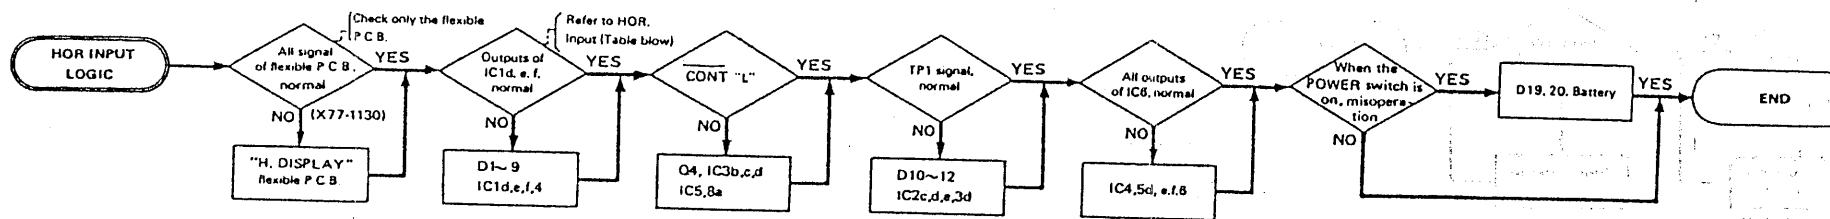





HOR. INPUT

H.DISPLAY PUSH	Qt				Qt+1												
	IC1 OUTPUT			TP1	IC5 OUTPUT				IC6 OUTPUT							OTHER OUTPUT	
	12i	10e	8d		IC5 15pin	IC4 2pin	IC4 5pin	IC4 7pin	IC5 13pin	IC5 11pin	IC5 9pin	2	3	4	5		6
A	L	L			L	L	L	H	L	H	H	H	H	H	H	H	H
ALT	L		L		L	L	H	L	H	L	H	H	H	H	H	H	H
A-INT-B	L				L	L	H	H	H	H	L	H	H	H	H	H	H
B		L	L		L	H	L	L	H	H	H	L	H	H	H	H	H
DUAL		L			L	H	L	H	H	H	H	L	H	H	H	H	H
X-Y			L		L	H	H	L	H	H	H	H	H	H	L	H	H

Qt : Logical value when the switch is depressed.  
Qt + 1: Logical value after the switch is depressed.



## TROUBLESHOOTING

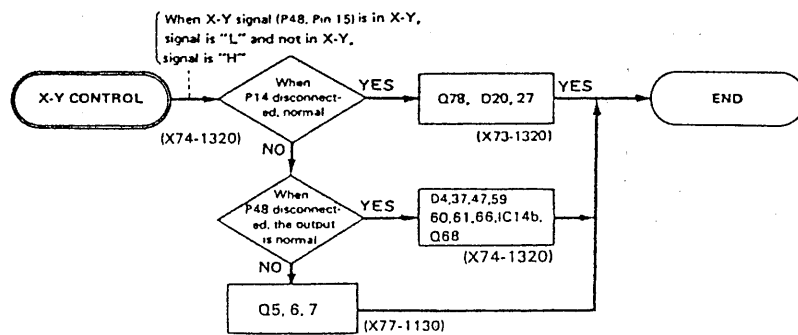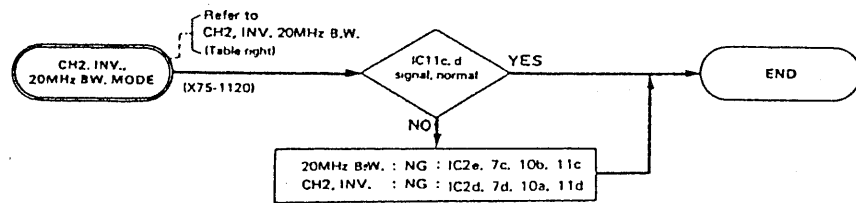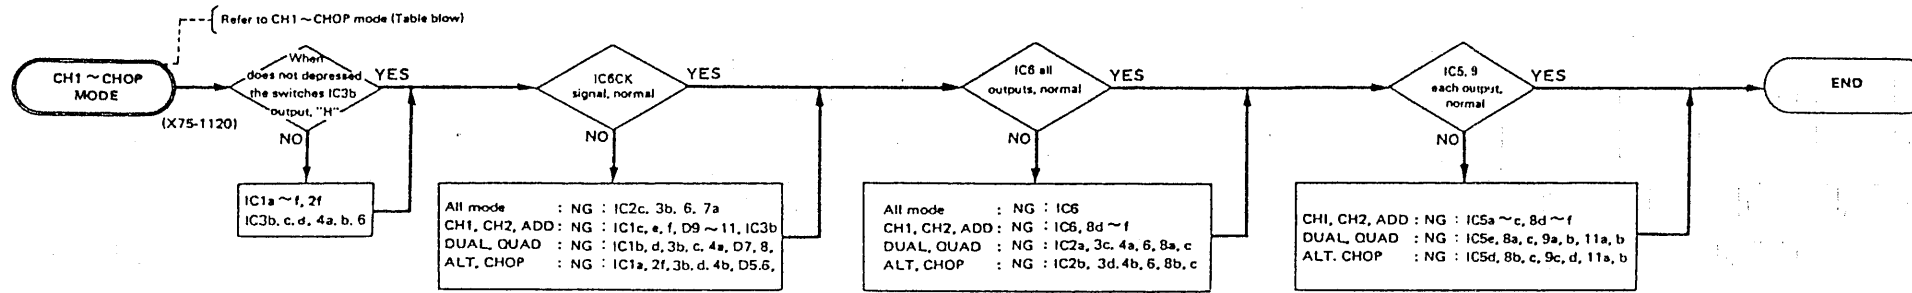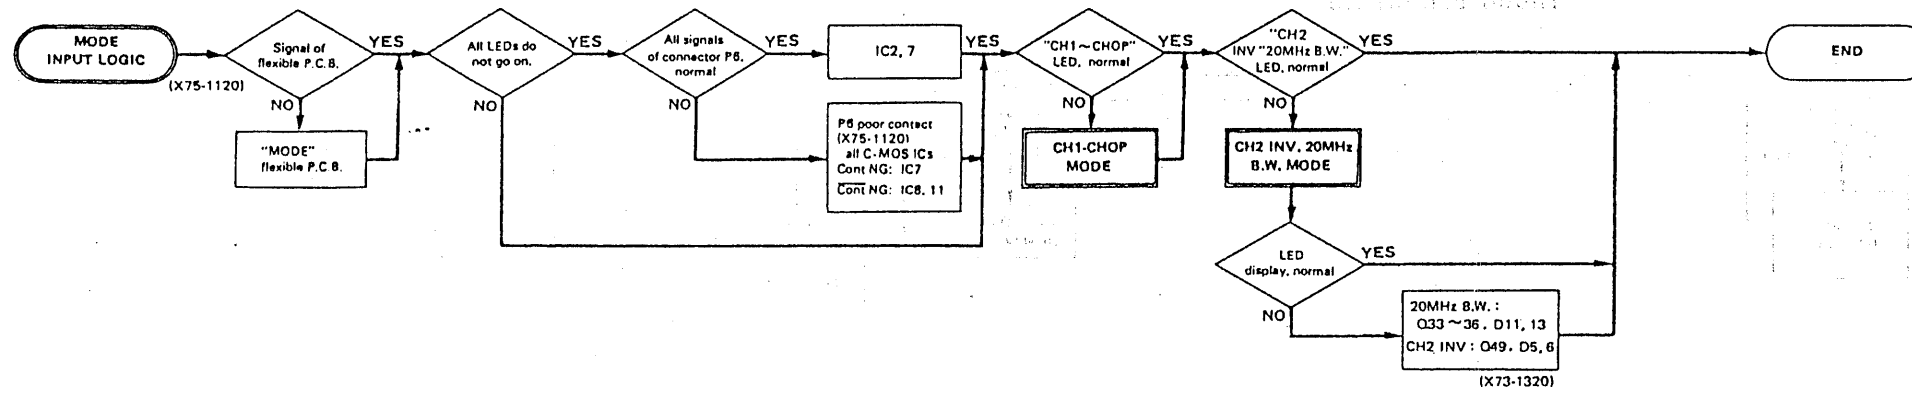

### CH2 INV.

CH2 INV PUSH	Ot	Ot + 1
	IC10a INPUT	IC10a OUTPUT
(T)	(Oa)	

### 20MHz B.W.



20MHz B.W. PUSH	Ot	Ot + 1
	IC10b INPUT	IC10b OUTPUT
(T)	(Ob)	

### CH1~CHOP MODE

"MODE" PUSH	Ot			Ot + 1																		
	IC3b IN / OUT			CH1 / CH2 / ADD									DUAL / QUAD			ALT / CHOP						
	IN Pin 5	IN Pin 6	OUT Pin 4	IC6			IC5			IC6 O2	IC4a Oa	IC6 Oo	IC9 OUTPUT			IC4b Ob	IC6 O1	IC9 OUTPUT				
	O5	O4	O3	a	b	c						b	a	c	d							
CH1	L			H	L	L	L	H	H	H	Oat	Oat	H	H	Obt	Obt	H	H				
CH2	L			L	H	L	H	L	H	H	Oat	Oat	H	H	Obt	Obt	H	H				
DUAL		L		L	L	L	H	H	H	L	L	L	L	H	Obt	Obt	Oit	Oit				
ADD	L			L	L	H	H	H	L	H	Oat	Oat	H	H	Obt	Obt	H	H				
QUAD		L		L	L	L	H	H	H	L	H	H	H	L	Obt	Obt	Oit	Oit				
ALT		L		L	L	L	H	H	H	L	Oat	Oat	Oot	Oot	H	L	L	H				
CHOP		L		L	L	L	H	H	H	L	Oat	Oat	Oot	Oot	L	H	H	L				

Ot : Logical value when the switch is depressed  
 Ot + 1 : Logical value after the switch is depressed  
 Oit : Indicates that Oit which is the logical value before the switch is depressed is output when the switch is depressed.

## TROUBLESHOOTING

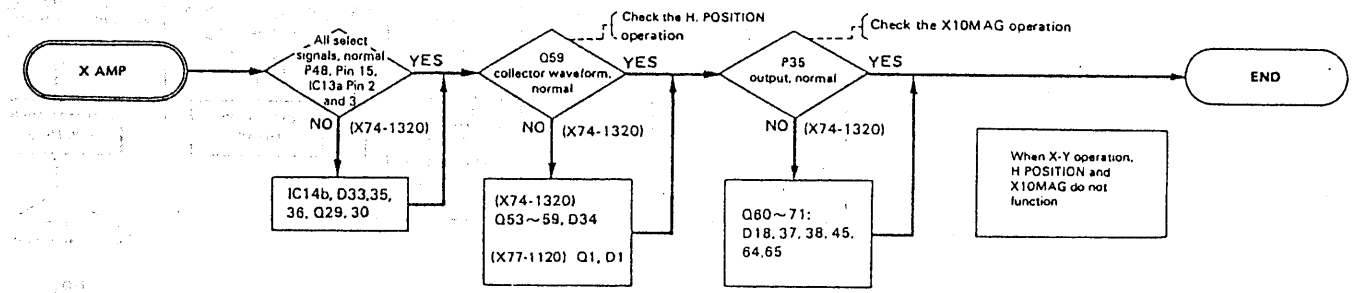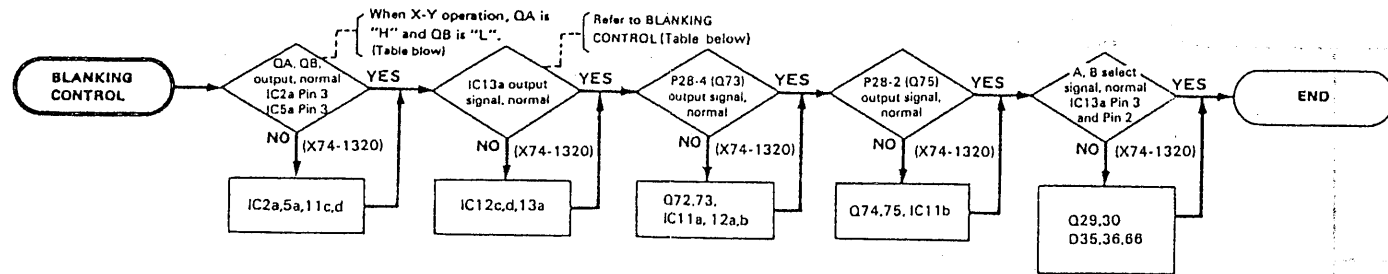


### BLANKING CONTROL


H DISPLAY	P48 X-Y BUFFER ISPin	IC13a				IC12d OUT	P28	
		S	R	Q	Q̄		A blanking 4 Pin	B blanking 2 Pin
A	H	H	L	H	L	H	QA	H
ALT	H	L	L	TOGGLE		H	QA*	QB
A-INT-B	H	H	L	H	L	H	QA	QB
B-DLY'D	H	L	H	L	H	H	H	QB
DUAL	H	L	L	TOGGLE	TOGGLE	QA*	QB*	
X-Y	L	H	L	H	L	H	L	H

The QA and QB in the table show the reverse phase of QA and AB described.


\*1 Complex waveform IC 11b and QA signals.  
\*2 Complex waveform IC11b output. When CHOP operation, output of P28 is complex CHOP signal waveform.

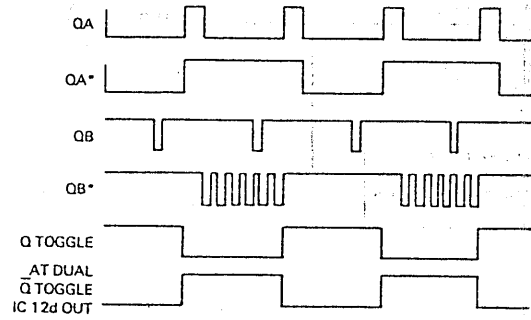


RELATIONSHIP BETWEEN A, B SWEEP AND QA, QB

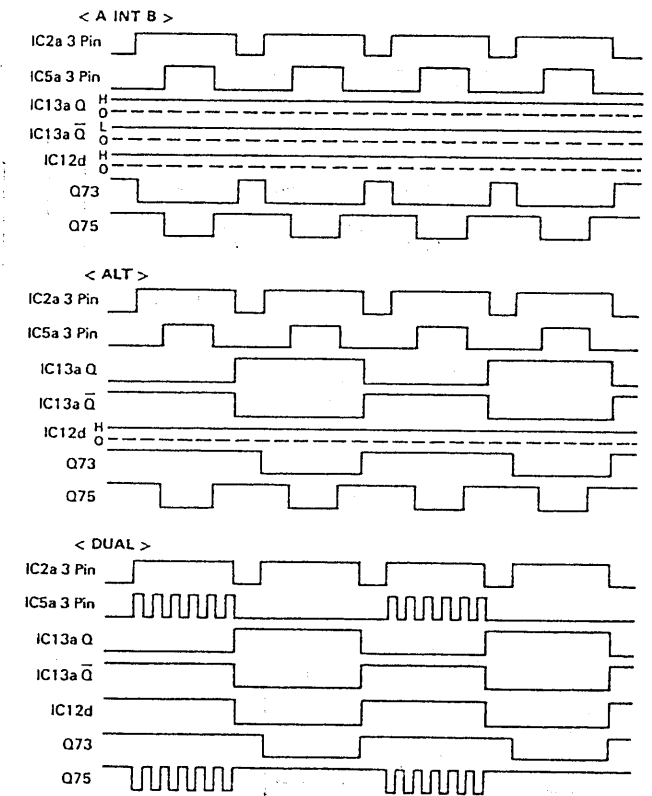


BLANKING CONTROL

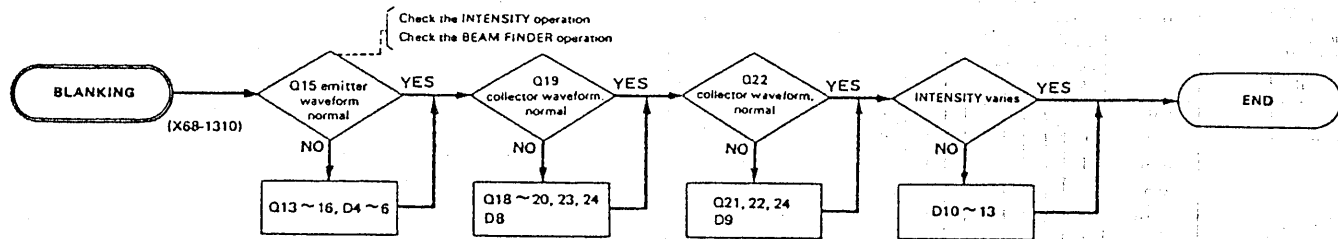

## TROUBLESHOOTING

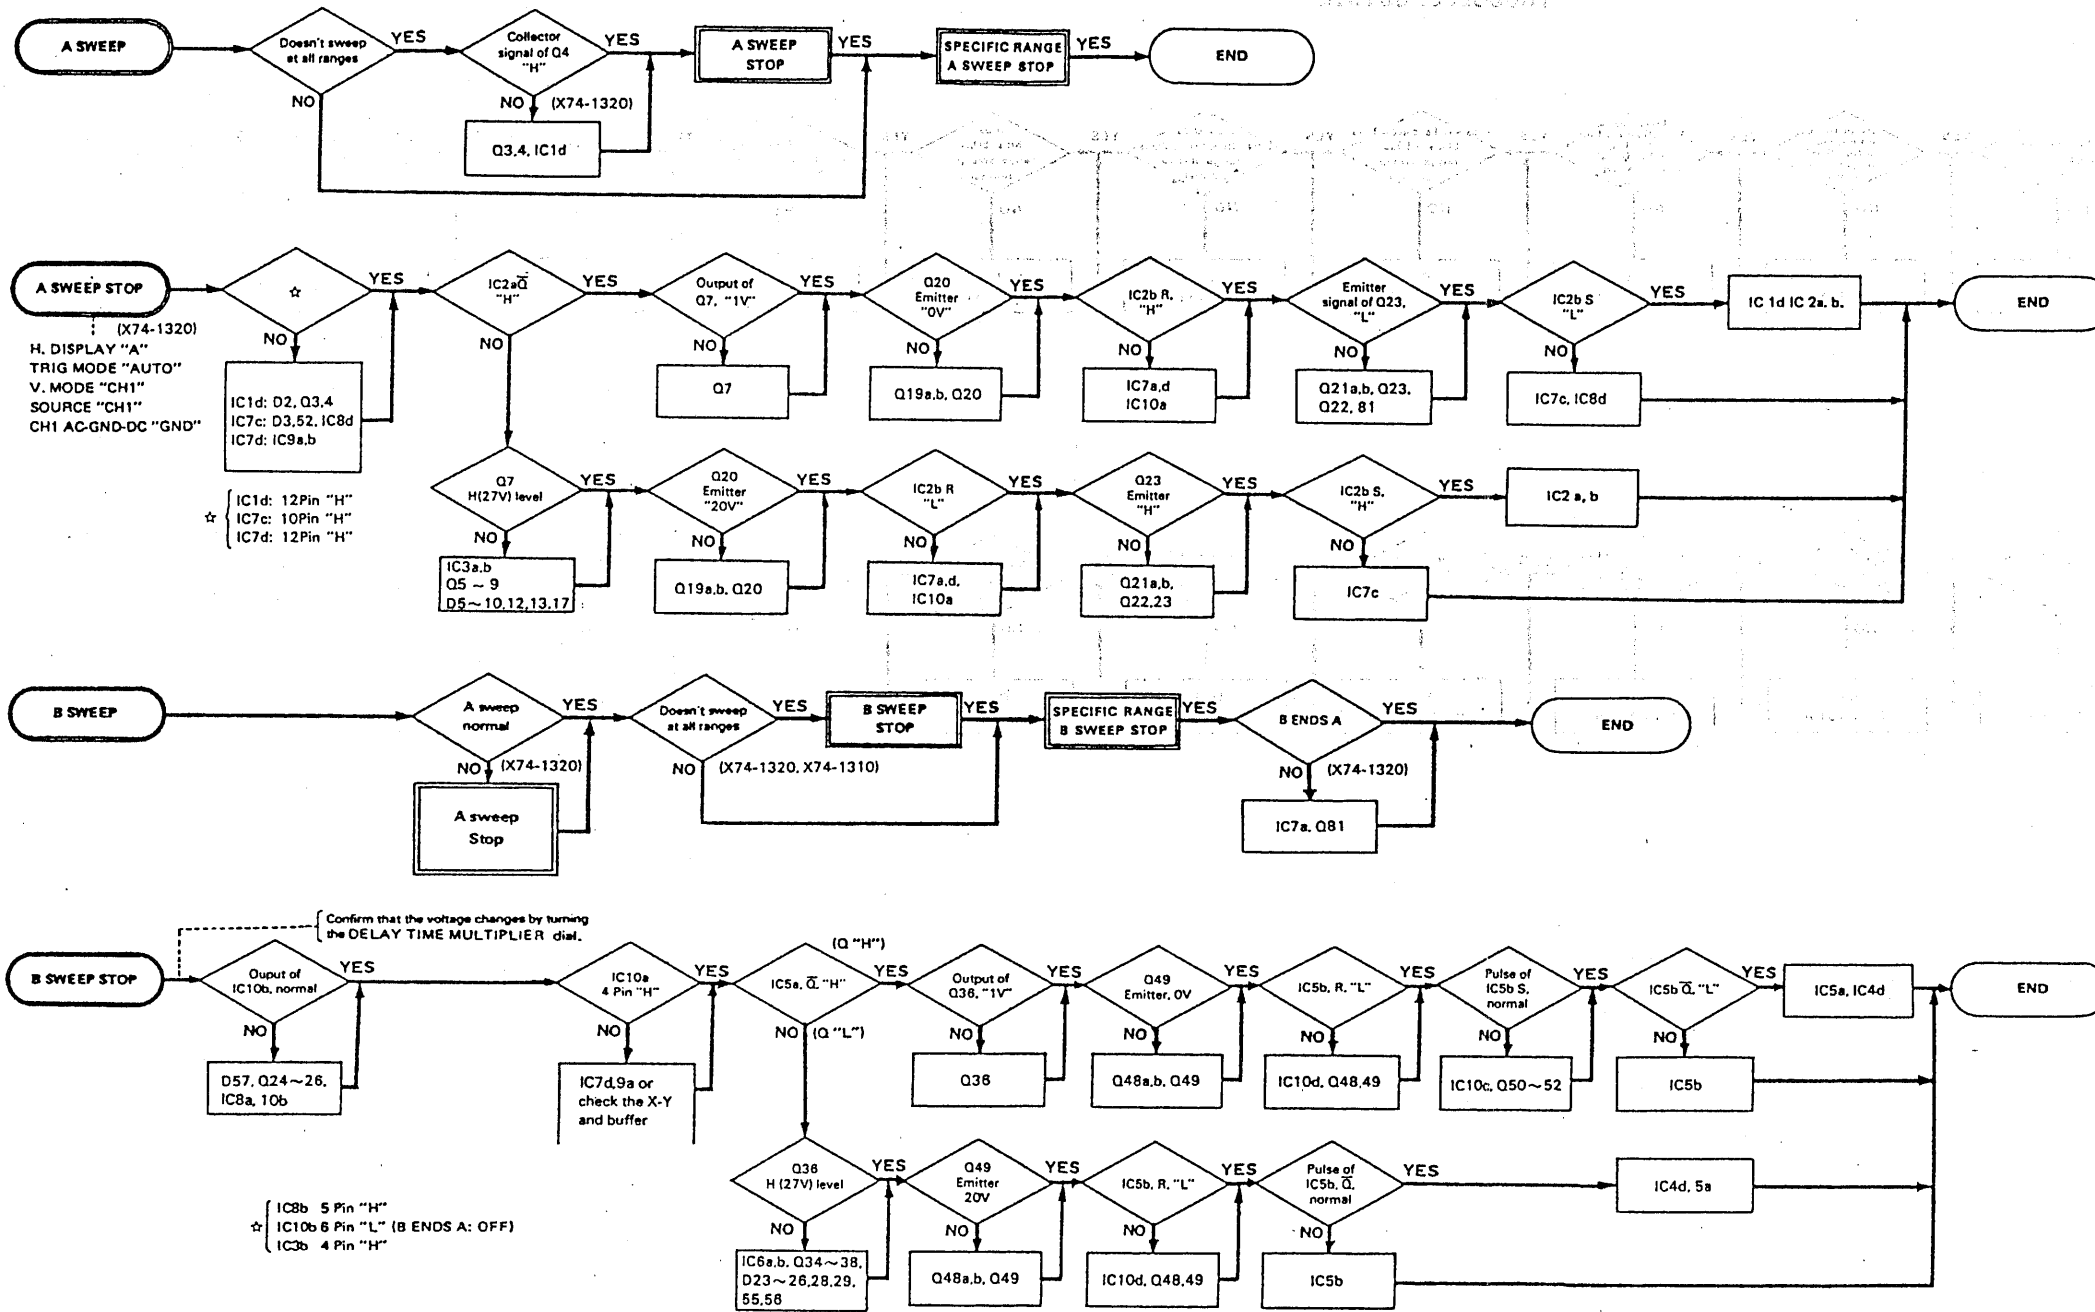




Waveform in Sweep circuit (X74-1320-00)  
(Input signal 1 kHz, SWEEP TIME 1 ms/div)

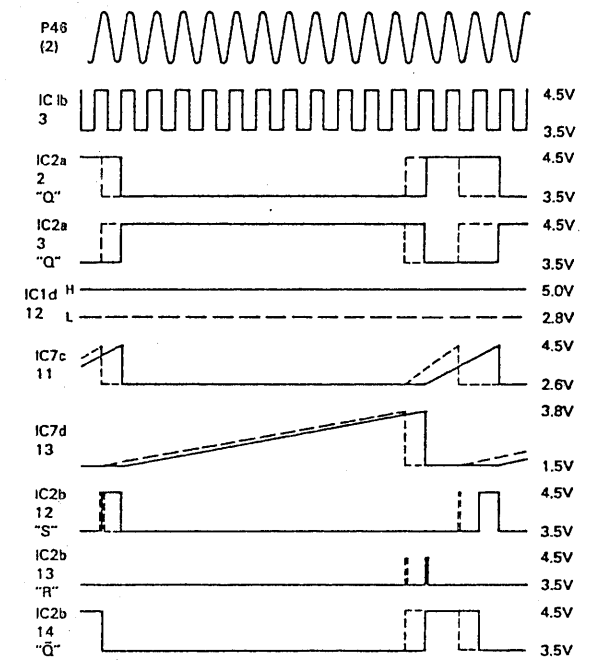

Broke-line auto free run  
(at non-signal)



## TROUBLESHOOTING

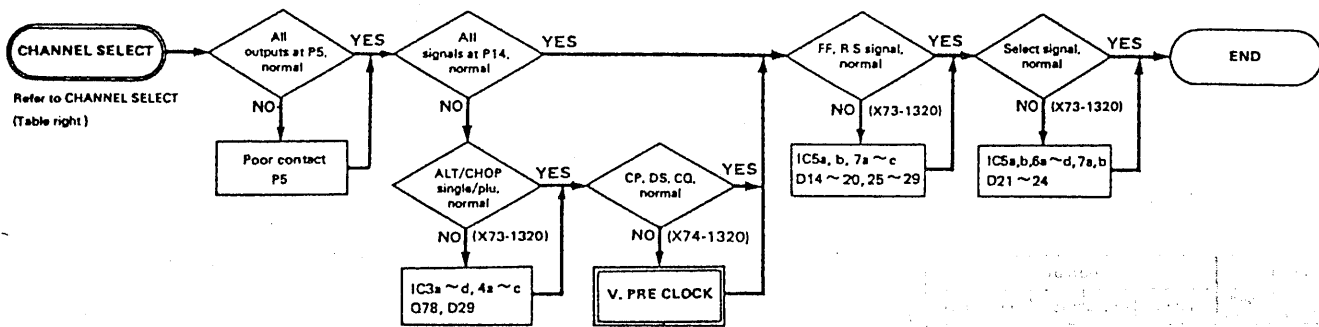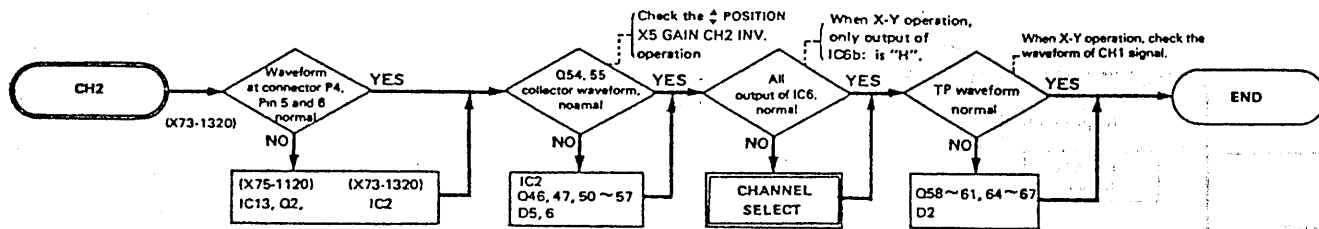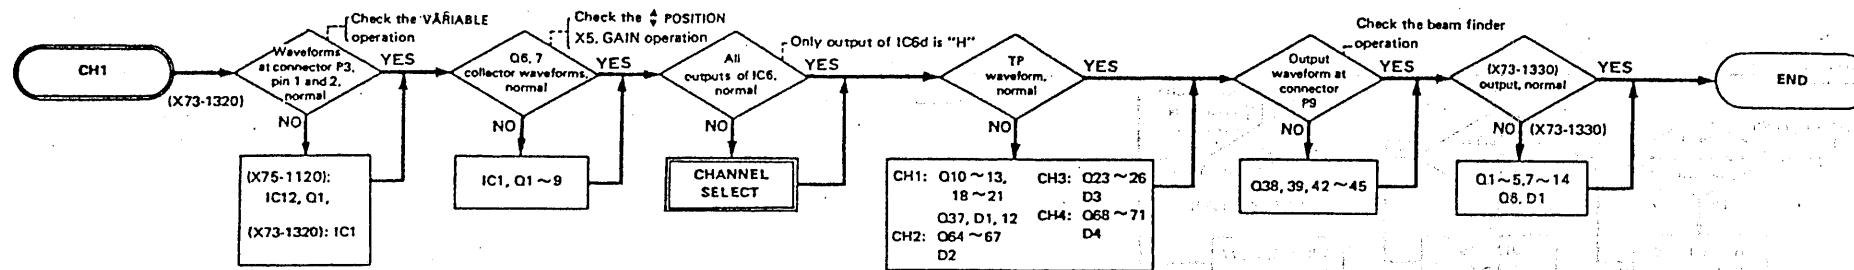

### CHANNEL SELECT

	MODE	INPUT	LOG	OUTPUT (P5)	VERTICAL CLOCK (P14)				FLIP-FLOP PRESET, CLEAR signal				FLIP-FLOP OUTPUT signal				CHANNEL SELECT signal											
					CH1		CH2		DS		CO		R5b		R5c		Q5b		Q5c		CH1		CH2		CH3		CH4	
					CH1	CH2	DU	AL	ADD	ALT	CP	DS	CO	R5b	R5c	Q5b	Q5c	CH1	CH2	CH3	CH4							
SWEEP OPERATION	Except the DUAL SWEEP	CH1	L	H	H	H	L	L	L	L	X	L	L	L	L	H	H	H	L	L	L	L	L	L	L			
		CH2	H	L	H	H	L	L	L	L	X	H	L	L	L	L	H	H	L	L	L	L	L	L	L			
		ADD	H	H	H	L	H	L	L	L	X	L	L	L	L	H	H	H	L	L	L	L	L	L	L			
		ALT																										
DUAL SWEEP	QUAD	CHOP	H	H	L																							
		ALT																										
		CHOP	H	H	H																							
		ALT																										
DUAL SWEEP	QUAD	CHOP	H	H	L																							
		ALT																										
		CHOP	H	H	H																							
		ALT																										
X-Y operation		X	X	X	X	X	X	X	X	X	H	H	L	L	L	L	H	L	L	L	H	L	L	L				

(Note) "X" H or L

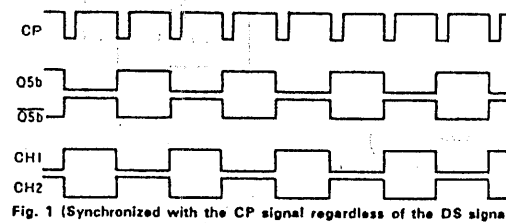


Fig. 1 (Synchronized with the CP signal regardless of the DS signal)

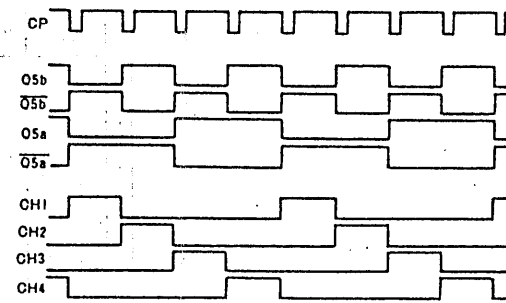


Fig. 2 (Synchronized with the CP signal regardless of the DS signal)

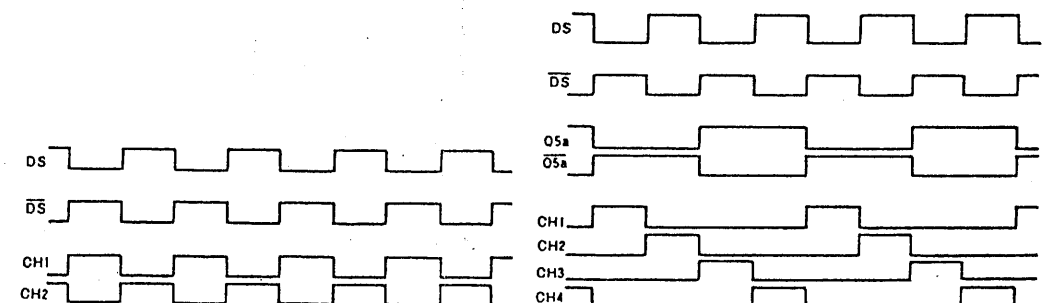


Fig. 3 (Synchronized with the DS signal regardless of the CP signal)






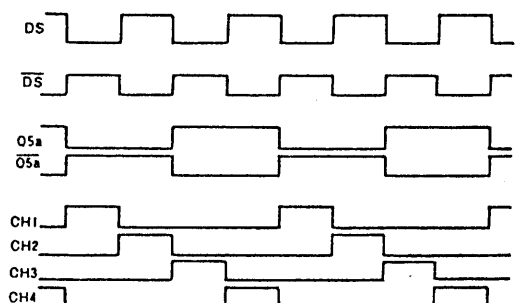


Fig. 4 (Synchronized with the DS signal regardless of the CP signal)

# TROUBLESHOOTING

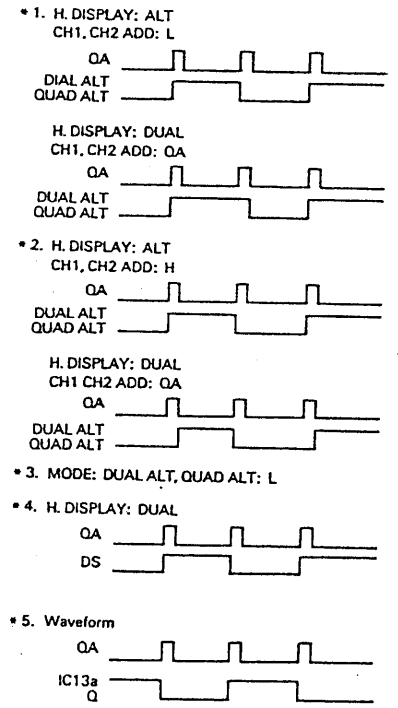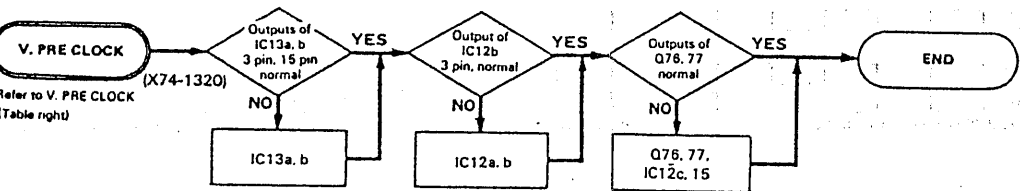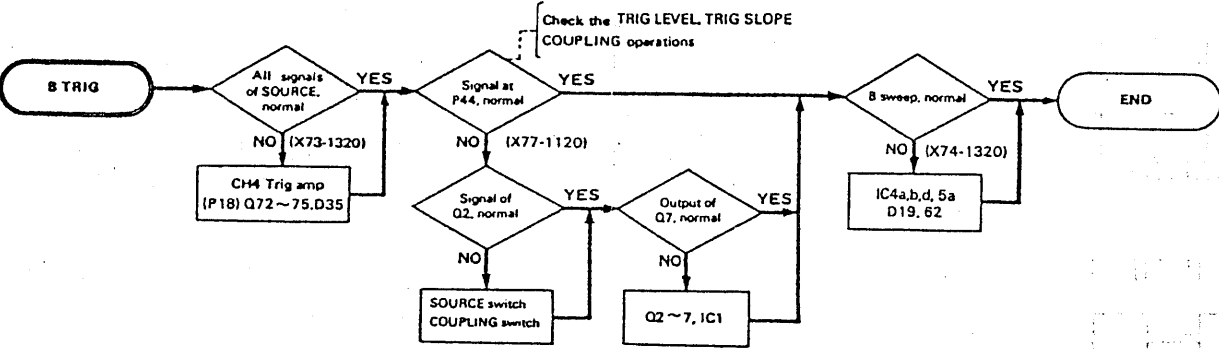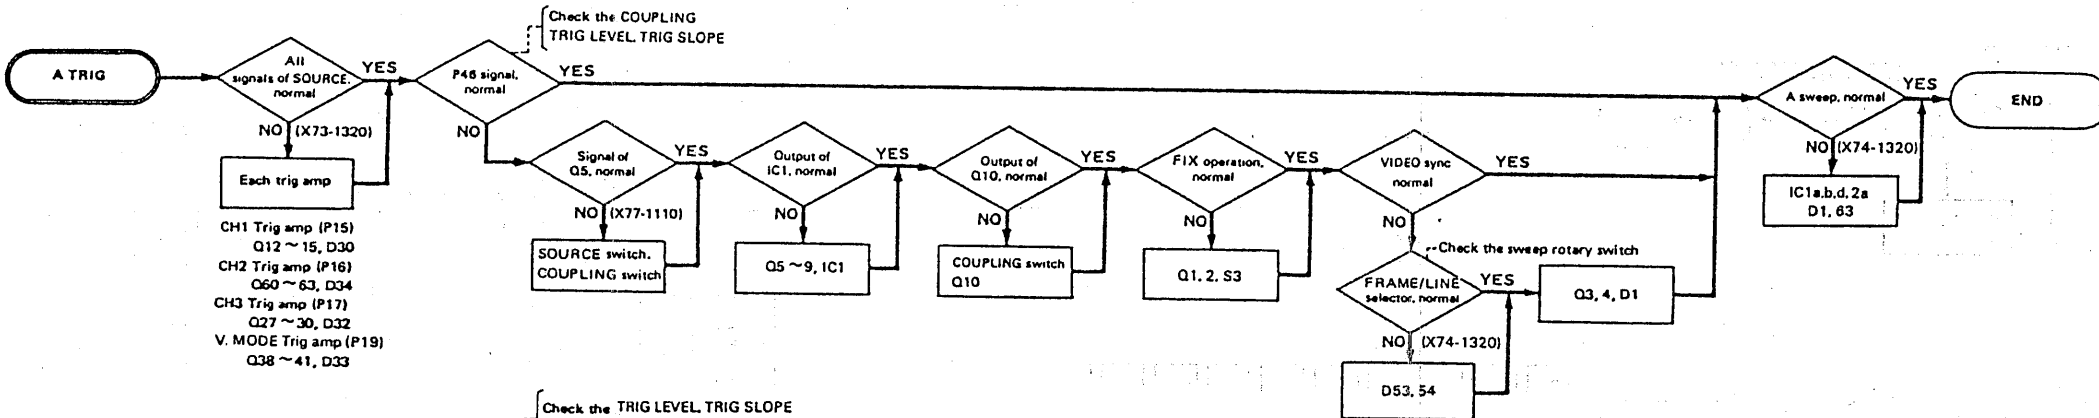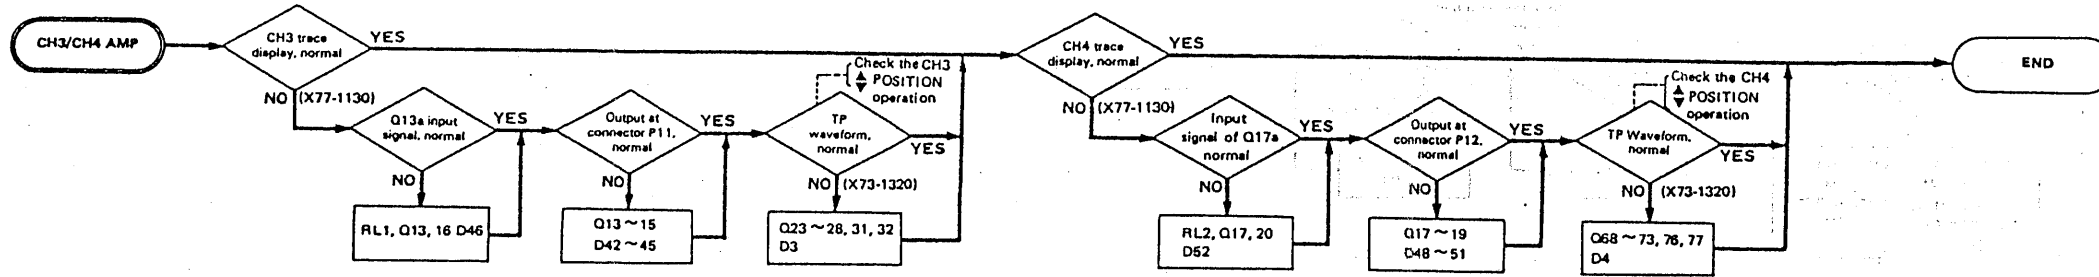

### V. PRE CLOCK

MODE	INPUT		OUTPUT					
	ALT	CHOP	Signal PPr	IC14d	IC15a,b	IC15c,d	CP	DS=4
CH1	L	L	L	H	QA*1	QA*2	H	
CH2	L	L	L	H	QA*1	QA*2	H	
ALT	L	H	H	H	QA*1	QA*2	H	
CHOP	H	H	L	L	CHOP Osc.	CHOP Pulse	H	
ADD	L	L	H	H	QA*1	QA*2	H	
QUAD	L	H	H	H	QA*1	QA*2	H	
CHOP	H	H	L	L	CHOP Osc.	CHOP Pulse	H	
X-Y Operation	DUAL, ALT, QUAD, ALT, OTHER	L, H	H	DUAL, ALT, QUAD, ALT, OTHER	CHOP Osc. = 3	CHOP Pulse = 3	H	

Refer to the right table.

H. DISPLAY	IC15b	IC15b	IC15a, b	CP	IC13a
DISPLAY	7 Pin	6 Pin	OUTPUT		Q
A	L	L	QA	L	H
A-INT-B	L	L	QA	L	H
B DLYD	L	L	QA	L	L
DUAL	H	L	QA	H	+5
X-Y	H	L	L	L	H

Each signal of IC16a, CP, DS vary by H. DISPLAY.

# PARTS LIST

Unless otherwise specified, all resistors are  $\pm 5\%$ , 1/6W and all capacitor's voltage ratings are 50WV.

The specifications and parts list and schematic diagram may be changed without notice owing to a technical innovation.


## ABBREVIATIONS

Resistor	
RD	Carbon
RN	Metal film
RS	Metal film
RC	Solid
MG	Metal glaze
VR	Variable or semi-fixed
Capacitor	
CC	Ceramic
CK	Ceramic
CE	Electrolytic
CM	Mica
CQ	Mylar (Polypropylen)
TC	Ceramic trimmer
MF	Metal film
SCC	Semiconductor ceramic
Semiconductor	
TR	Transistor
FET	Field effect transistor

The part No. of each connector is stamped or color-coded. The color-coding is as follows.

Black	Brown	Red	Orange	Yellow	Green	Blue	Purple	Grey	White
0	1	2	3	4	5	6	7	8	9

[ Example ]

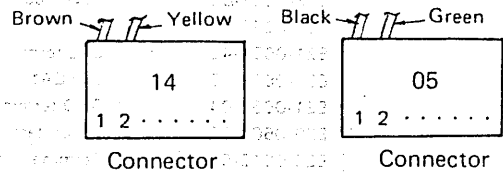

Each connector can be classified by the color of pin 1 and pin 2.

## CHASSIS ASSEMBLY

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
1-1		A13-0731-42	Frame		
1-2		A13-0732-12	Frame		
1-3		A20-2756-15	Die-casting panel		
1-4		A21-0882-04	Decorative panel		
1-5		A21-0883-04	Decorative panel		
1-6		A21-0884-04	Decorative panel		

# PARTS LIST


Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
1-7		A22-0817-33	Sub panel		
1-8		A23-1627-12	Rear panel		
1-9		A33-0501-14	Reflector		
1-10		D23-0801-04	Spacer		
1-11		B07-0706-04	Push escutcheon		
1-12		B19-0713-13	Filter		
1-13		B20-0919-14	Floating core		
1-14		B30-0903-15	LED		
1-15		E18-0351-05	Power connector		
1-16		E04-0251-05	BNC jack		
1-17		E21-0654-42	CAL terminal		
1-18		E21-0659-15	Coil CAL		
1-19		E21-0657-04	GND terminal		
1-20		E29-0504-05	Teflon terminal		
1-21		E23-0015-04	Terminal lug		
1-22		E23-0513-05	Earth lug		
1-23		E23-0520-05	Earth lug		
1-24		F05-1224-05	Fuse 1.2A		
1-25		F15-0138-04	Felt		
1-26		F15-0716-14	Spacer		
1-27		F20-0621-04	Insulator plate		
1-28		J13-0038-05	Fuse holder		
1-29		J19-1624-04	Stopper		
1-30		J21-2927-04	Ring-antirun		
1-31		J21-2871-14	Bracket (For D.L.)		
1-32		J29-0505-04	Retainer clamp		
1-33		J39-0506-04	Spacer		
1-34		J42-0512-04	Mounting rubber (For CRT)		
1-35		J42-0513-04	Mounting rubber (For CRT)		
1-36		J42-0514-04	Mounting rubber (For lamp)		
1-37		J61-0511-05	Wire saddle		
1-38		K21-0819-03	Knob		
1-39		K21-0821-14	Knob		
1-40		K21-0831-24	Knob		
1-41		K21-0832-14	Knob		
1-42		K21-0833-14	Knob		
1-43		K21-0837-24	Knob		
1-44		K21-0838-93	Knob		
1-45		K27-0526-04	Lever knob		
1-46		L76-0104-05	Delay line		
1-47	S29	S31-2004-05	Slide switch		
1-48			Power thermister 4W-25V		
1-49	VR1	R01-1507-05	Variable resistor 3 k $\Omega$		
	VR2	R01-1507-05	Variable resistor 3 k $\Omega$		
1-50	VR4a	R06-2502-05	Variable resistor 5 k $\Omega$		
	VR4b	R06-2502-05	Variable resistor 5 k $\Omega$		
1-51	VR3a	R23-2501-05	Variable resistor 5 k $\Omega$		
	VR3b	R23-2501-05	Variable resistor 5 k $\Omega$		
1-52	VR5	R29-0504-05	Potential meter 1 k $\Omega$		
1-53		002-0006-05	Shield gasket		
1-54		F10-1553-14	Shield plate for CH3		
1-55		F10-1557-04	Earth band		
1-56		G01-0906-04	Spring		
1-57		J39-0509-04	Supporter for P.C.B		
1-58		J25-2902-03	Printed circuit board		
1-59		F11-0963-03	Shield case for switching power block		
1-60		W02-0402-25	High voltage block		
1-61		W02-0405-15	Switching power block		
1-62		X68-1310-00	Power blanking unit		
		J25-2972-03	Printed circuit board		
1-63		R03-3502-15	Variable resistor 10 k $\Omega$		
1-64		R05-8001-05	Variable resistor 3 M $\Omega$		
1-65		R23-1501-05	Variable resistor 1 k $\Omega$		
1-66		F02-0503-04	Heat sink		
1-67		J21-2930-04	Bracket (For VR)		
1-68		X73-1320-00	Vertical pre amp unit		




# PARTS LIST

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
1-69		J25-2973-03	Printed circuit board		
		X73-1330-00	Vertical output unit		
1-70		J25-2974-04	Printed circuit board		
		F02-0501-04	Heat sink		
1-71		X74-1320-00	Trig sweep unit		
		J25-2975-03	Printed circuit board		
1-72		X74-1230-02	Horizontal output amp unit		
		J25-2976-04	Printed circuit board		
1-73		F01-0827-04	Heat sink		
1-74		X74-1310-00	Sweep rotary unit		
		J25-2971-03	Printed circuit board		
1-75		S02-2503-05	Rotary switch		
1-76		X75-1120-00	Vertical ATT unit		
		J25-2977-03	Printed circuit board		
1-77		X77-1110-00	A trig switch unit		
		J25-2978-04	Printed circuit board		
1-78		S33-2501-05 ✓	Lever switch		
1-79		S32-4008-05 ✓	Lever switch		
1-80		R01-2510-05	Variable resistor 5 k $\Omega$		
1-81		X77-1120-00	B trig switch unit		
		J25-2979-04	Printed circuit board		
1-82		S37-2005-05 ✓	Lever switch		
1-83		R01-2511-05	Variable resistor 5 k $\Omega$		
1-84		X77-1130-00	Horizontal mode control unit		
		J25-2980-03	Printed circuit board		
1-85		J25-2900-03	Printed circuit board		
1-86		K27-0524-14	Push knob		
1-87	S10	S40-1504-05	Tact switch		
	S11	S40-1504-05	Tact switch		
	S12	S40-1504-05	Tact switch		
	S13	S40-1504-05	Tact switch		
	S14	S40-1504-05	Tact switch		
	S15	S40-1504-05	Tact switch		
	S16	S40-1504-05	Tact switch		
	S17	S40-1504-05	Tact switch		
	S18	S40-1504-05	Tact switch		
	S19	S40-1504-05	Tact switch		
		J61-0501-05	Supporter for P.C.B		
		N08-0609-04	Post (Hex)		
		N10-2030-41	Nut (Hex) M3		
		N10-2060-46	Nut (Hex) M6		
		N14-0602-34	Nut		
		N14-0609-04	Nut		
		N16-0026-46	Lockwasher (For M2.6)		
		N16-0030-46	Lockwasher (For M3)		
		N17-1030-41	Lockwasher (For M3)		
		N19-0191-05	Washer nonmetal		
		N19-0702-04	Flat washer		
		N19-0704-04	Flat washer		
		N30-2608-41	Pan-head screw M2.6 x 8		
		N30-3006-46	Pan-head screw M3 x 6		
		N30-3008-41	Pan-head screw M3 x 8		
		N32-2606-46	Flat-head screw M2.6 x 6		
		N32-3006-46	Flat-head screw M3 x 6		
		N89-3006-46	Screw (Tapping) 3 x 6		
		N89-3008-46	Screw (Tapping) 3 x 8		
		N89-3010-46	Screw (Tapping) 3 x 10		
		N09-0707-05	Flat-head screw (Tapping) (3 x 18)		

# DISASSEMBLY

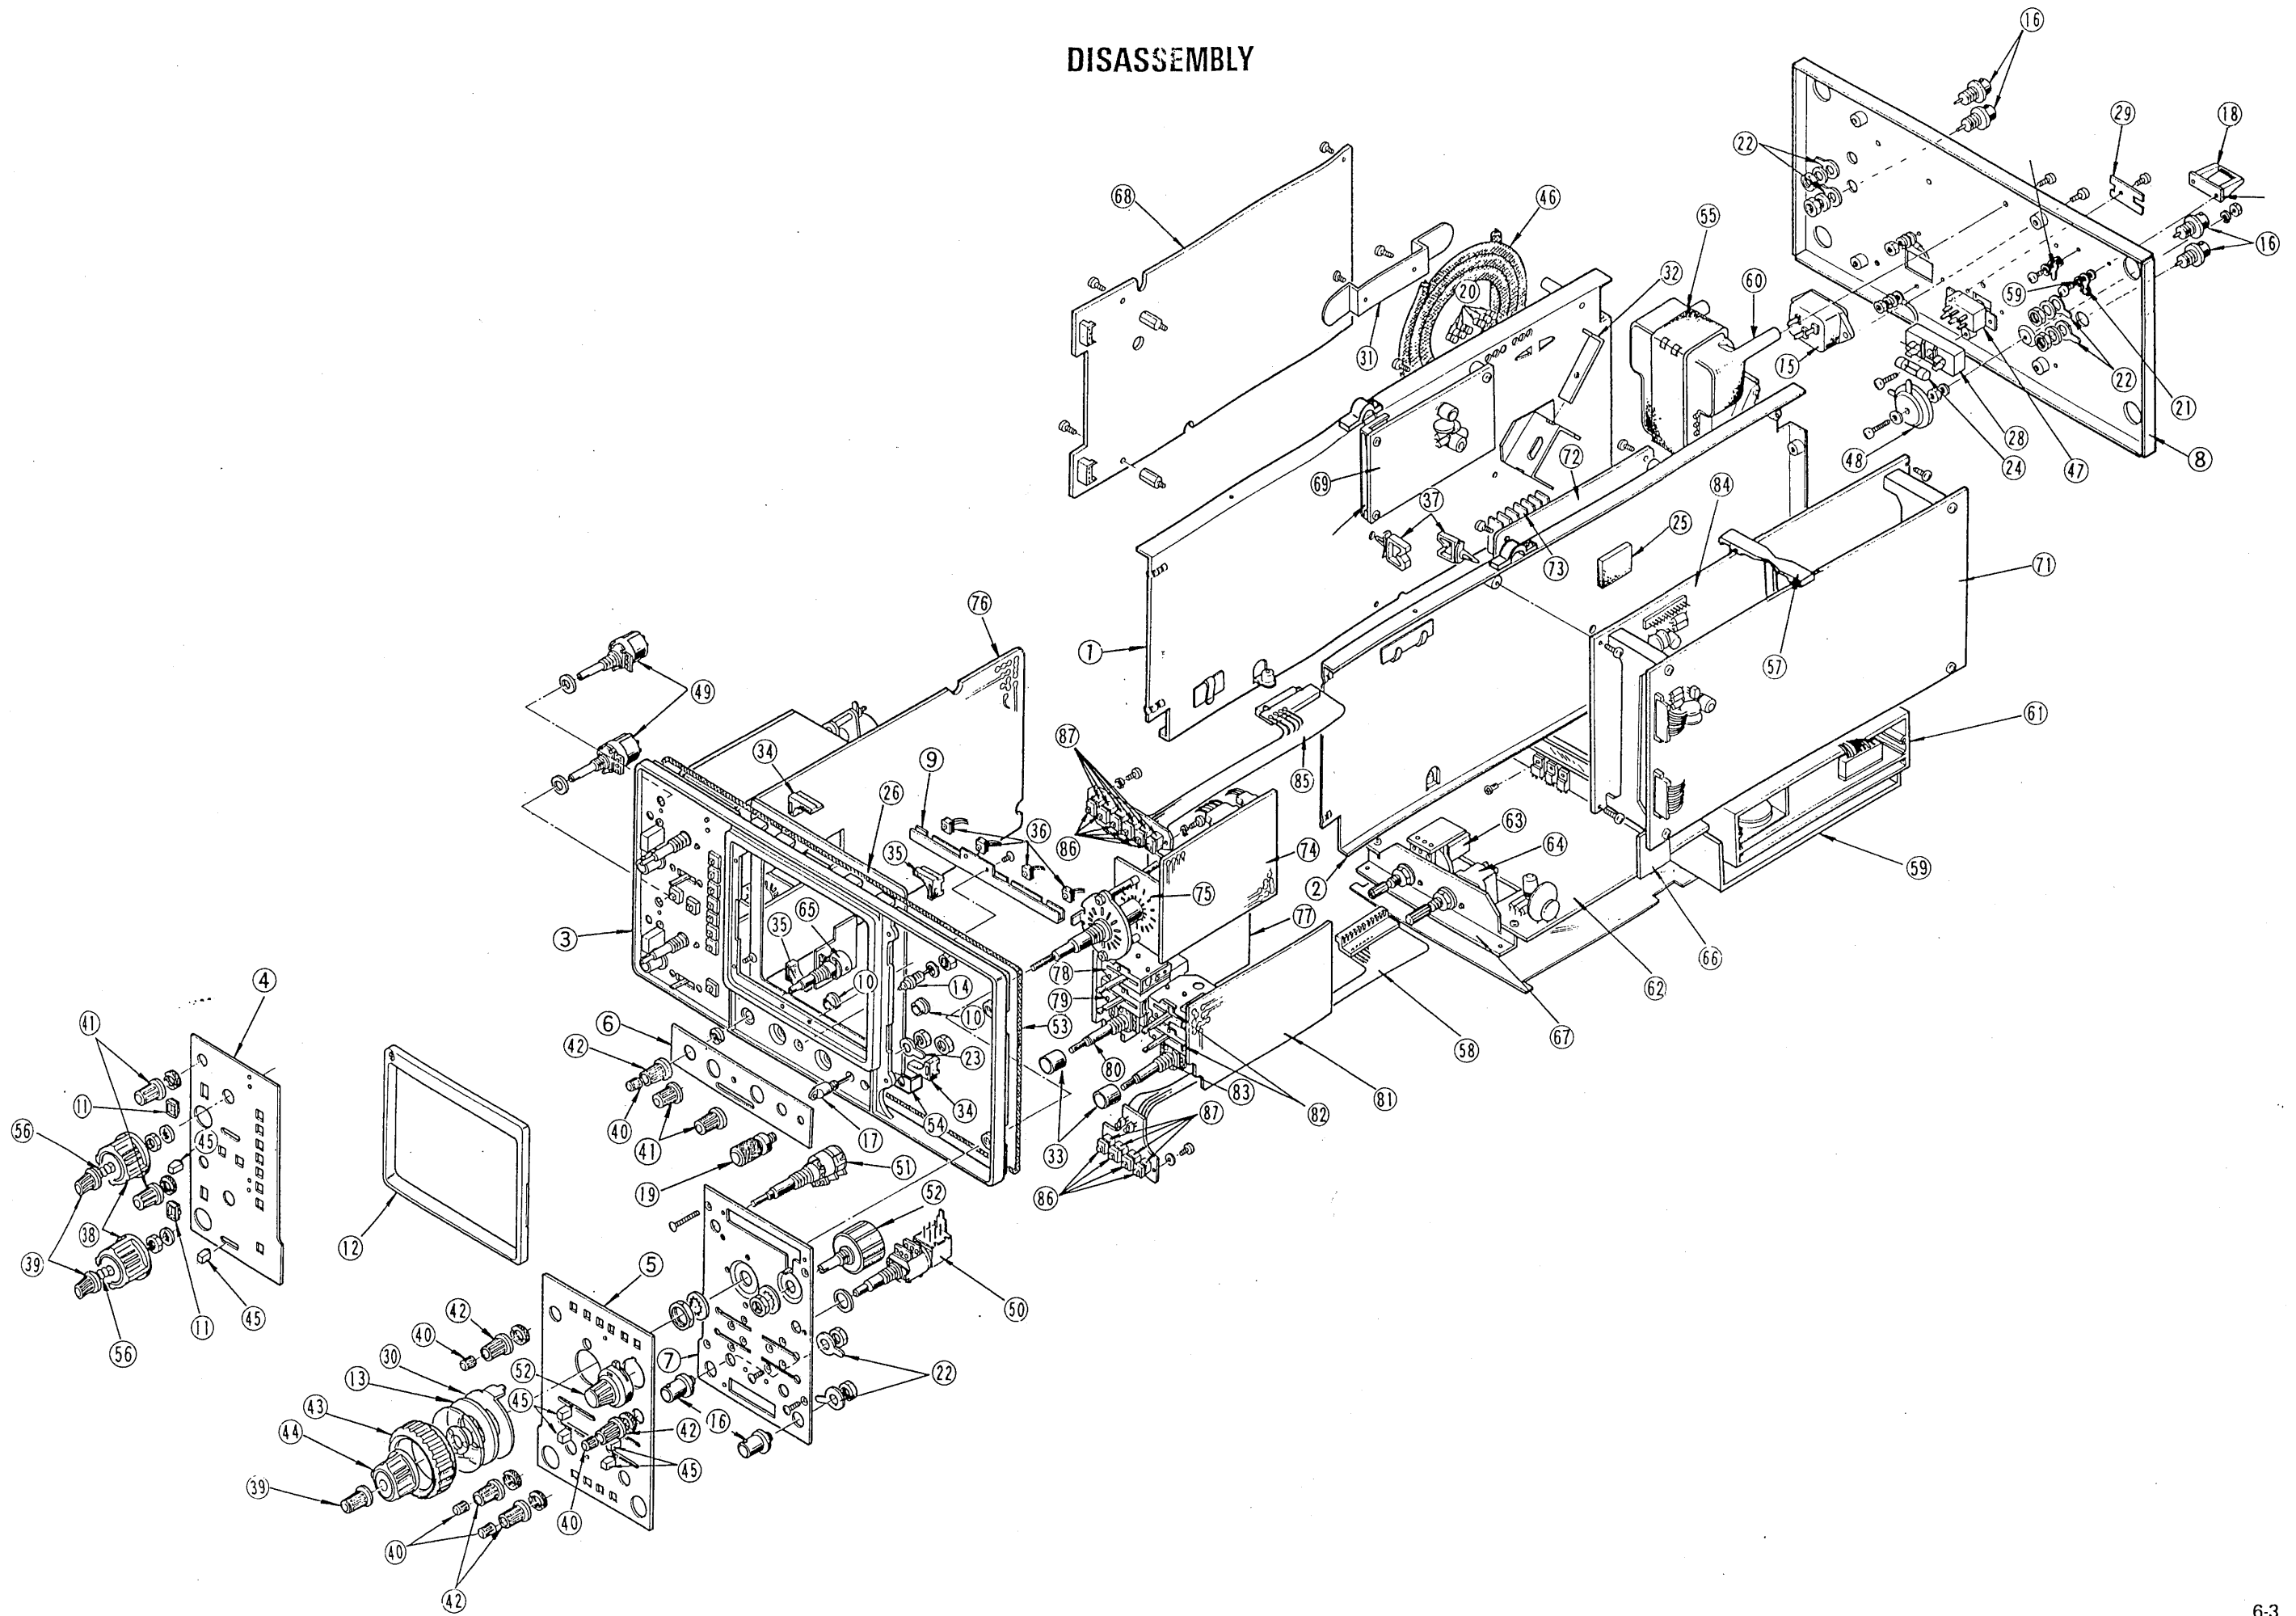

# DISASSEMBLY

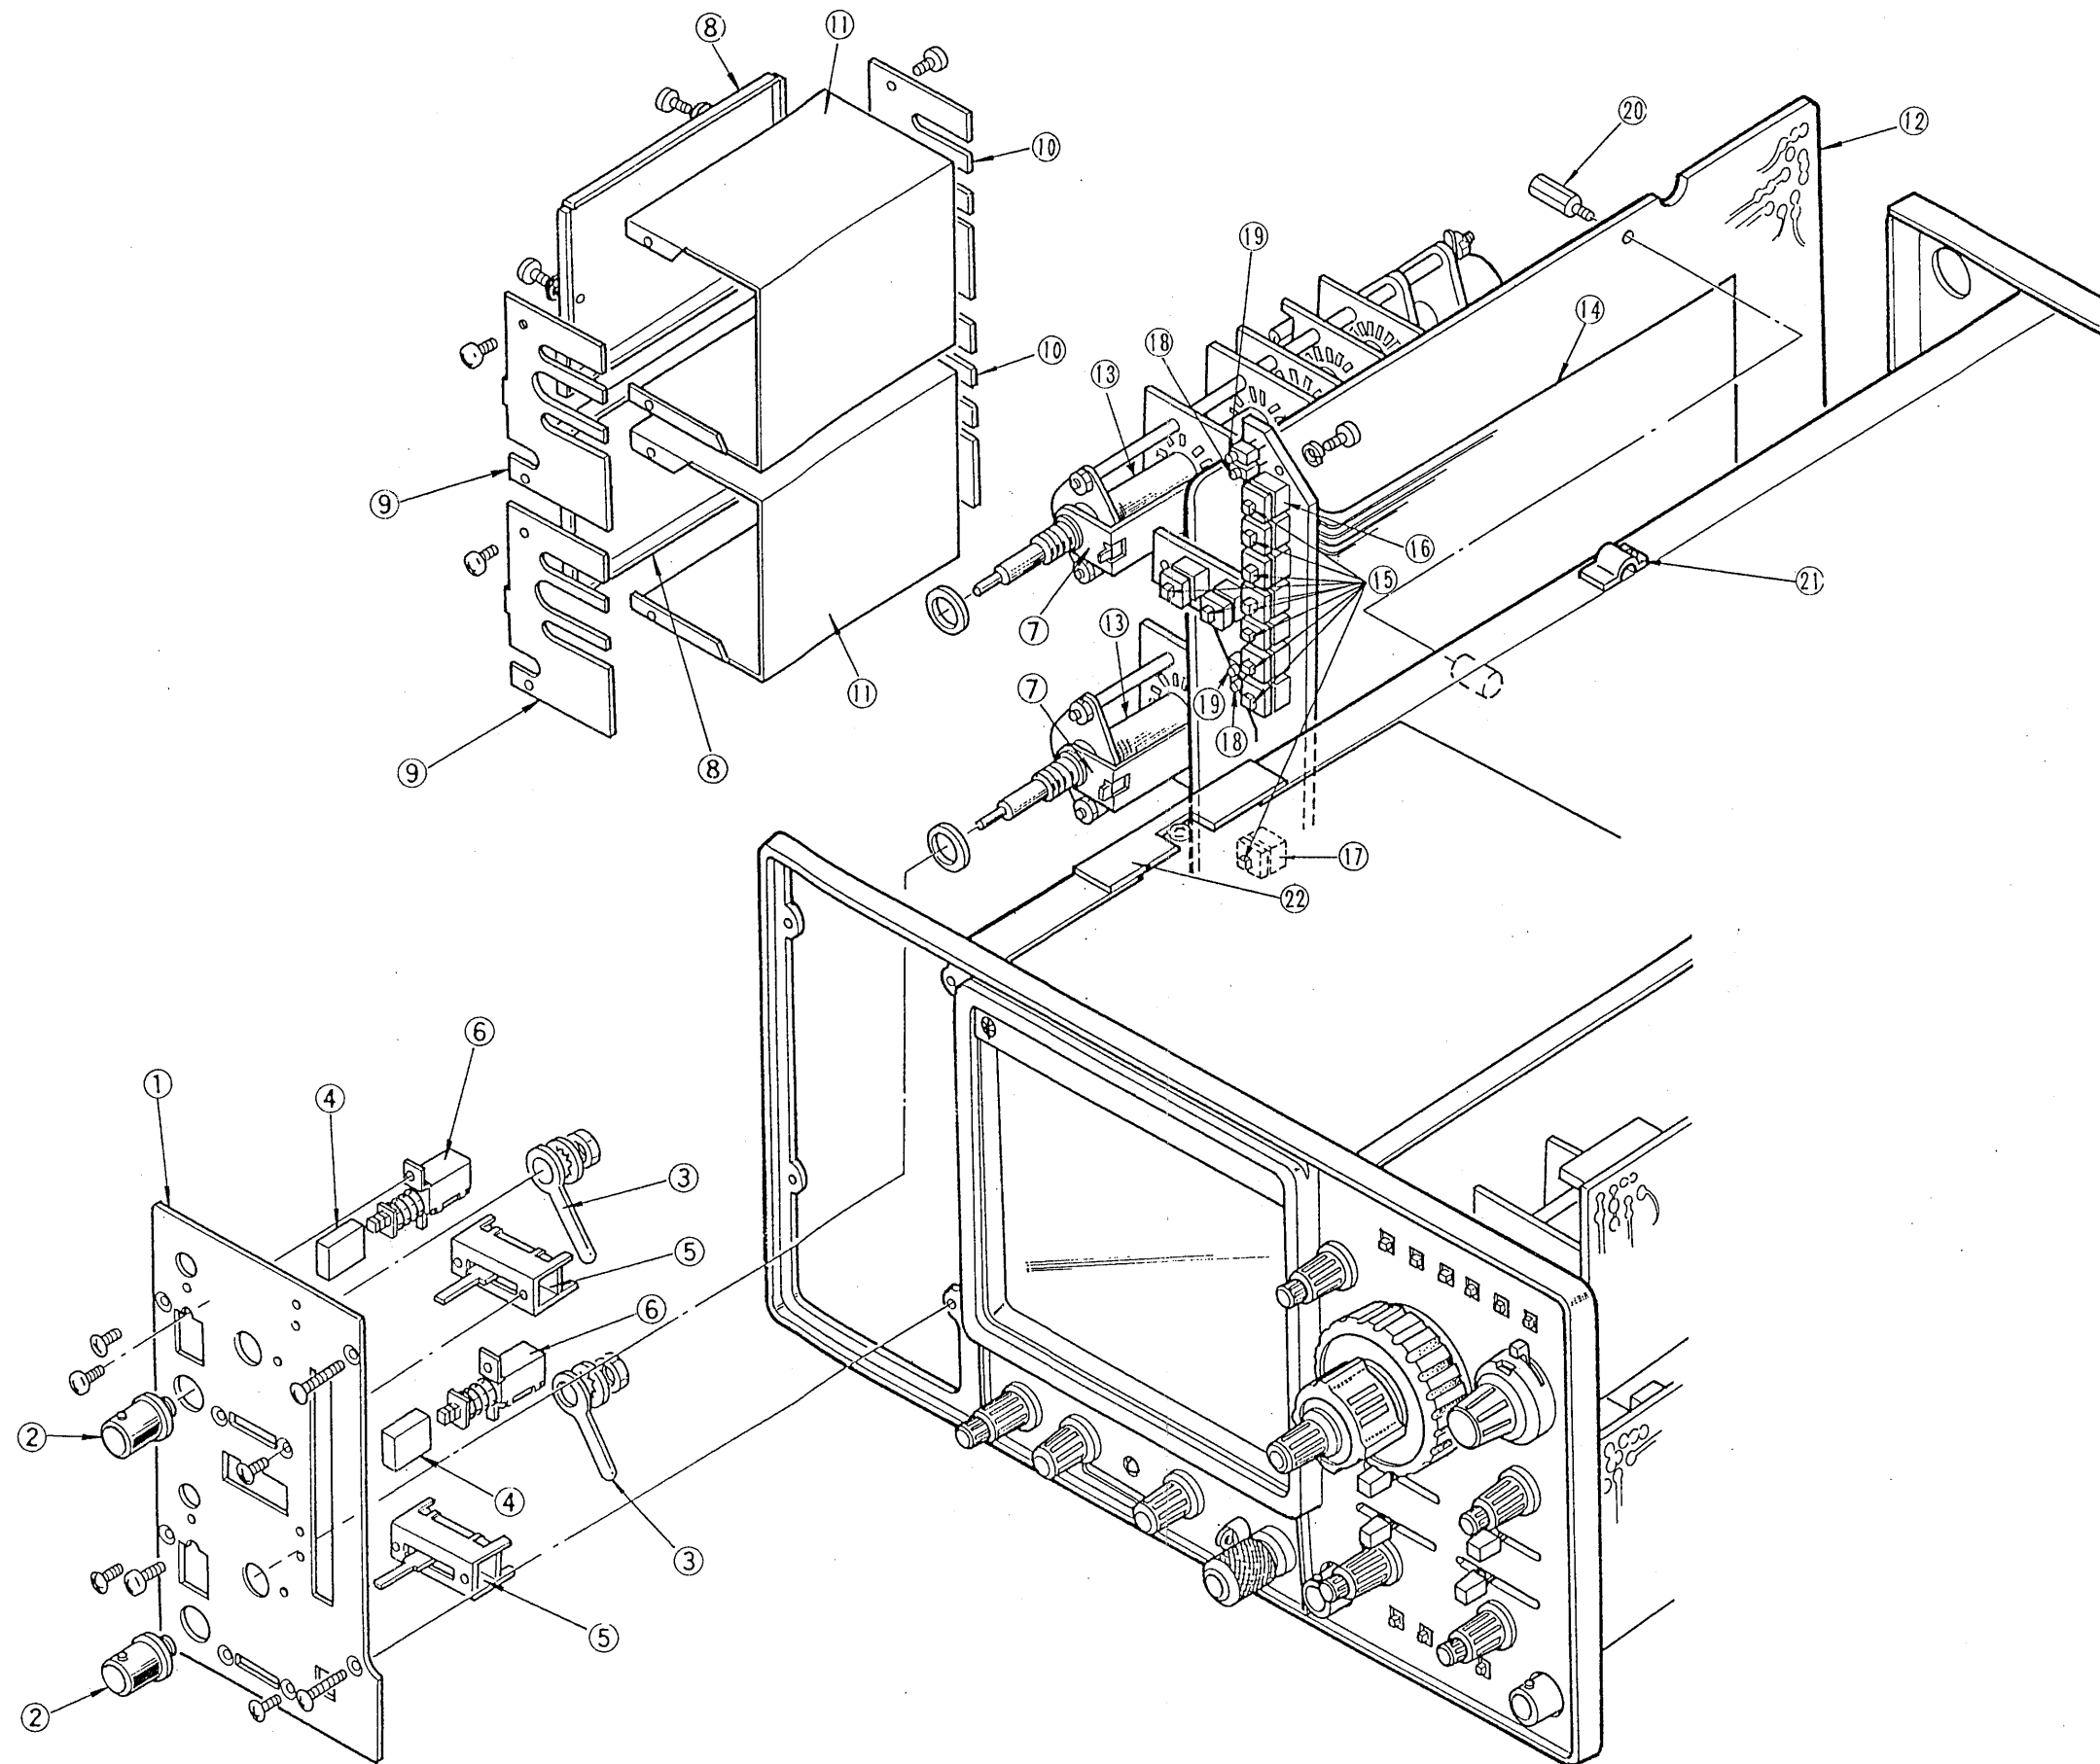


# PARTS LIST

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
2-1		A22-0816-13	Sub panel		
2-2		E04-0251-05	BNC jack		
2-3		E23-0519-04	Earth lug		
2-4		K27-0504-04	Push knob		
2-5		S31-2506-05	Slide switch		
	S25	S31-2506-05	Slide switch		
2-6	S23	S40-2403-05	Push switch		
	S24	S40-2403-05	Push switch		
2-7		E23-0521-04	Earth terminal		
2-8		F11-0961-04	Shield case		
2-9		F11-0964-04	Shield case		
2-10		F11-0965-04	Shield case		
2-11		F11-0966-04	Shield case		
2-12		X75-1120-00	Vertical ATT unit		
		J25-2977-03	Printed circuit board		
2-13		S01-4503-05	Rotary switch		
2-14		J25-2898-03	Printed circuit board		
2-15		K27-0524-14	Push knob		
2-16	S1	S40-1504-05	Tact switch		
	S2	S40-1504-05	Tact switch		
	S3	S40-1504-05	Tact switch		
	S4	S40-1504-05	Tact switch		
	S5	S40-1504-05	Tact switch		
	S6	S40-1504-05	Tact switch		
	S7	S40-1504-05	Tact switch		
	S8	S40-1504-05	Tact switch		
	S9	S40-1504-05	Tact switch		
	S20	S40-1505-05	Tact switch		
2-17		K-14LN222RP	LED		
2-18		K-14LN322GP	LED		
2-19		N08-0609-04	Post (Hex)		
2-20		E23-0522-14	Earth plate		
2-21		G13-0714-04	Cushion		
2-22		N16-0026-46	Lockwasher		
		N16-0030-46	Lockwasher		
		N30-2604-46	Pan-head screw M2.6 x 4		
		N30-3006-46	Pan-head screw M3 x 6		
		N32-2004-46	Flat-head screw M2 x 4		
		N32-3006-46	Flat-head screw M3 x 6		
		N09-0707-05	Flat-head screw (Tapping) 3 x 18		

## PARTS LIST

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
3-1		E01-1404-05	CRT socket		
3-2		E31-0564-05	Leadwire with connector		
3-3		F11-0962-22	CRT shield		
3-4		F11-0967-13	CRT shield		
3-5		F11-0968-04	CRT shield		
3-6		G16-0602-04	Reflector sheet		
3-7		G16-0603-04	Reflector sheet		
3-8		J19-1623-04	CRT band		
3-9		J21-2925-03	Bracket (For CRT)		
3-10		J21-2926-03	Bracket (For CRT)		
3-11			CRT 15OATM31A		
3-12		L39-0515-05	Rotator coil		
3-13		L39-0514-15	Y align coil		
		N15-1040-46	Lockwasher		
		N16-0030-46	Lockwasher		
		N30-3035-46	Pan-head screw 3 x 35		
		N30-4008-46	Pan-head screw M4 x 8		
		N89-3006-46	Screw (Tapping) 3 x 6		
		N89-3010-41	Screw (Tapping) 3 x 10		

DISASSEMBLY

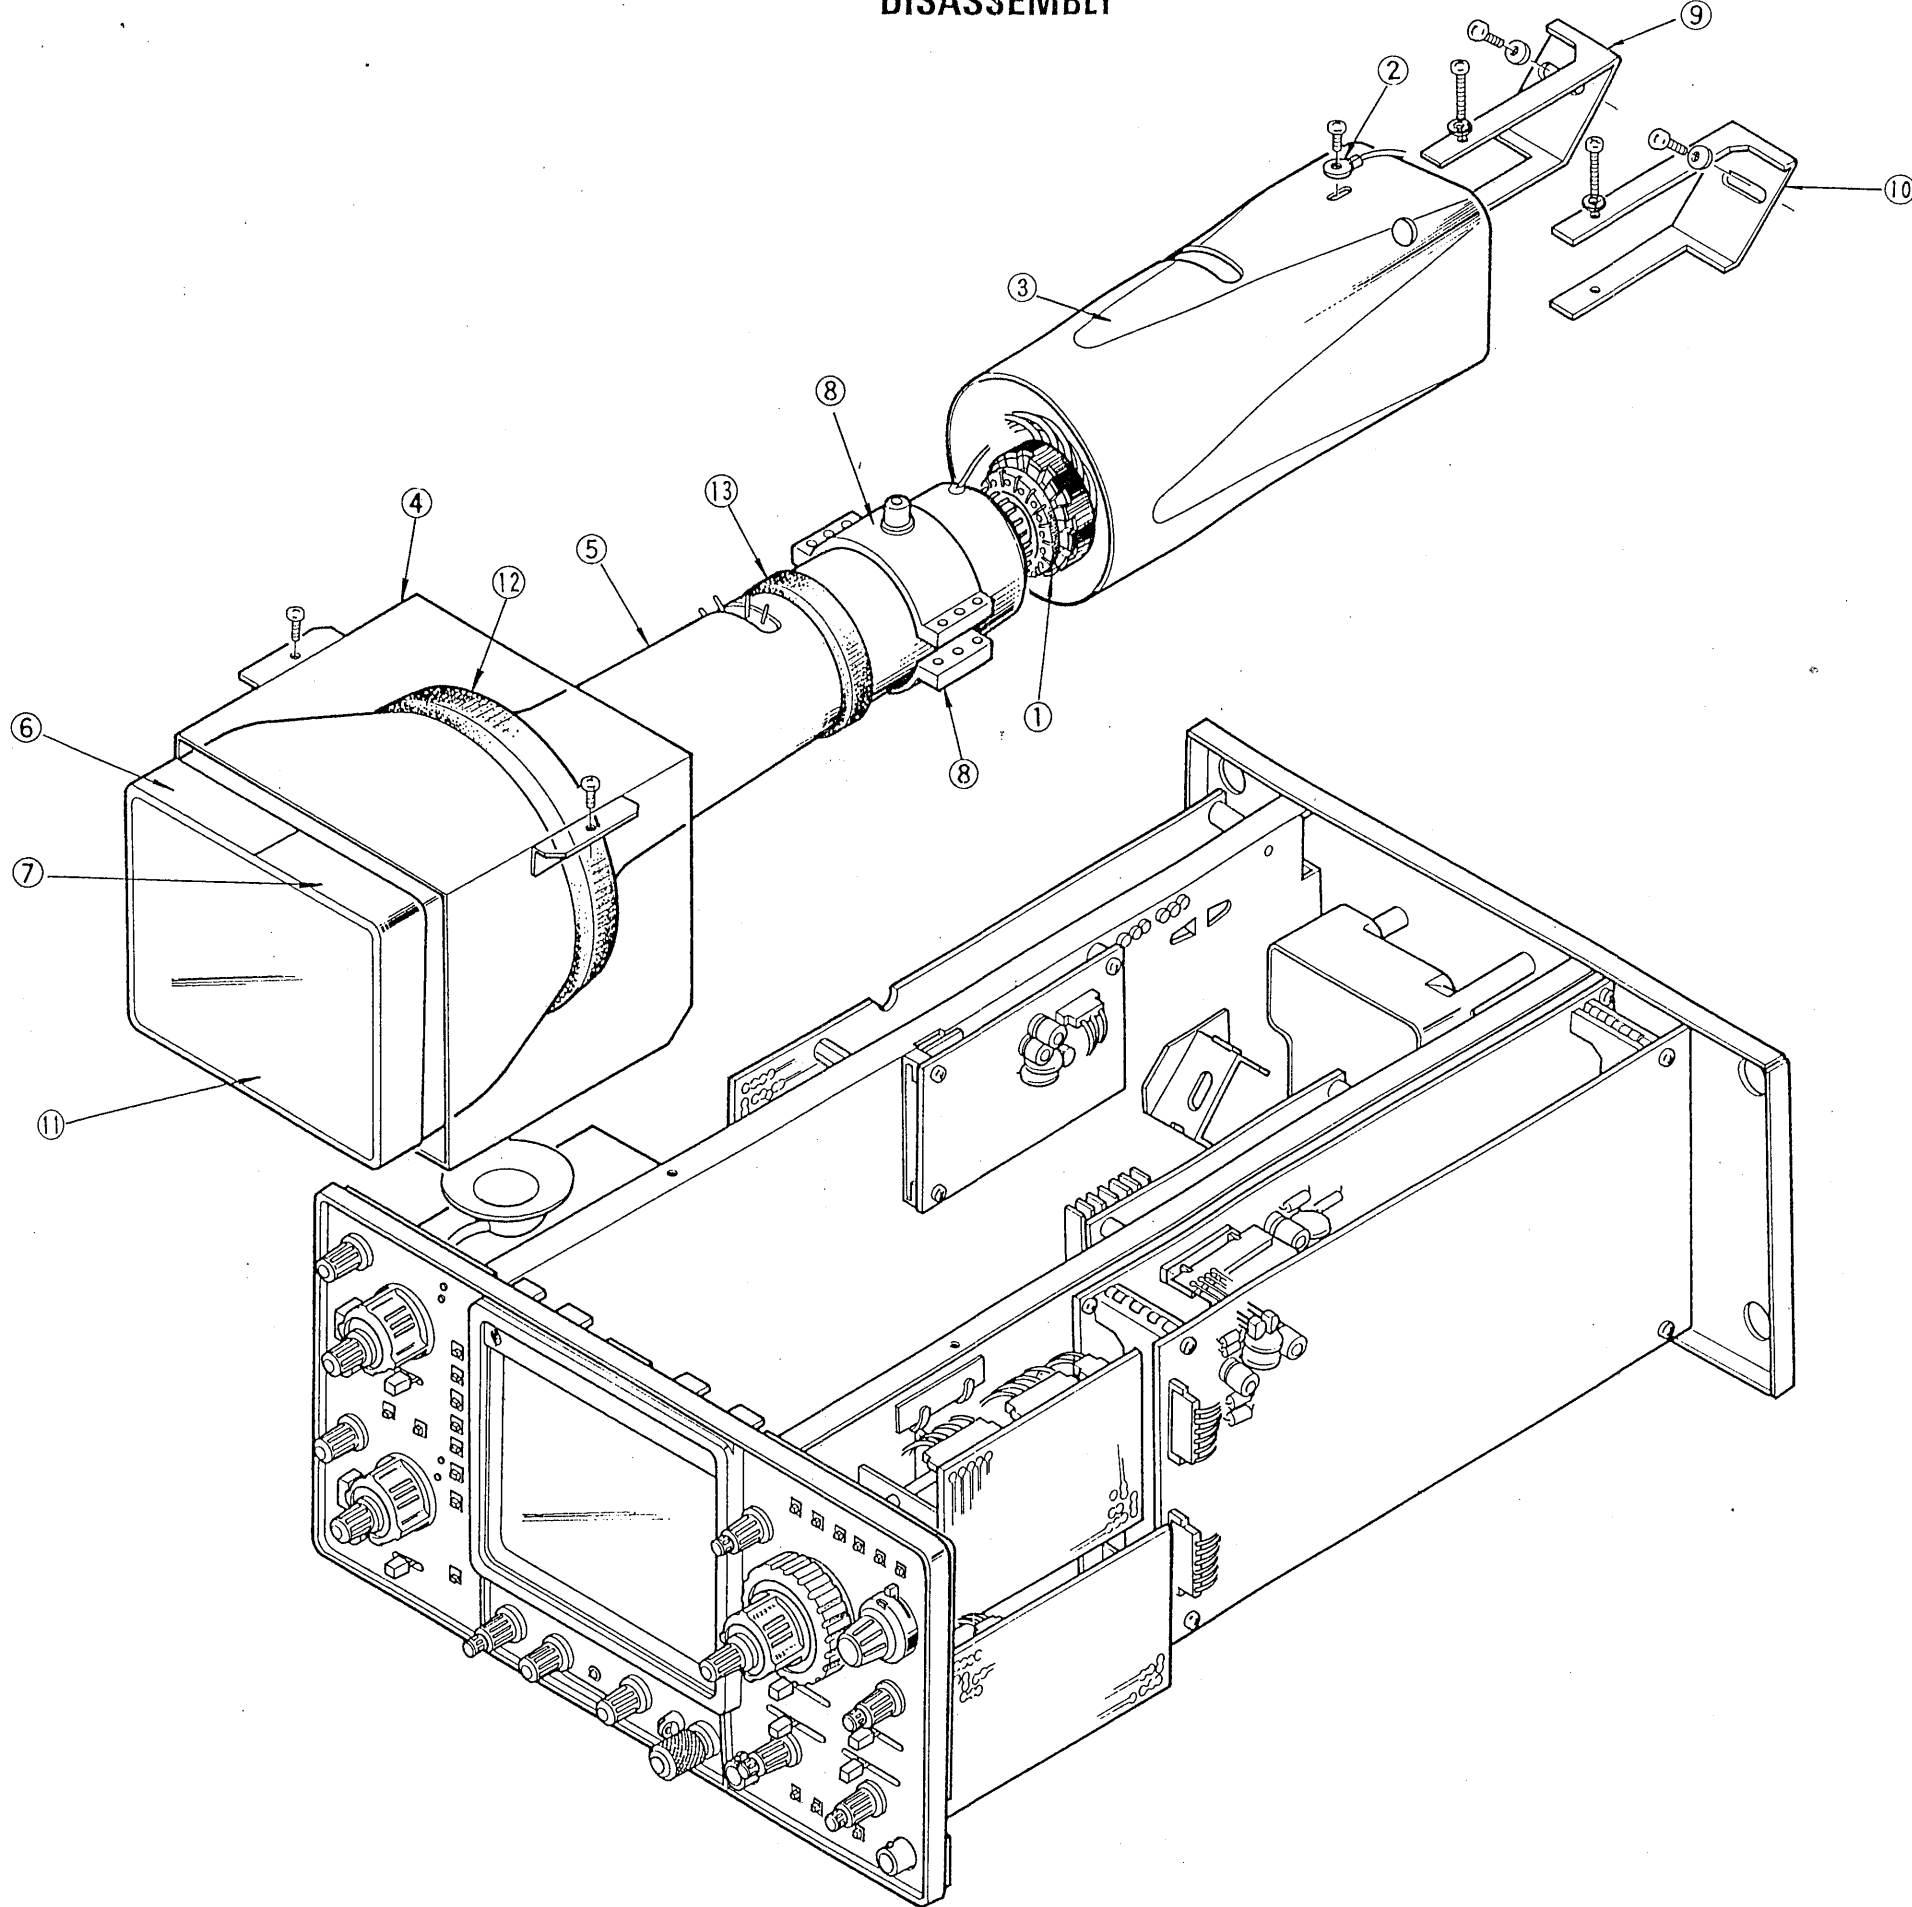

# DISASSEMBLY / PARTS LIST

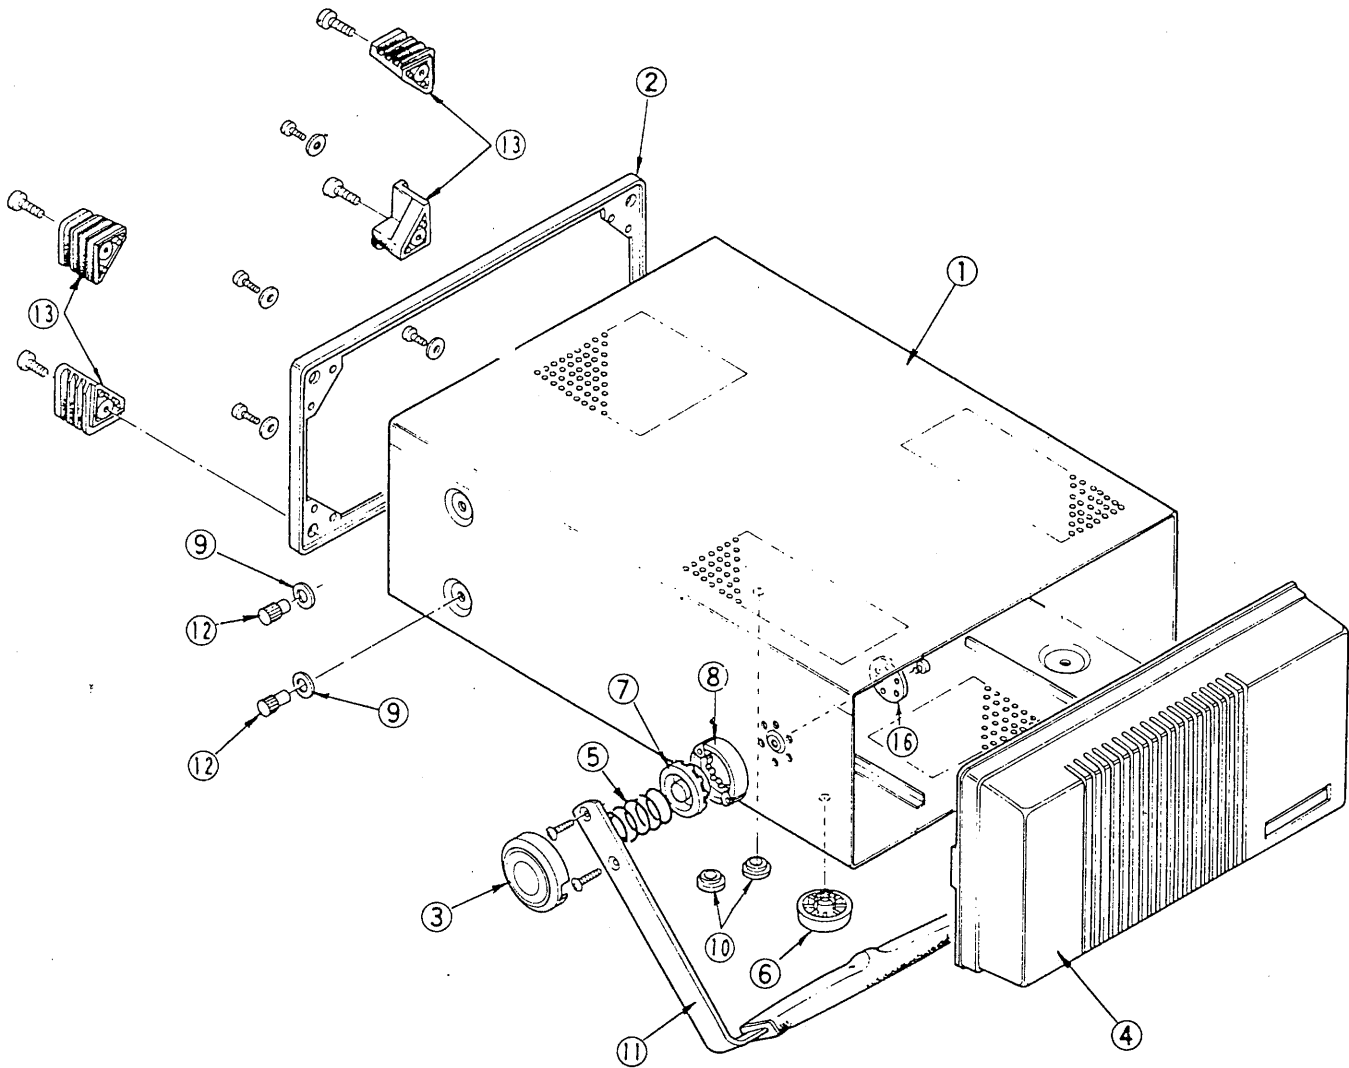


Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
6-1		A01-0872-22	Case		
6-2		B07-0710-02	Rear escutcheon		
6-3		F07-0908-14	Handle cover		
6-4		F07-0918-02	Panel cover		
6-5		G02-0606-14	Spring (For handle)		
6-6		J02-0507-05	Rubber leg		
6-7		J21-2906-05	Gear		
6-8		J21-2907-05	Ring		
6-9		J39-0505-04	Spacer		
6-10		J42-0038-04	Bushing		
6-11		K01-0512-05	Handle		
6-12		K23-0802-14	Knob		
6-13		W01-0503-04	Cord wrap		
		N09-0705-05	Hex socket Flat-head screw		
		N17-1030-41	Lock washer		
		N19-0710-05	Washer		
		N30-3008-41	Pan-head screw M3 x 8		
		N30-4018-41	Pan-head screw M4 x 18		

DISASSEMBLY / PARTS LIST

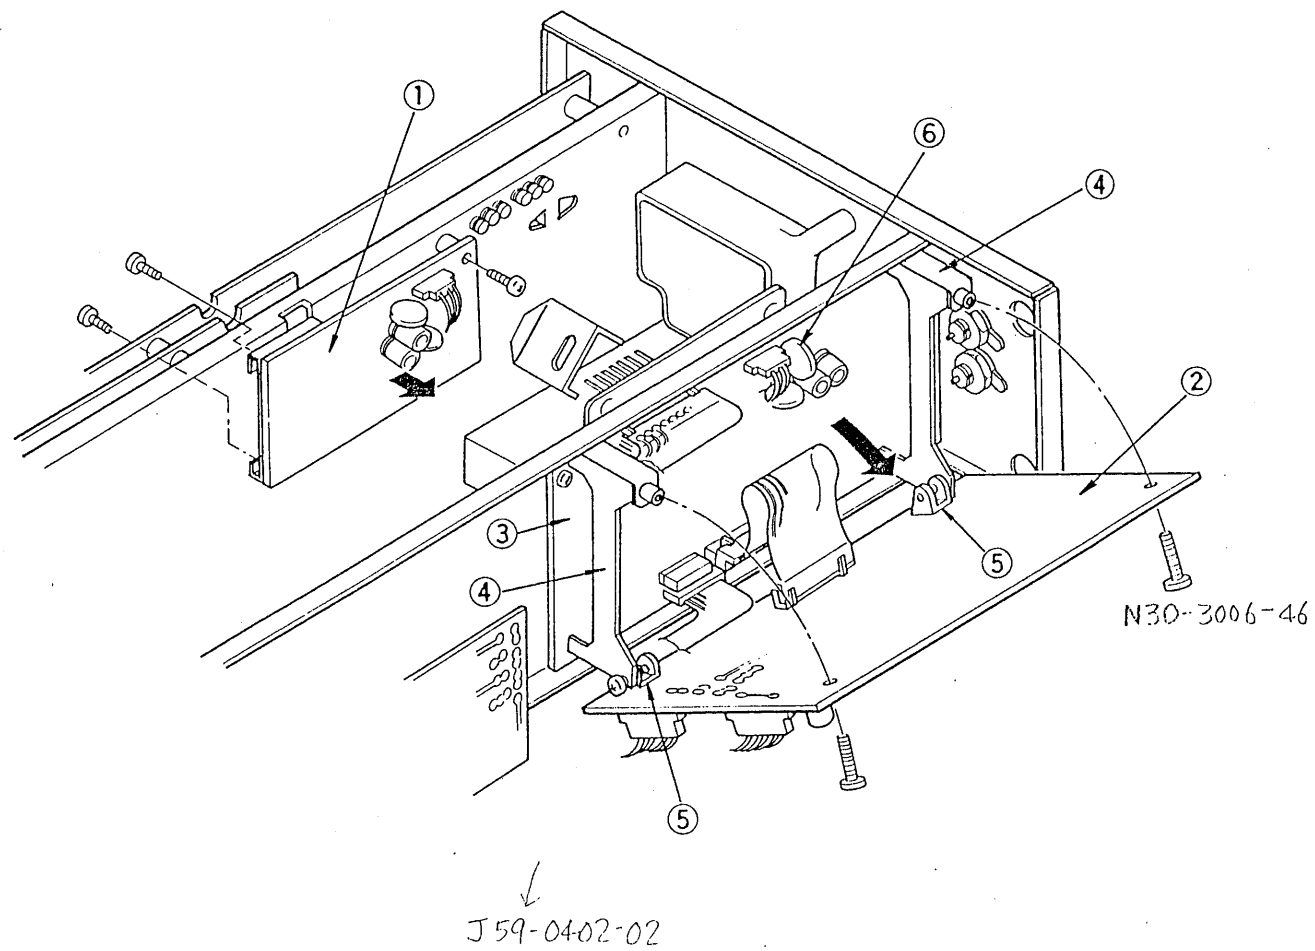


Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
4-1		X73-1330-00	Vertical output unit		
4-2		J25-2974-04	Printed circuit board		
4-3		X74-1320-00	Trig sweep unit		
		J25-2975-03	Printed circuit board		
4-4		X77-1130-00	Horizontal mode control unit		
		J25-2980-03	Printed circuit board		
4-5		J21-2904-24	Bracket (For P.C.B.)		
4-6		J21-2952-04	Bracket (For P.C.B.)		
		W09-0016-05	Lithium battery		
		N09-0402-05	Screw		
		N30-3006-46	Pan-head screw M3 x 6		

DISASSEMBLY / PARTS LIST

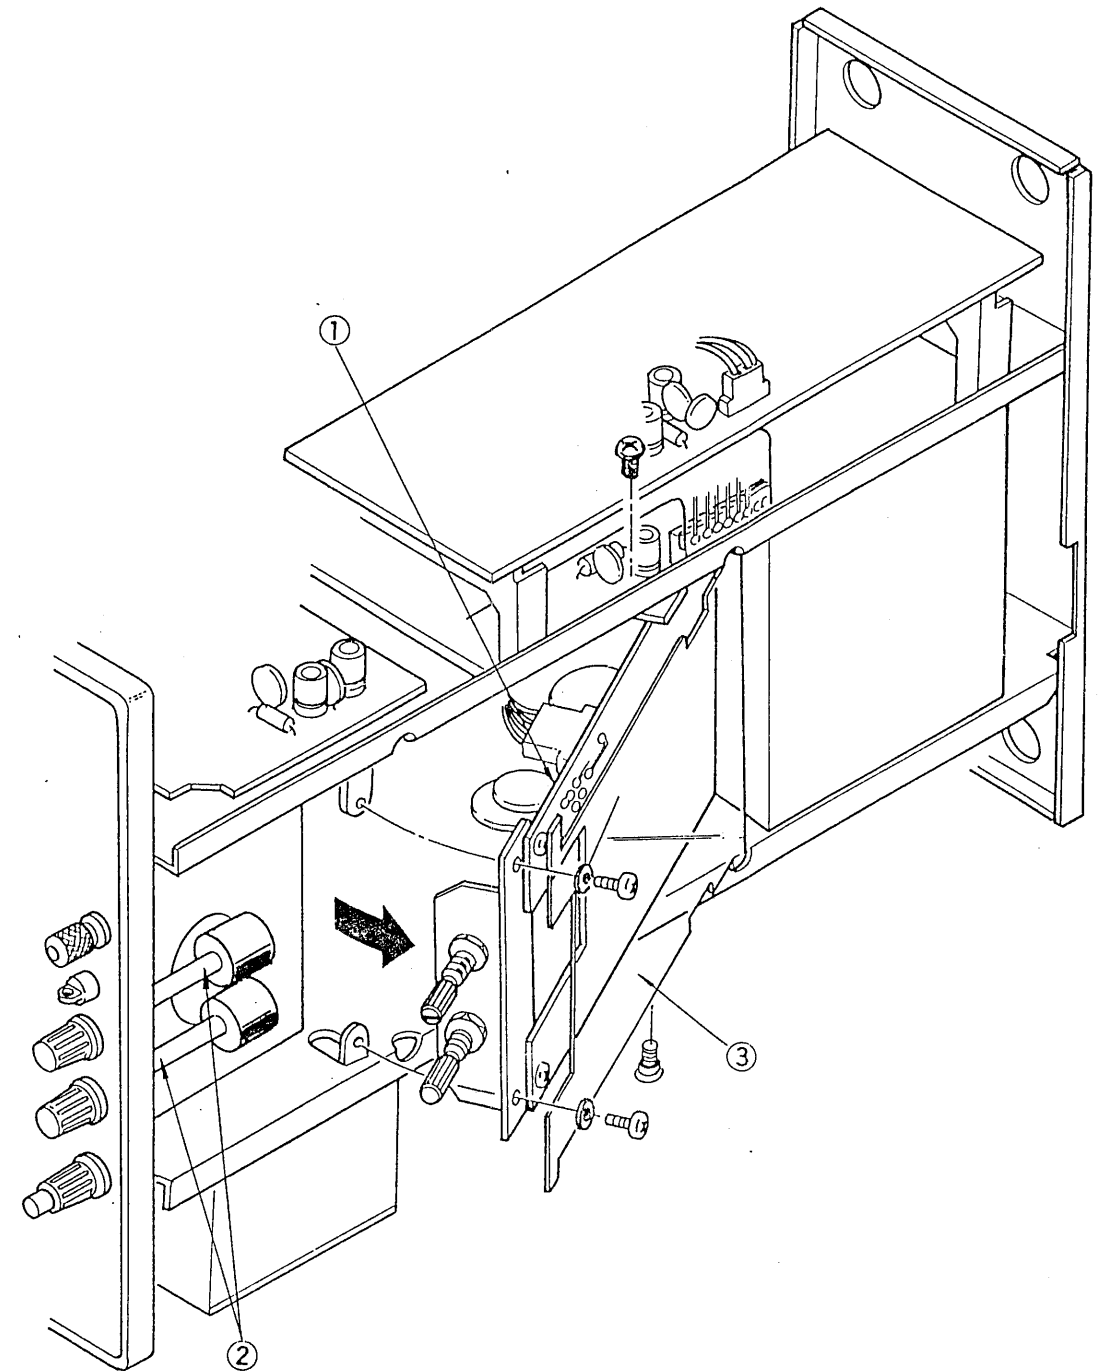


Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
5-1		X68-1310-00	Power blanking unit		
		J25-2972-03	Printed circuit board		
5-2		D21-0903-14	Extension shaft		
5-3		F20-0624-04	Insulator		
		N16-0030-46	Lockwasher		
		N30-3006-46	Pan-head screw M3 x 8		
		N89-3006-46	Screw (Tapping) 3 x 6		
		N09-0402-05	Screw		



# DISASSEMBLY / PARTS LIST

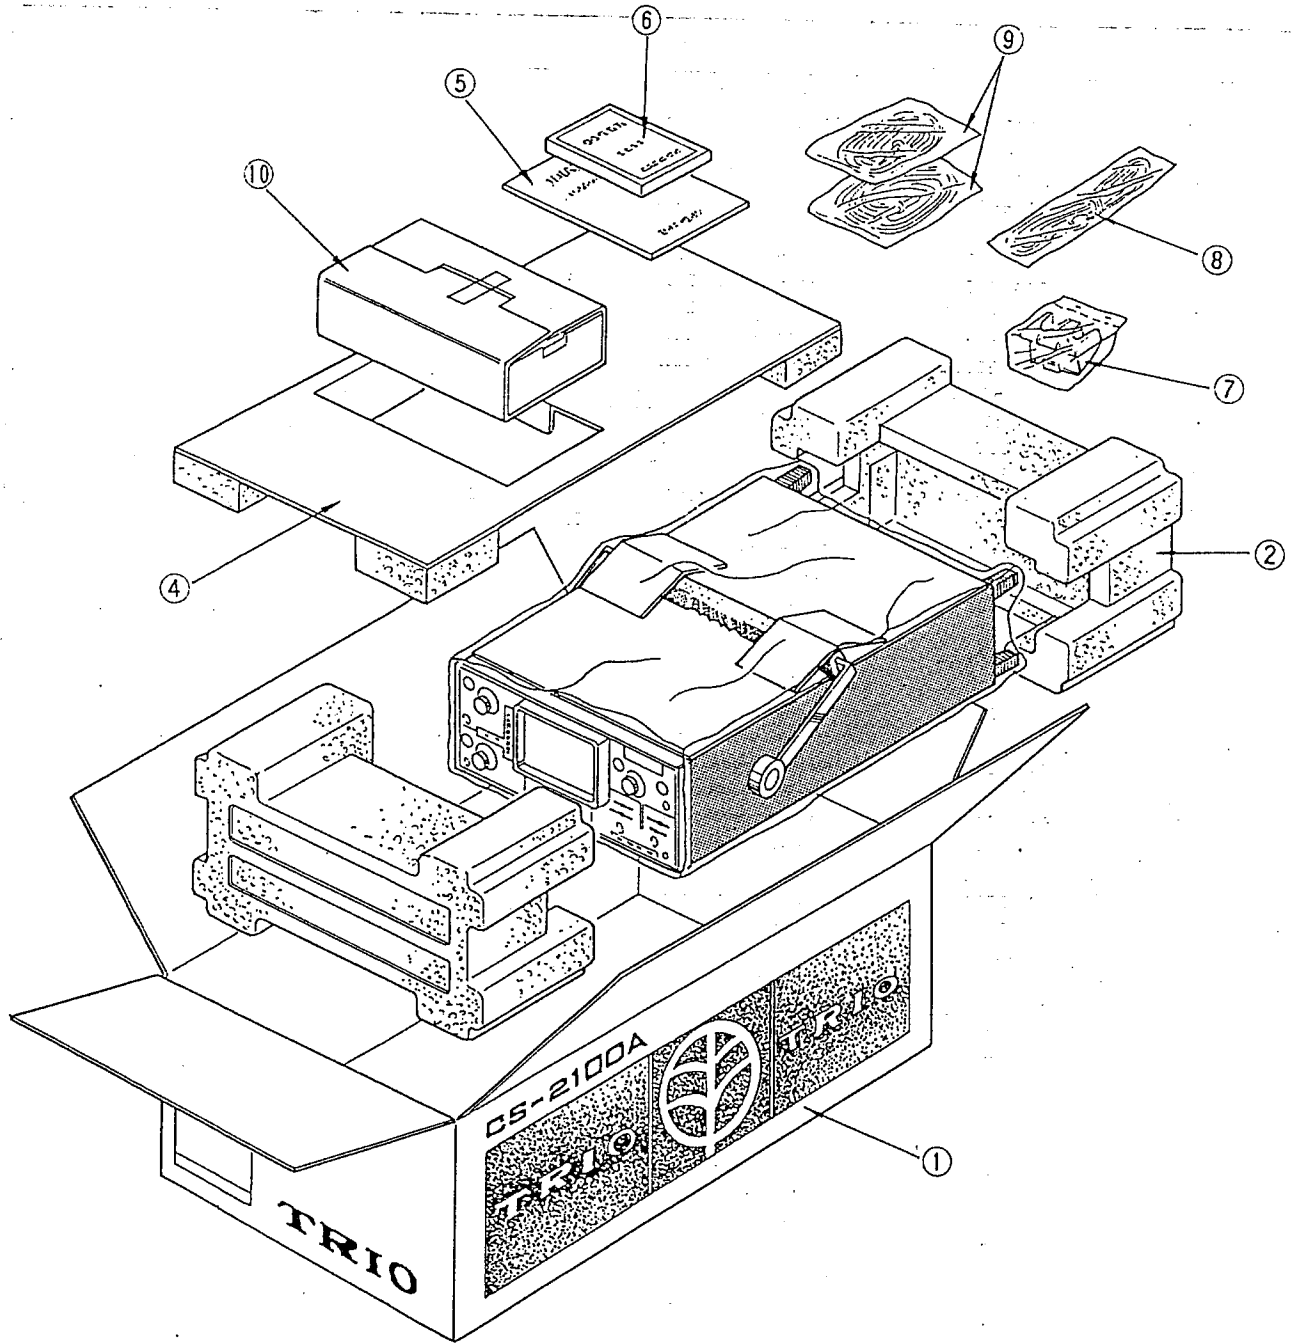


Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
7-1		H01-2922-14	Carton box		
7-2		H10-2812-12	Pad (Formed styrene)		
7-3		H20-1713-14	Polyethylene bag		
7-4		H12-0536-03	Pad (Carton)		
7-5		B50-2932-10	Instruction manual		
7-6		B50-2942-10	Instruction hand book		
7-7		J21-2903-03	Probe holder		
7-8		E30-1818-05	Power cord (JIS)		
		E30-1819-05	Power cord (CEE)		
		E30-1821-05	Power cord (SAA)		
7-9		Y87-1250-00	Probe (PC-29)		
7-10		H12-0535-03	Pad (Carton)		

# PARTS LIST

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	Serial No. Eff.	Remarks
			Thermister 4W-25V		
	R1	RN14BK2H5OROF	Metal film resistor, 50Ω, ± 1%, 1/2W		
	R2	RN14BK2H5OROF	Metal film resistor, 50Ω, ± 1%, 1/2W		
	R3	RD14BB2E105J	Carbon resistor, 1MΩ, ± 5%, 1/4W		
	R4	RD14BB2E105J	Carbon resistor, 1MΩ, ± 5%, 1/4W		
	R5	RD14BB2E220J	Carbon resistor, 22Ω, ± 5%, 1/4W		
	R6	RD14BB2E220J	Carbon resistor, 22Ω, ± 5%, 1/4W		
	R7	RD14BB2E220J	Carbon resistor, 22Ω, ± 5%, 1/4W		
	R8	RD14BB2E220J	Carbon resistor, 22Ω, ± 5%, 1/4W		
	R9	RD14BB2B220J	Carbon resistor, 22Ω, ± 5%, 1/8W		
	R10	RD14BB2B220J	Carbon resistor, 22Ω, ± 5%, 1/8W		
	C1	C91-0501-05	Metal film capacitor, 0.047μF, 630 WV		
	C2	C91-0501-05	Metal film capacitor, 0.047μF, 630 WV		
	C4	CK45E3D472P	Ceramic capacitor, 4700pF, 2000 WV		
	C5	CK45E3D472P	Ceramic capacitor, 4700pF, 2000 WV		
	C6	CC45CH1H101J	Ceramic capacitor 100pF, ± 5%		
	C7	CC45CH1H030C	Ceramic capacitor, 3pF, ± 0.25pF		
	C8	CC45CH1H680J	Ceramic capacitor, 68pF, ± 5%		
	C9	CC45CH1H680J	Ceramic capacitor, 68pF, ± 5%		
	C10	C91-0551-05	Metal film capacitor, 0.22μF, 600 WV		
		B40-2765-04	Name plate		
		B41-0730-04	Caution sheet		
		B41-0739-04	Caution sheet		
		B42-1835-04	Voltage indication sheet		
		B42-1836-04	Voltage indication sheet		
		E31-2322-05	Leadwire with connector		
	J7	E31-0748-15	Leadwire with connector		
	J8	E31-0749-15	Leadwire with connector		
	J9	E31-0750-15	Leadwire with connector		
	J10	E31-0751-25	Leadwire with connector		
	J11	E31-0797-05	Leadwire with connector		
	J12	E31-0797-05	Leadwire with connector		
	J15	E31-2340-05	Leadwire with connector		
	J31	E31-0752-05	Leadwire with connector		
	J32	E31-0753-05	Leadwire with connector		
	J33	E31-0754-05	Leadwire with connector		
	J40	E31-2337-05	Leadwire with connector		
	J41	E31-2338-05	Leadwire with connector		
	J48	E31-2339-05	Leadwire with connector		
	J51	E31-2341-05	Leadwire with connector		
	J56	E31-0790-15	Leadwire with connector		
	J57	E31-0799-15	Leadwire with connector		
		E31-0756-05	Leadwire with connector		
		E31-0564-05	Leadwire with connector		
		E31-0759-45	Wire harness		
		E40-0711-05	Pin connector 7P		
		E40-1811-05	Pin connector 18P		
		E40-1216-05	Pin connector 12P		
		E40-1516-05	Pin connector 15P		
		F11-0963-03	Shield case		
		L92-0103-05	Ferrite core		
		J19-1620-05	Cord keeper		
		J61-0501-05	Supporter (For P.C.B.)		
		J59-0520-05	Edging		
		J59-0420-05	Nylon rivet		
		J61-0049-05	Cable band		

# PARTS LIST

## VERTICAL ATTENUATOR UNIT X75-1120-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
	R1	RD14BB2C470J	RD	47 $\Omega$	
	R2	RD14BB2C100J	RD	10 $\Omega$	
	R3	RD14BB2C220J	RD	22 $\Omega$	
B-2	R4	RN14BK2E5003F	RN	500k $\Omega$	$\pm 1\%$ 1/4W
B-2	R5	RN14BK2E1004F	RN	1M $\Omega$	$\pm 1\%$ 1/4W
B-3	R6	RD14BB2C560J	RD	56 $\Omega$	
B-3	R7	RN14BK2E7503F	RN	750k $\Omega$	$\pm 1\%$ 1/4W
B-3	R8	R92-0795-05	RD	333k $\Omega$	$\pm 1\%$ 1/2W
B-3	R9	RD14BB2C220J	RD	22 $\Omega$	
A-3	R10	RN14BK2E9003F	RN	900k $\Omega$	$\pm 1\%$ 1/4W
A-2	R11	RN14BK2E1113F	RN	111k $\Omega$	$\pm 1\%$ 1/4W
A-3	R12	RD14BB2C680J	RD	68 $\Omega$	
A-3	R13	RD14BB2C100J	RD	10 $\Omega$	
A-3	R14	RD14BB2C470J	RD	47 $\Omega$	
B-3	R15	RD14BB2C472J	RD	4.7k $\Omega$	
C-2	R16	RD14BB2C472J	RD	4.7k $\Omega$	
B-2	R17	RD14BB2C912J	RD	9.1k $\Omega$	
B-2	R18	RD14BB2C470J	RD	47 $\Omega$	
C-3	R19	RD14BB2C181J	RD	180 $\Omega$	
B-3	R20	RN14BK2E9903F	RN	990k $\Omega$	$\pm 1\%$ 1/4W
B-3	R21	RN14BK2E1012F	RN	10.1k $\Omega$	$\pm 1\%$ 1/4W
B-3	R22	RN14BB2C101J	RD	100 $\Omega$	
B-3	R23	RD14BB2C220J	RD	22 $\Omega$	
B-3	R24	RD14BB2C820J	RD	82 $\Omega$	
B-3	R25	RD14BB2C122J	RD	1.2k $\Omega$	
B-3	R26	RN14BK2E1004F	RN	1M $\Omega$	$\pm 1\%$ 1/4W
B-3	R27	RD14BB2E104J	RD	100k $\Omega$	$\pm 5\%$ 1/4W
C-2	R28	RN14BK2B1000F	RN	100 $\Omega$	$\pm 1\%$ 1/8W
C-3	R29	RN14BK2B1000F	RN	100 $\Omega$	$\pm 1\%$ 1/8W
C-3	R30	RD14BB2C101J	RD	100 $\Omega$	
C-2	R31	RD14BB2C101J	RD	100 $\Omega$	
C-3	R32	RN14BK2B7500F	RN	750 $\Omega$	$\pm 1\%$ 1/8W
C-3	R33	RN14BK2B7500F	RN	750 $\Omega$	$\pm 1\%$ 1/8W
C-3	R34	RN14BK2B7500F	RN	750 $\Omega$	$\pm 1\%$ 1/8W
C-3	R35	RN14BK2B3300F	RN	330 $\Omega$	$\pm 1\%$ 1/8W
	R36	No use			
	R37	No use			
	R38	No use			
	R39	No use			
	R40	No use			
	R41	No use			
C-3	R42	RD14BB2C121J	RD	120 $\Omega$	
	R43	RD14BB2C470J	RD	47 $\Omega$	
	R44	RD14BB2C100J	RD	10 $\Omega$	
	R45	RD14BB2C220J	RD	22 $\Omega$	
B-1	R46	RN14BK2E5003F	RN	500k $\Omega$	$\pm 1\%$ 1/4W
B-1	R47	RN14BK2E1004F	RN	1M $\Omega$	$\pm 1\%$ 1/4W
B-1	R48	RD14BB2C560J	RD	56 $\Omega$	
B-1	R49	RN14BK2E7503F	RN	750k $\Omega$	$\pm 1\%$ 1/4W
B-2	R50	R92-0795-05	RD	333k $\Omega$	$\pm 1\%$ 1/2W
B-1	R51	RD14BB2C220J	RD	22 $\Omega$	
A-1	R52	RN14BK2E9003F	RN	900k $\Omega$	$\pm 1\%$ 1/4W
A-1	R53	RN14BK2E1113F	RN	111k $\Omega$	$\pm 1\%$ 1/4W
A-1	R54	RD14BB2C680J	RD	68 $\Omega$	
A-1	R55	RD14BB2C100J	RD	10 $\Omega$	
A-1	R56	RD14BB2C220J	RD	22 $\Omega$	
C-1	R57	RD14BB2C181J	RD	180 $\Omega$	
B-1	R58	RD14BB2C912J	RD	9.1k $\Omega$	
B-1	R59	RD14BB2C470J	RD	47 $\Omega$	
C-1	R60	RD14BB2C472J	RD	4.7k $\Omega$	
D-1	R61	RD14BB2C472J	RD	4.7k $\Omega$	
B-1	R62	RN14BK2E9903F	RN	990k $\Omega$	$\pm 1\%$ 1/4W
B-2	R63	RN14BK2E1012F	RN	10.1k $\Omega$	$\pm 1\%$ 1/4W
B-1	R64	RD14BB2C101J	RD	100 $\Omega$	
B-2	R65	RD14BB2C220J	RD	22 $\Omega$	

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
B-1	R66	RD14BB2C820J	RD	82 $\Omega$	
B-1	R67	RD14BB2C122J	RD	1.2k $\Omega$	
B-1	R68	RN14BK2E1004F	RN	1M $\Omega$	$\pm 1\%$ 1/4W
B-1	R69	RD14BB2E104J	RN	100 $\Omega$	$\pm 1\%$ 1/8W
C-1	R70	RN14BK2B1000F	RN	100 $\Omega$	$\pm 1\%$ 1/8W
C-1	R71	RN14BK2B1000F	RN	100 $\Omega$	$\pm 1\%$ 1/8W
C-1	R72	RD14BB2C101J	RD	100 $\Omega$	
C-1	R73	RD14BB2C101J	RD	100 $\Omega$	
C-2	R74	RN14BK2B7500F	RN	750 $\Omega$	$\pm 1\%$ 1/8W
C-1	R75	RN14BK2B7500F	RN	750 $\Omega$	$\pm 1\%$ 1/8W
C-2	R76	RN14BK2B7500F	RN	750 $\Omega$	$\pm 1\%$ 1/8W
C-2	R77	RN14BK2B3300F	RN	330 $\Omega$	$\pm 1\%$ 1/8W
	R78	No use			
	R79	No use			
	R80	No use			
	R81	No use			
	R82	No use			
	R83	No use			
C-2	R84	RD14BBsC121J	RD	120 $\Omega$	
D-3	R85	RD14BB2C224J	RD	220k $\Omega$	
D-3	R86	RD14BB2C224J	RD	220k $\Omega$	
D-3	R87	RD14BB2C224J	RD	220k $\Omega$	
D-3	R88	RD14BB2C224J	RD	220k $\Omega$	
D-3	R89	RD14BB2C224J	RD	220k $\Omega$	
E-3	R90	RD14BB2C224J	RD	220k $\Omega$	
D-3	R91	RD14BB2C224J	RD	220k $\Omega$	
D-2	R92	RD14BB2C224J	RD	220k $\Omega$	
B-2	R93	RD14BB2C224J	RD	220k $\Omega$	
D-3	R94	RD14BB2C824J	RD	820k $\Omega$	
D-3	R95	RD14BB2C824J	RD	820k $\Omega$	
D-3	R96	RD14BB2C824J	RD	820k $\Omega$	
D-3	R97	RD14BB2C824J	RD	820k $\Omega$	
D-3	R98	RD14BB2C824J	RD	820k $\Omega$	
D-3	R99	RD14BB2C824J	RD	820k $\Omega$	
D-3	R100	RD14BB2C824J	RD	820k $\Omega$	
D-1	R101	RD14BB2C824J	RD	820k $\Omega$	
D-2	R102	RD14BB2C824J	RD	820k $\Omega$	
E-2	R103	RD14BB2C473J	RD	47k $\Omega$	
E-2	R104	RD14BB2C473J	RD	47k $\Omega$	
E-2	R105	RD14BB2C274J	RD	270k $\Omega$	
E-2	R106	RD14BB2C274J	RD	270k $\Omega$	
E-2	R107	RD14BB2C274J	RD	270k $\Omega$	
E-2	R108	RD14BB2C473J	RD	47k $\Omega$	
E-2	R109	RD14BB2C473J	RD	47k $\Omega$	
D-2	R110	RD14BB2C473J	RD	47k $\Omega$	
D-1	R111	RD14BB2C393J	RD	39k $\Omega$	
D-3	R112	RD14BB2C391J	RD	390 $\Omega$	
D-3	R113	RD14BB2C391J	RD	390 $\Omega$	
D-3	R114	RD14BB2C391J	RD	390 $\Omega$	
D-3	R115	RD14BB2C391J	RD	390 $\Omega$	
D-3	R116	RD14BB2C391J	RD	390 $\Omega$	
D-3	R117	RD14BB2C391J	RD	390 $\Omega$	
D-3	R118	RD14BB2C391J	RD	390 $\Omega$	
D-1	R119	RD14BB2C391J	RD	390 $\Omega$	
D-1	R120	RD14BB2C391J	RD	390 $\Omega$	
D-3	R121	RD14BB2C391J	RD	390 $\Omega$	
D-1	R122	RD14BB2C391J	RD	390 $\Omega$	
D-2	R123	RD14BB2C100J	RD	10 $\Omega$	
	R124	RD14BB2C680J	RD	68 $\Omega$	
C-3	R125	RN14BK2B1000F	RN	100 $\Omega$	$\pm 1\%$ 1/8W
	R126	No use			
A-1	R127	RD14BB2C101J	RD	100 $\Omega$	
C-1	R128	RN14BK2B1000F	RN	100 $\Omega$	$\pm 1\%$ 1/8W
E-1	R129	RD14BB2C153J	RD	15k $\Omega$	
E-2	R130	RD14BB2C824J	RD	820k $\Omega$	

# PARTS LIST

X75-1120-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
E-1	R131	RD14BB2C824J	RD 820k $\Omega$
	R132	No use	
C-1	R133	RN14BK2B47ROF	RN 47 $\Omega$ $\pm$ 1% 1/8W
C-3	R134	RN14BK2B47ROF	RN 47 $\Omega$ $\pm$ 1% 1/8W
	R135	RD14BB2C680J	RD 68 $\Omega$
C-2	R136	RN14BK2B47ROF	RN 47 $\Omega$ $\pm$ 1% 1/8W
A-3	R137	RD14BB2C101J	RD 100 $\Omega$
C-3	R138	RN14BK2B47ROF	RN 47 $\Omega$ $\pm$ 1% 1/8W
A-3	R139	RD14BB2C220J	RD 22 $\Omega$
A-1	R140	RD14BB2C220J	RD 22 $\Omega$
E-2	R141	RD14BB2C824J	RD 820k $\Omega$
	R142	RD14BB2C100J	RD 10 $\Omega$
C-2	R143	RD14BB2C100J	RD 10 $\Omega$
	R144	RD14BB2C101J	RD 100 $\Omega$
	R145	RD14BB2C101J	RD 100 $\Omega$
C-3	VR1	R12-0421-05	VR 100 $\Omega$
C-2	VR2	R12-0421-05	VR 100 $\Omega$
	C1	CC45CH1H470J	CC 47pF $\pm$ 5%
	C2	CC45CH1H470J	CC 47pF $\pm$ 5%
	C3	CC45CH1H470J	CC 47pF $\pm$ 5%
A-2	C4	CM93BD2A100D	CM 10pF $\pm$ 0.5pF 100WV
B-2	C5	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
B-2	C6	CM93BD2A221J	CM 220pF $\pm$ 5% 100WV
	C7	No use	
B-3	C8	C91-0502-05	MF 0.01 $\mu$ F 630WV
C-2	C9	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-3	C10	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-2	C11	CE04W1C330M	CE 33 $\mu$ F 16WV
C-2	C12	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-3	C13	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-2	C14	CE04W1E101M	CE 100 $\mu$ F 25WV
C-2	C15	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-2	C16	CE04W1E101M	CE 100 $\mu$ F 25WV
C-3	C17	CC45CH1H100D	CC 10pF $\pm$ 0.5pF
	C18	CC45CH1H470J	CC 47pF $\pm$ 5%
	C19	CC45CH1H470J	CC 47pF $\pm$ 5%
	C20	No use	
A-1	C21	CM93BD2A100D	CM 10pF $\pm$ 0.5pF 100WV
C-1	C22	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
B-1	C23	CM93BD2A221J	CM 220pF $\pm$ 5% 100WV
B-1	C24	CC45CH1H390J	CC 39pF $\pm$ 5%
B-1	C25	C91-0502-05	MF 0.01 $\mu$ F 630WV
C-1	C26	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
B-2	C27	CC45CH1H330J	CC 33pF $\pm$ 5%
C-1	C28	CE04W1C330M	CE 33 $\mu$ F 16WV
C-1	C29	CC45CH1H150J	CC 15pF $\pm$ 5%
C-2	C30	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-2	C31	CE04W1E101M	CE 100 $\mu$ F 25WV
C-2	C32	CE04W1E101M	CE 100 $\mu$ F 25WV
C-1	C33	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-1	C34	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-2	C35	CC45CH1H100D	CC 10pF $\pm$ 0.5pF
D-3	C36	CC45CH1H101J	CC 100pF $\pm$ 5%
D-3	C37	CC45CH1H101J	CC 100pF $\pm$ 5%
D-3	C38	CC45CH1H101J	CC 100pF $\pm$ 5%
D-3	C39	CC45CH1H101J	CC 100pF $\pm$ 5%
D-3	C40	CC45CH1H101J	CC 100pF $\pm$ 5%
D-3	C41	CC45CH1H101J	CC 100pF $\pm$ 5%
D-3	C42	CC45CH1H101J	CC 100pF $\pm$ 5%
D-2	C43	CC45CH1H101J	CC 100pF $\pm$ 5%
D-2	C44	CC45CH1H101J	CC 100pF $\pm$ 5%
E-2	C45	CK45B1H222K	CK 2200pF $\pm$ 10%
E-2	C46	CK45B1H222K	CK 2200pF $\pm$ 10%
E-2	C47	CK45B1H472K	CK 4700pF $\pm$ 10%

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
D-1	C48	CC45CH1H101J	CC 100pF $\pm$ 5%
C-3	C49	CC45CH1H150J	CC 15pF $\pm$ 5%
	C50	No use	
B-2	C51	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-2	C52	CK45B1H102K	CK 1000pF $\pm$ 10%
	C53	CC45CH1H470J	CC 47pF $\pm$ 5%
A-1	C54	CC45CH1H080D	CC 8pF $\pm$ 0.5pF
D-1	C55	CK45B1H102K	CK 1000pF $\pm$ 10%
B-2	C56	CC45CH1H010C	CC 1pF $\pm$ 0.25pF
B-1	C57	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
B-3	C58	CC45CH1H330J	CC 33pF $\pm$ 5%
	C59	No use	
	C60	No use	
A-3	C61	CC45CH1H080D	CC 8pF $\pm$ 0.5pF
B-2	C62	CC45CH1H390J	CC 39pF $\pm$ 5%
C-3	C63	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
B-1	C64	CC45CH1H010C	CC 1pF $\pm$ 0.25pF
C-2	C65	CE04W1C330M	CE 33 $\mu$ F 16WV
	C66	No use	
B-1	C67	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
A-3	C68	CC45CH1H101J	CC 100pF $\pm$ 5%
A-3	C69	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
A-2	C70	CC45CH1H101J	CC 100pF $\pm$ 5%
A-2	C71	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-2	C72	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-1	C73	CE04W1C330M	CE 33 $\mu$ F 16WV
A-3	C74	CC45CH1H020C	CC 2pF $\pm$ 0.25pF
A-1	C75	CC45CH1H020C	CC 2pF $\pm$ 0.25pF
B-3	C76	CC45CH1H030C	CC 3pF $\pm$ 0.25pF
B-2	C77	CC45CH1H030C	CC 3pF $\pm$ 0.25pF
	C78	No use	
	C79	No use	
	C80	No use	
	C81	No use	
	C82	CC45CH1H030C	CC 3pF $\pm$ 0.25pF
	C83	CC45CH1H030C	CC 3pF $\pm$ 0.25pF
B-2	TC1	C05-0030-15	TC 20pF
B-3	TC2	C05-0030-15	TC 20pF
A-2	TC3	C05-0030-15	TC 20pF
B-3	TC4	C05-0030-15	TC 20pF
B-3	TC5	C05-0062-05	TC 6pF
A-2	TC6	C05-0062-05	TC 6pF
A-3	TC7	C05-0309-05	TC 40pF
B-2	TC8	C05-0030-15	TC 20pF
	TC9	No use	
B-3	TC10	C05-0062-05	TC 6pF
C-3	TC11	C05-0030-05	TC 20pF
B-1	TC12	C05-0030-15	TC 20pF
B-1	TC13	C05-0030-15	TC 20pF
A-1	TC14	C05-0030-15	TC 20pF
B-1	TC15	C05-0030-15	TC 20pF
B-1	TC16	C05-0062-05	TC 6pF
A-1	TC17	C05-0062-05	TC 6pF
A-1	TC18	C05-0309-05	TC 40pF
B-2	TC19	C05-0030-15	TC 20pF
	TC20	No use	
B-1	TC21	C05-0062-05	TC 6pF
C-2	TC22	C05-0030-05	TC 20pF
B-3	TC23	C05-0062-05	TC 6pF
B-1	TC24	C05-0062-05	TC 6pF
C-3	L1	L40-1001-02	Ferri-inductor 10 $\mu$ H
C-3	L2	L40-1001-02	Ferri-inductor 10 $\mu$ H
C-1	L3	L40-1001-02	Ferri-inductor 10 $\mu$ H
C-1	L4	L40-1001-02	Ferri-inductor 10 $\mu$ H

# PARTS LIST

X75-1120-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	
B-2	D1		Diode	Silicon 1S1544A
B-2	D2		Diode	Silicon 1S1544A
B-1	D3		Diode	Silicon 1S1544A
B-1	D4		Diode	Silicon 1S1544A
D-2	D5		Diode	Silicon DS442X
D-2	D6		Diode	Silicon DS442X
D-2	D7		Diode	Silicon DS442X
D-2	D8		Diode	Silicon DS442X
D-2	D9		Diode	Silicon DS442X
D-2	D10		Diode	Silicon DS442X
D-2	D11		Diode	Silicon DS442X
C-2	D12		Diode	Zener YZ-120
C-2	D13		Diode	Zener YZ-120
C-1	D14		Diode	Zener YZ-120
D-1	D15		Diode	Zener YZ-120
C-2	Q1		FET	Dual DN1901
C-1	Q2		FET	Dual DN1901
D-2	IC1		IC	Digital MC14584BCP
D-2	IC2		IC	Digital MC14584BCP
D-2	IC3		IC	Digital MC10014BCP
D-2	IC4		IC	Linear MC14027BCP
E-3	IC5		IC	Linear SN7404N
E-2	IC6		IC	Digital MC14174BCP
D-1	IC7		IC	Digital MC14081BCP
E-2	IC8		IC	Linear MC14503BCP
E-2	IC9		IC	Digital SN7432N
D-1	IC10		IC	Digital MC14027BCP
E-1	IC11		IC	Digital MC14503BCP
C-3	IC12		IC	Linear ATM-4010
C-1	IC13		IC	Linear ATM-4010
D-2	P1	E40-1817-05	Pin connector	18P
D-1	P2	E40-0717-05	Pin connector	7P
C-3	P3	E40-0611-05	Pin connector	6P
C-1	P4	E40-0611-05	Pin connector	6P
E-3	P5	E40-1277-05	Pin connector	12P
E-1	P6	E40-0577-05	Pin connector	5P
		E23-0521-04	Earth terminal	
		E29-0504-05	Teflon terminal	
A-3	S1a	S01-4503-05	Rotary switch	
B-3	S1b	S01-4503-05	Rotary switch	
B-3	S1c	S01-4503-05	Rotary switch	
B-3	S1d	S01-4503-05	Rotary switch	
B-3	S1e	S01-4503-05	Rotary switch	
	S1f	S01-4503-05	Rotary switch	
	S1g	S01-4503-05	Rotary switch	
	S1h	S01-4503-05	Rotary switch	
A-1	S2a	S01-4503-05	Rotary switch	
B-1	S2b	S01-4503-05	Rotary switch	
B-1	S2c	S01-4503-05	Rotary switch	
B-1	S2d	S01-4503-05	Rotary switch	
B-1	S2e	S01-4503-05	Rotary switch	
	S2f	S01-4503-05	Rotary switch	
	S2g	S01-4503-05	Rotary switch	
	S2h	S01-4503-05	Rotary switch	
		J25-2977-03	Printed circuit board	

VERTICAL PREAMPLIFIER UNIT X73-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
B-3	R1	RD14BB2C220J	RD	22 $\Omega$	
B-3	R2	RD14BB2C220J	RD	22 $\Omega$	
B-3	R3	RN14BK2B1000F	RN	100 $\Omega$	= 1% 1/8W
B-3	R4	RD14BB2C242J	RD	2.4k $\Omega$	
B-3	R5	RD14BB2C181J	RD	180 $\Omega$	
B-3	R6	RN14BK2B2700F	RN	270 $\Omega$	= 1% 1/8W
B-3	R7	RD14BB2C101J	RD	100 $\Omega$	
B-3	R8	RN14BK2B2700F	RN	270 $\Omega$	= 1% 1/8W
B-2	R9	RD14BB2C112J	RD	1.1k $\Omega$	
B-2	R10	RD14BB2C392J	RD	3.9k $\Omega$	
B-2	R11	RD14BB2C220J	RD	22 $\Omega$	
B-3	R12	RD14BB2C220J	RD	22 $\Omega$	
B-3	R13	RN14BK2B3001F	RN	3k $\Omega$	= 1% 1/8W
B-3	R14	RN14BK2B1801F	RN	1.8k $\Omega$	= 1% 1/8W
B-3	R15	RN14BK2B3000F	RN	300 $\Omega$	= 1% 1/8W
B-3	R16	RN14BK2B7500F	RN	750 $\Omega$	= 1% 1/8W
B-2	R17	RN14BK2B7500F	RN	750 $\Omega$	= 1% 1/8W
B-3	R18	RN14BK2B5601F	RN	5.6k $\Omega$	= 1% 1/8W
B-3	R19	RN14BK2B5601F	RN	5.6k $\Omega$	= 1% 1/8W
B-3	R20	RN14BK2B3601F	RN	3.6k $\Omega$	= 1% 1/8W
B-3	R21	RN14BK2B3601F	RN	3.6k $\Omega$	= 1% 1/8W
B-3	R22	RN14BK2B1501F	RN	1.5k $\Omega$	= 1% 1/8W
B-3	R23	RN14BK2B1501F	RN	1.5k $\Omega$	= 1% 1/8W
B-3	R24	RD14BB2C220J	RD	22 $\Omega$	
B-2	R25	RD14BB2C220J	RD	22 $\Omega$	
B-3	R26	RD14BB2C470J	RD	47 $\Omega$	
B-3	R27	RN14BK2B4700F	RN	470 $\Omega$	= 1% 1/8W
B-3	R28	RN14BK2B4700F	RN	470 $\Omega$	= 1% 1/8W
B-3	R29	RN14BK2B5100F	RN	51 $\Omega$	= 1% 1/8W
C-2	R30	RD14BB2C103J	RD	10k $\Omega$	
C-2	R31	RD14BB2C472J	RD	4.7k $\Omega$	
C-2	R32	RD14BB2C472J	RD	4.7k $\Omega$	
C-2	R33	RD14BB2C103J	RD	10k $\Omega$	
C-2	R34	RD14BB2C821J	RD	820 $\Omega$	
C-3	R35	RN14BK2B4700F	RN	47 $\Omega$	= 1% 1/8W
C-3	R36	RN14BK2B4300F	RN	430 $\Omega$	= 1% 1/8W
C-3	R37	RN14BK2B4300F	RN	430 $\Omega$	= 1% 1/8W
C-3	R38	RD14BB2C271J	RD	270 $\Omega$	
	R39	No use			
C-3	R40	RN14BK2B1800F	RN	180 $\Omega$	= 1% 1/8W
C-3	R41	RN14BK2B4300F	RN	430 $\Omega$	= 1% 1/8W
C-3	R42	RN14BK2B4300F	RN	430 $\Omega$	= 1% 1/8W
	R43	No use			
C-3	R44	RD14BB2C220J	RD	22 $\Omega$	
C-3	R45	RD14BB2C220J	RD	22 $\Omega$	
C-3	R46	RN14BK2B1500F	RN	150 $\Omega$	= 1% 1/8W
C-3	R47	RD14BB2C123J	RD	12k $\Omega$	
C-2	R48	RD14BB2C330J	RD	33 $\Omega$	
D-2	R49	RD14BB2C472J	RD	4.7k $\Omega$	
C-3	R50	RN14BK2B9100F	RN	910 $\Omega$	= 1% 1/8W
C-2	R51	RN14BK2B9100F	RN	910 $\Omega$	= 1% 1/8W
C-3	R52	RD14BB2C470J	RD	47 $\Omega$	
C-2	R53	RD14BB2C470J	RD	47 $\Omega$	
C-3	R54	RN14BK2B2400F	RN	240 $\Omega$	= 1% 1/8W
C-2	R55	RD14BB2C103J	RD	10k $\Omega$	
C-3	R56	RN14BK2B8200F	RN	820 $\Omega$	= 1% 1/8W
C-2	R57	RN14BK2B8200F	RN	820 $\Omega$	= 1% 1/8W
C-3	R58	RD14BB2C682J	RD	6.8k $\Omega$	
C-3	R59	RN14BK2B3600F	RN	360 $\Omega$	= 1% 1/8W
C-3	R60	RN14BK2B2201F	RN	2.2k $\Omega$	= 1% 1/8W
C-3	R61	RN14BK2B2201F	RN	2.2k $\Omega$	= 1% 1/8W
C-3	R62	RN14BK2B1801F	RN	1.8k $\Omega$	= 1% 1/8W
C-3	R63	RD14BB2C220J	RD	22 $\Omega$	
C-3	R64	RD14BB2C220J	RD	22 $\Omega$	
D-3	R65	RD14BB2C820J	RD	820 $\Omega$	

# PARTS LIST

X73-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
D-3	R66	RD14BB2C430J	RD 43Ω
D-2	R67	RN14BK2B2201F	RN 2.2kΩ ± 1% 1/8W
C-2	R68	RN14BK2B2201F	RN 2.2kΩ ± 1% 1/8W
C-2	R69	RN14BK2B3600F	RN 360Ω ± 1% 1/8W
C-2	R70	RN14BK2B1601F	RN 1.6kΩ ± 1% 1/8W
C-2	R71	RD14BB2C220J	RD 22Ω
D-2	R72	RD14BB2C821J	RD 820Ω
D-2	R73	RD14BB2C430J	RD 43Ω
D-3	R74	RD14BB2C220J	RD 22Ω
D-2	R75	RD14BB2C220J	RD 22Ω
D-2	R76	RD14BB2C132J	RD 1.3kΩ
D-2	R77	RD14BB2C392J	RD 3.9kΩ
D-3	R78	RD14BB2C220J	RD 22Ω
D-2	R79	RD14BB2C220J	RD 22Ω
D-2	R80	RD14BB2C101J	RD 100Ω
D-3	R81	RD14BB2C101J	RD 100Ω
D-2	R82	RD14BB2C101J	RD 100Ω
D-3	R83	RD14BB2C102J	RD 1kΩ
D-2	R84	RD14BB2C432J	RD 4.3kΩ
D-3	R85	RD14BB2C472J	RD 4.7kΩ
D-1	R86	RD14BB2C472J	RD 4.7kΩ
	R87	No use	
D-3	R88	RD14BB2C102J	RD 1kΩ
D-3	R89	RD14BB2C432J	RD 4.3kΩ
D-3	R90	RD14BB2C101J	RD 100Ω
D-3	R91	RD14BB2C101J	RD 100Ω
D-3	R92	RD14BB2C101J	RD 100Ω
D-3	R93	RD14BB2C220J	RD 22Ω
D-3	R94	RD14BB2C220J	RD 22Ω
D-3	R95	RD14BB2C132J	RD 1.3kΩ
D-3	R96	RD14BB2C392J	RD 3.9kΩ
D-3	R97	RD14BB2C220J	RD 22Ω
D-1	R98	RD14BB2C220J	RD 22Ω
E-3	R99	RN14BK2B3600F	RN 360Ω ± 1% 1/8W
E-3	R100	RN14BK2B2001F	RN 2kΩ ± 1% 1/8W
E-3	R101	RN14BK2B2201F	RN 2.2kΩ ± 1% 1/8W
E-3	R102	RN14BK2B1801F	RN 1.8kΩ ± 1% 1/8W
E-3	R103	RD14BB2C220J	RD 22Ω
E-3	R104	RD14BB2C220J	RD 22Ω
E-3	R105	RD14BB2C821J	RD 820Ω
E-3	R106	RD14BB2C430J	RD 43Ω
E-3	R107	RN14BK2B8200F	RN 820Ω ± 1% 1/8W
E-3	R108	RN14BK2B8200F	RN 820Ω ± 1% 1/8W
E-3	R109	RD14BB2C391J	RD 390Ω
E-3	R110	RN14BK2B1001F	RN 1kΩ ± 1% 1/8W
D-3	R111	RD14BB2C470J	RD 47Ω
D-3	R112	RD14BB2C470J	RD 47Ω
E-3	R113	RN14BK2B7500F	RN 750Ω ± 1% 1/8W
D-3	R114	RN14BK2B7500F	RN 750Ω ± 1% 1/8W
D-3	R115	RD14BB2C221J	RD 220Ω
D-3	R116	RD14BB2C273J	RD 27kΩ
D-3	R117	RD14BB2C103J	RD 10kΩ
E-3	R118	RN14BK2B2200F	RN 220Ω ± 1% 1/8W
D-3	R119	RD14BB2C151J	RD 150Ω
D-3	R120	RD14BB2C151J	RD 150Ω
E-3	R121	RD14BB2C510J	RD 51Ω
E-3	R122	RD14BB2C510J	RD 51Ω
D-2	R123	RD14BB2C103J	RD 10kΩ
D-2	R124	RD14BB2C223J	RD 22kΩ
D-2	R125	RD14BB2C223J	RD 22kΩ
D-2	R126	RD14BB2C472J	RD 4.7kΩ
D-2	R127	RD14BB2C472J	RD 4.7kΩ
D-2	R128	RD14BB2C473J	RD 47kΩ
D-2	R129	RD14BB2C473J	RD 47kΩ
D-2	R130	RD14BB2C331J	RD 330Ω
D-2	R131	RD14BB2C472J	RD 4.7kΩ

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
D-2	R132	RD14BB2C103J	RD 10kΩ
D-2	R133	RN14BK2B4300F	RN 430Ω ± 1% 1/8W
D-2	R134	RN14BK2B4300F	RN 430Ω ± 1% 1/8W
D-2	R135	RN14BK2B4300F	RN 430Ω ± 1% 1/8W
D-2	R136	RN14BK2B4300F	RN 430Ω ± 1% 1/8W
E-2	R137	RN14BK2B8200F	RN 820Ω ± 1% 1/8W
D-2	R138	RN14BK2B8200F	RN 820Ω ± 1% 1/8W
	R139	No use	
E-2	R140	RN14BK2B4700F	RN 470Ω ± 1% 1/8W
D-2	R141	RN14BK2B3600F	RN 360Ω ± 1% 1/8W
E-2	R142	RN14BK2B2201F	RN 2.2kΩ ± 1% 1/8W
E-2	R143	RN14BK2B2201F	RN 2.2kΩ ± 1% 1/8W
D-2	R144	RN14BK2B1801F	RN 1.8kΩ ± 1% 1/8W
D-2	R145	RD14BB2C220J	RD 22Ω
D-2	R146	RD14BB2C220J	RD 22Ω
D-2	R147	RD14BB2C821J	RD 820Ω
D-2	R148	RD14BB2C430J	RD 43Ω
D-2	R149	RD14BB2C220J	RD 22Ω
E-2	R150	RD14BB2C220J	RD 22Ω
E-2	R151	RN14BK2B1101F	RN 1.1kΩ ± 1% 1/8W
E-2	R152	RN14BK2B9100F	RN 910Ω ± 1% 1/8W
E-2	R153	RN14BK2B9100F	RN 910Ω ± 1% 1/8W
E-2	R154	RN14BK2B1101F	RN 1.1kΩ ± 1% 1/8W
E-2	R155	RN14BK2B3300F	RN 330Ω ± 1% 1/8W
E-2	R156	RN14BK2B3300F	RN 330Ω ± 1% 1/8W
E-2	R157	RN14BK2B1001F	RN 1kΩ ± 1% 1/8W
E-2	R158	RN14BK2B2200F	RN 220Ω ± 1% 1/8W
E-2	R159	RN14BK2B1001F	RN 1kΩ ± 1% 1/8W
E-2	R160	RN14BK2B7500F	RN 750Ω ± 1% 1/8W
E-2	R161	RN14BK2B7500F	RN 750Ω ± 1% 1/8W
E-2	R162	RD14BB2C470J	RD 47Ω
E-2	R163	RD14BB2C470J	RD 47Ω
B-1	R164	RD14BB2C220J	RD 22Ω
B-1	R165	RD14BB2C220J	RD 22Ω
C21	R166	RN14BK2B1000F	RN 100Ω ± 1% 1/8W
B-2	R167	RD14BB2C241J	RD 240Ω
B-2	R168	RD14BB2C682J	RD 6.8kΩ
B-2	R169	RN14BK2B2700F	RN 270Ω ± 1% 1/8W
B-2	R170	RN14BK2B2700F	RN 270Ω ± 1% 1/8W
B-2	R171	RN14BK2B1801F	RN 1.8kΩ ± 1% 1/8W
B-2	R172	RN14BK2B5601F	RN 5.6kΩ ± 1% 1/8W
B-2	R173	RN14BK2B1801F	RN 1.8kΩ ± 1% 1/8W
B-2	R174	RN14BK2B5101F	RN 5.1kΩ ± 1% 1/8W
B-2	R175	RN14BK2B3000F	RN 300Ω ± 1% 1/8W
B-2	R176	RD14BB2C331J	RD 330Ω
B-2	R177	RN14BK2B2201F	RN 2.2kΩ ± 1% 1/8W
B-2	R178	RN14BK2B6801F	RN 6.8kΩ ± 1% 1/8W
B-2	R179	RN14BK2B2201F	RN 2.2kΩ ± 1% 1/8W
D-2	R180	RD14BB2C273J	RD 27kΩ
B-1	R181	RD14BB2C220J	RD 22Ω
B-1	R182	RD14BB2C220J	RD 22Ω
B-1	R183	RD14BB2C112J	RD 1.1kΩ
B-1	R184	RD14BB2C392J	RD 3.9kΩ
B-1	R185	RD14BB2C220J	RD 22Ω
B-1	R186	RD14BB2C220J	RD 22Ω
B-1	R187	RD14BB2C112J	RD 1.1kΩ
B-1	R188	RD14BB2C392J	RD 3.9kΩ
B-1	R189	RN14BK2B7500F	RN 750Ω ± 1% 1/8W
B-1	R190	RN14BK2B7500F	RN 750Ω ± 1% 1/8W
B-1	R191	RN14BK2B5601F	RN 5.6kΩ ± 1% 1/8W
B-1	R192	RN14BK2B5601F	RN 5.6kΩ ± 1% 1/8W
B-1	R193	RN14BK2B3601F	RN 3.6kΩ ± 1% 1/8W
B-1	R194	RN14BK2B3601F	RN 3.6kΩ ± 1% 1/8W
B-1	R195	RN14BK2B1501F	RN 1.5kΩ ± 1% 1/8W
B-1	R196	RN14BK2B1501F	RN 1.5kΩ ± 1% 1/8W
B-2	R197	RD14BB2C220J	RD 22Ω

# PARTS LIST

X73-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
B-1	R198	RD14BB2C220J	RD	22Ω	
B-1	R199	RD14BB2C470J	RD	47Ω	
B-1	R200	RN14BK2B4700F	RN	470Ω	= 1% 1/8W
B-1	R201	RN14BK2B4700F	RN	470Ω	= 1% 1/8W
B-2	R202	RN14BK2B51ROF	RN	51Ω	= 1% 1/8W
C-2	R203	RD14BB2C103J	RD	10kΩ	
C-2	R204	RD14BB2C472J	RD	4.7kΩ	
C-2	R205	RD14BB2C472J	RD	4.7kΩ	
C-2	R206	RD14BB2C103J	RD	10kΩ	
C-2	R207	RD14BB2C821J	RD	820Ω	
C-2	R208	RN14BK2B47ROF	RN	47Ω	= 1% 1/8W
C-1	R209	RN14BK2B4300F	RN	430Ω	= 1% 1/8W
C-1	R210	RN14BK2B4300F	RN	430Ω	= 1% 1/8W
C-1	R211	RD14BB2C301J	RD	300Ω	
	R212	No use			
C-1	R213	RN14BK2B1800F	RN	180Ω	= 1% 1/8W
C-2	R214	RN14BK2B4300F	RN	430Ω	= 1% 1/8W
C-1	R215	RN14BK2B4300F	RN	430Ω	= 1% 1/8W
	R216	No use			
C-2	R217	RD14BB2C220J	RD	22Ω	
C-1	R218	RD14BB2C220J	RD	22Ω	
C-1	R219	RN14BK2B1500F	RN	150Ω	= 1% 1/8W
C-1	R220	RD14BB2C123J	RD	12kΩ	
	R221	RD14BB2C330J	RD	33Ω	
C-1	R222	RD14BB2C682J	RD	6.8kΩ	
C-1	R223	RN14BK2B9100F	RN	910Ω	= 1% 1/8W
C-1	R224	RN14BK2B9100F	RN	910Ω	= 1% 1/8W
C-1	R225	RD14BB2C470J	RD	47Ω	
C-1	R226	RD14BB2C470J	RD	47Ω	
C-1	R227	RN14BK2B2000F	RN	200Ω	= 1% 1/8W
	R228	No use			
C-1	R229	RN14BK2B8200F	RN	820Ω	= 1% 1/8W
C-1	R230	RN14BK2B8200F	RN	820Ω	= 1% 1/8W
C-2	R231	RN14BK2B3600F	RN	360Ω	= 1% 1/8W
C-2	R232	RN14BK2B2201F	RN	2.2kΩ	= 1% 1/8W
C-2	R233	RN14BK2B2201F	RN	2.2kΩ	= 1% 1/8W
C-2	R234	RN14BK2B1801F	RN	1.8kΩ	= 1% 1/8W
C-2	R235	RD14BB2C220J	RD	22Ω	
C-2	R236	RD14BB2C220J	RD	22Ω	
D-2	R237	RD14BB2C821J	RD	820Ω	
D-2	R238	RD14BB2C430J	RD	43Ω	
D-1	R239	RD14BB2C220J	RD	22Ω	
D-1	R240	RD14BB2C220J	RD	22Ω	
D-1	R241	RD14BB2C132J	RD	1.3kΩ	
D-1	R242	RD14BB2C392J	RD	3.9kΩ	
D-1	R243	RD14BB2C220J	RD	22Ω	
D-1	R244	RD14BB2C220J	RD	22Ω	
D-1	R245	RD14BB2C101J	RD	100Ω	
D-1	R246	RD14BB2C101J	RD	100Ω	
D-1	R247	RD14BB2C101J	RD	100Ω	
D-1	R248	RD14BB2C102J	RD	1kΩ	
D-1	R249	RD14BB2C432J	RD	4.3kΩ	
D-1	R250	RD14BB2C102J	RD	1kΩ	
D-1	R251	RD14BB2C432J	RD	4.3kΩ	
D-1	R252	RD14BB2C101J	RD	100Ω	
D-1	R253	RD14BB2C101J	RD	100Ω	
D-1	R254	RD14BB2C101J	RD	100Ω	
D-1	R255	RD14BB2C220J	RD	22Ω	
D-1	R256	RD14BB2C220J	RD	22Ω	
D-1	R257	RD14BB2C132J	RD	1.3kΩ	
D-1	R258	RD14BB2C392J	RD	3.9kΩ	
D-1	R259	RD14BB2C220J	RD	22Ω	
D-1	R260	RD14BB2C220J	RD	22Ω	
E-1	R261	RN14BK2B3600F	RN	360Ω	= 1% 1/8W
E-1	R262	RN14BK2B2001F	RN	2kΩ	= 1% 1/8W
E-1	R263	RN14BK2B2201F	RN	2.2kΩ	= 1% 1/8W

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
E-1	R264	RN14BK2B1801F	RN	1.8kΩ	= 1% 1/8W
E-1	R265	RD14BB2C220J	RD	22Ω	
E-1	R266	RD14BB2C220J	RD	22Ω	
E-1	R267	RD14BB2C821J	RD	820Ω	
E-1	R268	RD14BB2C430J	RD	43Ω	
E-1	R269	RN14BK2B8200F	RN	820Ω	= 1% 1/8W
E-1	R270	RN14BK2B8200F	RN	820Ω	= 1% 1/8W
E-1	R271	RD14BB2C391J	RD	390Ω	
E-1	R272	RN14BK2B1001F	RN	1kΩ	= 1% 1/8W
D-1	R273	RD14BB2C470J	RD	47Ω	
D-1	R274	RD14BB2C470J	RD	47Ω	
E-1	R275	RN14BK2B7500F	RN	750Ω	= 1% 1/8W
D-1	R276	RN14BK2B7500F	RN	750Ω	= 1% 1/8W
D-1	R277	RD14BB2C221J	RD	220Ω	
D-1	R278	RD14BB2C273J	RD	27kΩ	
D-1	R279	RD14BB2C103J	RD	10kΩ	
E-1	R280	RN14BK2B2200F	RN	220Ω	= 1% 1/8W
D-1	R281	RD14BB2C151J	RD	150Ω	
D-1	R282	RD14BB2C151J	RD	150Ω	
E-1	R283	RD14BB2C510J	RD	51Ω	
E-1	R284	RD14BB2C510J	RD	51Ω	
E-2	R285	RD14BB2C472J	RD	4.7kΩ	
F-2	R286	RD14BB2C103J	RD	10kΩ	
F-2	R287	RD14BB2C103J	RD	10kΩ	
E-2	R288	RD14BB2C103J	RD	10kΩ	
E-2	R289	RD14BB2C103J	RD	10kΩ	
	R290	No use			
	R291	No use			
C-2	R292	RD14BB2C220J	RD	22Ω	
	R293	No use			
	R294	No use			
B-1	R295	RD14BB2C330J	RD	33Ω	
	R296	No use			
	R297	No use			
	R298	No use			
E-2	R299	RD14BB2C222J	RD	2.2kΩ	
E-2	R300	RD14BB2C222J	RD	2.2kΩ	
E-2	R301	RD14BB2C222J	RD	2.2kΩ	
	R302	No use			
	R303	No use			
E-2	R304	RD14BB2C220J	RD	22Ω	
E-2	R305	RD14BB2C220J	RD	22Ω	
	R306	RD14BB2C101J	RD	100Ω	
B-3	R307	RN14BK2B1501F	RN	1.5kΩ	= 1% 1/8W
B-1	R308	RN14BK2B1501F	RN	1.5kΩ	= 1% 1/8W
C-2	R309	RD14BB2C470J	RD	47Ω	
	R310	RD14BB2C470J	RD	47Ω	
D-2	R311	RD14BB2C100J	RD	10Ω	
E-3	R312	RD14BB2C470J	RD	47Ω	
C-2	R313	RD14BB2C470J	RD	47Ω	
E-1	R314	RD14BB2C470J	RD	47Ω	
E-2	R315	RD14BB2C470J	RD	47Ω	
E-2	R316	RD14BB2C470J	RD	47Ω	
B-2	R317	RD14BB2C473J	RD	47kΩ	
B-1	R318	RD14BB2C473J	RD	47kΩ	
A-2	R319	RD14BB2C103J	RD	10kΩ	
A-2	R320	RD14BB2C822J	RD	8.2kΩ	
A-2	R321	RD14BB2C103J	RD	10kΩ	
A-2	R322	RD14BB2C103J	RD	10kΩ	
A-2	R323	RD14BB2C752J	RD	7.5kΩ	
A-2	R324	RD14BB2C332J	RD	3.3kΩ	
B-3	R325	RD14BB2C271J	RD	270Ω	
B-2	R326	RD14BB2C271J	RD	270Ω	
	R327	No use			
	R328	No use			
	R329	No use			

# PARTS LIST

X73-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
C-3	R330	RD14BB2C331J	RD 330Ω
C-1	R331	RD14BB2C100J	RD 10Ω
C-3	R332	RD14BB2C1ROJ	RD 1Ω
D-3	R333	RD14BB2C470J	RD 47Ω
D-1	R334	RD14BB2C470J	RD 47Ω
E-3	VR1	R01-0512-05	VR 500Ω
E-1	VR2	R01-0512-05	VR 500Ω
B-3	VR3	R12-0421-05	VR 100Ω
E-3	VR4	R12-0421-05	VR 100Ω
C-3	VR5	R12-0421-05	VR 100Ω
C-3	VR6	R12-0421-05	VR 100Ω
C-3	VR7	R12-0540-05	VR 500Ω
C-2	VR8	R12-0539-05	VR 200Ω
C-2	VR9	R12-0540-05	VR 500Ω
E-3	VR10	R12-0540-05	VR 500Ω
E-3	VR11	R12-0421-05	VR 100Ω
	VR12	No use	
E-2	VR13	R12-0421-05	VR 100Ω
B-2	VR14	R12-0421-05	VR 100Ω
B-2	VR15	R12-0421-05	VR 100Ω
C-1	VR16	R12-0421-05	VR 100Ω
C-1	VR17	R12-0421-05	VR 100Ω
C-1	VR18	R12-0539-05	VR 200Ω
C-1	VR19	R12-0540-05	VR 500Ω
E-1	VR20	R12-0540-05	VR 500Ω
E-1	VR21	R12-0421-05	VR 100Ω
D-2	VR22	R12-0540-05	VR 500Ω
B-3	C1	CC45CH1H150J	CC 15pF ± 5%
B-3	C2	CC45CH1H220J	CC 22pF ± 5%
B-3	C3	CK45B1H103K	CK 0.01μF ± 10%
B-3	C4	CK45B1H103K	CK 0.01μF ± 10%
B-3	C5	CC45CH1H030C	CC 3pF ± 0.25pF
C-3	C6	CC45CH1H020C	CC 2pF ± 0.25pF
B-2	C7	CK45B1H103K	CK 0.01μF ± 10%
C-2	C8	CK45B1H103K	CK 0.01μF ± 10%
C-3	C9	CC45CH1H120J	CC 12pF ± 5%
	C10	No use	
C-2	C11	CK45B1H222K	CK 2200pF ± 10%
	C12	No use	
D-3	C13	CC45CH1H270J	CC 27pF ± 5%
C-2	C14	CC45CH1H220J	CC 22pF ± 5%
C-3	C15	CK45B1H103K	CK 0.01μF ± 10%
C-2	C16	No use	
	C17	No use	
	C18	No use	
E-3	C19	CC45CH1H150J	CC 15pF ± 5%
E-3	C20	CC45CH1H070D	CC 7pF ± 0.5pF
D-3	C21	CK45B1H102K	CK 1000pF ± 10%
D-3	C22	CC45CH1H220J	CC 22pF ± 5%
E-3	C23	CC45CH1H680J	CC 68pF ± 5%
D-2	C24	CK45B1H103K	CK 0.01μF ± 10%
E-2	C25	CC45CH1H151J	CC 150pF ± 5%
D-2	C26	CC45CH1H151J	CC 150pF ± 5%
D-2	C27	CK45B1H103K	CK 0.01μF ± 10%
E-2	C28	CC45CH1H220J	CC 22pF ± 5%
	C29	No use	
	C30	No use	
E-2	C31	CC45CH1H020C	CC 2pF ± 0.25pF
E-2	C32	CC45CH1H050C	CC 5pF ± 0.25pF
	C33	No use	
D-3	C34	CC45CH1H150J	CC 15pF ± 5%
D-1	C35	CC45CH1H150J	CC 15pF ± 5%
E-2	C36	CC45CH1H070D	CC 7pF ± 0.5pF
E-2	C37	CC45CH1H070D	CC 7pF ± 0.5pF
B-2	C38	CC45CH1H330J	CC 33pF ± 5%
B-2	C39	CC45SL1H330J	CC 33pF ± 5%

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
B-1	C40	CK45B1H103K	CK 0.01μF ± 10%
B-1	C41	CK45B1H103K	CK 0.01μF ± 10%
B-2	C42	CC45CH1H030C	CC 3pF ± 0.25pF
C-1	C43	CC45CH1H020C	CC 2pF ± 0.25pF
C-2	C44	CK45B1H103K	CK 0.01μF ± 10%
C-2	C45	CK45B1H103K	CK 0.01μF ± 10%
C-1	C46	CC45CH1H120J	CC 12pF ± 5%
	C47	No use	
C-1	C48	CK45B1H222K	CK 2200pF ± 10%
	C49	No use	
C-1	C50	CC45CH1H390J	CC 39pF ± 5%
C-1	C51	CC45CH1H220J	CC 22pF ± 5%
	C52	No use	
C-1	C53	CC45CH1H220J	CC 22pF ± 5%
D-1	C54	CK45B1H103K	CK 0.01μF ± 10%
D-1	C55	CK45B1H103K	CK 0.01μF ± 10%
E-1	C56	CC45CH1H150J	CC 15pF ± 5%
E-1	C57	CC45CH1H070D	CC 7pF ± 0.5pF
D-1	C58	CK45B1H102K	CK 1000pF ± 10%
D-1	C59	CC45CH1H220J	CC 22pF ± 5%
E-1	C60	CC45CH1H680J	CC 68pF ± 5%
B-2	C61	CK45B1H103K	CK 0.01μF ± 10%
B-3	C62	CK45B1H103K	CK 0.01μF ± 10%
B-2	C63	CE04W1C101M	CE 100μF 16WV
B-3	C64	CK45B1H103K	CK 0.01μF ± 10%
B-3	C65	CE04W1C101M	CE 100μF 16WV
B-2	C66	CK45B1H103K	CK 0.01μF ± 10%
C-2	C67	CE04W1C101M	CE 100μF 16WV
C-3	C68	CK45B1H103K	CK 0.01μF ± 10%
C-3	C69	CE04W1H010M	CE 1μF 50WV
C-3	C70	CE04W1C101M	CE 100μF 16WV
C-2	C71	C90-0298-05	SCC 0.1μF 12WV
C-2	C72	CK45B1H103K	CK 0.01μF ± 10%
C-3	C73	CK45B1H103K	CK 0.01μF ± 10%
C-2	C74	CK45B1H103K	CK 0.01μF ± 10%
C-2	C75	CE04W1C101M	CE 100μF 16WV
C-2	C76	CE04W1C101M	CE 100μF 16WV
D-2	C77	CE04W1C331M	CE 330μF 16WV
D-3	C78	CE04W1C101M	CE 100μF 16WV
E-3	C79	CK45B1H103K	CK 0.01μF ± 10%
E-2	C80	CE04W1C331M	CE 330μF 16WV
E-3	C81	CE04W1C221M	CE 220μF 16WV
F-3	C82	CE04W1C471M	CE 470μF 16WV
E-2	C83	CE04W1C221M	CE 220μF 16WV
F-3	C84	CE04W1C470M	CE 47μF 16WV
B-1	C85	CK45B1H103K	CK 0.01μF ± 10%
D-1	C86	CK45B1H103K	CK 0.01μF ± 10%
B-1	C87	CK45B1H103K	CK 0.01μF ± 10%
B-1	C88	CE04W1C101M	CE 100μF 16WV
B-2	C89	CK45B1H103K	CK 0.01μF ± 10%
B-2	C90	CK45B1H103K	CK 0.01μF ± 10%
B-2	C91	CE04W1C101M	CE 100μF 16WV
B-1	C92	CK45B1H103K	CK 0.01μF ± 10%
B-1	C93	CE04W1C101M	CE 100μF 16WV
C-2	C94	CK45B1H103K	CK 0.01μF ± 10%
C-1	C95	CE04W1H010M	CE 1μF 50WV
C-2	C96	CK45B1H103K	CK 0.01μF ± 10%
C-2	C97	CK45B1H103K	CK 0.01μF ± 10%
C-2	C98	CE04W1C101M	CE 100μF 16WV
C-2	C99	CE04W1C101M	CE 100μF 16WV
C-1	C100	CK45B1H103K	CK 0.01μF ± 10%
C-1	C101	CE04W1C101M	CE 100μF 16WV
	C102	No use	
C-2	C103	CE04W1H010M	CE 1μF 50WV
D-1	C104	CE04W1C101M	CE 100μF 16WV
F-1	C105	CE04W1C471M	CE 470μF 16WV



# PARTS LIST

X73-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
E-1	C106	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
E-2	C107	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
C-2	C108	CC45SL1H680J	CC	68pF	= 5%
F-1	C109	CE04W1C470M	CE	47 $\mu$ F	16WV
F-2	C110	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
F-1	C111	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
E-3	C112	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
	C113	No use			
	C114	No use			
	C115	No use			
	C116	No use			
D-3	C117	CC45SL1H101J	CC	100pF	= 5%
E-3	C118	CC45SL1H101J	CC	100pF	= 5%
D-2	C119	CC45SL1H101J	CC	100pF	= 5%
B-1	C120	CC45CH1H150J	CC	15pF	= 5%
	C121	No use			
D-2	C122	CC45SL1H101J	CC	100pF	= 5%
E-1	C123	CC45SL1H101J	CC	100pF	= 5%
D-3	C124	CE04W1H010M	CE	1 $\mu$ F	50WV
D-2	C125	C90-0298-05	SCC	0.1 $\mu$ F	12WV
D-2	C126	CC45SL1H101J	CC	100pF	= 5%
F-3	C127	C90-0298-05	SCC	0.1 $\mu$ F	12WV
D-2	C128	C90-0298-05	SCC	0.1 $\mu$ F	12WV
D-2	C129	C90-0298-05	SCC	0.1 $\mu$ F	12WV
F-1	C130	C90-0298-05	SCC	0.1 $\mu$ F	12WV
B-3	C131	CC45CH1H120J	CC	12pF	= 5%
B-1	C132	CC45CH1H120J	CC	12pF	= 5%
	C133	No use			
	C134	No use			
E-2	C135	CC45CH1H150J	CC	15pF	= 5%
E-2	C136	CC45CH1H150J	CC	15pF	= 5%
	C137	No use			
	C138	CC45CH1H150J	CC	15pF	= 5%
	C139	No use			
D-3	C140	CC45CH1H030C	CC	3pF	= 0.25pF
C-1	C141	CC45CH1H030C	CC	3pF	= 0.25pF
D-2	C142	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
B-1	C143	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
	C144	No use			
	C145	No use			
D-3	C146	CC45CH1H030C	CC	3pF	= 0.25pF
D-1	C147	CC45CH1H030C	CC	3pF	= 0.25pF
	C148	No use			
	C149	No use			
A-3	C150	C90-0298-05	SCC	0.1 $\mu$ F	12WV
C-2	C151	CC45SL1H680J	CC	68pF	= 5%
	C152	No use			
C-3	C153	CC45SL1H680J	CC	68pF	= 5%
	C154	No use			
D-2	C155	CC45CH1H100J	CC	10pF	= 5%
	C156	No use			
E-3	C157	CC45SL1H680J	CC	68pF	= 5%
	C158	No use			
D-2	C159	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
E-2	C160	CC45CH1H050C	CC	5pF	= 0.25pF
E-2	C161	CC45CH1H050C	CC	5pF	= 0.25pF
A-1	C162	C90-0298-05	SCC	0.1 $\mu$ F	12WV
C-2	C163	CC45SL1H680J	CC	68pF	= 5%
	C164	No use			
E-1	C165	CC45SL1H680J	CC	68pF	= 5%
	C166	No use			
D-3	C167	CC45CH1H150J	CC	15pF	= 5%
C-2	C168	CC45CH1H150J	CC	15pF	= 5%
D-2	C169	CC45CH1H150J	CC	15pF	= 5%
E-3	C170	CC45CH1H150J	CC	15pF	= 5%
C-2	C171	CC45CH1H150J	CC	15pF	= 5%

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
E-1	C172	CC45CH1H150J	CC	15pF	= 5%
	C173	No use			
C-1	C174	CC45CH1H030C	CC	3pF	= 0.25pF
	C175	No use			
	C176	No use			
	C177	No use			
	C178	No use			
	C179	No use			
	C180	No use			
	C181	No use			
C-2	C182	CK45B1H103K	CK	0.01 $\mu$ F	= 10%
C-3	C183	CC45CH1H101J	CC	100pF	= 5%
	C184	No use			
	C185	No use			
	C186	No use			
	C187	No use			
	C188	No use			
	C189	No use			
C-2	C190	CC45CH1H030C	CC	3pF	= 0.25pF
	C191	No use			
	C192	CC45CH1H030C	CC	3pF	= 0.25pF
	C193	CC45CH1H030C	CC	3pF	= 0.25pF
	C194	CC45CH1H030C	CC	3pF	= 0.25pF
	C195	CC45CH1H030C	CC	3pF	= 0.25pF
	C196	CC45CH1H030C	CC	3pF	= 0.25pF
	C197	CC45CH1H030C	CC	3pF	= 0.25pF
	C198	CC45CH1H030C	CC	3pF	= 0.25pF
	C199	CC45CH1H030C	CC	3pF	= 0.25pF
	C200	CC45CH1H030C	CC	3pF	= 0.25pF
	C201	CC45CH1H030C	CC	3pF	= 0.25pF
	C202	No use			
	C203	CC45CH1H030C	CC	3pF	= 0.25pF
	C204	CC45CH1H030C	CC	3pF	= 0.25pF
	C205	CC45CH1H030C	CC	3pF	= 0.25pF
	C206	CC45CH1H030C	CC	3pF	= 0.25pF
	C207	CC45CH1H030C	CC	3pF	= 0.25pF
B-3	TC1	C05-0030-15	TC	20pF	
B-3	TC2	C05-0030-15	TC	20pF	
D-3	TC3	C05-0030-15	TC	20pF	
D-3	TC4	C05-0030-15	TC	20pF	
B-1	TC5	C05-0030-15	TC	20pF	
C-3	TC6	C05-0030-15	TC	20pF	
D-1	TC7	C05-0030-15	TC	20pF	
D-1	TC8	C05-0030-15	TC	20pF	
C-2	TC9	C05-0309-15	TC	40pF	
C-3	TC10	C05-0030-15	TC	20pF	
C-1	TC11	C05-0030-15	TC	20pF	
B-3	L1	L40-2201-03	Ferri-inductor		22 $\mu$ H
B-3	L2	L40-2201-03	Ferri-inductor		22 $\mu$ H
C-2	L3	L40-2201-03	Ferri-inductor		22 $\mu$ H
	L4	No use			
	L5	No use			
D-3	L6	L40-2201-03	Ferri-inductor		22 $\mu$ H
B-1	L7	L40-2201-03	Ferri-inductor		22 $\mu$ H
C-2	L8	L40-2201-03	Ferri-inductor		22 $\mu$ H
C-1	L9	L40-2201-03	Ferri-inductor		22 $\mu$ H
	L10	No use			
D-1	L11	L40-2201-03	Ferri-inductor		22 $\mu$ H
	L12	L40-6882-01	Ferri-inductor		0.68 $\mu$ H
D-3	D1		Diode Silicon		DS442X
D-1	D2		Diode Silicon		DS442X
D-3	D3		Diode Silicon		DS442X
D-1	D4		Diode Silicon		DS442X
B-2	D5		Diode Silicon		DS442X
B-2	D6		Diode Silicon		DS442X

# PARTS LIST

X73-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
D-3	D7		Diode Silicon DS442X
D-3	D8		Diode Silicon DS442X
	D9	No use	
	D10	No use	
D-2	D11		Diode Zener WZ-071
D-2	D12		Diode Zener WZ-071
D-2	D13		Diode Silicon DS442X
E-2	D14		Diode Silicon DS442X
F-2	D15		Diode Silicon DS442X
E-2	D16		Diode Silicon DS442X
E-2	D17		Diode Silicon DS442X
E-2	D18		Diode Silicon DS442X
F-2	D19		Diode Silicon DS442X
E-2	D20		Diode Silicon DS442X
E-2	D21		Diode Silicon DS442X
E-2	D22		Diode Silicon DS442X
E-2	D23		Diode Silicon DS442X
E-2	D24		Diode Silicon DS442X
F-2	D25		Diode Silicon DS442X
F-2	D26		Diode Silicon DS442X
E-2	D27		Diode Silicon DS442X
F-2	D28		Diode Silicon DS442X
F-2	D29		Diode Silicon DS442X
C-3	D30		Diode Silicon DS442X
C-2	D31		Diode Silicon DS442X
E-3	D32		Diode Silicon DS442X
D-2	D33		Diode Silicon DS442X
C-2	D34		Diode Silicon DS442X
E-1	D35		Diode Silicon DS442X
C-3	D36		Diode Zener WZ-061
C-1	D37		Diode Zener WZ-061
	D38	No use	
	D39	No use	
B-3	D40		Diode Silicon 1S2686
B-3	D41		Diode Silicon 1S2686
B-1	D42		Diode Silicon 1S2686
B-1	D43		Diode Silicon 1S2686
A-2	D44		Diode Silicon DS442X
B-3	Q1		TR NPN 2SC536KNP (F)
B-3	Q2		TR NPN 2SC1215 (T or S)
B-2	Q3		TR NPN 2SC1215 (T or S)
C-3	Q4		TR PNP 2SA838 (C)
C-3	Q5		TR PNP 2SA838 (C)
C-3	Q6		TR PNP 2SA838 (C)
C-3	Q7		TR PNP 2SA838 (C)
B-2	Q8		TR PNP 2SA608KS)
C-2	Q9		TR PNP 2SA608KNP (F)
C-3	Q10		TR NPN 2SC1215 (T or S)
C-2	Q11		TR NPN 2SC1215 (T or S)
C-3	Q12		TR NPN 2SC1215 (T or S)
C-2	Q13		TR NPN 2SC1215 (T or S)
C-3	Q14		TR PNP 2SA1161
D-3	Q15		TR NPN 2SC2499
C-2	Q16		TR PNP 2SA1161
C-2	Q17		TR NPN 2SC2499
D-3	Q18		TR NPN 2SC1215 (T or S)
D-3	Q19		TR NPN 2SC1215 (T or S)
D-2	Q20		TR NPN 2SC1215 (T or S)
D-2	Q21		TR NPN 2SC1215 (T or S)
	Q22	No use	
D-3	Q23		TR NPN 2SC1215 (T or S)
D-3	Q24		TR NPN 2SC1215 (T or S)
D-3	Q25		TR NPN 2SC1215 (T or S)
D-3	Q26		TR NPN 2SC1215 (T or S)
E-3	Q27		TR NPN 2SC1215 (T or S)

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
E-3	Q28		TR NPN 2SC1215 (T or S)
E-3	Q29		TR PNP 2SA1161
E-3	Q30		TR NPN 2SC2499
D-3	Q31		TR NPN 2SC1215 (T or S)
D-3	Q32		TR NPN 2SC1215 (T or S)
D-2	Q33		TR PNP 2SA608KNP (F)
D-2	Q34		TR NPN 2SC536KNP (F)
E-2	Q35		TR NPN 2SC1047 (C)
E-2	Q36		TR NPN 2SC1047 (C)
D-2	Q37		TR PNP 2SA608KNP (F)
E-2	Q38		TR NPN 2SC1215 (T or S)
E-2	Q39		TR NPN 2SC1215 (T or S)
D-2	Q40		TR PNP 2SA1161
D-2	Q41		TR NPN 2SC2499
E-2	Q42		TR NPN 2SC1215 (T or S)
E-2	Q43		TR NPN 2SC1215 (T or S)
E-2	Q44		TR PNP 2SA1161
E-2	Q45		TR PNP 2SA1161
B-2	Q46		TR NPN 2SC536KNP (F)
B-2	Q47		TR NPN 2SC536KNP (F)
B-2	Q48		TR NPN 2SC536KNP (F)
B-2	Q49		TR NPN 2SC536KNP (F)
B-1	Q50		TR NPN 2SC1215 (T or S)
B-1	Q51		TR NPN 2SC1215 (T or S)
C-2	Q52		TR PNP 2SA838 (C)
C-1	Q53		TR PNP 2SA838 (C)
C-2	Q54		TR PNP 2SA838 (C)
C-1	Q55		TR PNP 2SA838 (C)
C-2	Q56		TR PNP 2SA608KNP (F)
C-2	Q57		TR PNP 2SA608KNP (F)
C-2	Q58		TR NPN 2SC1215 (T or S)
C-1	Q59		TR NPN 2SC1215 (T or S)
C-1	Q60		TR NPN 2SC1215 (T or S)
C-1	Q61		TR NPN 2SC1215 (T or S)
C-2	Q62		TR PNP 2SA1161
C-2	Q63		TR NPN 2SC2499
D-1	Q64		TR NPN 2SC1215 (T or S)
D-2	Q65		TR NPN 2SC1215 (T or S)
D-1	Q66		TR NPN 2SC1215 (T or S)
D-1	Q67		TR NPN 2SC1215 (T or S)
D-1	Q68		TR NPN 2SC1215 (T or S)
D-1	Q69		TR NPN 2SC1215 (T or S)
D-1	Q70		TR NPN 2SC1215 (T or S)
D-1	Q71		TR NPN 2SC1215 (T or S)
E-1	Q72		TR NPN 2SC1215 (T or S)
E-1	Q73		TR NPN 2SC1215 (T or S)
E-1	Q74		TR PNP 2SA1161
E-1	Q75		TR PNP 2SA2499
D-1	Q76		TR NPN 2SC1215 (T or S)
D-1	Q77		TR NPN 2SC1215 (T or S)
E-2	Q78		TR NPN 2SC536KNP (F)
A-2	Q79		TR NPN 2SC536KNP (F)
B-3	IC1		IC Linear CA3102E
B-1	IC2		IC Linear CA3102E
E-3	IC3		IC Digital SN74LS32N
E-2	IC4		IC Digital SN74LS11N
E-2	IC5		IC Digital SN74LS112AN
E-1	IC6		IC Digital SN74LS08N
E-1	IC7		IC Digital SN74LS00N
A-2	TH1		Thermistor SDT-1000
A-3	P3	E40-0618-05	Pin connector 6P
A-1	P4	E40-0618-05	Pin connector 6P
F-2	P5	E40-1276-05	Pin connector 12P
	P6	No use	

# PARTS LIST

X73-1320-00

## VERTICAL OUTPUT AMPLIFIER UNIT X73-1330-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
B-2	P7	E40-0576-05	Pin connector 5P
C-2	P8	E40-0576-05	Pin connector 5P
E-2	P9	E40-0376-05	Pin connector 3P
	P10	No use	
E-1	P11	E40-0476-05	Pin connector 4P
E-1	P12	E40-0476-05	Pin connector 4P
	P13	No use	
F-2	P14	E40-0776-05	Pin connector 7P
D-3	P15	E40-0276-05	Pin connector 2P
D-2	P16	E40-0276-05	Pin connector 2P
F-3	P17	E40-0276-05	Pin connector 2P
F-1	P18	E40-0276-05	Pin connector 2P
D-1	P19	E40-0276-05	Pin connector 2P
F-1	P20	E40-0576-05	Pin connector 5P
D-2	P21	E40-0276-05	Pin connector 2P
D-2	TP	E40-0211-05	Pin connector 2P
		L92-0110-05	Core (beads type)
		J25-2973-03	Printed circuit board

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
E-3	R1	RN14BK2B91ROF	RN 91Ω ±1% 1/8W
E-3	R2	RN14BK2B91ROF	RN 91Ω ±1% 1/8W
E-2	R3	RD14BB2C220J	RD 22Ω
E-3	R4	RD14BB2C220J	RD 22Ω
D-2	R5	RD14BB2C100J	RD 10Ω
	R6	No use	
E-2	R7	RD14BB2C332J	RD 3.3kΩ
E-2	R8	RN14BK2B27ROF	RN 27Ω ±1% 1/8W
D-2	R9	RN14BK2B27ROF	RN 27Ω ±1% 1/8W
D-2	R10	RD14BB2C220J	RD 22Ω
D-3	R11	RD14BB2C220J	RD 22Ω
D-3	R12	RD14BB2C302J	RD 3kΩ
D-2	R13	RD14BB2C122J	RD 1.2kΩ
D-2	R14	RD14BB2C220J	RD 22Ω
D-3	R15	RD14BB2C220J	RD 22Ω
D-2	R16	RN14BK2E6200F	RN 620Ω ±1% 1/4W
D-3	R17	RN14BK2E6200F	RN 620Ω ±1% 1/4W
C-2	R18	RD14BB2C220J	RD 22Ω
C-3	R19	RD14BB2C220J	RD 22Ω
D-3	R20	RD14BB2C470J	RD 47Ω
D-3	R21	RD14BB2C220J	RD 22Ω
D-3	R22	RD14BB2C151J	RD 150Ω
	R23	No use	
	R24	No use	
C-2	R25	RD14BB2C102J	RD 1kΩ
C-3	R26	RD14BB2C822J	RD 8.2kΩ
C-2	R27	RD14BB2E560J	RD 56Ω ±5% 1/4W
C-3	R28	RD14BB2E560J	RD 56Ω ±5% 1/4W
C-3	R29	RS14AB3D820J	RS 82Ω ±5% 2W
C-2	R30	RD14BB2C100J	RD 10Ω
C-3	R31	RD14BB2C100J	RD 10Ω
C-2	R32	RD14BB2C220J	RD 22Ω
C-3	R33	RD14BB2C220J	RD 22Ω
B-2	R34	RD14BB2C471J	RD 470Ω
B-2	R35	RD14BB2C471J	RD 470Ω
B-2	R36	RD14BB2C471J	RD 470Ω
B-3	R37	RD14BB2C471J	RD 470Ω
B-3	R38	RD14BB2C471J	RD 470Ω
B-3	R39	RD14BB2C471J	RD 470Ω
B-2	R40	RS14AB3D151J	RS 150Ω ±5% 2W
B-2	R41	RS14AB3D151J	RS 150Ω ±5% 2W
E-3	R42	RD14BB2C331J	RD 330Ω
E-3	R43	RN14BK2B5601F	RN 5.6kΩ ±1% 1/8W
D-3	R44	RN14BK2B4301F	RN 4.3kΩ ±1% 1/8W
D-3	R45	RN14BK2B1500F	RN 150Ω ±1% 1/8W
B-3	R46	RS14AB3D151J	RS 150Ω ±5% 2W
B-3	R47	RS14AB3D151J	RS 150Ω ±5% 2W
	R48	No use	
E-2	R49	RN14BK2B3300F	RN 330Ω ±1% 1/8W
D-3	R50	RD14BB2C101J	RD 100Ω
	R51	No use	
	R52	No use	
	R53	No use	
D-2	R54	RD14BB2C332J	RD 3.3kΩ
D-3	VR1	R12-0541-05	VR 100Ω
E-3	C1	CK45B1H103K	CK 0.01μF ±10%
	C2	No use	
D-3	C3	CE04W0J102M	CE 1000μF 6.3WV
C-3	C4	CK45B1H103K	CK 0.01μF ±10%
D-2	C5	CK45B1H103K	CK 0.01μF ±10%
D-3	C6	CK45B1H103K	CK 0.01μF ±10%
C-2	C7	CK45B1H103K	CK 0.01μF ±10%
C-2	C8	CK45B1H103K	CK 0.01μF ±10%

# PARTS LIST

X73-1330-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
C-3	C9	CK45B2H472K	CK	4700pF	± 10% 500WV
E-2	C10	CK45B1H103K	CK	0.01μF	± 10%
E-3	C11	CK45B1H103K	CK	0.01μF	± 10%
D-2	C12	CE04W1J330M	CE	33μF	63WV
C-2	C13	CK45B2H472K	CK	4700pF	± 10% 500WV
F-3	C14	CE04W1V470M	CE	47μF	35WV
F-3	C15	CK45B1H103K	CK	0.01μF	± 10%
E-3	C16	CE04W1C470M	CE	47μF	16WV
E-3	C17	CK45B1H103K	CK	0.01μF	± 10%
C-2	C18	CC45CH1H070D	CC	7pF	± 0.5pF
C-3	C19	CK45B1H152K	CK	1500pF	± 10%
E-2	C20	CC45CH1H100D	CC	10pF	± 0.5pF
E-2	C21	CE04W1C331M	CE	330μF	16WV
D-2	TC1	C05-0411-05	TC	10pF	
	TC2	No use			
C-2	TC3	C05-0414-15	TC	40pF	
B-2	L1	L40-2282-13	Ferri-inductor	0.22μH	
A-2	L2	L40-2282-13	Ferri-inductor	0.22μH	
A-2	L3	L40-2282-13	Ferri-inductor	0.22μH	
B-3	L4	L40-2282-13	Ferri-inductor	0.22μH	
A-3	L5	L40-2282-13	Ferri-inductor	0.22μH	
A-3	L6	L40-2282-13	Ferri-inductor	0.22μH	
D-2	L7	L40-1011-03	Ferri-inductor	100μH	
E-2	L8	L40-1011-03	Ferri-inductor	100μH	
F-2	L9	L40-1011-03	Ferri-inductor	100μH	
E-2	Q1		TR	NPN	2SC2499
E-3	Q2		TR	NPN	2SC2499
D-2	Q3		TR	NPN	2SC2499
D-3	Q4		TR	NPN	2SC2499
D-3	Q5		TR	NPN	2SC1047 (C)
	Q6	No use			
C-2	Q7		TR	NPN	2SC2644
C-3	Q8		TR	NPN	2SC2644
C-2	Q9		TR	NPN	2SC1164 (O)
C-3	Q10		TR	NPN	2SC1164 (O)
D-3	Q11		TR	NPN	2SC536KNP (F)
E-3	Q12		TR	NPN	2SC536KNP (F)
C-2	Q13		TR	NPN	2SC2644
C-3	Q14		TR	NPN	2SC2644
F-2	P10	E40-0377-05	Pin connector	3P	
F-3	P13	E40-0277-05	Pin connector	2P	
E-2	P20	E40-0576-05	Pin connector	5P	
E-2	P22	E40-0776-05	Pin connector	7P	
		E23-0512-05	Terminal		
		F02-0501-04	Heat sink		
		F02-0502-05	Heat sink		
		L92-0110-05	Core (beads type)		
		J25-2974-04	Printed circuit board		

SWEEP ROTARY UNIT X74-1310-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
C-2	R1	RN14BK2B3603F	RN	360kΩ	± 1% 1/8W
C-2	R2	RN14BK2B1203F	RN	120kΩ	± 1% 1/8W
C-2	R3	RN14BK2B3002F	RN	30kΩ	± 1% 1/8W
C-2	R4	RN14BK2B3002F	RN	30kΩ	± 1% 1/8W
C-2	R5	RN14BK2B3602F	RN	36kΩ	± 1% 1/8W
D-2	R6	RN14BK2B1202F	RN	12kΩ	± 1% 1/8W
D-2	R7	RN14BK2B3001F	RN	3kΩ	± 1% 1/8W
D-2	R8	RN14BK2B3001F	RN	3kΩ	± 1% 1/8W
D-2	R9	RN14BK2B3601F	RN	3.6kΩ	± 1% 1/8W
C-2	R10	RD14BB2C124J	RD	120kΩ	
C-2	R11	RD14BB2C393J	RD	39kΩ	
C-2	R12	RD14BB2C203J	RD	20kΩ	
C-2	R13	RD14BB2C123J	RD	12kΩ	
D-2	R14	RD14BB2C392J	RD	3.9kΩ	
D-2	R15	RD14BB2C202J	RD	2kΩ	
D-2	R16	RD14BB2C202J	RD	2kΩ	
D-2	R17	RD14BB2C103J	RD	10kΩ	
C-1	R18	RD14BB2C103J	RD	10kΩ	
C-2	R19	RD14BB2C103J	RD	10kΩ	
C-3	R20	RN14BK2B3603F	RN	360kΩ	± 1% 1/8W
C-3	R21	RN14BK2B1203F	RN	120kΩ	± 1% 1/8W
C-3	R22	RN14BK2B3002F	RN	30kΩ	± 1% 1/8W
C-3	R23	RN14BK2B3002F	RN	30kΩ	± 1% 1/8W
C-3	R24	RN14BK2B3602F	RN	36kΩ	± 1% 1/8W
D-3	R25	RN14BK2B1202F	RN	12kΩ	± 1% 1/8W
D-3	R26	RN14BK2B3001F	RN	3kΩ	± 1% 1/8W
D-3	R27	RN14BK2B3001F	RN	3kΩ	± 1% 1/8W
D-3	R28	RN14BK2B3601F	RN	3.6kΩ	± 1% 1/8W
C-3	R29	RD14BB2C124J	RD	120kΩ	
C-3	R30	RD14BB2C393J	RD	39kΩ	
C-3	R31	RD14BB2C203J	RD	20kΩ	
C-3	R32	RD14BB2C123J	RD	12kΩ	
D-3	R33	RD14BB2C392J	RD	3.9kΩ	
D-3	R34	RD14BB2C202J	RD	2kΩ	
D-3	R35	RD14BB2C202J	RD	2kΩ	
D-2	R36	RD14BB2C103J	RD	10kΩ	
C-2	R37	RD14BB2C103J	RD	10kΩ	
C-3	R38	RD14BB2C103J	RD	10kΩ	
C-2	C1	CK45B1H103K	CK	0.01μF	± 10%
C-2	C2	CK45B1H103K	CK	0.01μF	± 10%
C-2	C3	CK45B1H103K	CK	0.01μF	± 10%
C-4	C4	CK45B1H103K	CK	0.01μF	± 10%
C-2	D1		Diode Silicon	GMA-01	
C-2	D2		Diode Silicon	GMA-01	
C-2	D3		Diode Silicon	GMA-01	
C-2	D4		Diode Silicon	GMA-01	
D-2	D5		Diode Silicon	GMA-01	
D-2	D6		Diode Silicon	GMA-01	
D-2	D7		Diode Silicon	GMA-01	
D-2	D8		Diode Silicon	GMA-01	
C-3	D9		Diode Silicon	GMA-01	
C-3	D10		Diode Silicon	GMA-01	
C-3	D11		Diode Silicon	GMA-01	
C-3	D12		Diode Silicon	GMA-01	
D-3	D13		Diode Silicon	GMA-01	
D-3	D14		Diode Silicon	GMA-01	
D-3	D15		Diode Silicon	GMA-01	
D-3	D16		Diode Silicon	GMA-01	
B-3	P15-19	E40-0976-05	Pin connector	9P	
		E40-1076-05	Pin connector	10P	
B-2	P40	E40-0876-05	Pin connector	8P	
B-2	P41	E40-0876-05	Pin connector	8P	

# PARTS LIST

X74-1310-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
A-3	P42	E40-0476-05	Pin connector 4P
C-3	P51	E40-0776-05	Pin connector 7P
B-3	P57	E40-0376-05	Pin connector 3P
		E40-2336-05	Parallel cable
		J25-2971-03	Printed circuit board

TRIG SWEEP UNIT X74-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
	O2R1	No use	
	R2	No use	
	R3	No use	
	R4	No use	
	R5	RD14BB2C181J	RD 180Ω
	R6	RD14BB2C332J	RD 3.3kΩ
	R7	RD14BB2C332J	RD 3.3kΩ
	R8	RD14BB2C222J	RD 2.2kΩ
A-1	R8	RD14BB2C222J	RD 2.2kΩ
B-1	R9	RD14BB2C470J	RD 47Ω
B-1	R10	RD14BB2C681J	RD 680Ω
B-1	R11	RD14BB2C511J	RD 510Ω
B-2	R12	RD14BB2C511J	RD 510Ω
D-2	R13	RD14BB2C511J	RD 510Ω
B-1	R14	RD14BB2C182J	RD 1.8kΩ
B-2	R15	RD14BB2C681J	RD 680Ω
B-2	R16	RD14BB2C182J	RD 1.8kΩ
B-2	R17	RD14BB2C681J	RD 680Ω
B-1	R18	RD14BB2C511J	RD 510Ω
B-2	R19	RD14BB2C181J	RD 180Ω
B-2	R20	RD14BB2C181J	RD 180Ω
B-2	R21	RD14BB2C181J	RD 180Ω
B-2	R22	RD14BB2C332J	RD 3.3kΩ
B-2	R23	RD14BB2C152J	RD 1.5kΩ
B-1	R24	RD14BB2C511J	RD 510Ω
C-1	R25	RD14BB2C271J	RD 270Ω
	R26	RD14BB2C472J	RD 4.7kΩ
C-1	R27	RD14BB2C101J	RD 100Ω
C-1	R28	RD14BB2C103J	RD 10kΩ
C-1	R29	RD14BB2C271J	RD 270Ω
C-1	R30	RD14BB2C511J	RD 510Ω
D-1	R31	RD14BB2C361J	RD 360Ω
D-1	R32	RD14BB2C152J	RD 1.5kΩ
C-2	R33	RD14BB2C511J	RD 510Ω
B-3	R34	RD14BB2C820J	RD 82Ω
B-3	R35	RD14BB2C820J	RD 82Ω
B-3	R36	RD14BB2C331J	RD 330Ω
B-3	R37	RD14BB2C101J	RD 100Ω
B-2	R38	RD14BB2C331J	RD 330Ω
B-2	R39	RD14BB2C101J	RD 100Ω
C-1	R40	RD14BB2C511J	RD 510Ω
D-1	R41	RD14BB2C361J	RD 360Ω
D-1	R42	RD14BB2C220J	RD 22Ω
D-2	R43	RN14BK2B2401F	RN 2.4kΩ ±1% 1/8W
D-2	R44	RN14BK2B5101F	RN 5.1kΩ ±1% 1/8W
B-3	R45	RD14BB2C470J	RD 47Ω
B-2	R46	RD14BB2C470J	RD 47Ω
D-1	R47	RN14BK2B2401F	RN 2.4kΩ ±1% 1/8W
E-1	R48	RD14BB2C123J	RD 12kΩ
E-1	R49	RN14BK2B1502F	RN 15kΩ ±1% 1/8W
E-1	R50	RN14BK2B1202F	RN 12kΩ ±1% 1/8W
E-2	R51	RN14BK2B1002F	RN 10kΩ ±1% 1/8W
E-1	R52	RN14BK2B4302F	RN 43kΩ ±1% 1/8W
E-1	R53	RD14BB2C103J	RD 10kΩ
E-1	R54	RD14BB2C103J	RD 10kΩ
E-2	R55	RN14BK2B3901F	RN 3.9kΩ ±1% 1/8W
E-1	R56	RN14BK2B3901F	RN 3.9kΩ ±1% 1/8W
E-1	R57	RD14BB2C103J	RD 10kΩ
E-2	R58	RD14BB2C104J	RD 100kΩ
E-2	R59	RD14BB2C103J	RD 10kΩ
D-2	R60	RD14BB2C103J	RD 10kΩ
E-2	R61	RD14BB2C104J	RD 100kΩ
D-2	R62	RD14BB2C103J	RD 10kΩ
E-2	R63	RD14BB2C103J	RD 10kΩ
D-2	R64	RD14BB2C104J	RD 100kΩ
D-2	R65	RD14BB2C103J	RD 10kΩ

# PARTS LIST

X-74-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
E-2	R66	RD14BB2C103J	RD 10 $\Omega$
D-2	R67	RD14BB2C470J	RD 47 $\Omega$
D-2	R68	RD14BB2C101J	RD 100 $\Omega$
D-2	R69	RD14BB2C101J	RD 100 $\Omega$
D-2	R70	RD14BB2C470J	RD 47 $\Omega$
D-2	R71	RD14BB2C470J	RD 47 $\Omega$
D-2	R72	RD14BB2C101J	RD 100 $\Omega$
D-2	R73	RD14BB2C101J	RD 100 $\Omega$
C-2	R74	RD14BB2C242J	RD 2.4k $\Omega$
D-2	R75	RD14BB2C101J	RD 100 $\Omega$
C-3	R76	RD14BB2C511J	RD 510 $\Omega$
D-2	R77	RD14BB2C393J	RD 39k $\Omega$
D-2	R78	RD14BB2C152J	RD 1.5k $\Omega$
C-2	R79	RD14BB2C102J	RD 1k $\Omega$
C-2	R80	RD14BB2C101J	RD 100 $\Omega$
C-1	R81	RD14BB2C511J	RD 510 $\Omega$
C-1	R82	RD14BB2C511J	RD 510 $\Omega$
C-2	R83	RD14BB2C331J	RD 330 $\Omega$
B-1	R84	RD14BB2C511J	RD 510 $\Omega$
C-2	R85	RD14BB2C222J	RD 2.2k $\Omega$
D-1	R86	RD14BB2C100J	RD 10 $\Omega$
C-2	R87	RD14BB2C222J	RD 2.2k $\Omega$
C-2	R88	RD14BB2C273J	RD 27k $\Omega$
C-2	R89	RD14BB2C472J	RD 4.7k $\Omega$
C-2	R90	RD14BB2C102J	RD 1k $\Omega$
C-2	R91	RD14BB2C472J	RD 4.7k $\Omega$
C-2	R92	RD14BB2C302J	RD 3k $\Omega$
C-2	R93	RD14BB2C102J	RD 1k $\Omega$
C-2	R94	RD14BB2C122J	RD 1.2k $\Omega$
C-1	R95	RD14BB2C182J	RD 1.8k $\Omega$
C-1	R96	RD14BB2C152J	RD 1.5k $\Omega$
C-1	R97	RD14BB2C511J	RD 510 $\Omega$
C-2	R98	RN14BK2B5100F	RN 510 $\Omega$ $\pm$ 1% 1/8W
C-2	R99	RD14BB2C221J	RD 220 $\Omega$
	R100	No use	
C-2	R101	RN14BK2B4701F	RN 4.7k $\Omega$ $\pm$ 1% 1/8W
C-2	R102	RN14BK2B4701F	RN 4.7k $\Omega$ $\pm$ 1% 1/8W
C-2	R103	RD14BB2C101J	RD 100 $\Omega$
C-2	R104	RD14BB2C511J	RD 510 $\Omega$
C-3	R105	RD14BB2C511J	RD 510 $\Omega$
C-3	R106	RD14BB2C162J	RD 1.6k $\Omega$
C-3	R107	RD14BB2C511J	RD 510 $\Omega$
	R108	No use	
C-1	R109	RD14BB2C102J	RD 1k $\Omega$
D-4	R110	RD14BB2C103J	RD 10k $\Omega$
C-3	R111	RD14BB2C222J	RD 2.2k $\Omega$
	R112	No use	
C-1	R113	RD14BB2C222J	RD 2.2k $\Omega$
C-4	R114	RD14BB2C222J	RD 2.2k $\Omega$
A-3	R115	RD14BB2C222J	RD 2.2k $\Omega$
B-4	R116	RD14BB2C681J	RD 680 $\Omega$
	R117	RD14BB2C511J	RD 510 $\Omega$
B-4	R118	RD14BB2C470J	RD 47 $\Omega$
B-4	R119	RD14BB2C511J	RD 510 $\Omega$
B-4	R120	RD14BB2C511J	RD 510 $\Omega$
B-4	R121	RD14BB2C511J	RD 510 $\Omega$
B-4	R122	RD14BB2C182J	RD 1.8k $\Omega$
B-4	R123	RD14BB2C681J	RD 680 $\Omega$
B-4	R124	RD14BB2C182J	RD 1.8k $\Omega$
B-4	R125	RD14BB2C681J	RD 680 $\Omega$
B-4	R126	RD14BB2C511J	RD 510 $\Omega$
A-4	R127	RD14BB2C181J	RD 180 $\Omega$
B-4	R128	RD14BB2C181J	RD 180 $\Omega$
B-3	R129	RD14BB2C181J	RD 180 $\Omega$
A-4	R130	RD14BB2C152J	RD 1.5k $\Omega$
A-4	R131	RD14BB2C332J	RD 3.3k $\Omega$

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
B-4	R132	RD14BB2C511J	RD 510 $\Omega$
	R133	No use	
C-4	R134	RD14BB2C101J	RD 100 $\Omega$
C-4	R135	RD14BB2C271J	RD 270 $\Omega$
C-4	R136	RD14BB2C102J	RD 1k $\Omega$
C-4	R137	RD14BB2C271J	RD 270 $\Omega$
C-4	R138	RD14BB2C511J	RD 510 $\Omega$
D-4	R139	RD14BB2C361J	RD 360 $\Omega$
D-4	R140	RD14BB2C152J	RD 1.5k $\Omega$
	R141	No use	
C-4	R142	RD14BB2C511J	RD 510 $\Omega$
D-4	R143	RD14BB2C361J	RD 360 $\Omega$
D-3	R144	RN14BK2B5101F	RN 5.1k $\Omega$ $\pm$ 1% 1/8W
D-3	R145	RN14BK2B7501F	RN 7.5k $\Omega$ $\pm$ 1% 1/8W
B-4	R146	RD14BB2C511J	RD 510 $\Omega$
D-4	R147	RN14BK2B2401F	RN 2.4k $\Omega$ $\pm$ 1% 1/8W
E-4	R148	RD14BB2C123J	RD 12k $\Omega$
E-4	R149	RN14BK2B1502F	RN 15k $\Omega$ $\pm$ 1% 1/8W
E-4	R150	RN14BK2B1202F	RN 12k $\Omega$ $\pm$ 1% 1/8W
E-4	R151	RN14BK2B4302F	RN 43k $\Omega$ $\pm$ 1% 1/8W
E-4	R152	RN14BK2B1002F	RN 10k $\Omega$ $\pm$ 1% 1/8W
E-4	R153	RD14BB2C103J	RD 10k $\Omega$
E-4	R154	RN14BK2B3901F	RN 3.9k $\Omega$ $\pm$ 1% 1/8W
E-4	R155	RN14BK2B3901F	RN 3.9k $\Omega$ $\pm$ 1% 1/8W
E-4	R156	RD14BB2C103J	RD 10k $\Omega$
E-3	R157	RD14BB2C104J	RD 100k $\Omega$
D-3	R158	RD14BB2C103J	RD 10k $\Omega$
E-3	R159	RD14BB2C103J	RD 10k $\Omega$
E-3	R160	RD14BB2C104J	RD 100k $\Omega$
D-3	R161	RD14BB2C103J	RD 10k $\Omega$
E-3	R162	RD14BB2C103J	RD 10k $\Omega$
D-3	R163	RD14BB2C104J	RD 100k $\Omega$
D-3	R164	RD14BB2C103J	RD 10k $\Omega$
E-3	R165	RD14BB2C103J	RD 10k $\Omega$
D-4	R166	RD14BB2C470J	RD 47 $\Omega$
D-3	R167	RD14BB2C101J	RD 100 $\Omega$
D-3	R168	RD14BB2C101J	RD 100 $\Omega$
D-3	R169	RD14BB2C470J	RD 47 $\Omega$
C-3	R170	RD14BB2C472J	RD 4.7k $\Omega$
C-4	R171	RD14BB2C122J	RD 1.2k $\Omega$
C-4	R172	RD14BB2C182J	RD 1.8k $\Omega$
C-4	R173	RD14BB2C152J	RD 1.5k $\Omega$
C-4	R174	RD14BB2C511J	RD 510 $\Omega$
D-3	R175	RD14BB2C470J	RD 47 $\Omega$
C-3	R176	RD14BB2C242J	RD 2.4k $\Omega$
D-3	R177	RD14BB2C622J	RD 6.2k $\Omega$
D-3	R178	RD14BB2C393J	RD 39k $\Omega$
D-3	R179	RD14BB2C101J	RD 100 $\Omega$
D-3	R180	RD14BB2C101J	RD 100 $\Omega$
D-3	R181	RD14BB2C101J	RD 100 $\Omega$
C-3	R182	RD14BB2C102J	RD 1k $\Omega$
C-3	R183	RD14BB2C101J	RD 100 $\Omega$
B-4	R184	RD14BB2C511J	RD 510 $\Omega$
C-4	R185	RD14BB2C511J	RD 510 $\Omega$
C-4	R186	RD14BB2C511J	RD 510 $\Omega$
C-4	R187	RD14BB2C222J	RD 2.2k $\Omega$
C-4	R188	RD14BB2C362J	RD 3.6k $\Omega$
	R189	RD14BB2C102J	RD 1k $\Omega$
C-3	R190	RD14BB2C162J	RD 1.6k $\Omega$
C-3	R191	RD14BB2C362J	RD 3.6k $\Omega$
A-3	R192	RD14BB2C331J	RD 330 $\Omega$
E-4	R193	RD14BB2C103J	RD 10k $\Omega$
D-4	R194	RD14BB2C220J	RD 22 $\Omega$
D-4	R195	RD14BB2C100J	RD 10 $\Omega$
F-3	R196	RD14BB2C470J	RD 47 $\Omega$
F-3	R197	RD14BB2C470J	RD 47 $\Omega$

# PARTS LIST

X74-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
F-2	R198	RN14BK2B4701F	RN 4.7kΩ = 1% 1/8W
F-2	R199	RD14BB2C472J	RD 4.7kΩ
E-3	R200	RN14BK2B3301F	RN 3.3kΩ = 1% 1/8W
E-3	R201	RN14BK2B1201F	RN 1.2kΩ = 1% 1/8W
E-2	R202	RD14BB2C392J	RD 3.9kΩ
E-3	R203	RD14BB2C102J	RD 1kΩ
E-2	R204	RD14BB2C132J	RD 1.3kΩ
E-2	R205	RD14BB2C470J	RD 47Ω
	R206	RN14BK2B3301F	RN 3.3kΩ = 1% 1/8W
F-2	R207	RN14BK2B6201F	RN 6.2kΩ = 1% 1/8W
E-2	R208	RD14BB2C472J	RD 4.7kΩ
F-2	R209	RD14BB2C472J	RD 4.7kΩ
E-2	R210	RN14BK2B4700F	RN 470Ω = 1% 1/8W
F-2	R211	RN14BK2B4700F	RN 470Ω = 1% 1/8W
E-2	R212	RN14BK2B2201F	RN 2.2kΩ = 1% 1/8W
E-2	R213	RD14BB2C621J	RD 620Ω
F-2	R214	RN14BK2B2201F	RN 2.2kΩ = 1% 1/8W
E-2	R215	RN14BK2B1601F	RN 1.6kΩ = 1% 1/8W
F-2	R216	RN14BK2B1601F	RN 1.6kΩ = 1% 1/8W
F-2	R217	RD14BB2C470J	RD 47Ω
F-2	R218	RD14BB2C470J	RD 47Ω
E-1	R219	RN14BK2B1001F	RN 1kΩ = 1% 1/8W
E-2	R220	RN14BK2B1001F	RN 1kΩ = 1% 1/8W
E-2	R221	RN14BK2B1500F	RN 150Ω = 1% 1/8W
E-1	R222	RN14BK2B1001F	RN 1kΩ = 1% 1/8W
E-2	R223	RN14BK2B1001F	RN 1kΩ = 1% 1/8W
E-3	R224	RN14BK2B4701F	RN 4.7kΩ = 1% 1/8W
E-3	R225	RN14BK2B2001F	RN 2kΩ = 1% 1/8W
F-1	R226	RD14BB2C102J	RD 1kΩ
F-2	R227	RD14BB2C102J	RD 1kΩ
F-1	R228	RD14BB2C472J	RD 47kΩ
F-2	R229	RD14BB2C470J	RD 47kΩ
F-2	R230	RD14BB2C470J	RD 47kΩ
F-2	R231	RD14BB2C470J	RD 47kΩ
E-2	R232	RD14BB2C472J	RD 4.7kΩ
E-2	R233	RD14BB2C103J	RD 10kΩ
E-2	R234	RD14BB2C472J	RD 4.7kΩ
E-2	R235	RD14BB2C103J	RD 10kΩ
F-3	R236	RD14BB2C470J	RD 47Ω
F-3	R237	RN14BK2B4701F	RN 4.7kΩ = 1% 1/8W
F-3	R238	RD14BB2C472J	RD 4.7kΩ
E-3	R239	RN14BK2B1201F	RN 1.2kΩ = 1% 1/8W
E-3	R240	RN14BK2B3301F	RN 3.3kΩ = 1% 1/8W
E-3	R241	RN14BK2B2201F	RN 2.2kΩ = 1% 1/8W
C-3	R242	RN14BK2B6801F	RN 6.8kΩ = 1% 1/8W
C-2	R243	RN14BK2B6801F	RN 6.8kΩ = 1% 1/8W
F-3	R244	RD14BB2C223J	RD 22kΩ
F-3	R245	RD14BB2C102J	RD 1kΩ
F-3	R246	RD14BB2C122J	RD 1.2kΩ
F-3	R247	RD14BB2C751J	RD 750Ω
F-3	R248	RD14BB2C472J	RD 4.7kΩ
B-2	R249	RD14BB2C511J	RD 510Ω
B-2	R250	RD14BB2C511J	RD 510Ω
B-2	R251	RD14BB2C471J	RD 470Ω
A-2	R252	RD14BB2C101J	RD 100Ω
A-2	R253	RD14BB2C331J	RD 330Ω
A-2	R254	RD14BB2C220J	RD 22Ω
A-2	R255	RD14BB2C272J	RD 2.7kΩ
A-2	R256	RD14BB2C470J	RD 47Ω
C-3	R257	RD14BB2C2R7J	RD 2.7Ω
	R258	No use	
B-2	R259	RD14BB2C511J	RD 510Ω
B-2	R260	RD14BB2C511J	RD 510Ω
B-2	R261	RD14BB2C471J	RD 470Ω
A-2	R262	RD14BB2C101J	RD 100Ω
	R263	RD14BB2C331J	RD 330Ω

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
A-2	R264	RD14BB2C220J	RD 22Ω
A-2	R265	RD14BB2C272J	RD 2.7kΩ
A-2	R266	RD14BB2C470J	RD 47Ω
B-2	R267	RD14BB2C911J	RD 910Ω
B-2	R268	RD14BB2C432J	RD 4.3kΩ
B-3	R269	RD14BB2C202J	RD 2kΩ
B-3	R270	RD14BB2C102J	RD 1kΩ
B-3	R271	RD14BB2C102J	RD 1kΩ
B-3	R272	RD14BB2C202J	RD 2kΩ
B-2	R273	RD14BB2C222J	RD 2.2kΩ
B-2	R274	RD14BB2C222J	RD 2.2kΩ
B-2	R275	RD14BB2C511J	RD 510Ω
B-2	R276	RD14BB2C511J	RD 510Ω
	R277	RD14BB2C561J	RD 560Ω
	R278	No use	
B-2	R279	RD14BB2C220J	RD 22Ω
B-2	R280	RD14BB2C511J	RD 510Ω
A-2	R281	RD14BB2C331J	RD 330Ω
A-2	R282	RD14BB2C101J	RD 100Ω
	R283	No use	
	R284	RD14BB2C472J	RD 4.7kΩ
C-2	R285	RD14BB2C222J	RD 2.2kΩ
B-3	R286	RD14BB2C511J	RD 510Ω
B-2	R287	RD14BB2C220J	RD 22Ω
A-2	R288	RD14BB2C101J	RD 100Ω
A-3	R289	RD14BB2C331J	RD 330Ω
C-2	R290	RD14BB2C152J	RD 1.5kΩ
A-4	R291	RD14BB2C222J	RD 2.2kΩ
	R292	RD14BB2C472J	RD 4.7kΩ
B-3	R293	RD14BB2C222J	RD 2.2kΩ
C-3	R294	RD14BB2C511J	RD 510Ω
C-3	R295	RD14BB2C220J	RD 22Ω
C-3	R296	RD14BB2C101J	RD 100Ω
C-3	R297	RD14BB2C331J	RD 330Ω
C-3	R298	RD14BB2C220J	RD 22Ω
C-3	R299	RD14BB2C910J	RD 91Ω
E-2	R300	RD14BB2C102J	RD 1kΩ
	R301	No use	
E-3	R302	RD14BB2C101J	RD 100Ω
	R303	No use	
	R304	No use	
E-2	R305	RD14BB2C331J	RD 330Ω
E-3	R306	RD14BB2C101J	RD 100Ω
E-3	R307	RD14BB2C220J	RD 22Ω
E-3	R308	RD14BB2C220J	RD 22Ω
E-3	R309	RD14BB2C331J	RD 330Ω
	R310	No use	
D-2	R311	RD14BB2C222J	RD 2.2kΩ
	R312	No use	
	R313	No use	
	R314	No use	
B-3	R315	RD14BB2C222J	RD 2.2kΩ
A-4	R316	RD14BB2C202J	RD 2kΩ
A-3	R317	RD14BB2C202J	RD 2kΩ
B-3	R318	RD14BB2C222J	RD 2.2kΩ
B-2	R319	RD14BB2C511J	RD 510Ω
E-1	VR1	R12-3521-05	VR 20kΩ
E-1	VR2	R12-3521-05	VR 20kΩ
E-4	VR3	R12-3521-05	VR 20kΩ
E-4	VR4	R12-3521-05	VR 20kΩ
C-2	VR5	R12-2512-05	VR 5kΩ
C-2	VR6	R12-0539-05	VR 200Ω
C-2	VR7	R12-1517-05	VR 1kΩ
C-4	VR8	R12-1517-05	VR 1kΩ
F-2	VR9	R12-2512-05	VR 5kΩ

# PARTS LIST

X74-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
F-3	VR10	R12-2512-05	VR 5k $\Omega$
F-3	VR11	R12-1518-05	VR 2k $\Omega$
F-3	VR12	R12-1518-05	VR 2k $\Omega$
E-1	VR13	R12-0421-05	VR 100 $\Omega$
E-2	VR14	R12-0539-05	VR 200 $\Omega$
F-3	VR15	R12-2512-05	VR 5k $\Omega$
	C1	No use	
	C2	CE04W1C472M	CE 4700 $\mu$ F 16WV
C-3	C3	CK45SL1H101J	CC 100pF $\pm$ 5%
C-3	C4	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 5%
B-1	C5	CC45SL1H101J	CC 100pF $\pm$ 5%
B-2	C6	CE04W1E100M	CE 10 $\mu$ F 25WV
	C7	No use	
B-2	C8	CE04W1E100M	CE 10 $\mu$ F 25WV
D-2	C9	CE04W1H010M	CE 1 $\mu$ F 50WV
E-2	C10	CE04W1V220M	CE 22 $\mu$ F 35WV
D-1	C11	CE04W1H3R3M	CE 3.3 $\mu$ F 50WV
D-2	C12	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-2	C13	CE04W1H3R3M	CE 3.3 $\mu$ F 50WV
D-2	C14	C91-0567-05	Polyester 10 $\mu$ F $\pm$ 10% 100WV
E-2	C15	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
E-2	C16	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-2	C17	CQ93BP2A104F	CQ 0.1 $\mu$ F $\pm$ 1% 100WV
D-2	C18	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-2	C19	CQ93M1H333K	CQ 0.033 $\mu$ F $\pm$ 10%
E-2	C20	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-2	C21	CQ93BP2A102F	CQ 1000pF $\pm$ 1% 100WV
D-2	C22	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-2	C23	CC45SL1H331J	CC 330pF $\pm$ 5%
D-2	C24	CC45SL1H470J	CC 47pF $\pm$ 5%
D-2	C25	CM93BD2A680J	CM 68pF $\pm$ 5% 100WV
C-2	C26	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-2	C27	CC45CH1H330J	CC 33pF $\pm$ 5%
C-2	C28	CE04W1E100M	CE 10 $\mu$ F 25WV
C-3	C29	CC45SL1H330J	CC 33pF $\pm$ 5%
	C30	No use	
	C31	No use	
B-4	C32	CC45SL1H101J	CC 100pF $\pm$ 5%
B-4	C33	CE04W1E100M	CE 10 $\mu$ F 25WV
B-4	C34	CE04W1E100M	CE 10 $\mu$ F 25WV
	C35	No use	
D-4	C36	CE04W1H3R3M	CE 3.3 $\mu$ F 50WV
D-3	C37	C91-0567-05	Polyester 10 $\mu$ F $\pm$ 10% 100WV
C-3	C38	CE04W1E100M	CE 10 $\mu$ F 25WV
D-3	C39	CQ93BP2A104F	CQ 0.1 $\mu$ F $\pm$ 1% 100WV
D-3	C40	C90-0298-05	SCC 0.1 $\mu$ F 12WV
D-3	C41	CQ93BP2A102F	CQ 1000pF $\pm$ 1% 100WV
D-3	C42	CK45B1H102K	CK 1000pF $\pm$ 10%
D-3	C43	CC45SL1H101J	CC 100pF $\pm$ 5%
D-4	C44	CM93BD2A680J	CM 68pF $\pm$ 5% 100WV
	C45	No use	
F-3	C46	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
	C47	CE04W1A100M	CE 10 $\mu$ F 10WV
F-2	C48	CE04W1C470M	CE 47 $\mu$ F 16WV
E-2	C49	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
E-2	C50	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
B-2	C51	CC45SL1H331J	CC 330pF $\pm$ 5%
B-3	C52	CQ93M1H102J	CQ 1000pF $\pm$ 5%
B-3	C53	CQ93M1H102J	CQ 1000pF $\pm$ 5%
C-2	C54	CE04W1H010M	CE 1 $\mu$ F 50WV
C-2	C55	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-3	C56	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
	C57	CC45SL1H470J	CC 47pF $\pm$ 5%
	C58	No use	
F-4	C59	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
F-4	C60	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
F-4	C61	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
F-4	C62	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-2	C63	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
E-1	C64	CK45B2H472K	CK 4700pF $\pm$ 10% 500WV
D-1	C65	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
F-4	C66	CK45B2H472K	CK 4700pF $\pm$ 10% 500WV
D-4	C67	CE04W1V220M	CE 22 $\mu$ F 35WV
A-2	C68	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
A-2	C69	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
A-4	C70	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-1	C71	CK45B1H103K	CK 0.01 $\mu$ F $\pm$ 10%
E-4	C72	CK45FB2H472K	CK 4700pFF $\pm$ 10% 500WV
D-4	C73	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
B-2	C74	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
	C75	No use	
	C76	No use	
B-1	C77	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-1	C78	C90-0298-05	SCC 0.1 $\mu$ F 12WV
C-1	C79	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-2	C80	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-2	C81	C90-0298-05	SCC 0.1 $\mu$ F 12WV
C-2	C82	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-3	C83	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-3	C84	C90-0298-05	SCC 0.1 $\mu$ F 12WV
C-3	C85	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-3	C86	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-3	C87	C90-0298-05	SCC 0.1 $\mu$ F 12WV
C-3	C88	C90-0298-05	SCC 0.1 $\mu$ F 12WV
B-2	C89	C90-0298-05	SCC 0.1 $\mu$ F 12WV
	C90	No use	
	C91	No use	
B-1	C92	CE04W1A101M	CE 100 $\mu$ F 10WV
B-2	C93	CE04W1A101M	CE 100 $\mu$ F 10WV
B-3	C94	CE04W1A470M	CE 47 $\mu$ F 10WV
B-3	C95	CE04W1A101M	CE 100 $\mu$ F 10WV
	C96	No use	
F-4	C97	CE04W1A221M	CE 220 $\mu$ F 10WV
D-2	C98	CE04W1C470M	CE 47 $\mu$ F 16WV
D-3	C99	CE04W1C470M	CE 47 $\mu$ F 16WV
C-2	C100	CE04W1C470M	CE 47 $\mu$ F 16WV
C-3	C101	CE04W1C331M	CE 330 $\mu$ F 16WV
F-3	C102	CE04W1C101M	CE 100 $\mu$ F 16WV
F-4	C103	CE04W1C101M	CE 100 $\mu$ F 16WV
D-2	C104	CE04W1E220M	CE 22 $\mu$ F 25WV
D-3	C105	CE04W1E330M	CE 33 $\mu$ F 25WV
D-3	C106	CE04W1E220M	CE 22 $\mu$ F 25WV
F-3	C107	CE04W1E101M	CE 100 $\mu$ F 25WV
	C108	No use	
	C109	No use	
E-1	C110	CE04W1J100M	CE 10 $\mu$ F 63WV
E-4	C111	CE04W1J100M	CE 10 $\mu$ F 63WV
F-2	C112	CE04W1C330M	CE 33 $\mu$ F 16WV
F-2	C113	CE04W1E220M	CE 22 $\mu$ F 25WV
A-4	C114	CE04W1C330M	CE 33 $\mu$ F 16WV
A-2	C115	CE04W1C330M	CE 33 $\mu$ F 16WV
D-3	C116	CE04W1H010M	CE 1 $\mu$ F 50WV
	C117	No use	
D-3	C118	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-3	C119	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
D-3	C120	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
E-3	C121	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
E-3	C122	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
E-3	C123	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
C-3	C124	CK45FB1H103K	CK 0.01 $\mu$ F $\pm$ 10%
	C125	No use	



# PARTS LIST

X74-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description			Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
	C126	No use				D-4	Q36		TR	NPN	2SC1973 (T)
A-1	C127	C90-0298-05	SCC	0.1 $\mu$ F	12WV	D-4	Q37		TR	PNP	2SA838 (C)
A-4	C128	C90-0298-05	SCC	0.1 $\mu$ F	12WV	E-4	Q38		TR	NPN	2SD438 (F)
A-2	C129	CE04W1C330M	CE	33 $\mu$ F	16WV	E-4	Q39		TR	NPN	2SC536KNP (F)
	C130	CC45SL1H390J	CC	39pF	= 5%	E-4	Q40		TR	NPN	2SC536KNP (F)
						E-4	Q41		TR	NPN	2SC536KNP (F)
D-1	TC1	C05-0030-15	TC	20pF		D-3	Q42		TR	NPN	2SC536KNP (F)
D-4	TC2	C05-0030-15	TC	20pF		E-3	Q43		TR	NPN	2SC536KNP (F)
C-2	TC3	C05-0062-05	TC	6pF		D-3	Q44		TR	NPN	2SC536KNP (F)
C-3	TC4	C05-0006205	TC	6pF		E-3	Q45		TR	NPN	2SC536KNP (F)
						D-3	Q46		TR	NPN	2SC536KNP (F)
D-2	L1	L40-1001-01	Ferri-inductor	10 $\mu$ H		E-3	Q47		TR	NPN	2SC536KNP (F)
D-4	L2	L40-1001-01	Ferri-inductor	10 $\mu$ H		D-4	Q48		FET	Dual	M74F (C)
						D-3	Q49		TR	NPN	2SC1047 (C)
B-1	IC1		IC	Digital	MC10103L	C-3	Q50		TR	PNP	2SA838 (C)
B-1	IC2		IC	Digital	MC10131L	D-3	Q51		FET	Dual	M74F (C)
D-1	IC3		IC	Linear	TL082CP	D-3	Q52		TR	NPN	2SC1047 (C)
B-4	IC4		IC	Digital	MC10103L	F-2	Q53		TR	NPN	2SC536KNP (F)
B-4	IC5		IC	Digital	MC10131L	F-3	Q54		TR	NPN	2SC536KNP (F)
D-4	IC6		IC	Linear	TL082CP	E-3	Q55		TR	NPN	2SC1047 (C)
C-1	IC7		IC	Digital	MC10104L	E-3	Q56		TR	NPN	2SC1047 (C)
C-2	IC8		IC	Digital	MC10103L	E-3	Q57		TR	NPN	2SC1047 (C)
C-3	IC9		IC	Digital	MC10104L	E-3	Q58		TR	NPN	2SC1047 (C)
C-4	IC10		IC	Digital	MC10104L	E-3	Q59		TR	NPN	2SC1047 (C)
B-2	IC11		IC	Digital	MC10104L	E-2	Q60		TR	NPN	2SC1047 (C)
B-3	IC12		IC	Digital	MC10102L	F-2	Q61		TR	NPN	2SC1047 (C)
B-2	IC13		IC	Digital	MC10131L	E-2	Q62		TR	PNP	2SA838 (C)
A-3	IC14		IC	Digital	SN7405N	F-2	Q63		TR	PNP	2SA838 (C)
B-3	IC15		IC	Digital	MC10104L	F-1	Q64		TR	NPN	2SC1047 (C)
D-2	IC16		IC	Regulator	MC78L15CP	F-2	Q65		TR	NPN	2SC1047 (C)
	Q1	No use				F-1	Q66		TR	NPN	2SC1047 (C)
	Q2	No use				F-2	Q67		TR	NPN	2SC1047 (C)
B-2	Q3		TR	NPN	2SC536KNP (F)	E-2	Q68		TR	NPN	2SC536KNP (F)
B-2	Q4		TR	NPN	2SC536KNP (F)	E-2	Q69		TR	NPN	2SC536KNP (F)
C-1	Q5		TR	PNP	2SA838 (C)	F-1	Q70		TR	NPN	2SC1047 (C)
D-1	Q6		TR	NPN	2SC1215 (T or S)	F-2	Q71		TR	NPN	2SC1047 (C)
D-1	Q7		TR	NPN	2SC1973 (T)	A-2	Q72		TR	PNP	2SA838 (C)
D-1	Q8		TR	PNP	2SA838 (C)	A-2	Q73		TR	NPN	2SC1215 (T or S)
E-1	Q9		TR	NPN	2SD438 (F)	A 2	Q74		TR	PNP	2SA838 (C)
E-1	Q10		TR	NPN	2SC536KNP (F)	A-2	Q75		TR	NPN	2SC1215 (T or S)
E-2	Q11		TR	NPN	2SC536KNP (F)	A-2	Q76		TR	PNP	2SA838 (C)
E-1	Q12		TR	NPN	2SC536KNP (F)	A-3	Q77		TR	PNP	2SA838 (C)
D-2	Q13		TR	NPN	2SC536KNP (F)	C-3	Q78		TR	PNP	2SA838 (C)
E-2	Q14		TR	NPN	2SC536KNP (F)	C-3	Q79		TR	NPN	2SC536KNP (F)
D-2	Q15		TR	NPN	2SC536KNP (F)	C-2	Q80		TR	PNP	2SA838 (C)
E-2	Q16		TR	NPN	2SC536KNP (F)	C-2	Q81		TR	NPN	2SC536KNP (F)
D-2	Q17		TR	NPN	2SC536KNP (F)						
E-2	Q18		TR	NPN	2SC536KNP (F)	A-1	D1		Diode	Varistor	SV-03Y
D-2	Q19		FET	Dual	M74F (C)	B-2	D2		Diode	Silicon	GMA-01
D-2	Q20		TR	NPN	2SC1047 (C)	C-2	D3		Diode	Silicon	GMA-01
D-2	Q21		FET	Dual	M74F (C)		D4		Diode	Silicon	GMA-01
C-2	Q22		TR	PNP	2SA8387 (C)	C-1	D5		Diode	Silicon	GMA-01
D-2	Q23		TR	NPN	2SC1407 (C)	C-1	D6		Diode	Silicon	DS442X
C-2	Q24		TR	NPN	2SC536KNP (F)	C-1	D7		Diode	Silicon	DS442X
C-2	Q25		TR	NPN	2SC536KNP (F)	D-1	D8		Diode	Silicon	GMA-01
C-2	Q26		TR	NPN	2SC536KNP (F)	D-1	D9		Diode	Silicon	GMA-01
B-3	Q27		TR	PNP	2SA838 (C)	D-1	D10		Diode	Silicon	GMA-01
B-2	Q28		TR	PNP	2SA838 (C)		D11		Diode	Silicon	GMA-01
E-2	Q29		TR	PNP	2SA838 (C)	E-1	D12		Diode	Zener	WZ-150
E-3	Q30		TR	PNP	2SA838 (C)	E-1	D13		Diode	Silicon	DS442X
	Q31	No use					D14		Diode	Germanium	IN60
B-4	Q32		TR	NPN	2SC536KNP (F)	D-2	D15		Diode	Silicon	GMA-01
A-4	Q33		TR	NPN	2SC536KNP (F)	C-2	D16		Diode	Silicon	GMA-01
C-4	Q34		TR	PNP	2SA838 (C)		D17		Diode	Zener	YZ-030
D-4	Q35		TR	NPN	2SC1215 (T or S)		D18		Diode	Silicon	GMA-01
						A-4	D19		Diode	Varistor	SV-03Y

# PARTS LIST

X74-1320-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
B-4	D20		Diode	Silicon	GMA-01	D-2	P57	E40-0376-05	Pin connector	3P
	D21		Diode	Silicon	GMA-01			J25-2975-03	Printed circuit board	
	D22		Diode	Silicon	GMA-01					
C-4	D23		Diode	Silicon	GMA-01					
C-4	D24		Diode	Silicon	DS442X					
C-4	D25		Diode	Silicon	GS442X					
D-4	D26		Diode	Silicon	GMA-01					
	D27		Diode	Silicon	GMA-01					
E-4	D28		Diode	Zener	WZ-150					
E-4	D29		Diode	Silicon	DS442X					
D-3	D30		Diode	Silicon	GMA-01					
A-3	D31		Diode	Silicon	GMA-01					
A-3	D32		Diode	Silicon	GMA-01					
E-3	D33		Diode	Silicon	GMA-01					
E-3	D34		Diode	Silicon	GMA-01					
E-3	D35		Diode	Silicon	GMA-01					
E-3	D36		Diode	Silicon	GMA-01					
E-2	D37		Diode	Zener	WZ-120					
E-2	D38		Diode	Zener	WZ-120					
	D39		Diode	Silicon	GMA-01					
B-3	D40		Diode	Silicon	GMA-01					
B-3	D41		Diode	Silicon	GMA-01					
B-3	D42		Diode	Silicon	GMA-01					
B-3	D43		Diode	Silicon	GMA-01					
	D44		Diode	Silicon	GMA-01					
	D45		Diode	Varistor	SV-06Y					
A-3	D46		Diode	Silicon	GMA-01					
	D47		Diode	Silicon	GMA-01					
A-3	D48		Diode	Silicon	GMA-01					
A-3	D49		Diode	Silicon	GMA-01					
A-3	D50		Diode	Silicon	GMA-01					
C-3	D51		Diode	Zener	WZ-100					
C-2	D52		Diode	Silicon	GMA-01					
E-3	D53		Diode	Silicon	GMA-01					
E-3	D54		Diode	Silicon	GMA-01					
D-4	D55		Diode	Silicon	GMA-01					
D-4	D56		Diode	Silicon	GMA-01					
C-4	D57		Diode	Silicon	GMA-01					
A-3	D58		Diode	Silicon	GMA-01					
C-2	D59		Diode	Silicon	GMA-01					
A-3	D60		Diode	Silicon	GMA-01					
A-3	D61		Diode	Silicon	GMA-01					
B-3	D62		Diode	Silicon	GMA-01					
B-1	D63		Diode	Silicon	GMA-01					
E-1	D64		Diode	Silicon	GMA-01					
E-1	D65		Diode	Varistor	SV-06Y					
E-1	D66		Diode	Silicon	GMA-01					
C-3	P13	E40-0276-05	Pin connector		2P					
A-3	P14	E40-0776-05	Pin connector		7P					
A-2	P28	E40-0476-05	Pin connector		4P					
F-1	P35	E40-0476-05	Pin connector		4P					
F-2	P37	E40-0776-05	Pin connector		7P					
C-2	P38	E40-0376-05	Pin connector		3P					
D-2	P39	E40-0776-05	Pin connector		7P					
E-2	P40	E40-0876-05	Pin connector		8P					
E-3	P41	E40-0876-05	Pin connector		8P					
C-3	P42	E40-0476-05	Pin connector		4P					
F-2	P43	E40-0276-05	Pin connector		2P					
A-4	P44	E40-0276-05	Pin connector		2P					
E-4	P45	E40-0676-05	Pin connector		6P					
A-1	P46	E40-0276-05	Pin connector		2P					
E-4	P47	E40-0476-05	Pin connector		4P					
A-3	P48	E40-1811-05	Pin connector		18P					
F-4	P49	E40-0676-05	Pin connector		6P					
B-3	P50	E40-0476-05	Pin connector		4P					

# PARTS LIST

## HORIZONTAL OUTPUT AMPLIFIER UNIT X74-1230-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	
C-1	R1	RD14BB2C272J	RD	2.7k $\Omega$
C-3	R2	RD14BB2C272J	RD	2.7k $\Omega$
C-2	R3	RD14BB2C470J	RD	47 $\Omega$
C-3	R4	RD14BB2C470J	RD	47 $\Omega$
C-2	R5	RD14BB2C152J	RD	1.5k $\Omega$
C-2	R6	RD14BB2H473J	RD	47k $\Omega$ $\pm$ 5% 1/2W
C-2	R7	RD14BB2H473J	RD	47k $\Omega$ $\pm$ 5% 1/2W
D-2	R8	RD14BB2C821J	RD	820 $\Omega$
C-2	R9	RD14BB2C821J	RD	820 $\Omega$
D-2	R10	RD14BB2C102J	RD	1k $\Omega$
D-2	R11	RD14BB2C102J	RD	1k $\Omega$
	R12	No use		
	R13	No use		
C-1	R14	RS14GB3A223J	RS	22k $\Omega$ $\pm$ 5% 1W
C-3	R15	RS14GB3A223J	RS	22k $\Omega$ $\pm$ 5% 1W
D-1	R16	RD14BB2C134J	RD	130k $\Omega$
D-3	R17	RD14BB2C134J	RD	130k $\Omega$
E-2	R18	RD14BY2H123J	RD	12k $\Omega$ $\pm$ 5% 1/2W
E-2	R19	RD14BB2C102J	RD	1k $\Omega$
E-2	R20	RD14BB2C102J	RD	1k $\Omega$
E-1	R21	RD14BB2C220J	RD	22 $\Omega$
E-3	R22	RD14BB2C220J	RD	22 $\Omega$
F-2	R23	RD14BB2C471J	RD	470 $\Omega$
E-2	R24	RD14BB2C471J	RD	470 $\Omega$
B-2	R25	RD14BB2C471J	RD	470 $\Omega$
B-2	R26	RD14BB2C472J	RD	4.7k $\Omega$
B-2	R27	RD14BB2C472J	RD	4.7k $\Omega$
B-2	R28	RD14BB2C271J	RD	270 $\Omega$
B-2	R29	RD14BB2C512J	RD	5.1k $\Omega$
B-1	VR1	R12-0541-05	VR	100 $\Omega$
C-2	C1	CK45B2H472K	CK	4700pF $\pm$ 10% 500WV
D-2	C2	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
	C3	No use		
	C4	No use		
D-2	C5	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
D-2	C6	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
	C7	No use		
	C8	No use		
C-3	C9	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
C-1	C10	CC45CH2H010C	CC	1pF $\pm$ 0.25pF500WV
D-1	C11	CC45CH2H010C	CC	1pF $\pm$ 0.25pF500WV
C-3	C12	CC45CH2H010C	CC	1pF $\pm$ 0.25pF500WV
D-3	C13	CC45CH2H010C	CC	1pF $\pm$ 0.25pF500WV
B-3	C14	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
E-2	C15	CK45B2H472K	CK	4700pF $\pm$ 10% 500WV
E-2	C16	CK45B2H472K	CK	4700pF $\pm$ 10% 500WV
D-2	C17	CK45B2H472K	CK	4700pF $\pm$ 10% 500WV
D-3	C18	C92-0549-05	Tantalum	1 $\mu$ F 35WV
E-2	C19	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
E-2	C20	C91-0549-05	Tantalum	1 $\mu$ F 35WV
F-2	C21	CK45B2H472K	CK	4700pF $\pm$ 10% 500WV
B-2	C22	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
B-2	C23	CE04W1C101M	CE	100 $\mu$ F 16WV
B-3	C24	CE04W1C101M	CE	100 $\mu$ F 16WV
	C25	No use		
B-2	C26	CE04W2A100M	CE	10 $\mu$ F 100WV
D-2	C27	CE04W2C2R2M	CE	2.2 $\mu$ F 160WV
D-2	C28	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%
C-2	C29	CC45CH1H070D	CC	7pF $\pm$ 0.5pF
B-2	L1	L40-1011-04	Ferri-inductor	100 $\mu$ H
B-3	L2	L40-1011-04	Ferri-inductor	100 $\mu$ H
	L3	No use		
B-2	L4	L40-1011-04	Ferri-inductor	100 $\mu$ H

Fig. & Index No.	Ref. No.	Parts No.	Name & Description	
B-3	L5	L40-1011-04	Ferri-inductor	100 $\mu$ H
	D1	No use		
	D2	No use		
	D3	No use		
	D4	No use		
	D5	No use		
	D6	No use		
	D7	No use		
	D8	No use		
E-2	D9		Diode Silicon	DS442X
E-2	D10		Diode Silicon	DS442X
E-2	D11		Diode Silicon	DS442X
	D12	No use		
E-2	D13		Diode Zener	WZ-050
C-2	Q1		TR PNP	2SA838 (C)
C-2	Q2		TR PNP	2SA838 (C)
	Q3	No use		
	Q4	No use		
D-2	Q5		TR PNP	2SA838 (C)
D-2	Q6		TR PNP	2SA838 (C)
D-1	Q7		TR NPN	2SC805A-2 (2, 3)
D-3	Q8		TR NPN	2SC805A-2 (2, 3)
E-1	Q9		TR PNP	2SA923-2 (2, 3)
E-3	Q10		TR PNP	2SA923-2 (2, 3)
B-2	Q11		TR NPN	2SC536KNP (F)
B-2	Q12		TR NPN	2SC536KNP (F)
B-2	Q13		TR NPN	2SC536KNP (F)
		E31-0747-05	Lead wire with connector	
B-2	P27	E40-0876-05	Pin connector	8P
B-1	P35	E40-0476-05	Pin connector	4P
B-1	P36	E40-0676-05	Pin connector	6P
		F01-0827-04	Heat sink	
		J25-2976-04	Printed circuit board	

# PARTS LIST

## HORIZONTAL MODE CONTROL UNIT X77-1130-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
B-1	R1	RD14BB2C393J	RD 39k $\Omega$
B-1	R2	RD14BB2C393J	RD 39k $\Omega$
B-1	R3	RD14BB2C393J	RD 39k $\Omega$
B-1	R4	RD14BB2C393J	RD 39k $\Omega$
B-1	R5	RD14BB2C393J	RD 39k $\Omega$
B-1	R6	RD14BB2C393J	RD 39k $\Omega$
B-2	R7	RD14BB2C824J	RD 820k $\Omega$
B-1	R8	RD14BB2C393J	RD 39k $\Omega$
B-2	R9	RD14BB2C824J	RD 820k $\Omega$
B-1	R10	RD14BB2C393J	RD 39k $\Omega$
B-2	R11	RD14BB2C824J	RD 820k $\Omega$
B-1	R12	RD14BB2C393J	RD 39k $\Omega$
B-1	R13	RD14BB2C473J	RD 47k $\Omega$
B-1	R14	RD14BB2C473J	RD 47k $\Omega$
B-1	R15	RD14BB2C184J	RD 180k $\Omega$
C-1	R16	RD14BB2C391J	RD 390 $\Omega$
C-1	R17	RD14BB2C391J	RD 390 $\Omega$
C-1	R18	RD14BB2C391J	RD 390 $\Omega$
C-1	R19	RD14BB2C391J	RD 390 $\Omega$
C-1	R20	RD14BB2C391J	RD 390 $\Omega$
C-1	R21	RD14BB2C391J	RD 390 $\Omega$
C-2	R22	RD14BB2C393J	RD 39k $\Omega$
C-2	R23	RD14BB2C393J	RD 39k $\Omega$
C-2	R24	RD14BB2C393J	RD 39k $\Omega$
C-2	R25	RD14BB2C393J	RD 39k $\Omega$
B-2	R26	RD14BB2C824J	RD 820k $\Omega$
B-2	R27	RD14BB2C393J	RD 39k $\Omega$
A-2	R28	RD14BB2C824J	RD 820k $\Omega$
B-2	R29	RD14BB2C393J	RD 39k $\Omega$
B-2	R30	RD14BB2C824J	RD 820k $\Omega$
B-2	R31	RD14BB2C393J	RD 39k $\Omega$
B-1	R32	RD14BB2C473J	RD 47k $\Omega$
B-1	R33	RD14BB2C473J	RD 47k $\Omega$
B-1	R34	RD14BB2C184J	RD 180k $\Omega$
C-2	R35	RD14BB2C391J	RD 390 $\Omega$
C-2	R36	RD14BB2C391J	RD 390 $\Omega$
C-2	R37	RD14BB2C391J	RD 390 $\Omega$
C-2	R38	RD14BB2C562J	RD 5.6k $\Omega$
C-2	R39	RD14BB2C562J	RD 5.6k $\Omega$
C-2	R40	RD14BB2C562J	RD 5.6k $\Omega$
C-2	R41	RD14BB2C184J	RD 180k $\Omega$
C-2	R42	RD14BB2C223J	RD 22k $\Omega$
C-1	R43	RD14BB2C473J	RD 47k $\Omega$
E-1	R44	RD14BB2C103J	RD 10k $\Omega$
D-2	R45	RD14BB2C472J	RD 4.7k $\Omega$
D-2	R46	RD14BB2C332J	RD 3.3k $\Omega$
D-2	R47	RD14BB2C272J	RD 2.7k $\Omega$
D-2	R48	RD14BB2C331J	RD 330 $\Omega$
C-2	R49	RD14BB2C561J	RD 560 $\Omega$
D-2	R50	RD14BB2C272J	RD 2.7k $\Omega$
D-2	R51	RD14BB2C222J	RD 2.2k $\Omega$
	R52	No use	
	R53	No use	
	R54	No use	
	R55	No use	
	R56	No use	
	R57	No use	
	R58	No use	
	R59	No use	
	R60	No use	
	R61	No use	
	R62	No use	
	R63	No use	
	R64	No use	
	R65	No use	

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
	R66	No use	
	R67	No use	
	R68	No use	
	R69	No use	
E-1	R70	RN14BK2B3600F	RN 360 $\Omega$ $\pm$ 1% 1/8W
E-1	R71	RN14BK2B30R0F	RN 30 $\Omega$ $\pm$ 1% 1/8W
	R72	No use	
E-1	R73	RD14BB2C223J	RD 22k $\Omega$
E-1	R74	RD14BB2C103J	RD 10k $\Omega$
E-1	R75	RD14BB2C103J	RD 10k $\Omega$
E-1	R76	RN14BK2B1003F	RN 100k $\Omega$ $\pm$ 1% 1/8W
E-1	R77	RN14BK2B9102F	RN 91k $\Omega$ $\pm$ 1% 1/8W
E-1	R78	RD14BB2C472J	RD 4.7k $\Omega$
A-3	R79	RD14BB2E470J	RD 47 $\Omega$ $\pm$ 5% 1/4W
B-3	R80	RN14BK2H9003F	RN 900k $\Omega$ $\pm$ 1% 1/2W
B-3	R81	RN14BK2E1113F	RN 111k $\Omega$ $\pm$ 1% 1/4W
B-3	R82	RD14BB2C560J	RD 56 $\Omega$
B-3	R83	RN14BK2H1004F	RN 1M $\Omega$ $\pm$ 1% 1/2W
	R84	RD14BB2C104J	RD 100k $\Omega$
B-2	R85	RD14BB2C101J	RD 100 $\Omega$
B-2	R86	RN14BK2B2701F	RN 2.7k $\Omega$ $\pm$ 1% 1/8W
B-2	R87	RN14BK2B2701F	RN 2.7k $\Omega$ $\pm$ 1% 1/8W
B-2	R88	RD14BB2C220J	RD 22 $\Omega$
B-2	R89	RD14BB2C220J	RD 22 $\Omega$
B-2	R90	RD14BB2C220J	RD 22 $\Omega$
B-2	R91	RN14BK2B8200F	RN 820 $\Omega$ $\pm$ 1% 1/8W
B-2	R92	RN14BK2B8200F	RN 820 $\Omega$ $\pm$ 1% 1/8W
B-2	R93	RD14BB2C220J	RD 22 $\Omega$
A-2	R94	RN14BK2B39R0F	RN 39 $\Omega$ $\pm$ 1% 1/8W
A-2	R95	RN14BK2B39R0F	RN 39 $\Omega$ $\pm$ 1% 1/8W
A-2	R96	RD14BB2C122J	RD 1.2k $\Omega$
C-3	R97	RD14BB2E470J	RD 47 $\Omega$ $\pm$ 5% 1/4W
B-3	R98	RN14BK2H9003F	RN 900k $\Omega$ $\pm$ 1% 1/2W
B-3	R99	RN14BK2E1113F	RN 111k $\Omega$ $\pm$ 1% 1/4W
	R100	No use	
C-3	R101	RN14BK2H1004F	RN 1M $\Omega$ $\pm$ 1% 1/2W
C-2	R102	RD14BB2C104J	RD 100k $\Omega$
B-2	R103	RD14BB2C101J	RD 100 $\Omega$
B-2	R104	RN14BK2B2701F	RN 2.7k $\Omega$ $\pm$ 1% 1/8W
B-2	R105	RN14BK2B2701F	RN 2.7k $\Omega$ $\pm$ 1% 1/8W
B-2	R106	RD14BB2C220J	RD 22 $\Omega$
B-2	R107	RD14BB2C220J	RD 22 $\Omega$
B-2	R108	RD14BB2C220J	RD 22 $\Omega$
B-2	R109	RN14BK2B8200F	RN 820 $\Omega$ $\pm$ 1% 1/8W
B-2	R110	RN14BK2B8200F	RN 820 $\Omega$ $\pm$ 1% 1/8W
B-2	R111	RD14BB2C220J	RD 22 $\Omega$
C-2	R112	RN14BK2B39R0F	RN 39 $\Omega$ $\pm$ 1% 1/8W
C-2	R113	RN14BK2B39R0F	RN 39 $\Omega$ $\pm$ 1% 1/8W
C-2	R114	RD14BB2C122J	RD 1.2k $\Omega$
	R115	No use	
	R116	No use	
C-1	R117	RD14BB2C472J	RD 4.7k $\Omega$
D-1	R118	RD14BB2C472J	RD 4.7k $\Omega$
C-1	R119	RD14BB2C472J	RD 4.7k $\Omega$
C-1	R120	RD14BB2C563J	RD 56k $\Omega$
E-1	VR1	R12-0542-05	VR 200 $\Omega$
E-1	VR2	R12-5517-05	VR 100k $\Omega$
	VR3	No use	
	VR4	No use	
B-3	VR5	R12-0541-05	VR 100 $\Omega$
B-1	C1	CC45SL1H101J	CC 100pF $\pm$ 5%
A-1	C2	CC45SL1H101J	CC 100pF $\pm$ 5%
A-1	C3	CC45SL1H101J	CC 100pF $\pm$ 5%
A-1	C4	CC45SL1H101J	CC 100pF $\pm$ 5%

# PARTS LIST

X77-1130-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description			Fig. & Index No.	Ref. No.	Parts No.	Name & Description
B-1	C5	CC45SL1H101J	CC	100pF	± 5%	D-1	IC5		IC Digital MC14503BCP
B-1	C6	CC45SL1H101J	CC	100pF	± 5%	D-2	IC6		IC Digital SN7442AN
B-1	C7	CK45FB1H103K	CK	0.01μF	± 10%	C-2	IC7		IC Digital MC14013BCP
C-2	C8	CC45SL1H101J	CC	100pF	± 5%	D-2	IC8		IC Digital MC14011BCP
C-2	C9	CC45SL1H101J	CC	100pF	± 5%	E-2	IC9		IC Digital SN74LS04N
C-2	C10	CC45SL1H101J	CC	100pF	± 5%		IC10	No use	
C-2	C11	CC45SL1H101J	CC	100pF	± 5%		IC11	No use	
B-1	C12	CK45FB1H103K	CK	0.01μF	± 10%		IC12	No use	
E-2	C13	CK45FB1H103K	CK	0.01μF	± 10%		IC13	No use	
D-1	C14	CK45FB1H103K	CK	0.01μF	± 10%		IC14	No use	
D-1	C15	CE04W1C471M	CE	470μF			IC15	No use	
	C16	No use					IC16	No use	
	C17	No use				E-2	IC17		IC Regulator MC78L05C
	C18	No use				B-1	D1		Diode Silicon DS442X
	C19	No use				B-1	D2		Diode Silicon DS442X
	C20	No use				B-1	D3		Diode Silicon DS442X
	C21	No use				B-1	D4		Diode Silicon DS442X
E-1	C22	CC45SL1H471J	CC	470pF	± 5%	B-1	D5		Diode Silicon DS442X
	C23	No use				B-1	D6		Diode Silicon DS442X
	C24	No use				A-1	D7		Diode Silicon DS442X
	C25	No use				A-1	D8		Diode Silicon DS442X
E-1	C26	CE04W1C471M	CE	470μF		B-1	D9		Diode Silicon DS442X
E-1	C27	CQ93BP2A472F	CQ	4700pF	± 1%	B-1	D10		Diode Silicon DS442X
E-1	C28	CQ93BP2A472F	CQ	4700pF	± 1%	B-1	D11		Diode Silicon DS442X
	C29	CC45CH1H390J	CC	39pF	± 5%	B-1	D12		Diode Silicon DS442X
B-2	C30	C91-0501-05	MF	0.047μF		C-2	D13		Diode Silicon DS442X
B-3	C31	CK45FB1H103K	CK	0.01μF	± 10%	C-2	D14		Diode Silicon DS442X
B-2	C32	CK45FB1H103K	CK	0.01μF	± 10%	C-2	D15		Diode Silicon DS442X
A-2	C33	CK45FB1H103K	CK	0.01μF	± 10%	B-1	D16		Diode Silicon DS442X
	C34	CK45FB1H103K	CK	0.01μF	± 10%	B-1	D17		Diode Silicon DS442X
B-3	C35	CC45CH1H390J	CC	39pF	± 5%	D-1	D18		Diode Silicon DS442X
B-1	C36	C91-0501-05	MF	0.047μF		D-1	D19		Diode Silicon DS442X
C-2	C37	CK45FB1H103K	CK	0.01μF	± 10%	D-1	D20		Diode Silicon DS442X
E-2	C38	CE04W1C471M	CE	470μF		D-2	D21		Diode Silicon DS442X
E-1	C39	CK45FB1H103K	CK	0.01μF	± 10%	D-2	D22		Diode Silicon DS442X
E-2	C40	CK45FB1H103K	CK	0.01μF	± 10%	D-2	D22		Diode Silicon DS442X
E-2	C41	CE04W1C471M	CE	470μF		D-2	D23		Diode Silicon DS442X
E-2	C42	CK45FB1H103K	CK	0.01μF	± 10%		D24	No use	
F-2	C43	CE04W1C471M	CE	470μF			D25	No use	
E-2	C44	CK45FB1H103K	CK	0.01μF	± 10%		D26	No use	
F-2	C45	CE04W1C471M	CE	470μF			D27	No use	
	C46	No use					D28	No use	
	C47	CC45CH1H100D	CC	10pF	± 0.5pF		D29	No use	
	C48	CC45CH1H100D	CC	10pF	± 0.5pF		D30	No use	
B-3	TC1	C05-0411-05	TC	10pF		D-1	D31		Diode Silicon DS442X
B-3	TC2	C05-0411-05	TC	10pF			D32	No use	
B-3	TC3	C05-0410-05	TC	6pF			D33	No use	
C-3	TC4	C05-0411-05	TC	10pF			D34	No use	
B-3	TC5	C05-0411-05	TC	10pF			D35	No use	
B-3	TC6	C05-0410-05	TC	6pF			D36	No use	
B-3	TC7	C05-0412-05	TC	20pF			D37	No use	
E-1	L1	L40-4701-03	Ferri inductor	47μH		E-1	D38		Diode Gerumanium IN60
F-1	L2	L40-1011-04	Ferri inductor	100μH		E-1	D39		Diode Silicon DS442X
E-1	L3	L40-4701-03	Ferri inductor	47μH		E-1	D40		Diode Silicon DS442X
F-1	L4	L40-1011-03	Ferri inductor	100μH		B-2	D41		Diode Silicon 1S1544A
F-1	L5	L40-1011-03	Ferri inductor	100μH		B-2	D42		Diode Silicon DS442X
B-3	RL1	S51-2502-05	Relay			B-2	D43		Diode Silicon DS442X
C-3	RL2	S51-2502-05	Relay			B-2	D44		Diode Silicon DS442X
B-2	IC1		IC	Digital	MC14584BCP	B-2	D45		Diode Silicon DS442X
C-1	IC2		IC	Digital	MC14069UBCP	A-3	D46		Diode Silicon DS442X
C-2	IC3		IC	Digital	MC14001BCP	B-2	D47		Diode Silicon 1S1544A
C-1	IC4		IC	Digital	MC14174BCP	C-2	D48		Diode Silicon DS442X
						C-2	D49		Diode Silicon DS442X
						C-2	D50		Diode Silicon DS442X
						C-2	D51		Diode Silicon DS442X

# PARTS LIST

X77-1130-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
C-3	D52		Diode	Silicon	DS442X
B-2	D53		Diode	Silicon	DS442X
B-2	D54		Diode	Silicon	DS442X
C-2	Q1		TR	NPN	2SC536KNP (F)
C-2	Q2		TR	NPN	2SC536KNP (F)
C-2	Q3		TR	NPN	2SC536KNP (F)
D-1	Q4		TR	NPN	2SC536KNP (F)
D-2	Q5		TR	PNP	2SA608KNP (F)
D-2	Q6		TR	PNP	2SA608KNP (F)
D-2	Q7		TR	NPN	2SC536KNP (F)
	Q8	No use			
	Q9	No use			
E-1	Q10		TR	PNP	2SA608KNP (F)
E-1	Q11		TR	PNP	2SA608KNP (F)
E-1	Q12		TR	PNP	2SA608KNP (F)
B-2	Q13		FET	Dual	DN1901
B-2	Q14		TR	NPN	2SC1215 (T or S)
B-2	Q15		TR	NPN	2SC1215 (T or S)
A-2	Q16		TR	NPN	2SD438 (F)
B-2	Q17		FED	Dual	DN1901
B-2	Q18		TR	NPN	2SC1215 (T or S)
B-2	Q19		TR	NPN	2SC1215 (T or S)
C-2	Q20		TR	NPN	2SD438 (F)
D-1	P6	E40-0576-05	Pin connector		5P
A-2	P11	E40-0477-05	Pin connector		4P
C-2	P12	E40-0476-05	Pin connector		4P
F-1	P36	E40-0676-05	Pin connector		6P
D-3	P48	E40-1811-05	Pin connector		18P
F-1	P49	E40-0676-05	Pin connector		6P
E-1	P52	E40-0276-05	Pin connector		2P
E-1	P53	E40-0276-05	Pin connector		2P
C-3	P54	E40-1211-05	Pin connector		12P
B-1	P55	E40-1511-05	Pin connector		15P
A-3	P56	E40-0277-05	Pin connector		2P
C-1	TP1	E23-0508-04	Test terminal		
E-1	TP2	E40-0211-05	Pin connector		2P
		E23-0503-05	Terminal		
		J25-2980-03	Printed circuit board		

## A TRIGGER SWITCH UNIT X77-1110-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
B-1	R1	RD14BB2C510J	RD		51 $\Omega$
B-1	R2	RD14BB2C101J	RD		100 $\Omega$
B-2	R3	RD14BB2C101J	RD		100 $\Omega$
A-2	R4	RD14BB2C510J	RD		51 $\Omega$
	R5	No use			
C-1	R6	RD14BB2C103J	RD		10k $\Omega$
C-3	R7	RD14BB2C473J	RD		47k $\Omega$
B-3	R8	RD14BB2C473J	RD		47k $\Omega$
C-4	R9	RN14BK2B4702F	RN		47k $\Omega$ $\pm$ 1% 1/8W
C-4	R10	RN14BK2B1003F	RN		100k $\Omega$ $\pm$ 1% 1/8W
C-4	R11	RN14BK2B1003F	RN		100k $\Omega$ $\pm$ 1% 1/8W
C-4	R12	RN14BK2B4702F	RN		47k $\Omega$ $\pm$ 1% 1/8W
B-4	R13	RD14BB2C103J	RD		10k $\Omega$
B-4	R14	RD14BB2C103J	RD		10k $\Omega$
C-3	R15	RD14BB2C471J	RD		470 $\Omega$
	R16	No use			
C-2	R17	RD14BB2C123J	RD		12k $\Omega$
C-2	R18	RD14BB2C103J	RD		10k $\Omega$
C-2	R19	RD14BB2C103J	RD		10k $\Omega$
D-1	R20	RD14BB2C473J	RD		47k $\Omega$
D-1	R21	RD14BB2C223J	RD		22k $\Omega$
C-3	R22	RD14BB2C220J	RD		22 $\Omega$
C-3	R23	RD14BB2C101J	RD		100 $\Omega$
C-3	R24	RD14BB2E105J	RD		1M $\Omega$ $\pm$ 5% 1/4W
D-3	R25	RD14BB2E105J	RD		1M $\Omega$ $\pm$ 5% 1/4W
D-3	R26	RN14BK2B3001F	RN		3k $\Omega$ $\pm$ 1% 1/8W
D-3	R27	RN14BK2B3001F	RN		3k $\Omega$ $\pm$ 1% 1/8W
D-3	R28	RD14BB2C220J	RD		22 $\Omega$
D-3	R29	RD14BB2C220J	RD		22 $\Omega$
D-3	R30	RD14BB2C562J	RD		5.6k $\Omega$
D-3	R31	RD14BB2C562J	RD		5.6k $\Omega$
D-3	R32	RN14BK2B2200F	RN		220 $\Omega$ $\pm$ 1% 1/8W
D-3	R33	RN14BK2B2200F	RN		220 $\Omega$ $\pm$ 1% 1/8W
C-1	R34	RN14BK2B1501F	RN		1.5k $\Omega$ $\pm$ 1% 1/8W
E-2	R35	RN14BK2B1001F	RN		1k $\Omega$ $\pm$ 1% 1/8W
C-1	R36	RN14BK2B7500F	RN		750 $\Omega$ $\pm$ 1% 1/8W
C-1	R37	RN14BK2B2700F	RN		270 $\Omega$ $\pm$ 1% 1/8W
E-2	R38	RN14BK2B2700F	RN		270 $\Omega$ $\pm$ 1% 1/8W
C-1	R39	RD14BB2C220J	RD		22 $\Omega$
C-1	R40	RD14BB2C220J	RD		22 $\Omega$
E-2	R41	RD14BB2C100J	RD		10 $\Omega$
E-1	R42	RD14BB2C680J	RD		68 $\Omega$
E-2	R43	RD14BB2C680J	RD		68 $\Omega$
E-2	R44	No use			
E-2	R45	No use			
D-1	R46	RD14BB2C220J	RD		22 $\Omega$
D-2	R47	RD14BB2C220J	RD		22 $\Omega$
D-2	R48	RD14BB2C473J	RD		47k $\Omega$
D-2	R49	RD14BB2C473J	RD		47k $\Omega$
D-2	R50	RD14BB2C220J	RD		22 $\Omega$
D-2	R51	RD14BB2C220J	RD		22 $\Omega$
D-2	R52	RD14BB2C271J	RD		270 $\Omega$
D-2	R53	RD14BB2C271J	RD		270 $\Omega$
D-2	R54	RD14BB2C102J	RD		1k $\Omega$
C-2	R55	RD14BB2C220J	RD		22 $\Omega$
C-2	R56	RD14BB2C470J	RD		47 $\Omega$
	R57	No use			
	R58	RD14BB2C103J	RD		10k $\Omega$
	R59	RD14BB2C243J	RD		24k $\Omega$
	R60	RD14BB2C363J	RD		36k $\Omega$
B-3	VR1	RO1-2510-05	VR	(attached S3a, b, 4)	5k $\Omega$
B-3	VR2	R12-3516-05	VR		10k $\Omega$
B-4	VR3	R12-0532-05	VR		100 $\Omega$
E-3	VR4	R12-1519-05	VR		1k $\Omega$

# PARTS LIST

X77-1110-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
B-1	C1	C91-0502-05	MF	0.01 $\mu$ F	630WV
B-3	C2	CC45CH1H680J	CC	68pF $\pm$ 5%	
B-3	C3	CC45CH1H680J	CC	68pF $\pm$ 5%	
C-4	C4	CE04BW1E100M	CE	10 $\mu$ F	25WV
C-4	C5	CE04BW1E100M	CE	10 $\mu$ F	25WV
C-3	C6	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
C-2	C7	CE04W1H3R3M	CE	3.3 $\mu$ F	50WV
C-2	C8	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
D-3	C9	CC45CH1H220J	CC	22pF $\pm$ 5%	
D-3	C10	CC45CH1H220J	CC	22pF $\pm$ 5%	
	C11	No use			
	C12	No use			
D-2	C13	CC45CH1H220J	CC	22pF $\pm$ 5%	
D-4	C14	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
B-3	C15	C91-0549-05	Tantalum	1 $\mu$ F	35WV
D-4	C16	CE04W1C330M	CE	33 $\mu$ F	16WV
D-4	C17	CE04W1C330M	CE	33 $\mu$ F	16WV
D-4	C18	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
D-3	C19	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
D-1	C20	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
E-1	C21	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
D-3	C22	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
B-4	C23	C91-0549-05	Tantalum	1 $\mu$ F	35WV
E-4	C24	CE04W1C330M	CE	33 $\mu$ F	16WV
E-3	C25	CE04W1C330M	CE	33 $\mu$ F	16WV
C-2	C26	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
D-2	C27	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
E-2	C28	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
	C29	No use			
D-2	C30	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
E-2	TC1	C05-0412-05	TC	20pF	
D-3	L1	L40-2201-03	Ferri-inductor	22 $\mu$ H	
E-3	L2	L40-2201-03	Ferri-inductor	22 $\mu$ H	
	D1		Diode Silicon	DS442X	
E-1	D2		Diode Silicon	DS442X	
E-2	D3		Diode Silicon	DS442X	
E-1	D4		Diode Silicon	DS442X	
E-2	D5		Diode Silicon	DS442X	
	Q1		FET P-channel	2SJ43 (Q)	
C-4	Q2		FET N-channel	2SK127 (Q)	
C-2	Q3		TR NPN	2SC536KNP (F)	
C-2	Q4		TR NPN	2SC536KNP (F)	
C-3	Q5		FET Dual	DN1901	
D-3	Q6		TR NPN	2SC1215 (T or S)	
D-3	Q7		TR NPN	2SC1215 (T or S)	
D-2	Q8		TR PNP	2SA1161	
E-2	Q9		TR PNP	2SA1161	
C-2	Q10		TR NPN	2SC2499	
D-2	IC1		IC Linear	CA3102E	
B-1	P15	E40-1077-05	Pin connector	10P	
C-1	P46	E40-0276-05	Pin connector	2P	
E-2	P47	E40-0476-05	Pin connector	4P	
		J25-2978-04	Printed circuit board		

B TRIGGER SWITCH UNIT X77-1120-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
C-3	R1	RD14BB2C101J	RD	100 $\Omega$	
C-3	R2	RD14BB2C101J	RD	100 $\Omega$	
E-3	R3	RD14BB2C103J	RD	10k $\Omega$	
B-2	R4	RD14BB2C473J	RD	47k $\Omega$	
B-3	R5	RD14BB2C473J	RD	47k $\Omega$	
B-2	R6	RD14BB2C103J	RD	10k $\Omega$	
B-2	R7	RD14BB2C103J	RD	10k $\Omega$	
C-2	R8	RD14BB2C471J	RD	470 $\Omega$	
C-3	R9	RD14BB2C220J	RD	22 $\Omega$	
C-2	R10	RD14BB2C101J	RD	100 $\Omega$	
C-3	R11	RD14BB2E105J	RD	1M $\Omega$ $\pm$ 5%	1/4W
C-2	R12	RD14BB2E105J	RD	1M $\Omega$ $\pm$ 5%	1/4W
C-3	R13	RN14BK2B3001F	RN	3k $\Omega$ $\pm$ 1%	1/8W
C-3	R14	RN14BK2B3001F	RN	3k $\Omega$ $\pm$ 1%	1/8W
C-2	R15	RD14BB2C220J	RD	22 $\Omega$	
C-2	R16	RD14BB2C220J	RD	22 $\Omega$	
C-2	R17	RD14BB2C562J	RD	5.6k $\Omega$	
C-2	R18	RD14BB2C562J	RD	5.6k $\Omega$	
C-2	R19	RN14BK2B2200F	RN	220 $\Omega$ $\pm$ 1%	1/8W
C-2	R20	RN14BK2B2200F	RN	220 $\Omega$ $\pm$ 1%	1/8W
D-2	R21	RN14BK2B1501F	RN	1.5k $\Omega$ $\pm$ 1%	1/8W
D-2	R22	RN14BK2B1501F	RN	1.5k $\Omega$ $\pm$ 1%	1/8W
D-2	R23	RN14BK2B7500F	RN	750 $\Omega$ $\pm$ 1%	1/8W
D-2	R24	RN14BK2B2700F	RN	270 $\Omega$ $\pm$ 1%	1/8W
D-2	R25	RN14BK2B2700F	RN	270 $\Omega$ $\pm$ 1%	1/8W
D-2	R26	RD14BB2C220J	RD	22 $\Omega$	
D-2	R27	RD14BB2C220J	RD	22 $\Omega$	
E-2	R28	RD14BB2C100J	RD	10 $\Omega$	
E-2	R29	RD14BB2C680J	RD	68 $\Omega$	
E-2	R30	RD14BB2C680J	RD	68 $\Omega$	
	R31	No use			
	R32	No use			
D-2	R33	RD14BB2C220J	RD	22 $\Omega$	
D-2	R34	RD14BB2C220J	RD	22 $\Omega$	
D-2	R35	RD14BB2C473J	RD	47k $\Omega$	
D-2	R36	RD14BB2C473J	RD	47k $\Omega$	
D-2	R37	RD14BB2C220J	RD	22 $\Omega$	
D-2	R38	RD14BB2C220J	RD	22 $\Omega$	
D-2	R39	RD14BB2C271J	RD	270 $\Omega$	
D-2	R40	RD14BB2C271J	RD	270 $\Omega$	
D-3	R41	RD14BB2C220J	RD	22 $\Omega$	
D-3	R42	RD14BB2C470J	RD	47 $\Omega$	
C-3	R43	RD14BB2C510J	RD	51 $\Omega$	
C-3	R44	RD14BB2C222J	RD	2.2k $\Omega$	
D-3	R45	RD14BB2C470J	RD	47 $\Omega$	
C-3	R46	RD14BB2C821J	RD	820 $\Omega$	
C-2	VR1	R01-2511-05	VR	5k $\Omega$	
B-2	VR2	R12-3516-05	VR	10k $\Omega$	
E-2	VR3	R12-0532-05	VR	100 $\Omega$	
B-3	C1	C91-0502-05	MF	0.01 $\mu$ F	630WV
B-3	C2	CC45CH1H680J	CC	68pF $\pm$ 5%	
B-3	C3	CC45CH1H680J	CC	68pF $\pm$ 5%	
C-2	C4	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
C-2	C5	CC45CH1H220J	CC	22pF $\pm$ 5%	
C-2	C6	CC45CH1H220J	CC	22pF $\pm$ 5%	
	C7	No use			
	C8	No use			
D-3	C9	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
C-3	C10	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	
B-2	C11	C91-0549-05	Tantalum	1 $\mu$ F	35WV
E-3	C12	CE04W1C330M	CE	33 $\mu$ F	16WV
E-3	C13	CE04W1C330M	CE	33 $\mu$ F	16WV
E-3	C14	CK45B1H103K	CK	0.01 $\mu$ F $\pm$ 10%	

# PARTS LIST

X77-1120-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
D-2	C15	CK45B1H103K	CK 0.01 $\mu$ F = 10%
C-3	C16	CK45B1H103K	CK 0.01 $\mu$ F = 10%
D-3	C17	CK45B1H103K	CK 0.01 $\mu$ F = 10%
B-2	C18	C91-0549-05	Tantalum 1 $\mu$ F 35WV
D-3	C19	CE04W1C330M	CE 33 $\mu$ F 16WV
E-3	C20	CE04W1C330M	CE 33 $\mu$ F 16WV
F-3	C21	CK45B1H103K	CK 0.01 $\mu$ F = 10%
D-2	C22	CK45B1H103K	CK 0.01 $\mu$ F = 10%
C-2	C23	CK45B1H103K	CK 0.01 $\mu$ F = 10%
C-3	C24	CE04W1C100M	CE 10 $\mu$ F 16WV
E-2	TC1	C05-0412-05	TC 20pF
E-3	L1	L40-2201-03	Ferri-inductor 22 $\mu$ H
E-3	L2	L40-2201-03	Ferri-inductor 22 $\mu$ H
C-3	D1		Diode Zener WZ-0B1
C-3	Q1		TR NPN 2SC1215 (T or S)
C-2	Q2		FET Dual DN1901
C-2	Q3		TR NPN 2SC1215 (T or S)
C-2	Q4		TR NPN 2SC1215 (T or S)
D-2	Q5		TR PNP 2SA1161
D-2	Q6		TR PNP 2SA1161
D-3	Q7		TR NPN 2SC2499
E-2	IC1		IC Linear CA3102E
D-3	P43	E40-0276-06	Pin connector 2P
D-3	P44	E40-0276-05	Pin connector 2P
F-3	P45	E40-0676-05	Pin connector 6P
C-4	P51	E40-0576-05	Pin connector 5P
		J25-2979-014	Printed circuit board

POWER BLANKING UNIT X68-1310-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
C-6	R1	RN14BK2B5102F	RN 51k $\Omega$ $\pm$ 1% 1/8W
C-6	R2	RN14BK2B5101F	RN 5.1k $\Omega$ $\pm$ 1% 1/8W
B-5	R3	RD14BB2C102J	RD 1k $\Omega$
B-5	R4	RD14BB2C562J	RD 5.6k $\Omega$
B-5	R5	RD14BB2C101J	RD 100 $\Omega$
B-5	R6	RD14BB2C102J	RD 1k $\Omega$
C-5	R7	RN14BK2B1303F	RN 130k $\Omega$ $\pm$ 1% 1/8W
C-5	R8	RN14BK2B5601F	RN 5.6k $\Omega$ $\pm$ 1% 1/8W
C-4	R9	RD14BB2C561J	RD 560 $\Omega$
C-4	R10	RD14BB2C392J	RD 3.9k $\Omega$
C-4	R11	RN14BK2B5101F	RN 5.1k $\Omega$ $\pm$ 1% 1/8W
C-4	R12	RN14BK2B5101F	RN 5.1k $\Omega$ $\pm$ 1% 1/8W
C-4	R13	RD14BB2C561J	RD 560 $\Omega$
C-4	R14	RD14BB2C392J	RD 3.9k $\Omega$
C-4	R15	RN14BK2B1301F	RN 1.3k $\Omega$ $\pm$ 1% 1/8W
C-4	R16	RN14BK2B3901F	RN 3.9k $\Omega$ $\pm$ 1% 1/8W
C-5	R17	RD14BB2C561J	RD 560 $\Omega$
C-5	R18	RD14BB2C222J	RD 2.2k $\Omega$
B-6	R19	RD14BB2E100J	RD 10 $\Omega$ $\pm$ 5% 1/4W
B-6	R20	RN14BK2B1302F	RN 13k $\Omega$ $\pm$ 1% 1/8W
B-6	R21	RN14BK2B8201F	RN 8.2k $\Omega$ $\pm$ 1% 1/8W
D-5	R22	RD14BB2C472J	RD 4.7k $\Omega$
D-5	R23	RD14BB2C223J	RD 22k $\Omega$
D-5	R24	RD14BB2C223J	RD 22k $\Omega$
D-5	R25	RD14BB2C103J	RD 10k $\Omega$
D-6	R26	RD14BB2C682J	RD 6.8k $\Omega$
D-5	R27	RD14BB2C332J	RD 3.3k $\Omega$
D-6	R28	RD14BB2C332J	RD 3.3k $\Omega$
E-6	R29	RD14BB2C510J	RD 51 $\Omega$
E-6	R30	RD14BB2C510J	RD 51 $\Omega$
E-6	R31	RD14BB2C471J	RD 470 $\Omega$
E-6	R32	RD14BB2C222J	RD 2.2k $\Omega$
E-5	R33	RD14BB2C222J	RD 2.2k $\Omega$
E-5	R34	RD14BB2C471J	RD 470 $\Omega$
F-6	R35	RD14BB2C332J	RD 3.3k $\Omega$
F-6	R36	RD14BB2C102J	RD 1k $\Omega$
F-6	R37	RD14BB2C102J	RD 1k $\Omega$
E-5	R38	RD14BB2C332J	RD 3.3k $\Omega$
E-5	R39	RD14BB2C122J	RD 1.2k $\Omega$
E-5	R40	RD14BB2E101J	RD 100 $\Omega$ $\pm$ 5% 1/4W
E-4	R41	RD14BB2C221J	RD 220 $\Omega$
E-4	R42	RD14BB2C222J	RD 2.2k $\Omega$
D-4	R43	RD14BB2C432J	RD 4.3k $\Omega$
D-4	R44	RD14BB2C471J	RD 470 $\Omega$
E-4	R45	RD14BB2C753J	RD 75k $\Omega$
D-4	R46	RD14BB2C124J	RD 120k $\Omega$
D-4	R47	RD14BB2C562J	RD 5.6k $\Omega$
D-4	R48	RD14BB2C561J	RD 560 $\Omega$
E-3	R49	RD14BB2C470J	RD 47 $\Omega$
E-4	R50	RD14BB2C104J	RD 100k $\Omega$
E-5	R51	RD14BB2C221J	RD 220 $\Omega$
E-5	R52	RD14BB2C562J	RD 5.6k $\Omega$
E-4	R53	RD14BB2C124J	RD 120k $\Omega$
E-4	R54	RD14BB2C124J	RD 120k $\Omega$
E-3	R55	RD14BB2C470J	RD 47 $\Omega$
E-4	R56	RD14BB2C332J	RD 3.3k $\Omega$
E-3	R57	RD14BB2C561J	RD 560 $\Omega$
C-3	R58	RD14BB2C683J	RD 68k $\Omega$
C-3	R59	RD14BB2C683J	RD 68k $\Omega$
C-3	R60	RD14BB2C102J	RD 1k $\Omega$
C-3	R61	RD14BB2C102J	RD 1k $\Omega$
C-3	R62	RD14BB2C103J	RD 10k $\Omega$
C-4	R63	RD14BB2C102J	RD 1k $\Omega$
C-2	R64	RD14BB2C683J	RD 68k $\Omega$
B-2	R65	RD14BB2C103J	RD 10k $\Omega$



# PARTS LIST

X68-1310-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
B-2	R66	RD14BB2C103J	RD	10k $\Omega$	
C-2	R67	RD14BB2C102J	RD	1k $\Omega$	
B-2	R68	RD14BB2C472J	RD	4.7k $\Omega$	
B-1	R69	RD14BB2C330J	RD	33 $\Omega$	
D-3	R70	R92-0793-05	MG	15M $\Omega$	$\pm 5\%$ 1/2W
F-2	R71	RC05GF2H335J	RC	3.3M $\Omega$	$\pm 5\%$ 1/2W
F-2	R72	RC05GF2H156J	RC	15M $\Omega$	$\pm 5\%$ 1/2W
E-2	R73	R92-0755-05	MG	3M $\Omega$	$\pm 5\%$ 1/2W
E-2	R74	R92-0756-05	MG	47M $\Omega$	$\pm 5\%$ 1/2W
A-4	R75	RD14BB2C562J	RD	5.6k $\Omega$	
A-3	R76	RD14BB2C124J	RD	120k $\Omega$	
A-3	R77	RD14BB2C103J	RD	10k $\Omega$	
B-3	R78	RD14BB2E101J	RD	100 $\Omega$	$\pm 5\%$ 1/4W
B-3	R79	RD14BB2E221J	RD	220 $\Omega$	$\pm 5\%$ 1/4W
F-5	R80	RD14BB2C221J	RD	220 $\Omega$	
C-3	R81	RD14BB2C102J	RD	1k $\Omega$	
	R82	RD14BB2C102J	RD	1k $\Omega$	
	R83	RN14BK2B2200F	RN	220 $\Omega$	$\pm 1\%$ 1/8W
	R84	RN14BK2B5101F	RN	5.1k $\Omega$	$\pm 1\%$ 1/8W
F-5	VR1	R03-3502-05	VR	10k $\Omega$	
C-3	VR2	R12-3041-05	VR	10k $\Omega$	
C-3	VR3	R12-3041-05	VR	10k $\Omega$	
G-3	VR4	R23-1501-05	VR	1k $\Omega$	
D-5	VR5	R12-1028-05	VR	4.7k $\Omega$	
E-6	VR6	R12-3041-05	VR	10k $\Omega$	
C-2	VR7	R12-3042-05	VR	47k $\Omega$	
G-2	VR8	R05-8001-05	VR	3M $\Omega$	
A-4	VR9	R12-5501-05	VR	150k $\Omega$	
A-3	VR10	R12-5501-05	VR	150k $\Omega$	
C-6	C1	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
B-5	C2	CE04W1V100M	CE	10 $\mu$ F	35WV
C-6	C3	CE04W1J330M	CE	33 $\mu$ F	63WV
B-5	C4	CE04W2C3R3M	CE	3.3 $\mu$ F	160WV
C-5	C5	CE04W2C3R3M	CE	3.3 $\mu$ F	160WV
C-4	C6	CE04W1C330M	CE	33 $\mu$ F	16WV
C-4	C7	C91-0549-05	Tantalum	1 $\mu$ F	35WV
C-4	C8	CE04W1E101M	CE	100 $\mu$ F	25WV
C-4	C9	CE04W1E101M	CE	100 $\mu$ F	25WV
C-5	C10	CE04W1A221M	CE	220 $\mu$ F	10WV
B-6	C11	CE04W1V100M	CE	10 $\mu$ F	35WV
B-6	C12	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
C-5	C13	CE04W1V470M	CE	47 $\mu$ F	35WV
B-3	C14	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
B-3	C15	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
B-3	C16	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
E-6	C17	CC45CH1H680J	CC	68pF	$\pm 5\%$
F-6	C18	CC45CH1H680J	CC	68pF	$\pm 5\%$
E-5	C19	CK45B1H472K	CK	4700pF	$\pm 10\%$
E-5	C20	CK45B1H472K	CK	4700pF	$\pm 10\%$
F-5	C21	C91-0549-05	Tantalum	1 $\mu$ F	35WV
F-5	C22	C91-0549-05	Tantalum	1 $\mu$ F	35WV
E-4	C23	CC45CH1H220J	CC	22pF	$\pm 5\%$
E-4	C24	CC45CH2H010C	CC	1pF	$\pm 0.25$ pF500WV
D-4	C25	CK45B2H472K	CK	4700pF	$\pm 10\%$ 500WV
D-4	C26	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
E-4	C27	CC45CH2H010C	CC	1pF	$\pm 0.25$ pF500WV
E-3	C28	CK45B2H472K	CK	4700pF	$\pm 10\%$ 500WV
E-3	C29	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
D-4	C30	CE04W2C3R3M	CE	3.3 $\mu$ F	160WV
D-3	C31	CK45B2H472K	CK	4700pF	$\pm 10\%$ 500WV
D-5	C32	CE04W1A221M	CE	220 $\mu$ F	10WV
D-5	C33	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
D-4	C34	CE04W1E101M	CE	100 $\mu$ F	25WV
D-4	C35	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$

Fig. & Index No.	Ref. No.	Parts No.	Name & Description		
D-3	C36	CK45E3D103P	CK	0.01 $\mu$ F	+100%,-0% 2kVW
D-3	C37	CK45E3D103P	CK	0.01 $\mu$ F	+100%,-0% 2kVW
E-3	C38	CK45E3D103P	CK	0.01 $\mu$ F	+100%,-0% 2kVW
E-3	C39	CK45E3D103P	CK	0.01 $\mu$ F	+100%,-0% 2kVW
D-2	C40	CK45B3D102K	CK	1000pF	$\pm 10\%$ 2kVW
C-2	C41	CQ93M1H154K	CQ	0.15 $\mu$ F	$\pm 10\%$
C-2	C42	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
C-2	C43	CK45B1H472K	CK	4700pF	$\pm 10\%$
C-2	C44	CE04W1E470M	CE	47 $\mu$ F	25WV
B-2	C45	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
B-2	C46	CE04W1E470M	CE	47 $\mu$ F	25WV
B-2	C47	CK45B1H103K	CK	0.01 $\mu$ F	$\pm 10\%$
B-1	C48	CE04W1E470M	CE	47 $\mu$ F	25WV
B-2	C49	CQ93M1H472K	CQ	4700pF	$\pm 10\%$
C-3	C50	CE04W1E470M	CE	47 $\mu$ F	25WV
C-3	C51	CK45B1H472K	CK	4700pF	$\pm 10\%$
D-1	C52	CK45E3D103P	CK	0.01 $\mu$ F	+100%,-0% 2kVW
F-2	C53	CK45E3D103P	CK	0.01 $\mu$ F	+100%,-0% 2kVW
F-1	C54	CK45B3D102K	CK	1000pF	$\pm 10\%$ 2kVW
B-3	C55	CK45B2H222K	CK	2200pF	$\pm 10\%$ 500WV
B-3	C56	CK45B2H222K	CK	2200pF	$\pm 10\%$ 500WV
E-6	C57	CC45CH1H101J	CC	100pF	$\pm 5\%$
E-5	C58	CC45CH1H101J	CC	100pF	$\pm 5\%$
A-3	C59	CK45B2H222K	CK	2200pF	$\pm 10\%$ 500WV
D-6	TC1	C05-0405-05	TC	20pF	
E-4	TC2	C05-0405-05	TC	20pF	
E-4	TC3	C05-0403-05	TC	6pF	
C-6	L1	L40-1011-04	Ferri-inductor	100 $\mu$ H	
C-4	L2	L40-1001-01	Ferri-inductor	10 $\mu$ H	
C-6	L3	L40-1011-04	Ferri-inductor	100 $\mu$ H	
D-5	L4	L40-1011-04	Ferri-inductor	100 $\mu$ H	
D-4	L5	L40-1011-04	Ferri-inductor	100 $\mu$ H	
D-4	L6	L40-1011-04	Ferri-inductor	100 $\mu$ H	
B-2	L7	L40-1011-04	Ferri-inductor	100 $\mu$ H	
B-2	L8	L40-1011-04	Ferri-inductor	100 $\mu$ H	
B-2	L9	L40-1011-04	Ferri-inductor	100 $\mu$ H	
B-5	D1		Diode Silicon	DS442X	
B-4	D2		Diode Zener	WZ-120	
B-4	D3		Diode Zener	WZ-120	
E-5	D4		Diode Zener	WZ-032	
E-5	D5		Diode Silicon	DS442X	
D-5	D6		Diode Silicon	DS442X	
E-5	D7		Diode Zener	WZ-090	
D-3	D8		Diode Silicon	1SS83	
E-3	D9		Diode Silicon	1SS83	
D-2	D10		Diode Silicon	W06C	
D-2	D11		Diode Silicon	W06C	
F-2	D12		Diode Silicon	W06C	
F-1	D13		Diode Silicon	W06C	
C-2	D14		Diode Silicon	DS442X	
C-2	D15		Diode Silicon	DS442X	
C-2	D16		Diode Zener	WZ-032	
B-2	D17		Diode Silicon	DS442X	
C-2	D18		Diode Zener	WZ-061	
B-5	Q1		TR NPN	2SC1913 (Q or R)	
B-5	Q2		TR NPN	2SC1505 (L)	

# PARTS LIST

X68-1310-00

Fig. & Index No.	Ref. No.	Parts No.	Name & Description
C-4	Q3		TR PNP 2SB633 (E)
C-4	Q4		TR NPN 2SD613 (E)
C-5	Q5		TR PNP 2SB633 (E)
B-6	Q6		TR NPN 2SC1505 (L)
B-6	Q7		TR NPN 2SC536KNP (F)
B-4	Q8		TR NPN 2SC1505 (L)
B-3	Q9		TR NPN 2SC536KNP (F)
B-3	Q10		TR PNP 2SA608KNP (F)
B-3	Q11		TR NPN 2SC536KNP (F)
B-3	Q12		TR PNP 2SA608KNP (F)
E-5	Q13		TR NPN 2SC1215 (T or S)
E-5	Q14		TR NPN 2SC1215 (T or S)
E-5	Q15		TR NPN 2SC1215 (T or S)
D-5	Q16		TR NPN 2SC536KNP (F)
D-5	Q17		TR NPN 2SC1047 (C)
D-4	Q18		TR PNP 2SA838 (C)
E-3	Q19		TR NPN 2SC805A-2(2,3)
D-4	Q20		TR PNP 2SA923-2 (2, 3)
	Q21		TR NPN 2SC2910 S or T
	Q22		TR PNP 2SA1208 S or T
C-3	Q23		TR NPN 2SC2910 S or T
C-3	Q24		TR NPN 2SC2910 S or T
B-2	Q25		TR NPN 2SC536KNP (F)
C-2	Q26		TR NPN 2SC536KNP (F)
B-2	Q27		TR PNP 2SA608KNP (F)
C-2	Q28		FET N-channel 2SK19 (BL)
B-1	Q29		TR NPN 2SD613 (E)
B-4	IC1		IC Linear NJM4558D
B-5	IC2		IC Linear NJM4558D
D-6	P22	E40-0776-05	Pin connector 7P
F-5	P23a	E40-0476-05	Pin connector 4P
F-3	P23b	E40-0476-05	Pin connector 4P
B-3	P24	E40-0276-05	Pin connector 2P
C-3	P25	E40-0276-05	Pin connector 2P
F-6	P26a	E40-0576-05	Pin connector 5P
F-3	P26b	E40-0576-05	Pin connector 5P
D-5	P27	E40-0876-05	Pin connector 8P
E-6	P28	E40-0476-05	Pin connector 4P
A-2	P29	E40-0703-05	Pin connector 7P
A-5	P30	E40-0746-05	Pin connector 7P
A-3	P32	E40-0476-05	Pin connector 4P
E-1	P33	E40-0332-05	Pin connector 3P
E-6	P34	E40-0276-05	Pin connector 2P
		E31-0762-05	Lead wire with connector
		F01-0826-05	Heat sink
		F02-0414-04	Heat sink
		F20-0516-05	Sheet (insulator)
		F20-0623-05	Sheet (insulator)
F-3	PL1	B30-0927-05	Pilot lamp
F-3	PL2	B30-0927-05	Pilot lamp
F-3	PL3	B30-0927-05	Pilot lamp
F-3	PL4	B30-0927-05	Pilot lamp
D-2	NL1		Neon lamp NE-2B
D-2	NL2		Neon lamp NE-2B
E-2	NL3		Neon lamp NE-2B
E-2	NL4		Neon lamp NE-2B
		J30-0605-05	Spacer (For TR)
		J25-2972-03	Printed circuit board

# VOLTAGES AND WAVEFORMS

The voltages and waveforms are measured on each schematic diagram as follows;

## TEST EQUIPEMENT

Digital multimeter : DL-720 (TRIO)  
 Oscilloscope : 475A (TEKTRONIX)  
 Sine wave generator : SG-502 (TEKTRONIX)

## CONTROL SETTINGS

A INTENSITY	Midrange
FOCUS	Midrange
AC-GND-DC	GND for voltage measurement DC for waveform measurement
▲ POSITION	Midrange
X GAIN	OFF
VOLTS/DIV	0.2V
V. VARIABLE	CAL
CH 2 INV	OFF
V. MODE	Unless otherwise specified CH 1
20 MHz BW	OFF
PUSH 50Ω	OFF
COUPLING	AC
SLOPE	+
TRIG. MODE	AUTO
HOLD OFF	NORM
A SWEEP TIME/DIV	0.2ms
B SWEEP TIME/DIV	50μs
A. VARIABLE	CAL
◀▶ POSITION	Midrange
H. DISPLAY	A
x 10 MAG	OFF

## NOTE:

In differential circuit, the voltages and waveforms are shown only CH 1 and CH 3.


## Voltage Measurements

Voltage measurements are taken with no signal applied and the trace positioned to the center horizontal graticule line. The digital multimeter common should be connected to chassis ground at the nearest measurement point.

## Waveform Condition

Waveforms are measured with 1 kHz 1Vp-p sine wave applied CH 1 input and 1 kHz 500m Vp-p applied CH3 input.


# SCHEMATIC DIAGRAM

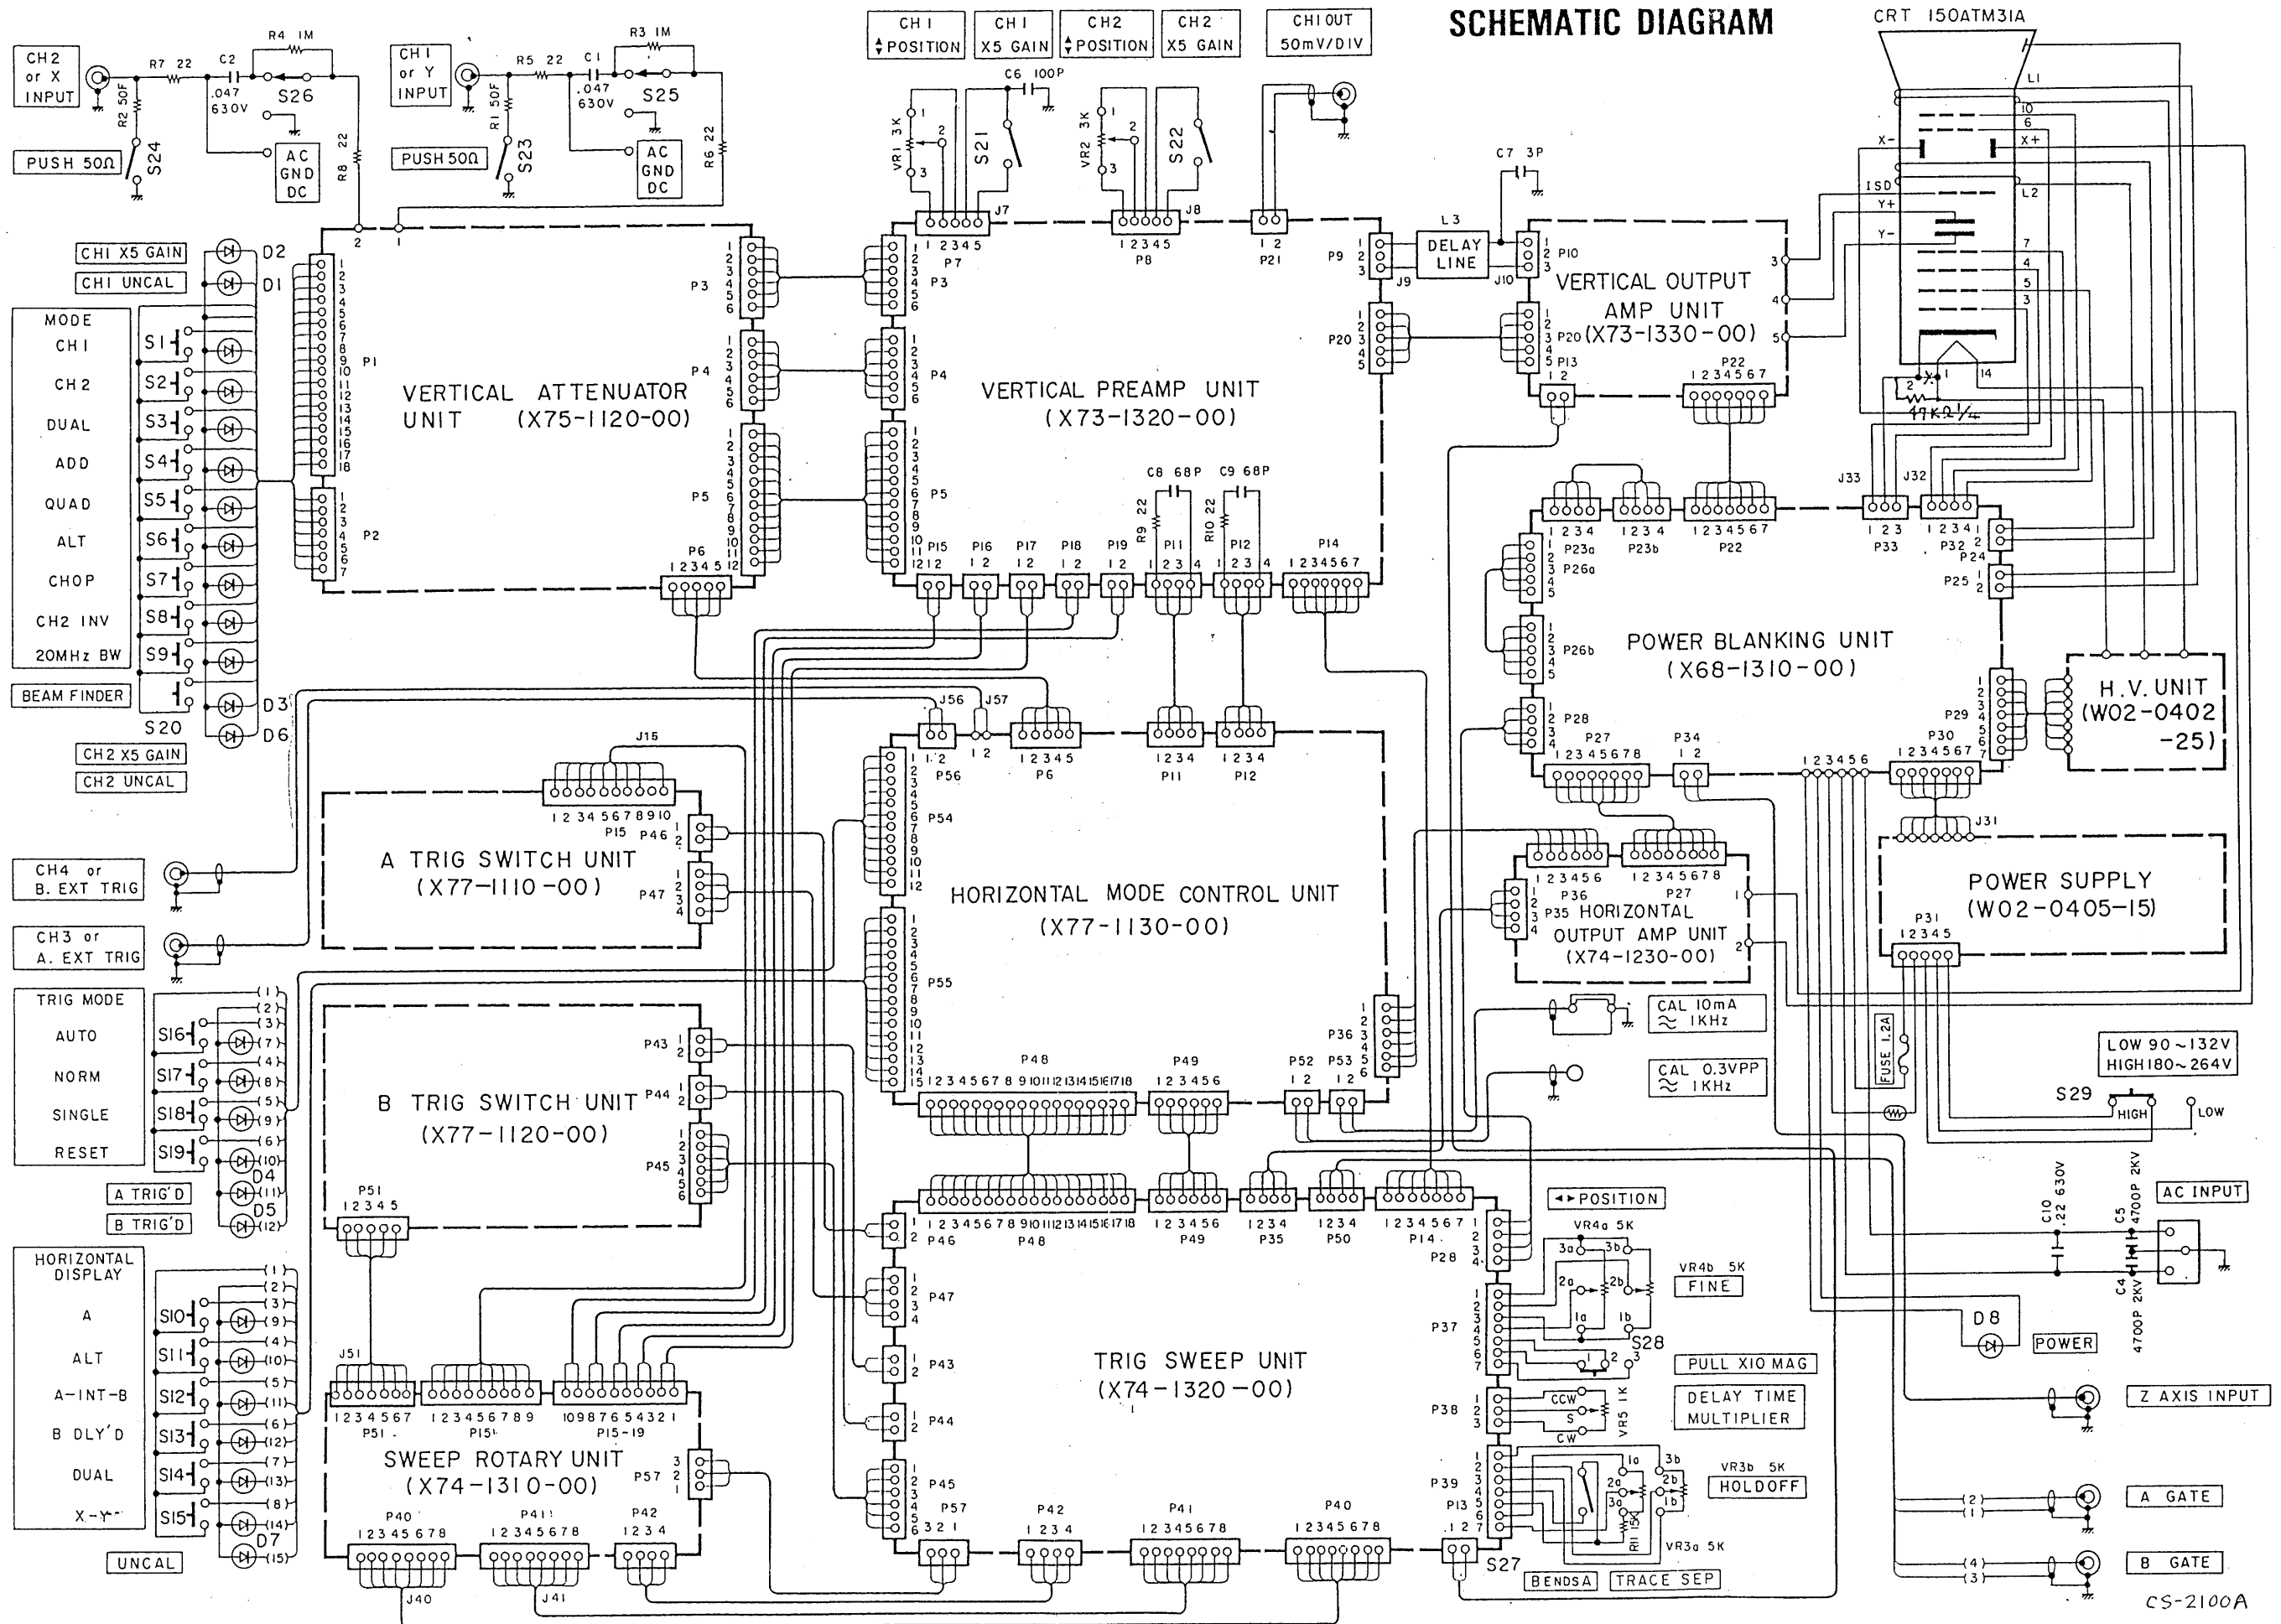



CS-2100A

# PC BOARD

X75-1120-00



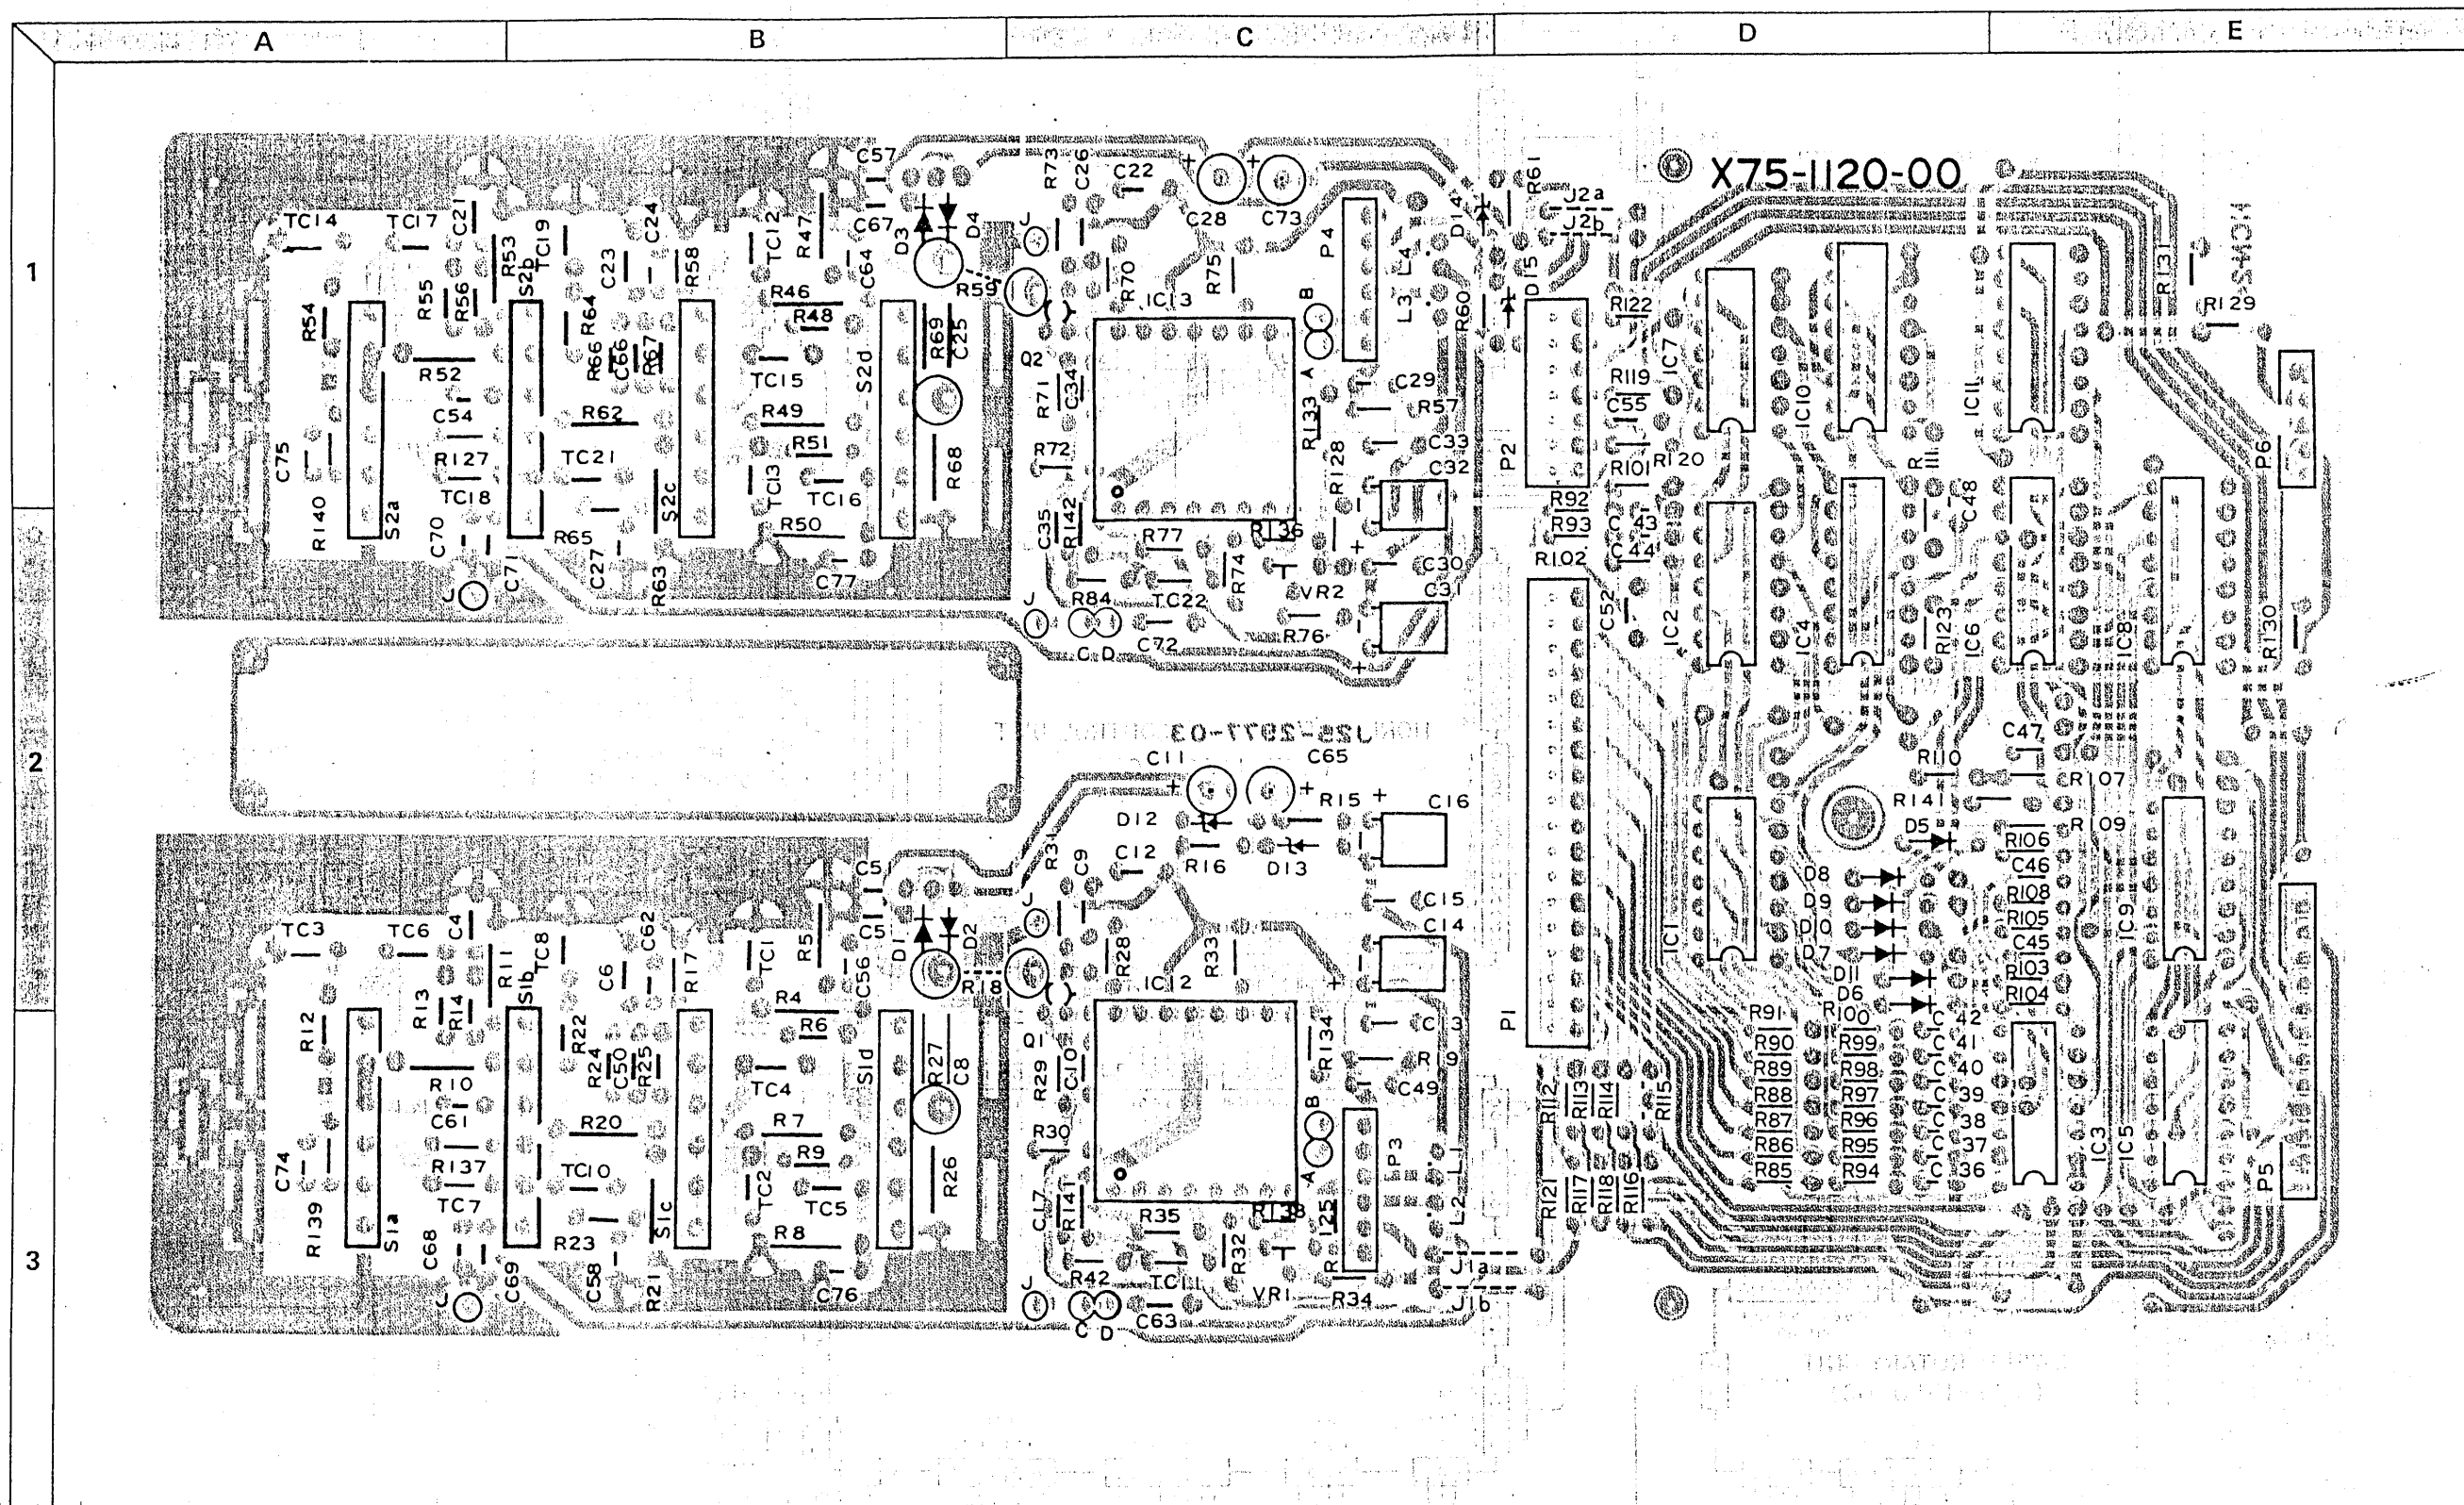


X75-1120-00  
(VERTICAL ATTENUATOR  
UNIT)

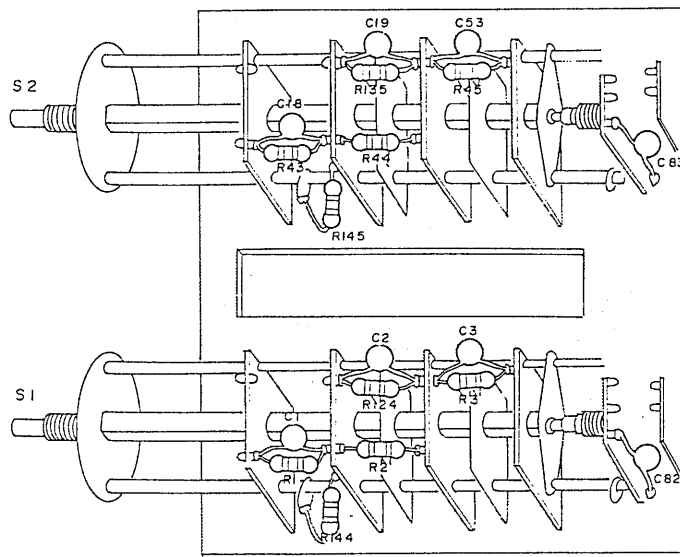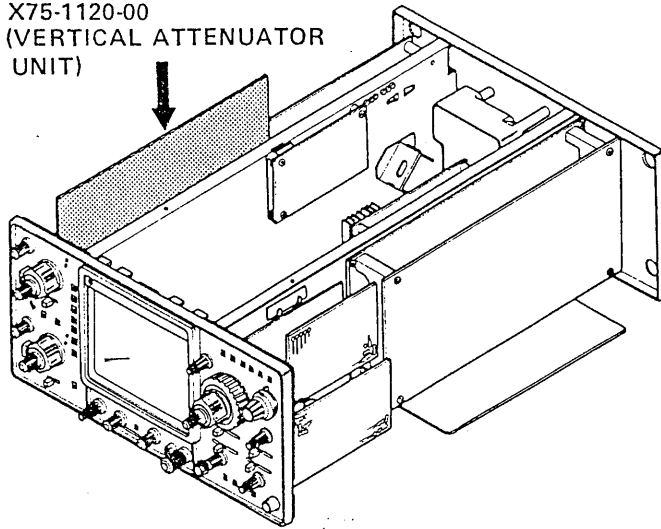


Location of Parts in the Rotary Switch

# WAVEFORMS



# SCHEMATIC DIAGRAM

C-2100A

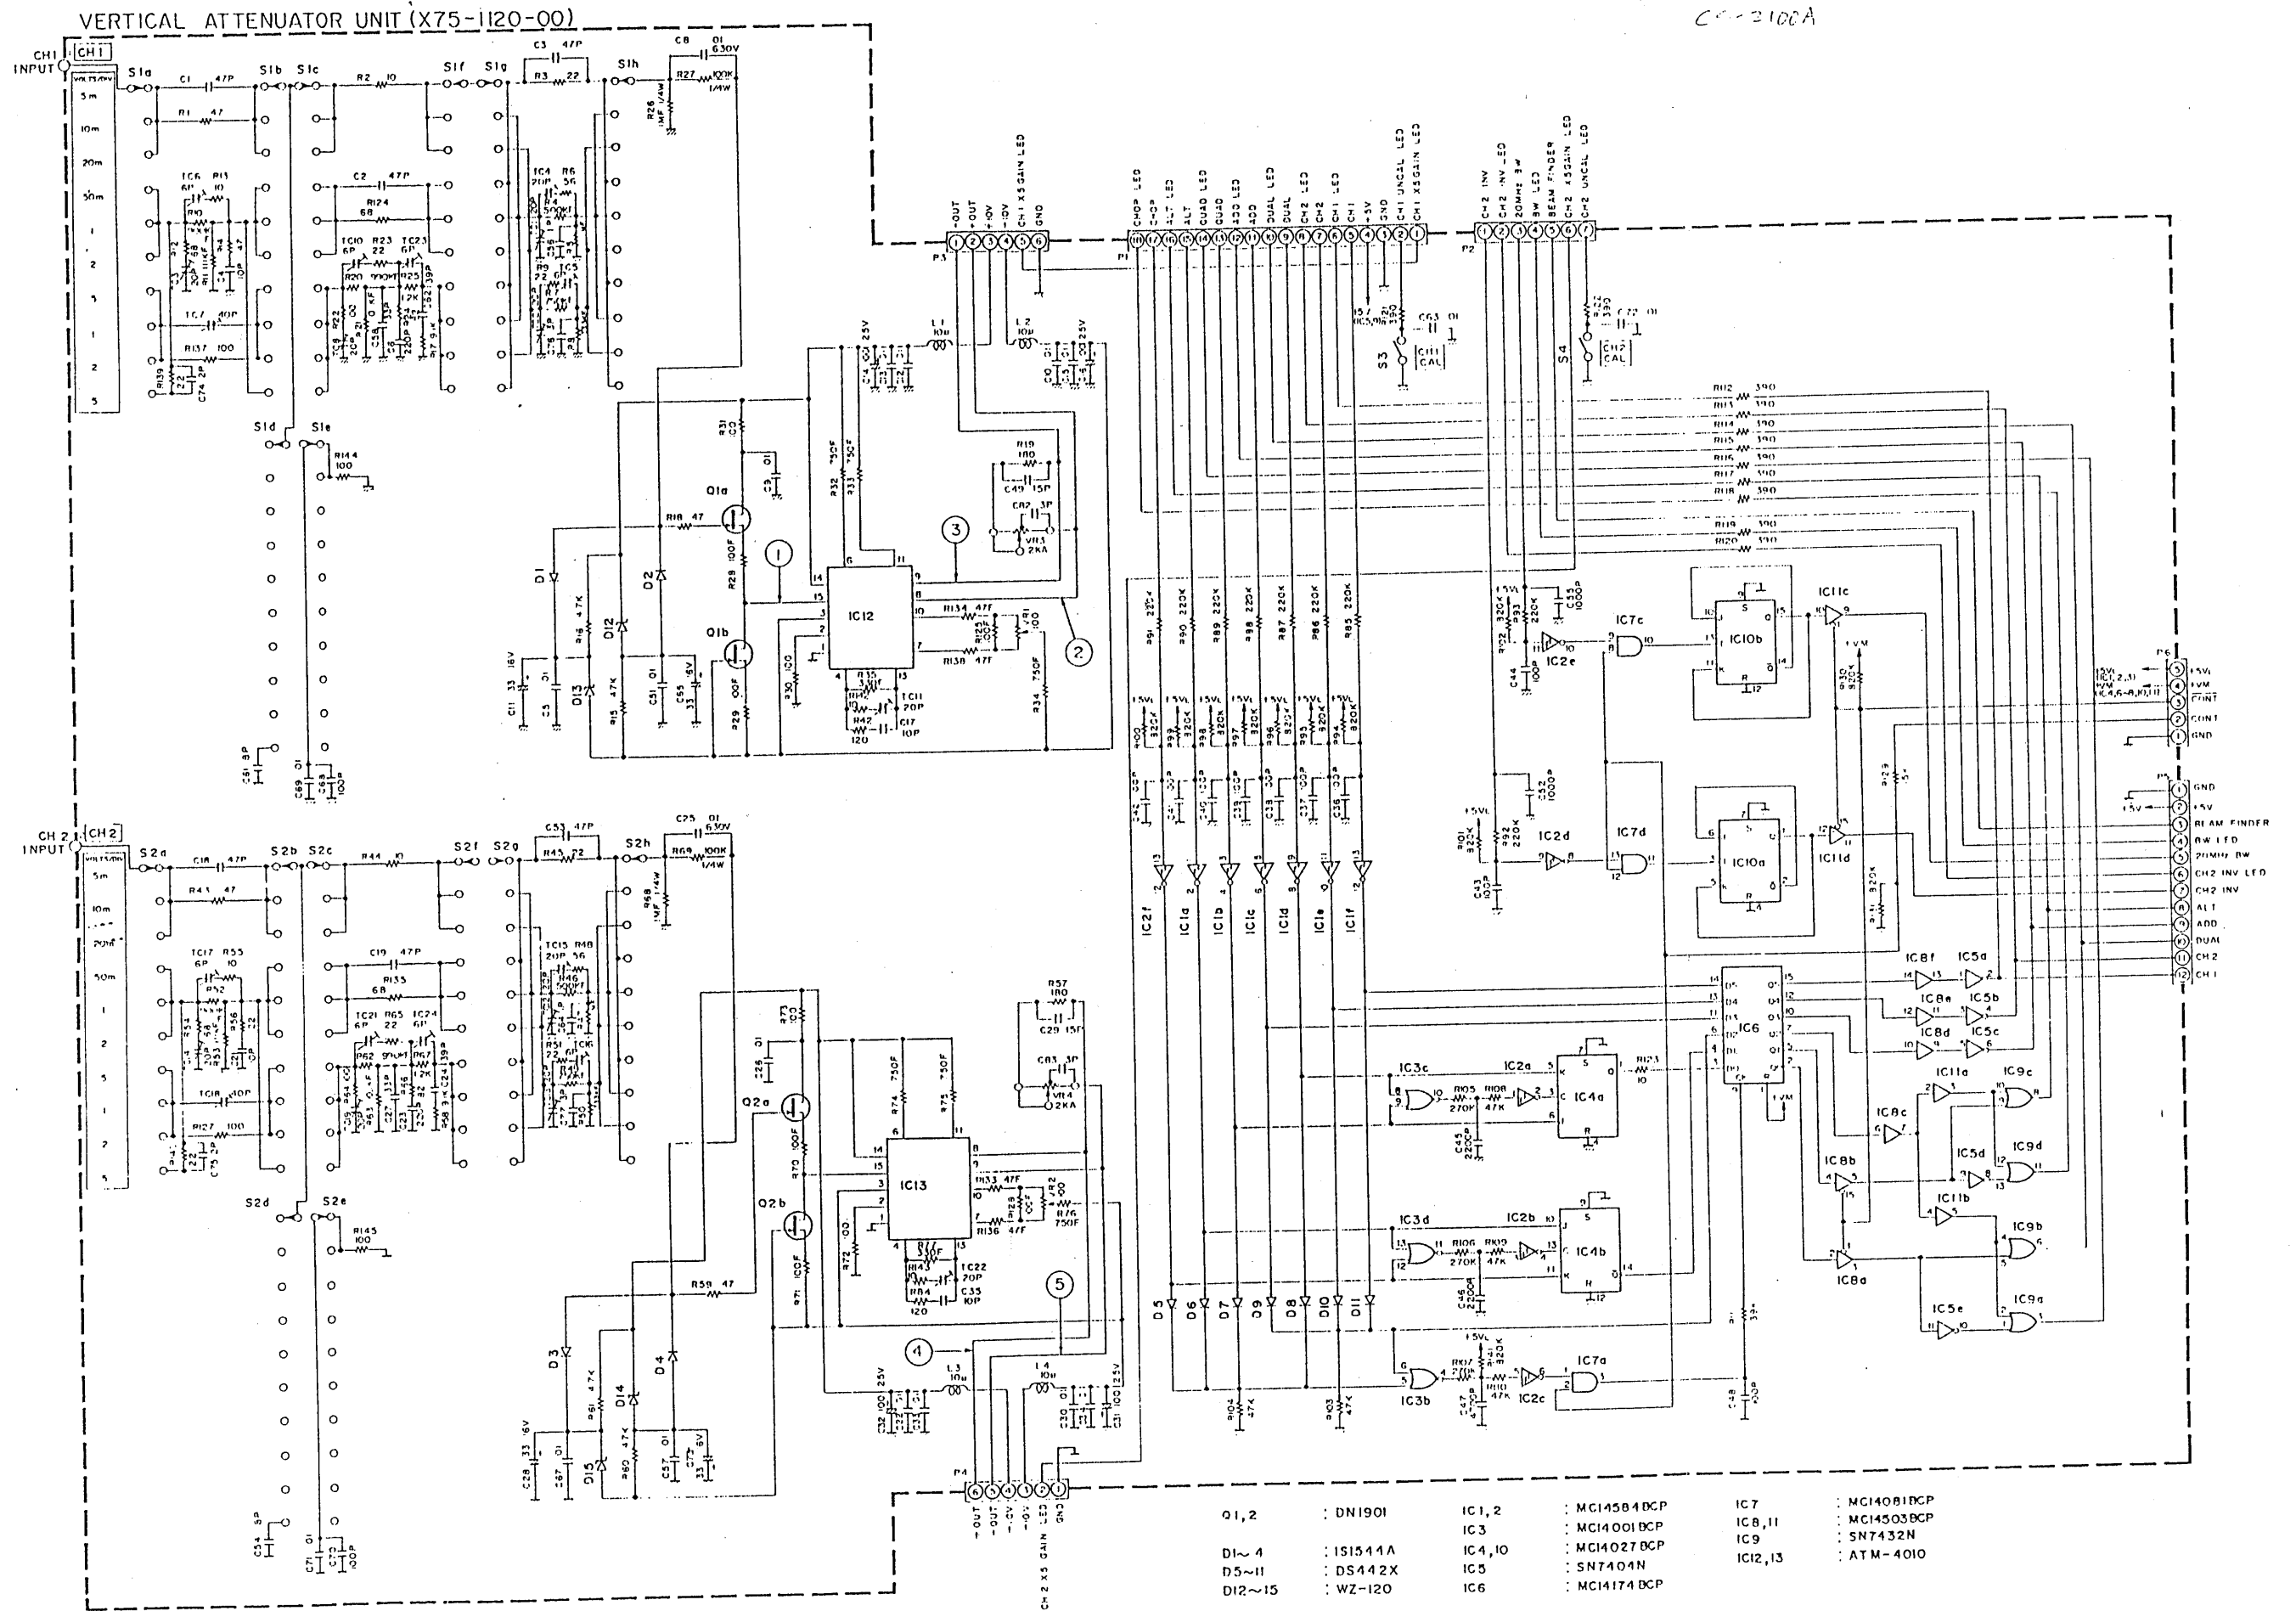


- |          |           |         |               |          |               |
|----------|-----------|---------|---------------|----------|---------------|
| O1, 2    | : DN1901  | IC1, 2  | : MC14584 BCP | IC7      | : MC14081 DCP |
| D1 ~ 4   | : 1S1544A | IC3     | : MC14001 BCP | IC8, 11  | : MC14503 BCP |
| D5 ~ 11  | : DS442X  | IC4, 10 | : MC14027 BCP | IC9      | : SN7432N     |
| D12 ~ 15 | : WZ-120  | IC5     | : SN7404N     | IC12, 13 | : ATM-4010    |
|          |           | IC6     | : MC14174 BCP |          |               |





# PC BOARD

X73-1320-00

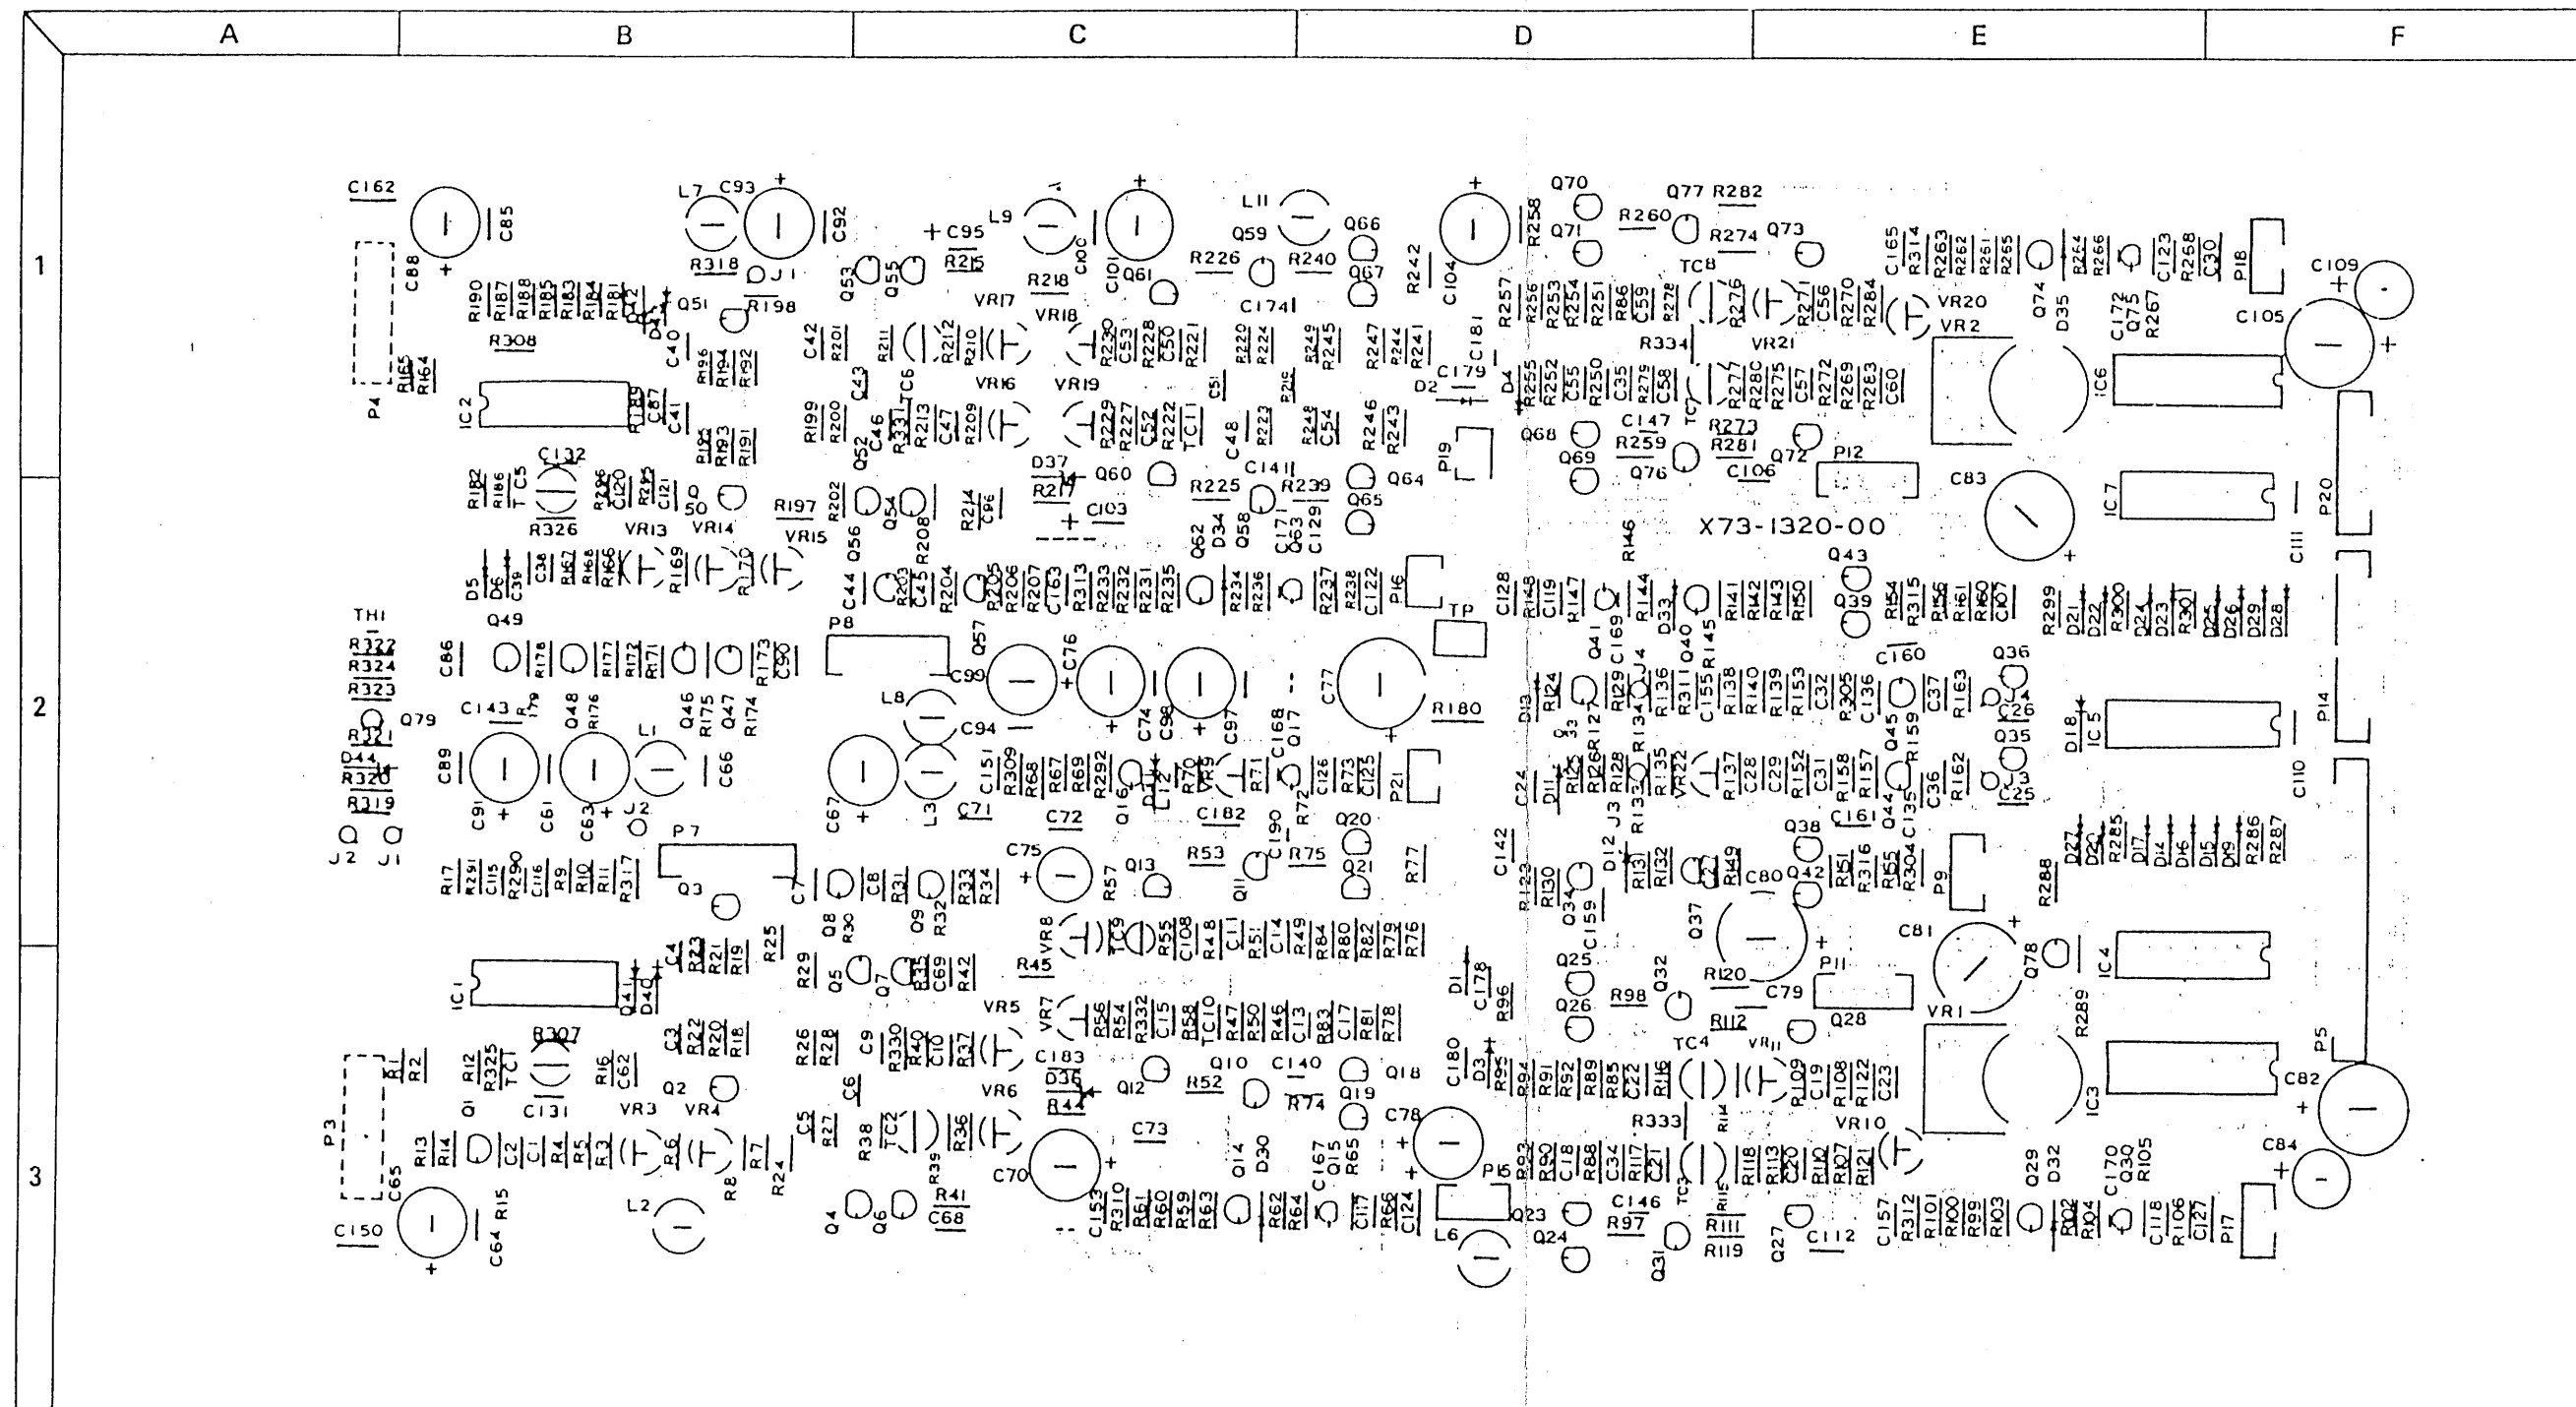


X73-1320-00  
(V. PRE AMP UNIT)

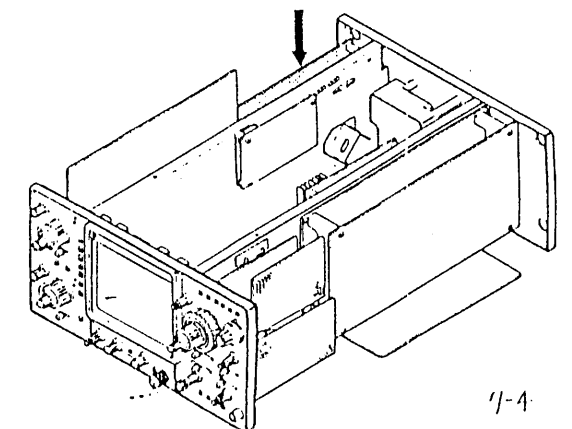

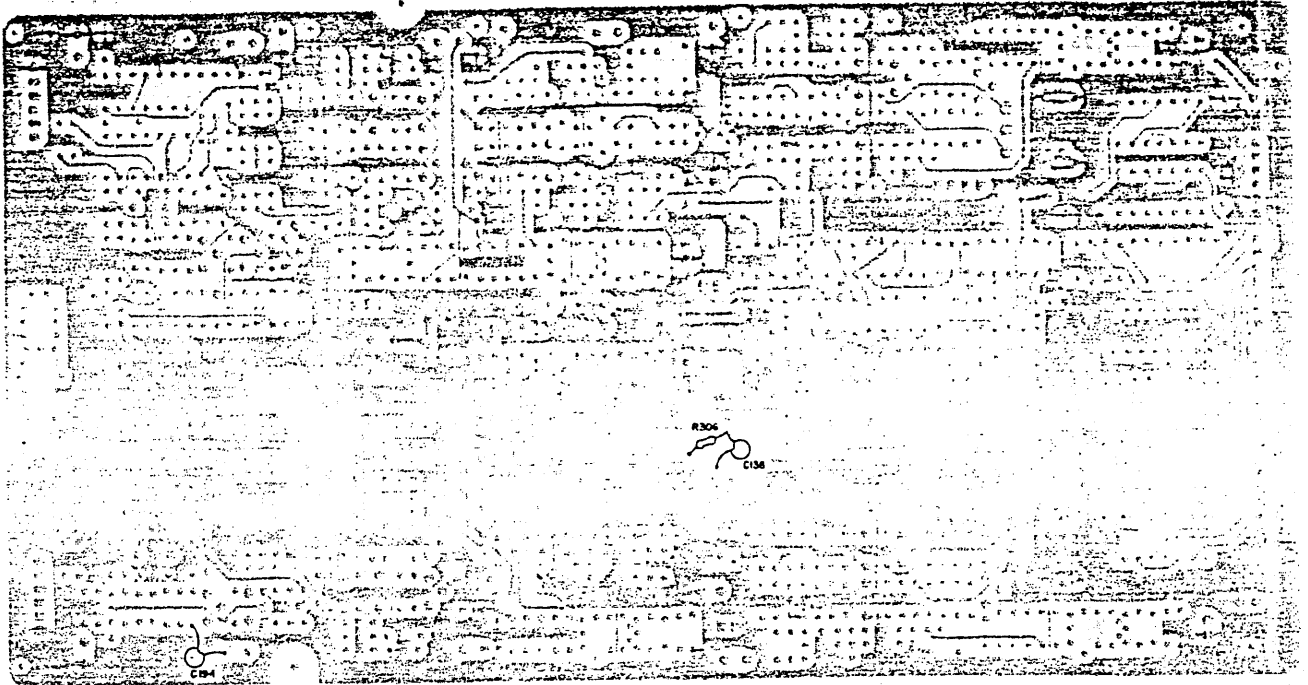


(Parts Side View)

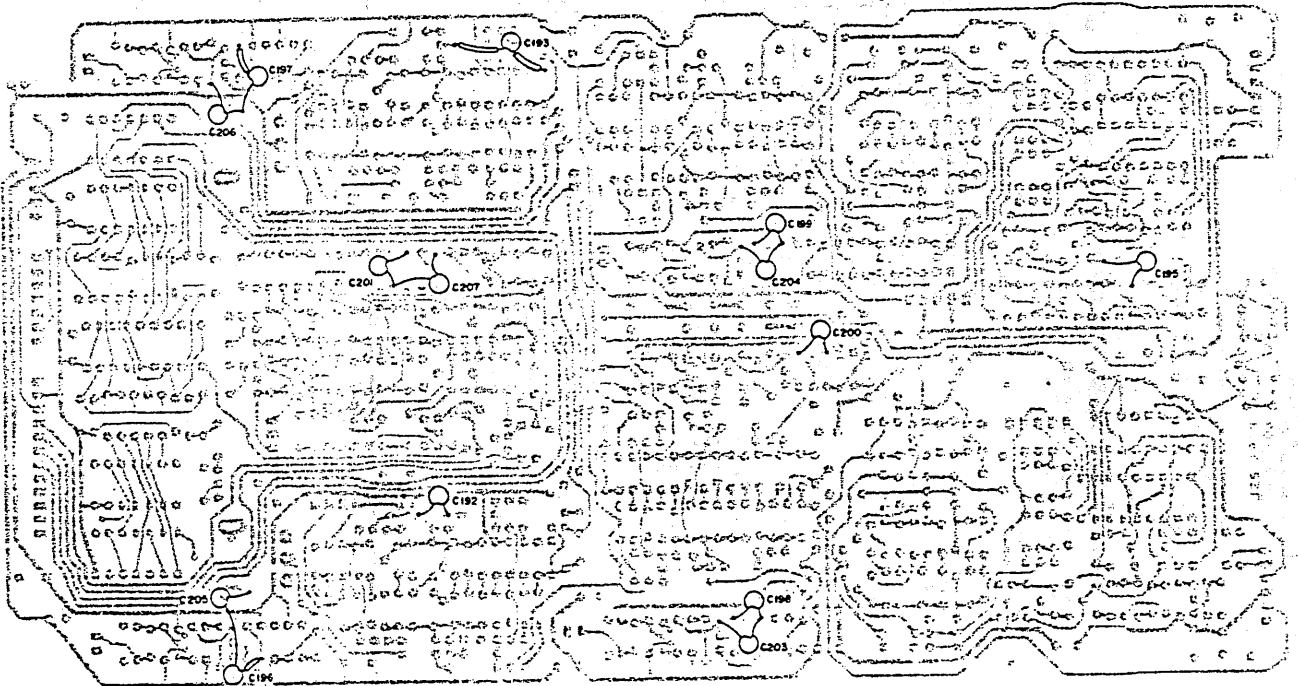


(Foil Side View)

# WAVEFORMS


①




② ④




③ ⑤ ⑨ ⑩




⑥




⑦ ⑧




⑪ ⑫ ⑲




⑬ ⑭




⑮ ⑯




⑰




⑱




⑲



⑳ ㉑




㉓




# SCHEMATIC DIAGRAM

CS-2100A

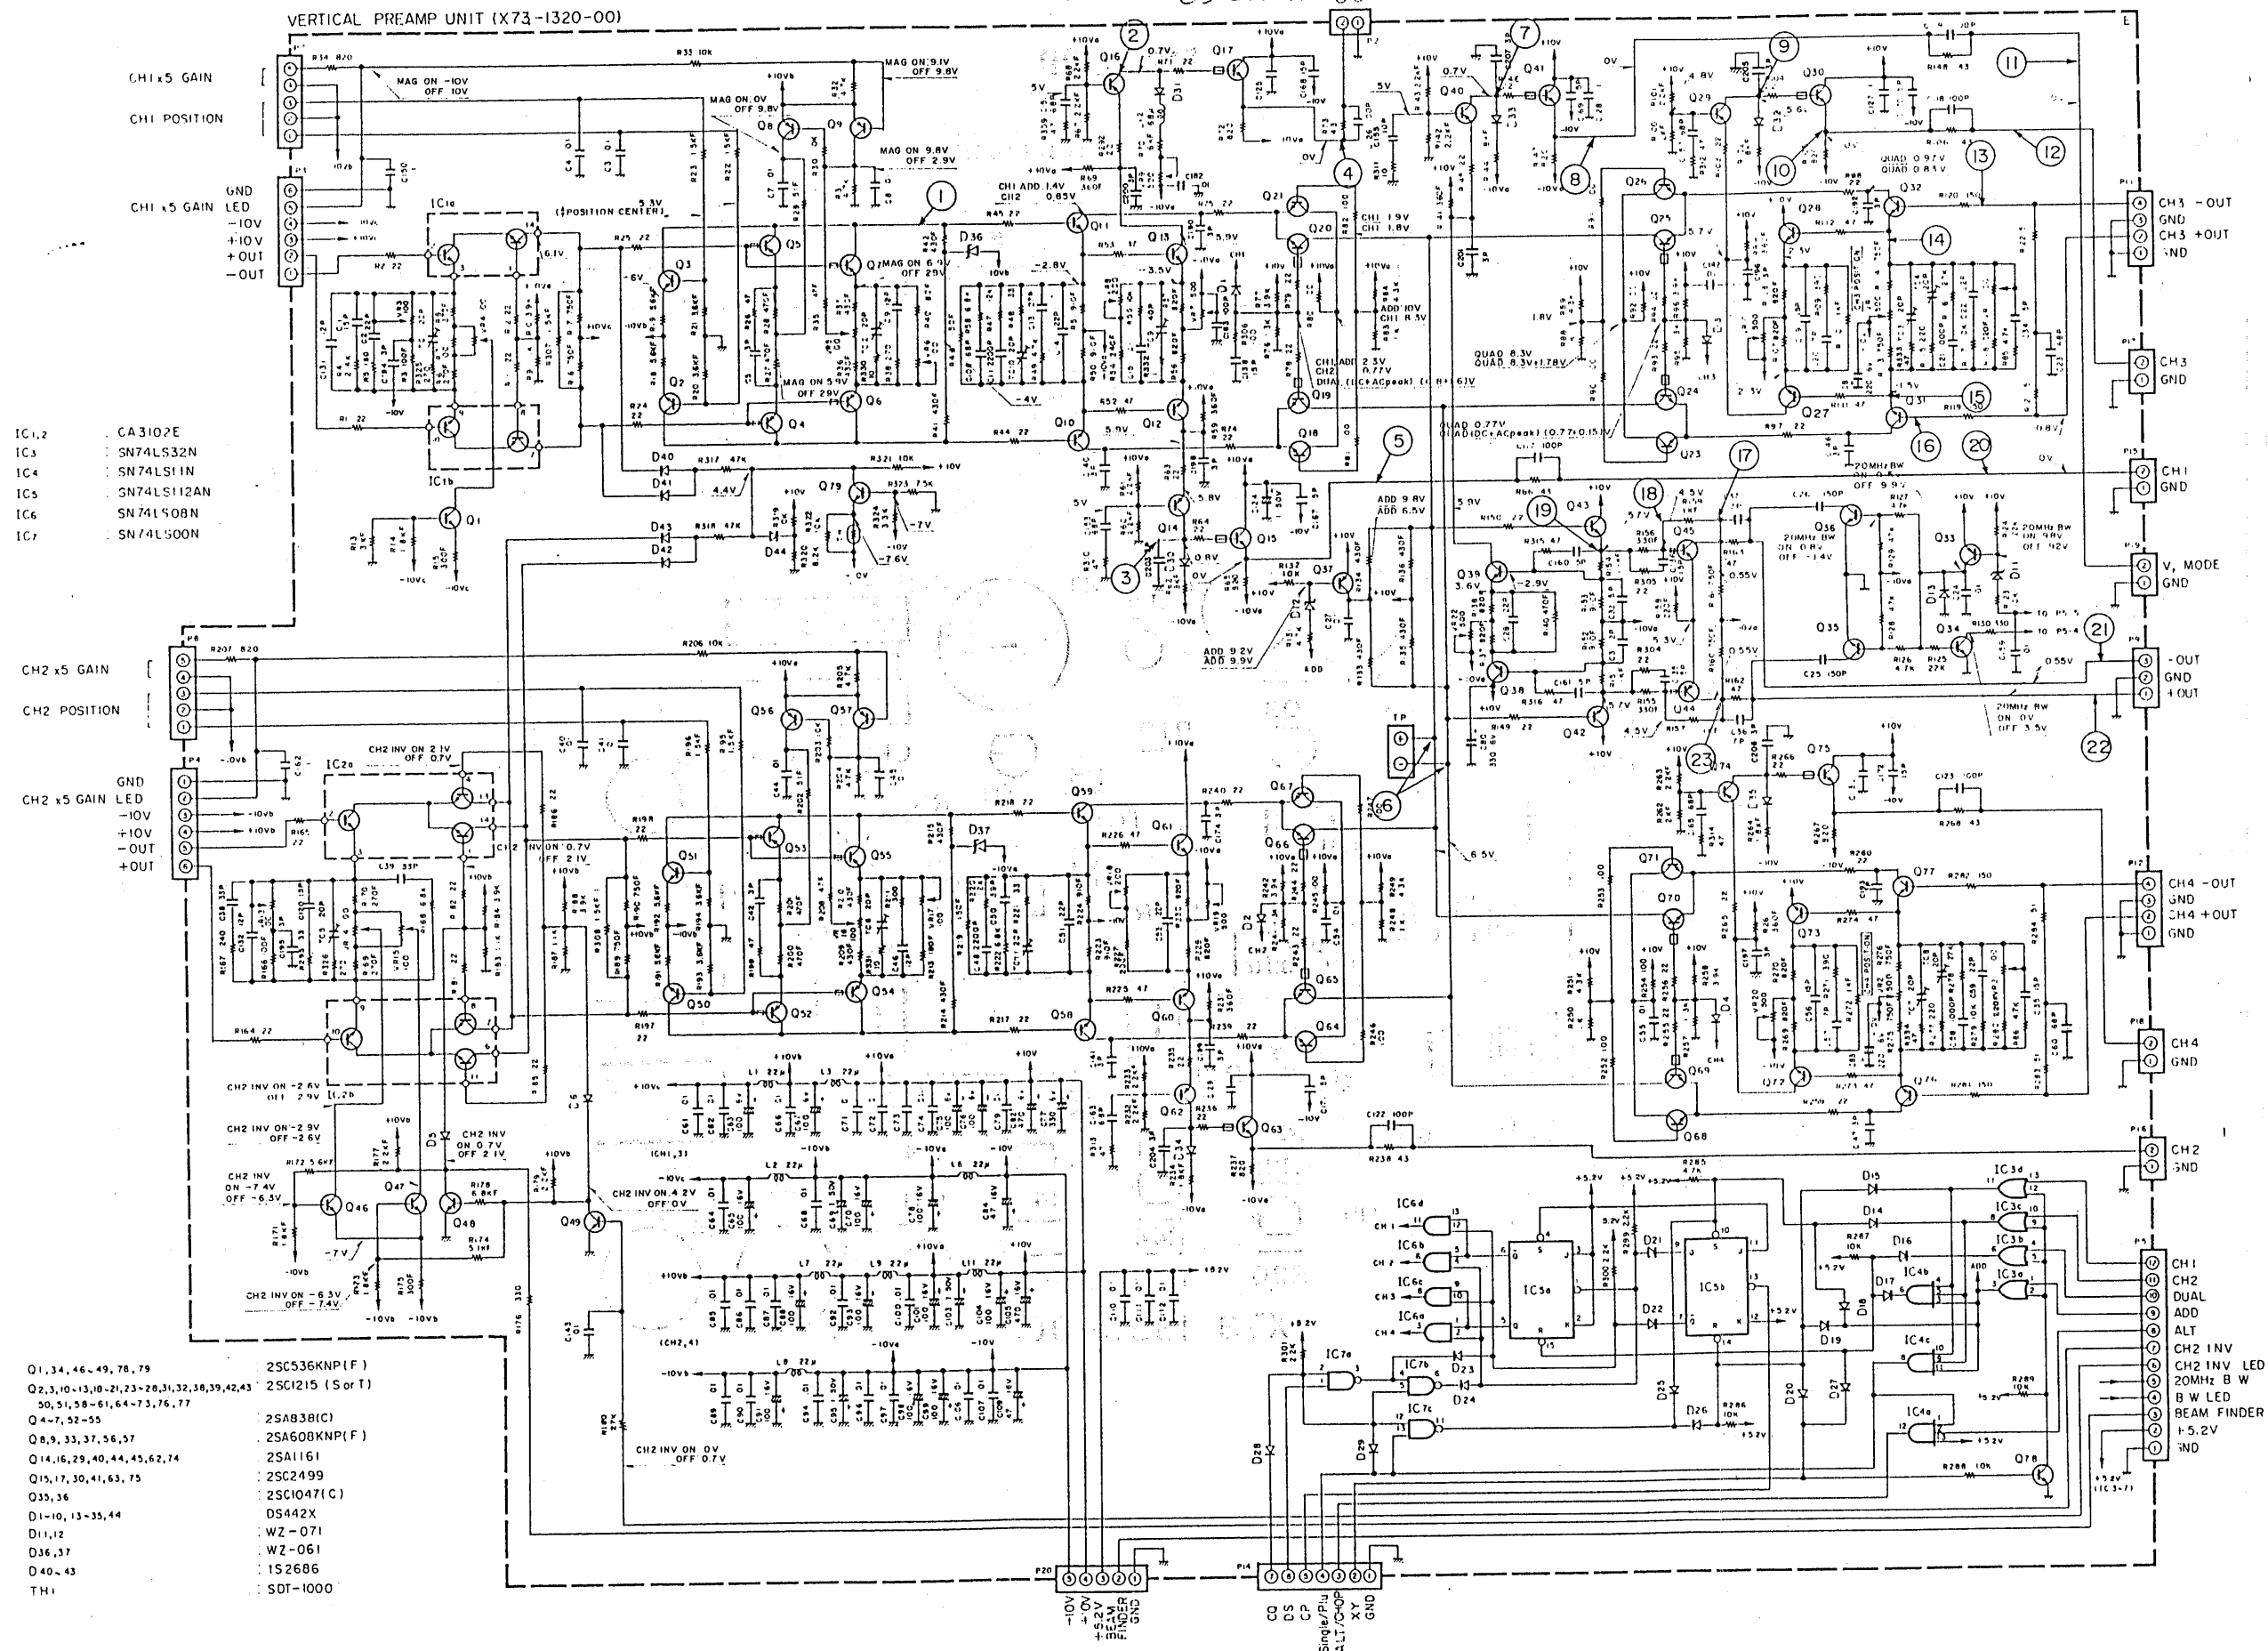


# PC BOARD

X73-1330-00

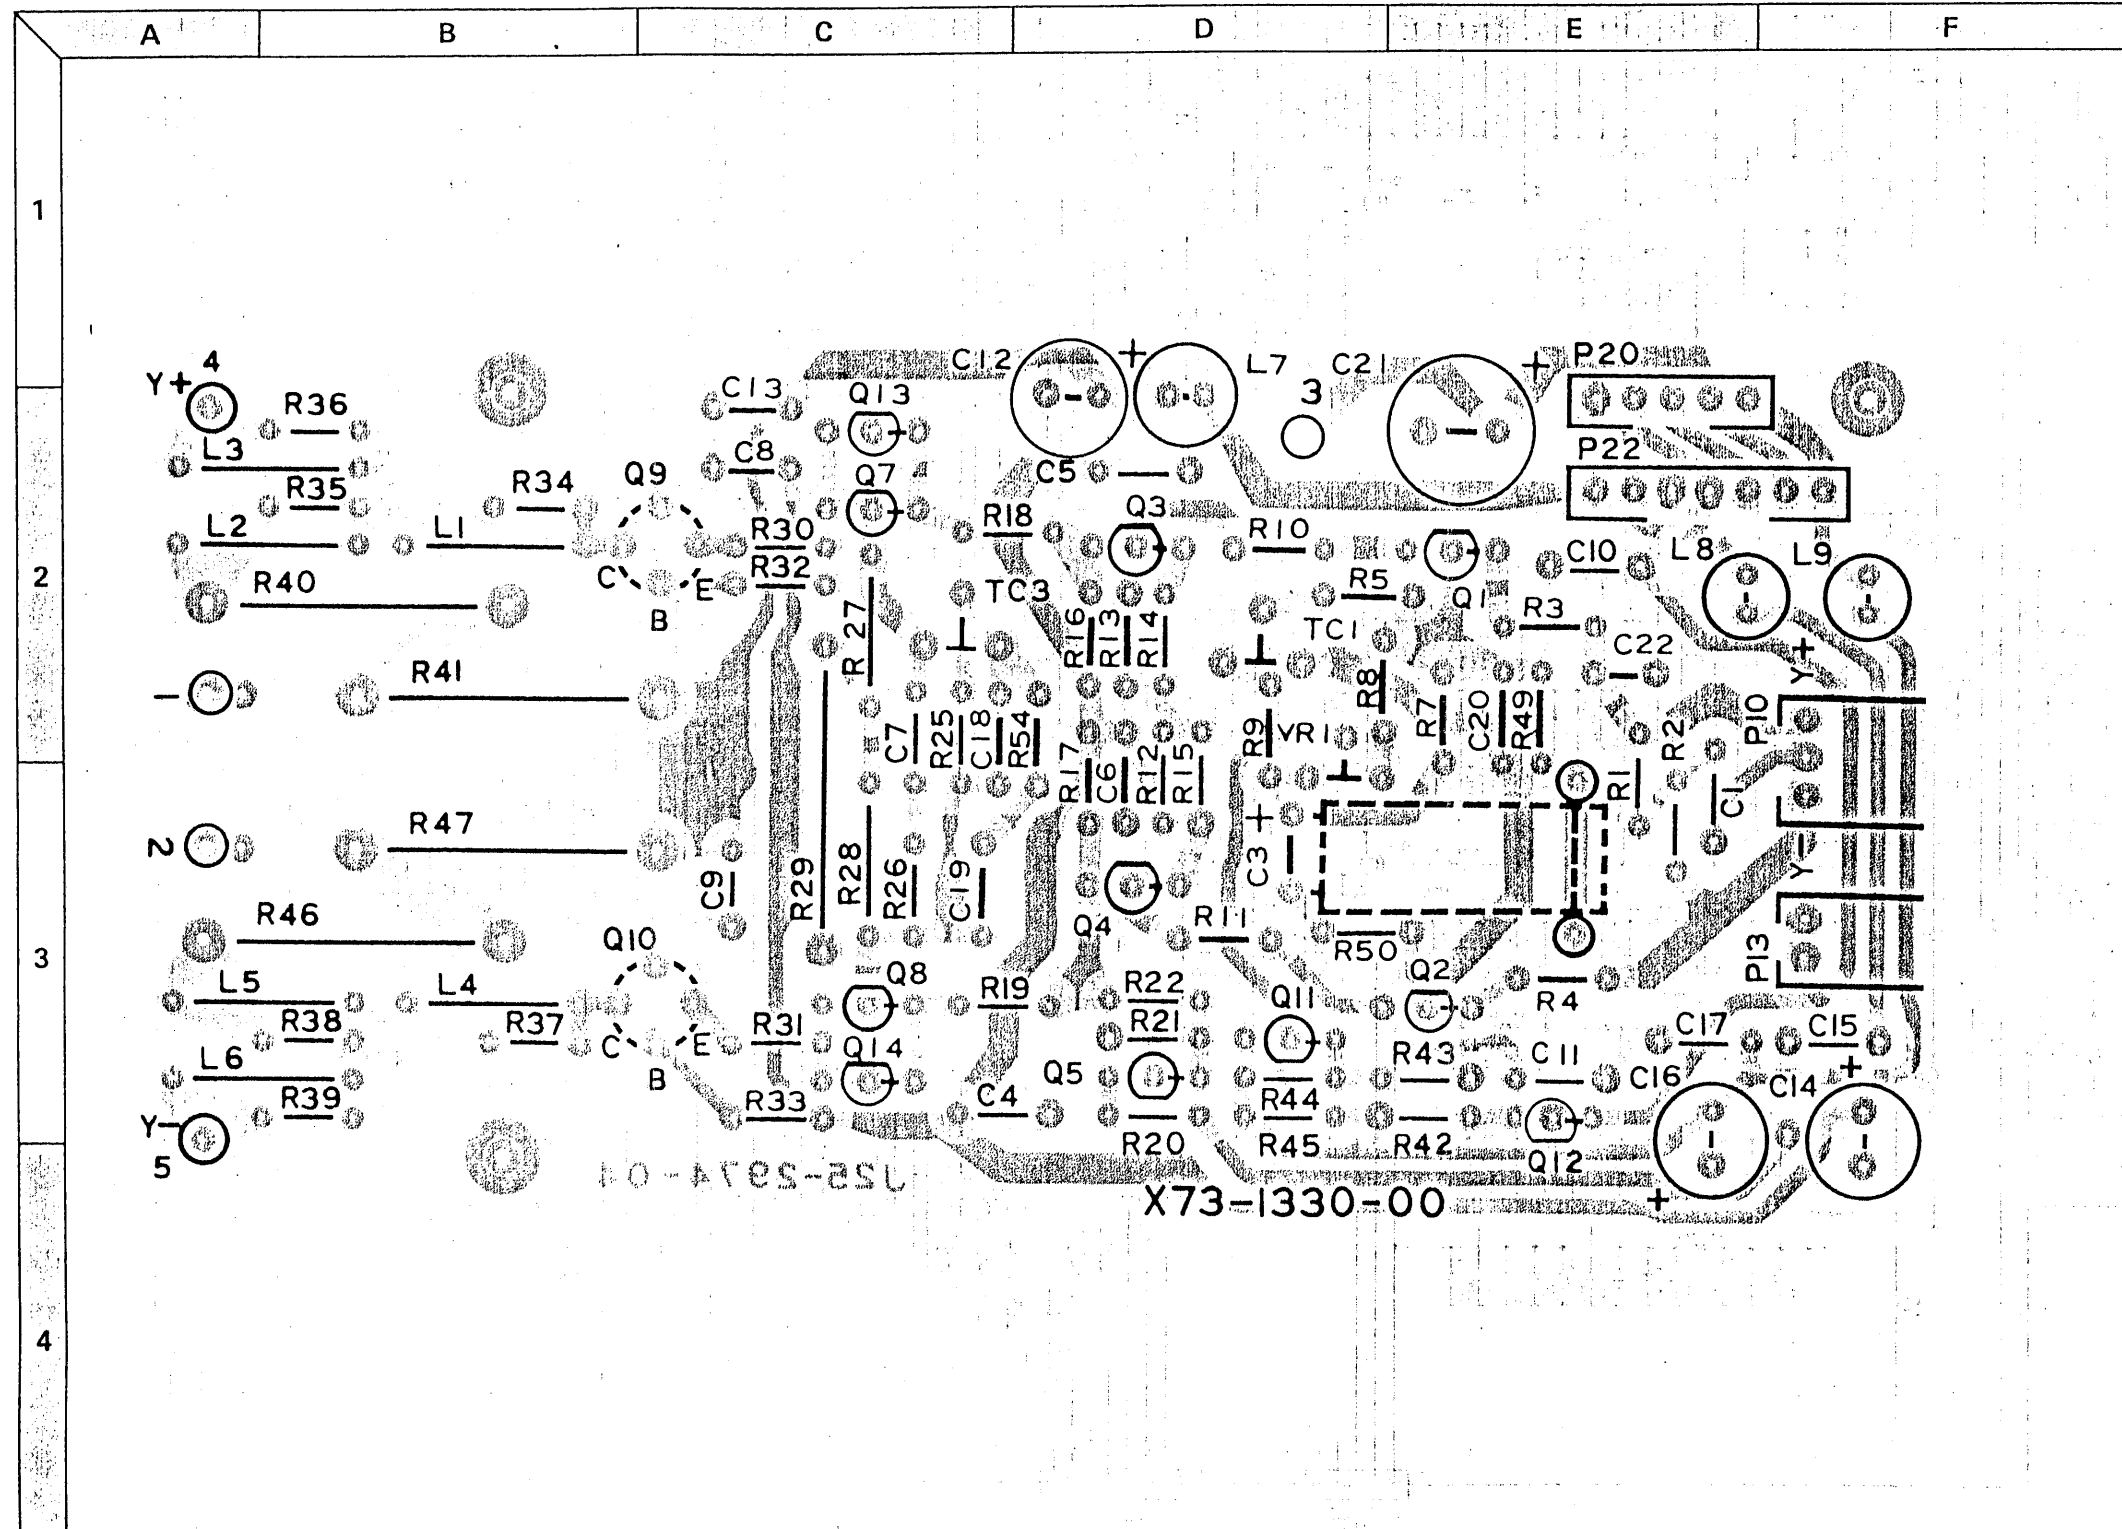


X73-1330-00  
(V. OUTPUT UNIT)

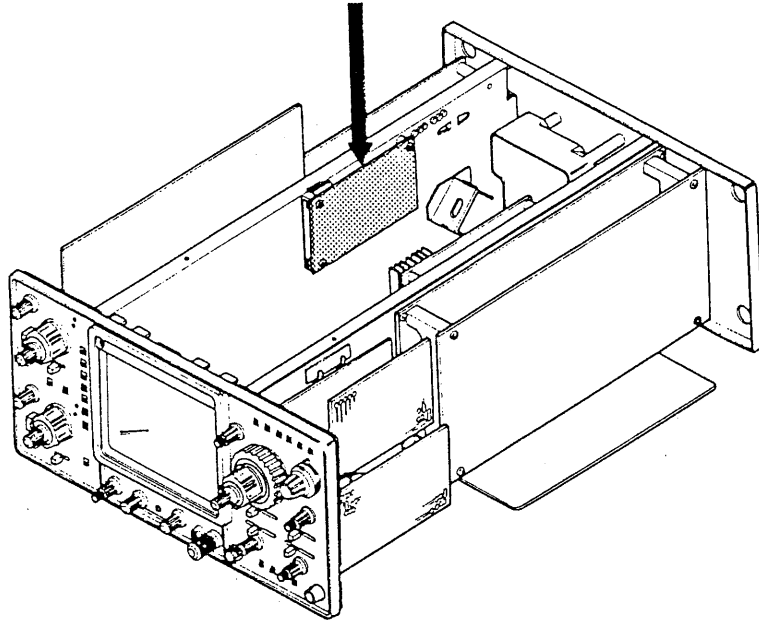


# WAVEFORMS


①



② ③ ④




④ (at only  $\updownarrow$  TRACE SEP position)




$\updownarrow$  TRACE. SEP MAX  
(AC-GND -DC: GND)

⑤ ⑥




⑦ (at only  $\updownarrow$  TRACE SEP position)



$\updownarrow$  TRACE. SEP MAX

# SCHEMATIC DIAGRAM


CS-2160A

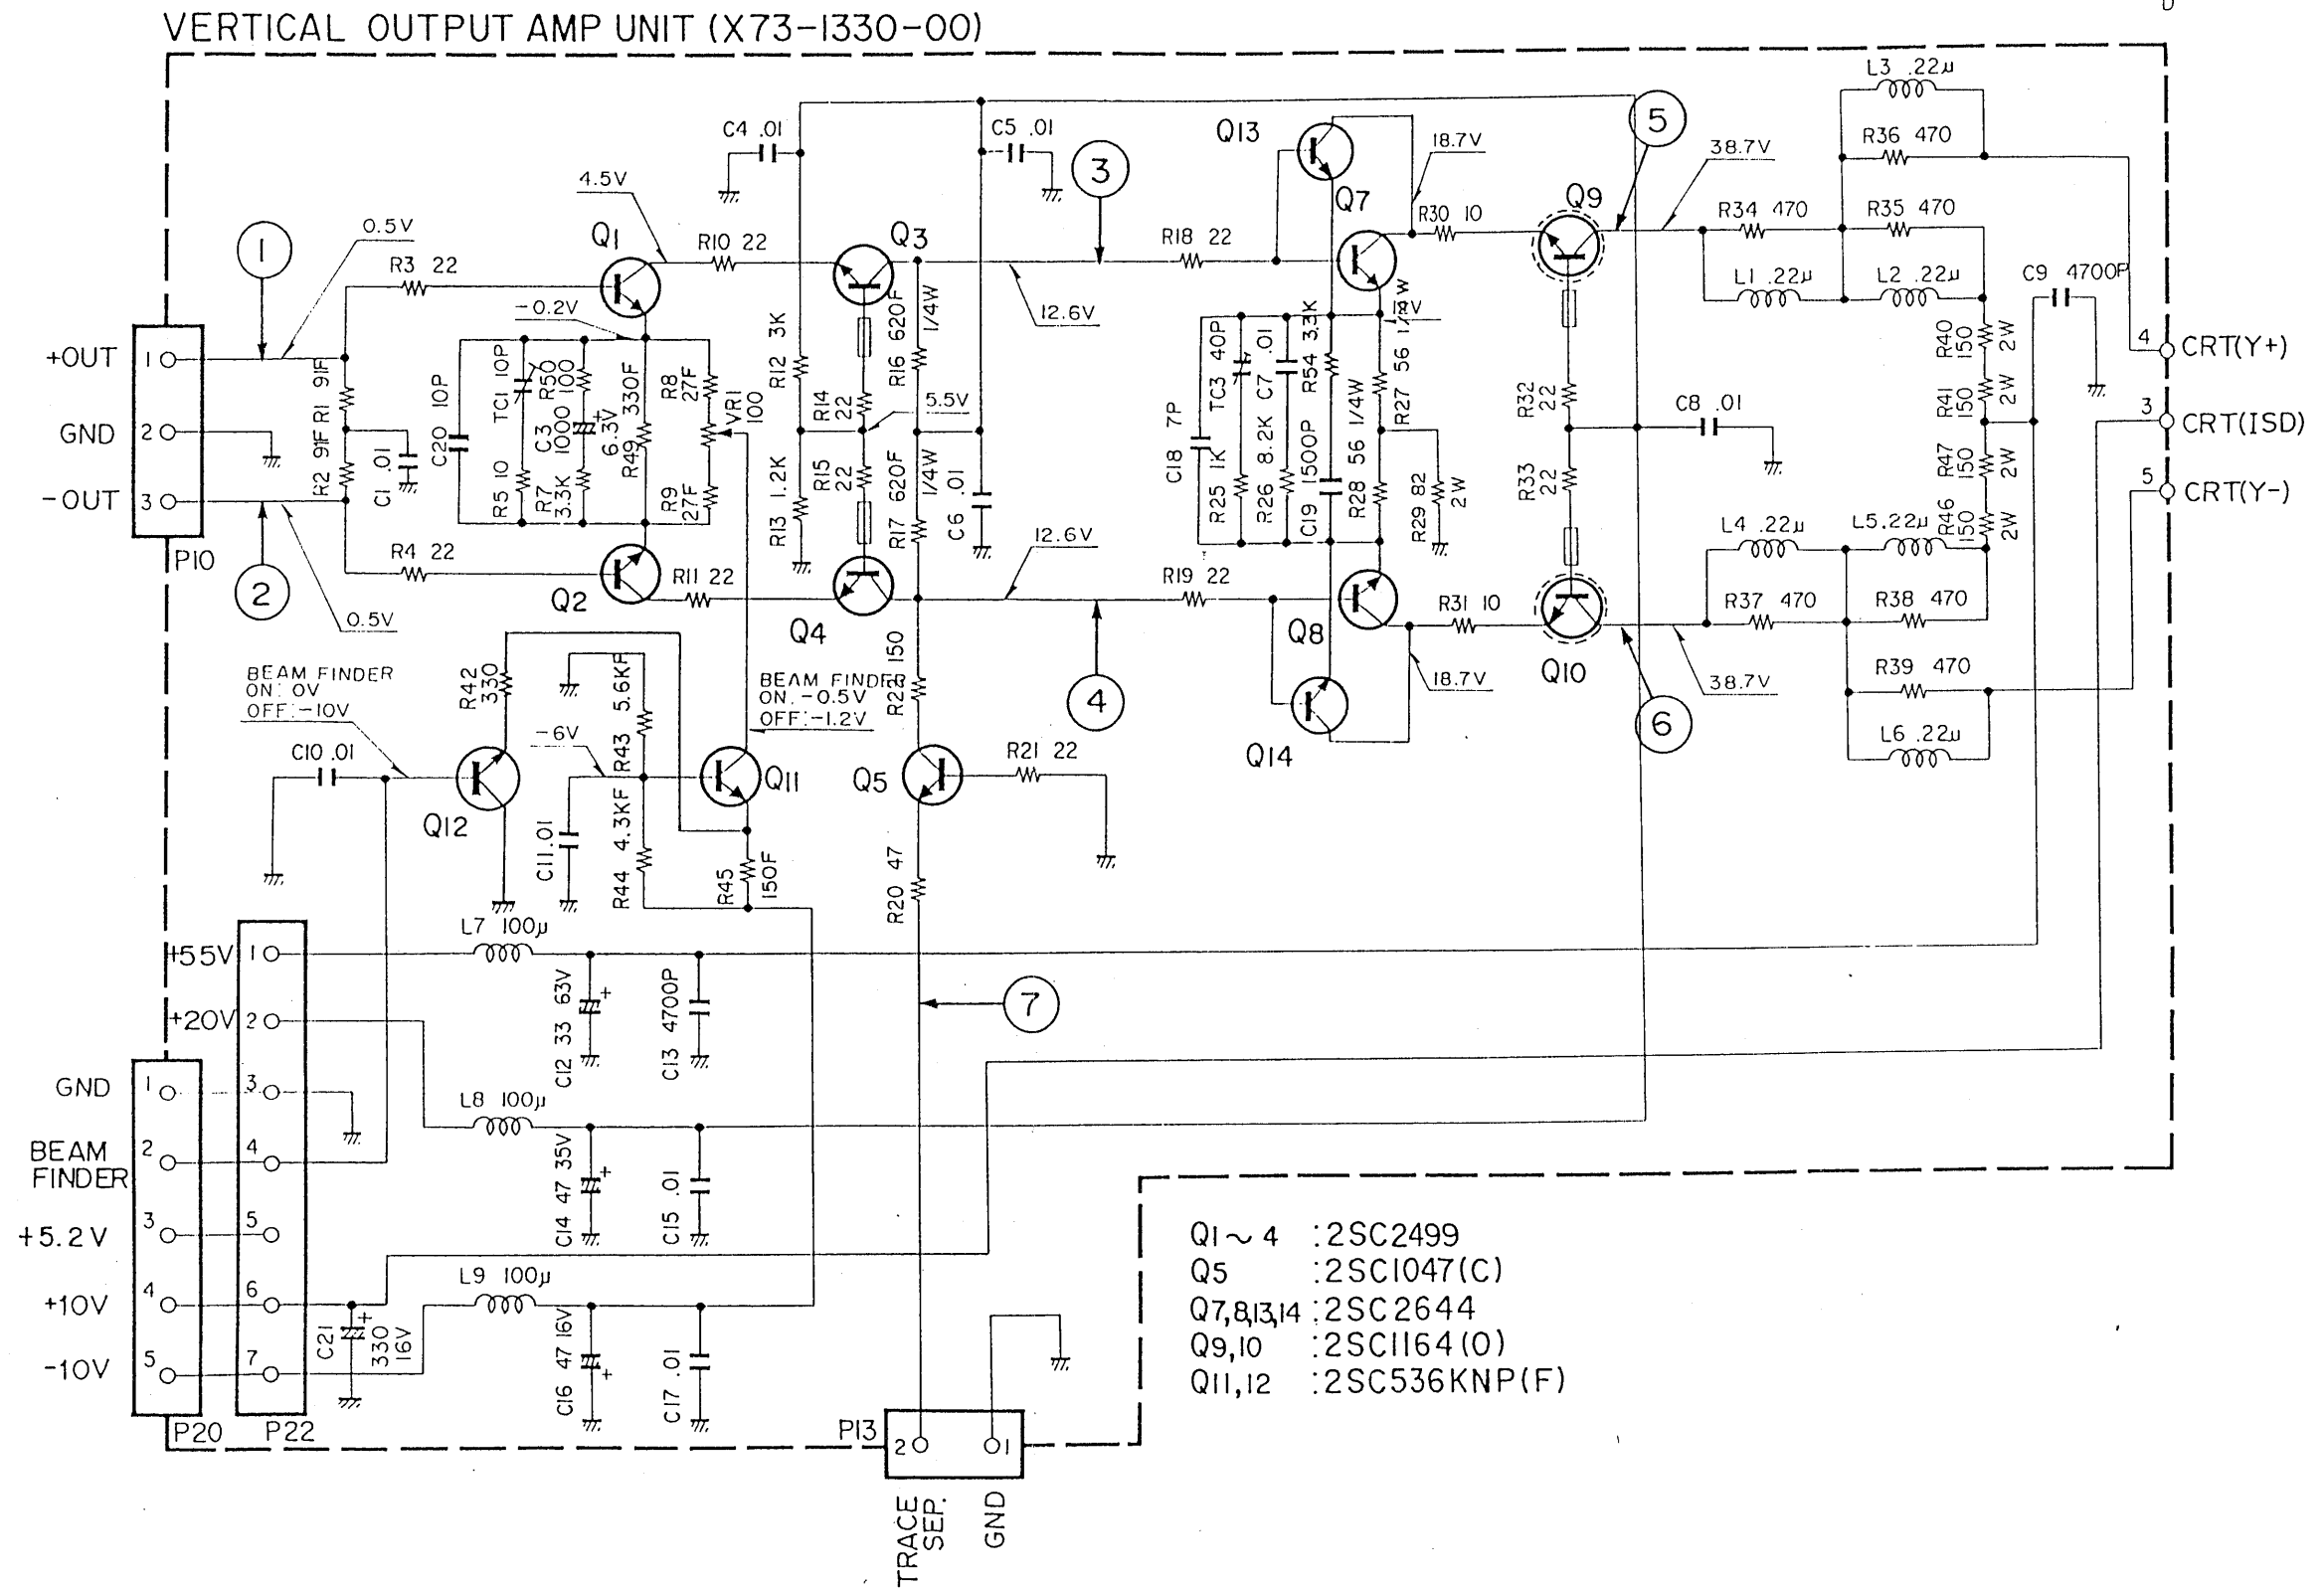




# PC BOARD

X74-1310-00

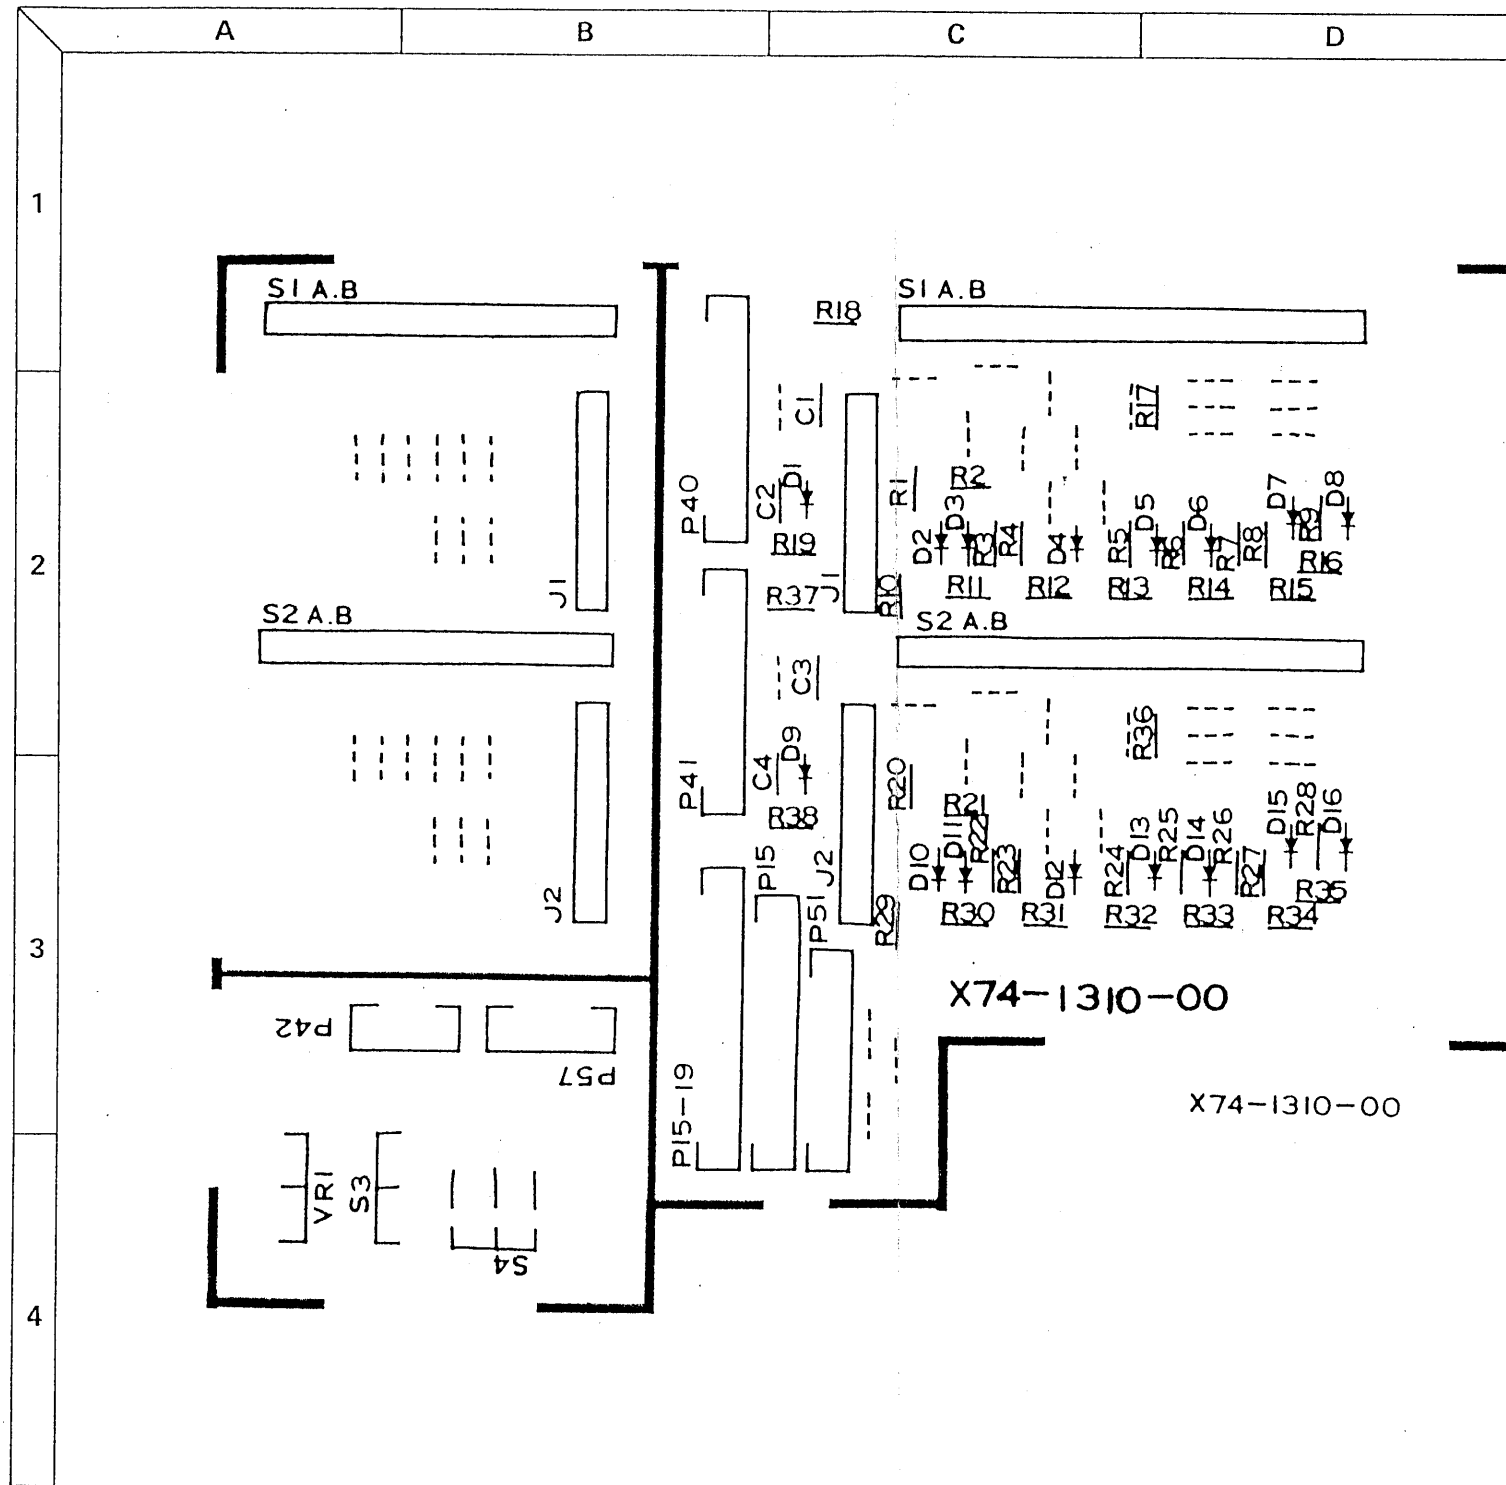


**CAUTION**  
 Because the silk symbols in P42 and P57 are reversed,  
 please refer to the Schematic Diagram.

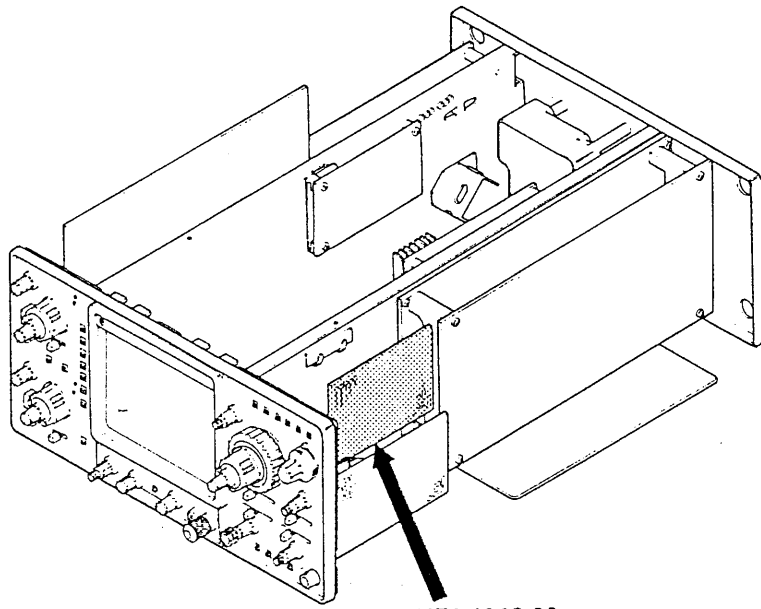

X74-1310-00  
(SWEEP ROTARY UNIT)



# SCHEMATIC DIAGRAM

(C5-2100A)

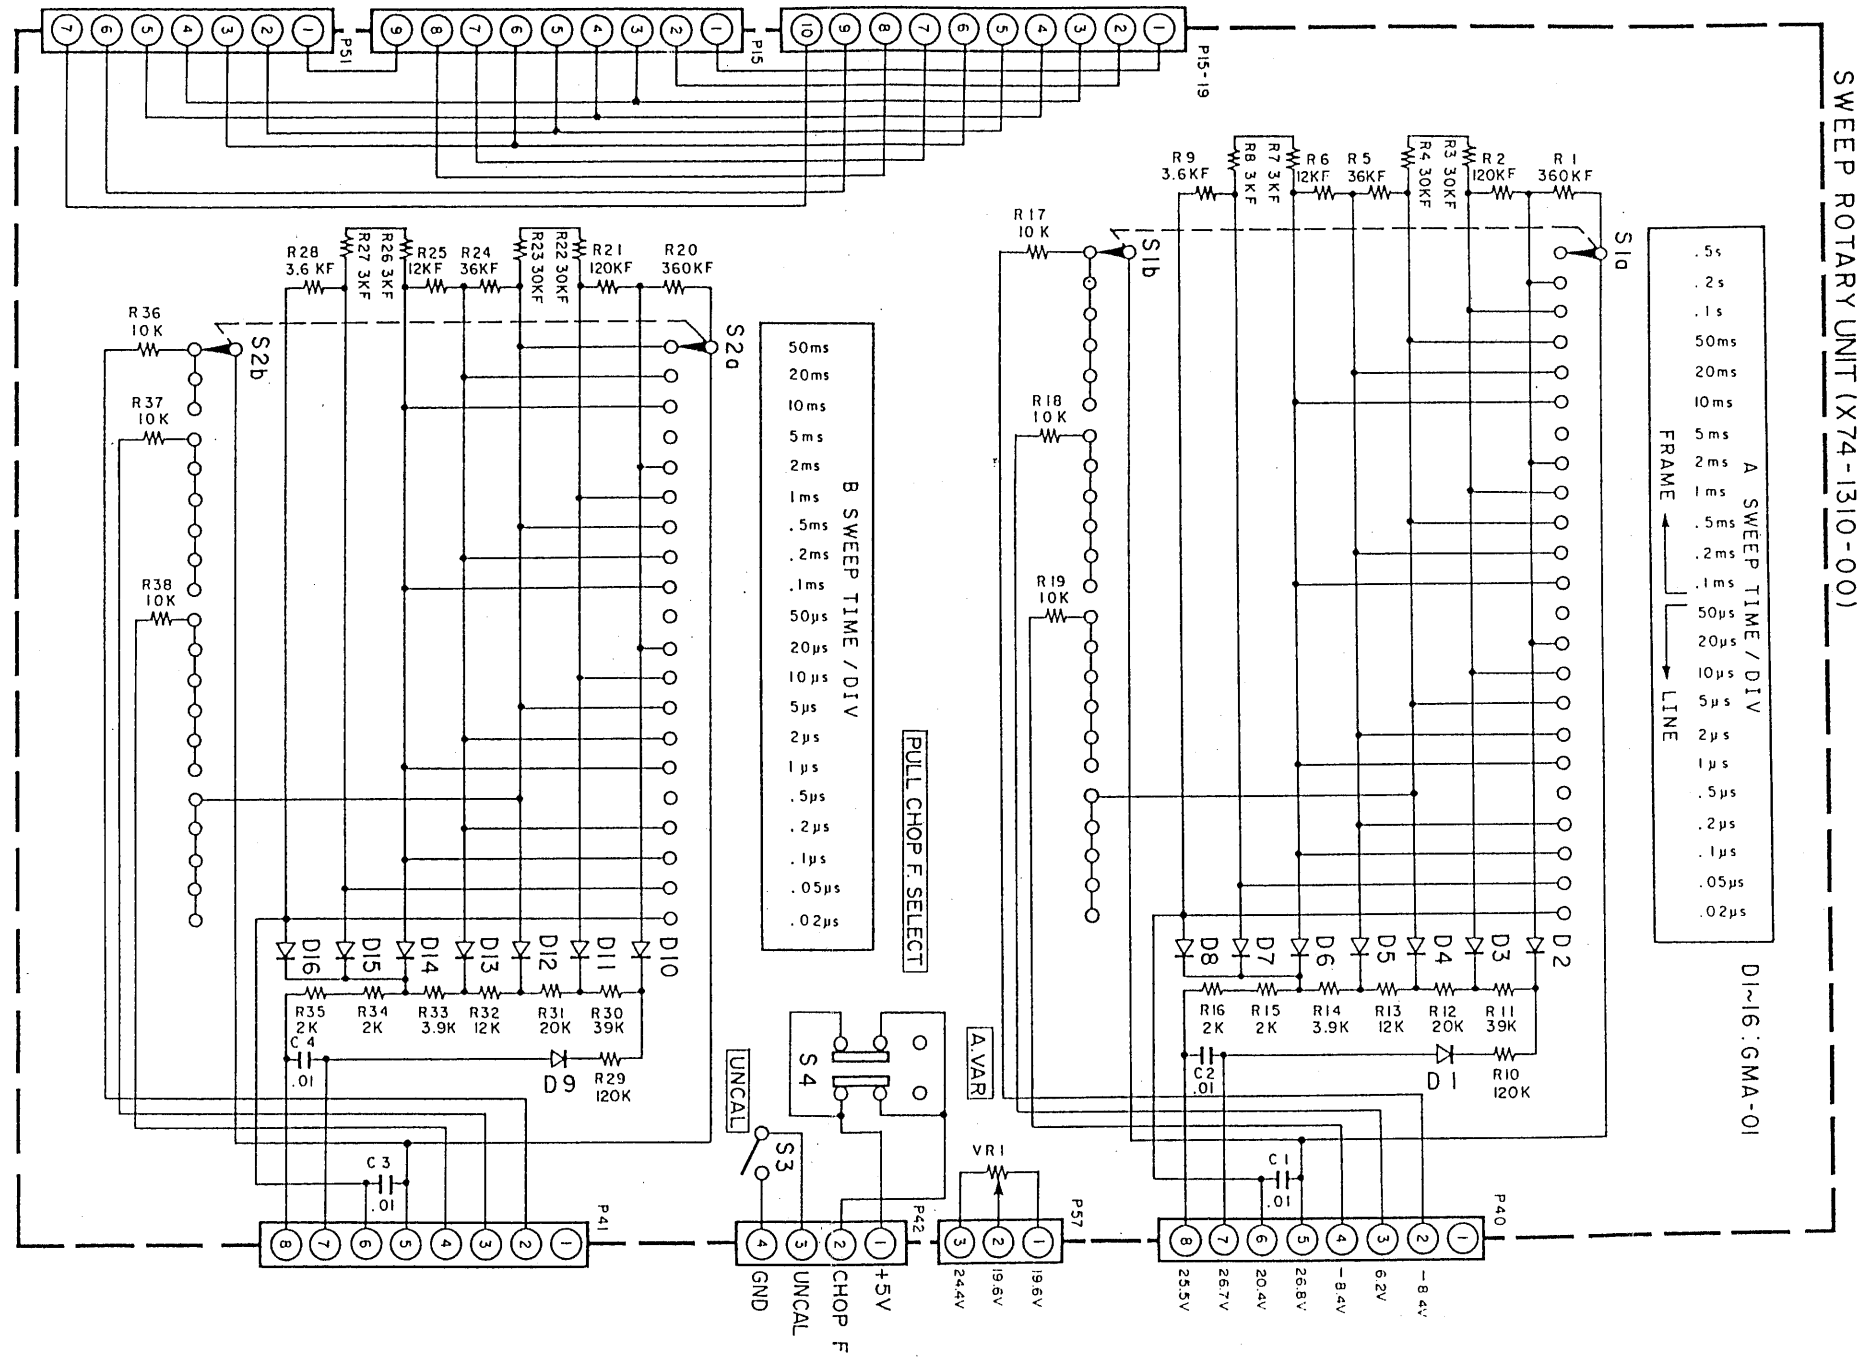


# PC BOARD

X74-1320-00

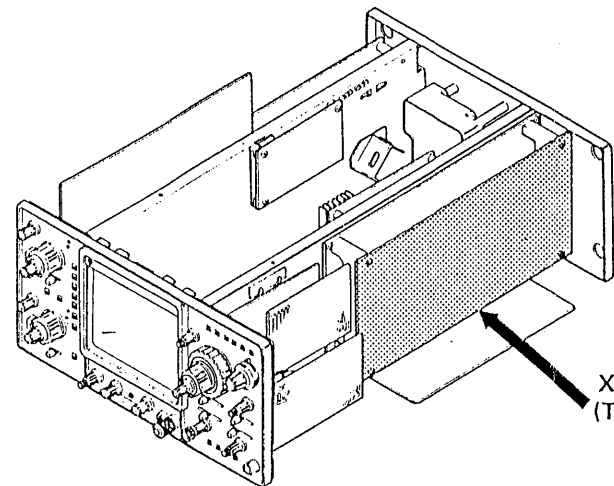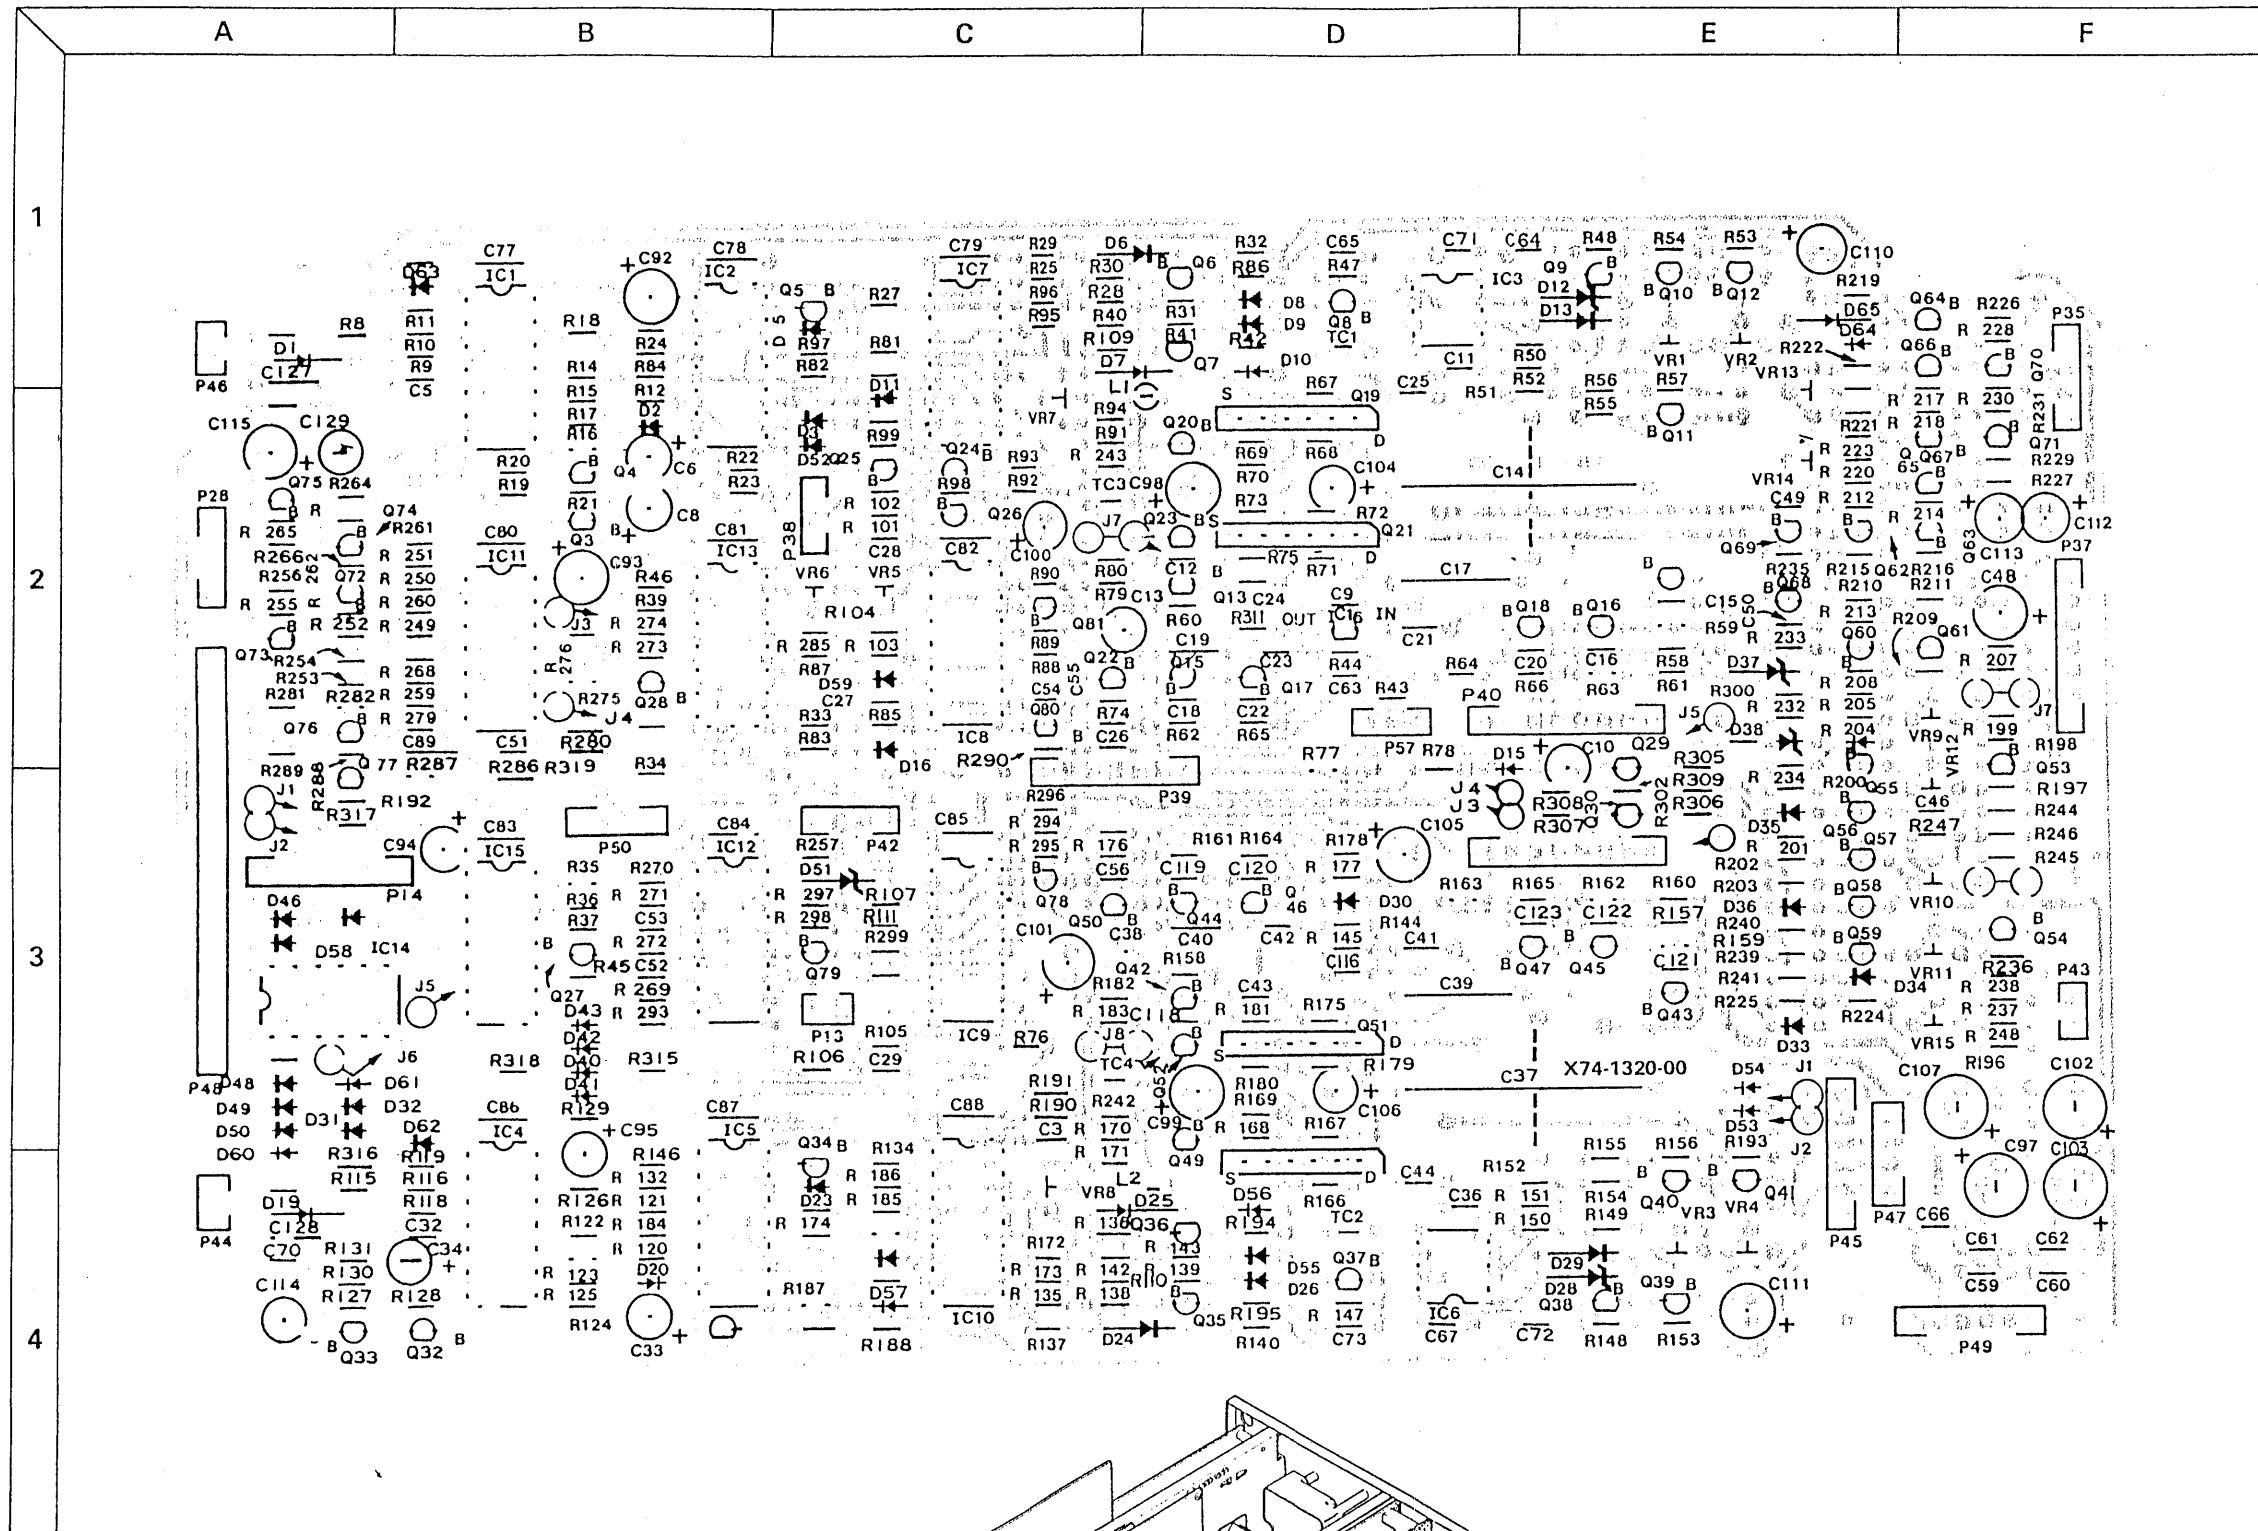


X74-1320-00  
(TRIG SWEEP UNIT)

X74-1320-00




















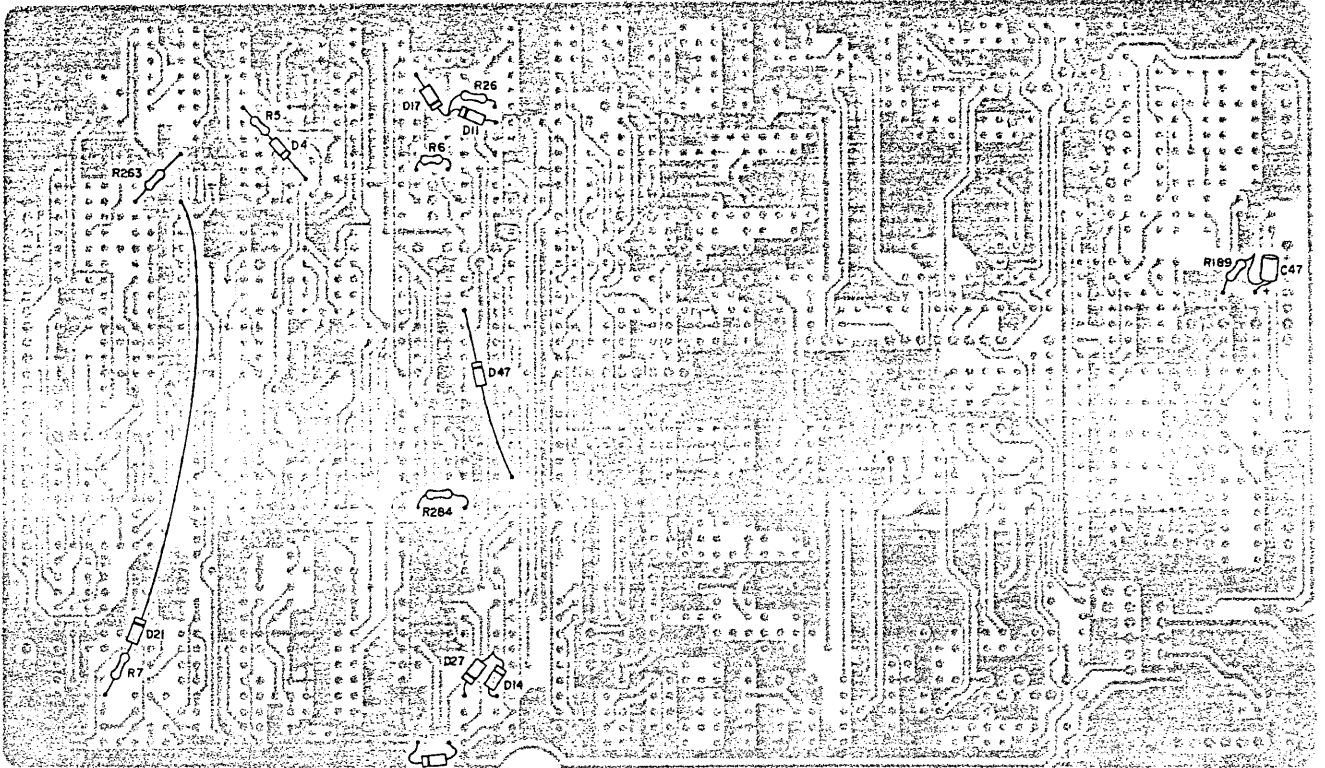


(Parts Side View)

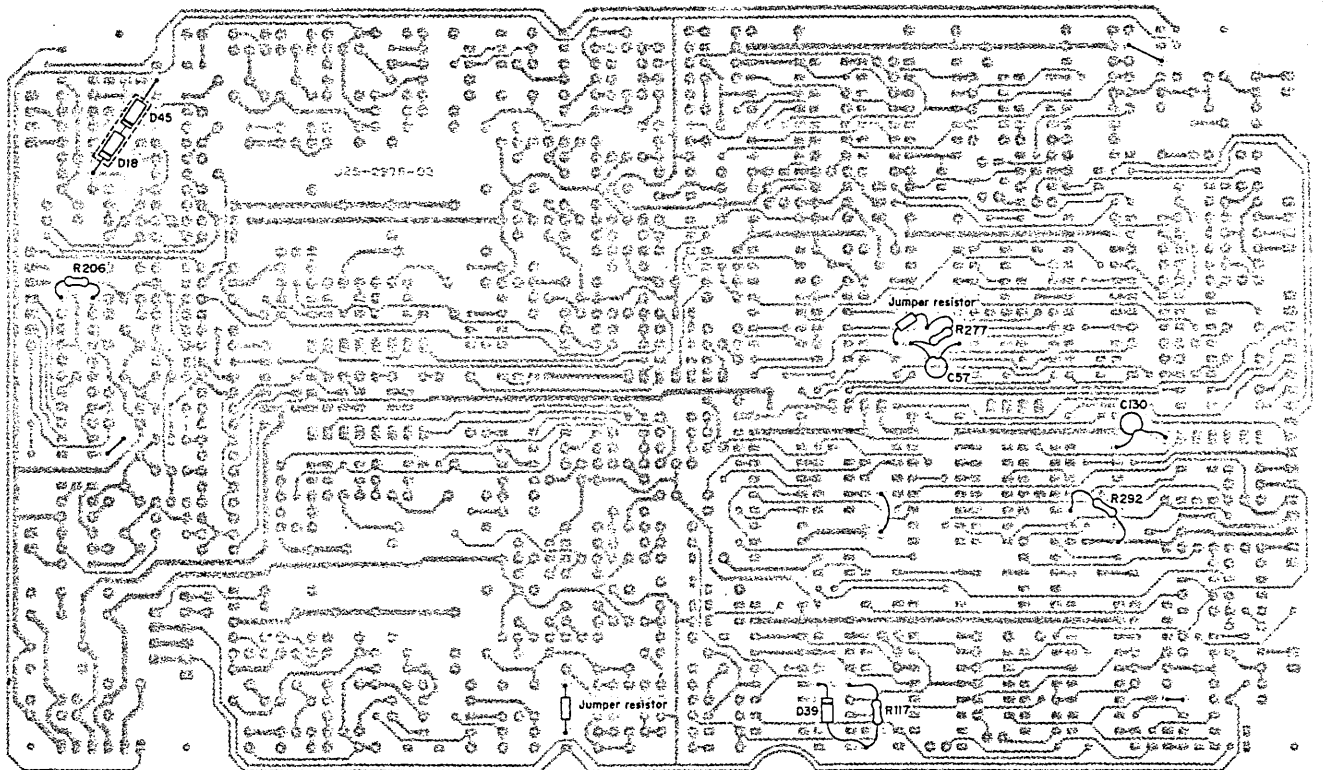

(Foil Side View)

# WAVEFORMS




↕ TRACE SEP: Fully CCW



# SCHEMATIC DIAGRAM


(CS-2100A)

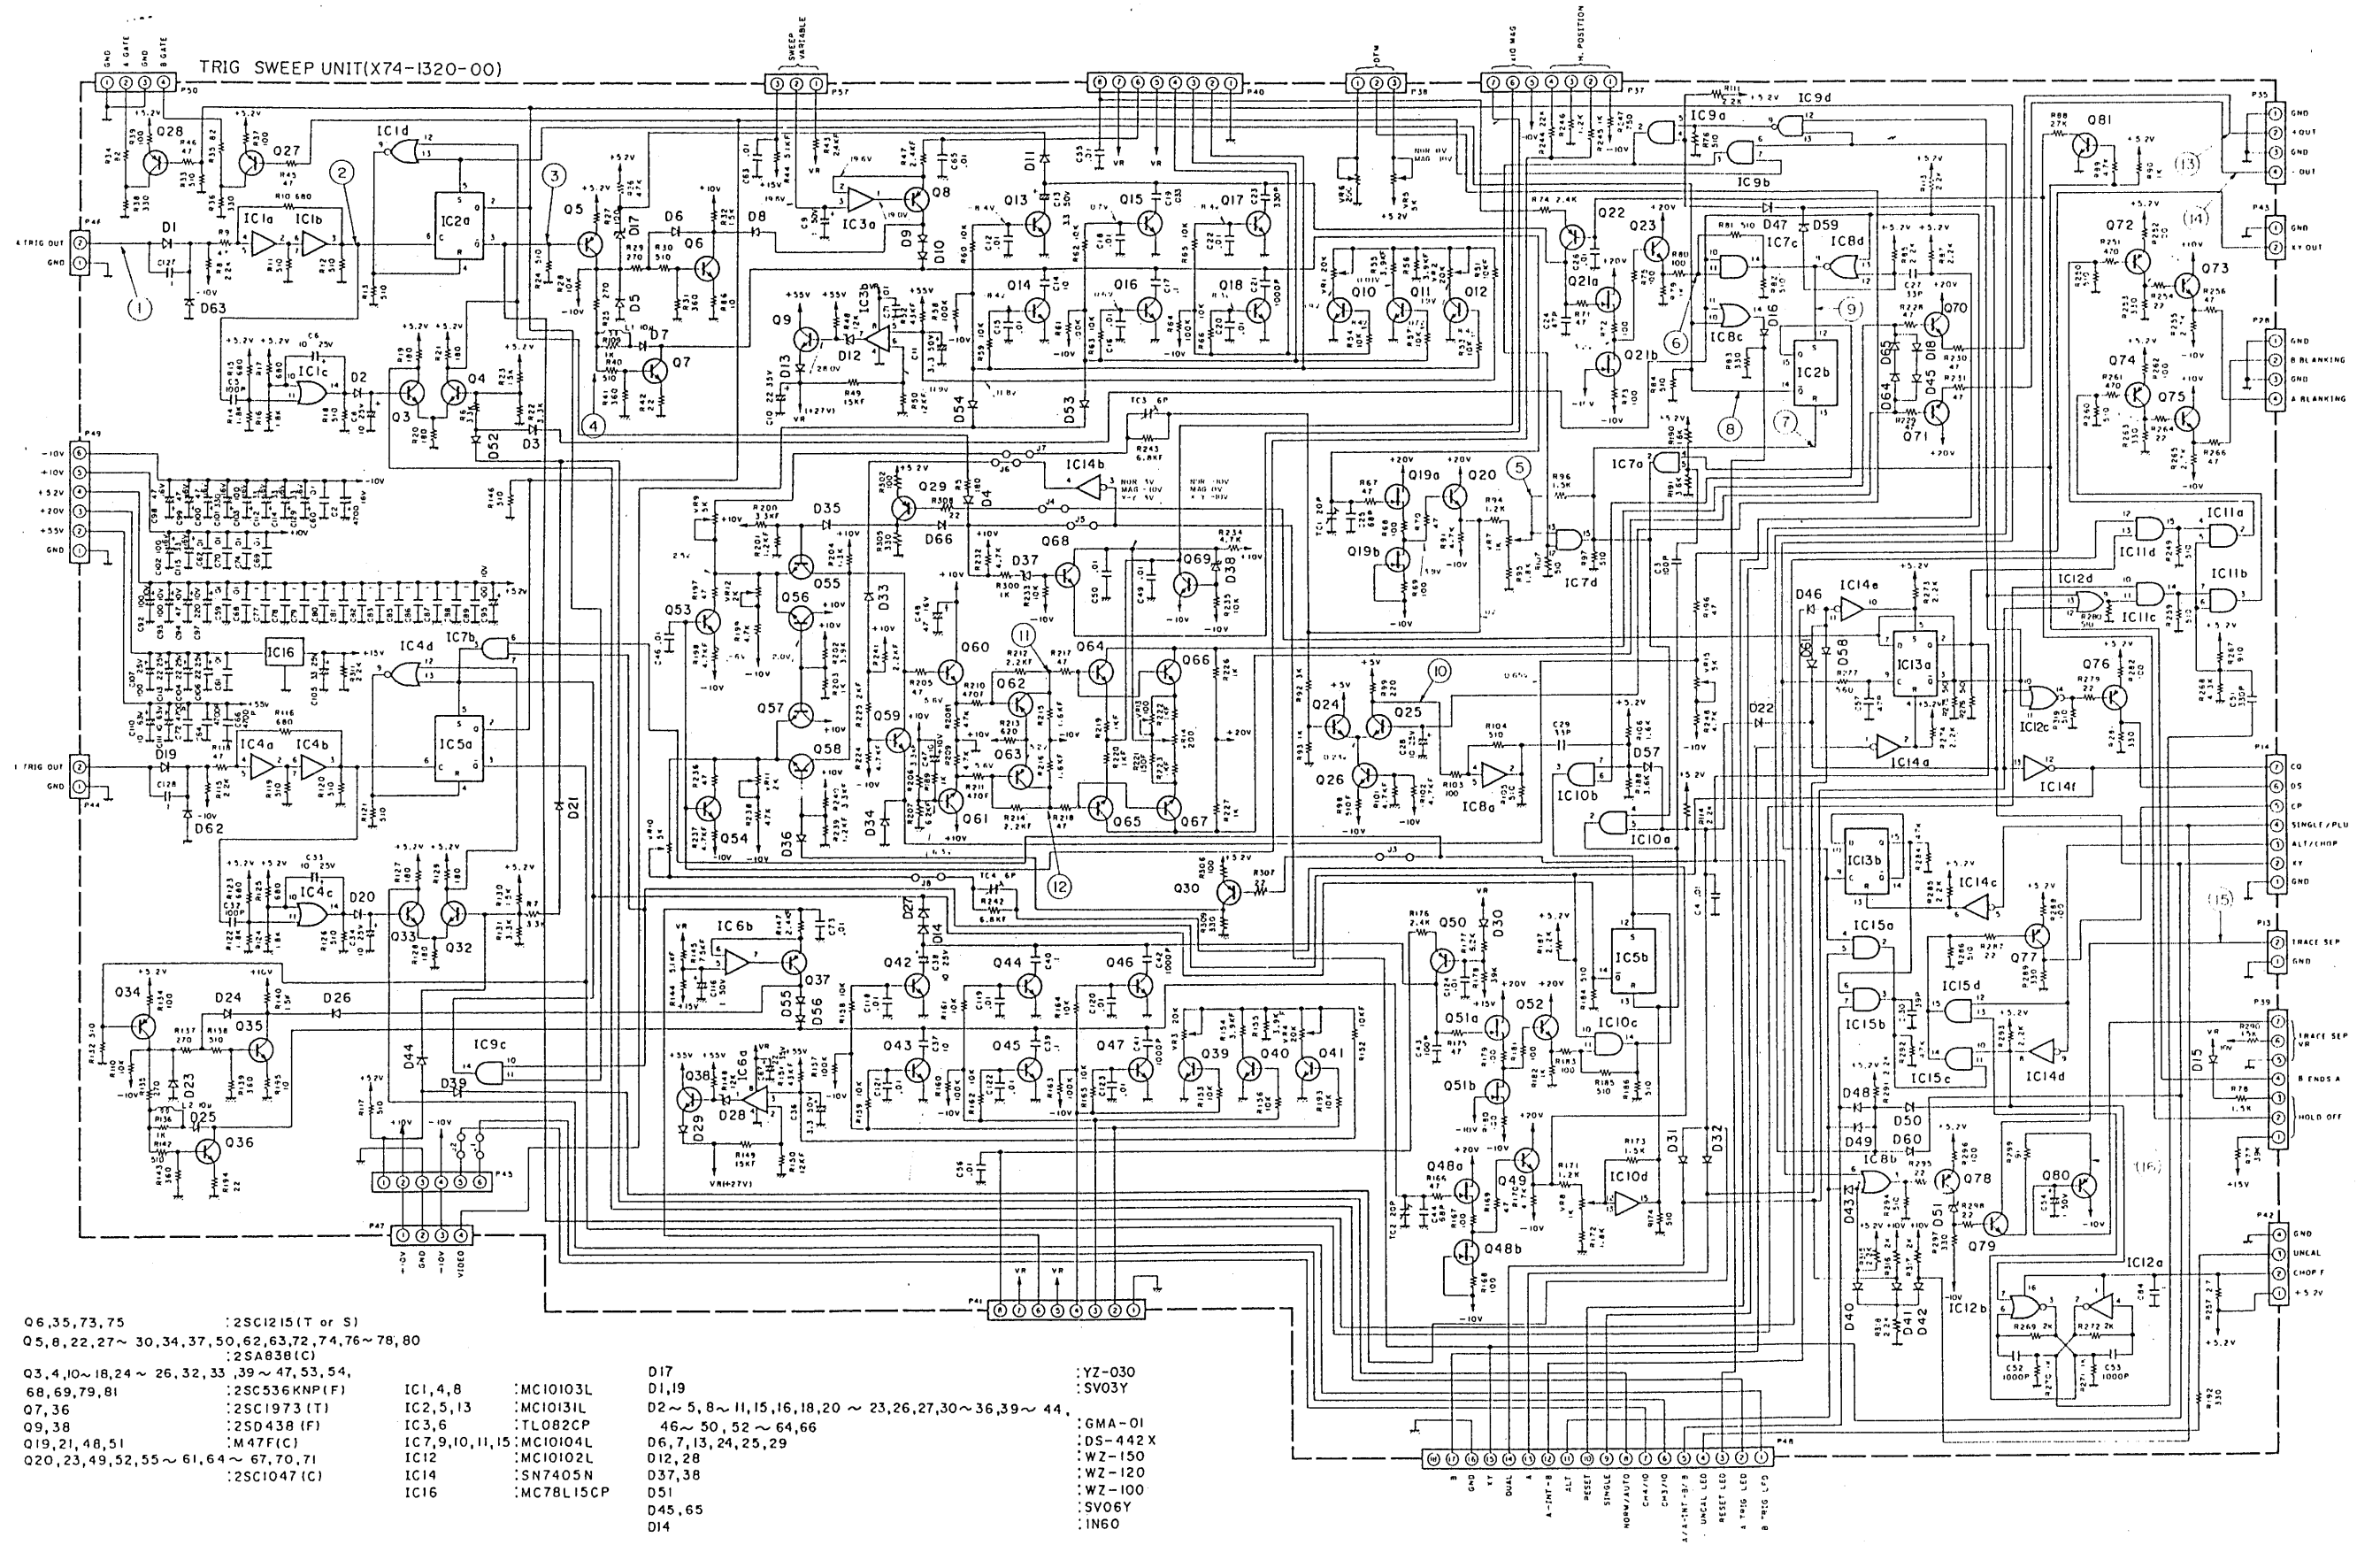


- |  |                  |                |            |  |          |
|--|------------------|----------------|------------|--|----------|
| Q6,35,73,75                                    | :2SC1215(T or S) | IC1,4,8        | :MC10103L  | D17  | :YZ-030  |
| Q5,8,22,27~30,34,37,50,62,63,72,74,76~78,80    | :2SA838(C)       | IC2,5,13       | :MC10131L  | D1,19                                      | :SV03Y   |
| Q3,4,10~18,24~26,32,33,39~47,53,54,68,69,79,81 | :2SC536K(NP(F))  | IC3,6          | :TL082CP   | D2~5,8~11,15,16,18,20~23,26,27,30~36,39~44 | :GMA-01  |
| Q7,36  | :2SC1973(T)      | IC7,9,10,11,15 | :MC10104L  | 46~50,52~64,66                             | :DS-442X |
| Q9,38  | :2SD438(F)       | IC12           | :MC10102L  | D6,7,13,24,25,29                           | :WZ-150  |
| Q19,21,48,51                                   | :M47F(C)         | IC14           | :SN7405N   | D37,38                                     | :WZ-120  |
| Q20,23,49,52,55~61,64~67,70,71                 | :2SC1047(C)      | IC16           | :MC78L15CP | D51  | :WZ-100  |
|  |                  |                |            | D45,65                                     | :SV06Y   |
|  |                  |                |            | D14  | :IN60    |

# PC BOARD

X74-1230-00

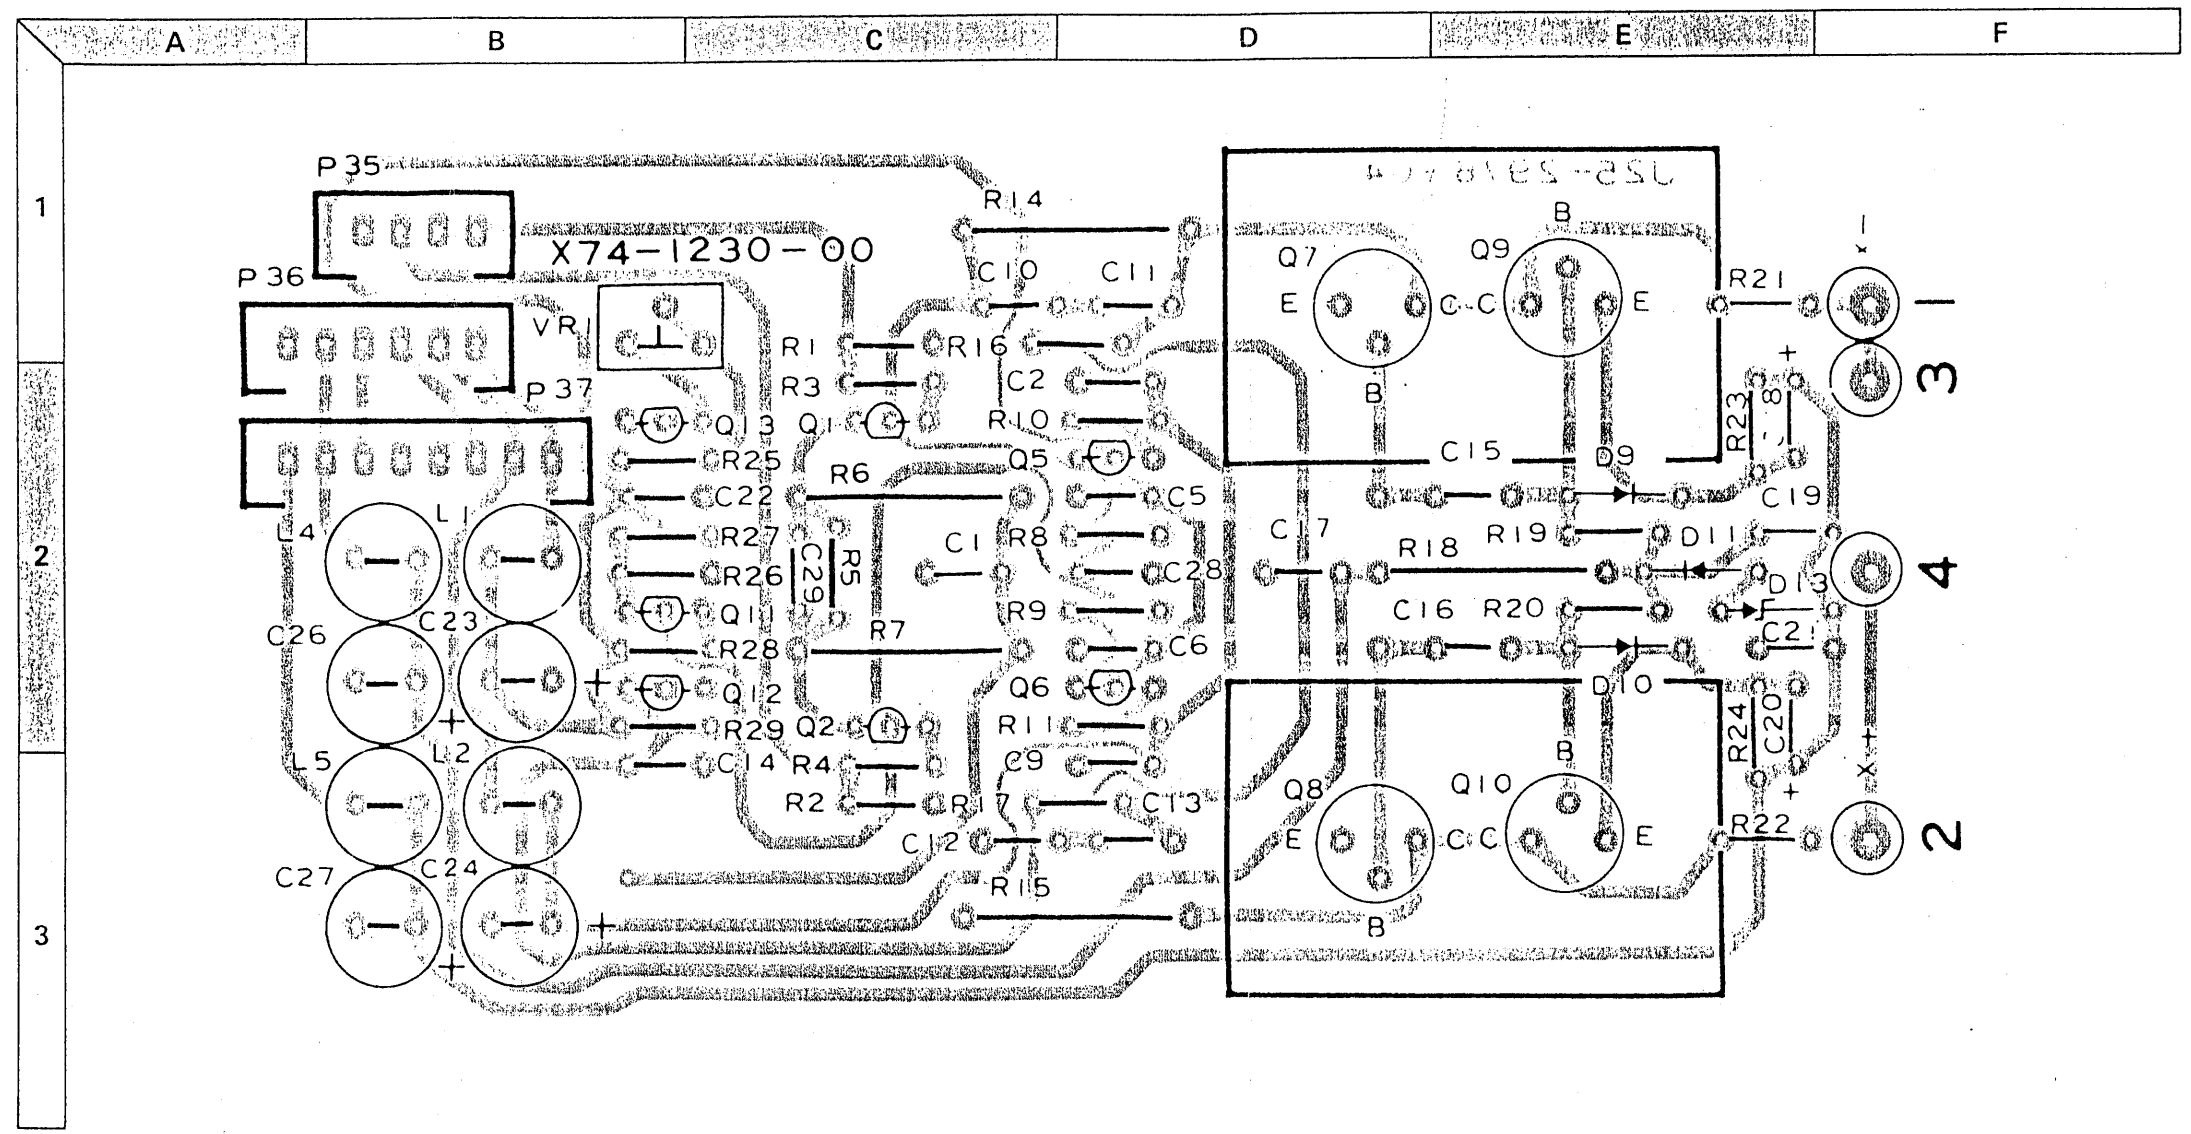




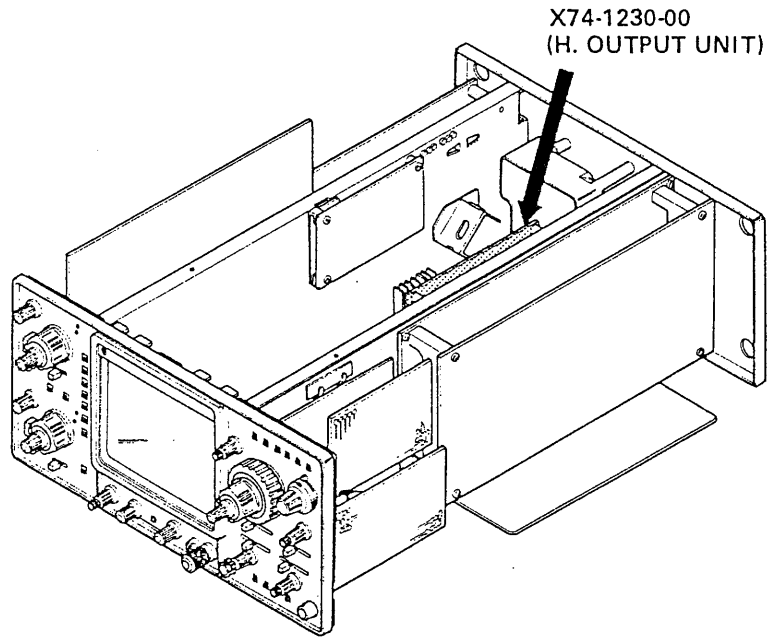


# WAVEFORMS

①-1




H.DISPLAY: X-Y

①-2




③-1 ④-1




H.DISPLAY: X-Y

②-1




H.DISPLAY: X-Y


②-2



③-2




④-2



# SCHEMATIC DIAGRAM


## HORIZONTAL OUTPUT AMP UNIT (X74-1230-00)

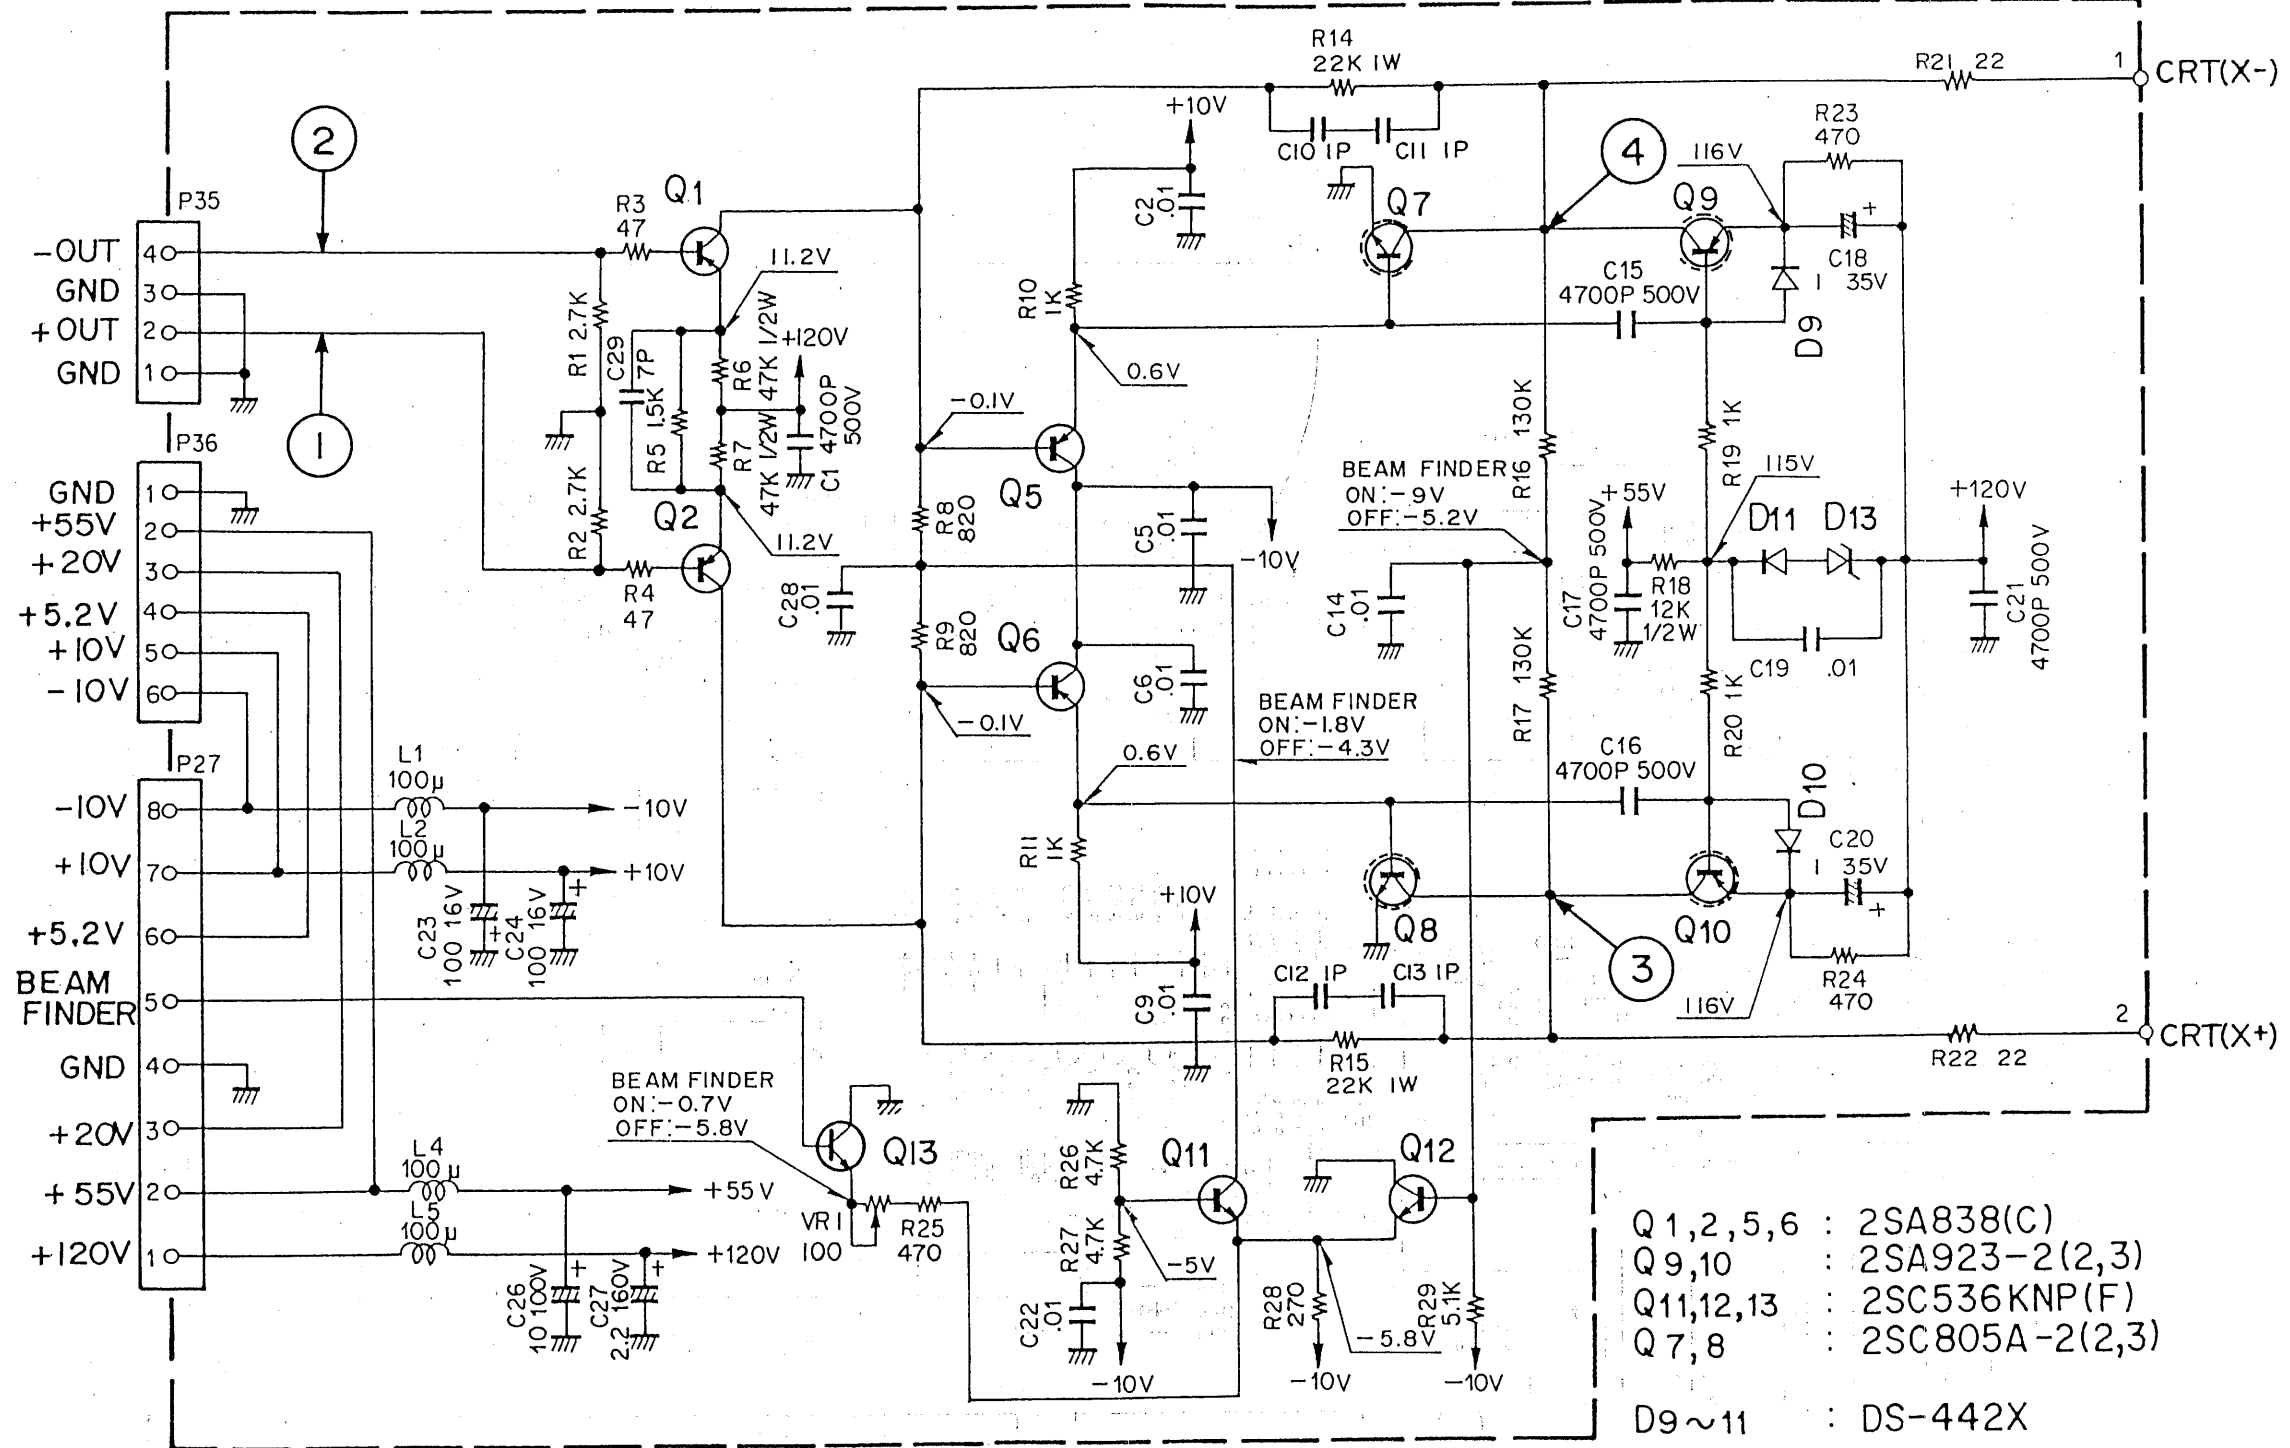

- Q 1,2,5,6 : 2SA838(C)
- Q 9,10 : 2SA923-2(2,3)
- Q 11,12,13 : 2SC536KNP(F)
- Q 7,8 : 2SC805A-2(2,3)
- D9~11 : DS-442X
- D13 : WZ-050


X77-1130-00

# PC BOARD

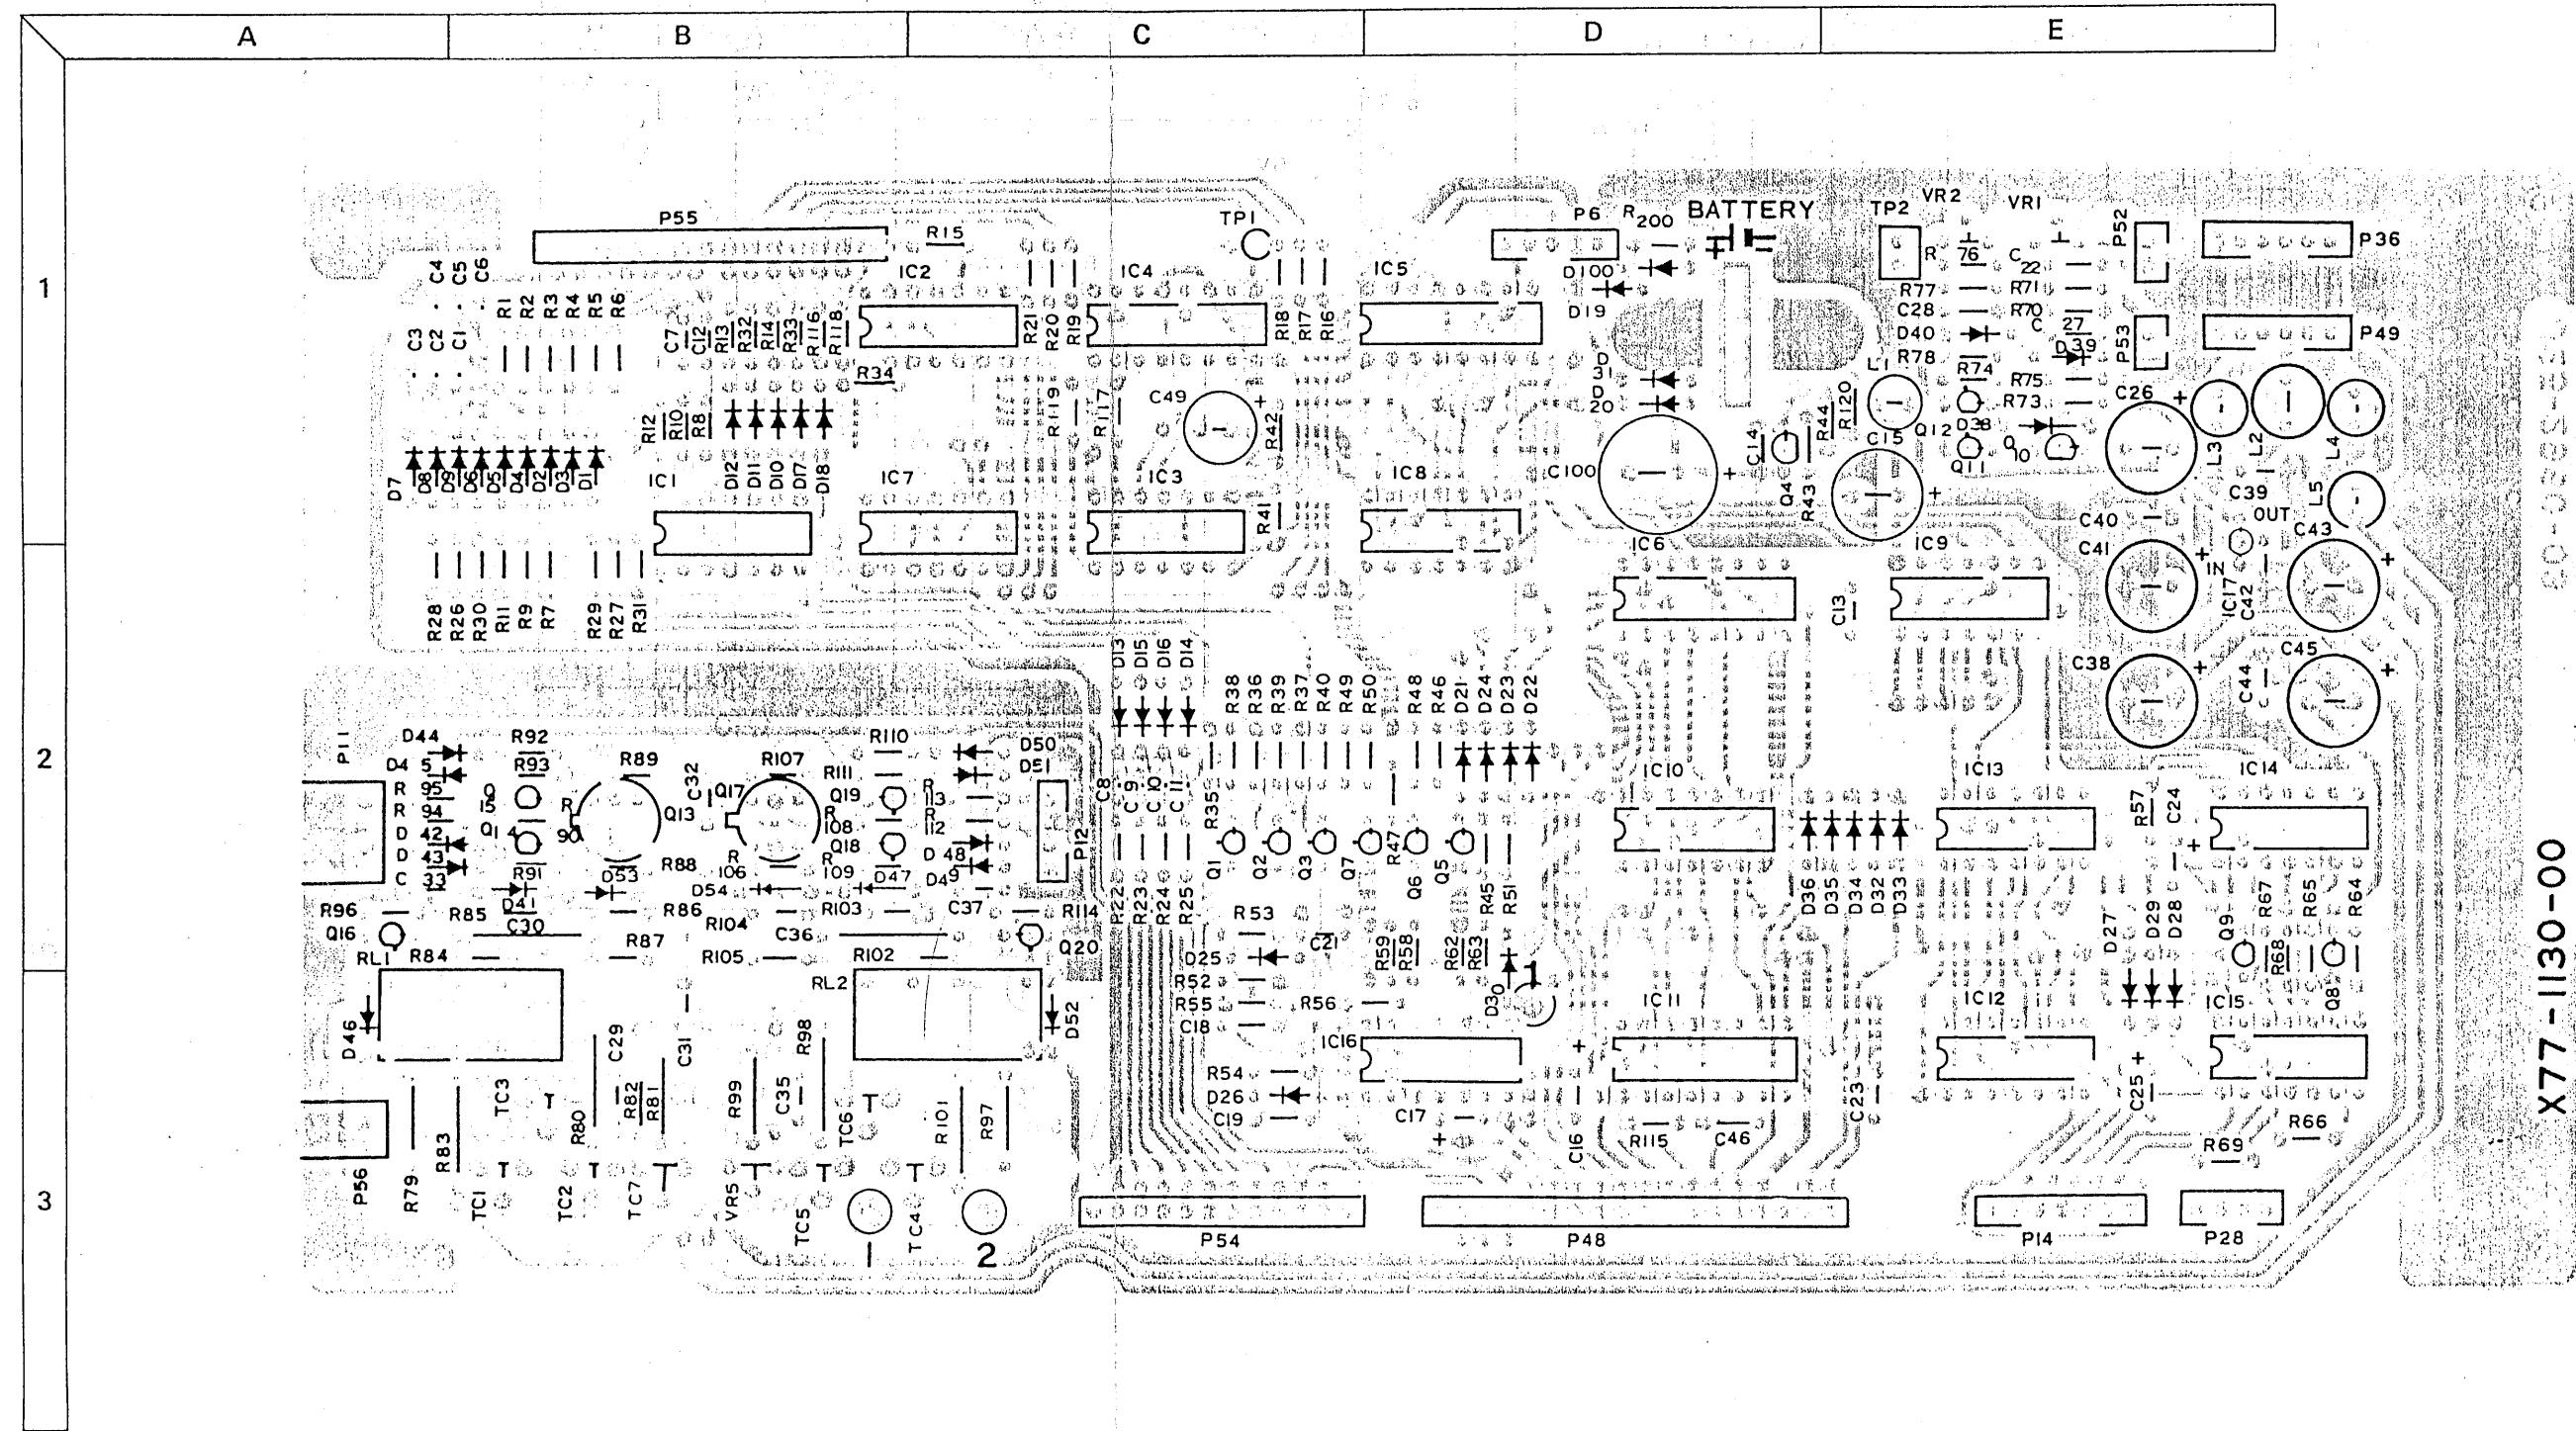


X77-1130-00

X77-1130-00

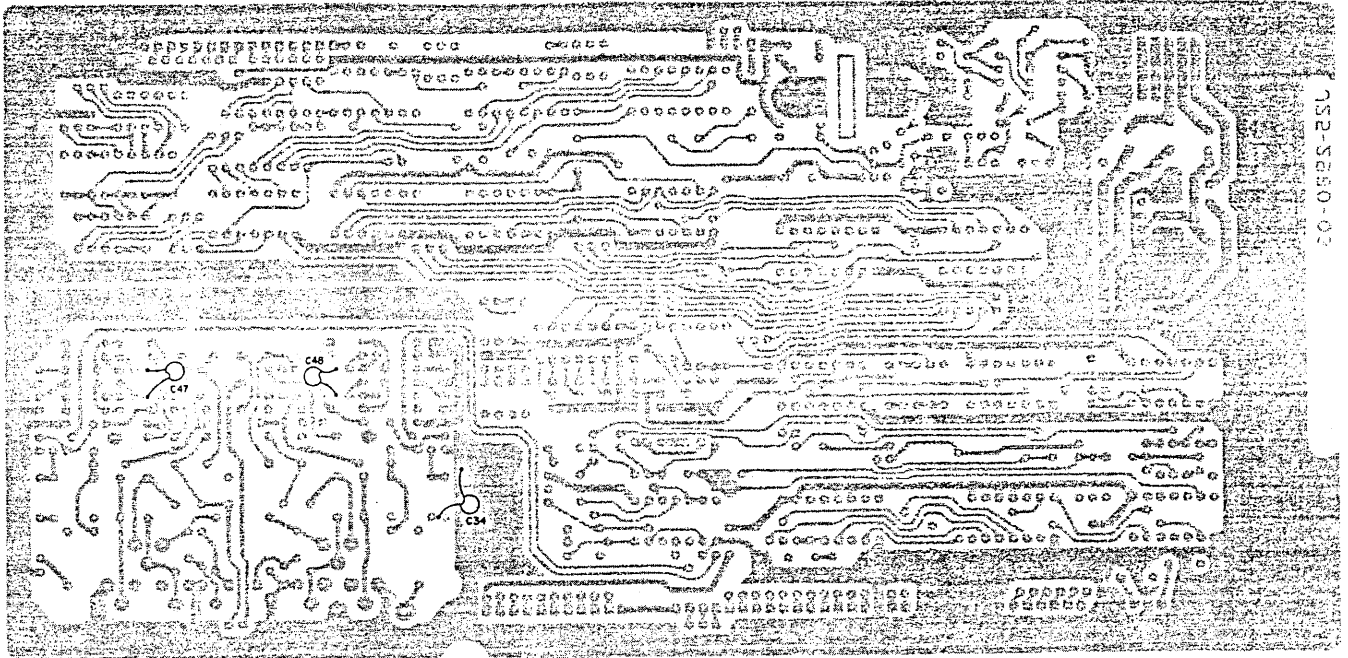


(Foil Side View)

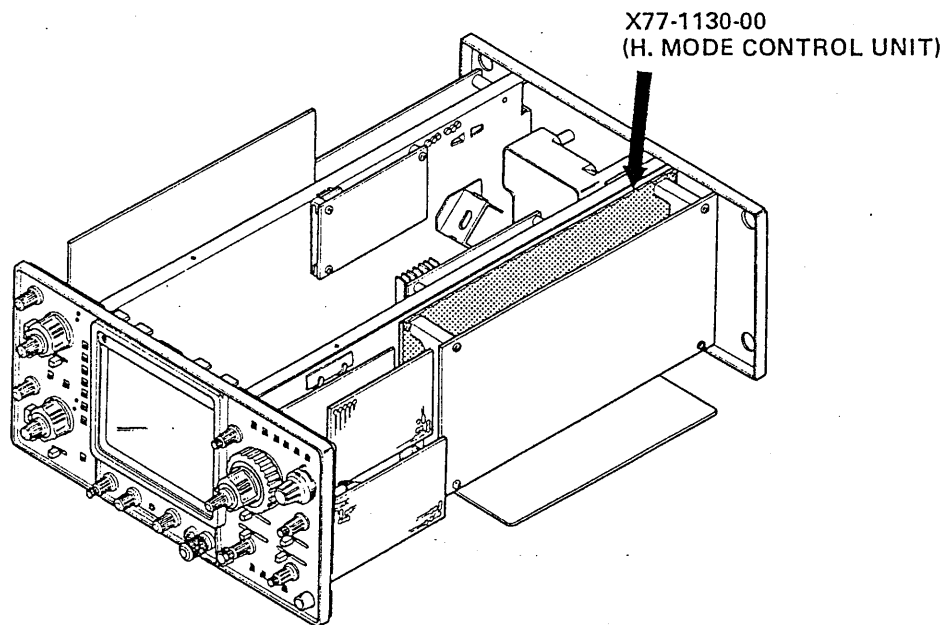


# WAVEFORMS


①




②③④



⑤



# HORIZONTAL MODE CONTROL UNIT (X77-1130-00)

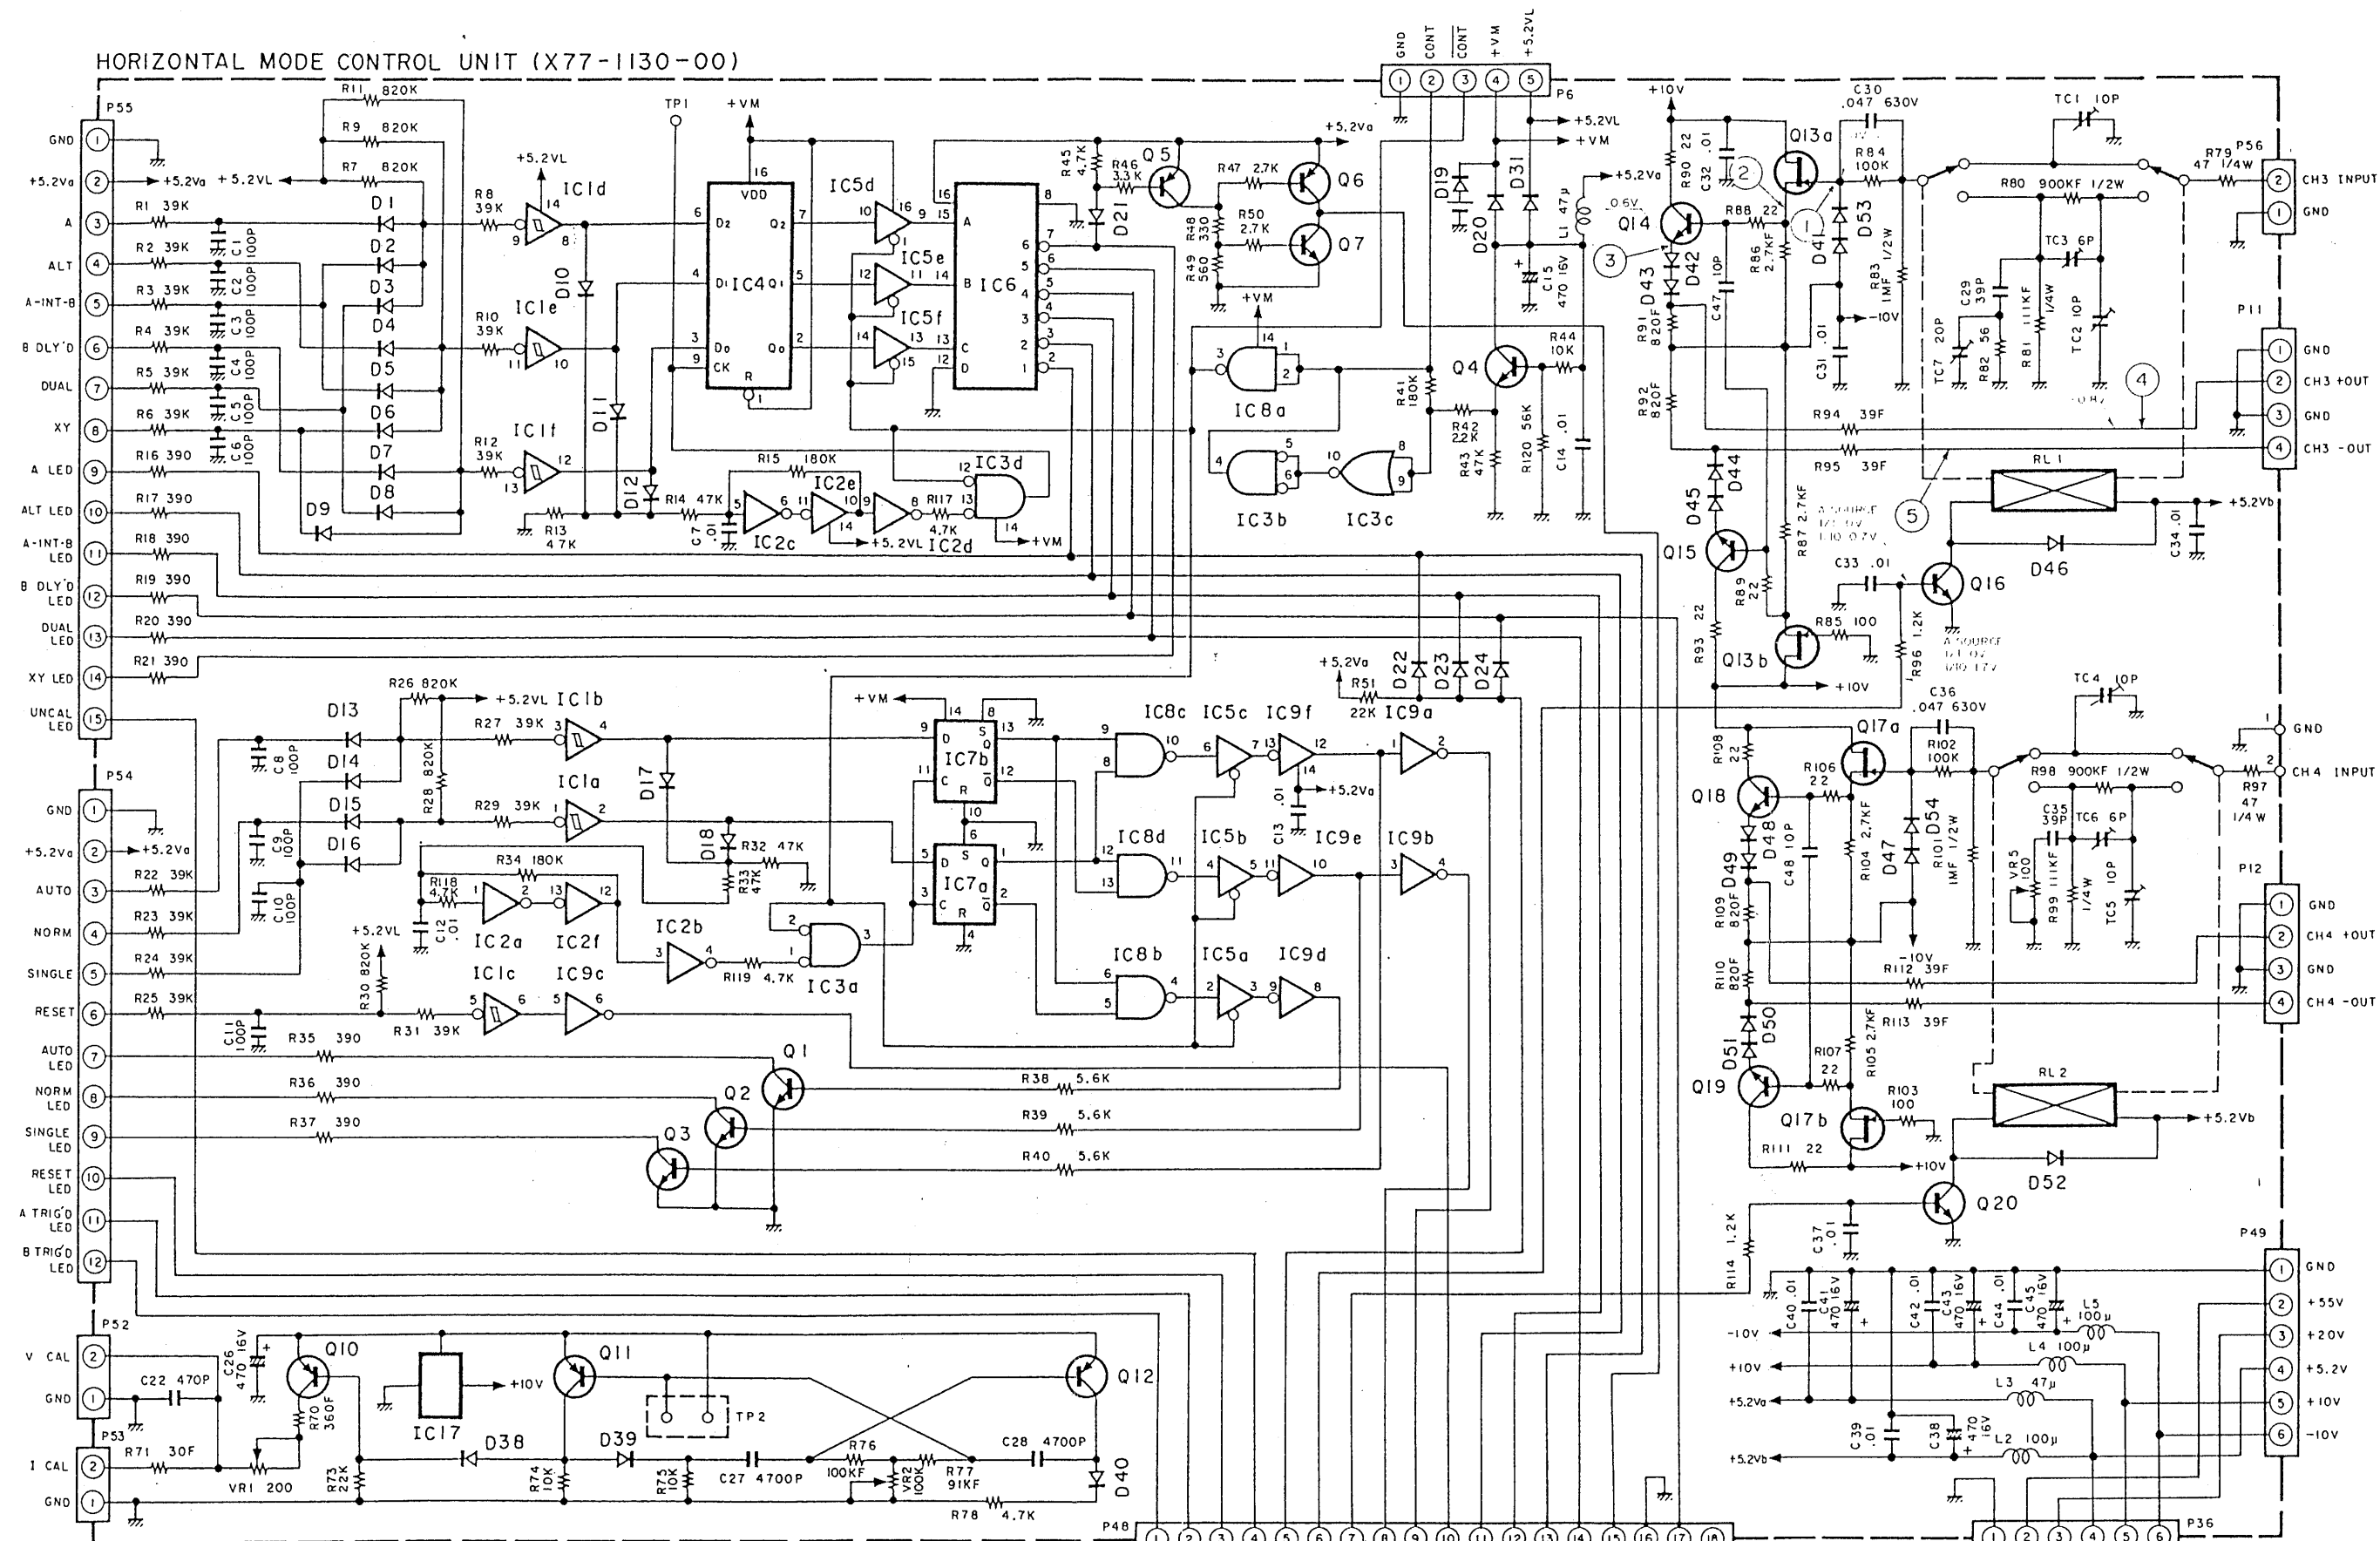


- |                   |                             |                                 |
|-------------------|-----------------------------|---------------------------------|
| IC1 : MCI4584BCP  | IC6 : SN7442AN              | Q1~4,7 : 2SC536KNP(F)           |
| IC2 : MCI4069UBCP | IC7 : MCI4013BCP            | Q5,6,10~12 : 2SA608KNP(F)       |
| IC3 : MCI4001BCP  | IC8 : MCI4011BCP            | Q13,17 : 2N1901                 |
| IC4 : MCI4174BCP  | IC9 : SN74LS04N             | Q14,15,18,19 : 2SC1215 (T or S) |
| IC5 : MCI4503BCP  | IC17 : FS7805L or MC78L05CP | Q16,20 : 2SD438(F)              |

- D1~24, 31, 39, 40, 42~46, 48~54 : DS442X  
D38 : IN60  
D41, 47 : IS1544A


# PC BOARD

X77-1110-00

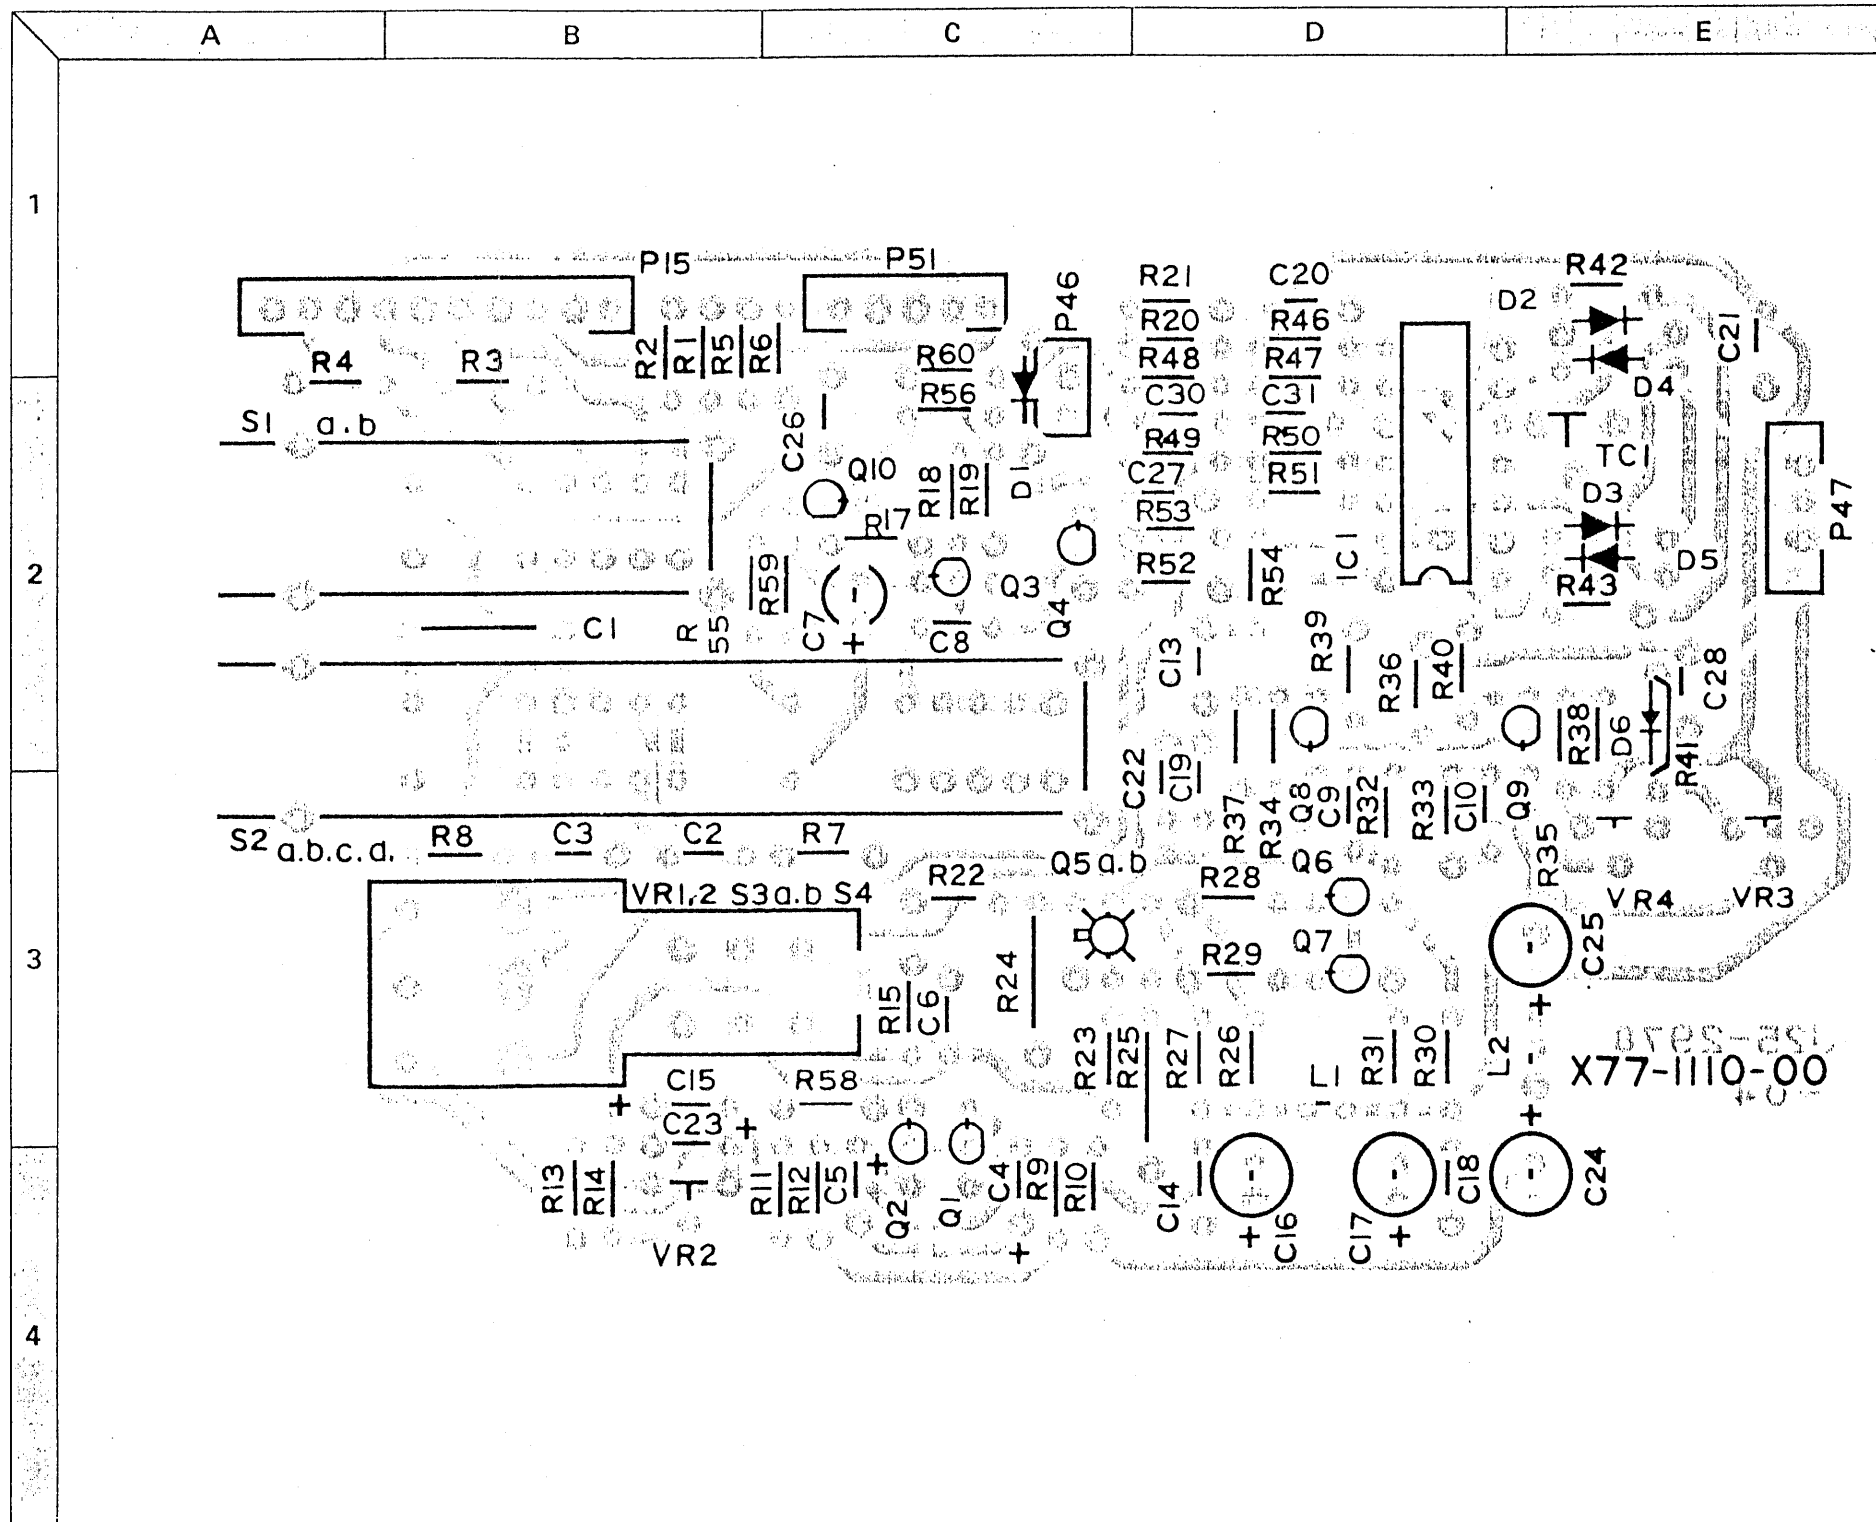






X77-1110-00



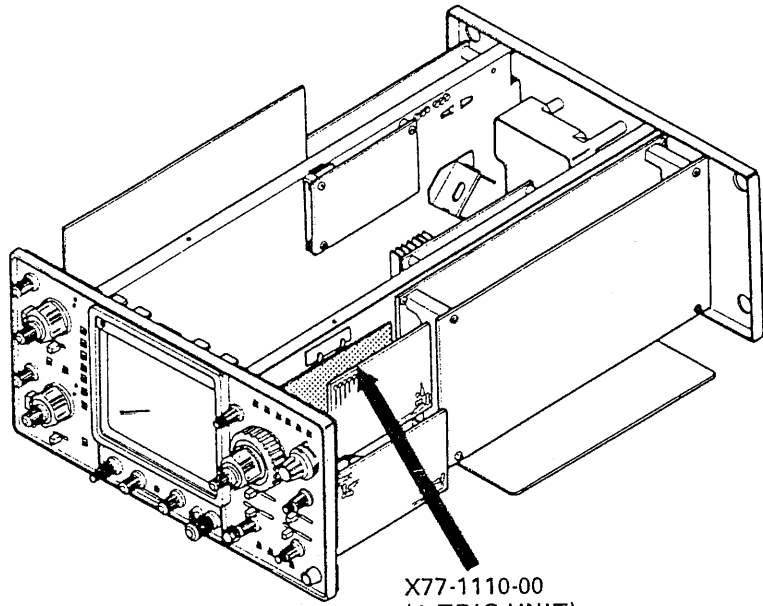


X77-1110-00  
(A TRIG UNIT)

# WAVEFORMS



# SCHEMATIC DIAGRAM

A TRIG SWITCH UNIT (X77-1110-00)

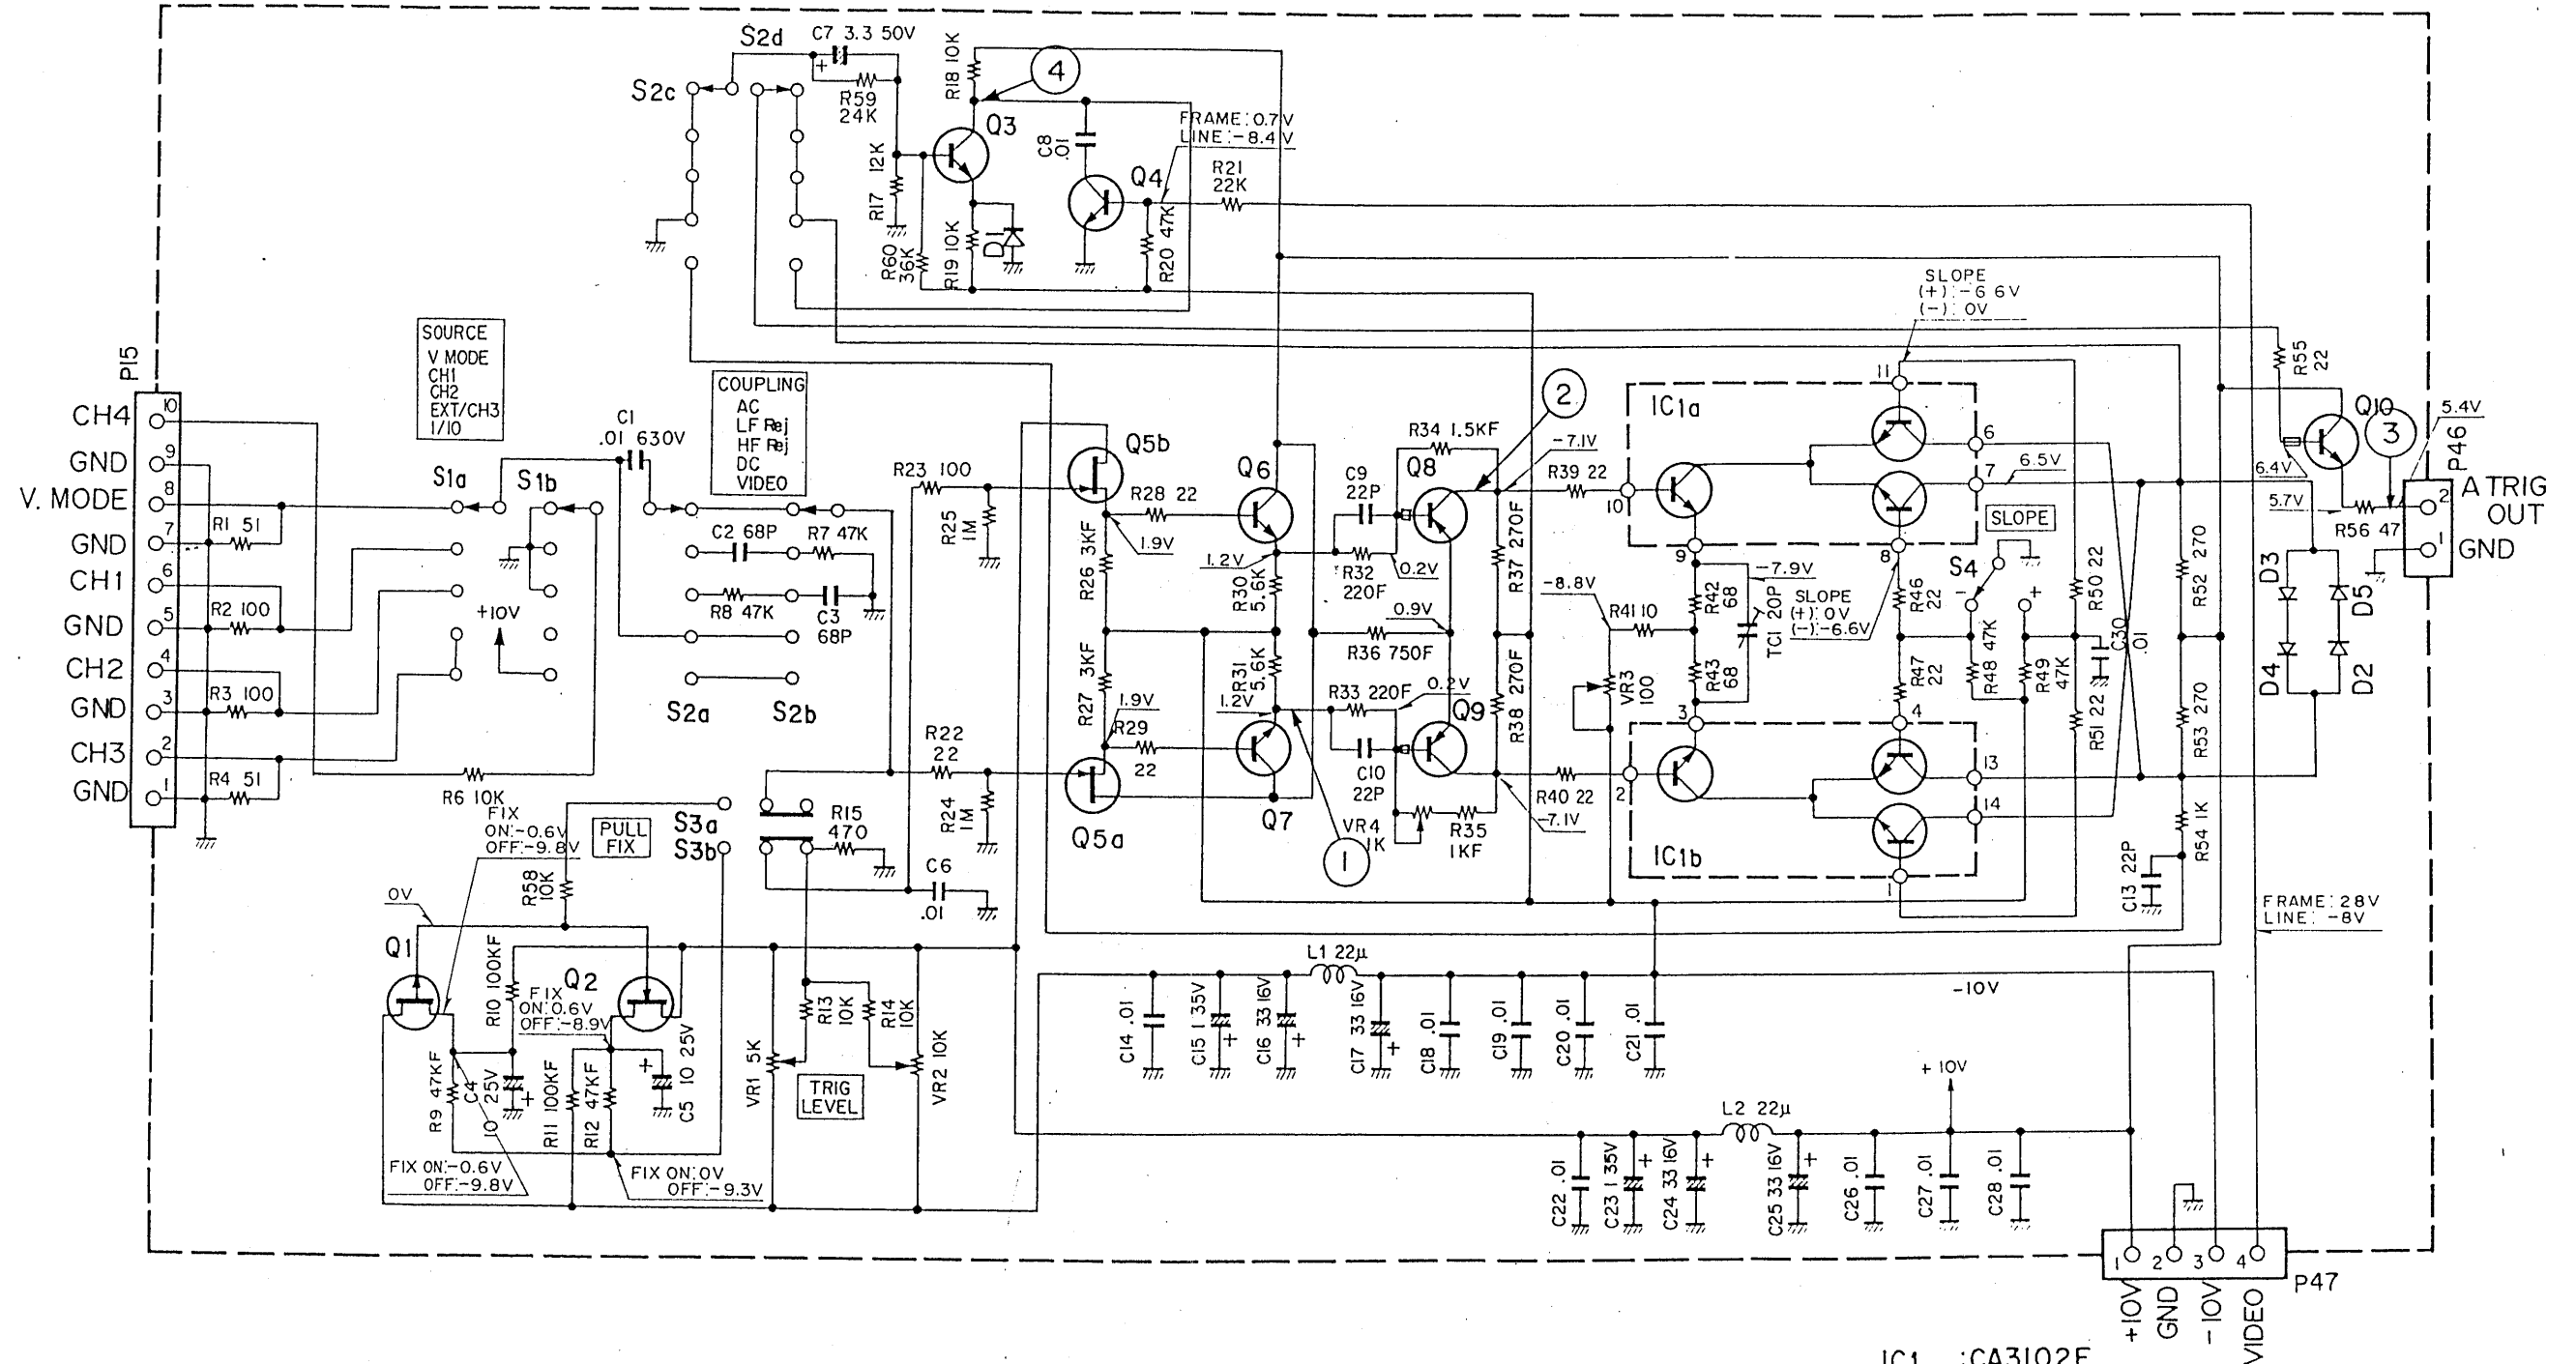


- IC1 : CA3102E
- Q1 : 2SJ43(Q)
- Q3,4 : 2SC536KNP(F)
- Q5 : DN1901
- Q6,7 : 2SC1215(T or S)
- Q8,9 : 2SA1161
- Q2 : 2SK127(Q)
- Q10 : 2SC2499
- D1~5: DS442X

# PC BOARD


100-211-1001-1001

X77-1120-00

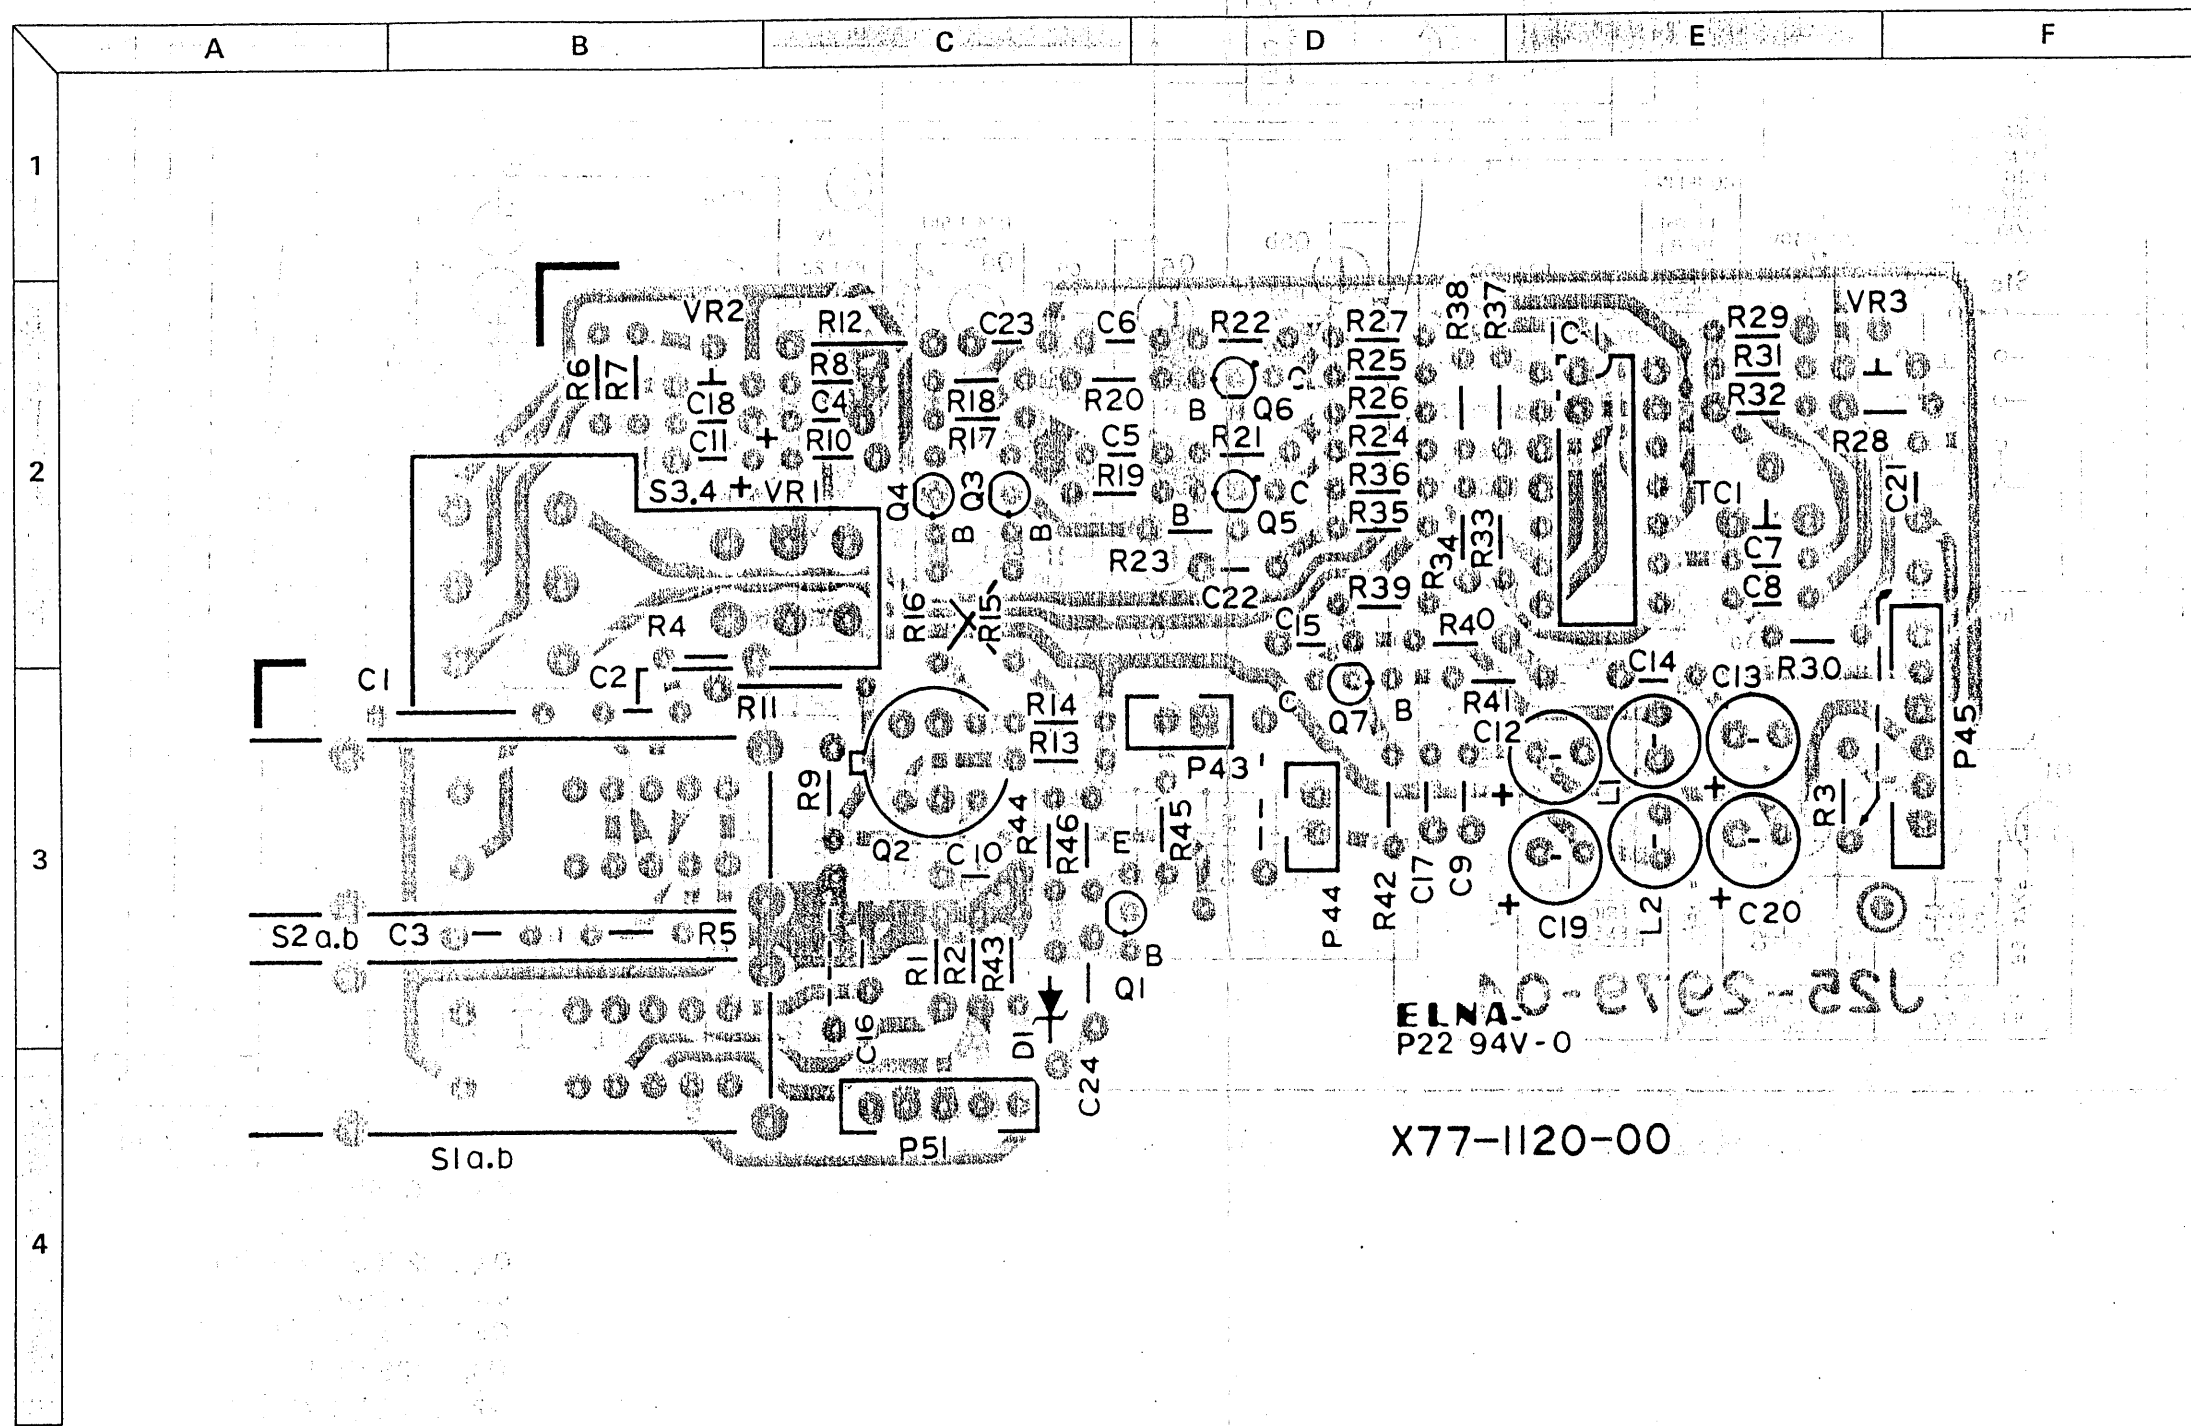

ELNA P22 94V-0


X77-1120-00

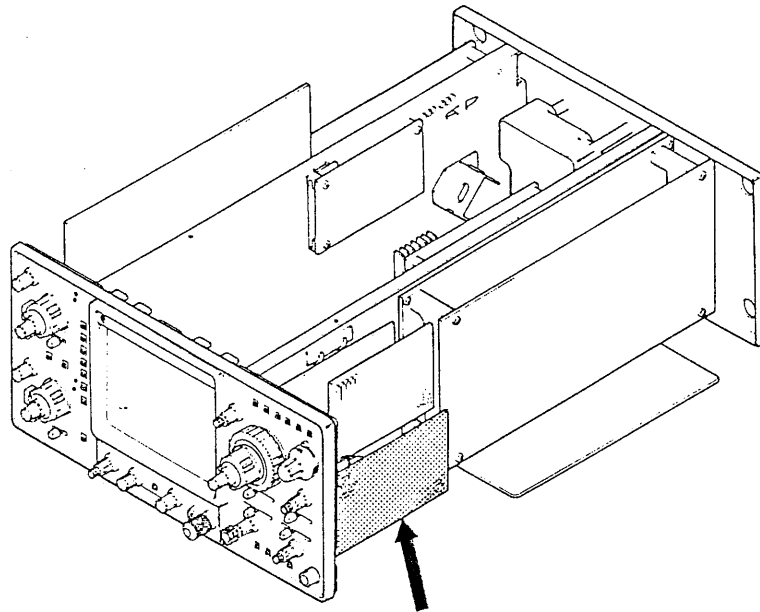


X77-1120-00  
(B TRIG UNIT)

# WAVEFORMS


①③④




②




⑥



⑦




⑤⑧



# SCHEMATIC DIAGRAM

B TRIG SWITCH UNIT (X77-1120-00)


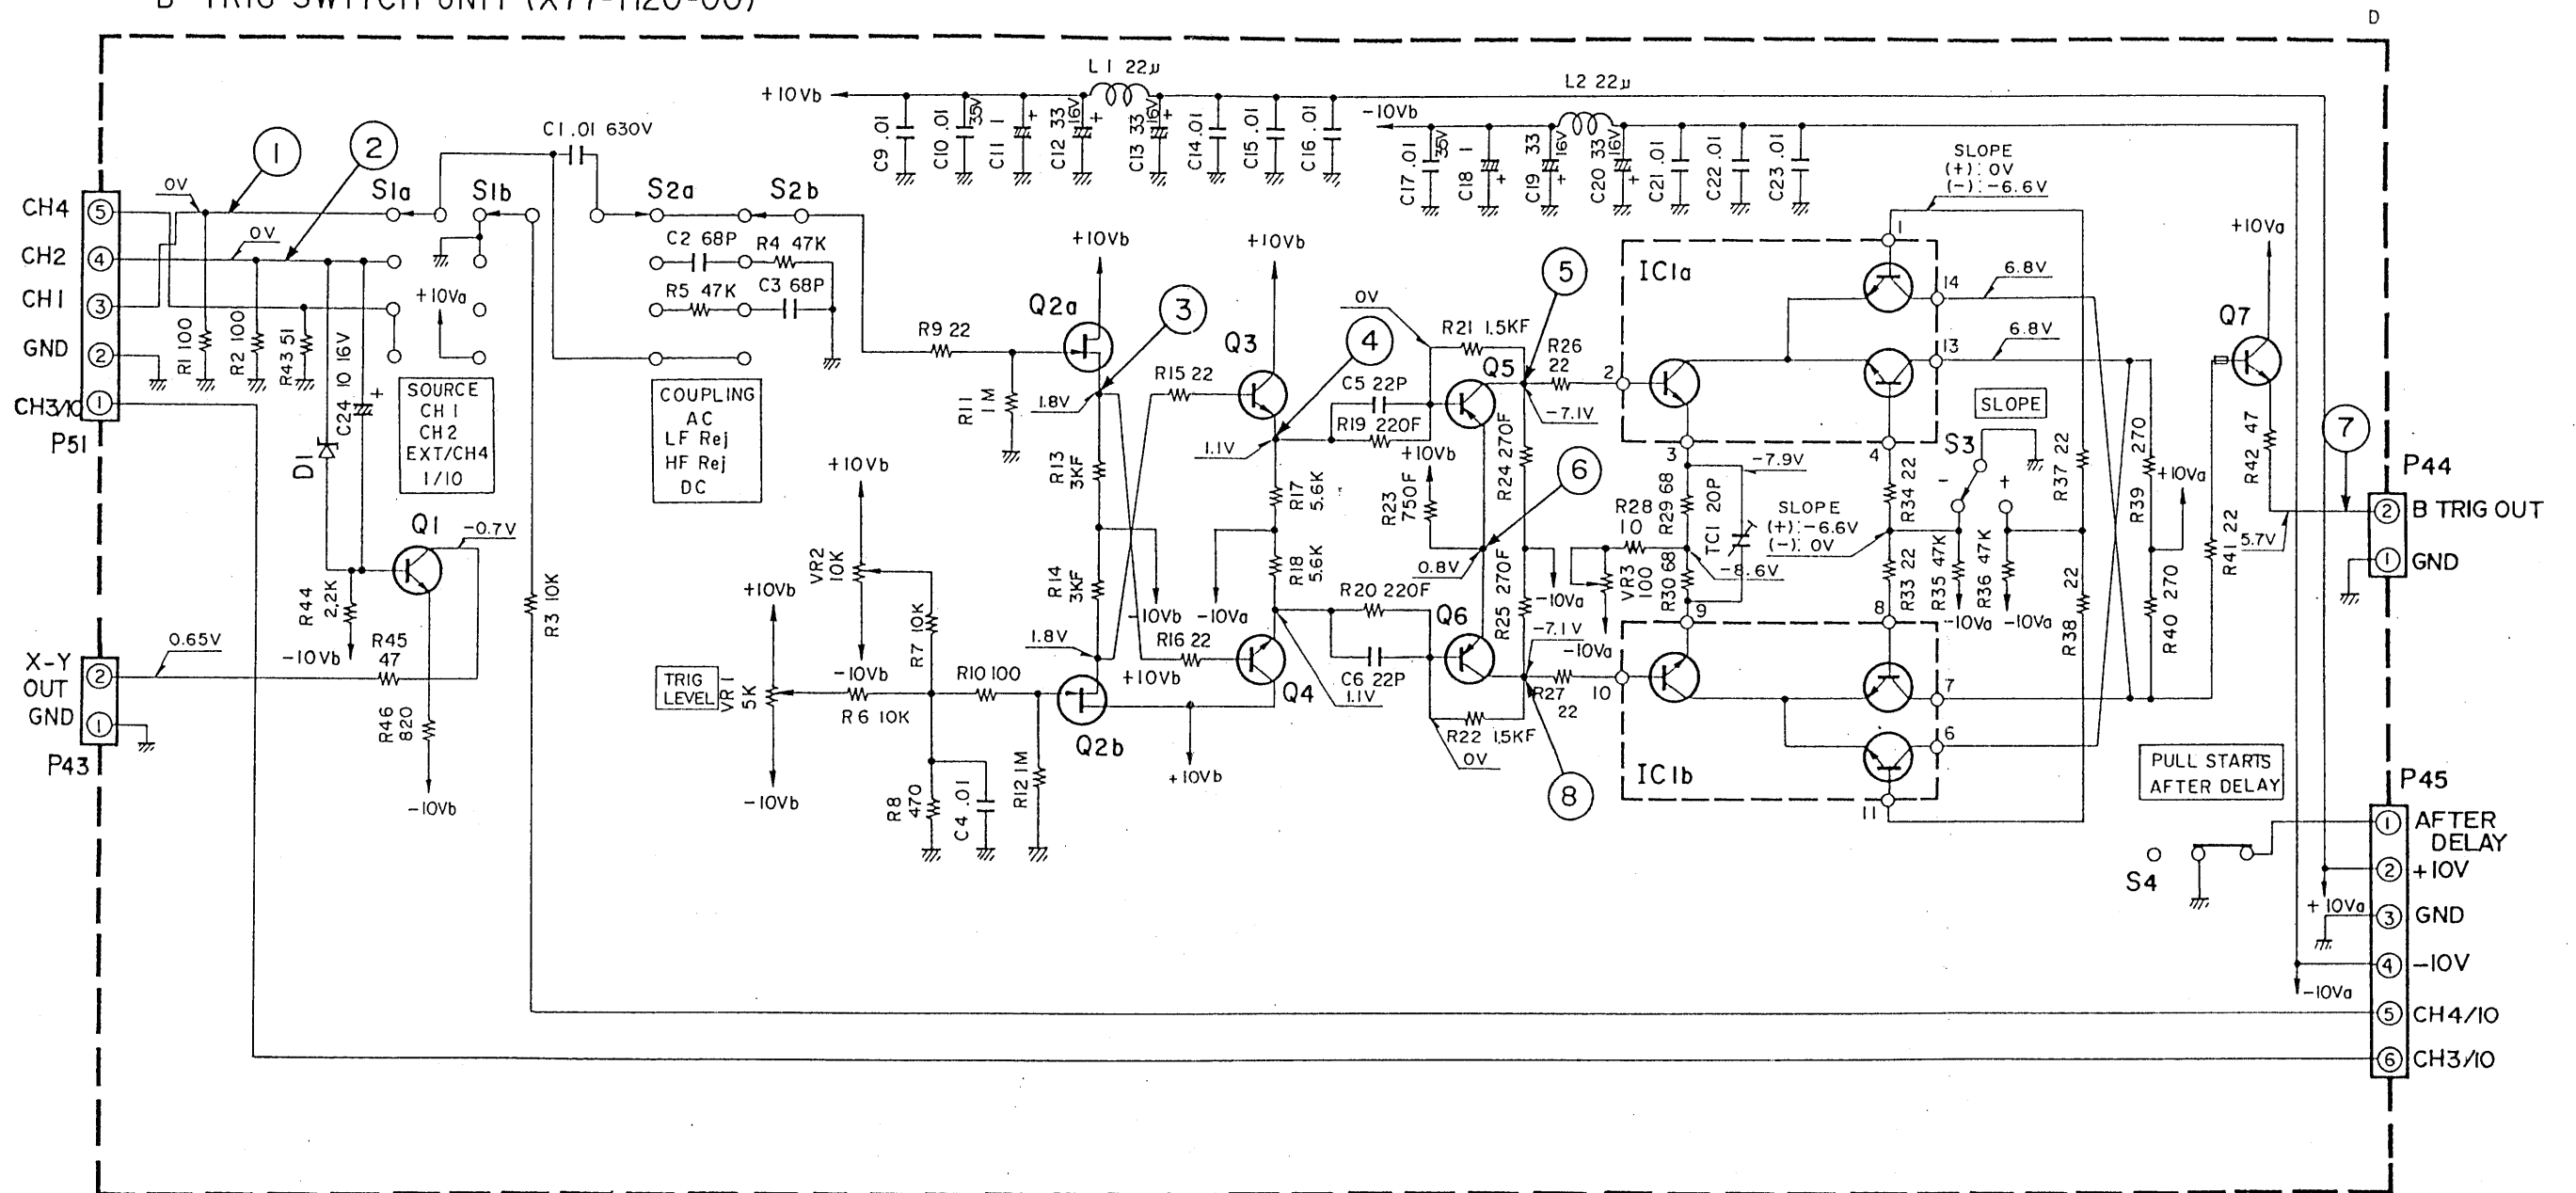


- |                        |                |
|------------------------|----------------|
| IC1 : CA3102E          | Q5,6 : 2SA1161 |
| Q1,3,4 : 2SC1215T or S | DI : WZ-081    |
| Q2 : DNI901            |                |
| Q7 : 2SC2499           |                |

# PC BOARD

(00-081-33X) 1100 11/19/80


X68-1310-00

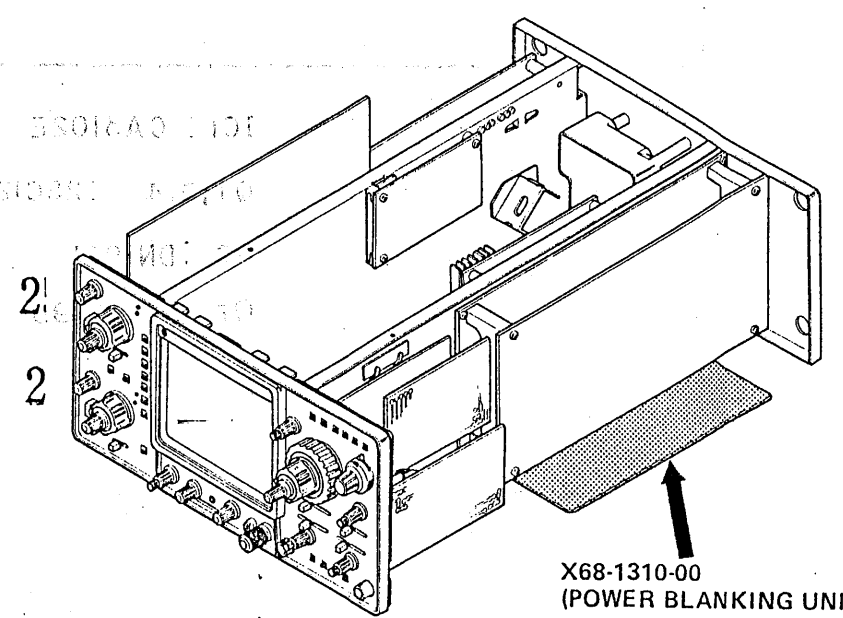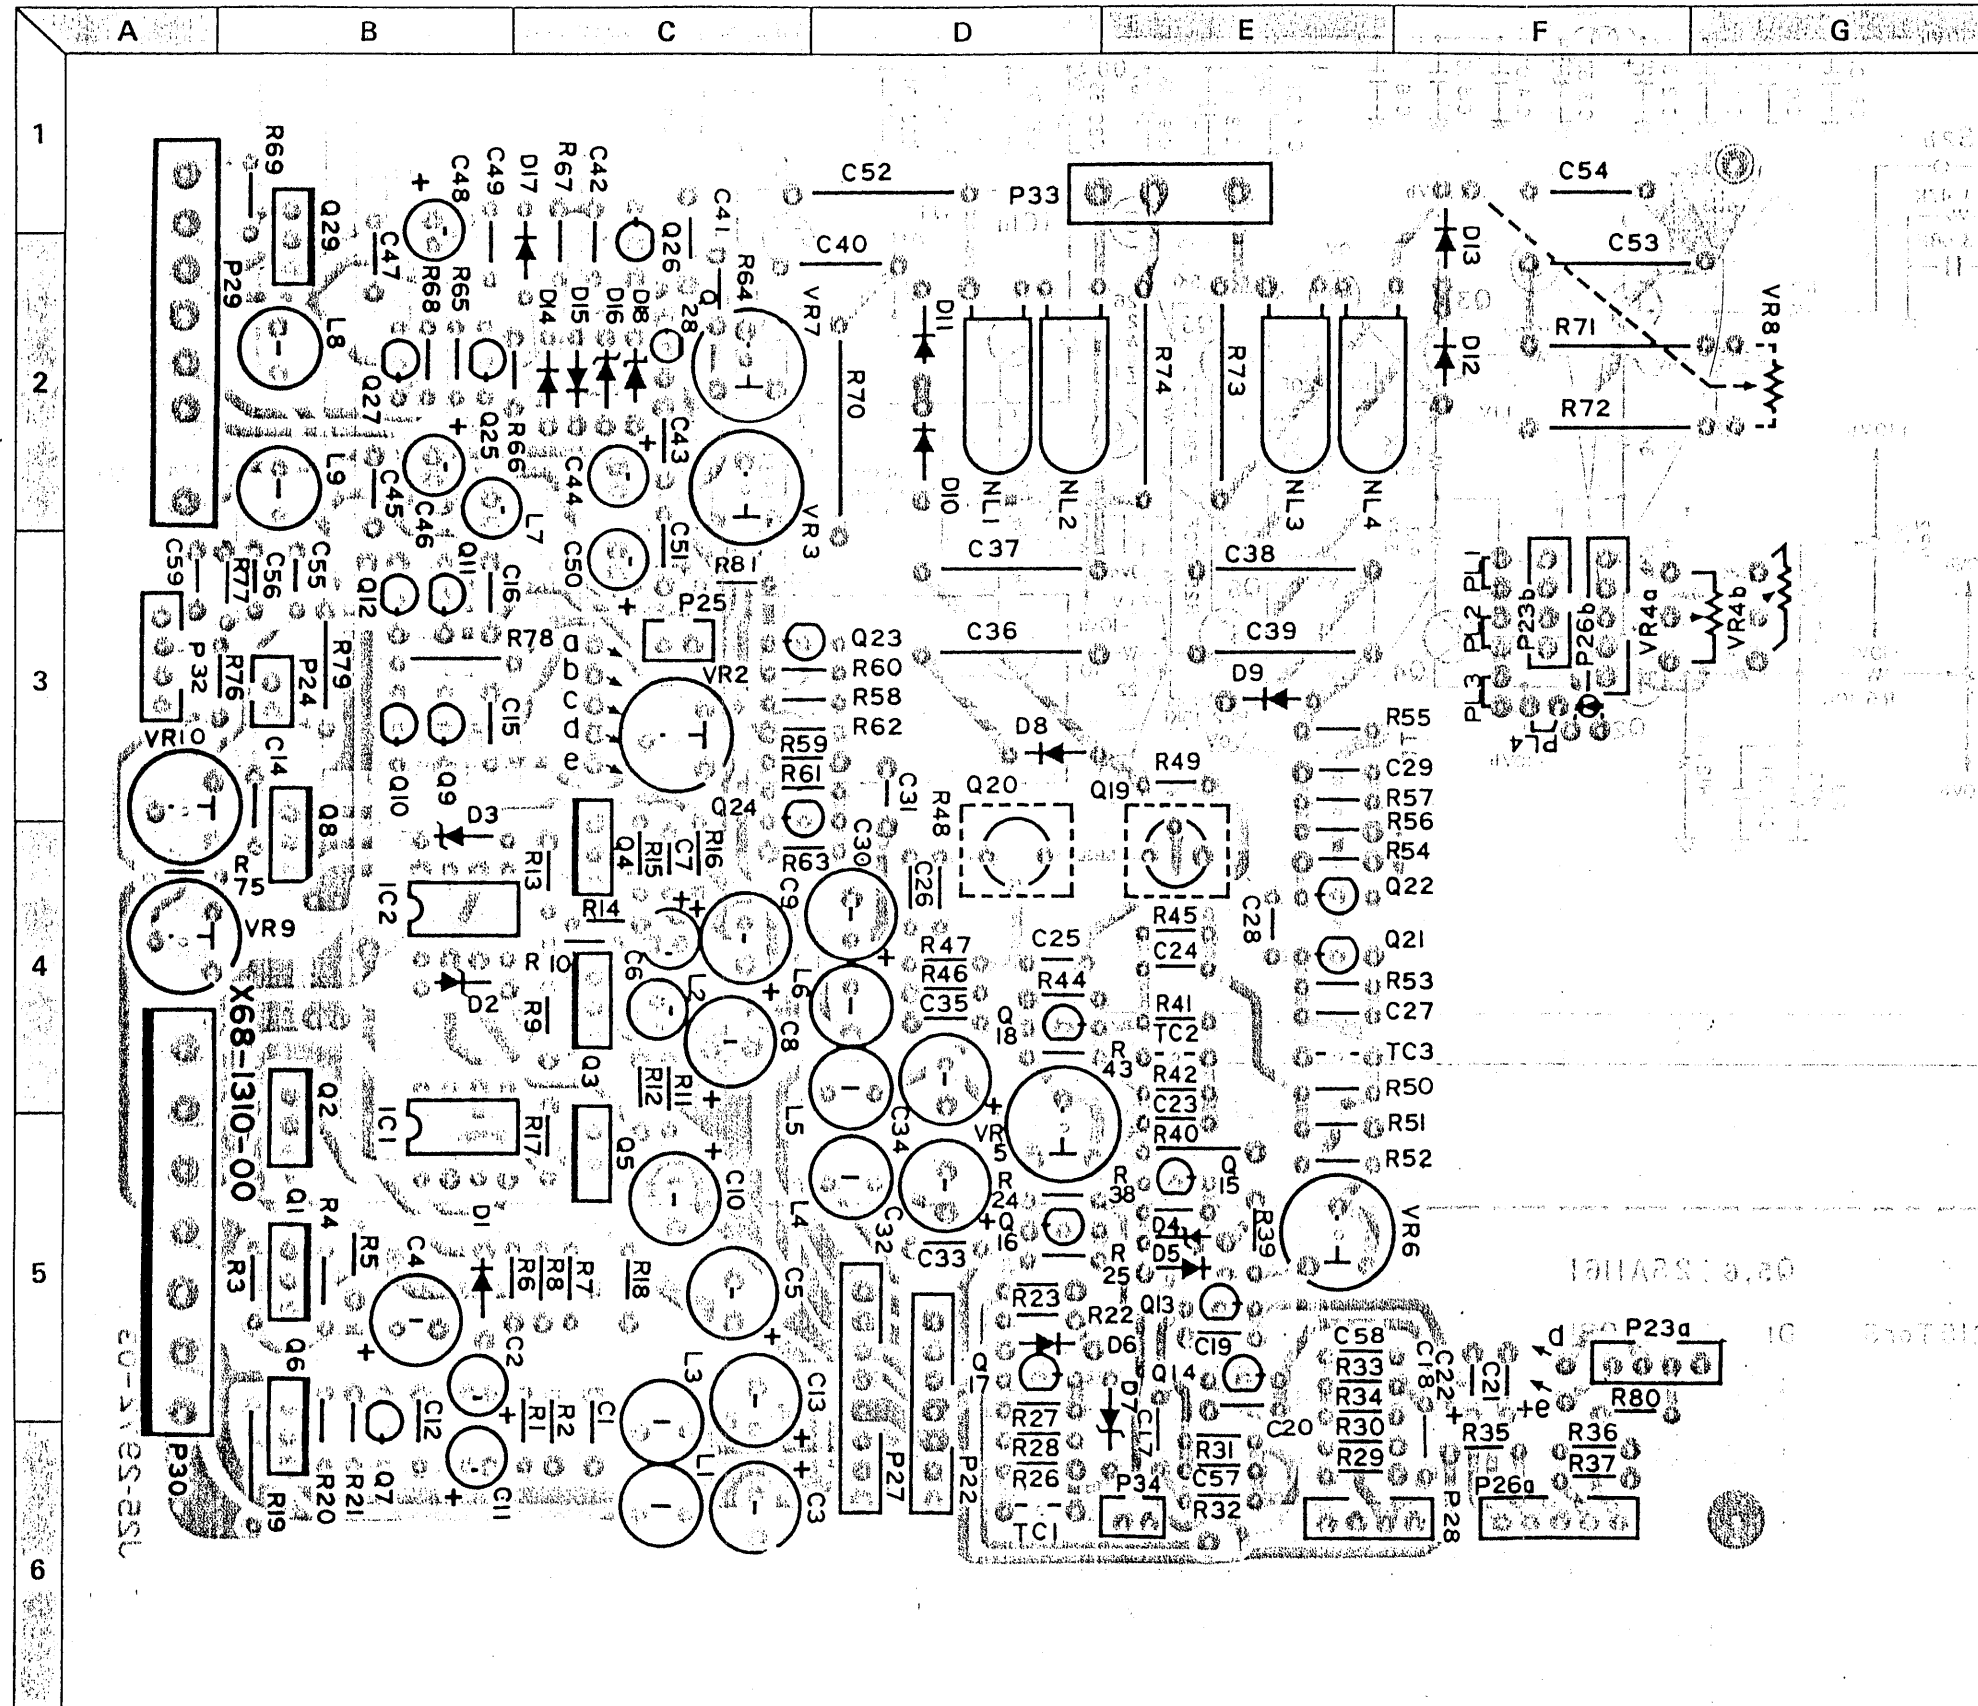


X68-1310-00  
(POWER BLANKING UNIT)



X68-1310-00







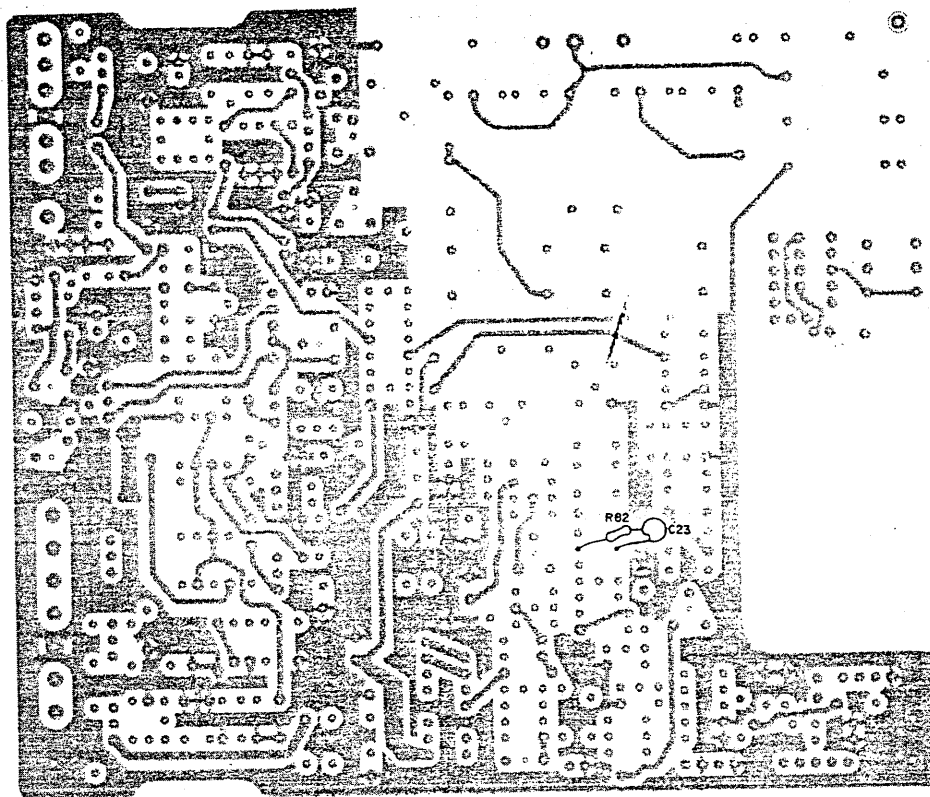



(Parts Side View)

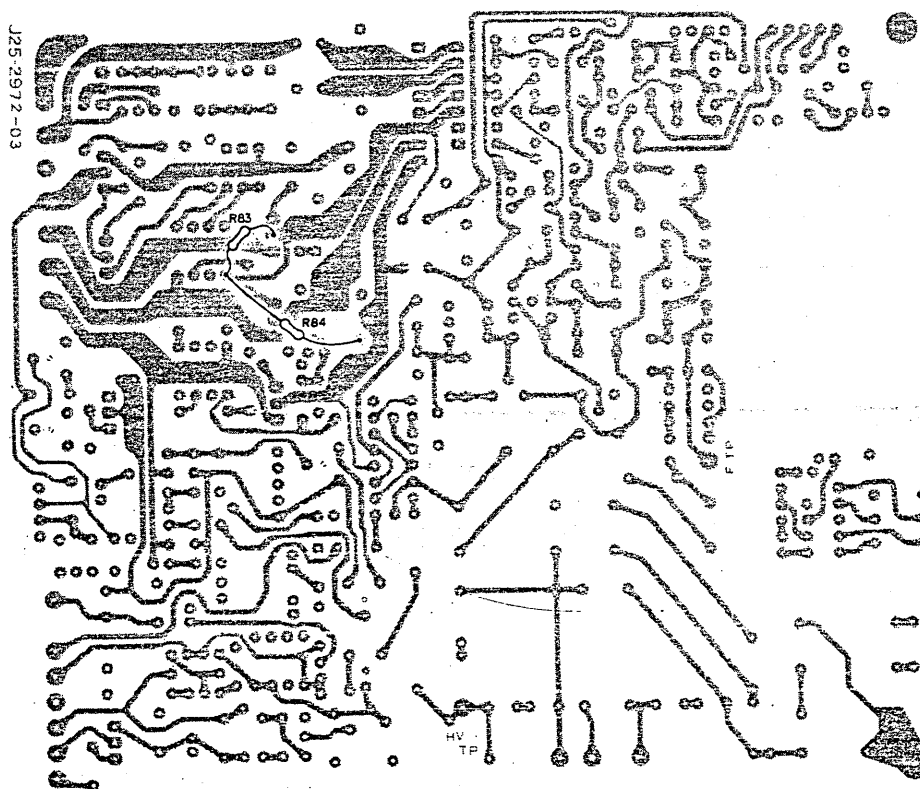


(Foil Side View)

# WAVEFORMS

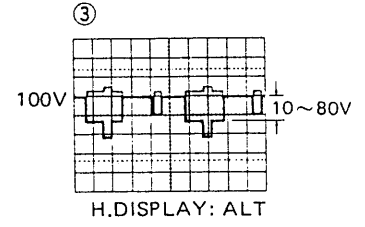

Note:  : CHOP Operation

# SCHEMATIC DIAGRAM

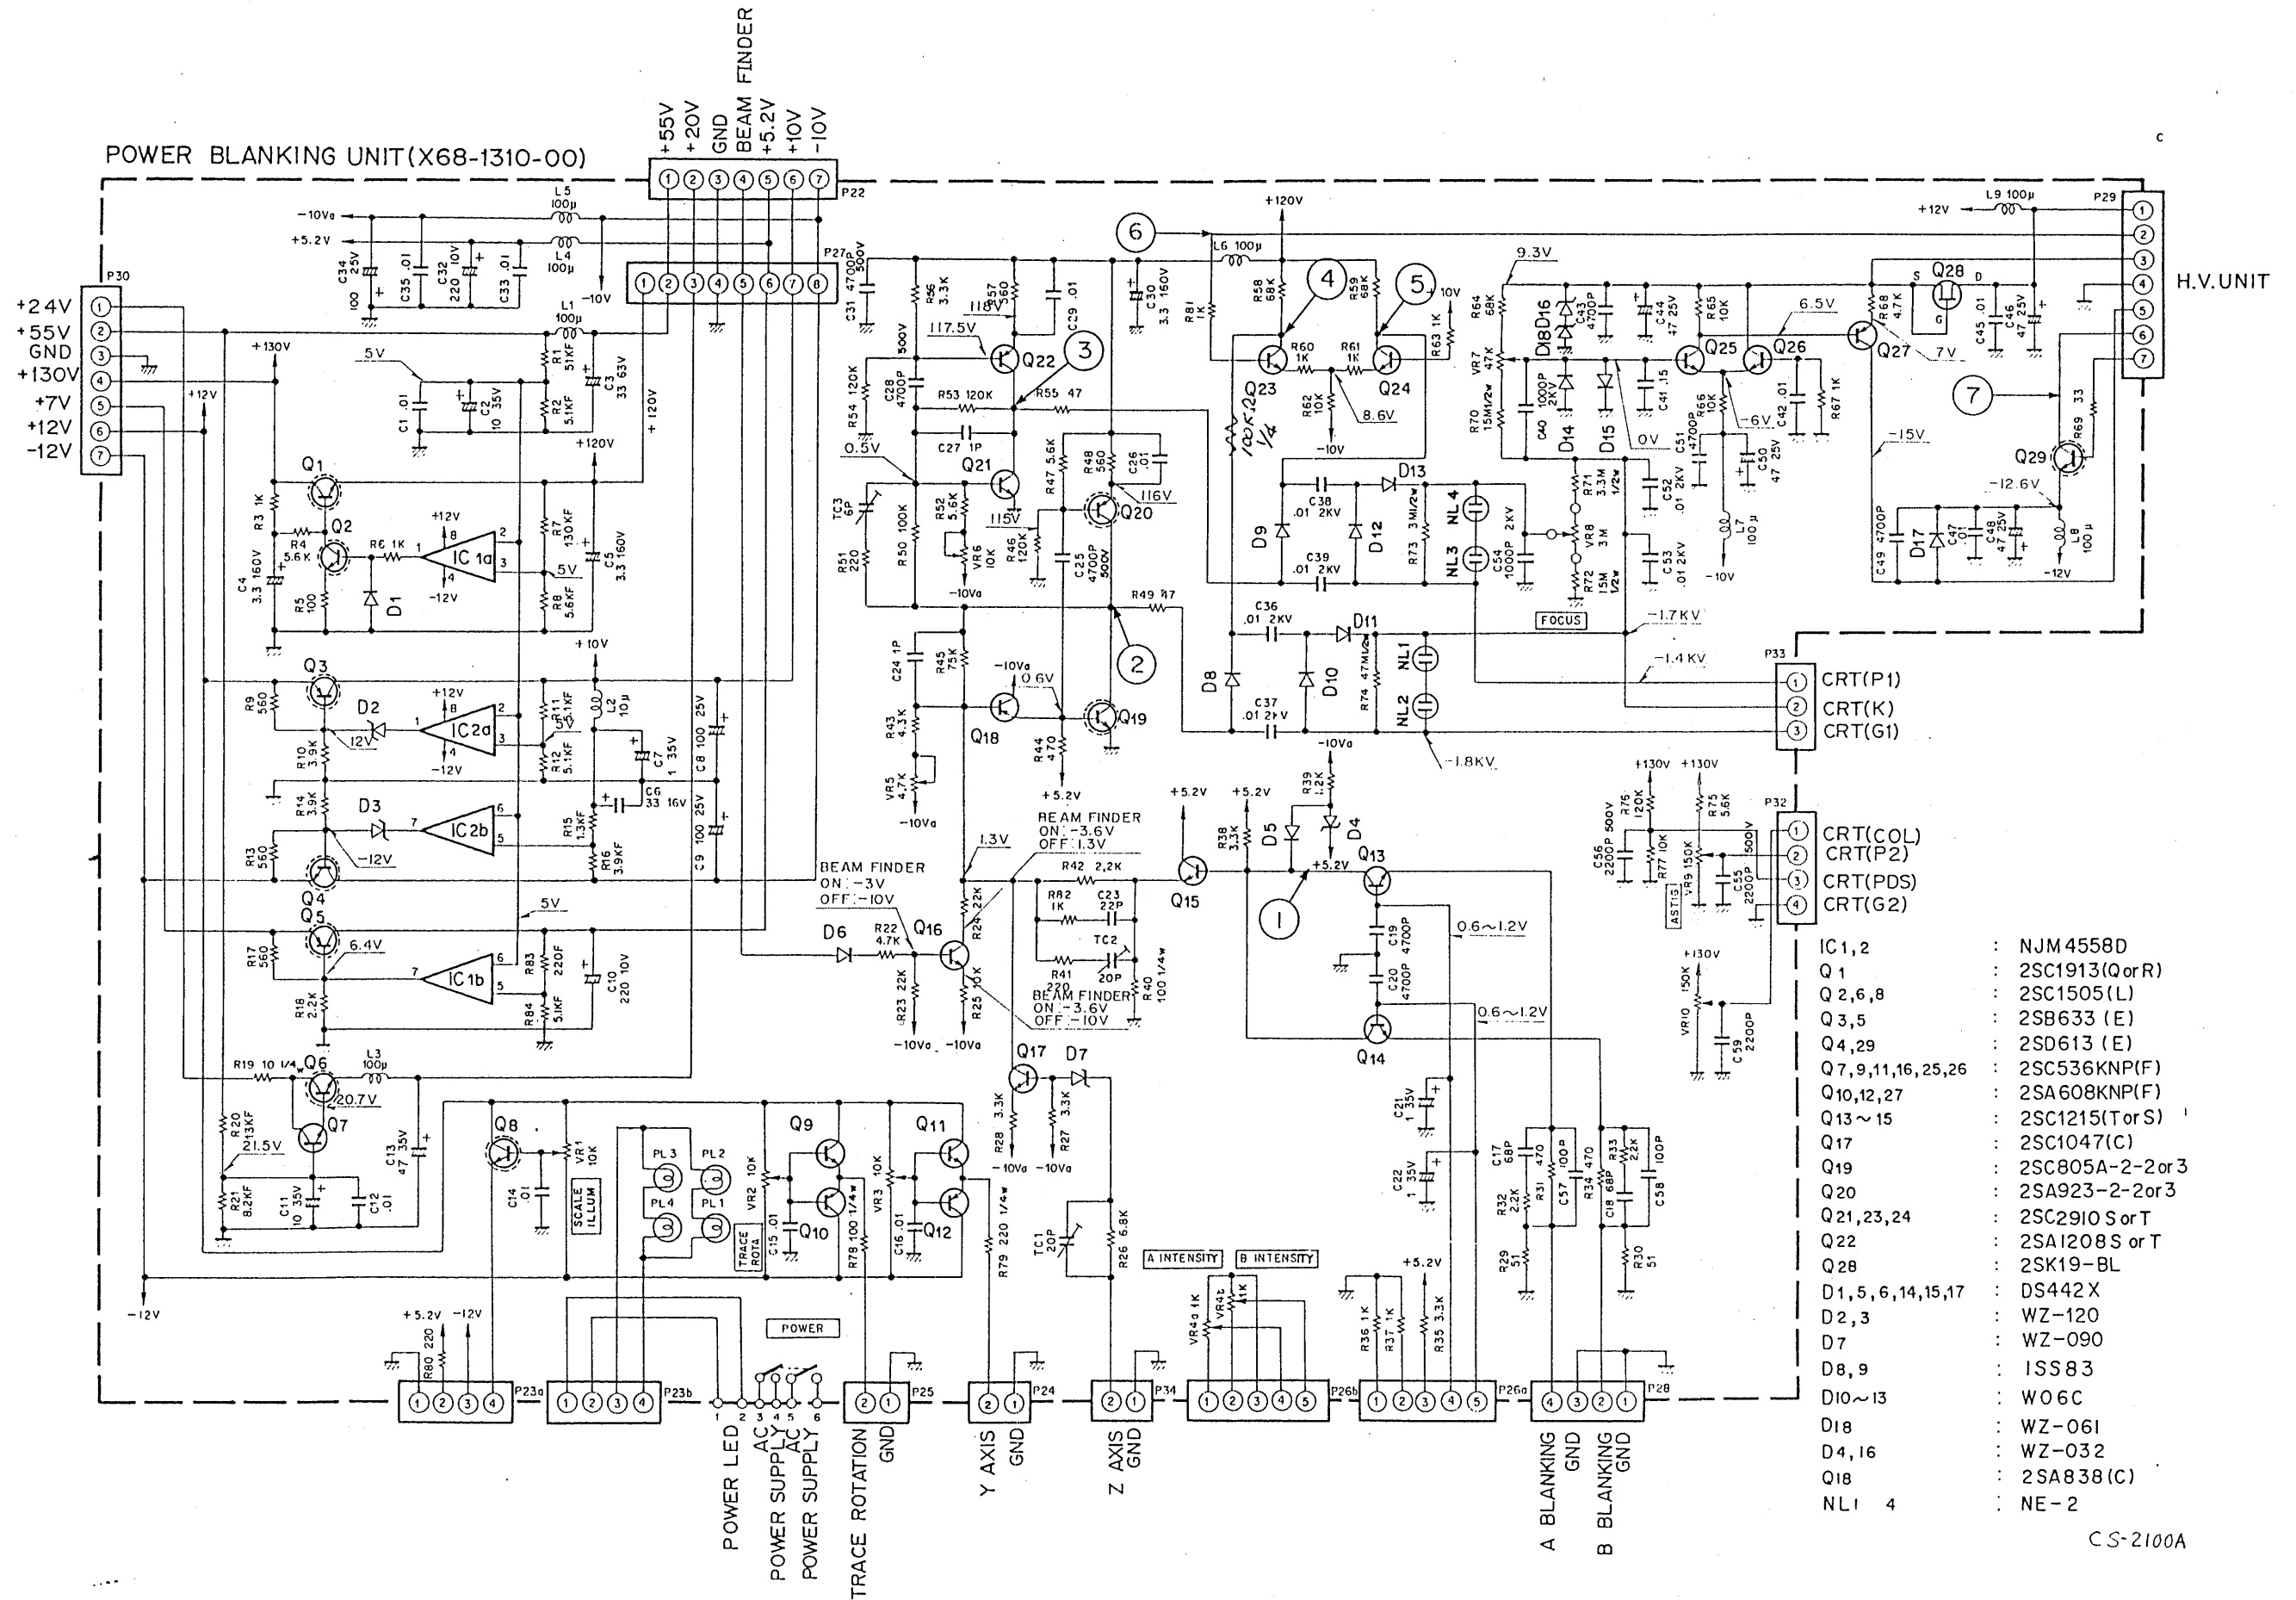


- |                        |                    |
|------------------------|--------------------|
| IC 1, 2                | : NJM 4558D        |
| Q 1                    | : 2SC1913(Q or R)  |
| Q 2, 6, 8              | : 2SC1505(L)       |
| Q 3, 5                 | : 2SB633 (E)       |
| Q 4, 29                | : 2SD613 (E)       |
| Q 7, 9, 11, 16, 25, 26 | : 2SC536KNP(F)     |
| Q 10, 12, 27           | : 2SA608KNP(F)     |
| Q 13 ~ 15              | : 2SC1215(T or S)  |
| Q 17                   | : 2SC1047(C)       |
| Q 19                   | : 2SC805A-2-2 or 3 |
| Q 20                   | : 2SA923-2-2 or 3  |
| Q 21, 23, 24           | : 2SC2910 S or T   |
| Q 22                   | : 2SA1208 S or T   |
| Q 28                   | : 2SK19-BL         |
| D 1, 5, 6, 14, 15, 17  | : DS442 X          |
| D 2, 3                 | : WZ-120           |
| D 7                    | : WZ-090           |
| D 8, 9                 | : 1SS83            |
| D 10 ~ 13              | : W06C             |
| D 18                   | : WZ-061           |
| D 4, 16                | : WZ-032           |
| Q 18                   | : 2SA838(C)        |
| NL 1 4                 | : NE-2             |


CS-2100A

# SEMICONDUCTORS


## C-MOS IC




MC10102P

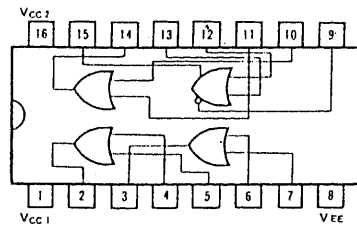


MC10103BCP

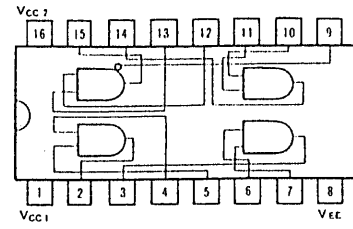


MC10104BCP

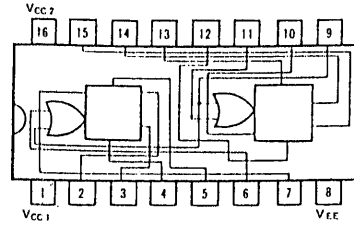


MC10131BCP




MC14001BCP




MC14011BCP




MC14013BCP




MC14027BCP




MC14069UBCP




MC14081BCP

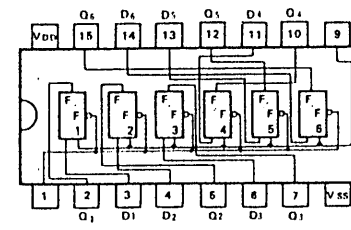

MC14174BCP

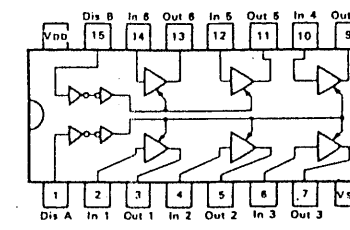


MC14503BCP




MC14584BCP


## TTL IC




SN74LS00N




SN74LS08N




SN74LS11N

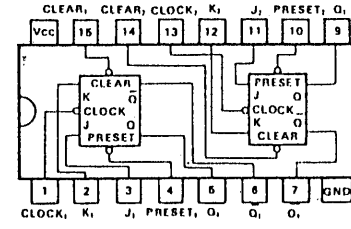


SN74LS112AN

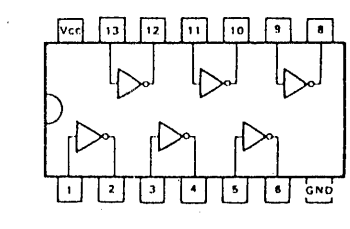


SN7404N  
SN74LS04N



SN7405N




SN7432N  
SN74LS32N

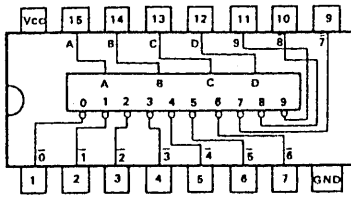


SN7442AN


## OTHER

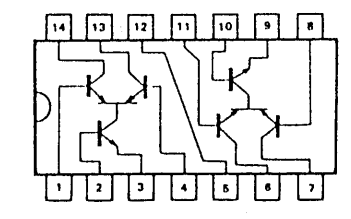

CA3102E

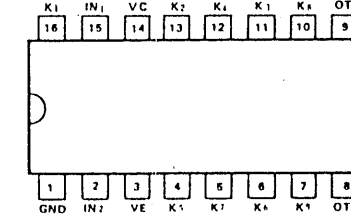


ATM-4010




TL082CP  
NJM4558D


## TRANSISTOR




- 2SA608KNP (F)
- 2SC1215 (T or S)
- 2SA838 (C)
- 2SC1973 (T)
- 2SD438 (F)
- 2SC2910 (S or T)
- 2SC536KNP (F)
- 2SA1208 (S or T)
- 2SC1047 (C)




- 2SB633 (E)
- 2SD613 (E)
- 2SC1505 (L)




- 2SA1161
- 2SC2499
- 2SC2644




- 2SA923-2-2 or 3
- 2SC805A2-2 or 3




- 2SC1164 (O)



- 2SC1913 (Q, R)




- FS7805L




- MC78L15CP


## FET.




- 2SK19 (BL)




- 2SK127 (O)



- 2SJ43 (Q)



- Bottom View M47F (C)



- Bottom View DN1901

- CS-2100A

## CS-2100A SERVICE MANUAL CHANGE INFORMATION :

At Trio, we continually strive to keep up with latest electronic developments by adding circuit and component improvement to our instruments as soon as they are developed and tested.

Sometimes, due to printing and shipping requirements, we can't get these change immediately into printed manual.

Also, a single change may affect several section. Since the change information sheets are permanently entered, some duplication may occur.

Because of the universal parts procurement problem, some electrical parts in your instrument may be different from those described in the replaceable electrical parts list. (Main chassis)

### PARTS LIST

Note: A: Addition  
C: Change  
D: Deletion

S/No. 2120001 ~  
VERTICAL ATT UNIT (X75-1120-00)

Ref. No.	Parts No.	Name & Description				Note
R32	RN14BK2B5600F	RN	560Ω	± 1%	1/8W	C
R33	RN14BK2B5600F	RN	560Ω	± 1%	1/8W	C
R74	RN14BK2B5600F	RN	560Ω	± 1%	1/8W	C
R75	RN14BK2B5600F	RN	560Ω	± 1%	1/8W	C
IC12		IC	ATM-4020			
IC13		IC	ATM-4020			C

VERTICAL PREAMPLIFIER (X73-1320-00)

Ref. No.	Parts No.	Name & Description				Note
R167	RD14BB2C181J	RD	180Ω	± 5%	1/6W	C
R168	RD14BB2C682J	RD	6.8 kΩ	± 5%	1/6W	D
R296	RD14BB2C122J	RD	1.2 kΩ	± 5%	1/6W	A
C5	CC45CH1H020C	CC	2 pF	± 0.25 pF	50WV	C
C38	CC45CH1H220J	CC	22 pF	± 5%	50WV	C
C39	CC45CH1H330J	CC	33 pF	± 5%	50WV	D
C42	CC45CH1H020C	CC	2 pF	± 0.25 pF	50WV	C
C120	CC45CH1H330J	CC	33 pF	± 5%	50WV	C
C121	CC45CH1H180J	CC	18 pF	± 5%	50WV	A
C132	CC45CH1H270J	CC	27 pF	± 5%	50WV	C

VERTICAL OUTPUT AMP (X73-1330-00)

Ref. No.	Parts No.	Name & Description				Note
R1	RN14BK2B1000F	RN	100Ω	± 1%	1/8W	C
R2	RN14BK2B1000F	RN	100Ω	± 1%	1/8W	C
R42	RD14BB2C271J	RD	270Ω	± 5%	1/6W	C

S/No. 3010001 ~  
VERTICAL ATT UNIT (X75-1120-00)

Ref. No.	Parts No.	Name & Description				Note
R36	RD14BB2C151J	RD	150Ω	± 5%	1/6W	A
R37	RD14BB2C151J	RD	150Ω	± 5%	1/6W	A
R38	RD14BB2C330J	RD	33Ω	± 5%	1/6W	A
R39	RD14BB2C330J	RD	33Ω	± 5%	1/6W	A
C7	CC45CH1H030C	CC	3 pF	± 0.25 pF	50WV	A
C20	CC45CH1H030C	CC	3 pF	± 0.25 pF	50WV	A

# PARTS LIST

## VERTICAL PREAMPLIFIER (X73-1320-00)

Ref. No.	Parts No.	Name & Description			Note	
R3	RN14BK2B1500F	RN	150Ω	± 1%	1/8W	C
R38	RD14BB2C151J	RD	150Ω	± 5%	1/6W	C
R49	RD14BB2C123J	RD	12 kΩ	± 5%	1/6W	C
R115	RD14BB2C102J	RD	1 kΩ	± 5%	1/6W	C
R166	RN14BK2B1500F	RN	150Ω	± 1%	1/8W	C
R167	RD14BB2C241J	RD	240Ω	± 5%	1/6W	D
R211	RD14BB2C151J	RD	150Ω	± 5%	1/6W	C
R277	RD14BB2C102J	RD	1 kΩ	± 5%	1/6W	C
R293	RD14BB2C331J	RD	330Ω	± 5%	1/6W	A
R294	RD14BB2C331J	RD	330Ω	± 5%	1/6W	A
R295	RD14BB2C242J	RD	2.4 kΩ	± 5%	1/6W	C
R297	RD14BB2C470J	RD	47Ω	± 5%	1/6W	A
R298	RD14BB2C470J	RD	47Ω	± 5%	1/6W	A
R325	RD14BB2C471J	RD	470Ω	± 5%	1/6W	C
R326	RD14BB2C471J	RD	470Ω	± 5%	1/6W	C
R317	RD14BB2C473J	RD	47kΩ	± 5%	1/6W	D
R318	RD14BB2C473J	RD	47kΩ	± 5%	1/6W	D
R319	RD14BB2C103J	RD	10kΩ	± 5%	1/6W	D
R320	RD14BB2C822J	RD	8.2kΩ	± 5%	1/6W	D
R321	RD14BB2C103J	RD	10kΩ	± 5%	1/6W	D
R322	RD14BB2C103J	RD	10kΩ	± 5%	1/6W	D
R323	RD14BB2C752J	RD	7.5kΩ	± 5%	1/6W	D
R324	RD14BB2C332J	RD	3.3kΩ	± 5%	1/6W	D
C2	CC45CH1H050C	CC	5 pF	± 0.25 pF	50WV	C
C9	CC45CH1H270J	CC	27 pF	± 5 pF	50WV	C
C13	CC45CH1H150J	CC	15 pF	± 5 pF	50WV	C
C14	CC45CH1H100J	CC	10 pF	± 5 pF	50WV	C
C15	CK45B1H332K	CK	3300 pF	± 10%	50WV	C
C30	CC45CH1H150J	CC	15 pF	± 5%	50WV	A
C33	CC45CH1H150J	CC	15 pF	± 5%	50WV	A
C34	CC45CH1H120J	CC	12 pF	± 5%	50WV	C
C35	CC45CH1H120J	CC	12 pF	± 5%	50WV	C
C38	CC45CH1H330J	CC	33 pF	± 5%	50WV	D
C46	CC45CH1H270J	CC	27 pF	± 5%	50WV	C
C49	CC45CH1H020J	CC	2 pF	± 0.25 pF	50WV	A
C51	CC45CH1H100J	CC	10 pF	± 5%	50WV	C
C120	CC45CH1H150J	CC	15 pF	± 5%	50WV	C
C131	CC45CH1H070D	CC	7 pF	± 0.5 pF	50WV	C
C132	CC45CH1H070D	CC	7 pF	± 0.5 pF	50WV	C
C135	CC45CH1H050C	CC	5 pF	± 0.25 pF	50WV	C
C136	CC45CH1H050C	CC	5 pF	± 0.25 pF	50WV	C
C175	CC45CH1H030C	CC	3 pF	± 0.25 pF	50WV	A
C176	CC45CH1H030C	CC	3 pF	± 0.25 pF	50WV	A
TH1			Thermistor SDT-1000			D
D40			Diode	IS2686		D
D41			Diode	IS2686		D
D42			Diode	IS2686		D
D43			Diode	IS2686		D
D44			Diode	DS442X		D
Q79			TR	2SC536KNP (F)		D

## VERTICAL OUTPUT AMP (X73-1330-00)

Ref. No.	Parts No.	Name & Description			Note	
R12	RD14BB2C302J	RD	3kΩ	± 5%	1/6W	D
R13	RD14BB2C122J	RD	1.2kΩ	± 5%	1/6W	D
R16	RN14BK2E6200F	RN	620Ω	± 1%	1/8W	D
R17	RN14BK2E6200F	RN	620Ω	± 1%	1/8W	D
R23	RD14BB2C101J	RD	100Ω	± 5%	1/6W	A
R24	RD14BB2C220J	RD	22Ω	± 5%	1/6W	A
R29	RD14BB2E150J	RD	15Ω	± 5%	1/4W	C
R34	RD14BB2C471J	RD	470Ω	± 5%	1/6W	D
R37	RD14BB2C471J	RD	470Ω	± 5%	1/6W	D

# PARTS LIST

Ref. No.	Parts No.	Name & Description				Note
R40	RD14BB2C181J	RD	180Ω	± 5%	1/6W	C
R46	RD14BB2C181J	RD	180Ω	± 5%	1/6W	C
R49	RD14BB2C561J	RD	560Ω	± 5%	1/6W	C
R51	RD14BB2C471J	RD	470Ω	± 5%	1/6W	A
R52	RD14BB2C471J	RD	470Ω	± 5%	1/6W	A
R55	RD14BB2C221J	RD	220Ω	± 5%	1/6W	A
R56	RD14BB2C470J	RD	47Ω			A
R57	RD14BB2C101J	RD	100Ω			A
R58	RD14BB2C621J	RD	620Ω	± 5%	1/6W	A
R59	RD14BB2C621J	RD	620Ω	± 5%	1/6W	A
R60	RN14BK2B3600F	RN	360Ω	± 1%	1/8W	A
R61	RN14BK2B3600F	RN	360Ω	± 1%	1/8W	A
C18	CC45CH1H070D	CC	7 pF	± 0.5 pF	50WV	D
C19	CK45B1H102K	CK	1000 pF	± 10%	50WV	C
C20	CC45CH1H050C	CC	5 pF	± 0.25 pF	50WV	C
C23	CC45CH1H150J	CC	15 pF	± 5%	50WV	A
C24	CC45CH1H100J	CC	10 pF	± 5%	50WV	A
L1	L40-2282-13	Ferri-inductor	0.22 μH			D
L2	L33-0806-05	Ferri-inductor	0.52 μH			C
L4	L40-2282-13	Ferri-inductor	0.22 μH			D
L5	L33-0806-05	Ferri-inductor	0.52 μH			C
L8	L40-1011-03	Ferri-inductor	100 μH			D
D1		Diode DS442X				A
Q3		TR	2SC1215 (Sor T)			C
Q4		TR	2SC1215 (Sor T)			C
Q6		TR	2SC1047 (C)			A
Q15		TR	2SA838 (C)			A

## HORIZONTAL MODE CONTROL (X77-1130-00)

Ref. No.	Parts No.	Name & Description				Note
C47	CC45CH1H070D	CC	7 pF	± 0.5 pF	50WV	C
C48	CC45CH1H070D	CC	7 pF	± 0.5 pF	50WV	C

## S/No. 3020001 ~

## VERTICAL PREAMP (X73-1320-00)

Ref. No.	Parts No.	Name & Description				Note
R115	RD14BB2C222J	RD	2.2kΩ	± 5%	1/6W	C
R277	RD14BB2C122J	RD	1.2kΩ	± 5%	1/6W	C
C5	CC45CH1H030C	CC	3 pF	± 0.25 pF	50WV	C
C42	CC45CH1H030C	CC	3 pF	± 0.25 pF	50WV	C
C108	CC45CH1H330J	CC	33 pF	± 5%	50WV	C
C119	CC45CH1H101J	CC	100 pF	± 5%	50WV	D
C175	CC45CH1H020C	CC	2 pF	± 0.25 pF	50WV	C
C176	CC45CH1H020C	CC	2 pF	± 0.25 pF	50WV	C
C208	CC45CH1H050C	CC	5 pF	± 0.25 pF	50WV	A
C209	CC45CH1H050C	CC	5 pF	± 0.25 pF	50WV	A
C210	CK45B1H103K	CK	0.01 μF	± 10%	50WV	A


## VERTICAL OUTPUT AMP (X73-1330-00)

Ref. No.	Parts No.	Name & Description				Note
R62	RD14BB2C220J	RD	22 Ω	± 5%	1/6W	A
R63	RD14BB2C220J	RD	22 Ω	± 5%	1/6W	A
R29	RD14BB2E100J	RD	10 Ω	± 5%	1/4W	C
C20	CC45CH1H070D	CC	7 pF	± 0.5 pF	50WV	C
C25	CC45CH1H331J	CC	330 pF	± 5%	50WV	A
C26	CC45CH1H331J	CC	330 pF	± 5%	50WV	A
C27	CC45CH1H020C	CC	2 pF	± 0.25 pF	50WV	A

## POWER BLANKING (X68-1310-00)

Ref. No.	Parts No.	Name & Description				Note
Q1		TR	2SC2591 (Q or R)			C

VERTICAL OUTPUT AMP UNIT (X 73-1330-00)

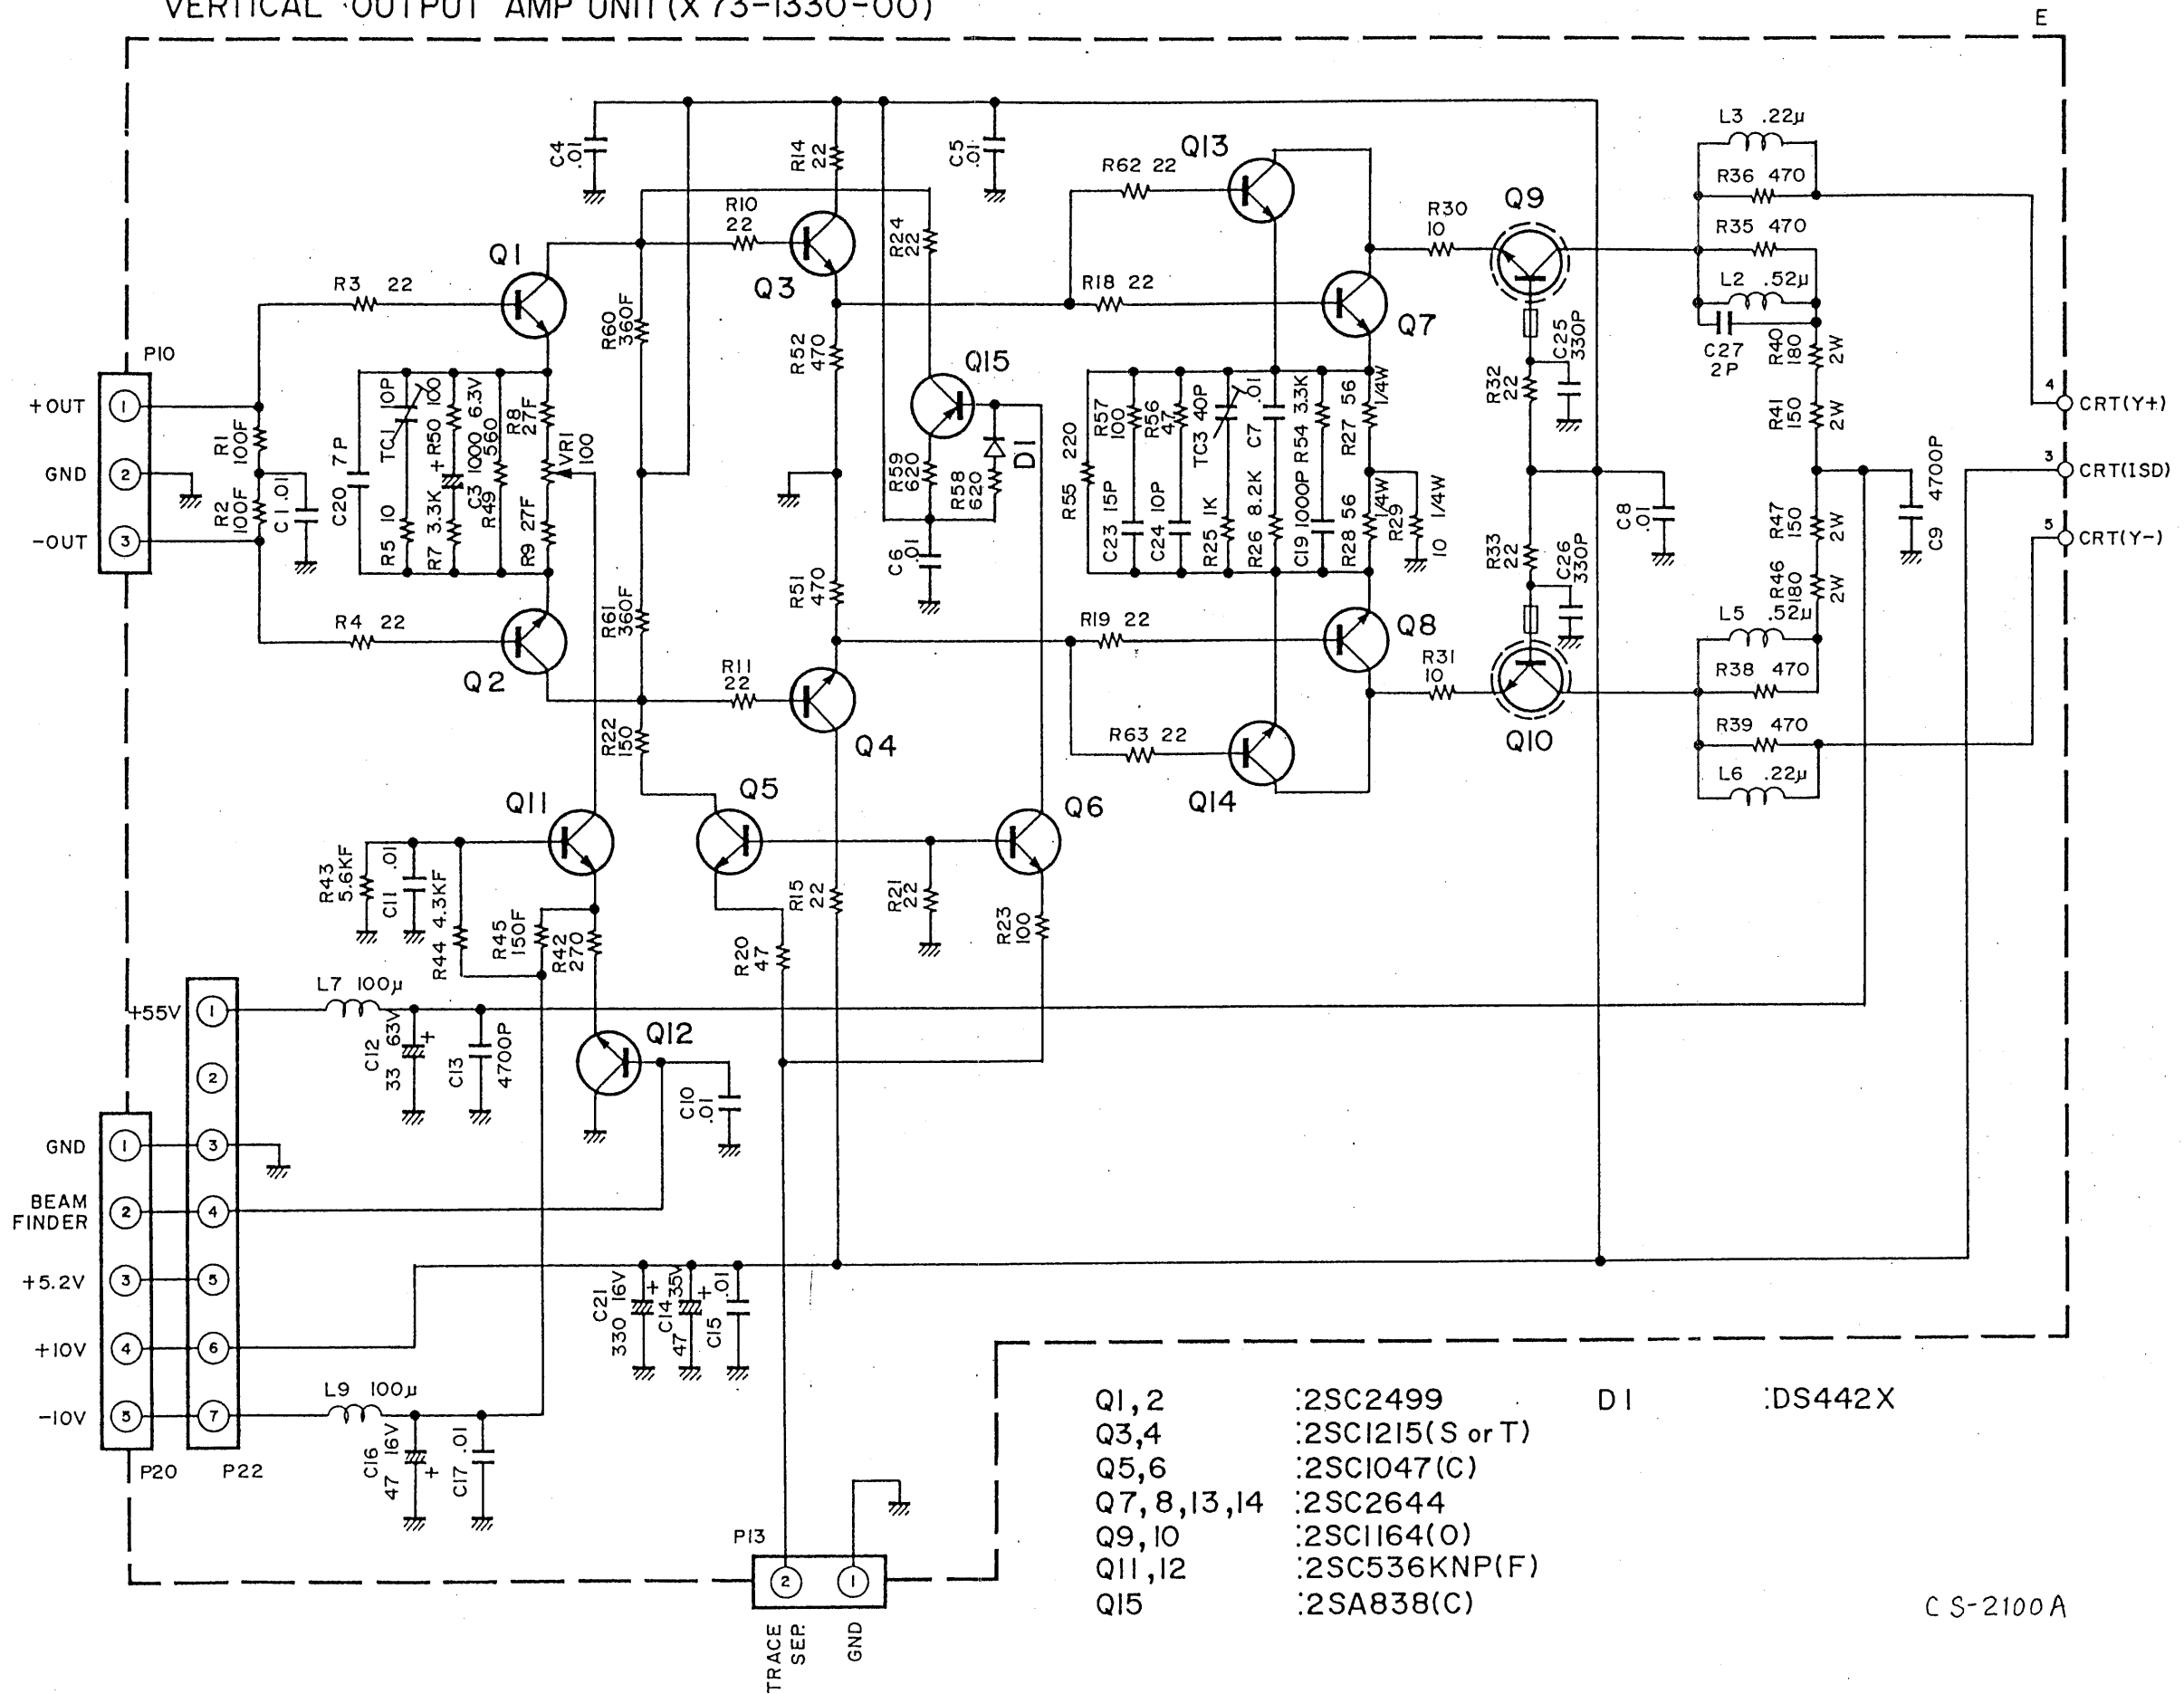


- Q1, 2 :2SC2499
- Q3, 4 :2SC1215(S or T)
- Q5, 6 :2SC1047(C)
- Q7, 8, 13, 14 :2SC2644
- Q9, 10 :2SC1164(O)
- Q11, 12 :2SC536KNP(F)
- Q15 :2SA838(C)
- D1 :DS442X

C S-2100 A



# HORIZONTAL MODE CONTROL UNIT (X77-1130-00)

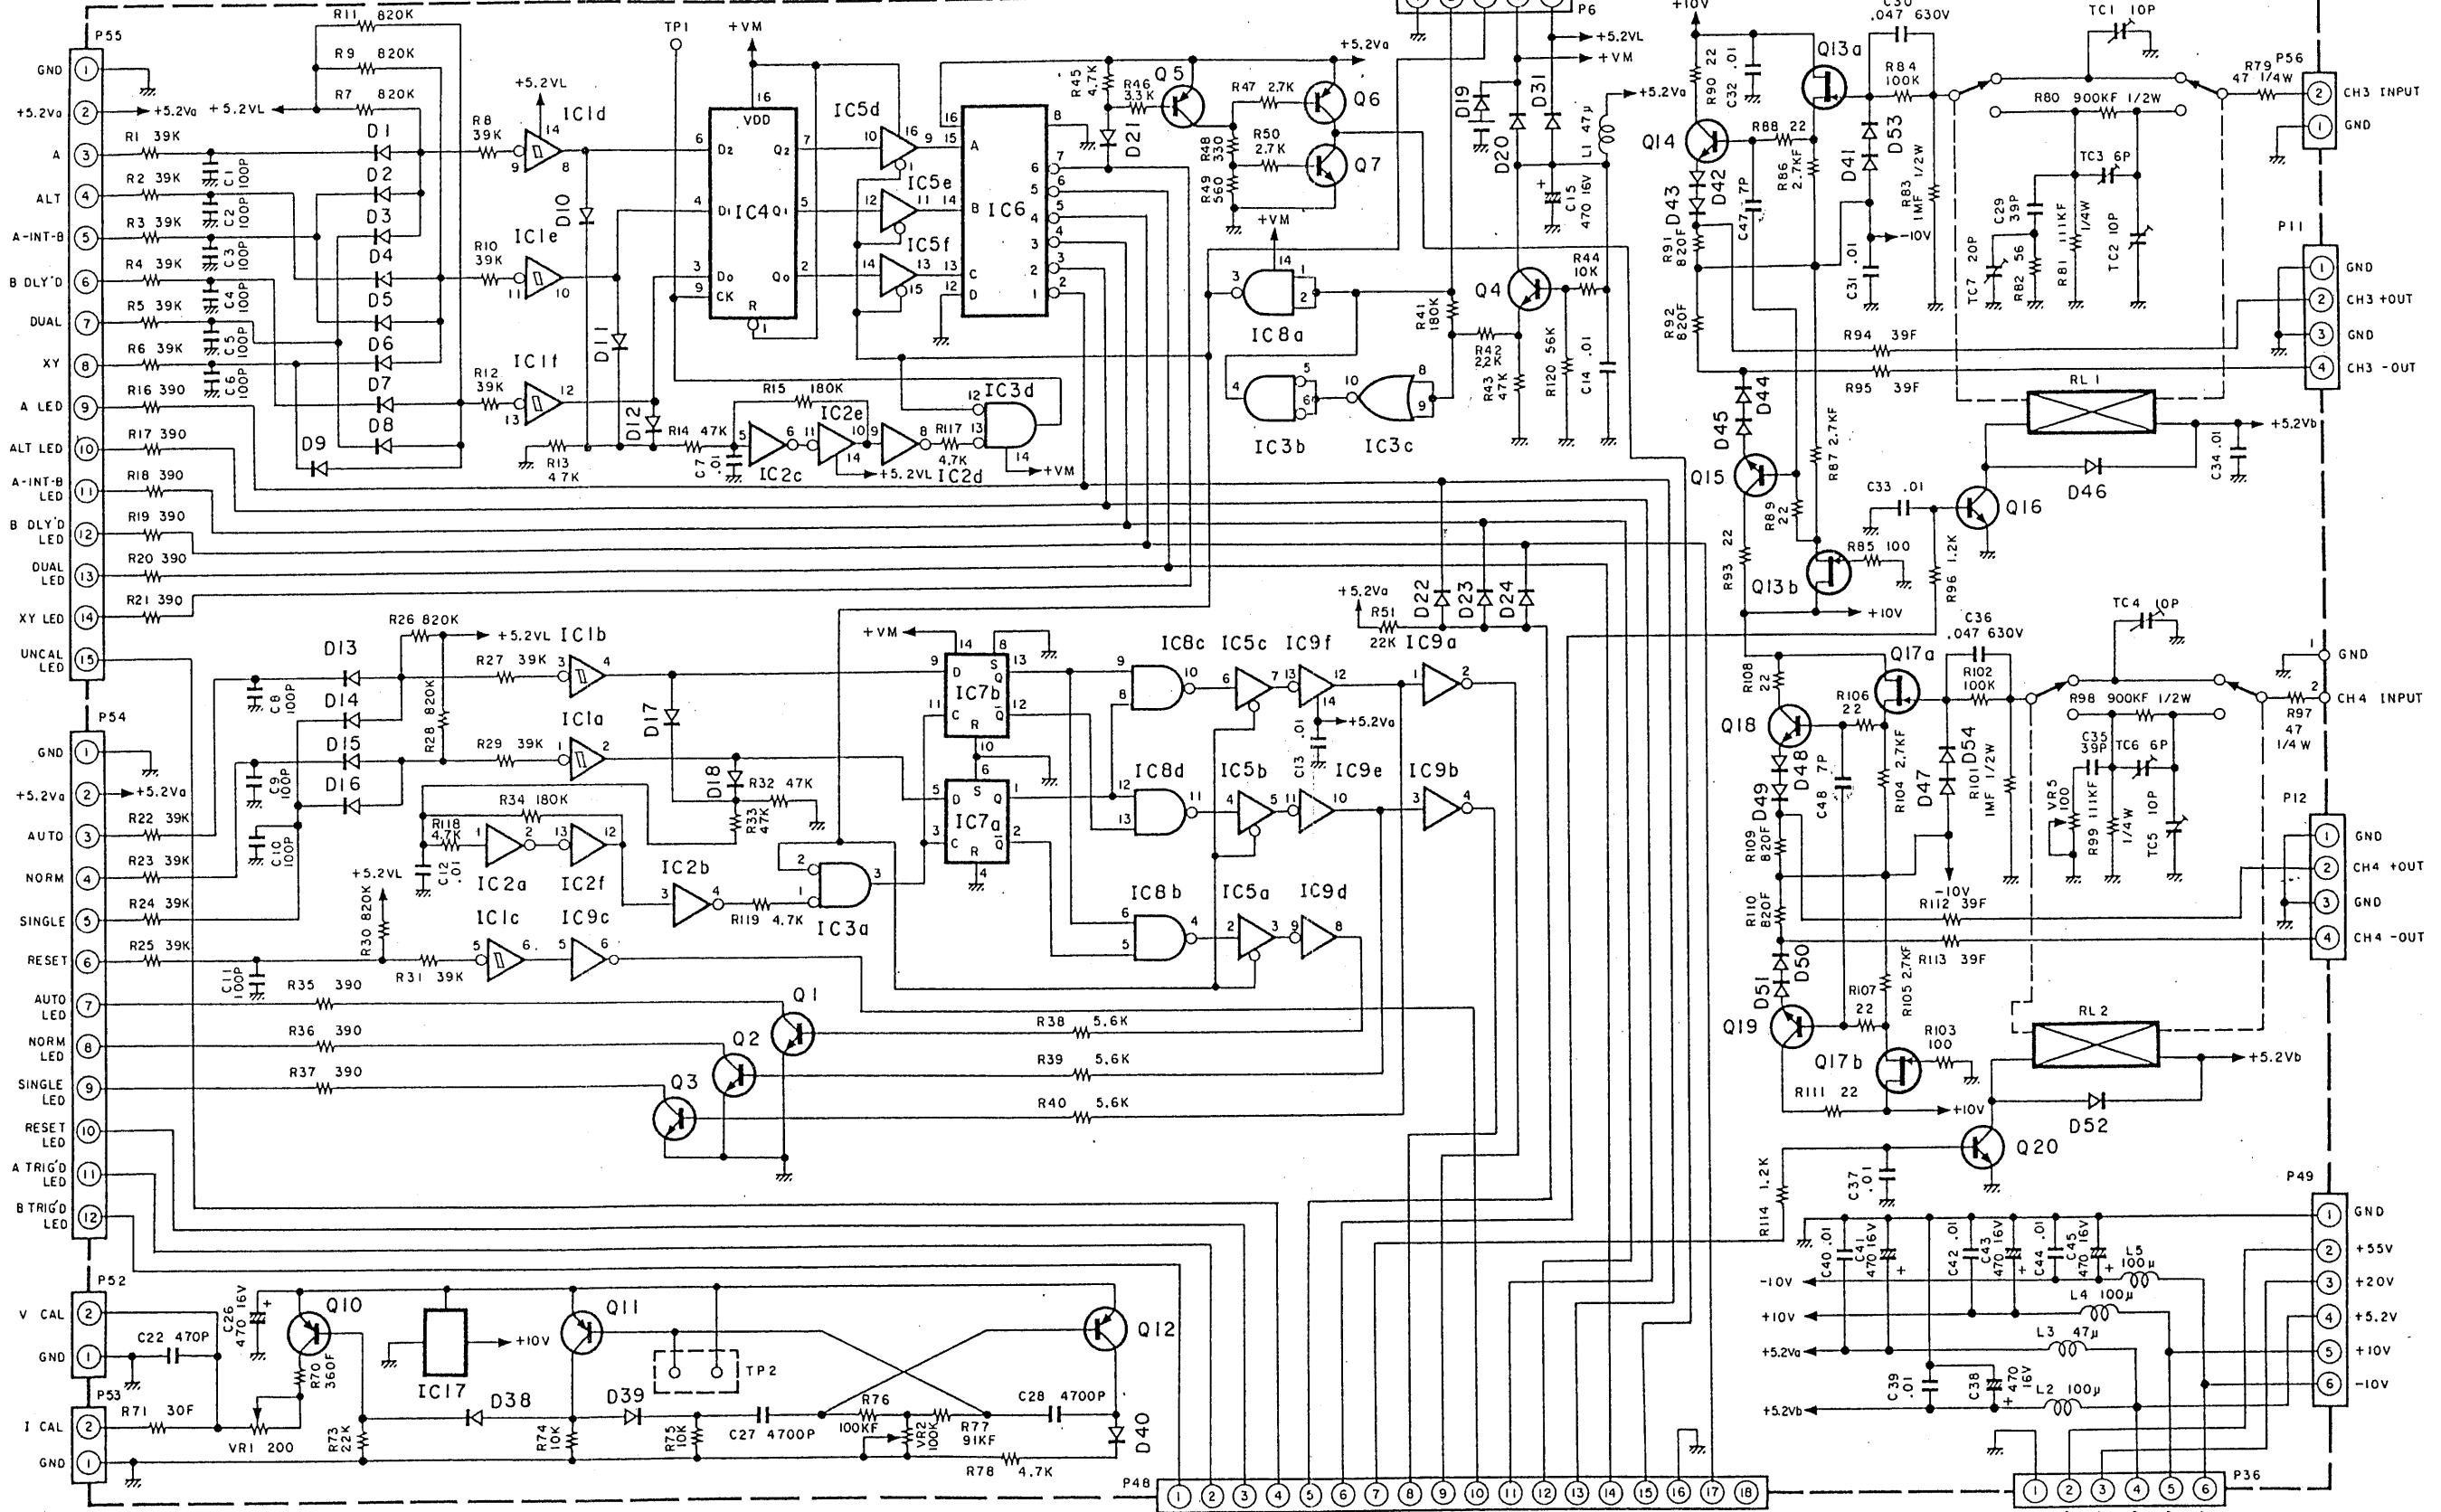


- |                   |                             |                                 |
|-------------------|-----------------------------|---------------------------------|
| IC1 : MC14584BCP  | IC6 : SN7442AN              | Q1~4,7 : 2SC536KNP(F)           |
| IC2 : MC14069UBCP | IC7 : MC14013BCP            | Q5,6,10~12 : 2SA608KNP(F)       |
| IC3 : MC14001BCP  | IC8 : MC14011BCP            | Q13,17 : DN1901                 |
| IC4 : MC14174BCP  | IC9 : SN74LS04N             | Q14,15,18,19 : 2SC1215 (T or S) |
| IC5 : MC14503BCP  | IC17 : FS7805L or MC78L05CP | Q16,20 : 2SD438(F)              |

- D1~24, 31, 39, 40, 42~46, 48~54 : DS442X  
 D38 : IN60  
 D41, 47 : IS1544A


CS-2100A

VERTICAL ATTENUATOR UNIT (X75-1120-00)

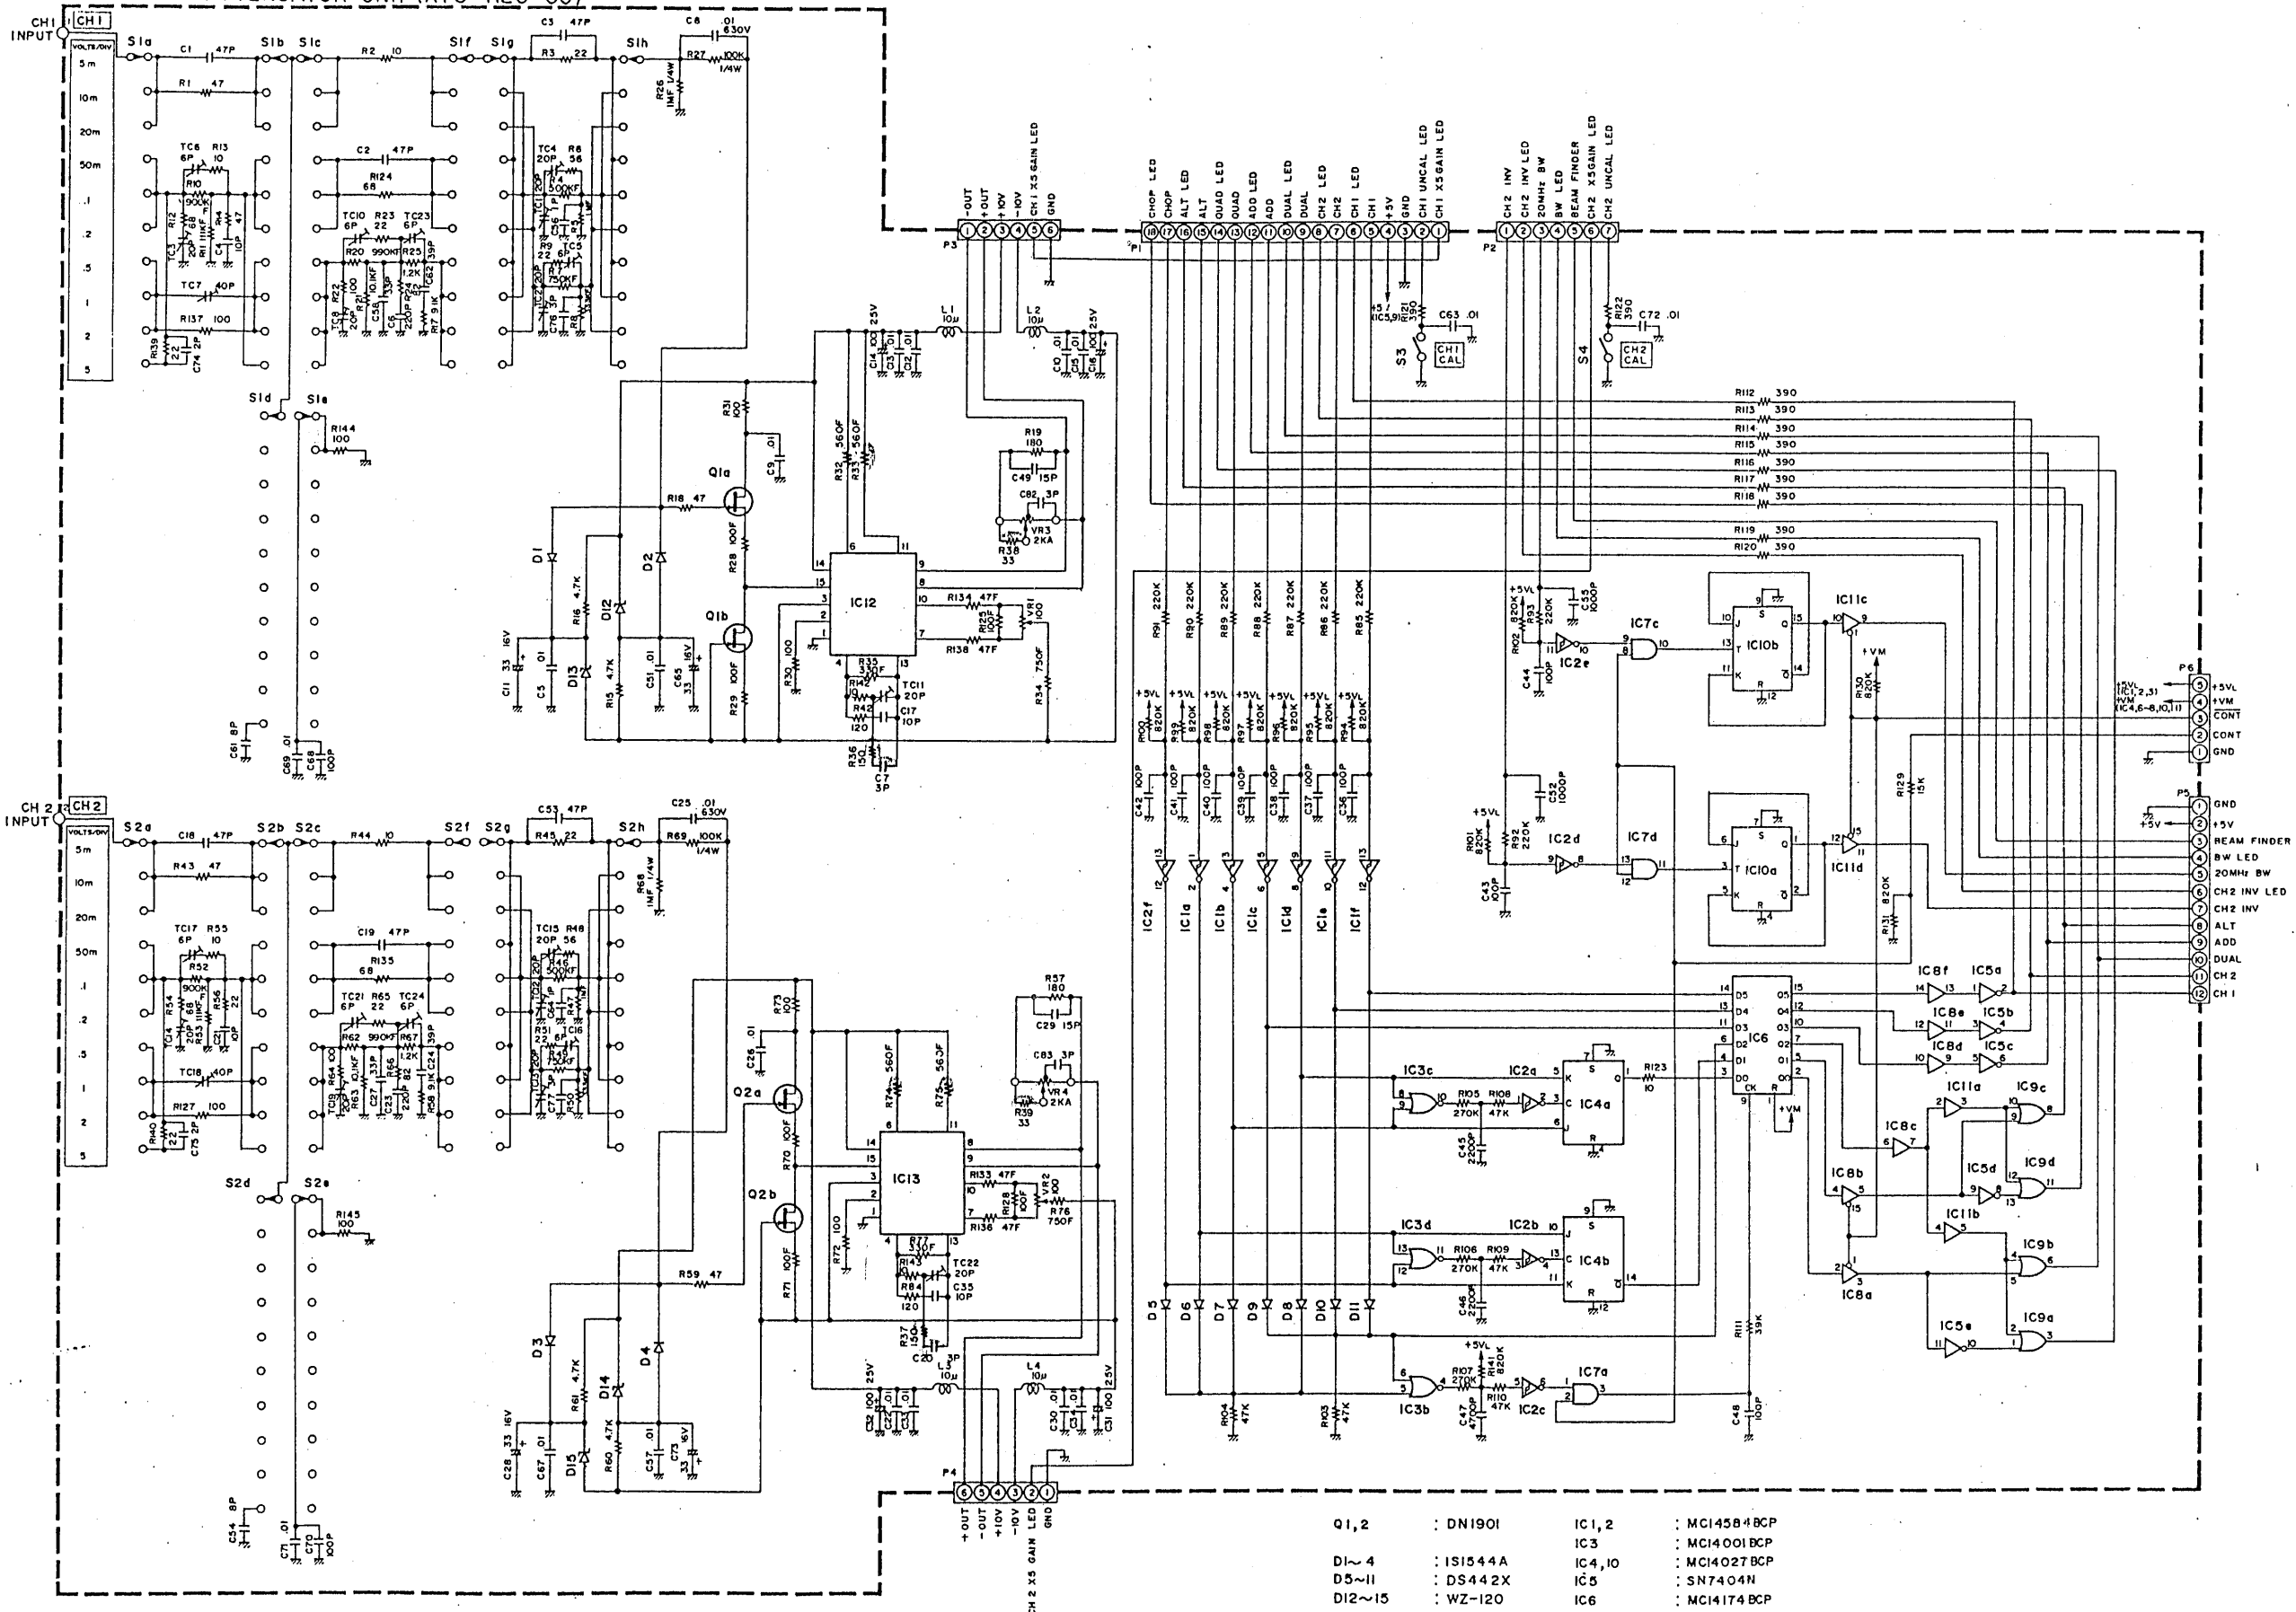

- |        |           |          |              |
|--------|-----------|----------|--------------|
| Q1, 2  | : DN1901  | IC1, 2   | : MC14584BCP |
| D1~4   | : 1S1544A | IC3      | : MC14001BCP |
| D5~11  | : DS442X  | IC4, 10  | : MC14027BCP |
| D12~15 | : WZ-120  | IC5      | : SN7404N    |
|        |           | IC6      | : MC14174BCP |
|        |           | IC7      | : MC14081BCP |
|        |           | IC8, 11  | : MC14503BCP |
|        |           | IC9      | : SN7432N    |
|        |           | IC12, 13 | : ATM-4020   |


VERTICAL PREAMP UNIT (X73-1320-00)

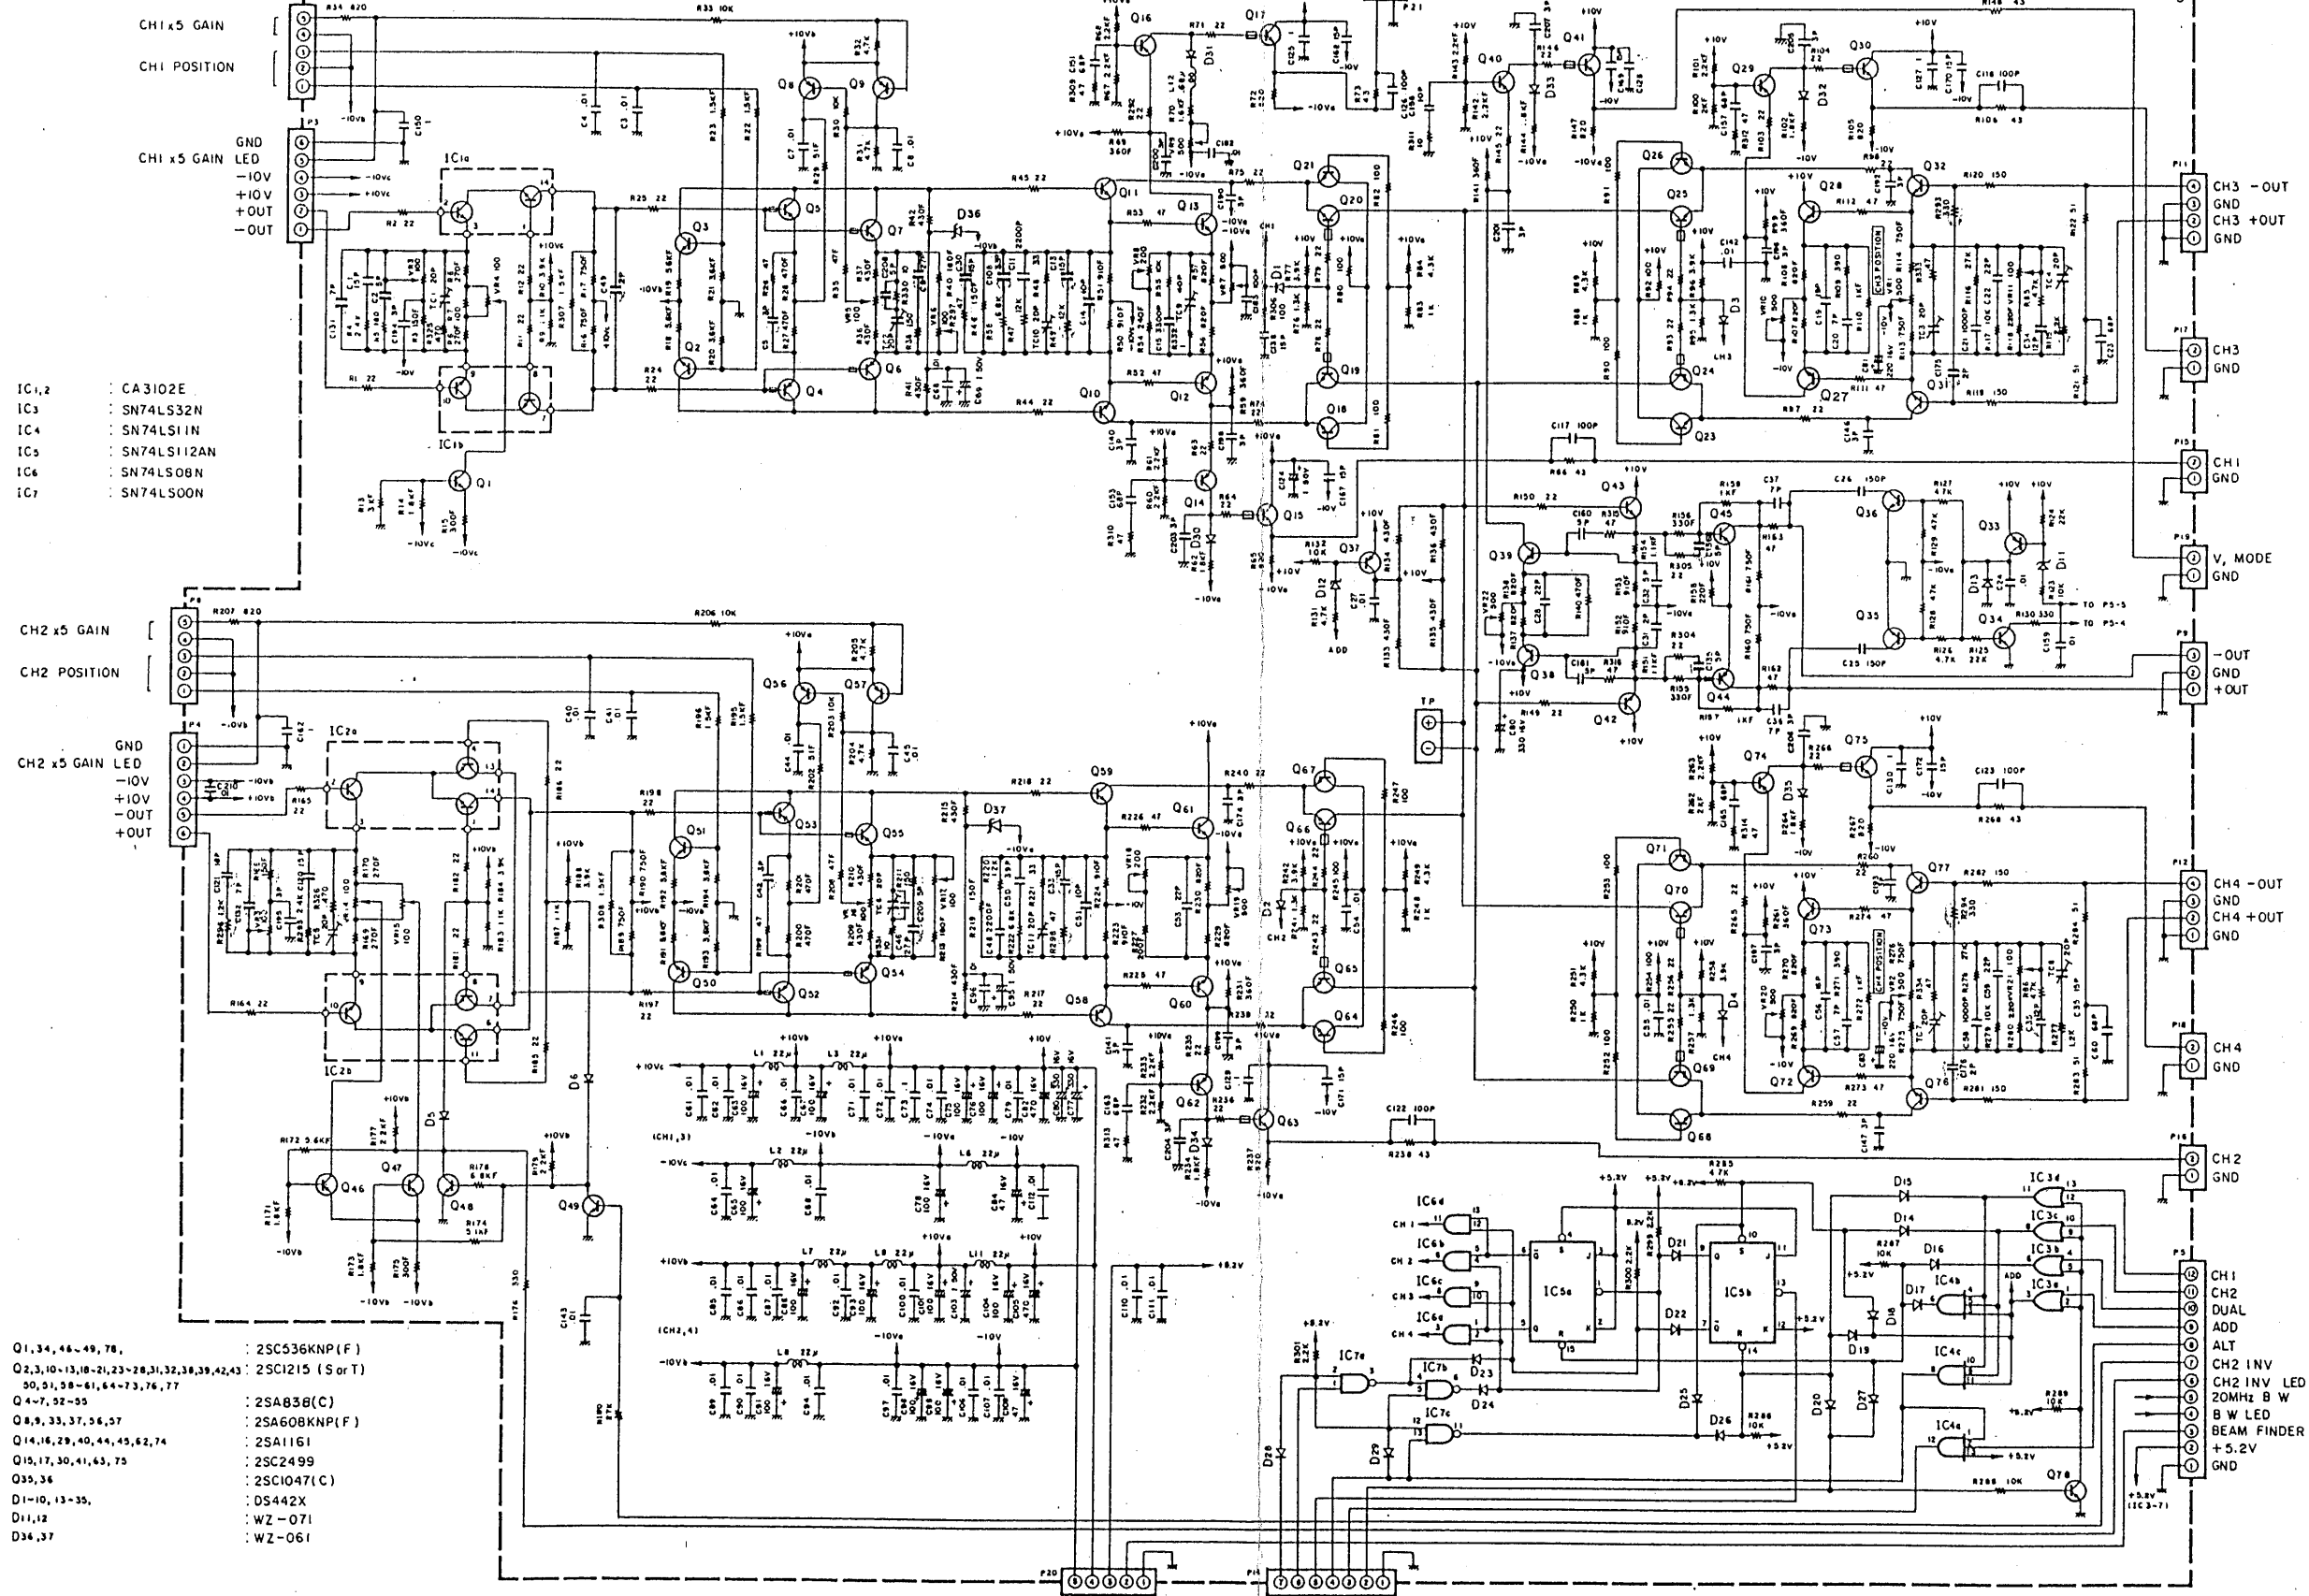


- IC1,2 : CA3102E
- IC3 : SN74LS32N
- IC4 : SN74LS11N
- IC5 : SN74LS112AN
- IC6 : SN74LS08N
- IC7 : SN74LS00N

- Q1, 34, 46-49, 78, : 2SC536KNP(F)
- Q2,3,10-13,16-21,23-28,31,32,38,39,42,43 : 2SC1215 (S or T)
- 30,31,58-61,64-73,76,77
- Q4-7, 52-55 : 2SA838(C)
- Q8,9, 33, 37, 56, 57 : 2SA608KNP(F)
- Q14,16,29,40,44,45,62,74 : 2SA1161
- Q15,17,30,41,63, 75 : 2SC2499
- Q35,36 : 2SC1047(C)
- D1-10, 13-35, : DS442X
- D11,12 : WZ-071
- D36,37 : WZ-061


CS-2100A

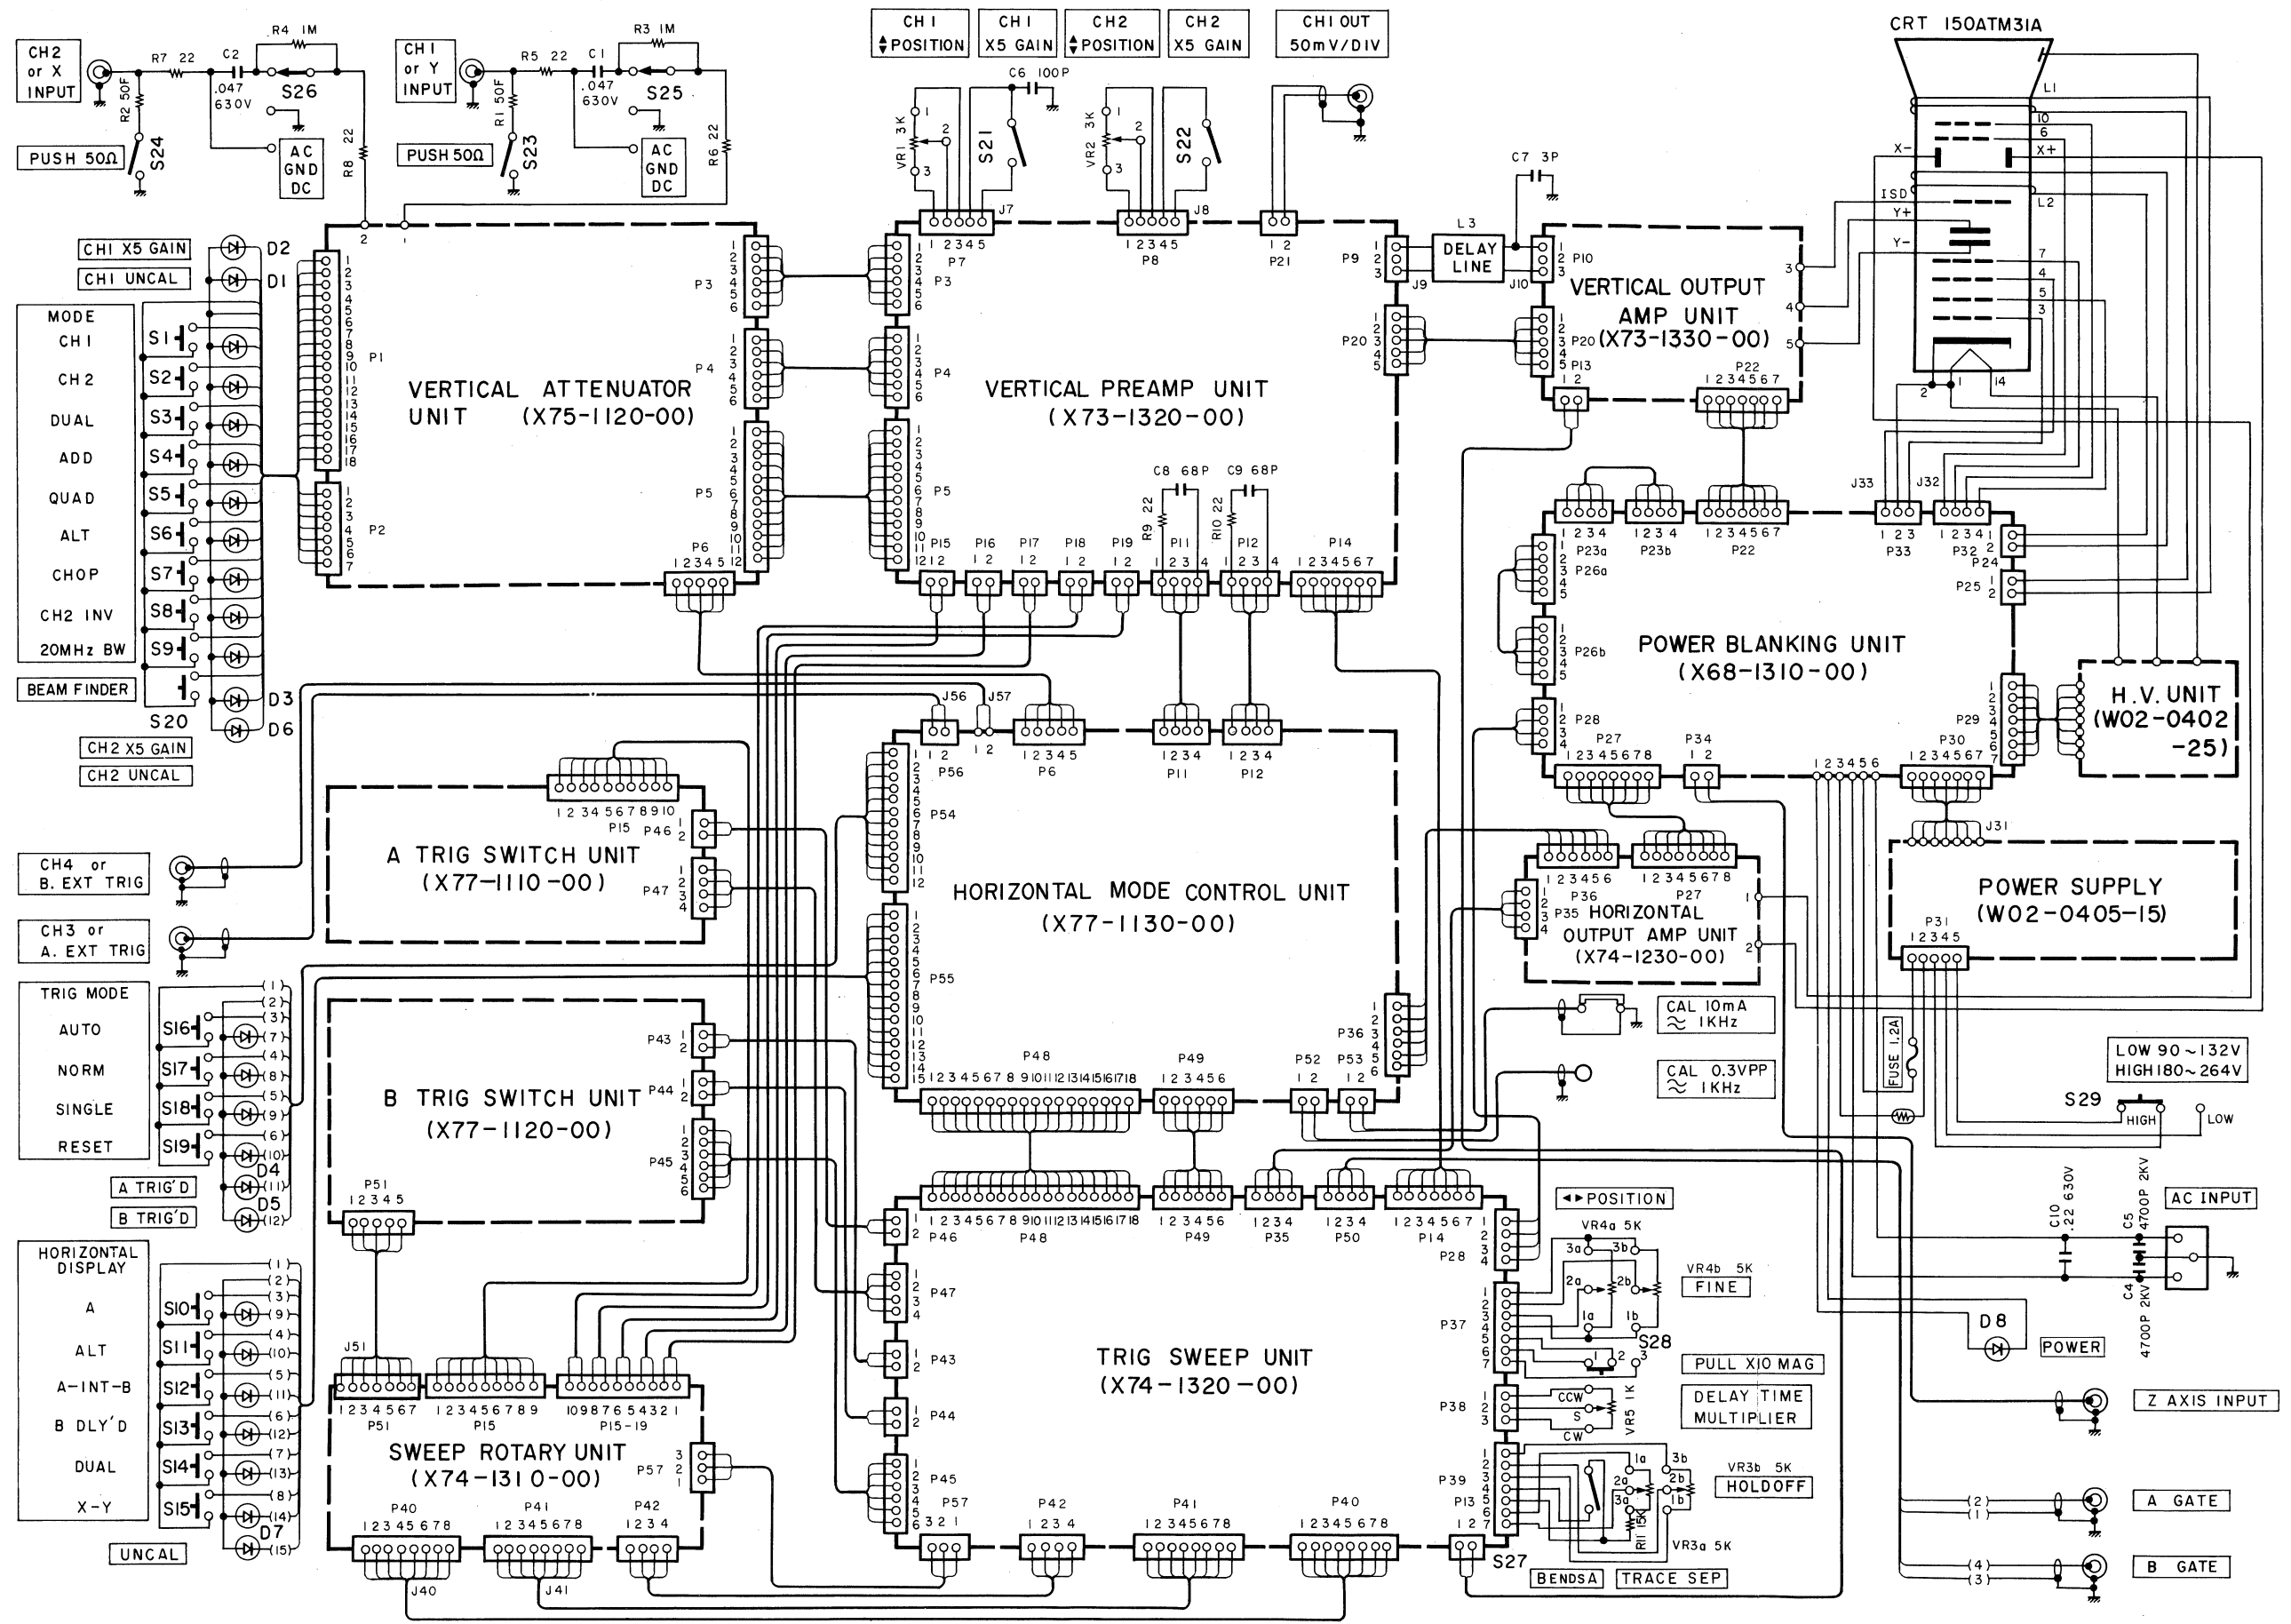

# VERTICAL ATTENUATOR UNIT (X75-1120-00)

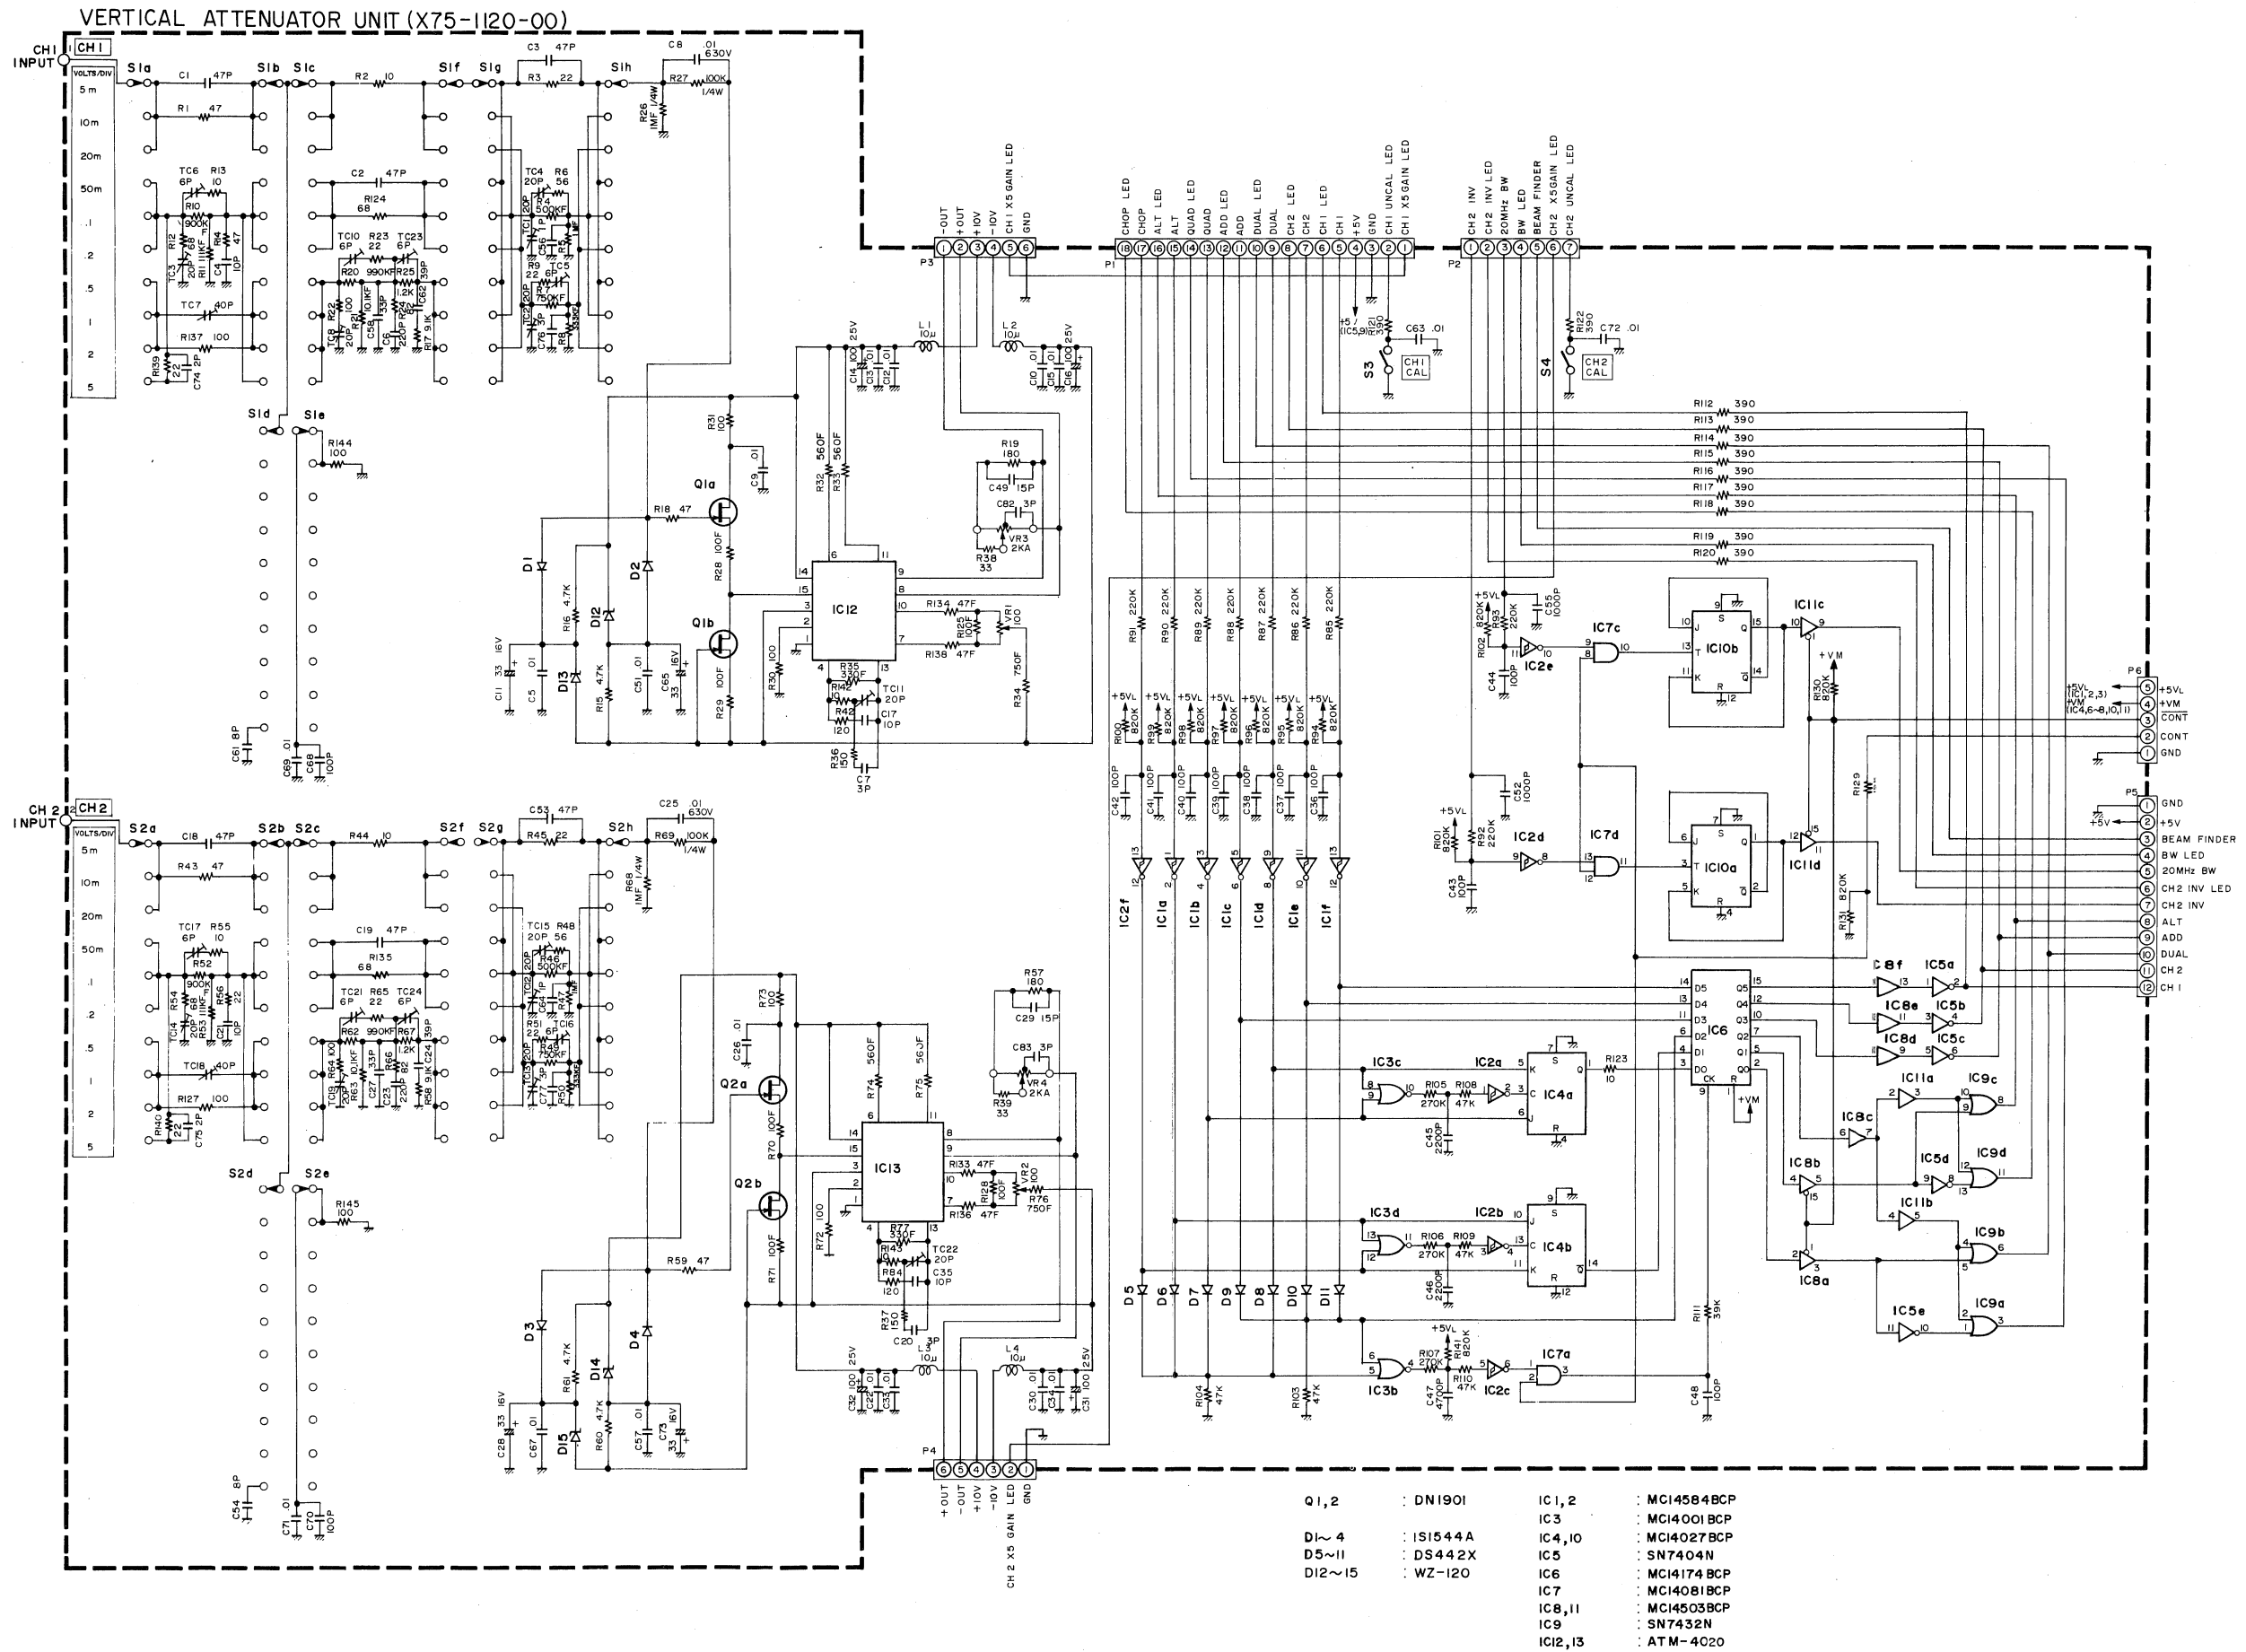



# VERTICAL PREAMP UNIT (X73-1320-00)

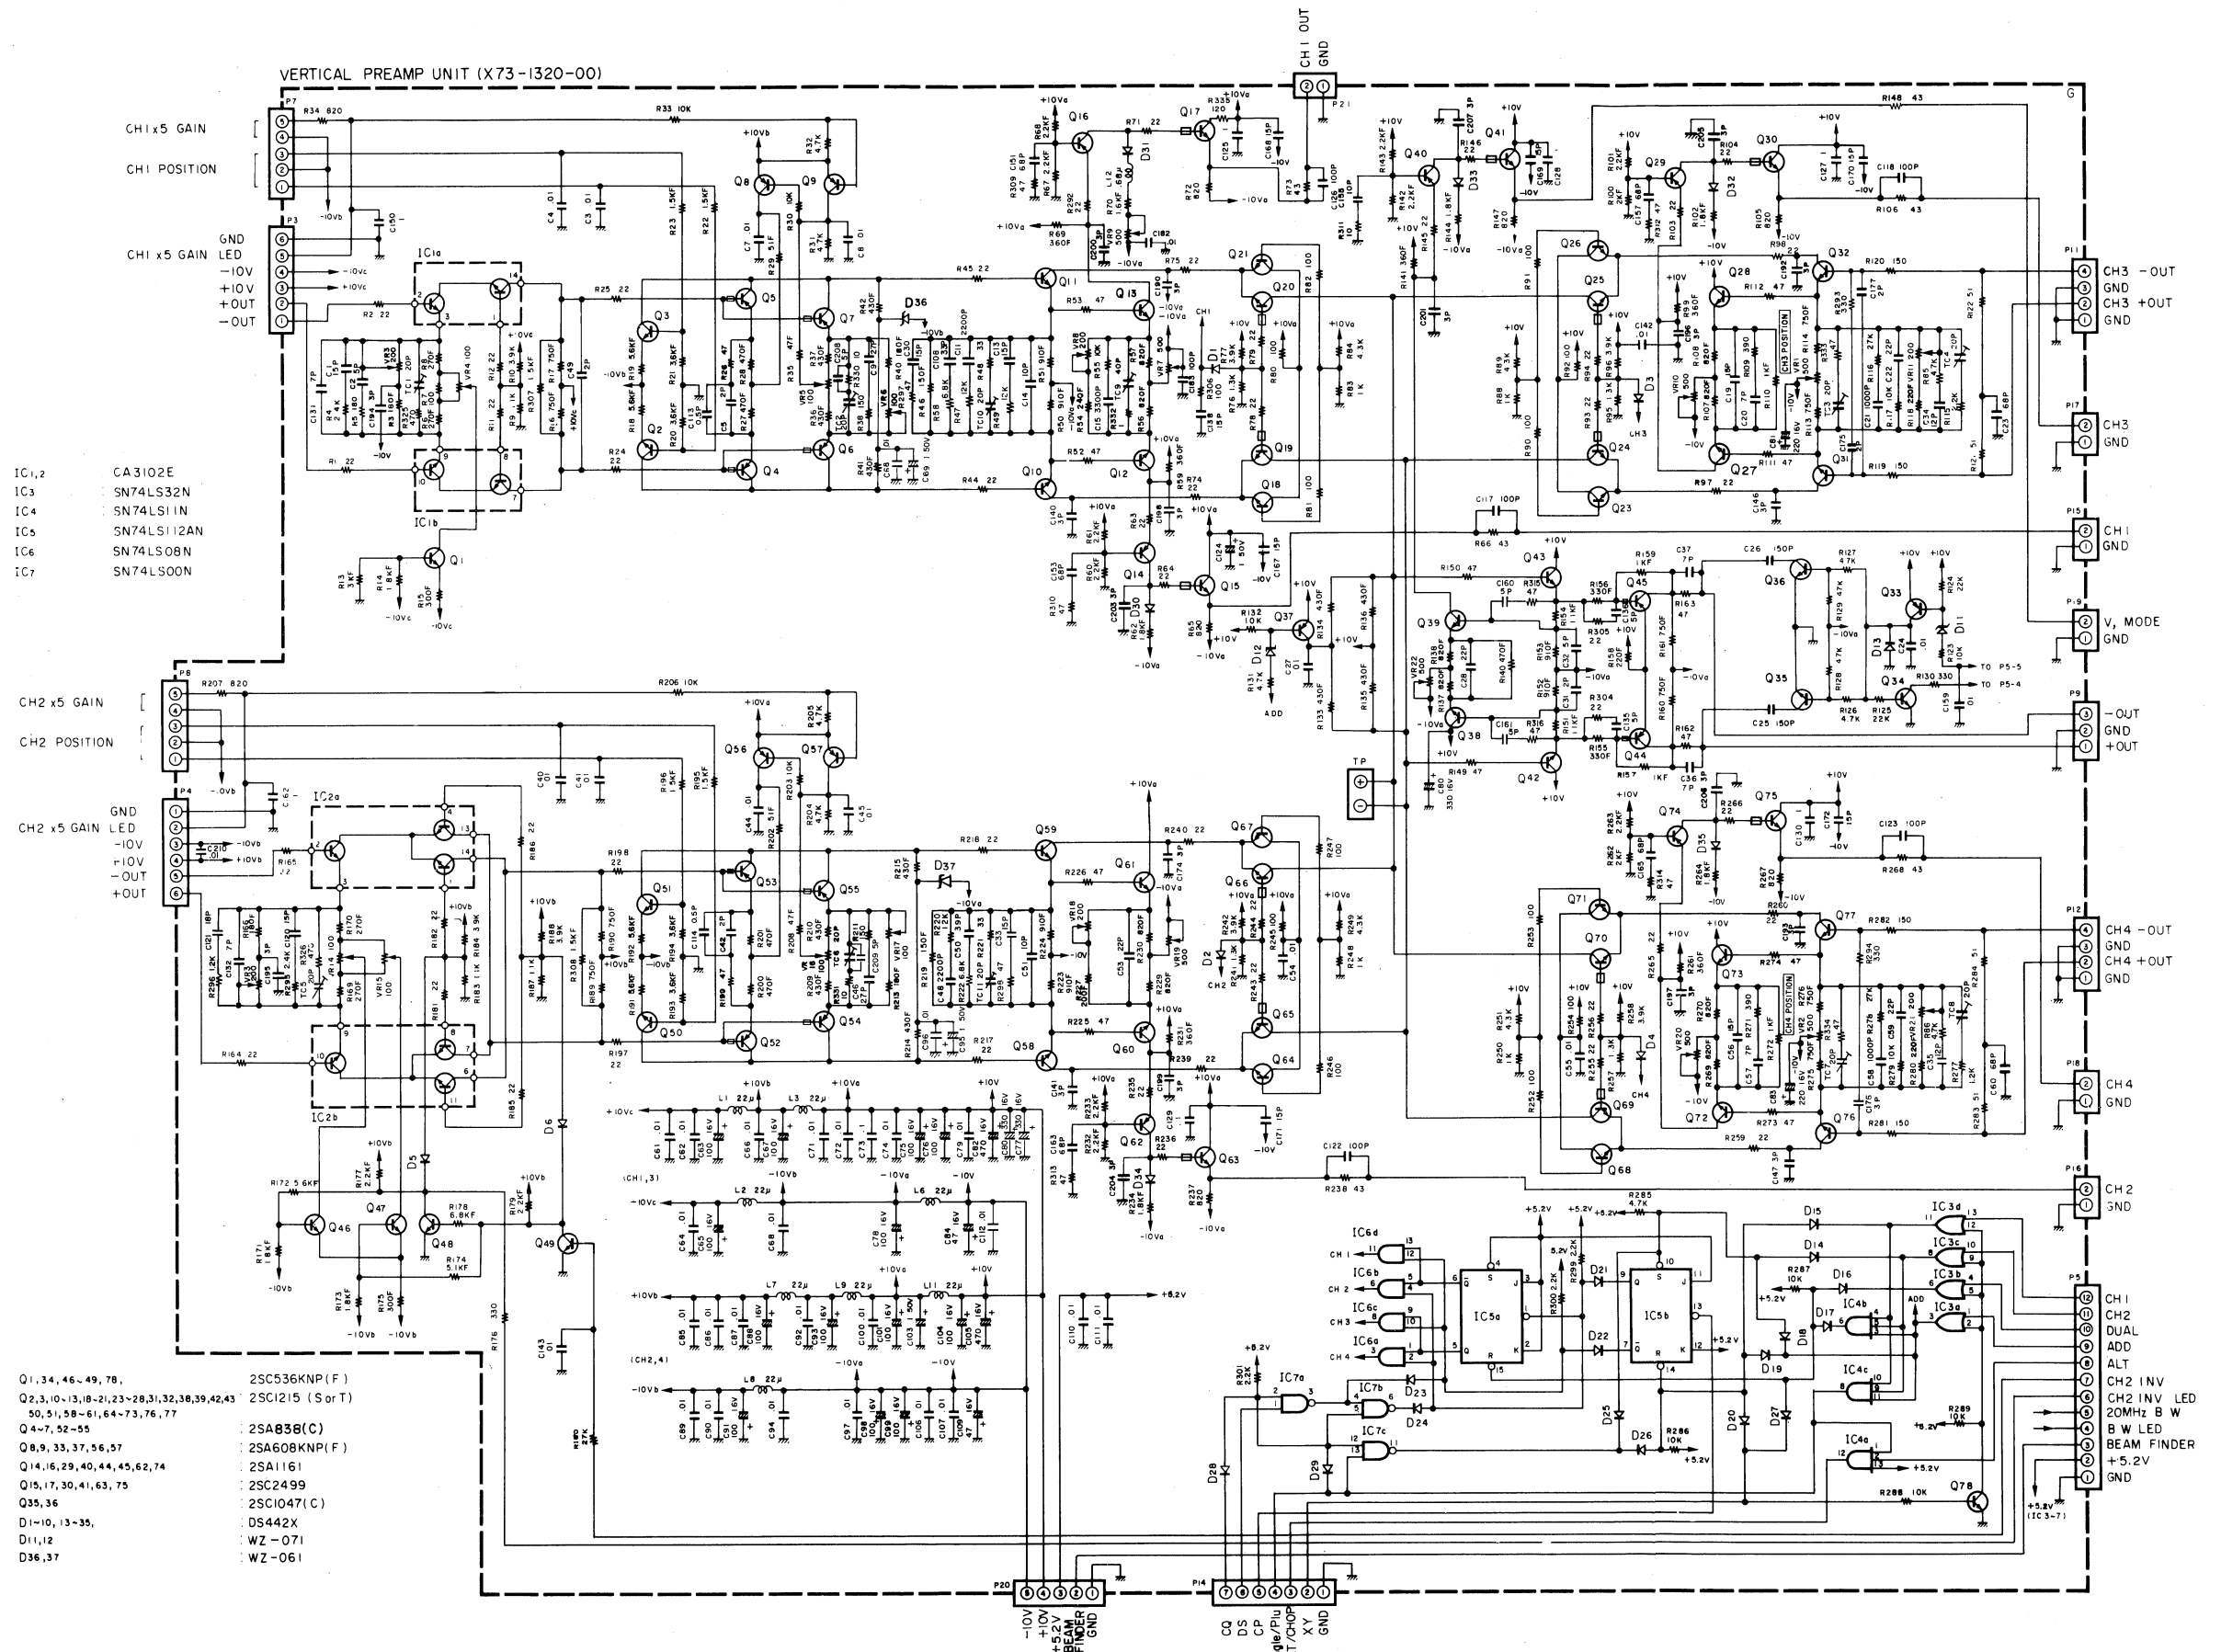

# VERTICAL OUTPUT AMP UNIT (X73-1330-00)

VERTICAL OUTPUT AMP UNIT (X73-1330-00)

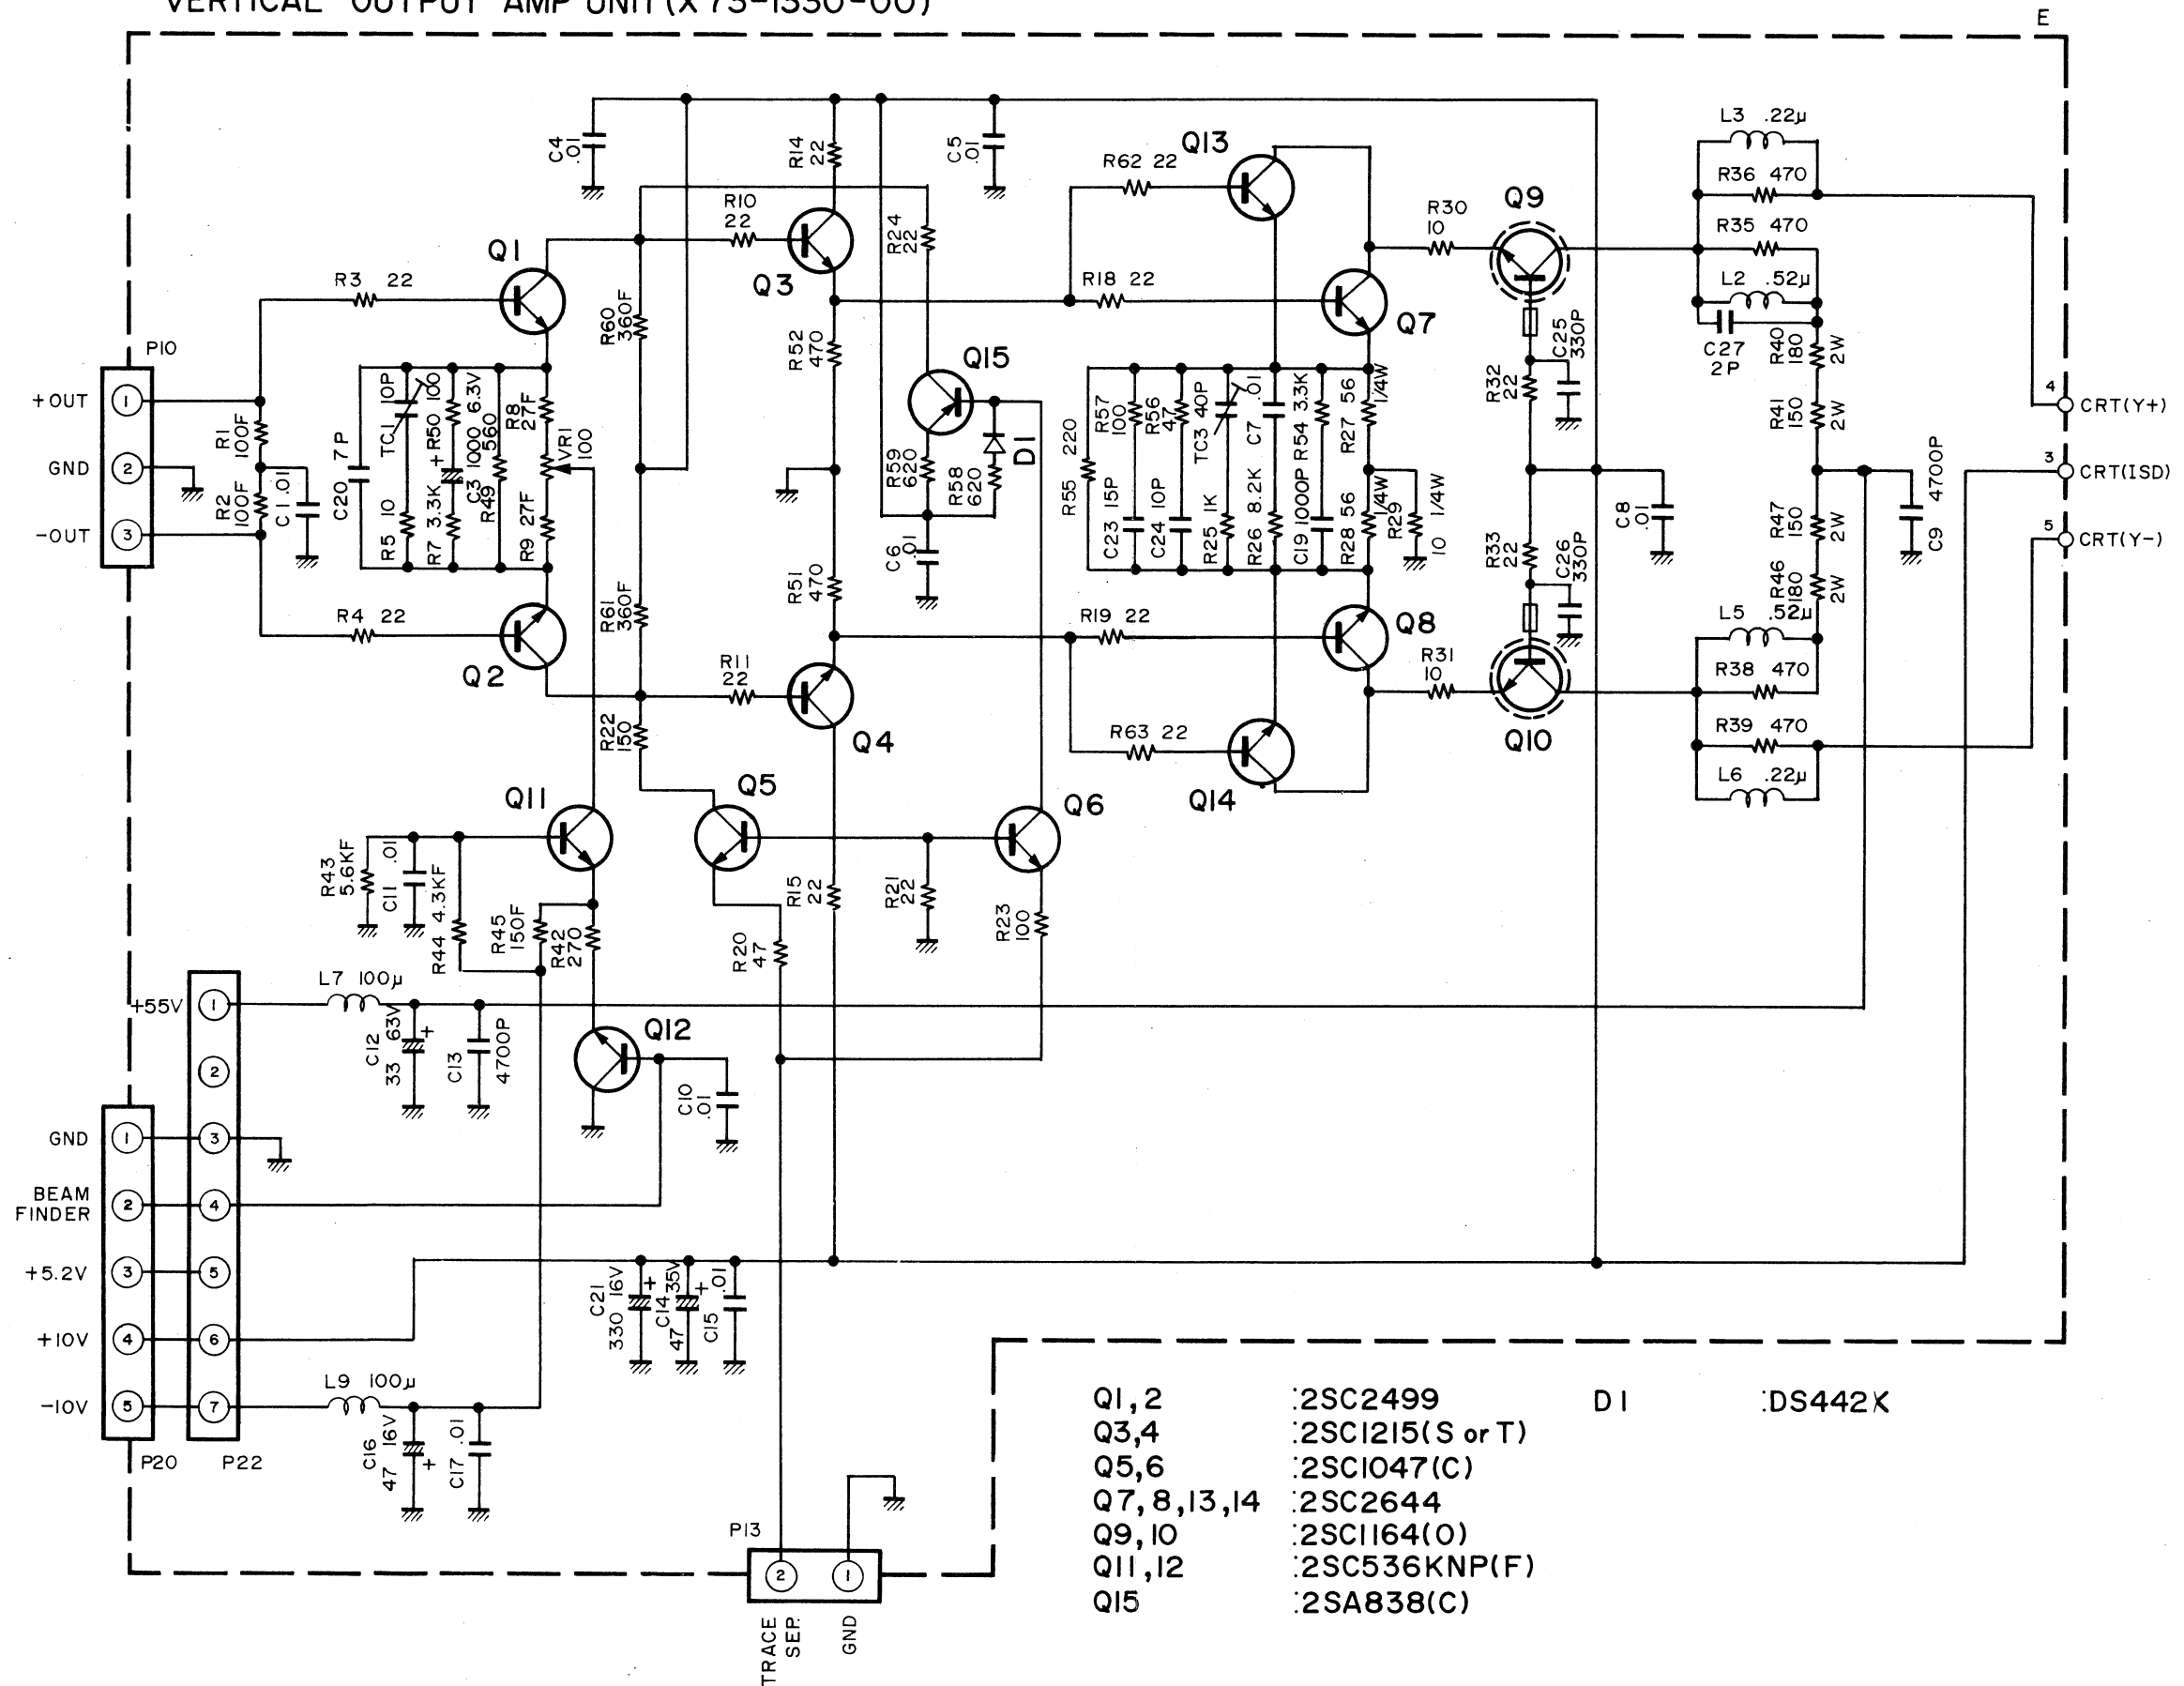

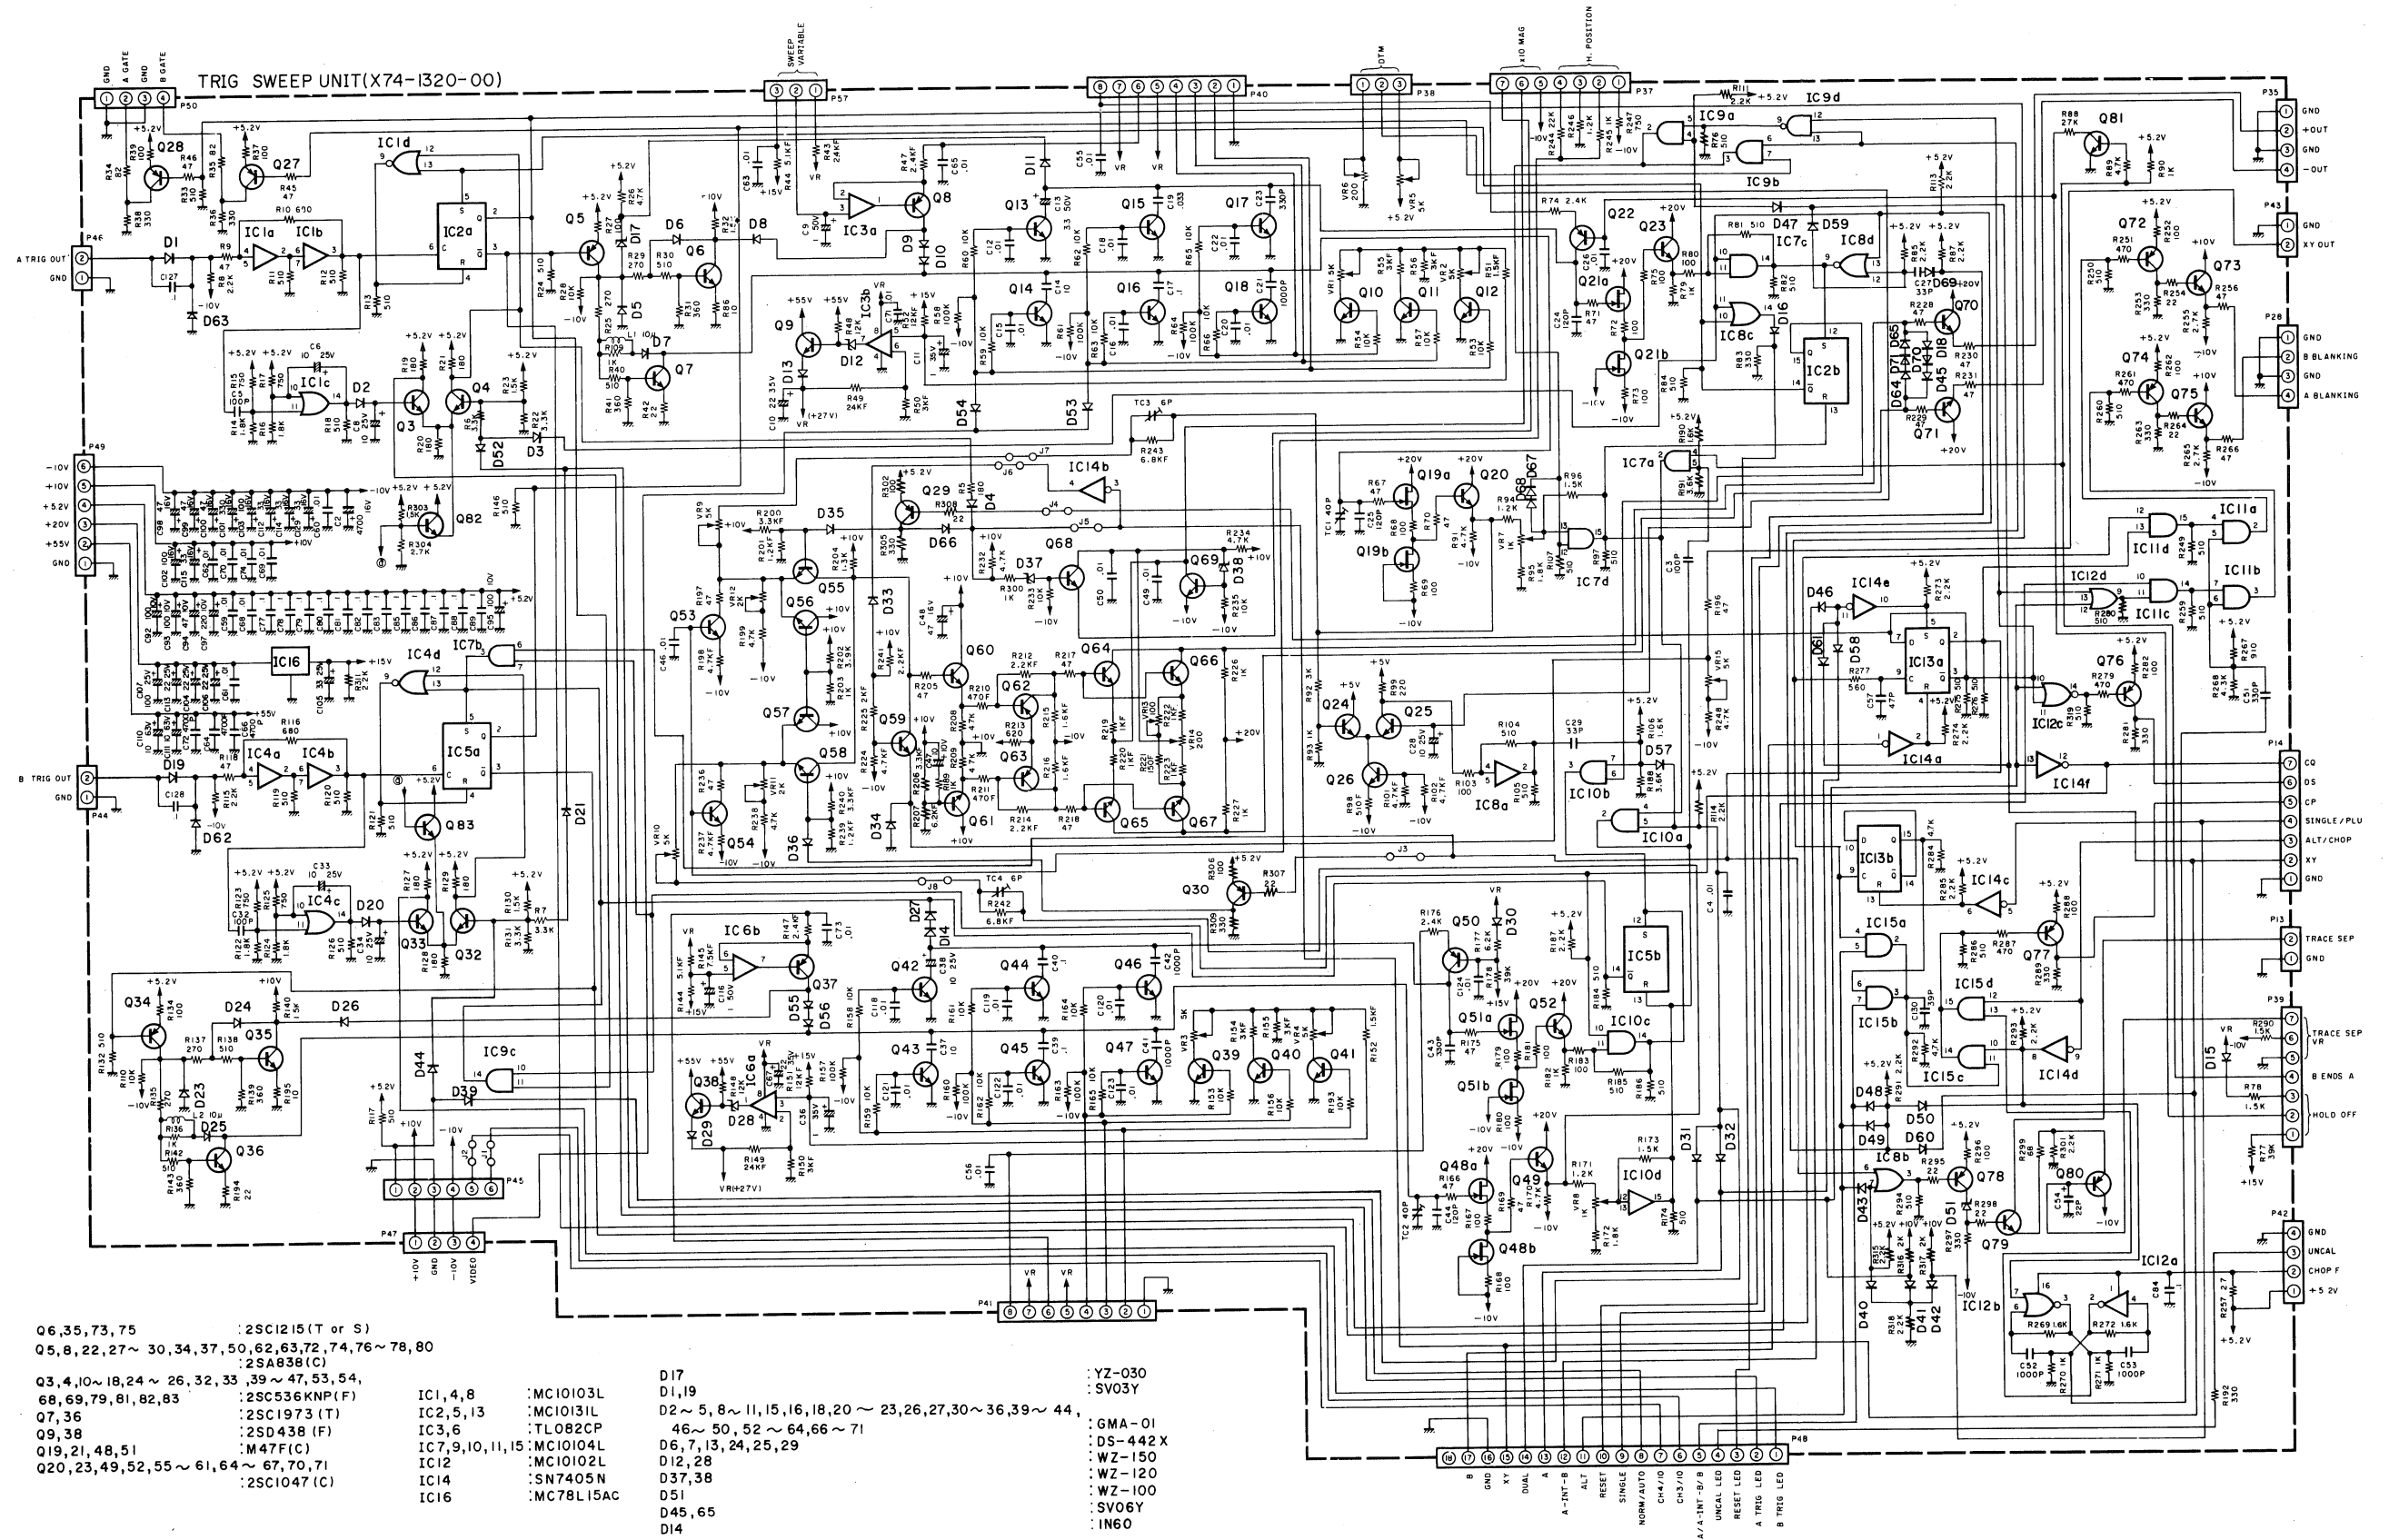

- Q6,35,73,75 : 25C1215 (T or S)
- Q5,8,22,27~30,34,37,50,62,63,72,74,76~78,80 : 25A838 (C)
- Q3,4,10~18,24~26,32,33,39~47,53,54,68,69,79,81,82,83 : 25C536KNP (F)
- Q7,36 : 25C1973 (T)
- Q9,38 : 25D438 (F)
- Q19,21,48,51 : M47F (C)
- Q20,23,49,52,55~61,64~67,70,71 : 25C1047 (C)


- IC1,4,8 : MC10103L
- IC2,5,13 : MC1013L
- IC3,6 : TL082CP
- IC7,9,10,11,15 : MC10104L
- IC12 : MC10102L
- IC14 : SN7405N
- IC16 : MC78L15AC

- D17 : YZ-030
- D1,19 : SV03Y
- D2~5,8~11,15,16,18,20~23,26,27,30~36,39~44 : GMA-01
- 46~50,52~64,66~71 : DS-442X
- D6,7,13,24,25,29 : WZ-150
- D12,28 : WZ-120
- D37,38 : WZ-100
- D51 : WZ-100
- D45,65 : SV06Y
- D14 : IN60




# SWEEP ROTARY UNIT (X74-1310-00)

SWEEP ROTARY UNIT (X74-1310-00)

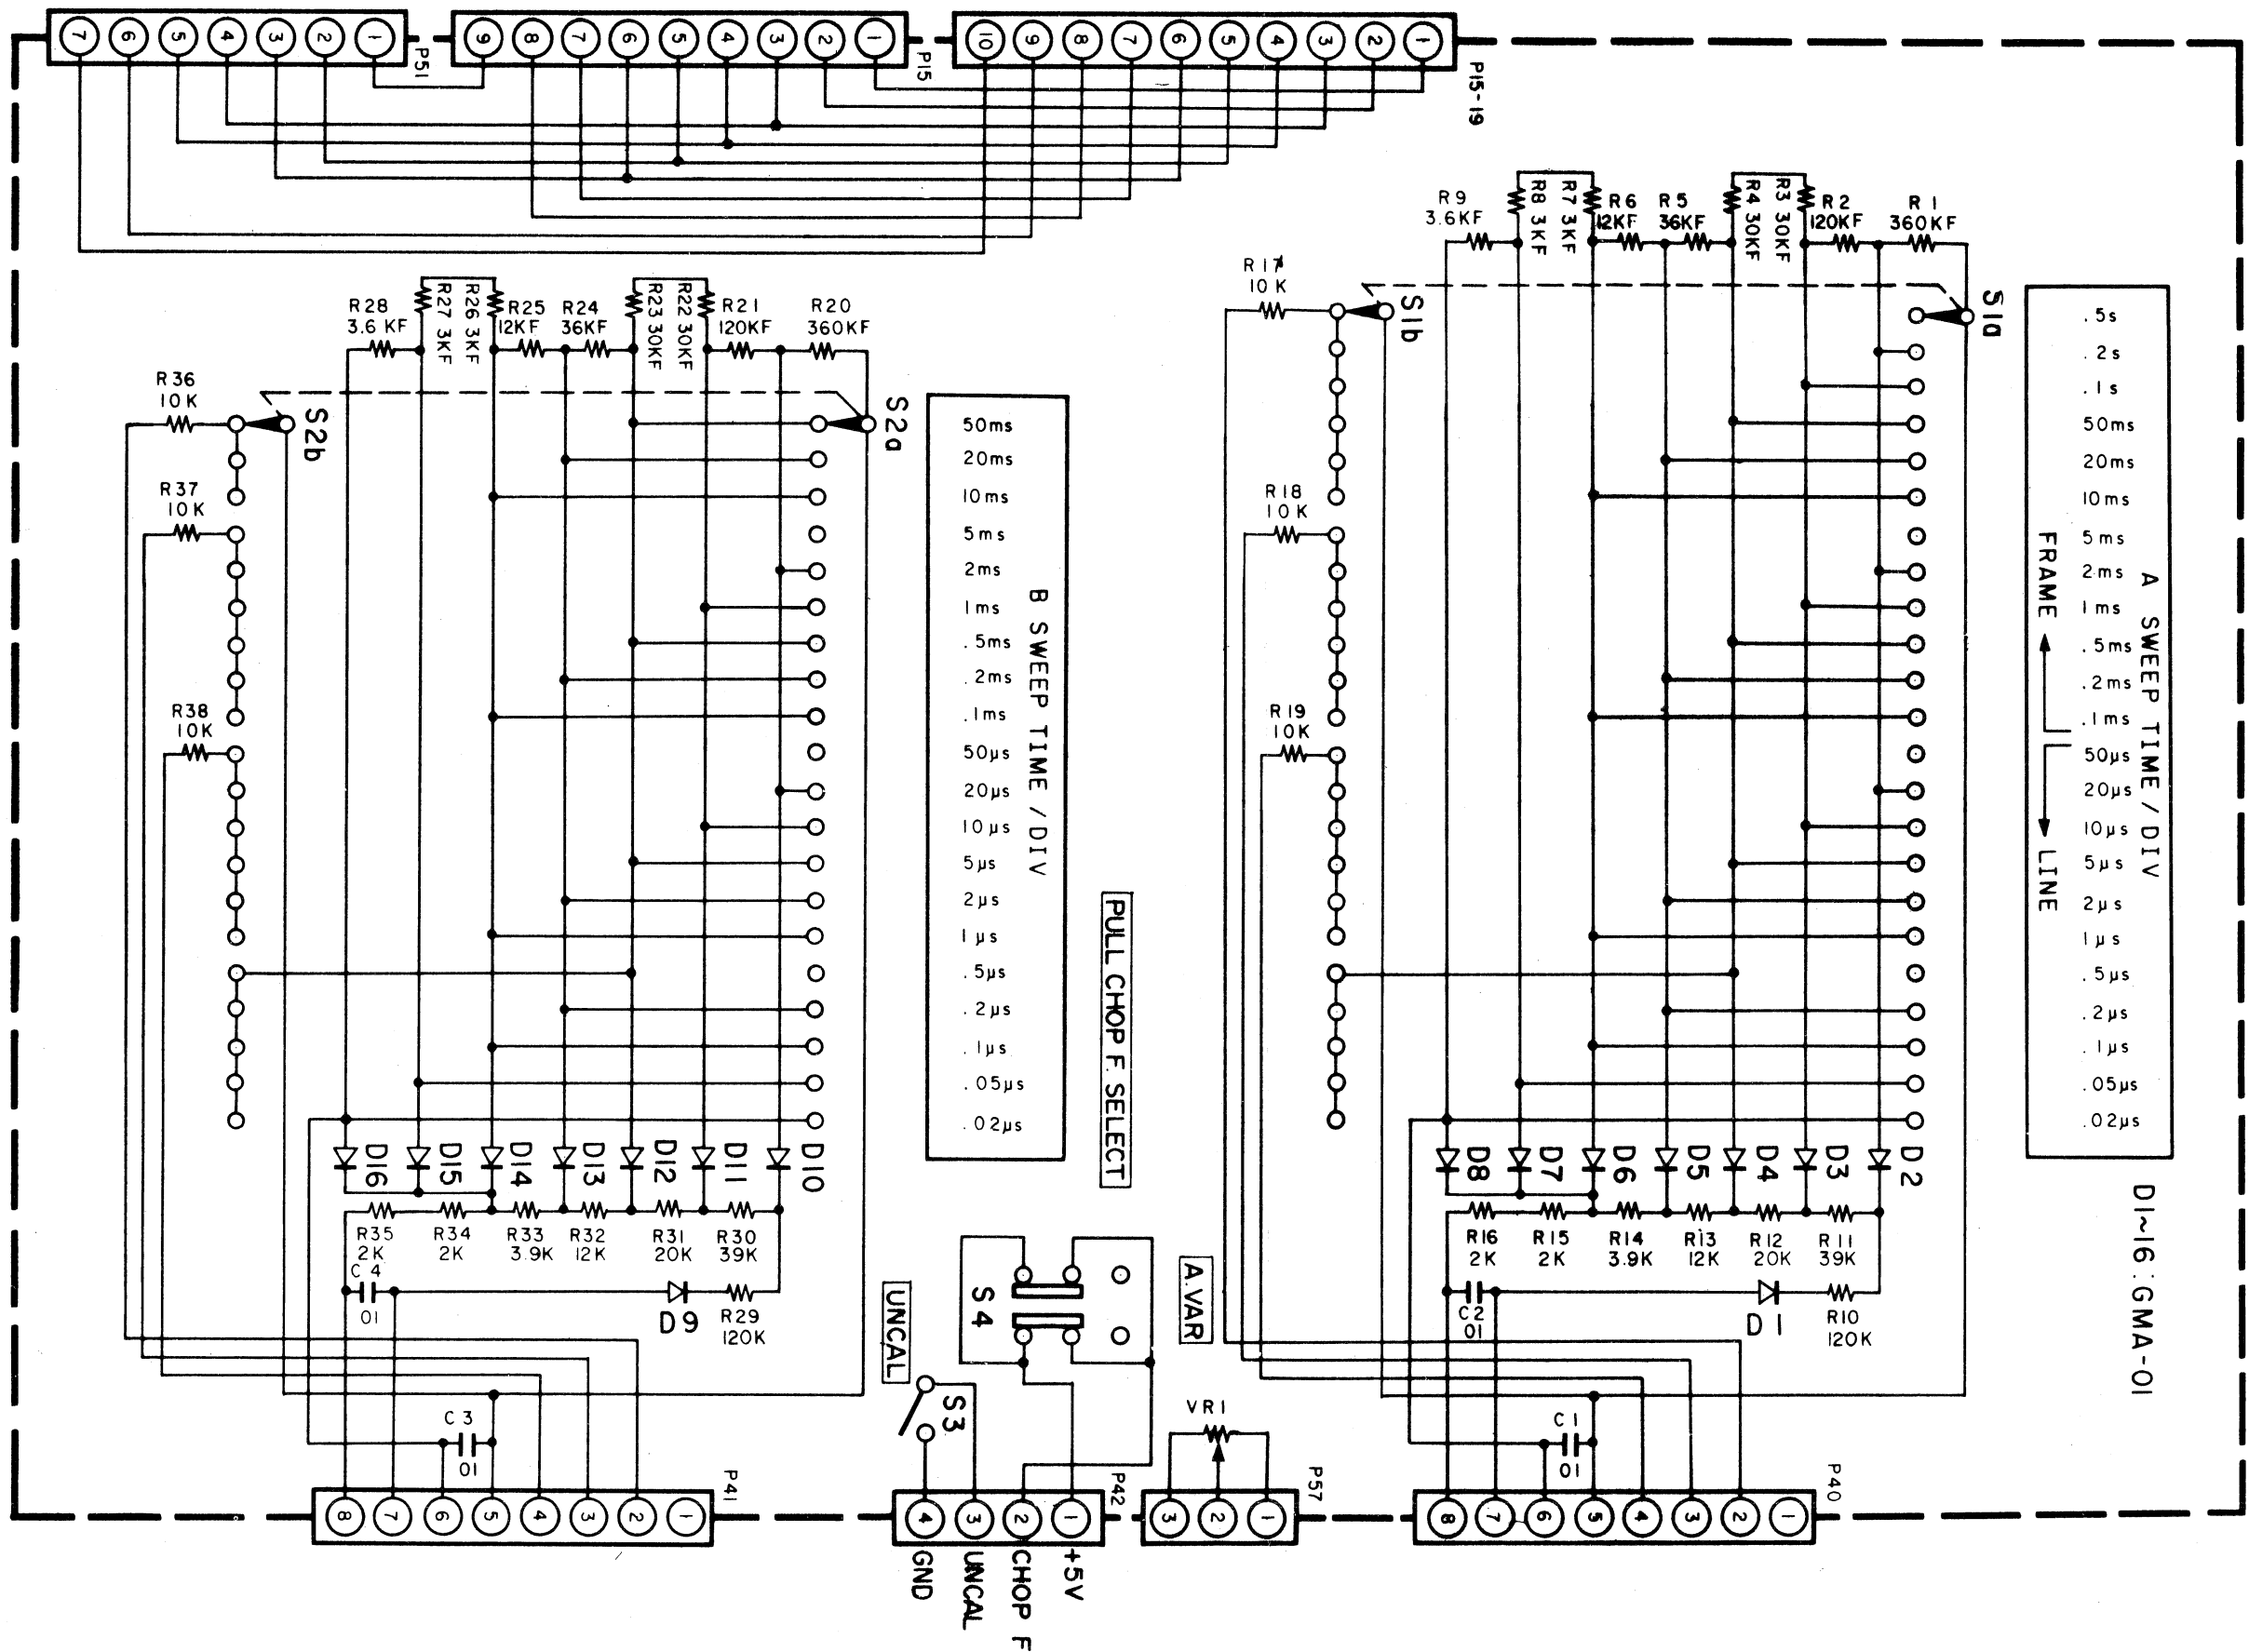


# HORIZONTAL MODE CONTROL UNIT (X77-1130-00)

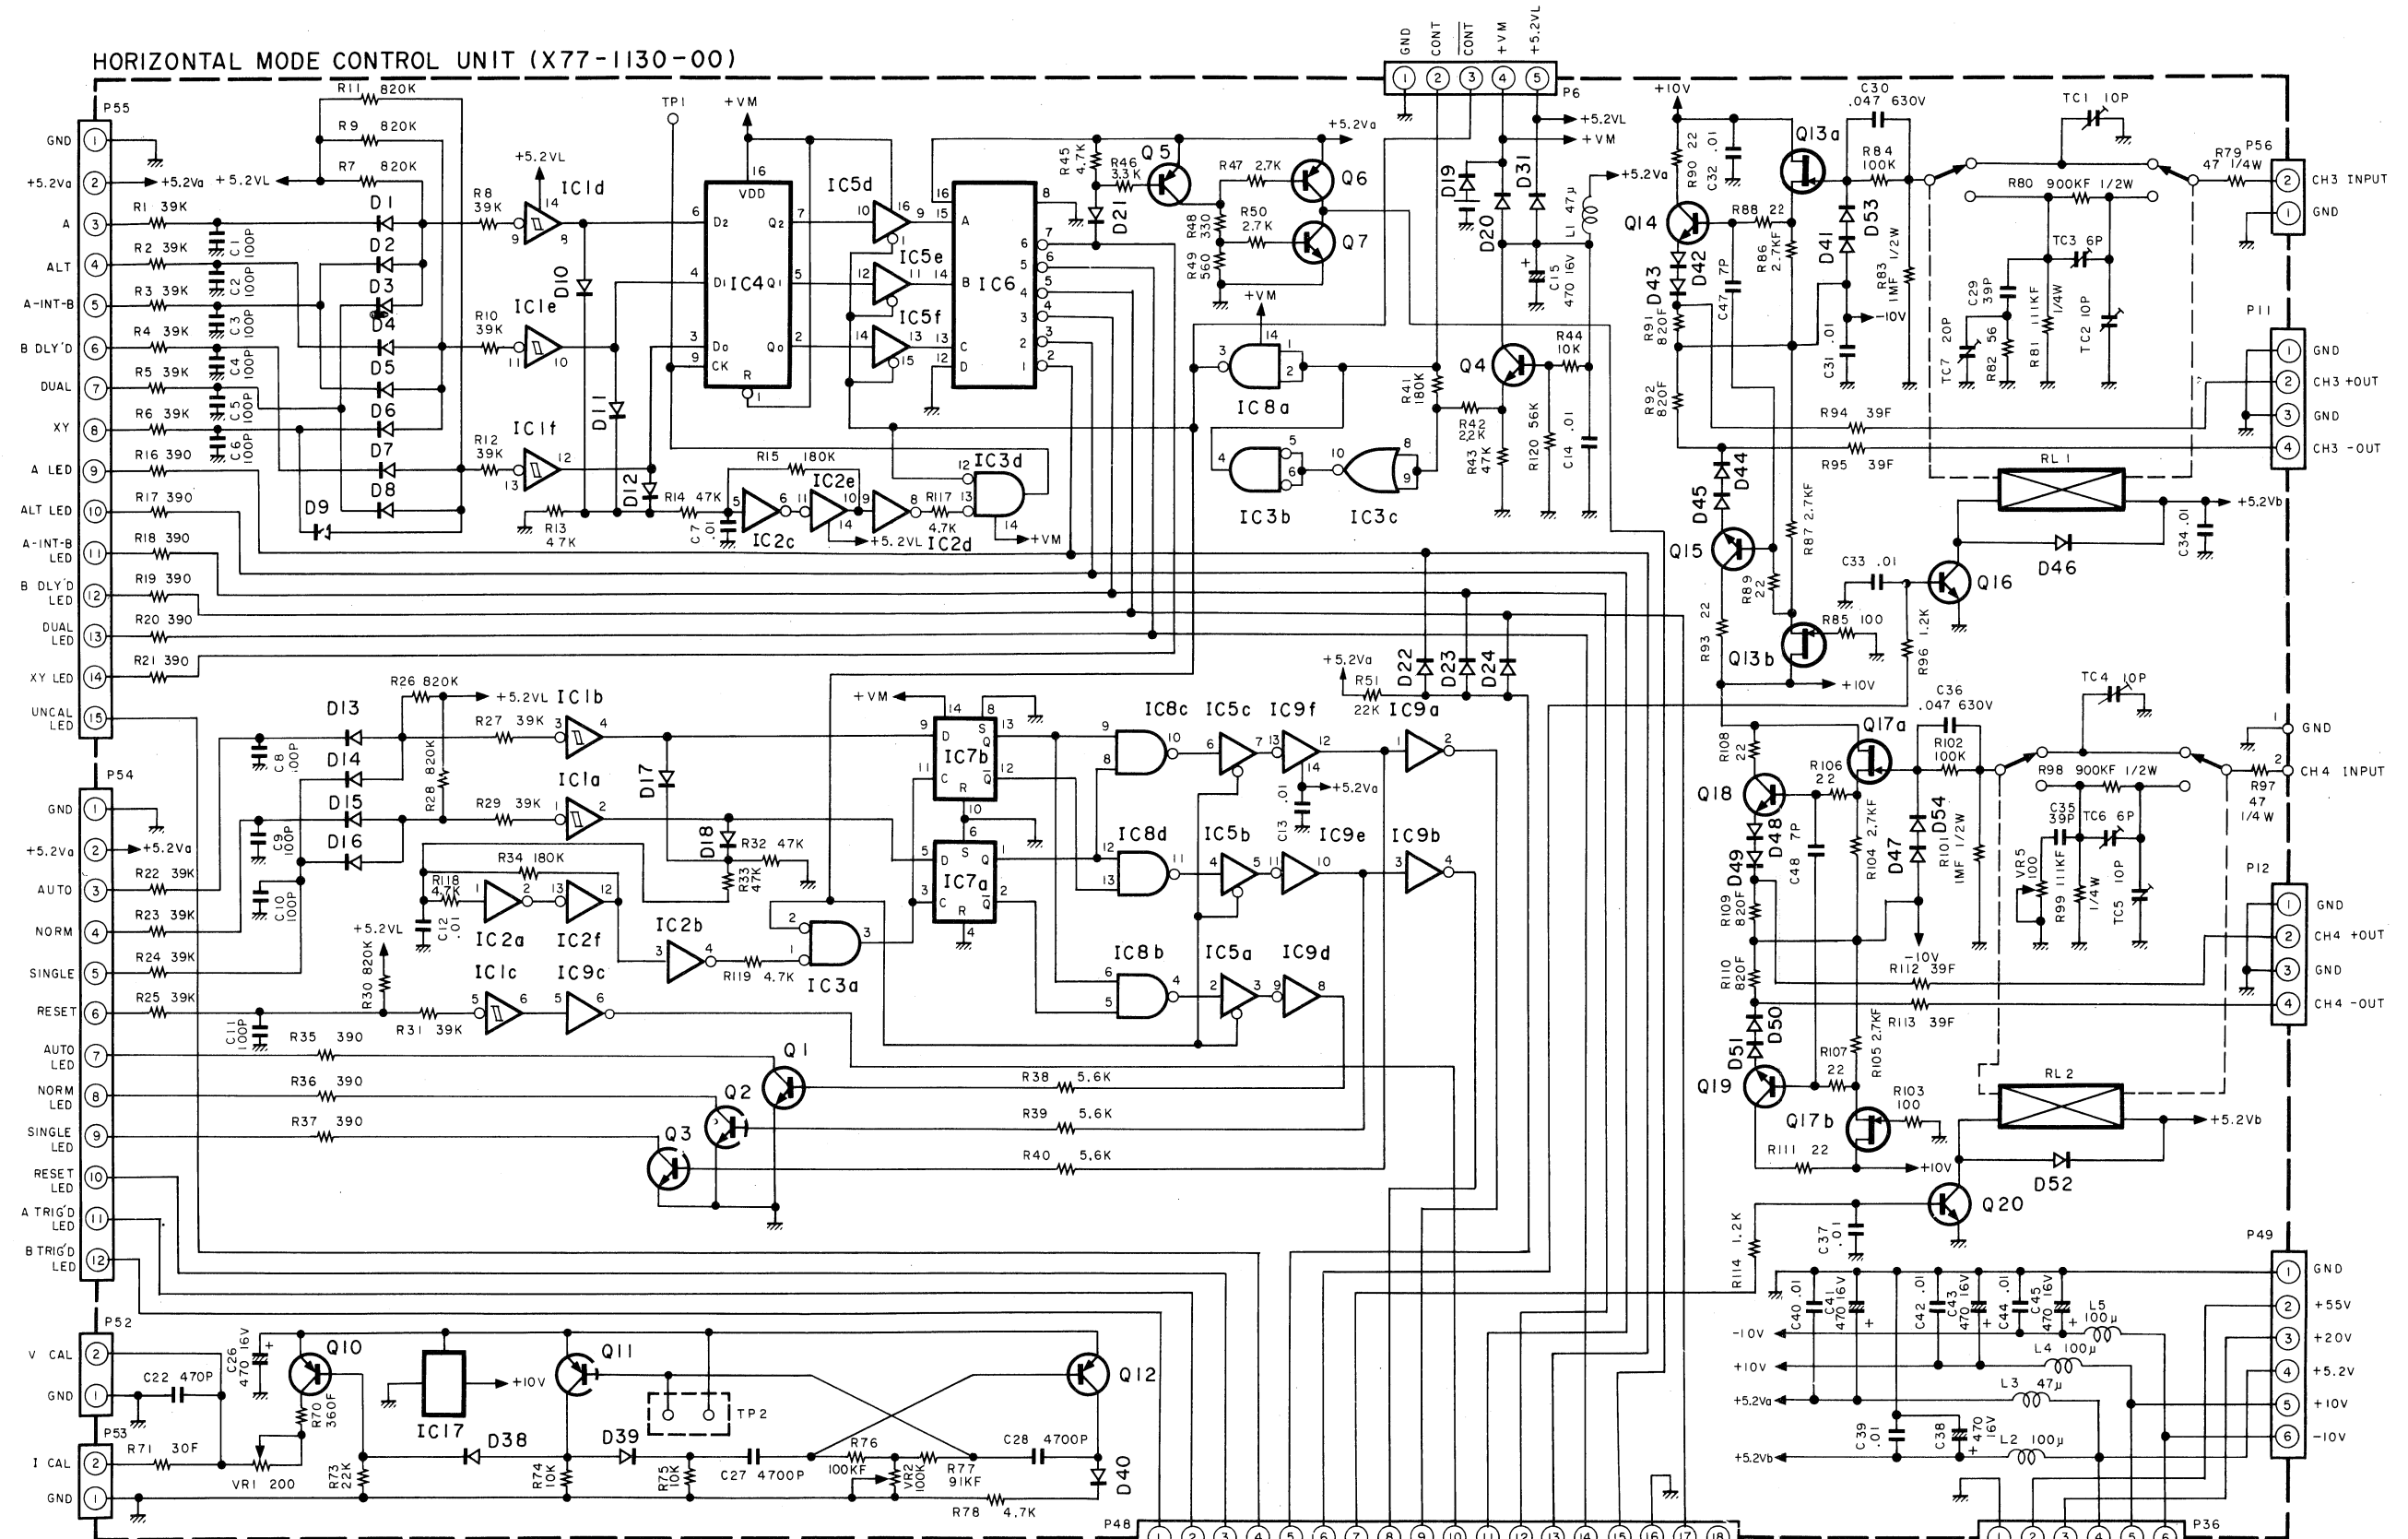

- |                   |                             |                                 |
|-------------------|-----------------------------|---------------------------------|
| IC1 : MC14584BCP  | IC6 : SN7442AN              | Q1~4,7 : 2SC536KNP(F)           |
| IC2 : MC14069UBCP | IC7 : MC14013BCP            | Q5,6,10~12 : 2SA608KNP(F)       |
| IC3 : MC14001BCP  | IC8 : MC14011BCP            | Q13,17 : DNI901                 |
| IC4 : MC14174BCP  | IC9 : SN74LS04N             | Q14,15,18,19 : 2SC1215 (T or S) |
| IC5 : MC14503BCP  | IC17 : FS7805L or MC78L05CP | Q16,20 : 2SD438(F)              |


- D1~24, 31, 39, 40, 42~46, 48~54 : DS442X  
 D38 : 1N60  
 D41, 47 : 1S1544A

# HORIZONTAL OUTPUT AMP UNIT (X74-1230-00)

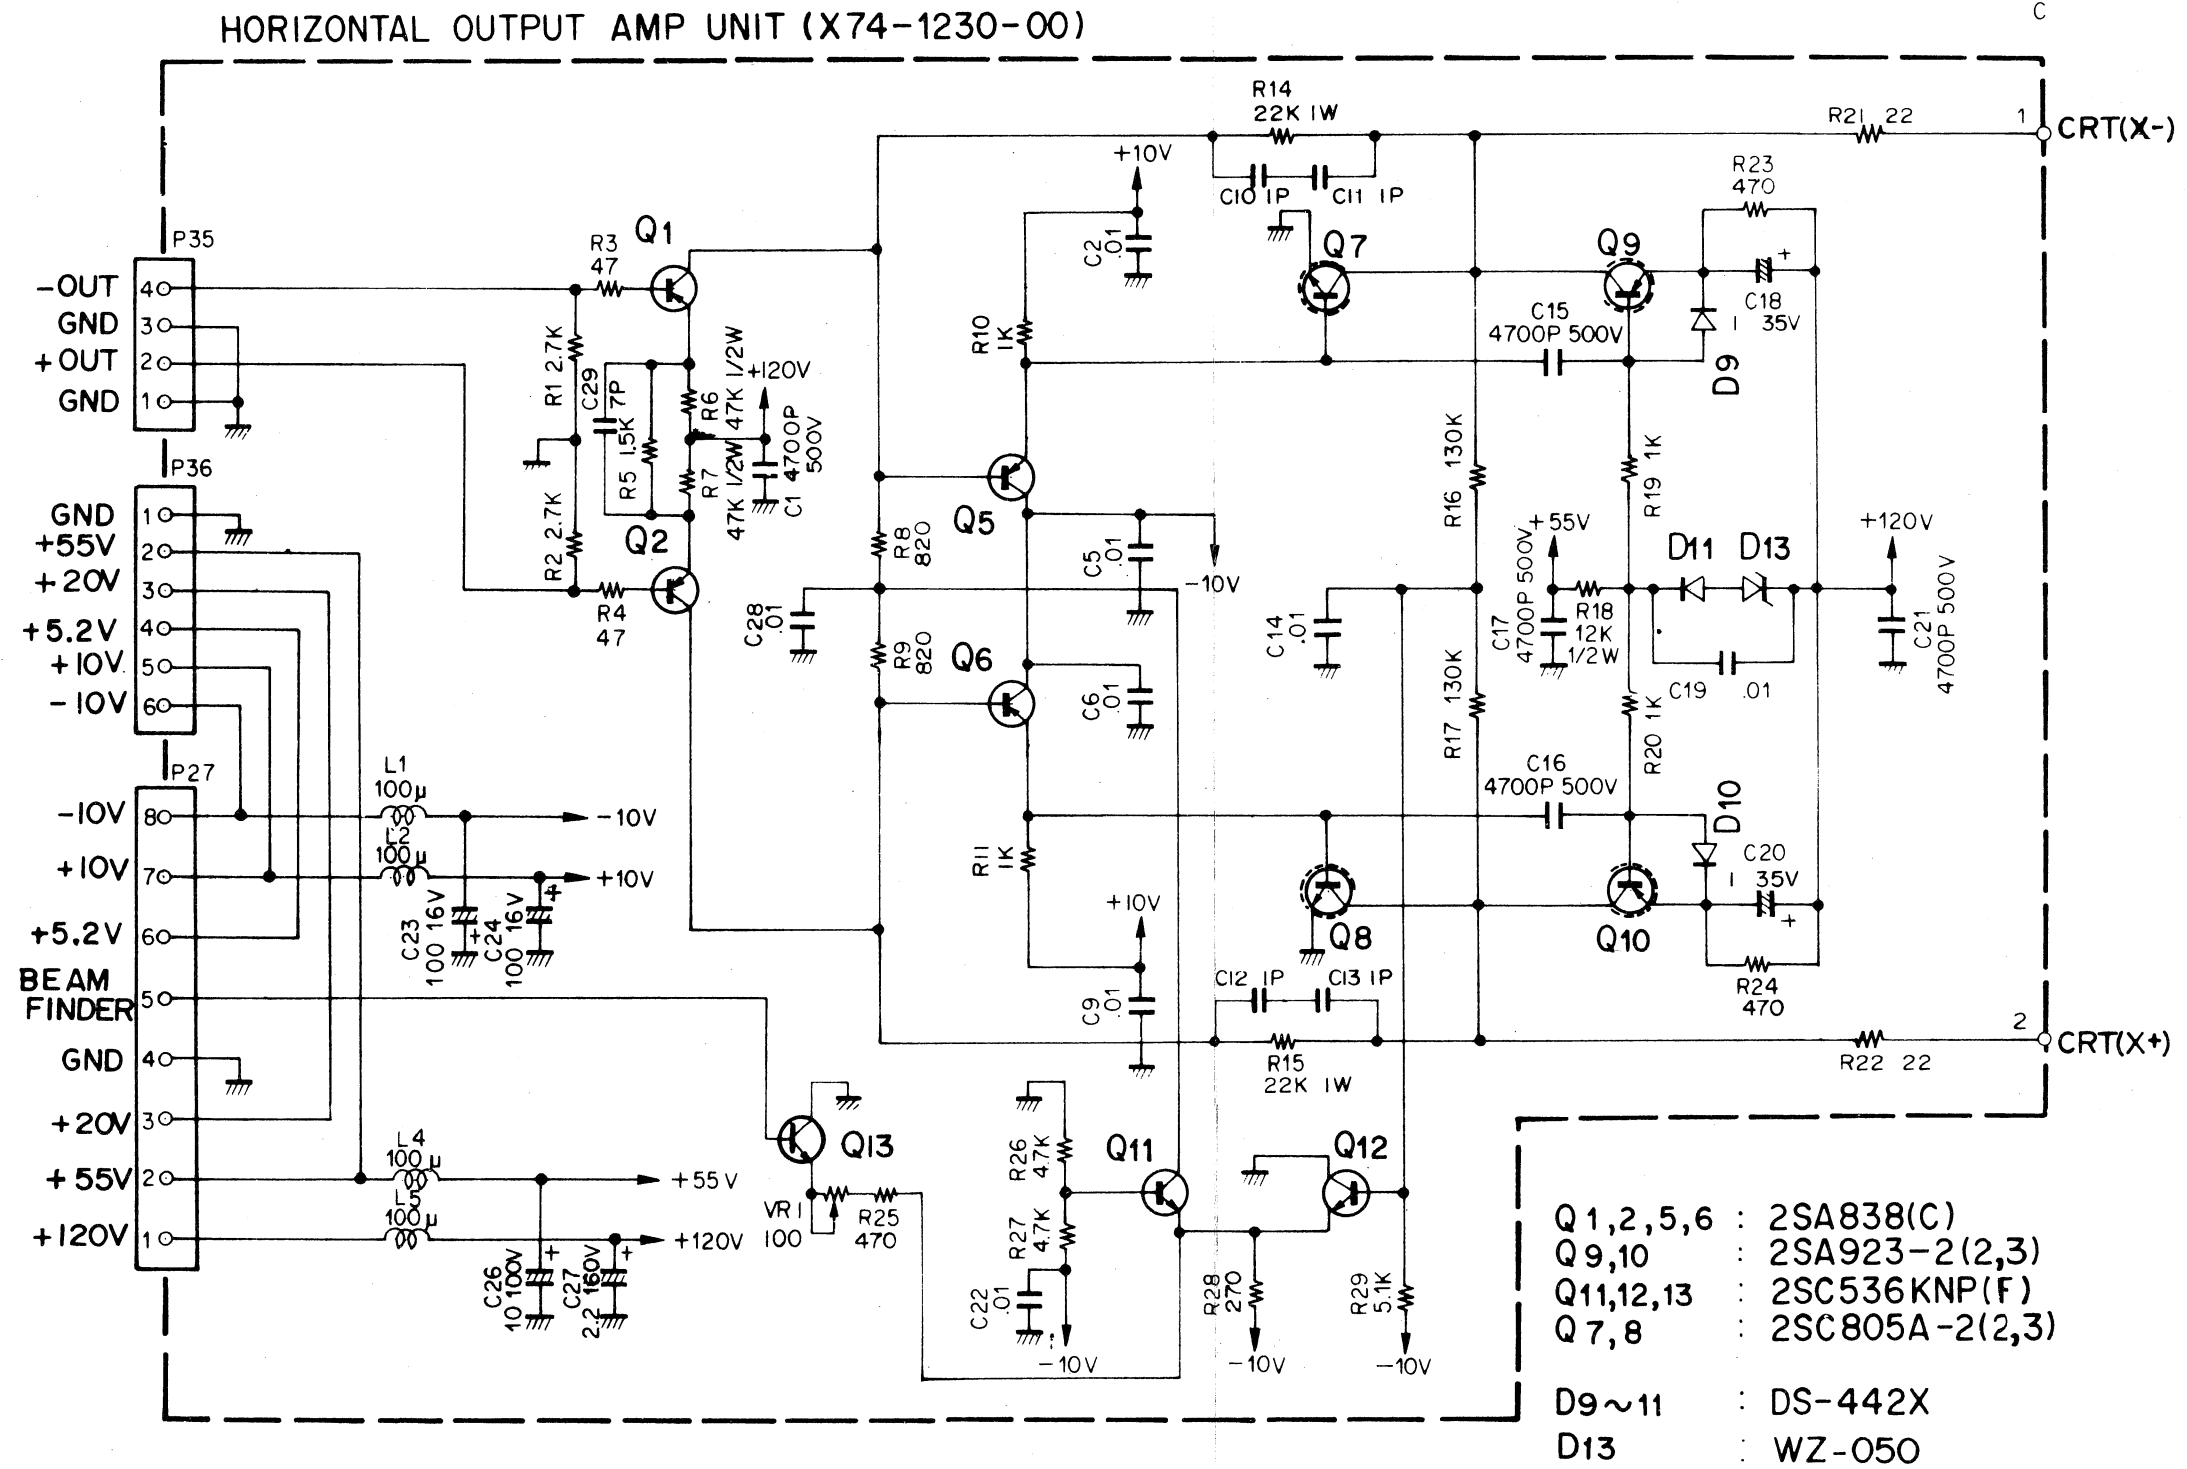

# A TRIG SWITCH UNIT (X77-1110-00)


## A TRIG SWITCH UNIT (X77-1110-00)

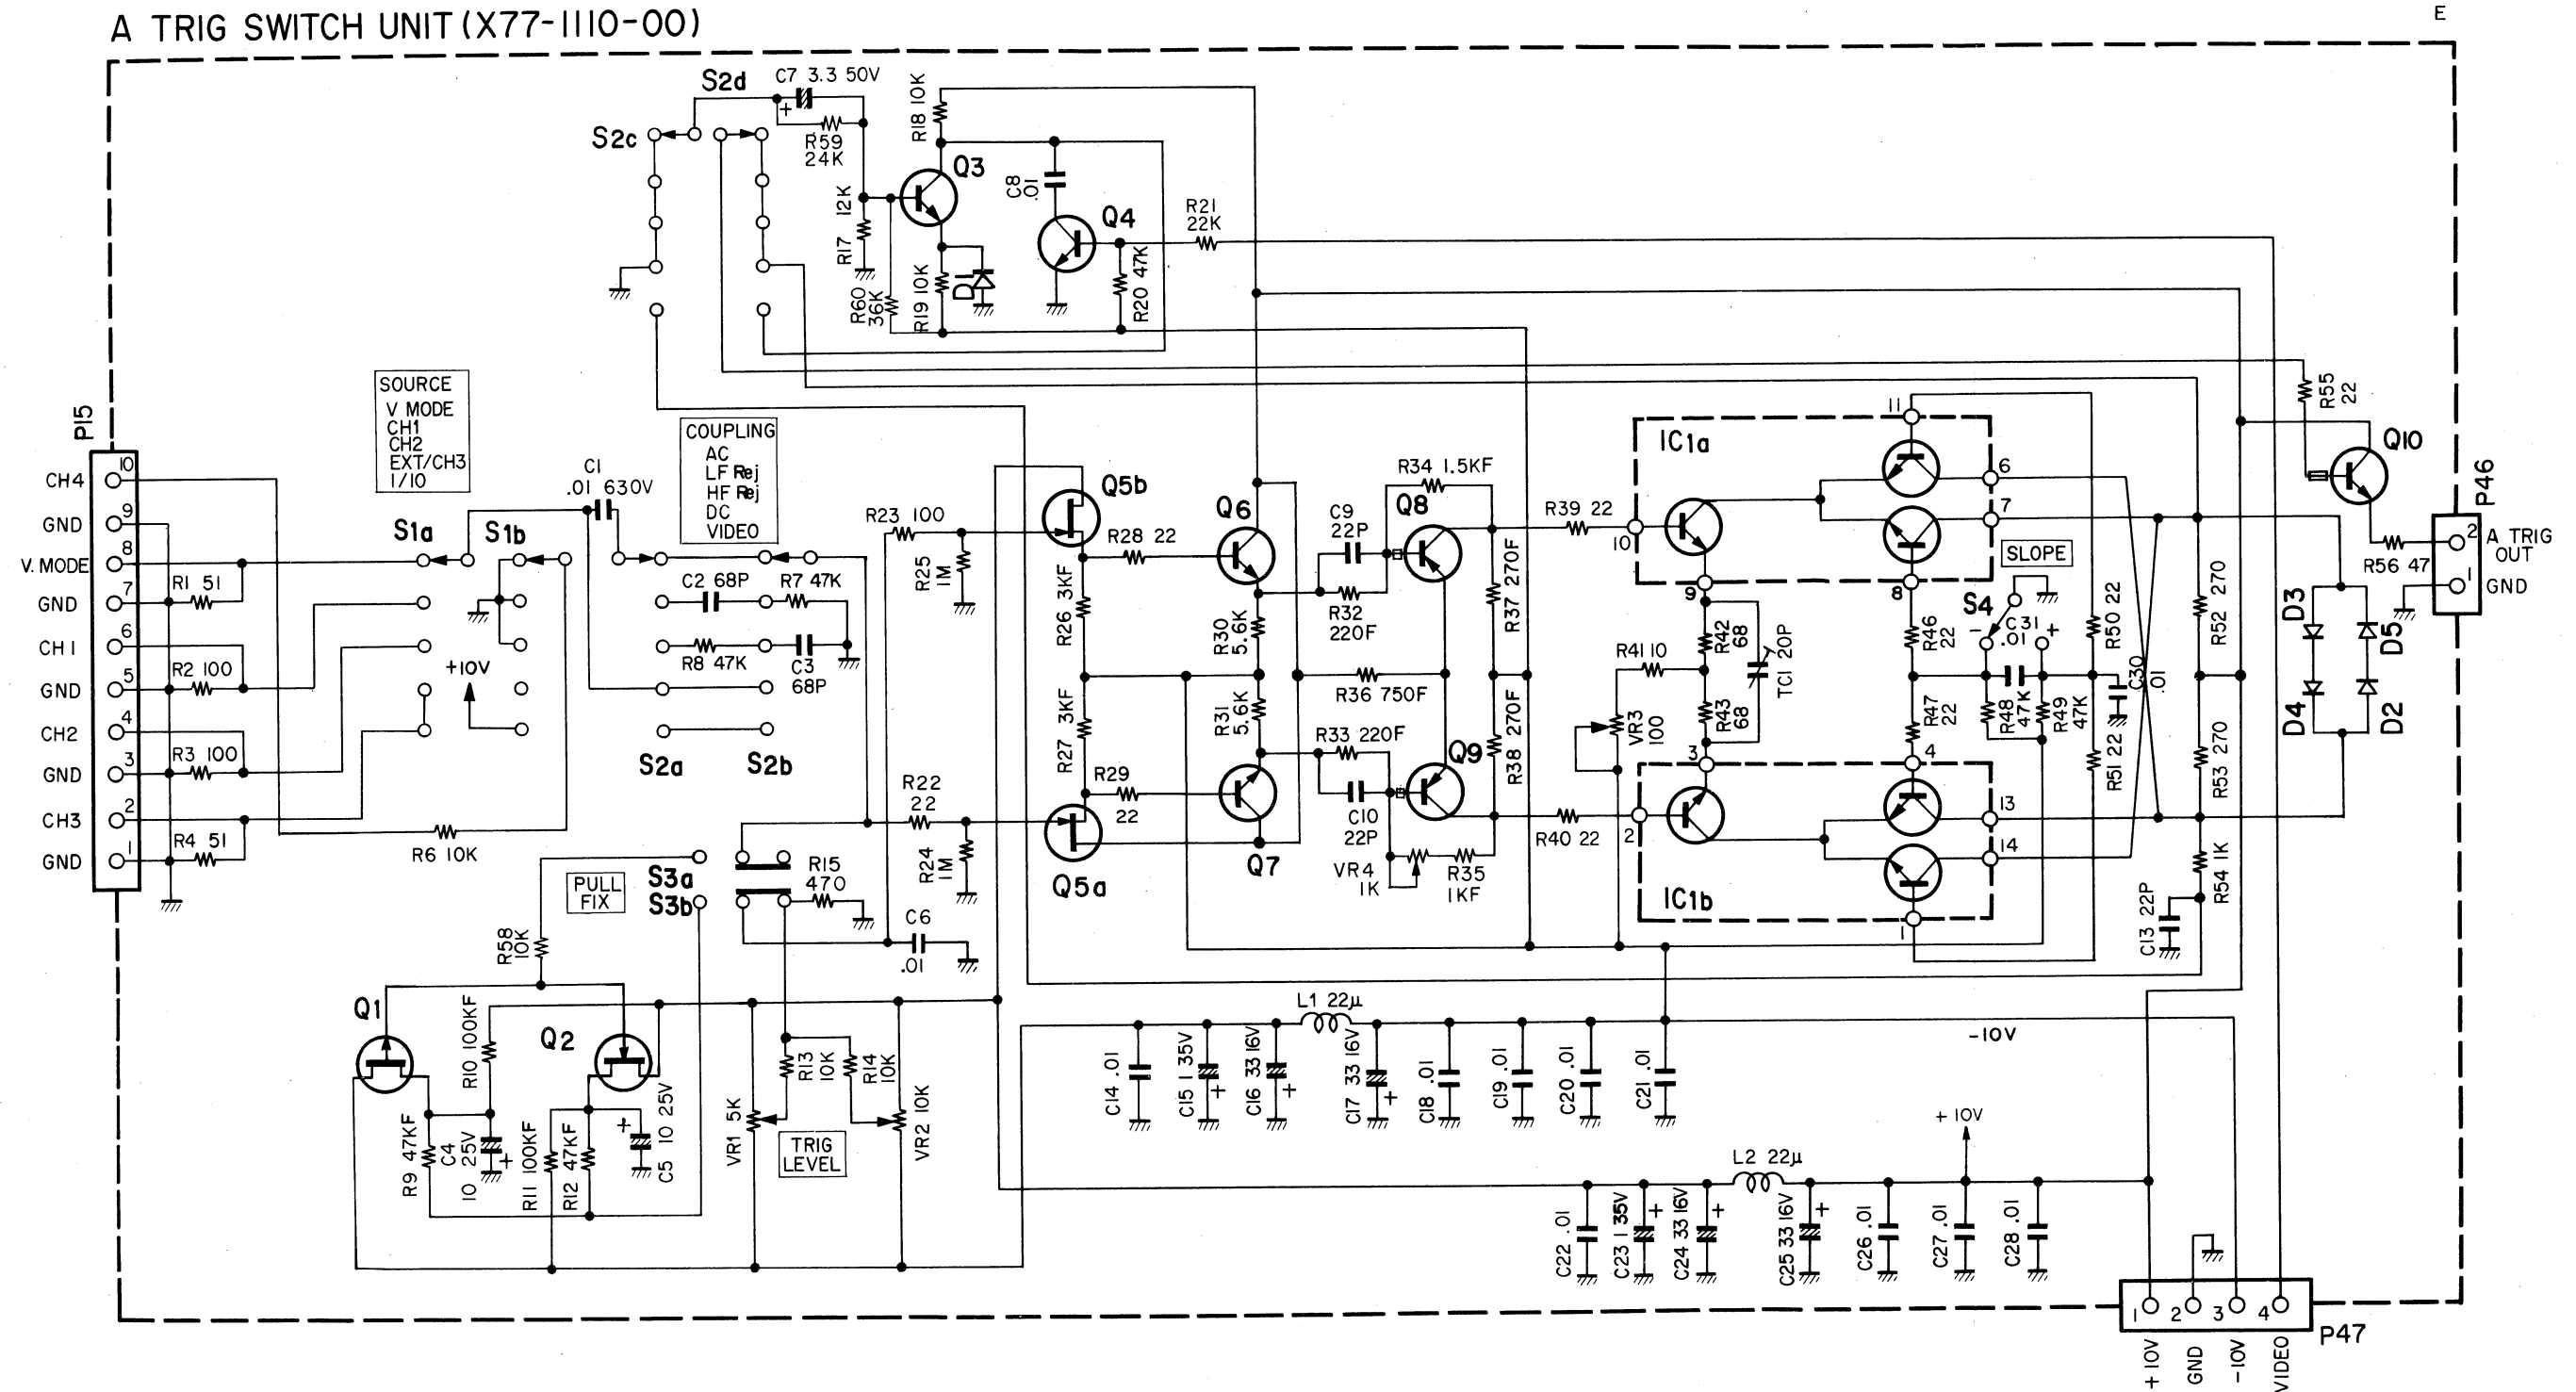

- IC1 : CA3102E
- Q1 : 2SJ43(Q)
- Q3,4 : 2SC536KNP(F)
- Q5 : DN190I
- Q6,7 : 2SC1215(T or S)
- Q8,9 : 2SA116I
- Q2 : 2SK127(Q)
- Q10 : 2SC2499
- D1~5 : DS442X


# B TRIG SWITCH UNIT (X77-1120-00)

## B TRIG SWITCH UNIT (X77-1120-00)

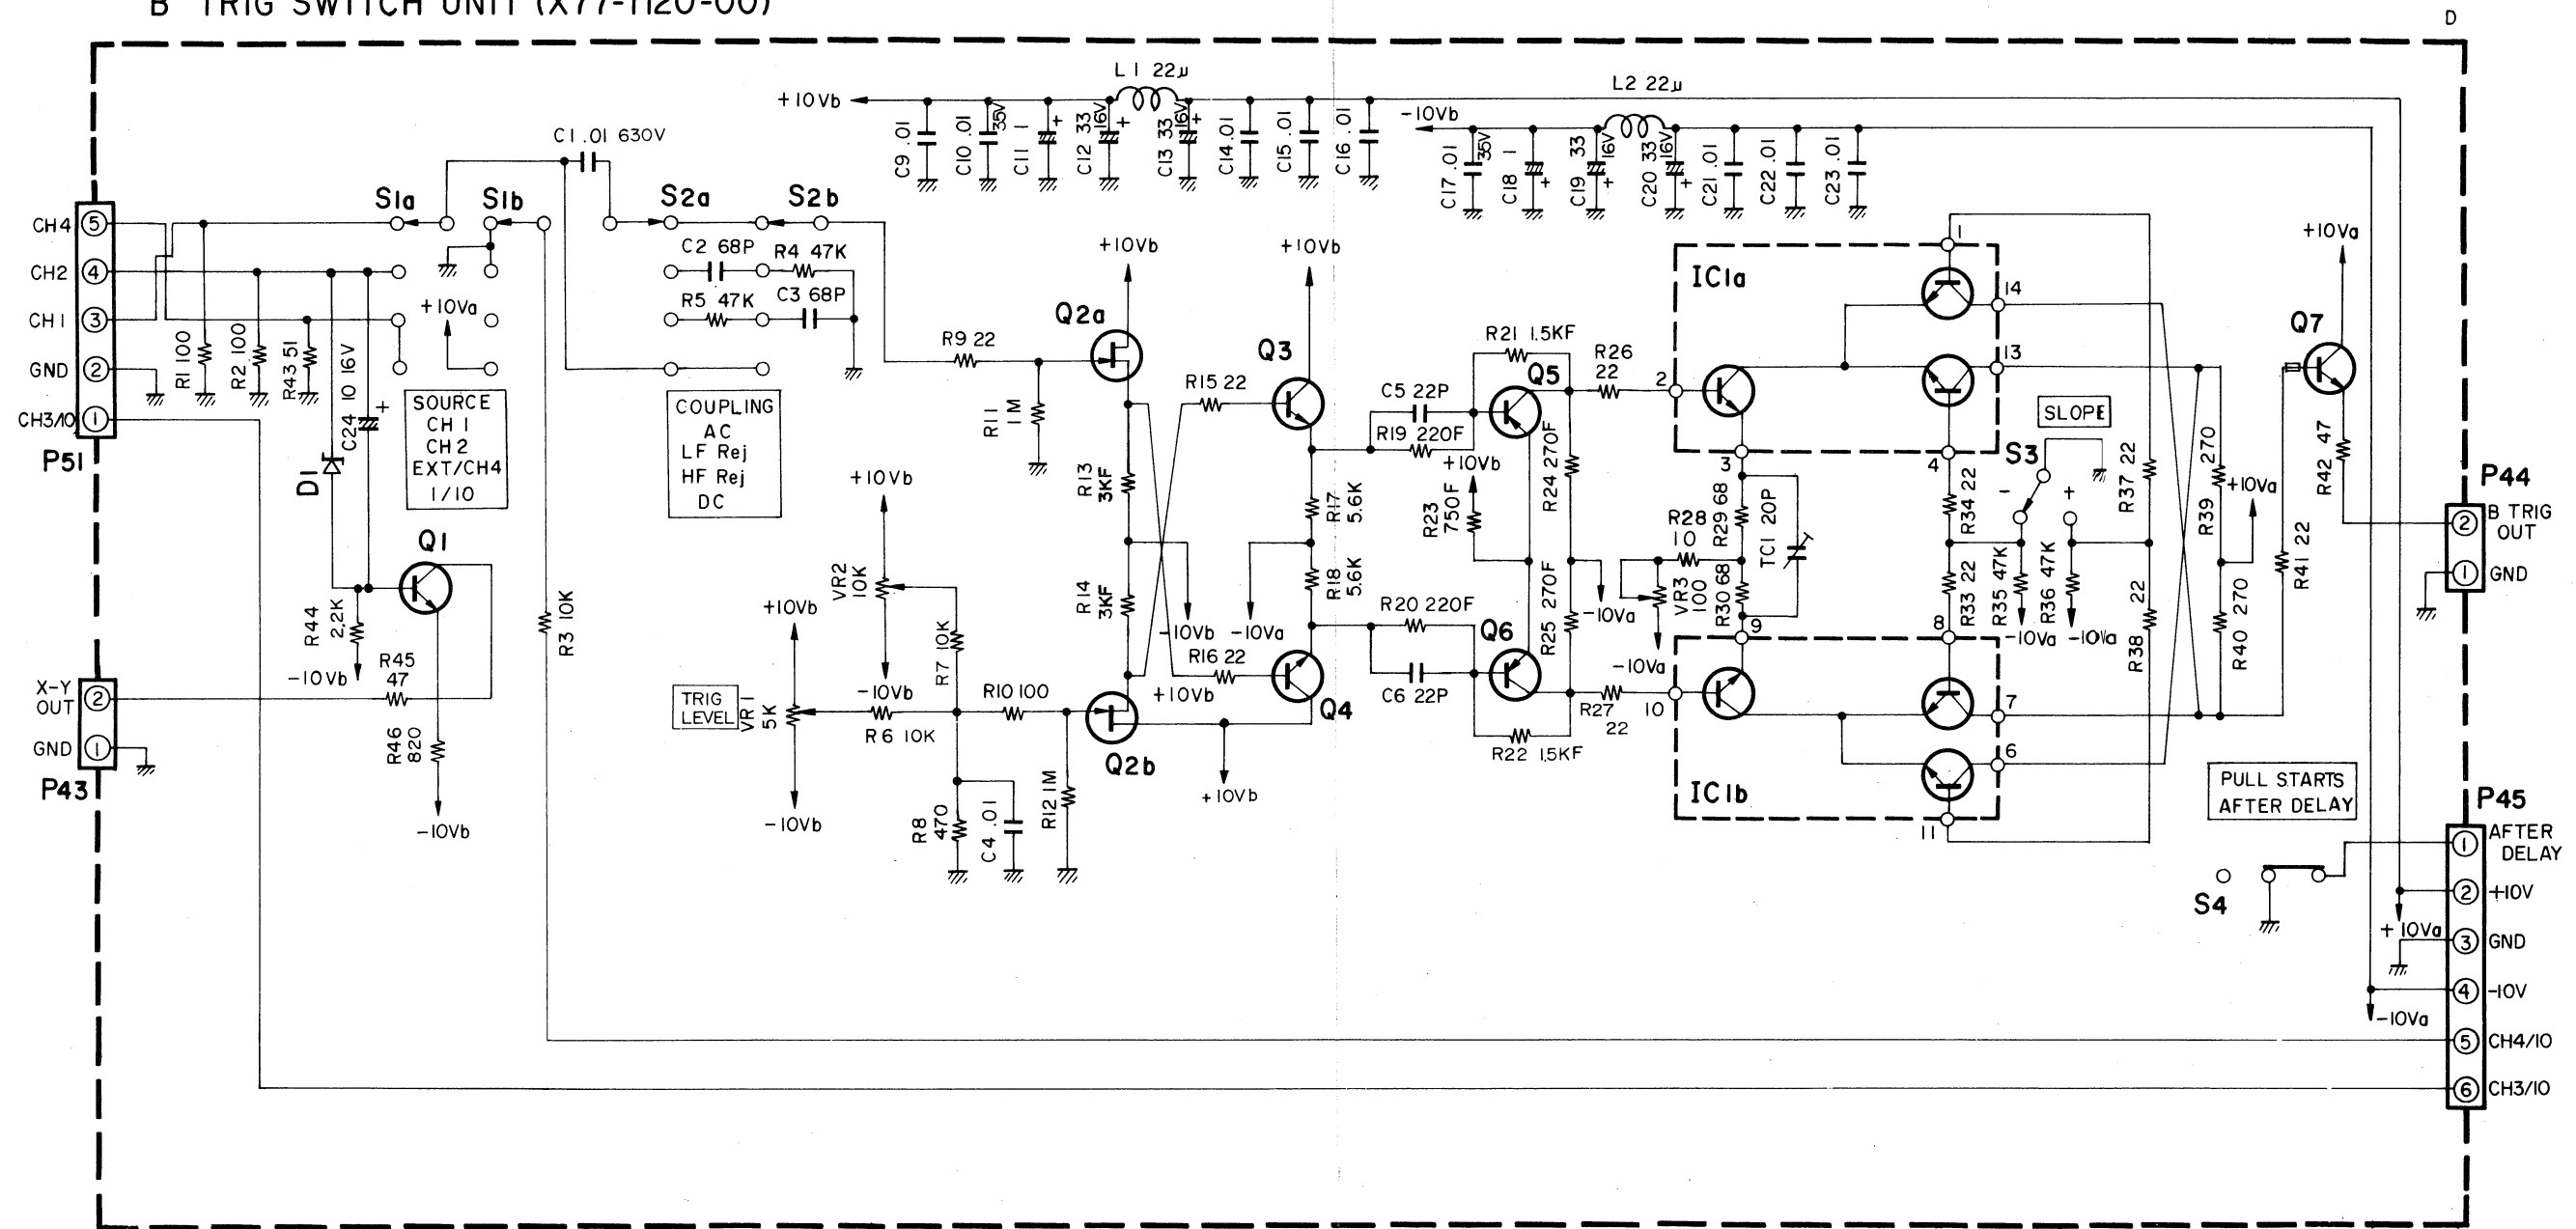

- IC1 : CA3102E                      Q5,6 : 2SA1161  
 Q1,3,4 : 2SC1215TorS              DI : WZ-081  
 Q2 : DNI901  
 Q7 : 2SC2499


# POWER BLANKING UNIT (X68-1310-00)

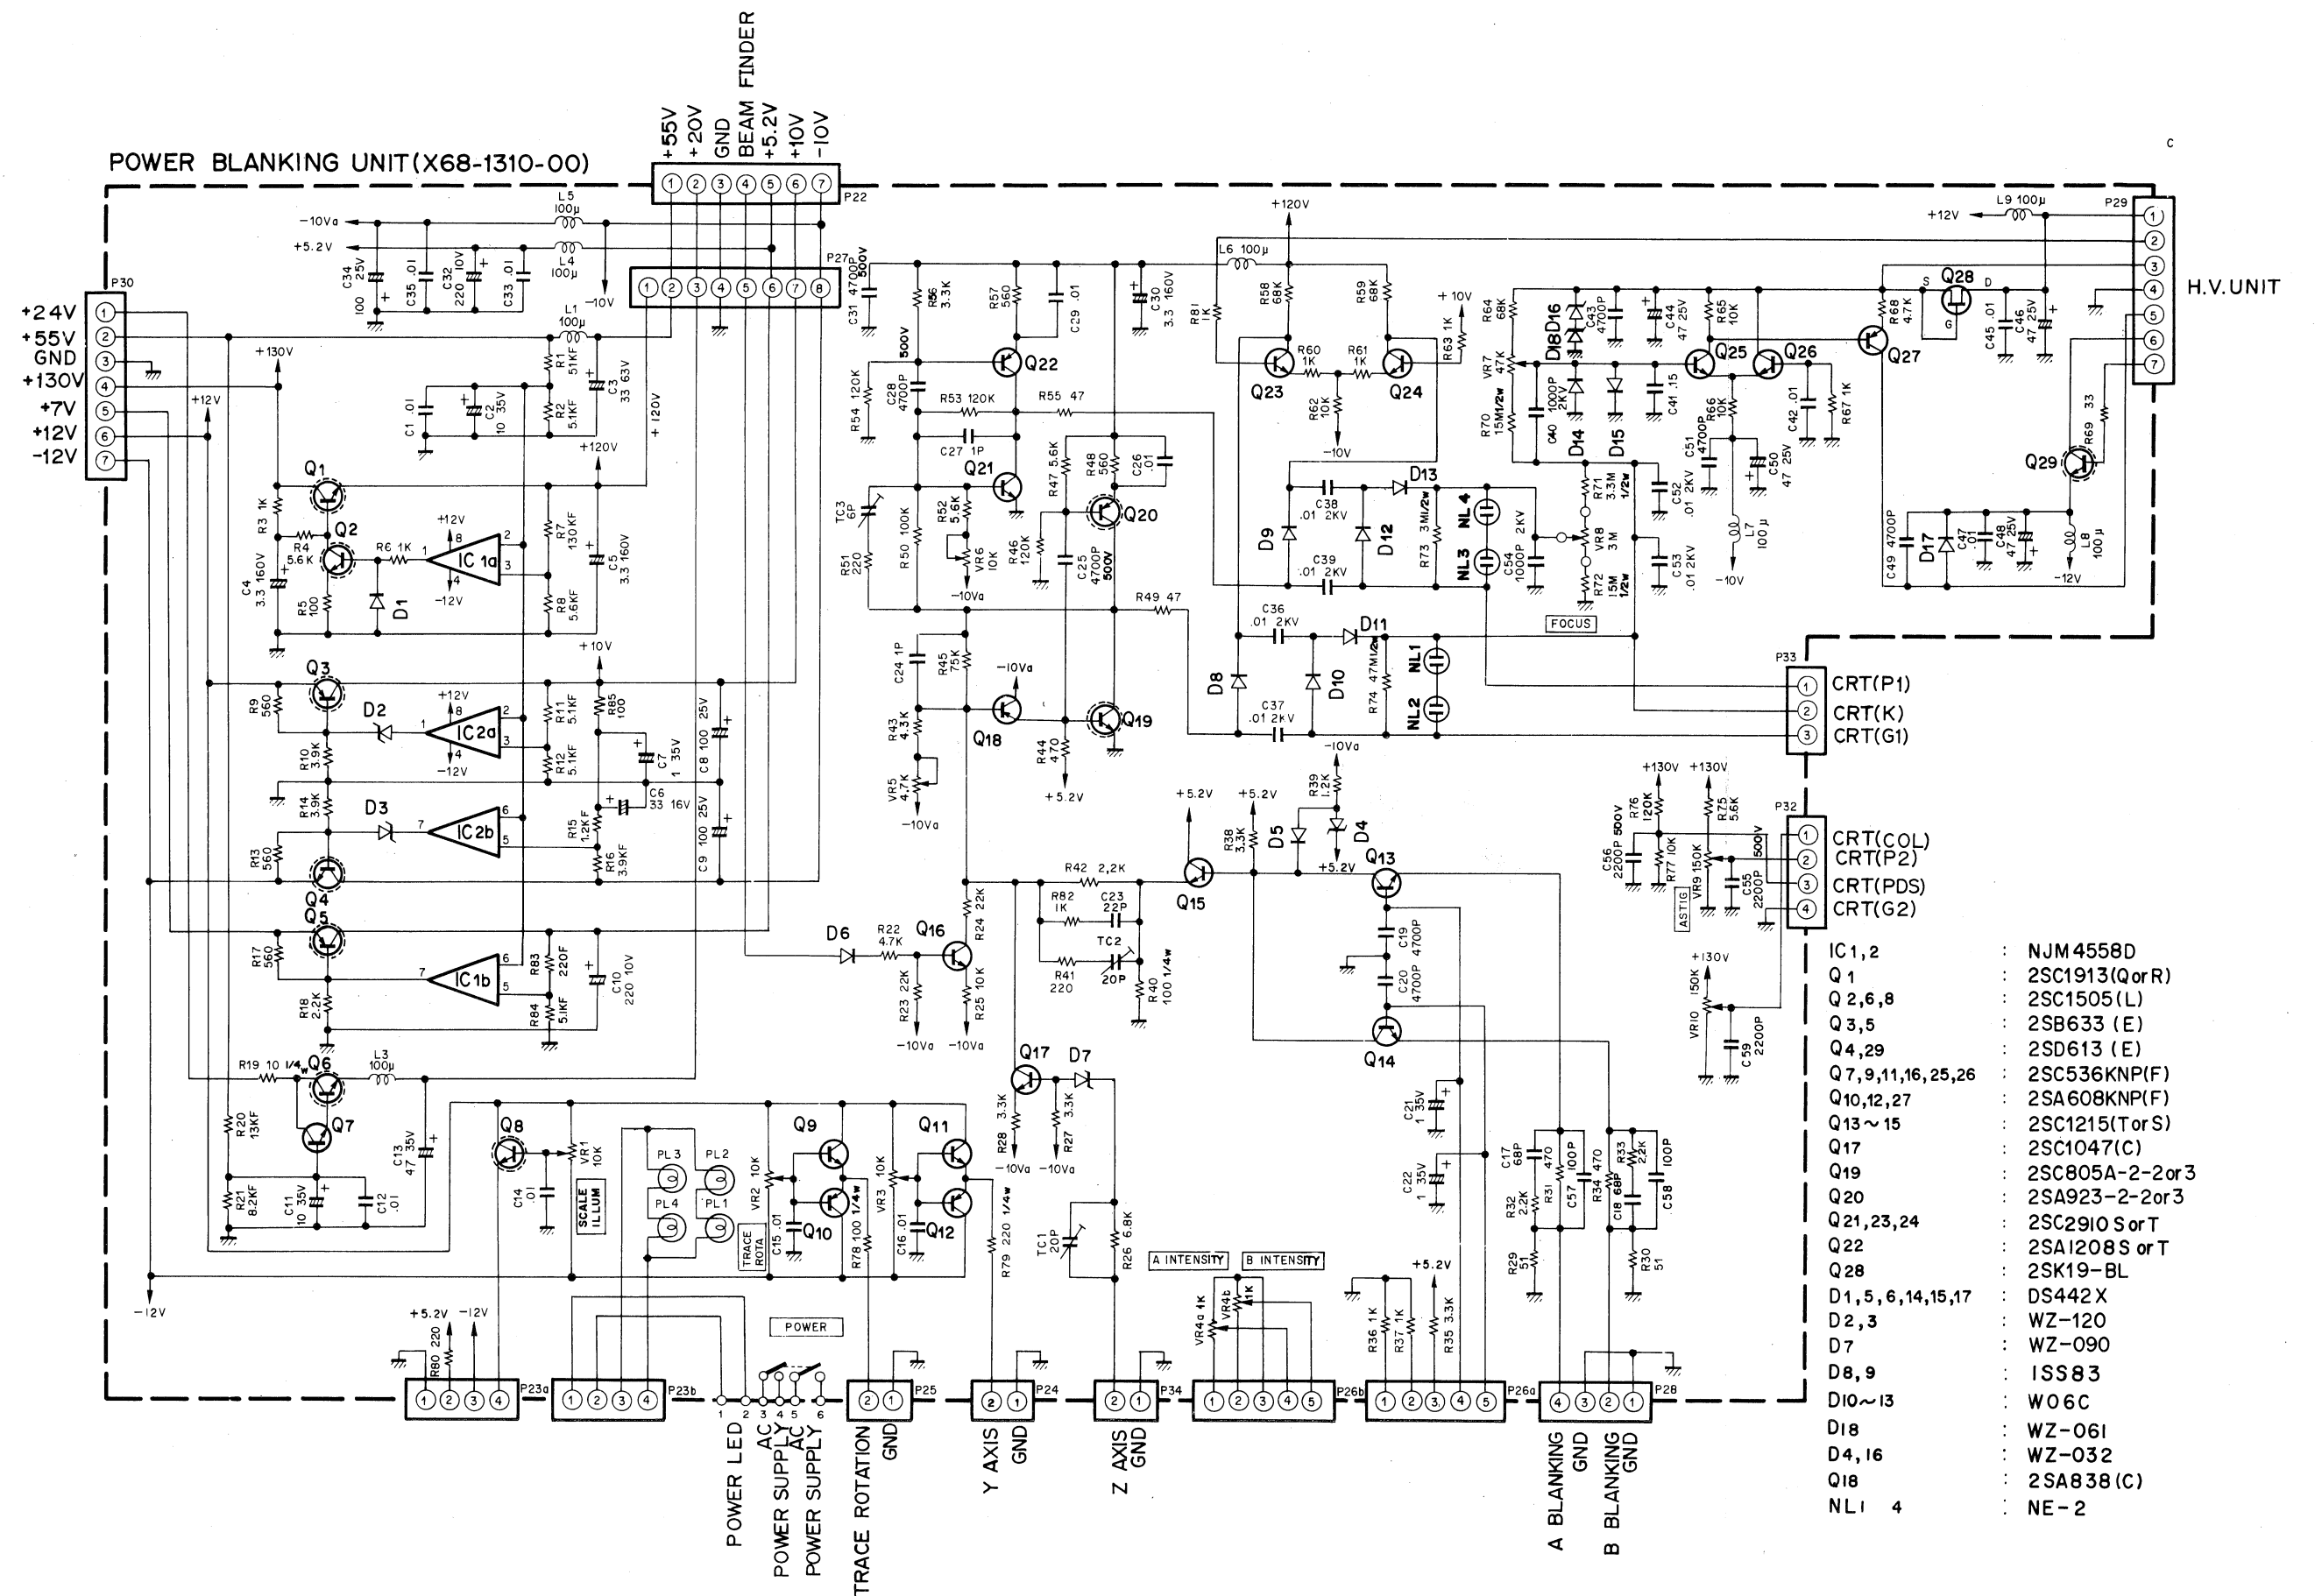

- |                        |                   |
|------------------------|-------------------|
| IC 1, 2                | : NJM 4558D       |
| Q 1                    | : 2SC1913(Q or R) |
| Q 2, 6, 8              | : 2SC1505(L)      |
| Q 3, 5                 | : 2SB633 (E)      |
| Q 4, 29                | : 2SD613 (E)      |
| Q 7, 9, 11, 16, 25, 26 | : 2SC536KNP(F)    |
| Q 10, 12, 27           | : 2SA608KNP(F)    |
| Q 13 ~ 15              | : 2SC1215(Tor S)  |
| Q 17                   | : 2SC1047(C)      |
| Q 19                   | : 2SC805A-2-2or 3 |
| Q 20                   | : 2SA923-2-2or 3  |
| Q 21, 23, 24           | : 2SC2910 S or T  |
| Q 22                   | : 2SA1208 S or T  |
| Q 28                   | : 2SK19-BL        |
| D 1, 5, 6, 14, 15, 17  | : DS442 X         |
| D 2, 3                 | : WZ-120          |
| D 7                    | : WZ-090          |
| D 8, 9                 | : ISS83           |
| D 10 ~ 13              | : W06C            |
| D 18                   | : WZ-061          |
| D 4, 16                | : WZ-032          |
| Q 18                   | : 2SA838(C)       |
| NL 1 4                 | : NE-2            |

# POWER SUPPLY (W02-0405-15)

## SWITCHING POWER SUPPLY(W02-0405-15)

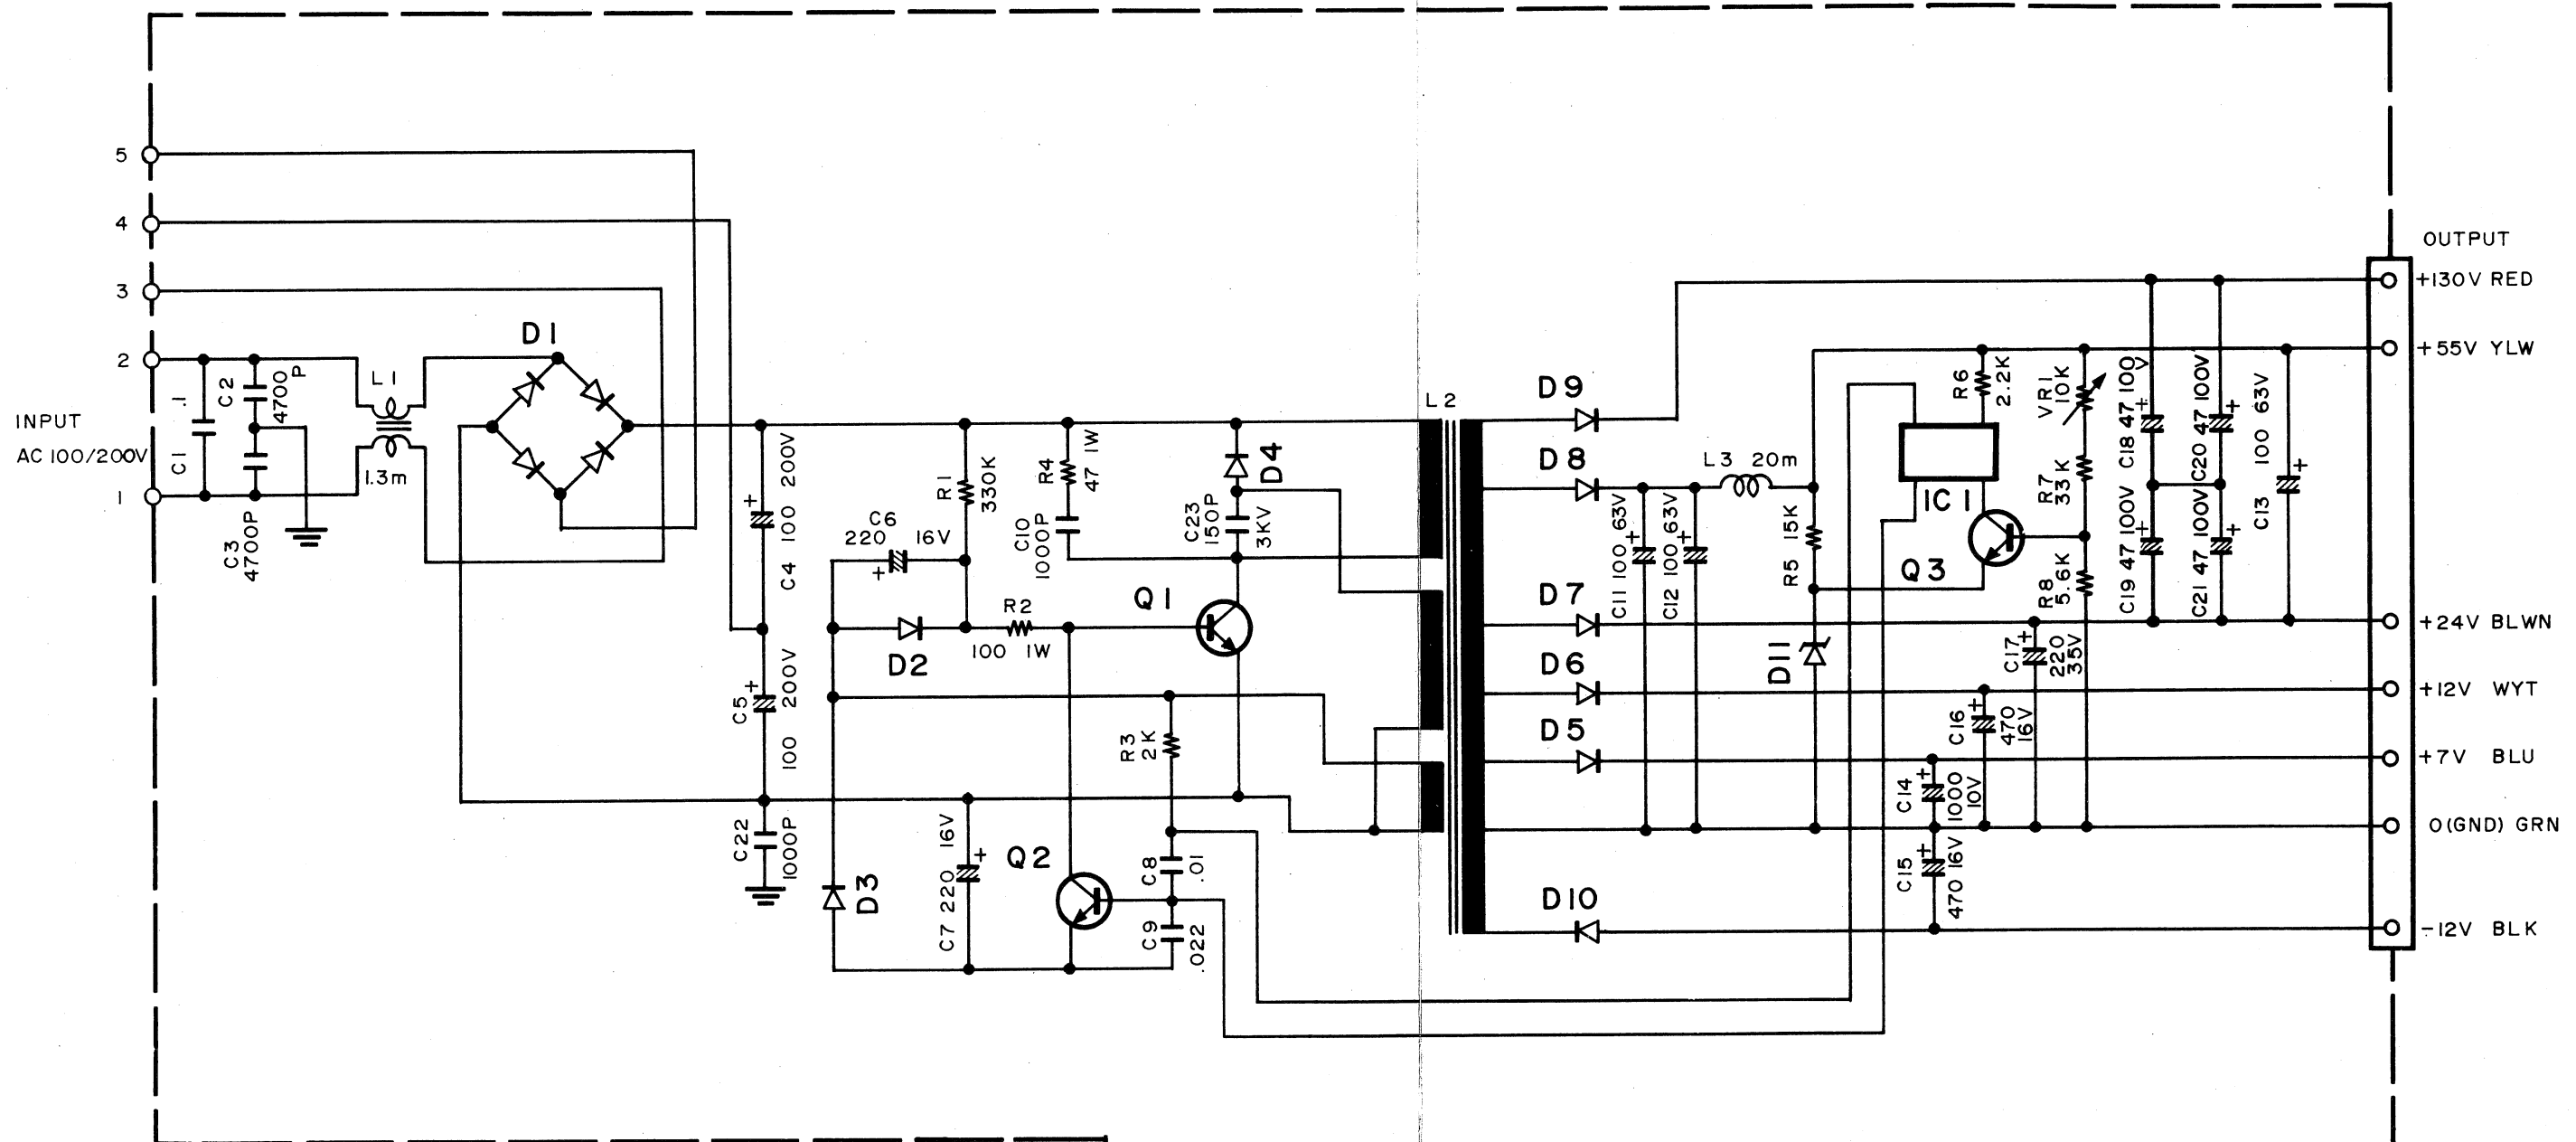

Q 1	: 2SC1308K	D 1	: DBA20G
Q 2	: 2SC2274(E)	D 2,3	: DFA01C
Q 3	: 2SC2363(E)	D 4	: ERC25-06
IC 1	: PC714U	D 5,6,10	: S5KC20
		D 7~9	: ERC25-04
		D 11	: GZA6.2Y

---

A product of  
**TRIO-KENWOOD CORPORATION**

17-5, 2-chome, Shibuya, Shibuya-ku, Tokyo 150, Japan

---

© 15208 PRINTED IN JAPAN B51-1029-00 (G)  
The second edition