


KENWOOD

20MHz OSCILLOSCOPE

CS-4026

SERVICE MANUAL

KENWOOD CORPORATION

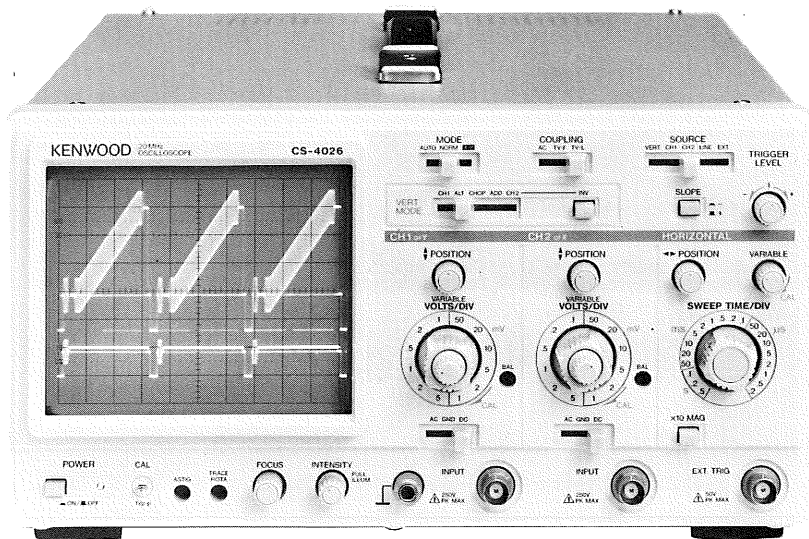

WARNING

The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.

CONTENTS

ADJUSTMENT	3
PARTS LIST	10
SCHEMATIC DIAGRAM/WAVEFORM	15
P.C. BOARD	19

ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting.

Before calibrating the scope, check the power supply voltage.

TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-711 (KENWOOD)	Impedance: More than 10 M Ω , Measuring range: 0.01 V to 199 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 Ω , constant voltage over tuning range
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within $\pm 1\%$, Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-911A (KENWOOD)	—
Oscilloscope	475A (Tektronix)	Sensitivity: more than 5 mV Frequency response: More than 250 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1 μ s repetitive waveform
High-Voltage Probe	—	Input Impedance: 1000 M Ω
Termination	—	Impedance: 50 Ω Accuracy: within 3%
Termination	—	3 watts type impedance: 50 Ω
Attenuator	—	- 20 dB attenuation (50 Ω)

Table 1

PREPARATION FOR ADJUSTMENT

Control Settings


The control settings listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.



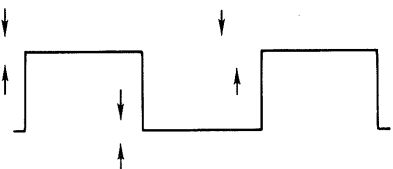
NAME OF KNOBS	POSITION
MODE	AUTO
COUPLING	AC
SOURCE	VERT
VERT MODE	CH1
INV	OFF <input type="checkbox"/>
SLOPE	<input type="checkbox"/> +
TRIGGER LEVEL	12 o'clock
CH1/CH2 POSITION	12 o'clock
CH1/CH2 ATT	10 mV/DIV
CH1/CH2 VARIABLE	Fully clockwise
CH1/CH2 AC-GND-DC	DC
SWEEP POSITION	12 o'clock
SWEEP VARIABLE	Fully clockwise
SWEEP ATT	0.1 ms
x10 MAG	OFF <input type="checkbox"/>

Table 2



ADJUSTMENT

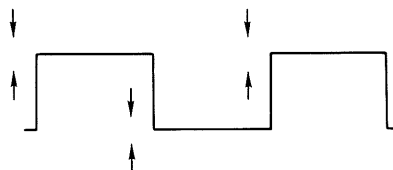Item	Adjustment VR (TC)	P.C.B.	Procedure
Supply voltage	VR1	X68-1610	Adjust VR1 to give -8.00 V at pin P1-6 (V.H UNIT).
Intensity	VR2	X68-1610	MODE: X-Y With a spot on the screen, turn the INTENSITY knob to a 9 o'clock position and then adjust VR2 until the spot disappears.
CRT center	VR102	X65-1410	CH1, 2: 50 mV/DIV, GND V-MODE: CH2 Pull and push INV to find a position of CH2 POSITION knob where the luminescent line does not vary. Leaving CH2 POSITION unchanged, adjust to the center of the screen using VR102.
Y operating point	VR104	X65-1410	Position after CRT center adjustment Adjust VR104 to give $+37.5$ V at pin P6-1.
X operating point	VR301	X65-1410	V-MODE: CH1 H-MODE: X-Y X-POSITION: Center Adjust VR301 to give $+68.0$ V at pin P7-1.
ASTIG/FOCUS	VR3	X68-1610	H-MODE: X-Y INTENSITY: 12 o'clock FOCUS: 12 o'clock CH1,2: 50 mV/DIV, GND Adjust the spot "." to the best position with the ASTIG knob and VR3. *Best position = smallest spot
CH1 Step ATT Balance	VR2	X65-1410	V-MODE: CH1 CH1: 2 mV/DIV, GND Adjust VR2 so that the luminescent line does not vary when switching between 1 mV/DIV and 2 mV/DIV. Adjust at a voltage of 1 mV with a reference voltage of 2 mV.
CH1 MAG Balance	VR3	X65-1410	Adjust VR3 so that the luminescent line does not vary when switching between 2 mV/DIV and 5 mV/DIV. Adjust at a voltage of 5 mV with a reference voltage of 2 mV.
CH2 Step ATT Balance	VR52	X65-1410	V-MODE: CH2 H-MODE: AUTO CH2: 2 mV/DIV, GND Adjust VR52 so that the luminescent line does not vary when switching between 1 mV/DIV and 2 mV/DIV. Adjust at a voltage of 1 mV with a reference voltage of 2 mV.
CH2 MAG Balance	VR53	X65-1410	Adjust VR53 so that the luminescent line does not vary when switching between 2 mV/DIV and 5 mV/DIV. Adjust at a voltage of 5 mV with a reference voltage of 2 mV.
ADD Position	VR101	X65-1410	V-MODE: ALT H-MODE: AUTO CH1, 2: 10 mV/DIV, GND Bring the luminescent line to the center for both CH1 and CH2. Switch V-MODE to ADD and adjust VR101 so that the luminescent line comes to the center.
CH1 waveform shaping 10 mV 1 mV	VR5 VR4	X65-1410	V-MODE: CH1 H-MODE: AUTO CH1, 2: 10 mV, 1 mV/DIV; DC SWEEP TIME: .5 ms Apply a 1 kHz square wave to CH1 INPUT (with the amplitude extending over 6 div.) Adjust so that CH1 ATT waveform is flat for both 10 mV/DIV and 1 mV/DIV ranges. 10 mV/DIV: VR5 1 mV/DIV: VR4 



ADJUSTMENT

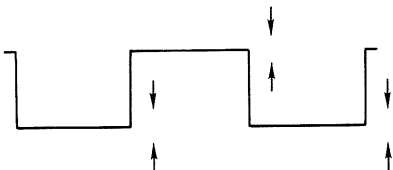Item	Adjustment VR (TC)	P.C.B.	Procedure
CH2 waveform shaping 10 mV 1 mV	VR55 VR54	X65-1410	<p>V-MODE: CH2 Apply a 1kHz square wave to CH2 INPUT (with the amplitude extending over 6 div.) Adjust so that CH2 ATT waveform is flat for both 10 mV/DIV and 1 mV/DIV ranges.</p> <p>10 mV/DIV: VR55 1 mV/DIV: VR54</p> 
CH1 Gain	VR103	X65-1410	<p>V-MODE: CH1 SOURCE: VERT CH1: 10 mV/DIV, DC Apply a 50 mV square wave to CH1 INPUT. Adjust VR103 so that amplitude extends over 5 divisions.</p> 
CH2 Gain	VR57	X65-1410	<p>V-MODE: CH2 CH2: 10 mV/DIV; DC Apply a 50 mV square wave to CH2 INPUT. Adjust VR57 so that amplitude extends over 5 divisions.</p>
CH1 waveform shaping	TC2 TC4	X65-1410	<p>V-MODE: CH1 Apply a 1kHz square wave to CH1 INPUT (with the amplitude extending over 6 div.) Adjust so that CH1 ATT waveform is flat for both 0.1 V/DIV and 1 V/DIV ranges.</p> <p>0.1 V/DIV: TC2 1 V/DIV: TC4</p> 
CH2 waveform shaping	TC52 TC54	X65-1410	<p>V-MODE: CH2 Apply a 1 kHz square wave to CH2 INPUT (with the amplitude extending over 6 div.) Adjust so that CH2 ATT waveform is flat for both 0.1 V/DIV and 1 V/DIV ranges.</p> <p>0.1 V/DIV: TC52 1 V/DIV: TC54</p>
CH1 input capacity	TC1 TC3	X65-1410	<p>V-MODE: CH1 Connect a capacity meter to CH1 INPUT. Check that the capacity value for the CH1 10 mV/DIV range is within the standard. (28pF +/- 3pF) Adjust so that the same capacity value for 10 mV/DIV is obtained in both 0.1 V/DIV and 1 V/DIV ranges.</p> <p>0.1 V/DIV: TC1 1 V/DIV: TC3</p>
CH2 input capacity	TC51 TC53	X65-1410	<p>V-MODE: CH2 Connect a capacity meter to CH2 INPUT. Adjust in the same way as for CH1.</p> <p>0.1 V/DIV: TC51 1 V/DIV: TC53</p>

ADJUSTMENT

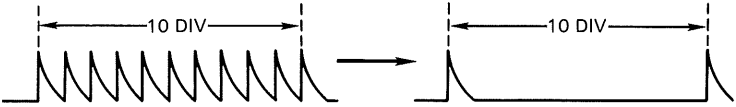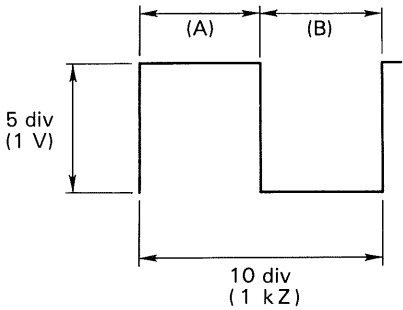
Item	Adjustment VR (TC)	P.C.B.	Procedure
0.1 ms Sweep time	VR202	X65-1410	<p>SWEEP TIME: 0.1 ms/DIV Input a 0.1 ms marker signal to CH1 INPUT. Adjust VR202 so that each marker peak aligns with a division on the scale.</p>
2 ms Sweep time	VR201	X65-1410	<p>SWEEP TIME: 2 ms/DIV Input a 2 ms marker signal to CH1 INPUT. Adjust VR201 so that each marker peak aligns with a division on the scale.</p>
X10 MAG Gain	VR302	X65-1410	<p>SWEEP TIME: 0.1 ms/DIV H.POSITION: Center Input a 0.1 ms marker signal to CH1 INPUT. Turn on X10 MAG and adjust VR302 so that there are 10 divisions on the scale between adjacent marker peaks.</p> 
X10 MAG Center	VR303	X65-1410	<p>SWEEP TIME: 0.1 ms/DIV Input a 0.5 ms marker signal to CH1 INPUT. With X10 MAG on, align the second peak with the center. Adjust VR303 so that the second peak remains aligned with the center when X10 MAG is turned off. Repeat several times to find the center.</p>
X Gain	VR151	X65-1410	<p>MODE: X-Y CH2: 10 mV/DIV; AC Apply a 50 mV square wave to CH2 INPUT. Adjust VR151 so that horizontal amplitude extends over 5 divisions.</p>
X Position Center	VR152	X65-1410	<p>CH1, 2: GND CH1, 2 POSITION: Center H-POSITION: Mechanical center MODE: X-Y Adjust VR152 so that the spot comes to the center</p>
CAL voltage	VR81	X68-1610	<p>Adjust the voltage with a calibrated oscilloscope and frequency counter connected to CAL terminals.</p> <p style="text-align: center;">Duty ratio (A) : (B) = 47.5 : 52.5</p>  <p style="text-align: center;">* With the above figure, the oscilloscope range is set to as follows. VOLTS: 0.2 V SWEEP TIME: 0.1 ms</p>

ADJUSTMENT

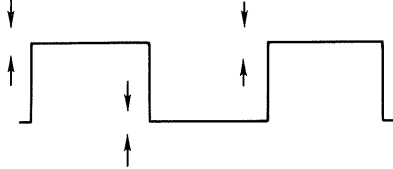Item	Adjustment VR (TC)	P.C.B.	Procedure
CH1, 2 1MHz square wave	TC101	X65-1410	Apply a 1 MHz square wave to CH1 (with the amplitude extending over 6 div.) Adjust with TC101 so that the waveform is flat. <div style="text-align: center;">  </div>
CH1 1 MHz overshoot	TC6	X65-1410	Apply a 1 MHz square wave to CH1 (with the amplitude extending over 6 div.) Adjust the overshoot with TC6. <div style="text-align: center;">  </div>
CH2 1 MHz overshoot	TC56	X65-1410	Apply a 1 MHz square wave to CH2 (with the amplitude extending over 6 div.) Adjust the overshoot with TC56.


ADJUSTMENT

POWER SUPPLY UNIT (X68-1610-00)

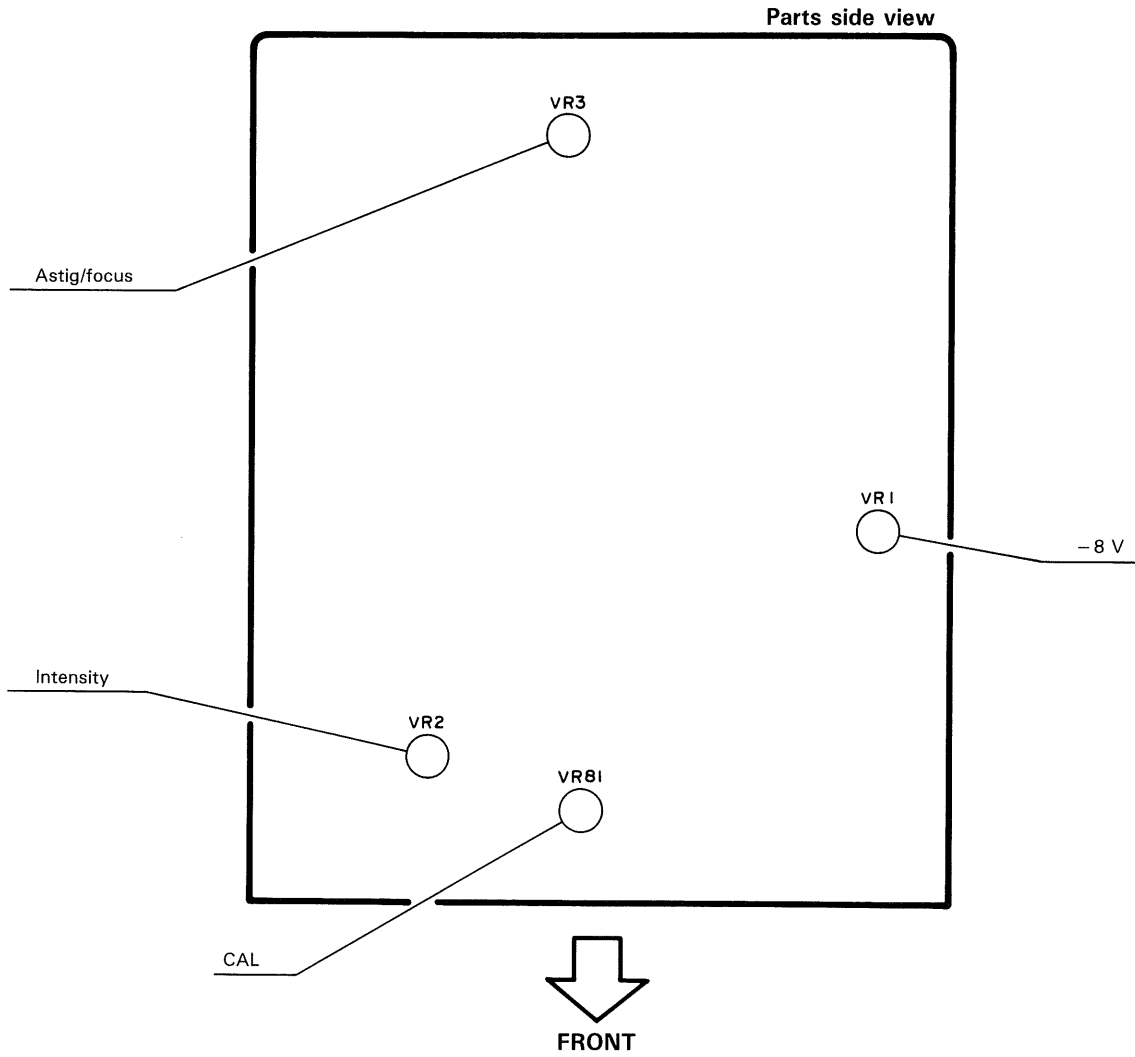

ADJUSTMENT

VERTICAL & HORIZONTAL UNIT (X65-1410-01)

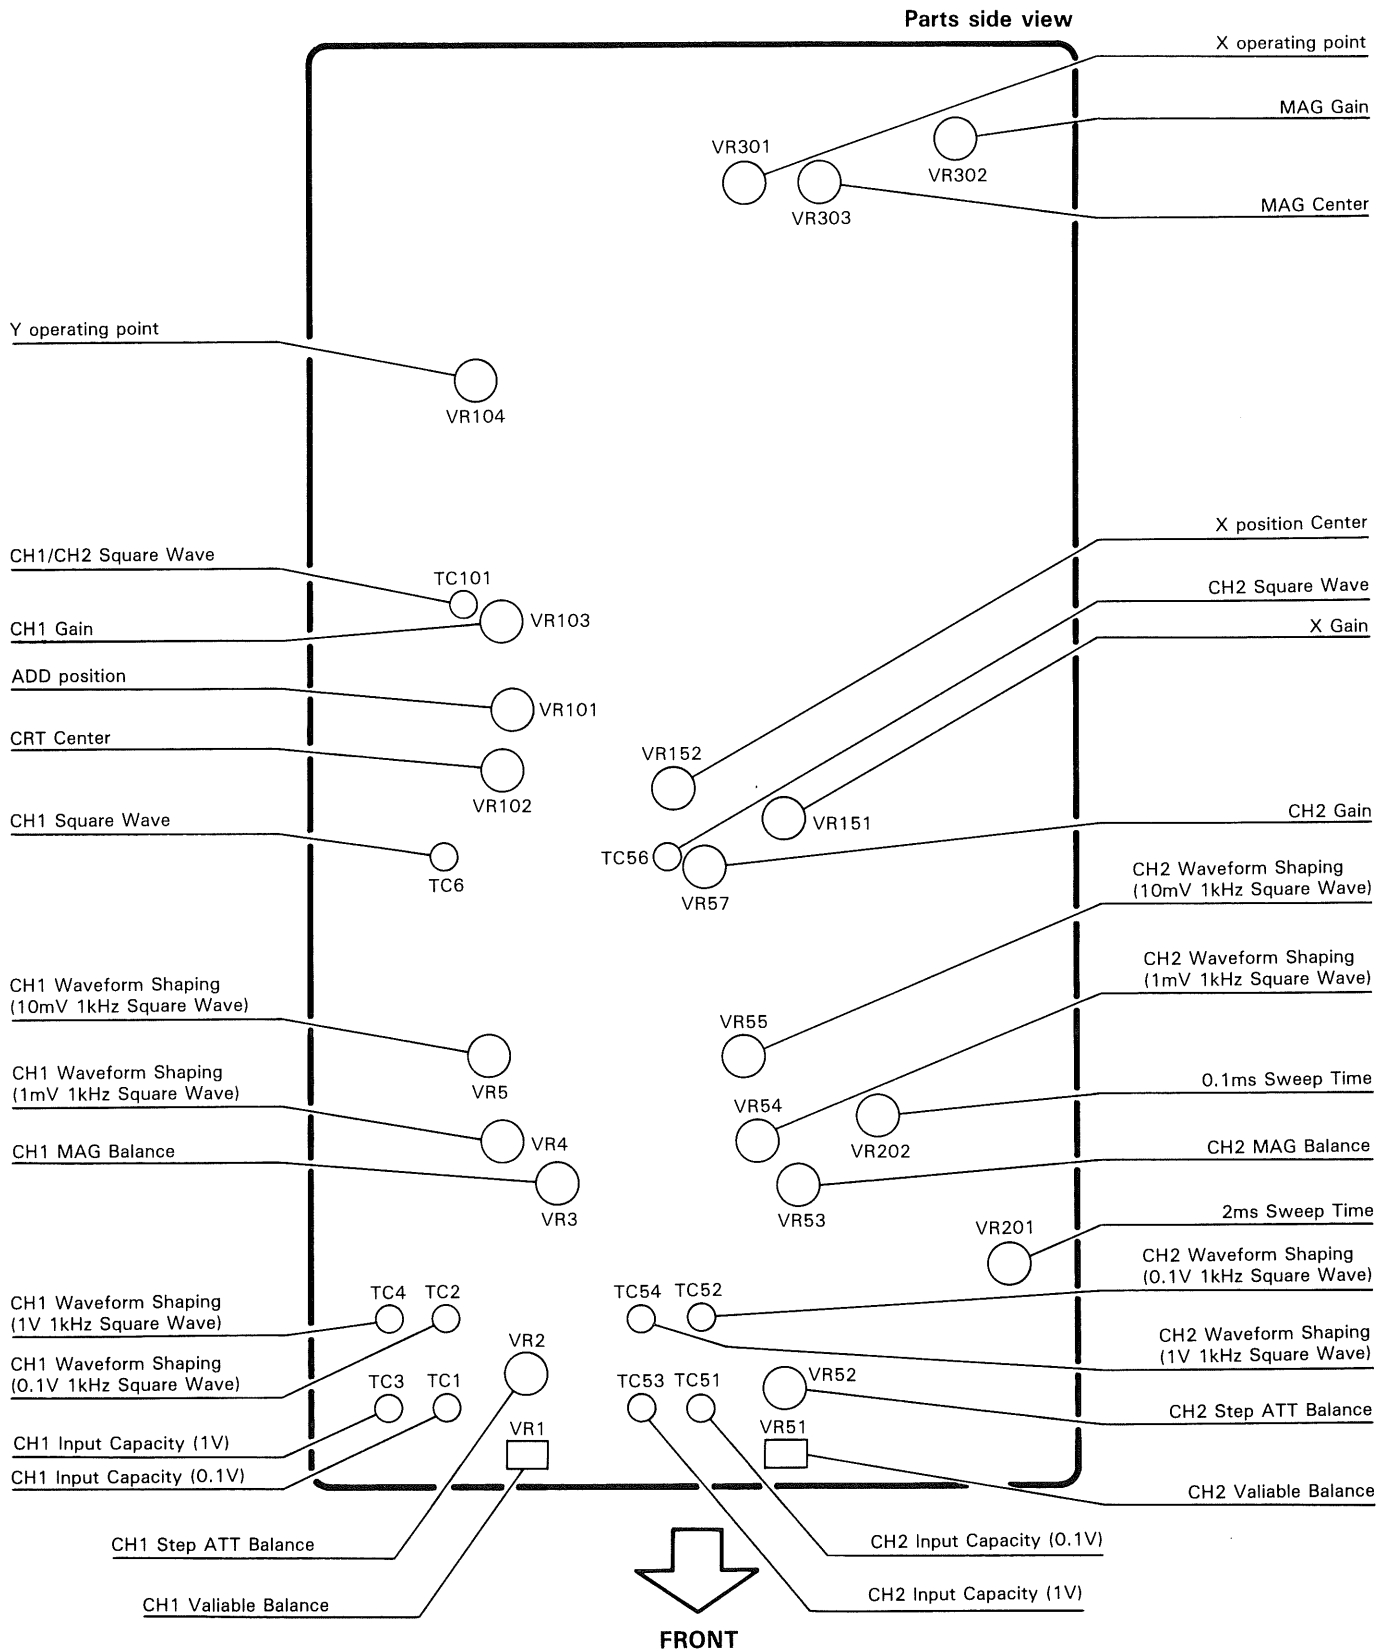


PARTS LIST

CS-4026 UNIT Y70-1740-00

REF.NO	PARTS NO	.NAME & DESCRIPTION
	A01-1225-22	CASE
	A10-1458-22	CHASSIS
	A13-0946-12	FRAME;CENTER
	A13-0947-13	FRAME;PANEL
	A33-0504-03	REFLECTOR
	A40-0715-03	BOTTOM PLATE
	A63-0029-01	MOLDED PANEL
	A83-0016-02	REAR PANEL
	B11-0518-04	FILTER
	B30-0925-05	LAMP
	B30-0996-05	LAMP ASS'Y
	B41-0710-04	CAUTION LABEL (HIGH VOLTAGE)
	B42-3699-04	SERIAL NO. PLATE
	B50-7731-10	INSTRUCTION MANUAL, JAPANESE
	B50-7732-20	INSTRUCTION MANUAL, ENGLISH
	E04-0259-05	BNC RECEPTACLE
	E18-0365-05	AC SELECTOR WITH 6X30MM FUSE
	E18-0366-15	AC SELECTOR WITH 5X20MM FUSE
	E21-0660-04	TERMINAL, CAL
	E23-0552-04	EARTH TERMINAL
	E30-1644-15	BS POWER CORD
	E30-1818-05	JIS POWER CORD SET
	E30-1819-05	CEE POWER CORD SET
	E30-1820-05	UL/CSA POWER CORD SET
	E30-1821-05	SAA POWER CORD SET
	E31-0564-15	WIRE ASS'Y; PROTECTIVE EARTH
	E31-5878-05	WIRE ASS'Y; Z AXIS TO P14
	E31-5879-05	WIRE ASS'Y; CH1 OUTPUT TO P5
	E38-0258-05	WIRE ASS'Y; CAL TO P32
	F05-5013-05	FUSE(6X30MM) 0.5A
	F05-5016-05	FUSE(5X20MM) 500MAT
	F05-8015-05	FUSE(6X30MM) 0.8A
	F11-1206-03	CRT SHIELD
	F15-0733-04	FELT (CRT SHIELD)
	G16-0611-04	REFLECTOR SHEET (L)
	G16-0612-04	REFLECTOR SHEET (R)
	H10-2848-02	FOAMED STYRENE PAD(FRONT)
	H10-2849-02	FOAMED STYRENE PAD(REAR)
	H20-1727-04	VINYL COVER
	H53-0036-04	CARTON BOX
	J02-0089-05	RUBBER FOOT(REAR)
	J02-0524-04	TILT STAND
	J02-0525-23	RUBBER FOOT; FOR TILT STAND
	J19-1620-05	CORD KEEP
	J19-1653-23	HOLDER FOR CRT
	J21-4695-03	BRACKET, FOR CRT
	J21-4696-04	BRACKET, FOR POWER SW
	J21-4736-03	BRACKET; FOR CRT, BACKWARD
	J21-4737-14	BRACKET, FOR PANEL UNIT
	J59-0403-05	NYLON RIVET (ILLUMI)
	J61-0408-05	WIRE WRAPPING BAND
	K01-0518-05	HANDLE
	K21-0892-03	KNOB (VOLTS/DIV)
	K21-0897-14	KNOB(2 USED)
	K21-0910-03	KNOB(SWEEP TIME/DIV)
	K23-0808-03	KNOB(ONE USED)
	K23-0811-03	KNOB(6 USED)
	K27-0537-04	KNOB, FOR LEVER SWITCH
	K27-0590-04	KNOB, FOR PUSH SW
	LN322GP	DIODE; POWER LED
	L01-9958-05	POWER TRANSFORMER
	L39-0534-05	ROTATION COIL
	S40-2532-05	POWER SW
	W01-0503-04	REAR RUBBER FOOT/CORD WRAP
	W03-2314-05	PROBE (PC-35)
	X65-1410-01	HORIZONTAL/VERTICAL UNIT
	X66-1150-00	PANEL UNIT
	X68-1610-00	POWER SUPPLY UNIT
	X81-2960-01	CRT SOCKET UNIT
	150VTM31A	CRT

MODEL PC-35 (LOW CAPACITY PROBE)

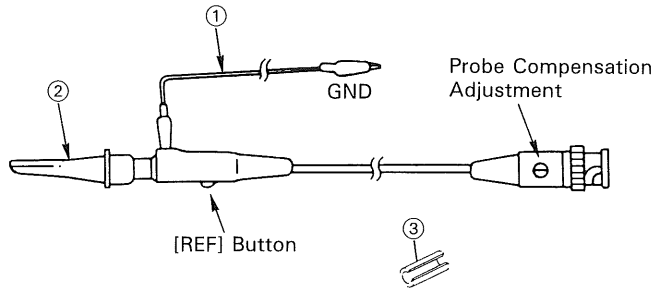

ITEM	DESCRIPTION	PARTS NO.
①	Ground Wire Assembly	E30-1883-08
②	Retractable Hook Tip	E29-0540-08
③	Marker (Orange)	B42-1950-08

PARTS LIST

VERTICAL & HORIZONTAL UNIT

X65-1410-01


REF.NO	PARTS NO	NAME & DESCRIPTION			
	A22-0878-13	SUB PANEL			
	CC45CH1H220J	CAP. CERAMIC 22P	5%	50V	
	C05-0031-15	CAP. TRIMMER 10P			
	E04-0259-05	BNC RECEPTACLE			
	E21-0667-05	METAL TERMINAL			
	E31-5882-05	WIRE ASS'Y:FOR K-K			
	E31-5883-05	WIRE ASS'Y:FOR L-L			
	E31-5884-05	WIRE ASS'Y:FOR F-F			
	F01-0879-05	HEAT SINK			
	F10-1627-04	SHIELD PLATE			
	F10-1628-04	SHIELD PLATE			
	J61-0408-05	WIRE WRAPPING BAND			
	J73-0047-12	PCB (UNMOUNTED)			
	N09-0623-04	SCREW, SEMS M3X8			
	N09-0739-05	SCREW, SEMS TAPTITE 3X8			
	RD14BB2C220J	RES. CARBON 22	5%	1/6W	
	RD14BB2C221J	RES. CARBON 220	5%	1/6W	
	212-1018-05	TUBE (PLASTIC)			
C1	CC45FCH1H330J	CAP. CERAMIC 33P	5%	50V	
C2	CC93FCH1H301J	CAP. CERAMIC 300P	5%	50V	
C3	CF93AN2G103K	CAP. POLYESTER 0.01	10%	400V	
C4	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C5	CC45FSL1H681J	CAP. CERAMIC 680P	5%	50V	
C6	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C7	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C10	CC45FSL1H331J	CAP. CERAMIC 330P	5%	50V	
C11	CC45FCH1H050C	CAP. CERAMIC 5P	0.25P	50V	
C12	NO USE				
C13	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C14	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C51	CC45FCH1H330J	CAP. CERAMIC 33P	5%	50V	
C52	CC93FCH1H301J	CAP. CERAMIC 300P	5%	50V	
C53	CF93AN2G103K	CAP. POLYESTER 0.01	10%	400V	
C54	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C55	CC45FSL1H681J	CAP. CERAMIC 680P	5%	50V	
C56	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C57	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C58	NO USE				
C59	CC45CH1H220J	CAP. CERAMIC 22P	5%	50V	
C60	CC45FSL1H331J	CAP. CERAMIC 330P	5%	50V	
C61	CC45FCH1H050C	CAP. CERAMIC 5P	0.25P	50V	
C62	NO USE				
C63	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C64	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C101	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C102	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C103	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C104	CC45FSL1H391J	CAP. CERAMIC 390P	5%	50V	
C105	C092FM1H104K	CAP. MYLAR 0.1	10%	50V	
C106	CC45FCH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C107	CC45FCH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C108	C092FM1H103K	CAP. MYLAR 0.01	10%	50V	
C109	C092FM1H103K	CAP. MYLAR 0.01	10%	50V	
C110	CF93AN2E104K	CAP. METAL FILM 0.01	10%	250V	
C111	CF93AN2E103K	CAP. METAL FILM 0.01	10%	250V	
C112	CC45CH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C113	CC45CH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C114	NO USE				
C115	C092FM1H104K	CAP. MYLAR 0.1	10%	50V	
C116	NO USE				
C117	CF93AN2E104K	CAP. METAL FILM 0.1	10%	250V	
C118	CF93AN2E104K	CAP. METAL FILM 0.1	10%	250V	
C119	CE04W2C3R3M	CAP. ELECTRO 3.3	20%	160V	
C120	C90-3016-05	CAP. ELECTRO 47	105°C	10V	
C151	CC45FCH1H070D	CAP. CERAMIC 7P	0.5P	50V	
C152	CC45FCH1H070D	CAP. CERAMIC 7P	0.5P	50V	
C153	NO USE				
C154	CC45FCH1H070D	CAP. CERAMIC 7P	0.5P	50V	
C155	CE04BW1E220M	CAP. ELECTRO 22	20%	25V	
C156	CC45FCH1H070D	CAP. CERAMIC 7P	0.5P	50V	
C157	CC45FCH1H070D	CAP. CERAMIC 7P	0.5P	50V	
C158	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C201	CC45FSL1H220J	CAP. CERAMIC 22P	5%	50V	
C202	CE04BW1E220M	CAP. ELECTRO 22	20%	25V	
C203	CE04EW1C100M	CAP. ELECTRO 10	20%	16V	
C204	CC45SL1H561J	CAP. CERAMIC 560P	5%	50V	

REF.NO	PARTS NO	NAME & DESCRIPTION			
C205	NO USE				
C206	CE04HW1H010M	CAP. ELECTRO 1	20%	50V	
C207	NO USE				
C208	C092M1H473K	CAP. MYLAR 0.047	10%	50V	
C209	CC45SL1H030C	CAP. CERAMIC 3P	0.25P	50V	
C210	C092M1H103K	CAP. MYLAR 0.01	10%	50V	
C211	CC45SL1H470J	CAP. CERAMIC 47P	5%	50V	
C212	CE04EW1H2R2M	CAP. ELECTRO 2.2	20%	50V	
C213	CK45FB1H472K	CAP. CERAMIC 4700P	10%	50V	
C214	CE04EW1H010M	CAP. ELECTRO 1	20%	50V	
C215	C91-1316-05	CAP. POLYESTER 2.2	5%	100V	
C216	C093HP2A222J	CAP. MYLAR 2200P	5%	100V	
C219	CK45FB1H102K	CAP. CERAMIC 1000P	10%	50V	
C220	CC45FSL1H221J	CAP. CERAMIC 220P	5%	50V	
C221	NO USE				
C222	CC45FCH1H820J	CAP. CERAMIC 82P	5%	50V	
C223	CE04EW1H010M	CAP. ELECTRO 1	20%	50V	
C224	CC45FSL1H471J	CAP. CERAMIC 470P	5%	50V	
C225	CC45FSL1H221J	CAP. CERAMIC 220P	5%	50V	
C226	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C227	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C228	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C229	C91-1315-05	CAP. CERAMIC 0.1	80/-10%	50V	
C230	C092M1H104K	CAP. MYLAR 0.1	10%	50V	
C231	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C232	CK45B1H102K	CAP. CERAMIC 1000P	10%	50V	
C233	CC45FSL1H220J	CAP. CERAMIC 22P	5%	50V	
C234	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C251	CE04W2C3R3M	CAP. ELECTRO 3.3	20%	160V	
C252	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C253	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C254	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C255	CE04EW1C100M	CAP. ELECTRO 10	20%	16V	
C256	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C257	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C258	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C259	C91-1309-05	CAP. CERAMIC 0.01	10%	500V	
C260	C91-1309-05	CAP. CERAMIC 0.01	10%	500V	
C261	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C262	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C263	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C264	C91-1315-05	CAP. CERAMIC 0.1	80/-10%	50V	
C265	CE04EW0J331M	CAP. ELECTRO 330	265	6.3V	
C266	C91-1315-05	CAP. CERAMIC 0.1	80/-10%	50V	
C267	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C268	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C269	CE04EW1A470M	CAP. ELECTRO 47	20%	10V	
C270	CE04EW1A220M	CAP. ELECTRO 22	20%	10V	
C271	CE04EW1A220M	CAP. ELECTRO 22	20%	10V	
C272	C91-1315-05	CAP. CERAMIC 0.1	80/-10%	50V	
C273	C91-1315-05	CAP. CERAMIC 0.1	80/-10%	50V	
C291	CC45FCH1H050C	CAP. CERAMIC 5P	0.25P	50V	
C292	NO USE				
C293	C91-1273-05	CAP. NETWORK 6X0.01U		50V	
C296	CK45F1H103Z	CAP. CERAMIC 0.01		50V	
C301	CK45FF1H103Z	CAP. CERAMIC 0.01		50V	
C302	CC45FSL1H331J	CAP. CERAMIC 330P	5%	50V	
C303	NO USE				
C304	C91-1309-05	CAP. CERAMIC 0.01	10%	500V	
C305	CF93AN2E104K	CAP. METAL FILM 0.1	10%	250V	
C306	CK45FB2H102K	CAP. CERAMIC 1000P	10%	500V	
C391	CC45CH1H220J	CAP. CERAMIC 22P	5%	50V	
C401	CF93AN2G223K	CAP. POLYESTER 0.022	10%	400V	
C402	CF93AN2G223K	CAP. POLYESTER 0.022	10%	400V	
C501	CC45CH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C502	CC45CH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C503	CC45CH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C504	CC45CH1H030C	CAP. CERAMIC 3P	0.25P	50V	
C505	CK45FB2H102K	CAP. CERAMIC 1000P	10%	500V	
C506	CK45FB2H102K	CAP. CERAMIC 1000P	10%	500V	
C511	CK45B1H472K	CAP. CERAMIC 4700P	10%	50V	
C531	CE04EW1A101M	CAP. ELECTRO 100	20%	10V	
C532	CE04EW1A101M	CAP. ELECTRO 100	20%	10V	
C533	CE04EW1A101M	CAP. ELECTRO 100	20%	10V	
C534	CE04EW1A101M	CAP. ELECTRO 100	20%	10V	


PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION	REF.NO	PARTS NO	NAME & DESCRIPTION
C535	C092FM1H104K	CAP. MYLAR 0.1 10% 50V	Q213	2SA1005(K)	TR. SI, PNP
Q202	1SS132	DIODE	Q214	2SA733(P)	TR. SI, PNP
Q203	1SS132	DIODE	Q215	2SC945(P)	TR. SI, NPN
Q204	1SS132	DIODE	Q216	2SA733(P)	TR. SI, PNP
Q205	1SS132	DIODE	Q217	2SC945(P)	TR. SI, NPN
Q206	1SS132	DIODE	Q218	2SC945(P)	TR. SI, NPN
Q207	1SS132	DIODE	Q219	2SA733(P)	TR. SI, PNP
Q208	NO USE		Q220	2SC945(P)	TR. SI, NPN
Q209	1SS132	DIODE	Q221	2SC3732(L)	TR. SI, NPN
Q210	1SS132	DIODE	Q222	2SC945(P)	TR. SI, NPN
Q211	NO USE		Q223	2SA733(P)	TR. SI, PNP
Q212	1SS132	DIODE	Q224	2SC945(P)	TR. SI, NPN
Q213	1SS132	DIODE	Q225	NO USE	
Q214	1SS132	DIODE	Q226	2SA733(P)	TR. SI, PNP
Q215	1SS132	DIODE	Q227	2SC945(P)	TR. SI, NPN
Q216	NO USE		Q228	NO USE	
Q217	1SS132	DIODE	Q229	2SC945(P)	TR. SI, NPN
Q218	1SS132	DIODE	Q230	2SC945(P)	TR. SI, NPN
Q219	1SS132	DIODE	Q231	2SC945(P)	TR. SI, NPN
Q220	1SS132	DIODE	Q301	2SC945(P)	TR. SI, NPN
Q221	MA700	DIODE	Q302	2SC945(P)	TR. SI, NPN
Q222	1SS132	DIODE	Q303	2SA1005(K)	TR. SI, PNP
Q301	1SS83	DIODE	Q304	2SA1005(K)	TR. SI, PNP
Q302	1SS83	DIODE	Q305	2SC945(P)	TR. SI, NPN
Q303	MA700	DIODE	Q306	2SC945(P)	TR. SI, NPN
Q304	1SS132	DIODE	Q307	2SA1209(S,T)	TR. SI, PNP
Q307	1SS132	DIODE	Q308	2SC2911(S,T)	TR. SI, NPN
Q308	1SS132	DIODE	Q309	2SC2911(S,T)	TR. SI, NPN
Q309	1SS132	DIODE	Q310	2SA1209(S,T)	TR. SI, PNP
Q310	1SS132	DIODE	Q315	2SK583	FET, N-CHANNEL
J38	R92-1061-05	JUMPING RES. ZERO OHM (5MM)	Q316	2SK583	FET, N-CHANNEL
J95	R92-1061-05	JUMPING RES. ZERO OHM (5MM)	Q511	2SC945(P)	TR. SI, NPN
J901	R92-1061-05	JUMPING RES. ZERO OHM (5MM)	R1	RD14BB2C220J	RES. CARBON 22 5% 1/6W
L1	L40-4782-01	FERRI INDUCTOR 0.47UH	R2	RN14BK2E9003D	RES. METAL FILM 900K 0.5% 1/4W
L2	L40-4782-01	FERRI INDUCTOR 0.47UH	R3	RN14BK2E1113D	RES. METAL FILM 111K 0.5% 1/4W
L3	L40-1011-11	FERRI INDUCTOR 100UH	R4	RD14BB2C470J	RES. CARBON 47 5% 1/6W
P1	E40-3242-05	PIN CONNECTOR 7P	R5	RD14BB2C101J	RES. CARBON 100 5% 1/6W
P2	E40-5066-05	PIN CONNECTOR 9P	R6	RD14BB2C331J	RES. CARBON 330 5% 1/6W
P3	E40-3243-05	PIN CONNECTOR 8P	R7	RN14BK2E9903D	RES. METAL FILM 990K 0.5% 1/4W
P4	E40-3239-05	PIN CONNECTOR 4P	R8	RN14BK2E1012D	RES. METAL FILM 10.1K0.5% 1/4W
P5	E40-3237-05	PIN CONNECTOR 2P	R9	RD14BB2C220J	RES. CARBON 22 5% 1/6W
P6	E40-3239-05	PIN CONNECTOR 4P	R10	RD14BB2C391J	RES. CARBON 390 5% 1/6W
P7	E40-3238-05	PIN CONNECTOR 3P	R11	RD14BB2C220J	RES. CARBON 22 5% 1/6W
P8	E40-5068-05	PIN CONNECTOR 11P	R12	RN14BK2E1004F	RES. METAL FILM 1M 1% 1/4W
Q1	2SC1923(O)	TR. SI, NPN	R13	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
Q2	2SC1923(O)	TR. SI, NPN	R14	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q3	2SC945(P)	TR. SI, NPN	R15	RN14BK2C3003F	RES. METAL FILM 300K 1% 1/6W
Q4	2SA1459(L)	TR. SI, PNP	R16	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q5	2SA1459(L)	TR. SI, PNP	R17	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
Q6	2SC1907	TR. SI, NPN	R18	RD14BB2C510J	RES. CARBON 51 5% 1/6W
Q7	2SC1907	TR. SI, NPN	R19	RN14BK2C3000D	RES. METAL FILM 300 0.5% 1/6W
Q8	2SC3354(T,S)	TR. SI, NPN	R20	RN14BK2C1500D	RES. METAL FILM 150 0.5% 1/6W
Q9	2SC3354(T,S)	TR. SI, NPN	R21	RD14BB2C390J	RES. CARBON 39 5% 1/6W
Q10	2SA1459(L)	TR. SI, PNP	R22	RN14BK2C90R0D	RES. METAL FILM 90.0 0.5% 1/6W
Q11	2SA1459(L)	TR. SI, PNP	R23	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q12	2SC3423(Y)	TR. SI, NPN	R24	RN14BK2C60R0D	RES. METAL FILM 60.0 0.5% 1/6W
Q13	2SA1360(Y)	TR. SI, PNP	R25	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
Q14	2SC3423(Y)	TR. SI, NPN	R26	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
Q15	2SA1360(Y)	TR. SI, PNP	R27	RN14BK2C62R0F	RES. METAL FILM 62.0 1% 1/6W
Q16	2SA1005(K)	TR. SI, PNP	R28	RN14BK2C24R0F	RES. METAL FILM 24.0 1% 1/6W
Q17	2SC945(P)	TR. SI, NPN	R29	RN14BK2C1100F	RES. METAL FILM 110 1% 1/6W
Q18	NO USE		R30	RD14BB2C201J	RES. CARBON 200 5% 1/6W
Q19	2SA1005(K)	TR. SI, PNP	R31	RN14BK2C1302F	RES. METAL FILM 13K 1% 1/6W
Q20	2SC945(P)	TR. SI, NPN	R32	RN14BK2C5602F	RES. METAL FILM 56K 1% 1/6W
Q21	2SC945(P)	TR. SI, NPN	R33	NO USE	
Q22	2SC945(P)	TR. SI, NPN	R34	RD14BB2C241J	RES. CARBON 240 5% 1/6W
Q201	2SK161(GR)	FET, N-CHANNEL	R35	NO USE	
Q202	2SC1923(O)	TR. SI, NPN	R36	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q203	2SA1005(K)	TR. SI, PNP	R37	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q204	2SC1907	TR. SI, NPN	R38	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q205	2SC1923(O)	TR. SI, NPN	R39	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
Q206	2SC1923(O)	TR. SI, NPN	R40	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q207	2SA733(P)	TR. SI, PNP	R41	NO USE	
Q208	2SC945(P)	TR. SI, NPN	R42	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
Q209	2SA733(P)	TR. SI, PNP	R43	NO USE	
Q210	2SA733(P)	TR. SI, PNP	R44	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q211	2SC945(P)	TR. SI, NPN	R45	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
Q212	2SC1923(O)	TR. SI, NPN	R46	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q213	2SA1005(K)	TR. SI, PNP	R51	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q214	2SA733(P)	TR. SI, PNP	R52	RN14BK2E9003D	RES. METAL FILM 900K 0.5% 1/4W











SCHEMATIC DIAGRAM

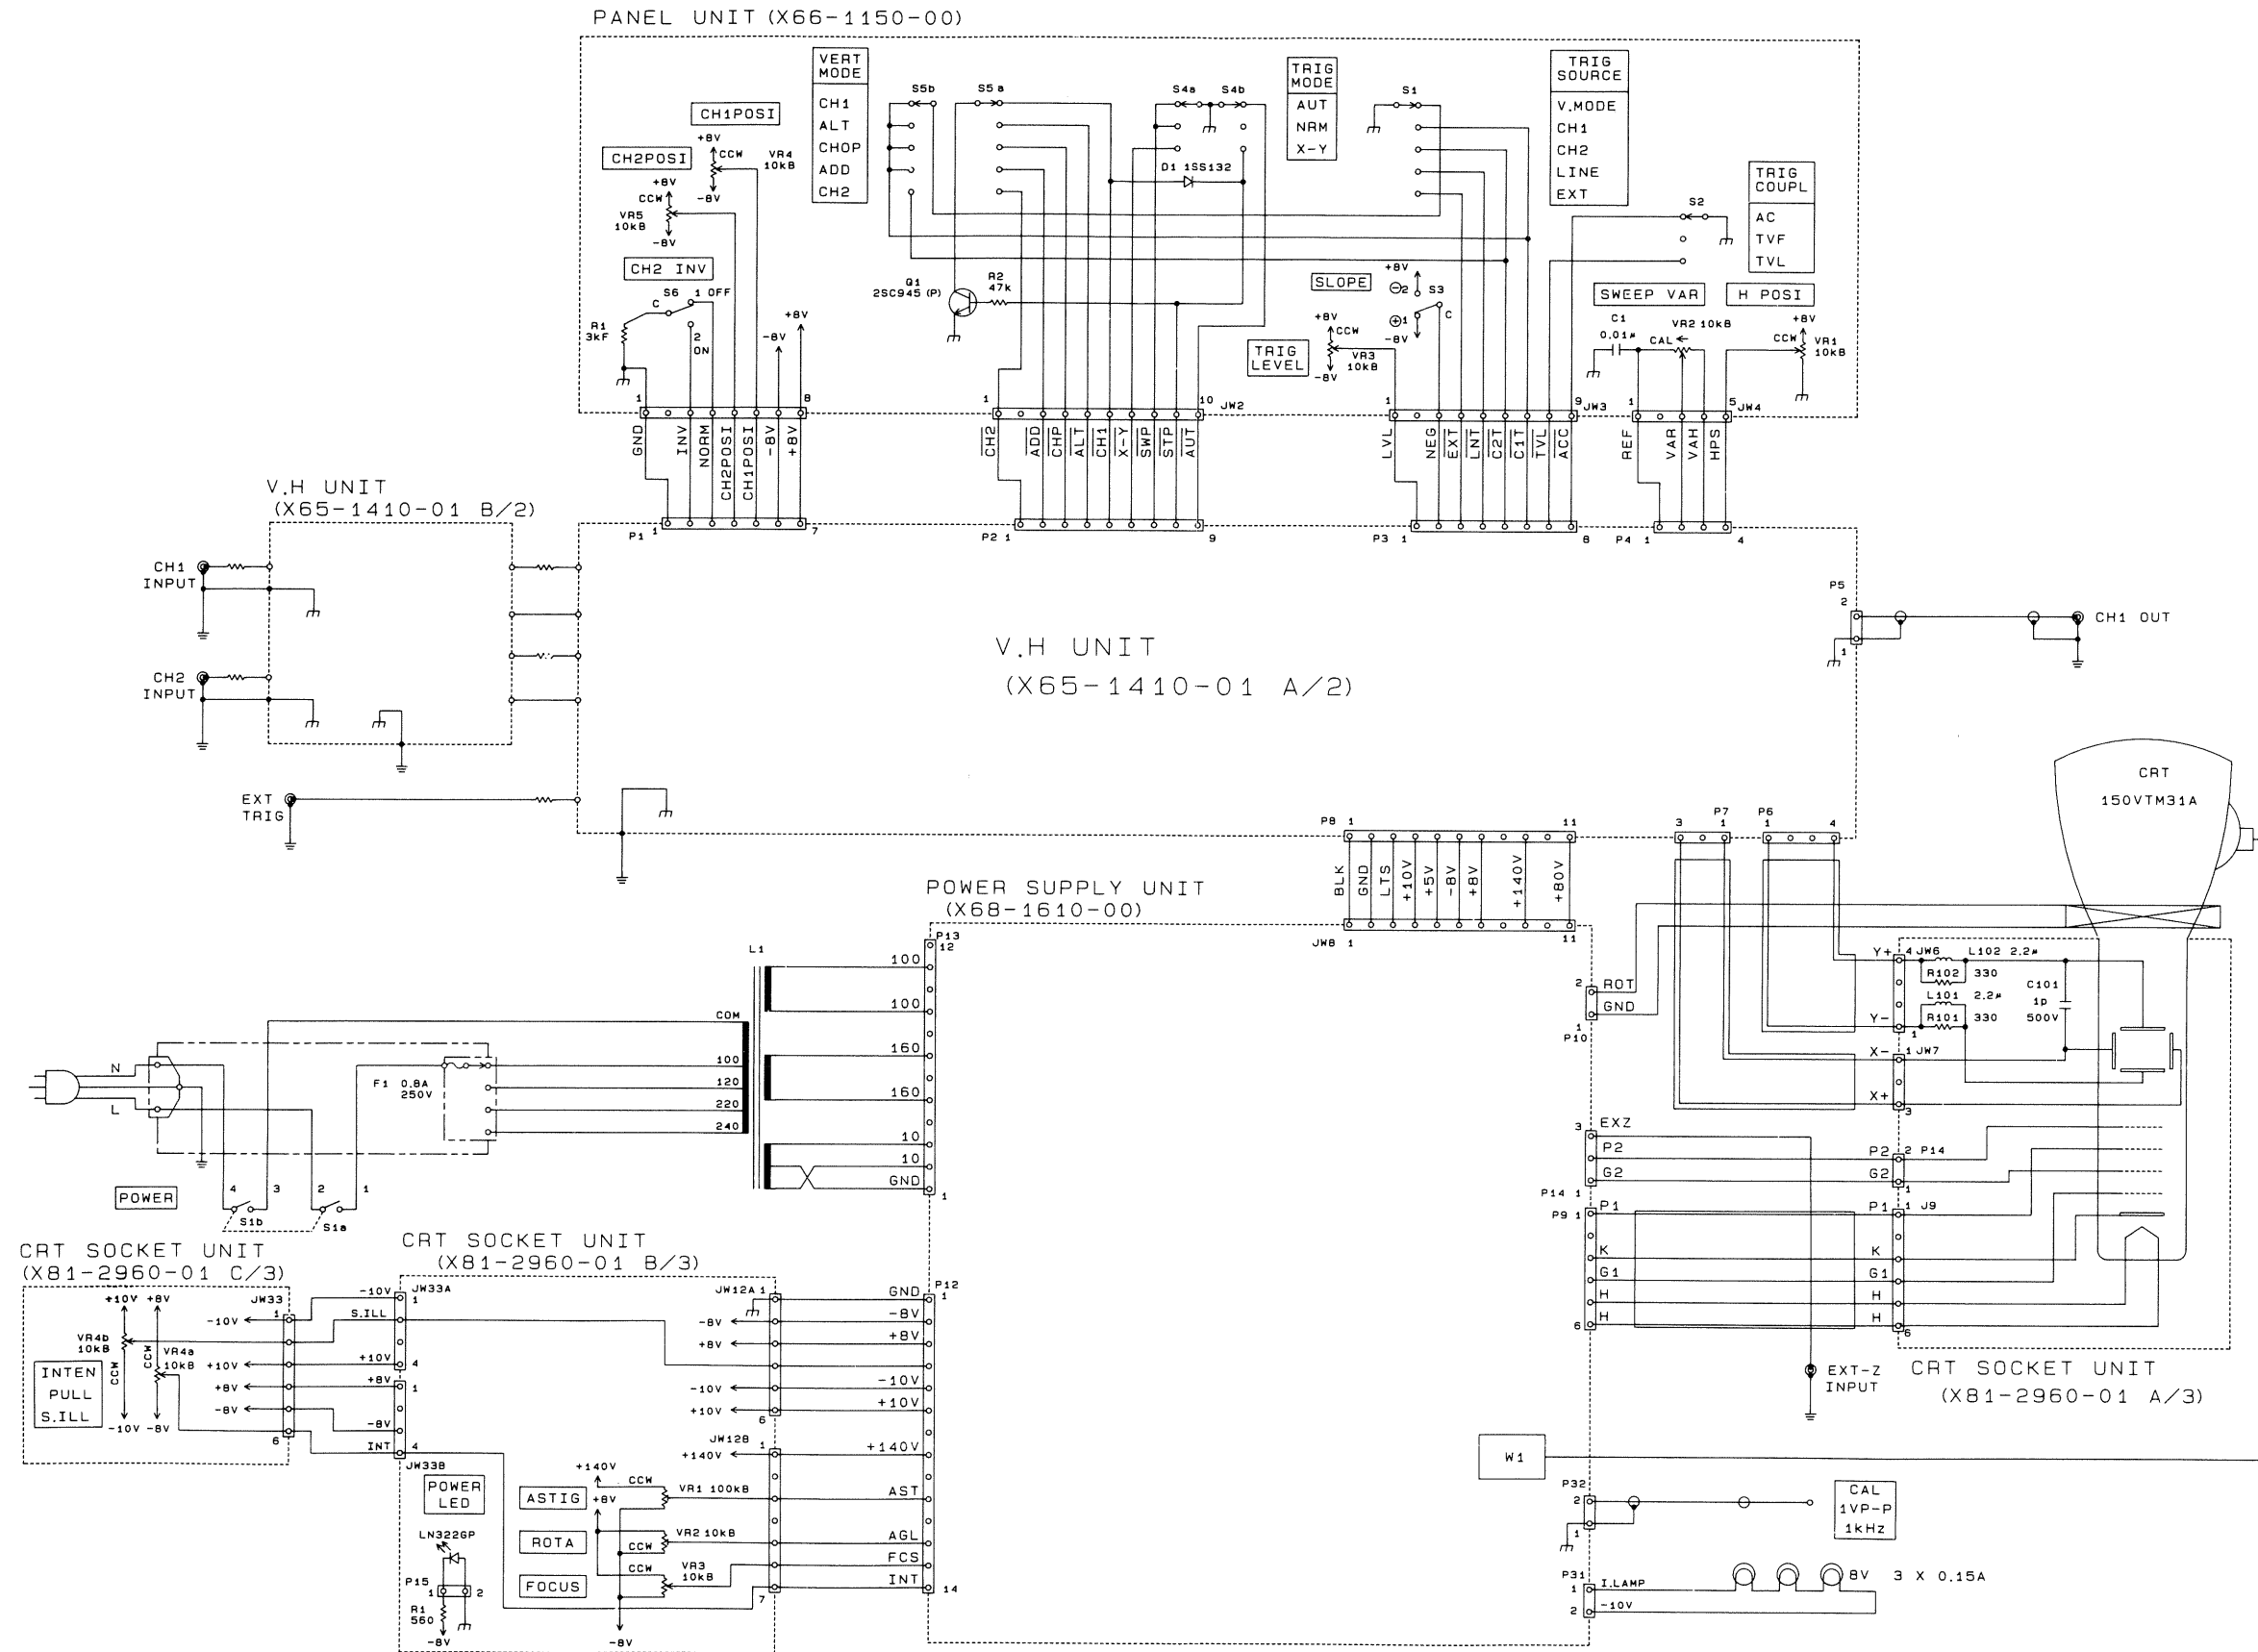

SCHEMATIC DIAGRAM/WAVEFORM POWER SUPPLY UNIT (X68-1610-00)


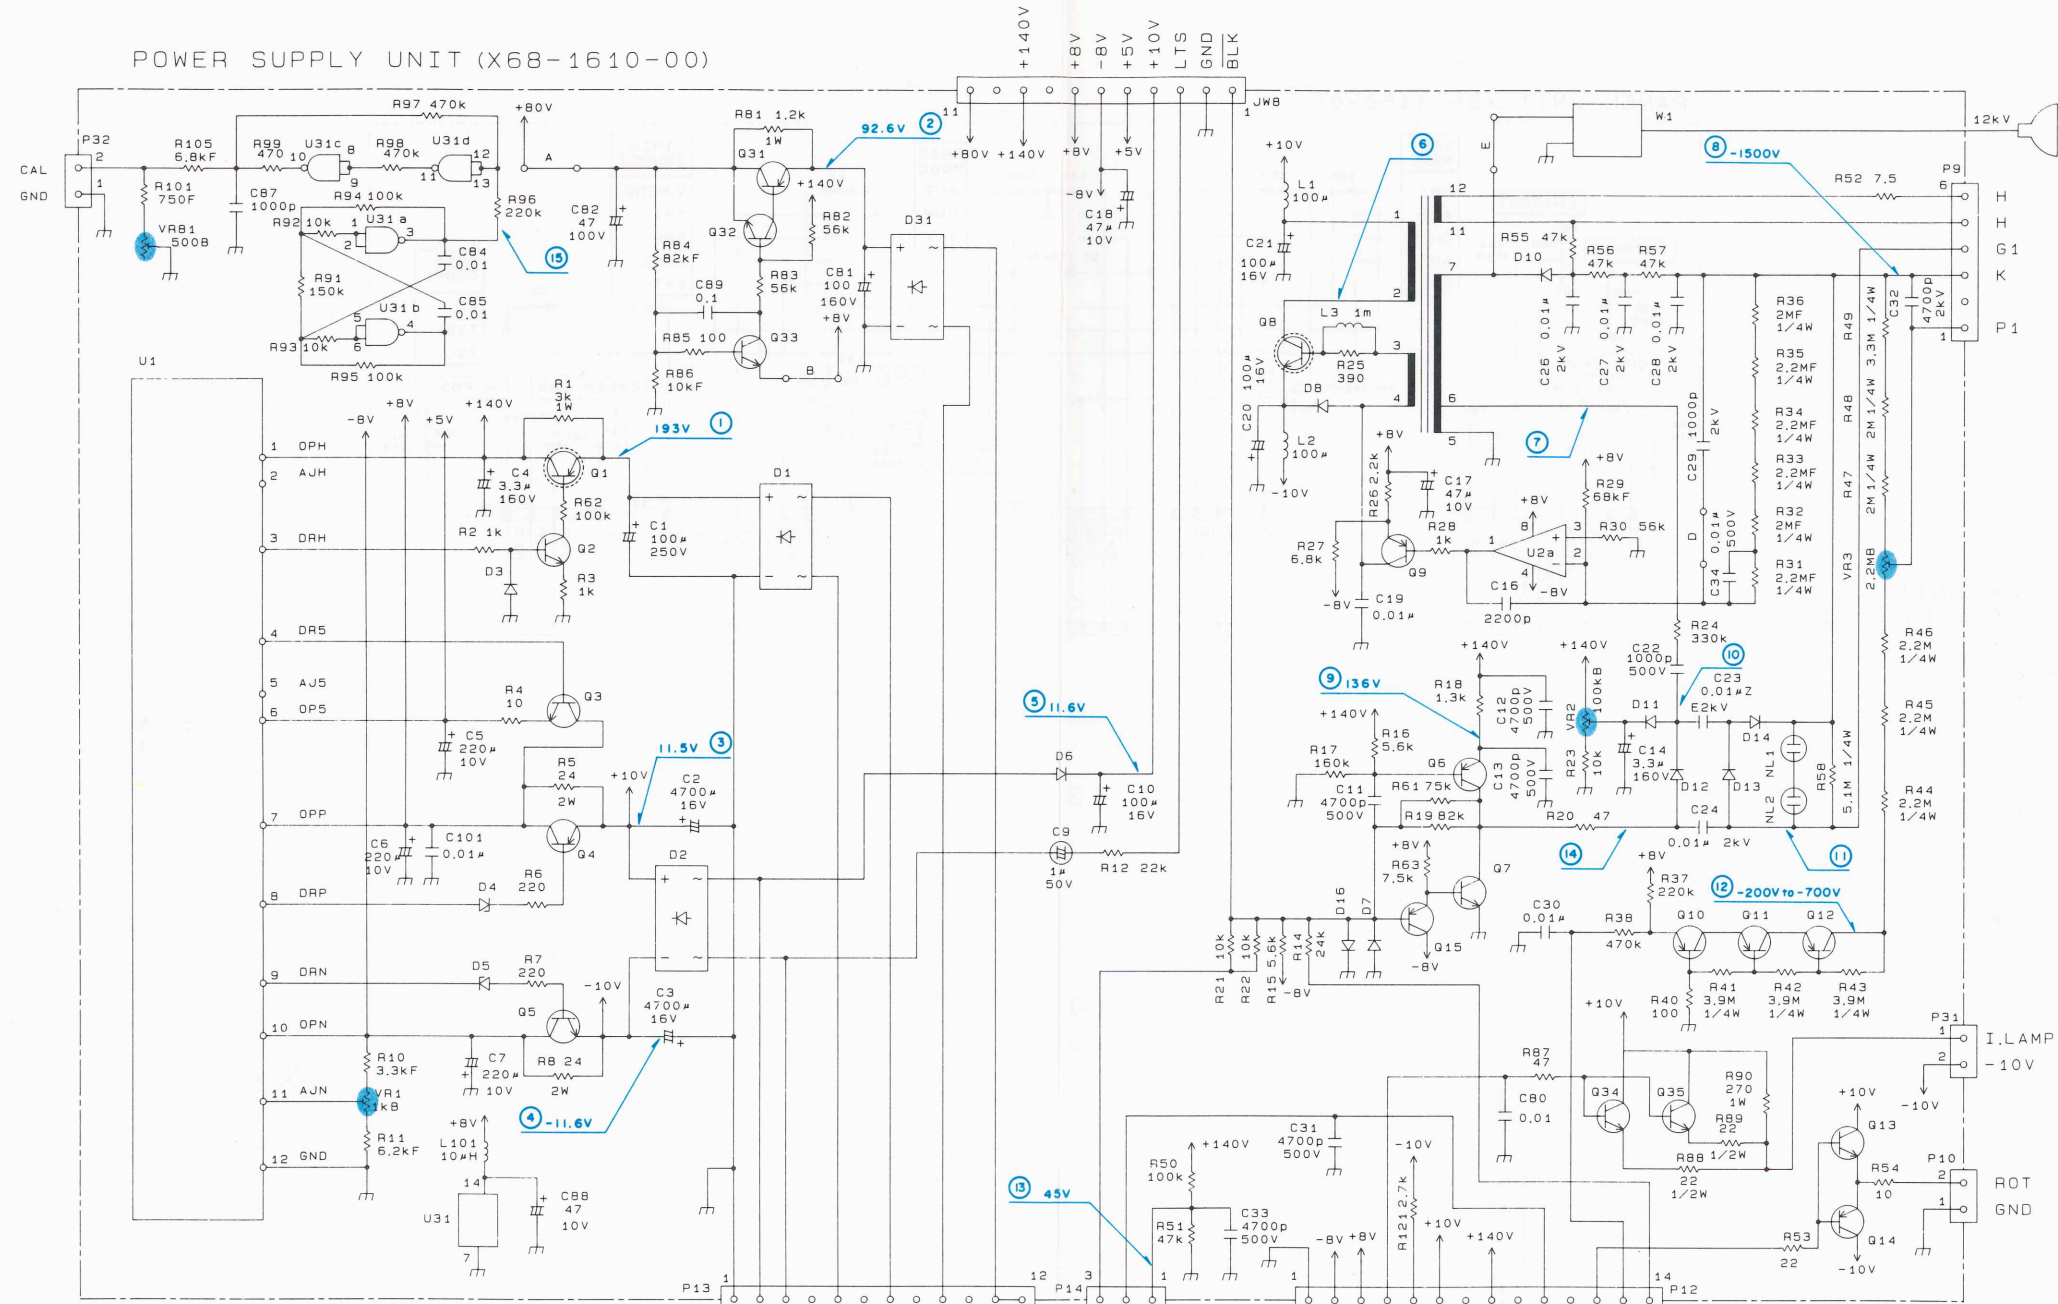


- | | | | | |
|------------------|-------------------|--------------|--------------|-------------------|
| U1 : KMA01 | NL1 : NE-38B | D1 : S1VB60 | D11 : 1SS83 | Q31 : 2SA1156 (L) |
| U2 : NJM4558D | NL2 : NE-38B | D2 : RB152 | D12 : 1SS83 | Q32 : 2SC2909 (S) |
| U31 : TC4011BP | Q9 : 2SA733 (P) | D3 : 1SS132 | D13 : 1SS83 | Q33 : 2SC945 (S) |
| Q1 : 2SA1156 (L) | Q10 : 2SA1091 (O) | D4 : MTZ10JC | D14 : 1SS83 | Q34 : 2SC1846 (R) |
| Q2 : 2SC2909 (S) | Q11 : 2SA1091 (O) | D5 : MTZ10JC | D15 : 1SS83 | Q35 : 2SC1846 (R) |
| Q3 : 2SC1384 (R) | Q12 : 2SA1091 (O) | D6 : 1SS132 | D16 : 1SS132 | |
| Q4 : 2SA684 (R) | Q13 : 2SC1384 (R) | D7 : 1SS132 | | |
| Q5 : 2SC1384 (R) | Q14 : 2SA684 (R) | D8 : 1SS132 | | |
| Q6 : SA1208 (S) | Q15 : 2SA1005 (K) | D9 : Y10GA | | |
| Q7 : 2SC2910 (S) | | D10 : Y10GA | | |
| Q8 : 2SD1666 (R) | | D31 : S1VB60 | | |

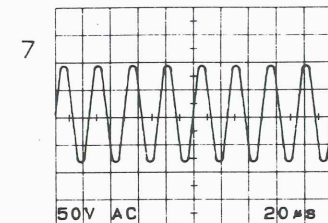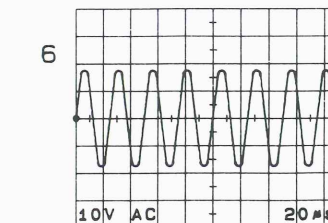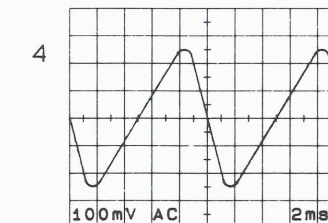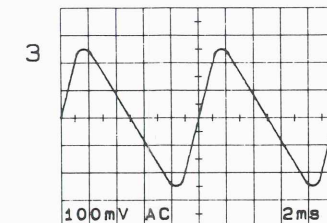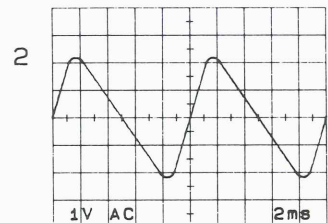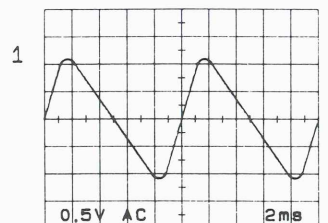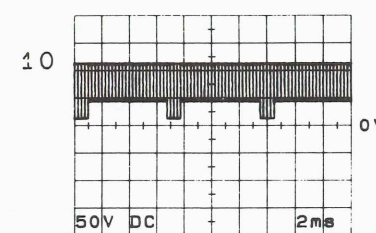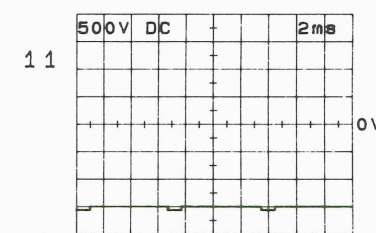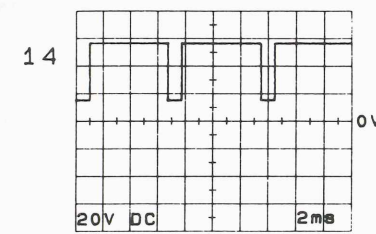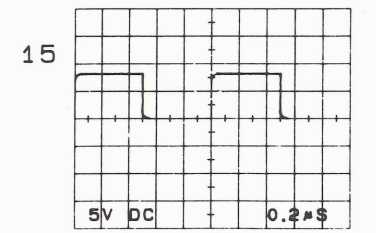


SCHEMATIC DIAGRAM/WAVEFORM VERTICAL & HORIZONTAL UNIT (X65-1410-01) (1/2)


V.H UNIT (X65-1410-01)











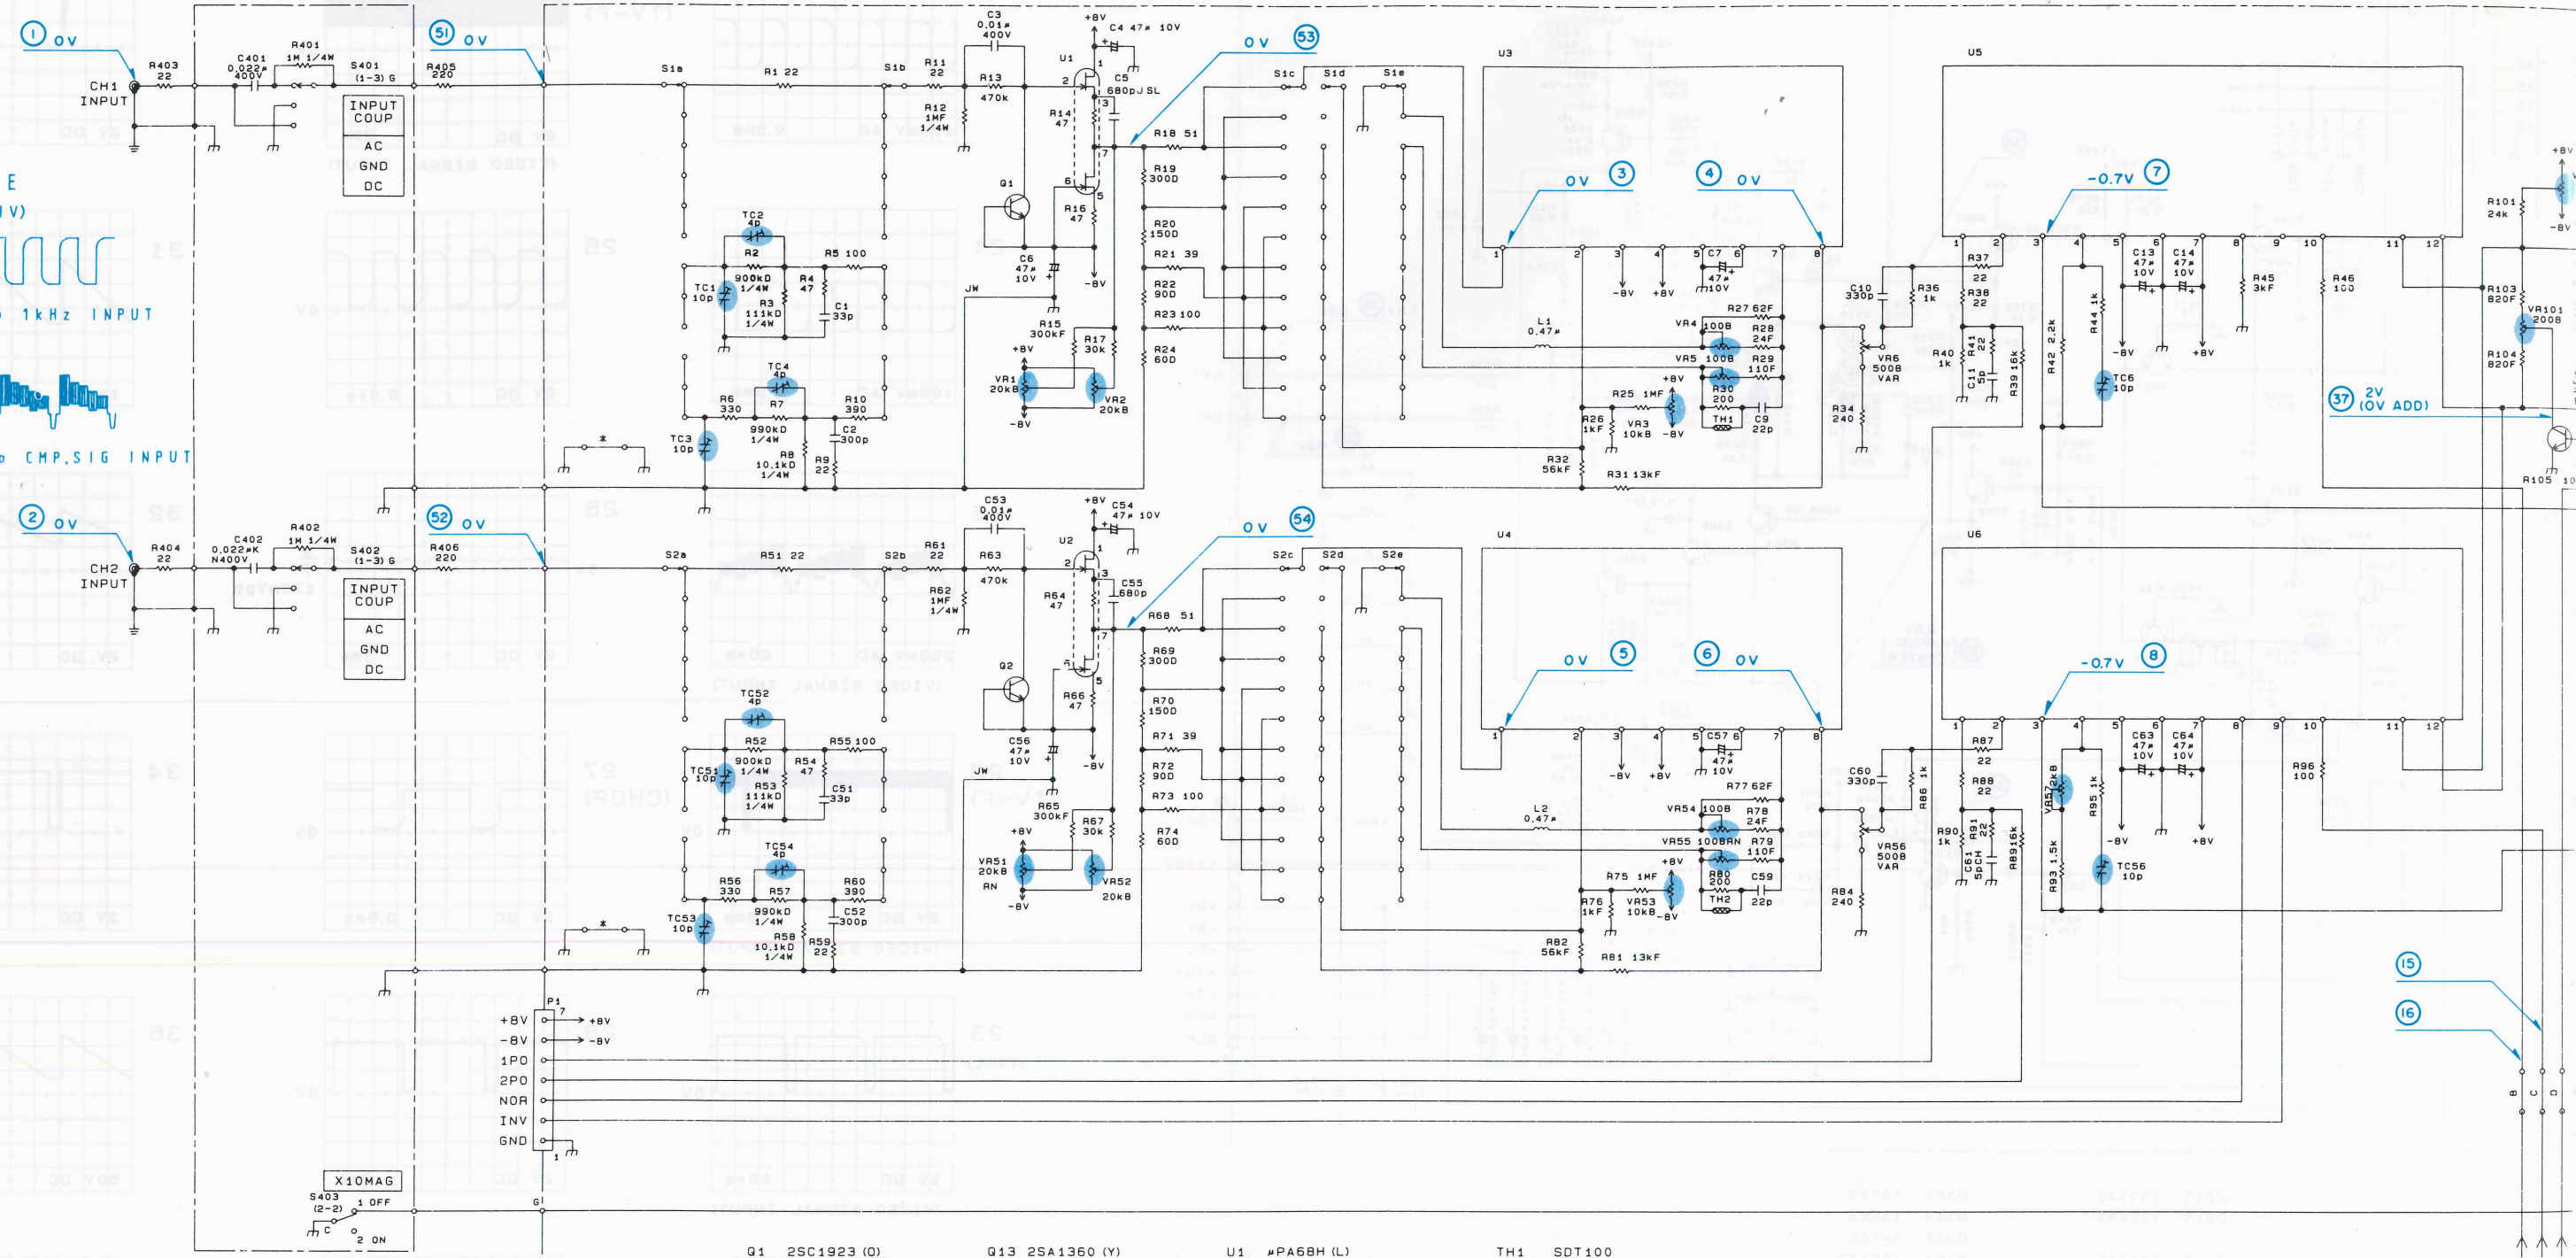
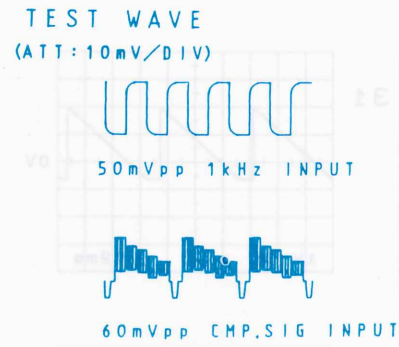


X10MAG
S403 (2-2) 1 OFF
C 2 ON




- | | | | |
|------------------|-----------------|---------------|------------|
| Q1 2SC1923 (O) | Q13 2SA1360 (Y) | U1 #PA68H (L) | TH1 SDT100 |
| Q2 2SC1923 (O) | Q14 2SC3423 (Y) | U2 #PA68H (L) | TH2 SDT100 |
| Q3 2SC945 (P) | Q15 2SA1360 (Y) | U3 KMC01 | |
| Q4 2SA1459 (L) | Q16 2SA1005 (K) | U4 KMC01 | |
| Q5 2SA1459 (L) | Q17 2SC945 (P) | U5 KMC02 | |
| Q6 2SC1907 | Q18 2SC945 (P) | U6 KMC02 | |
| Q7 2SC1907 | Q19 2SA1005 (K) | | |
| Q8 2SC3354 (T.S) | Q20 2SC945 (P) | | |
| Q9 2SC3354 (T.S) | Q21 2SC945 (P) | | |
| Q10 2SA1459 (L) | Q22 2SC945 (P) | | |
| Q11 2SA1459 (L) | Q23 2SC945 (P) | | |
| Q12 2SC3423 (Y) | | | |

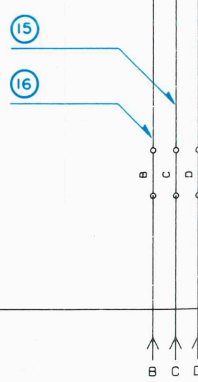


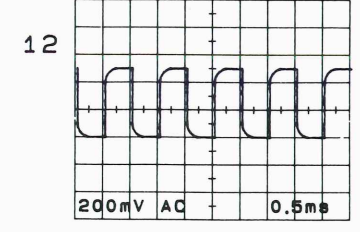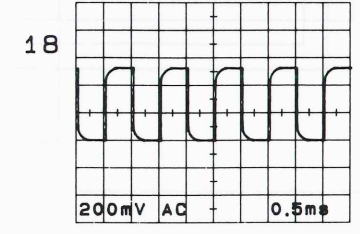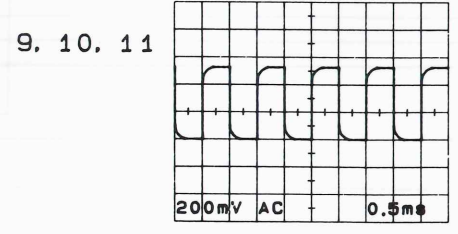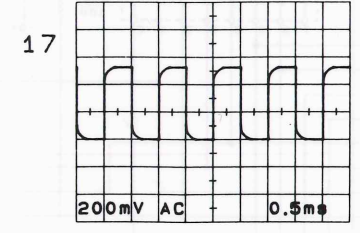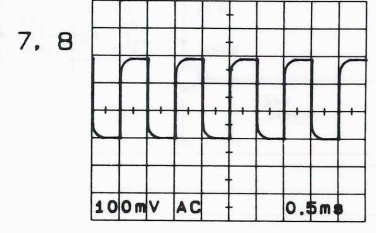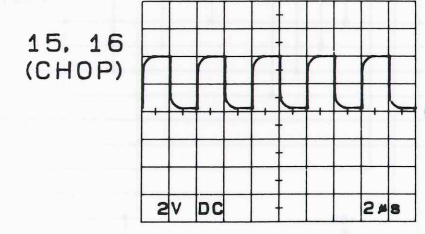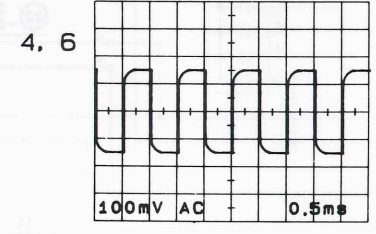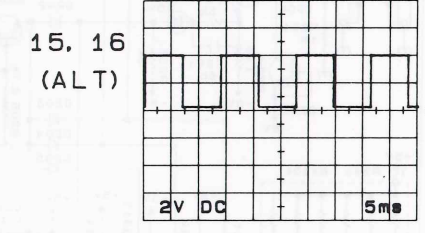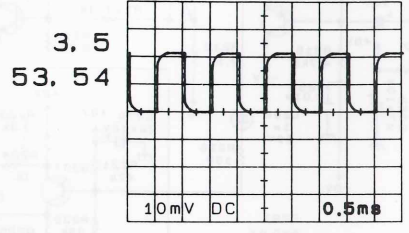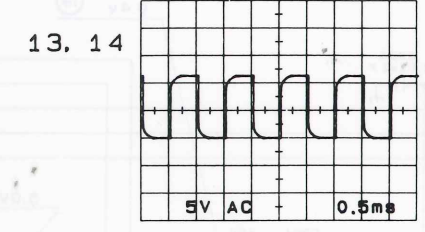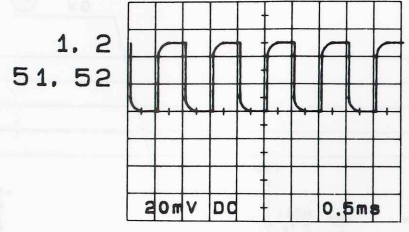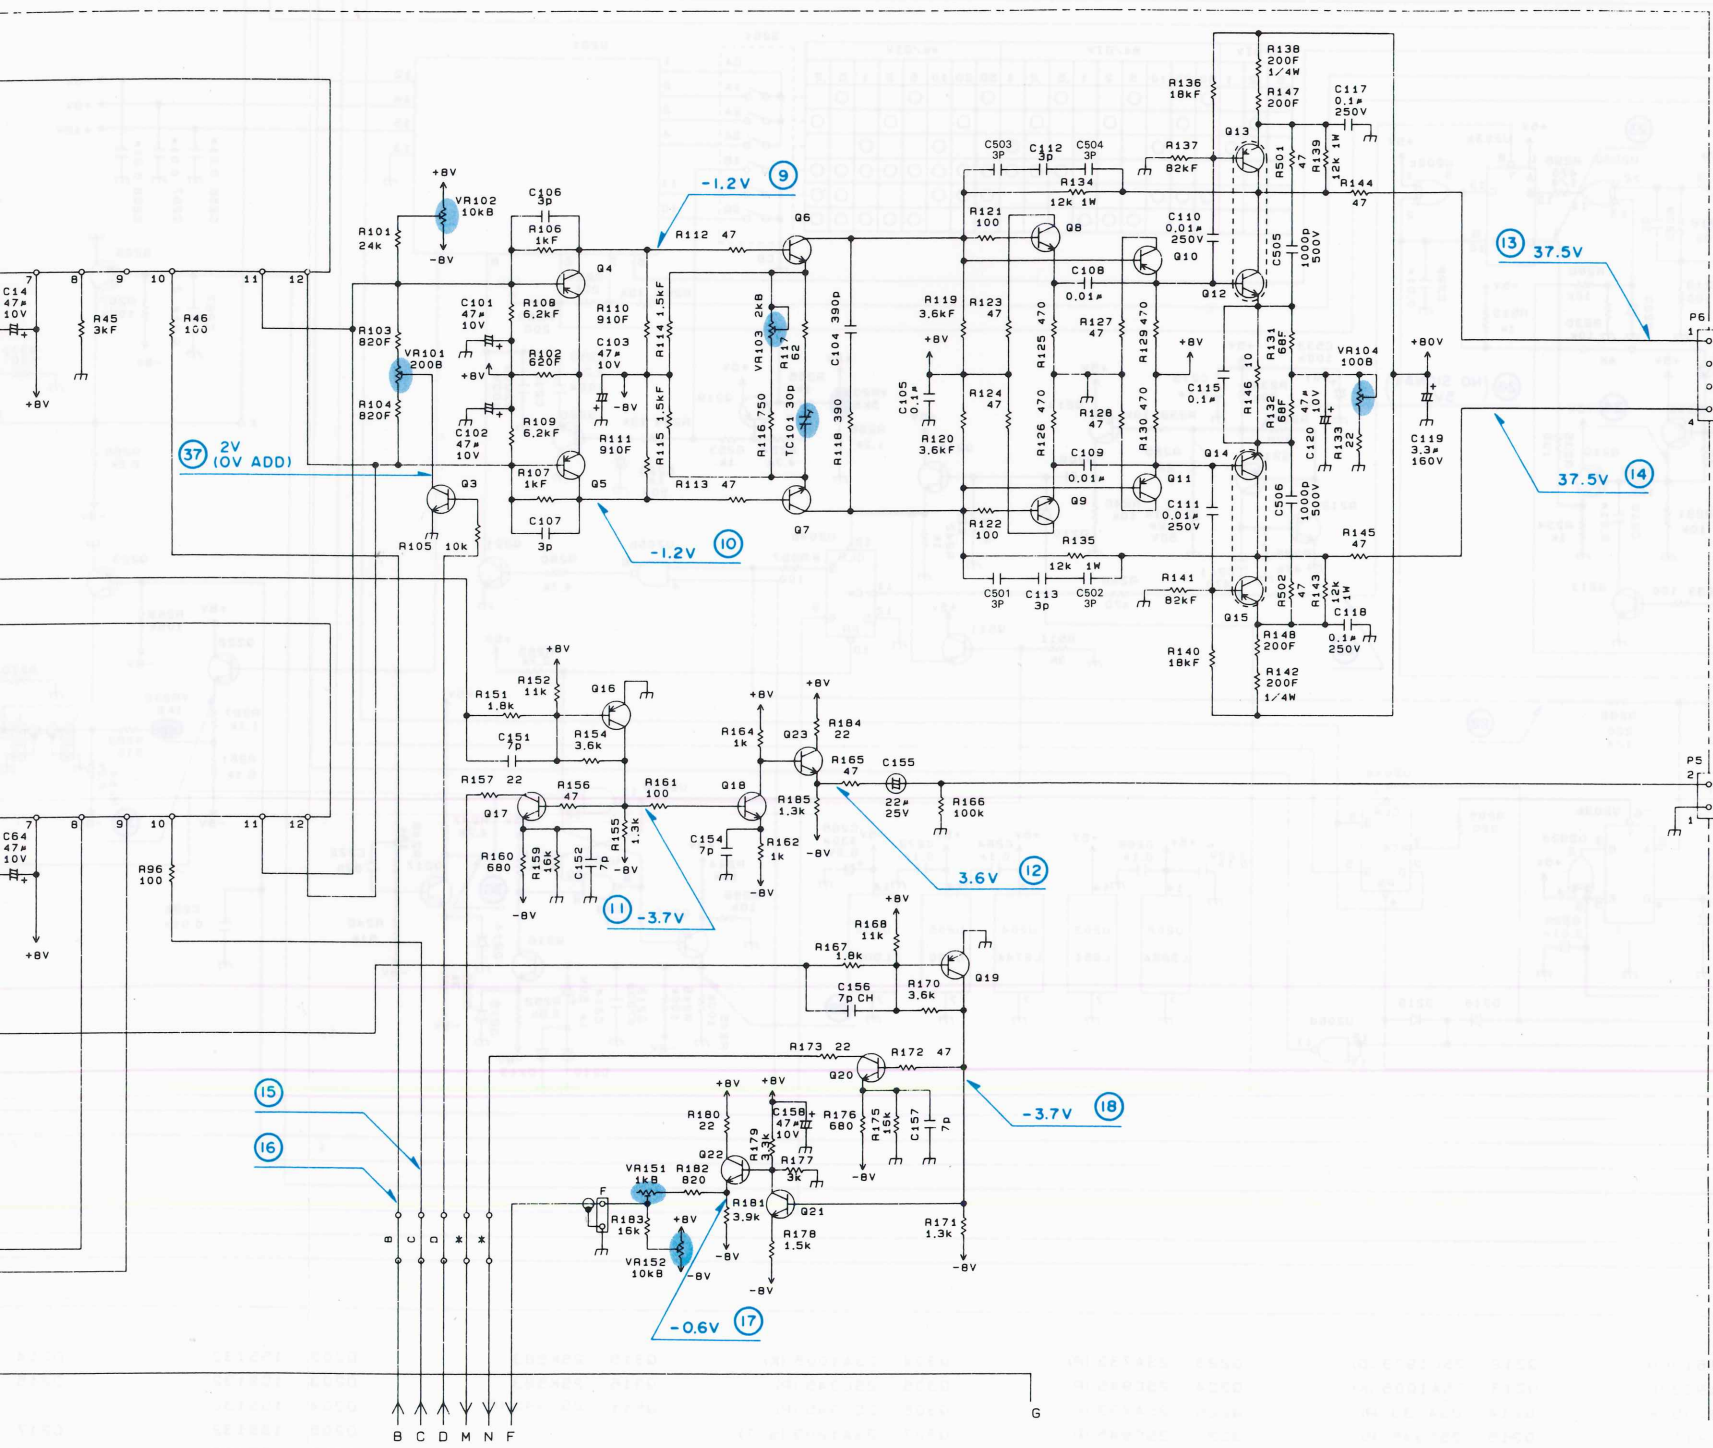



SCHEMATIC DIAGRAM/WAVEFORM VERTICAL & HORIZONTAL UNIT (X65-1410-01) (2/2)

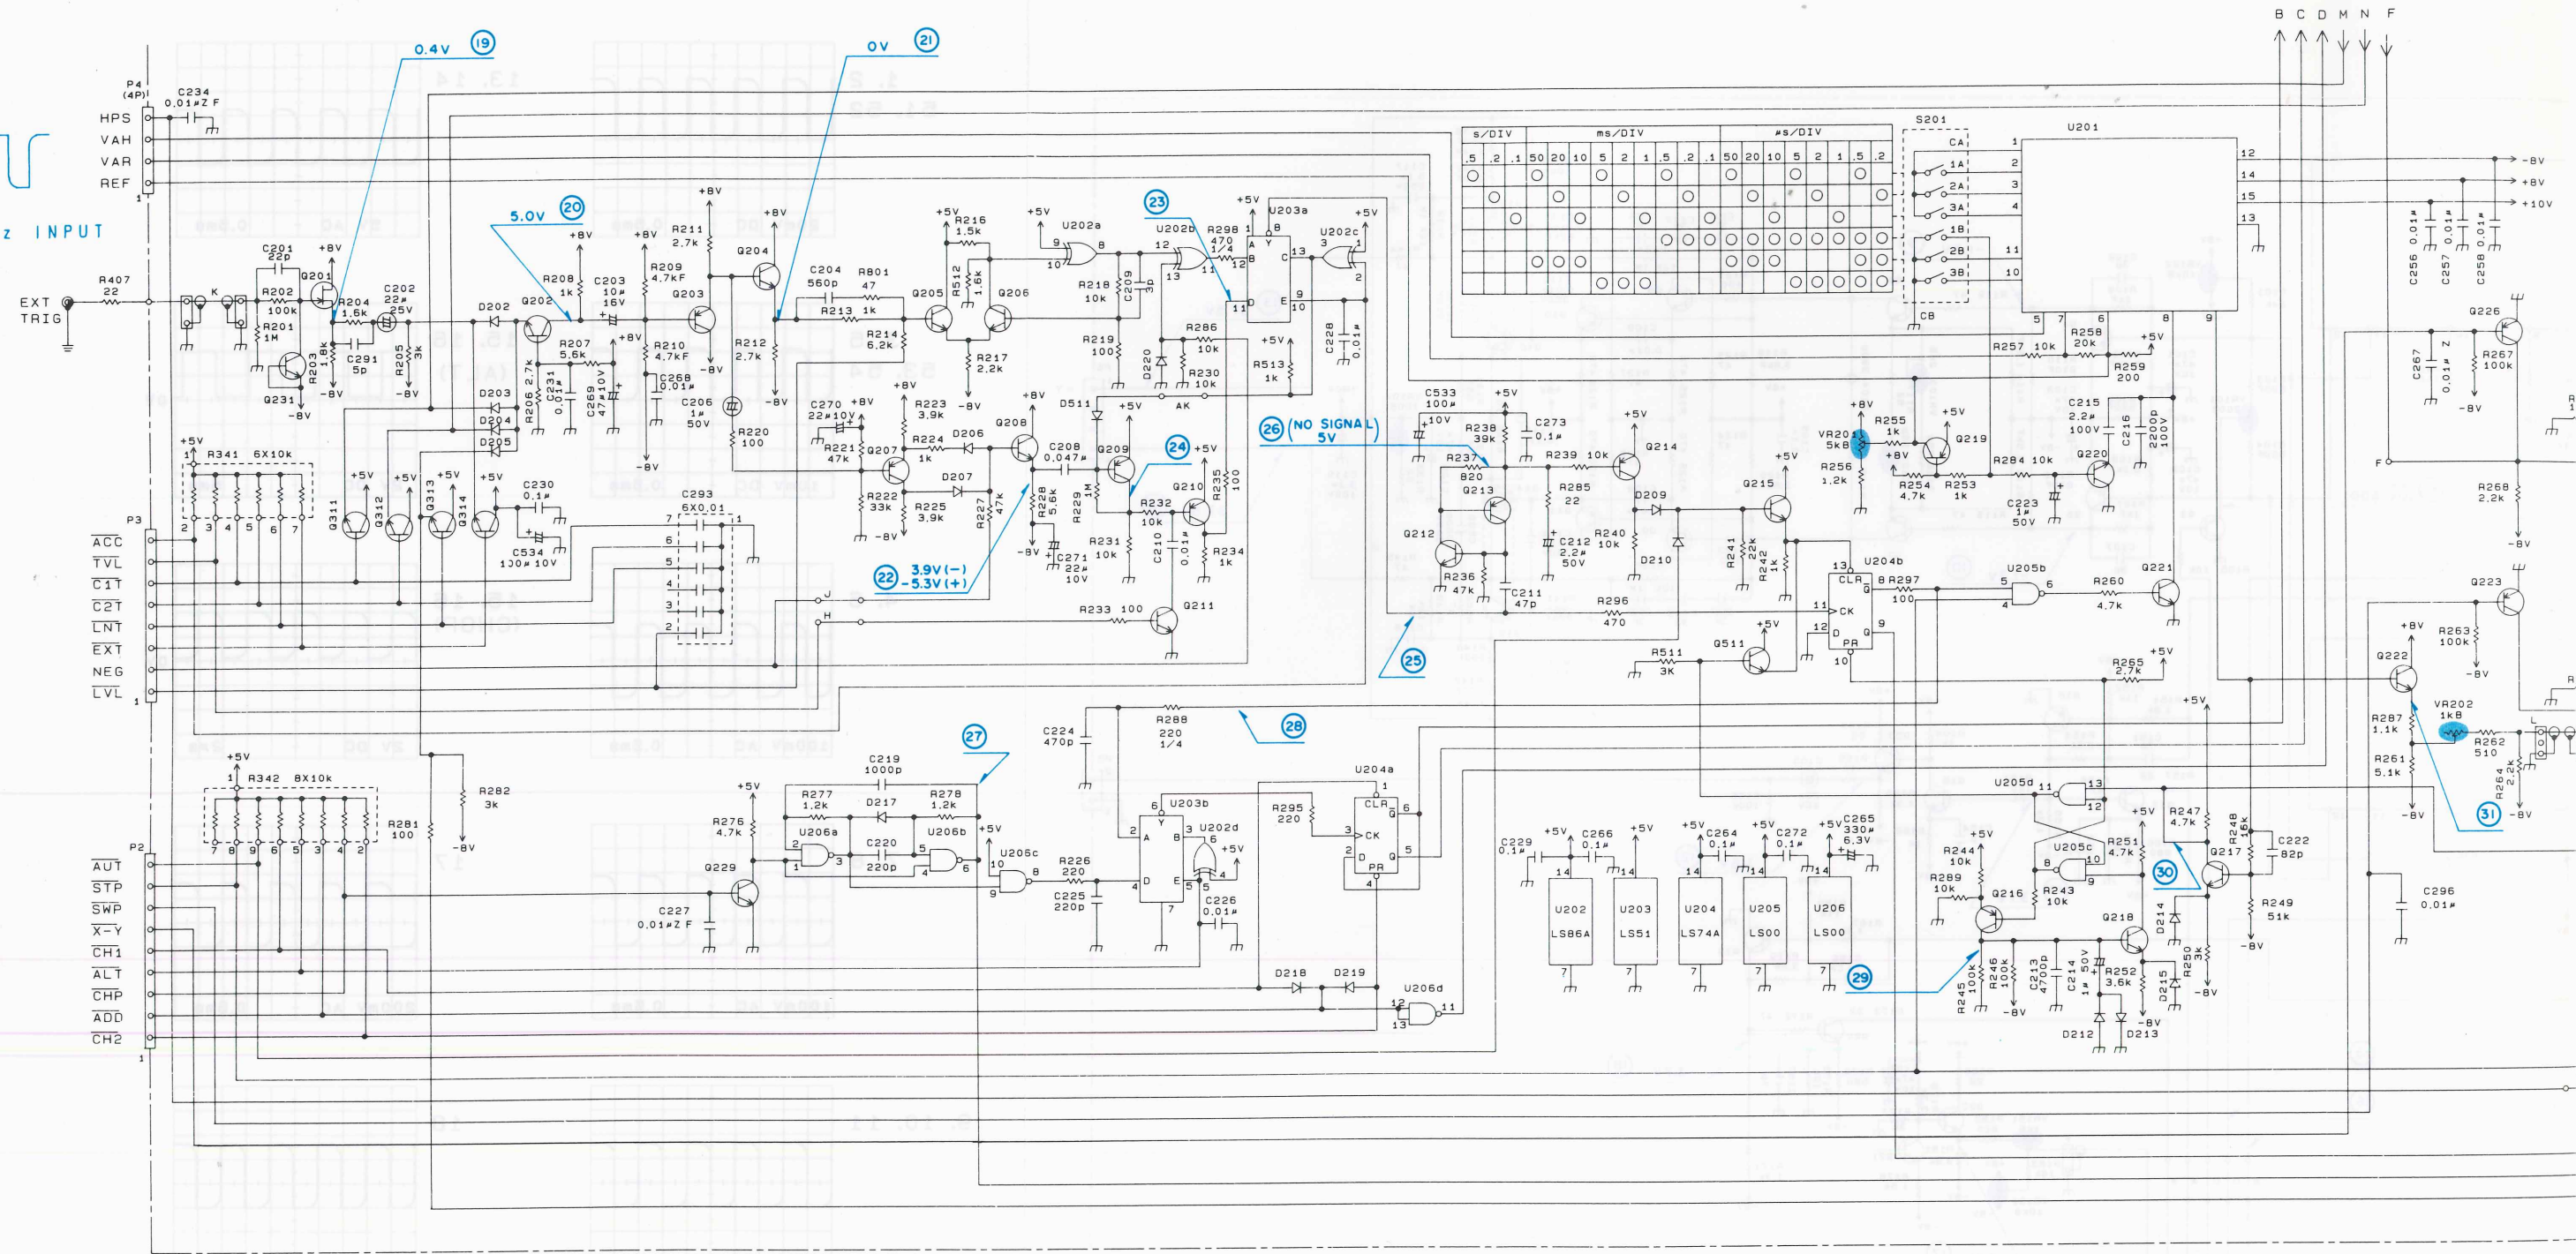

Q201	2SK161 (GR)	Q212	2SC1923 (O)	Q223	2SA733 (P)	Q304	2SA1005 (K)	Q315	2SK583	D202	1SS132	D214	1SS132
Q202	2SC1923 (O)	Q213	2SA1005 (K)	Q224	2SC945 (P)	Q305	2SC945 (P)	Q316	2SK583	D203	1SS132	D215	1SS132
Q203	2SA1005 (K)	Q214	2SA733 (P)	Q226	2SA733 (P)	Q306	2SC945 (P)	Q511	2SC945 (P)	D204	1SS132	D217	1SS132
Q204	2SC1907	Q215	2SC945 (P)	Q227	2SC945 (P)	Q307	2SA1209 (S. T)			D205	1SS132	D218	1SS132
Q205	2SC1923 (O)	Q216	2SA733 (P)			Q308	2SC2911 (S. T)			D206	1SS132	D219	1SS132
Q206	2SC1923 (O)	Q217	2SC945 (P)	Q229	2SC945 (P)	Q309	2SC2911 (S. T)			D207	1SS132	D220	1SS132
Q207	2SA733 (P)	Q218	2SC945 (P)	Q230	2SC945 (P)	Q310	2SA1209 (S. T)			D209	1SS132	D221	1SS132
Q208	2SC945 (P)	Q219	2SA733 (P)	Q231	2SC945 (P)	Q311	2SC945 (P)			D210	1SS132	D222	1SS132
Q209	2SA733 (P)	Q220	2SC945 (P)	Q301	2SC945 (P)	Q312	2SC945 (P)			D212	1SS132		
Q210	2SA733 (P)	Q221	2SC3732 (L)	Q302	2SC945 (P)	Q313	2SC945 (P)			D213	1SS132		
Q211	2SC945 (P)	Q222	2SC945 (P)	Q303	2SA1005 (K)	Q314	2SC945 (P)						


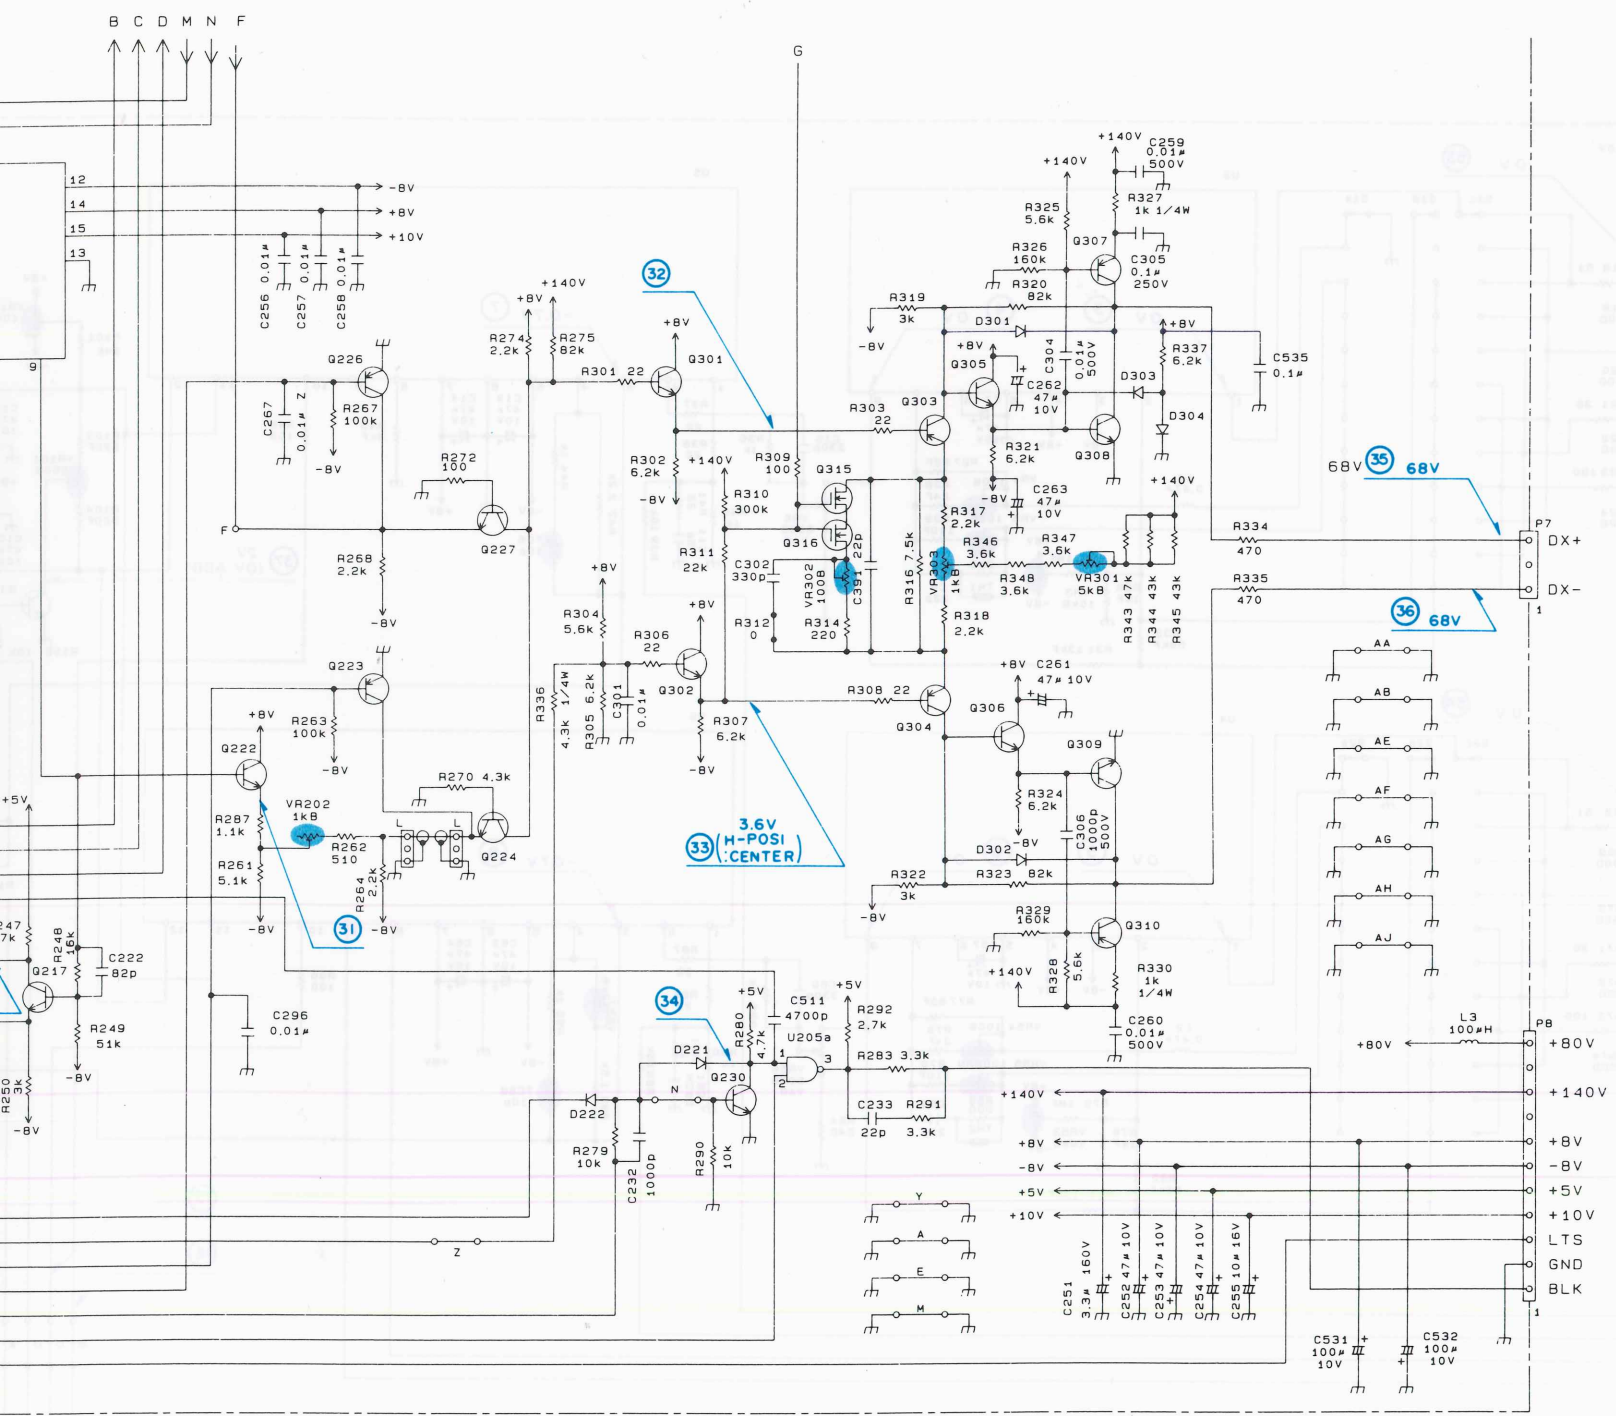


D202	1SS132	D214	1SS132	D301	1SS83	U201	KMD02
D203	1SS132	D215	1SS132	D302	1SS83	U202	SN74ALS86N
D204	1SS132			D303	MA700	U203	SN74LS51N
D205	1SS132	D217	1SS132	D304	1SS132	U204	SN74AS74N
D206	1SS132	D218	1SS132	D511	MA700	U205	SN74LS00N
D207	1SS132	D219	1SS132			U206	SN74LS00N
D209	1SS132	D220	1SS132				
D210	1SS132	D221	MA700				
D212	1SS132	D222	1SS132				
D213	1SS132						

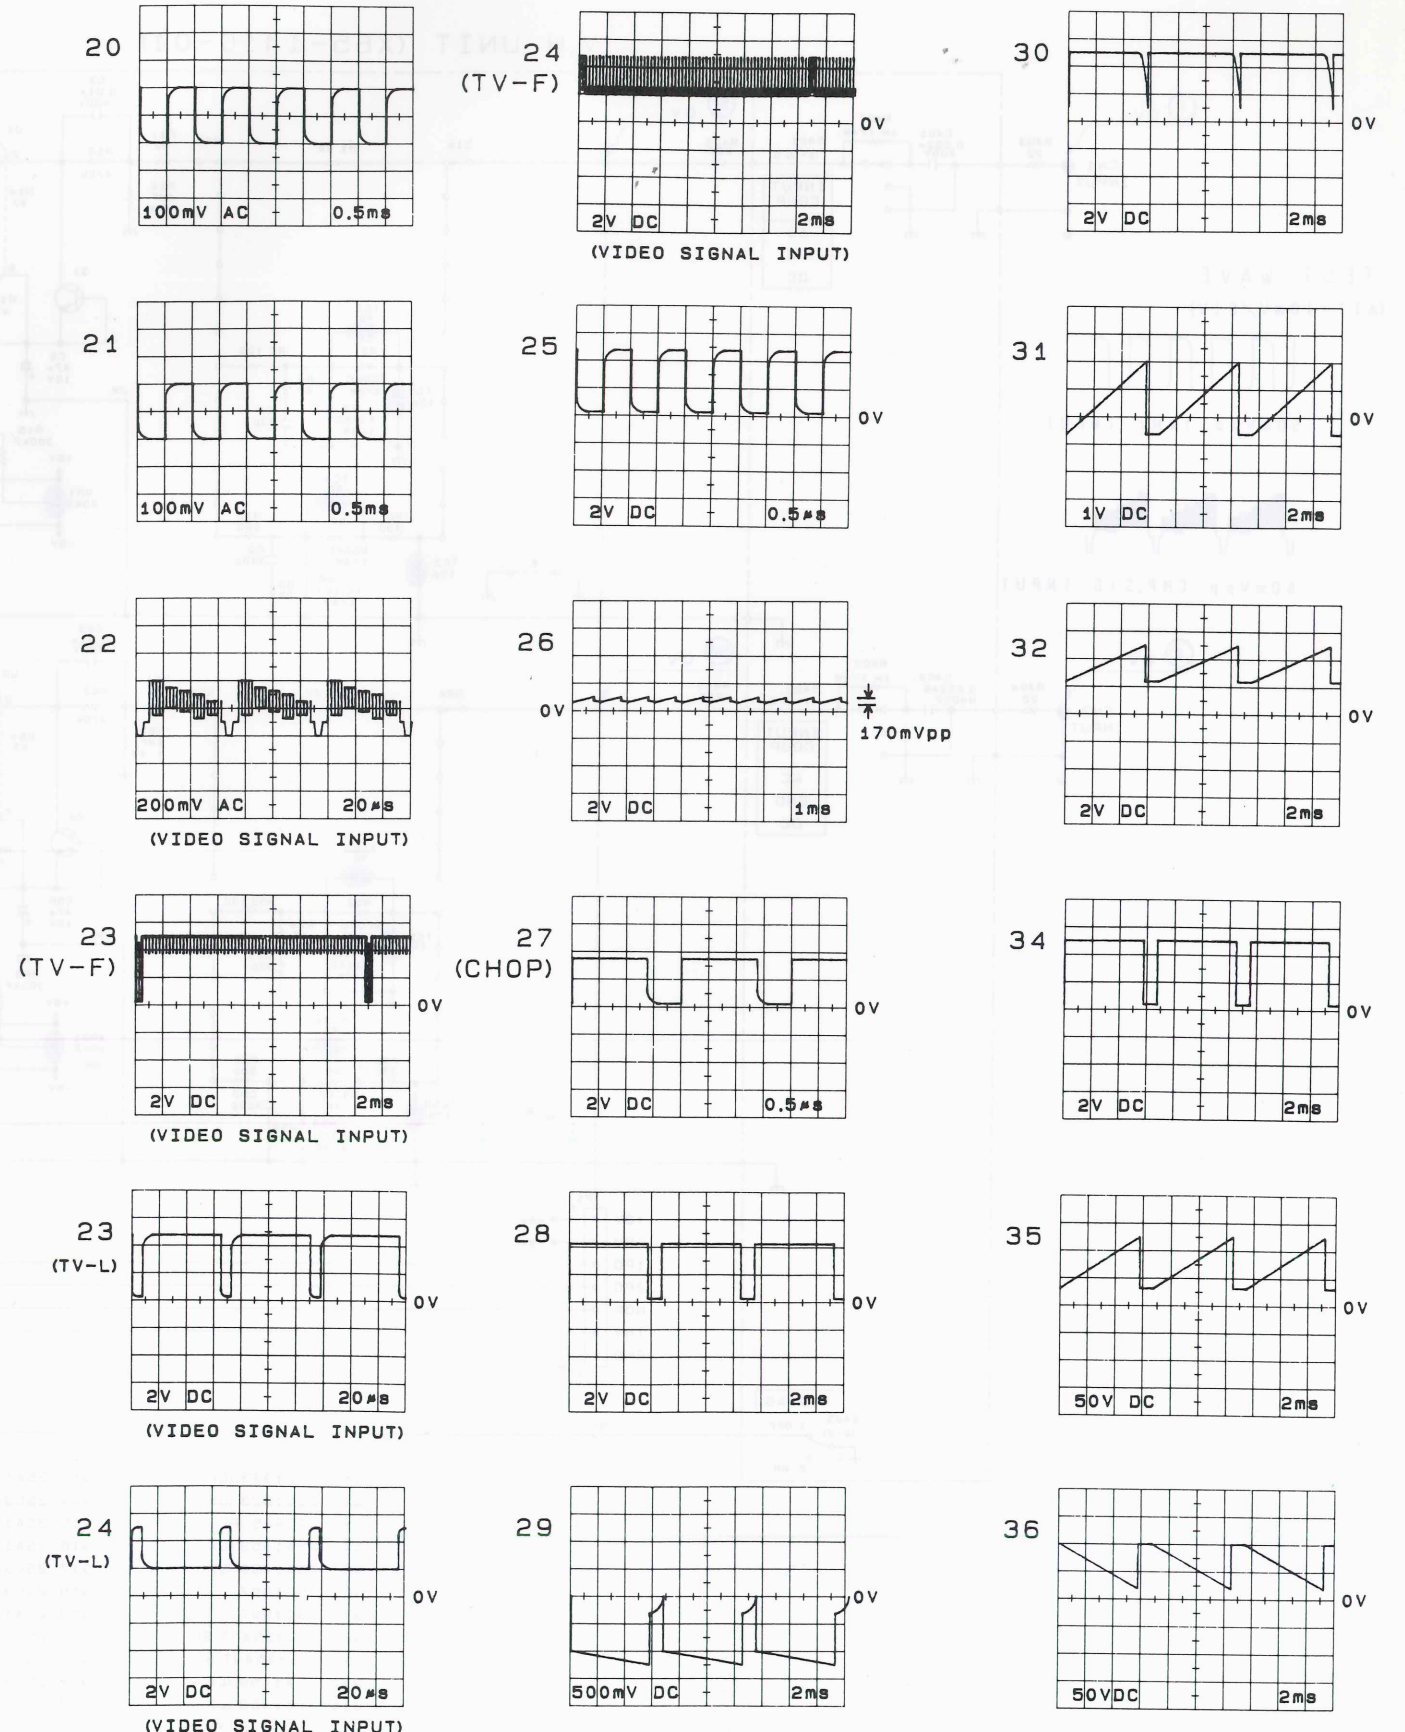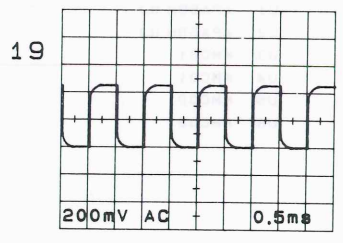

P.C. BOARD

Pattern side view

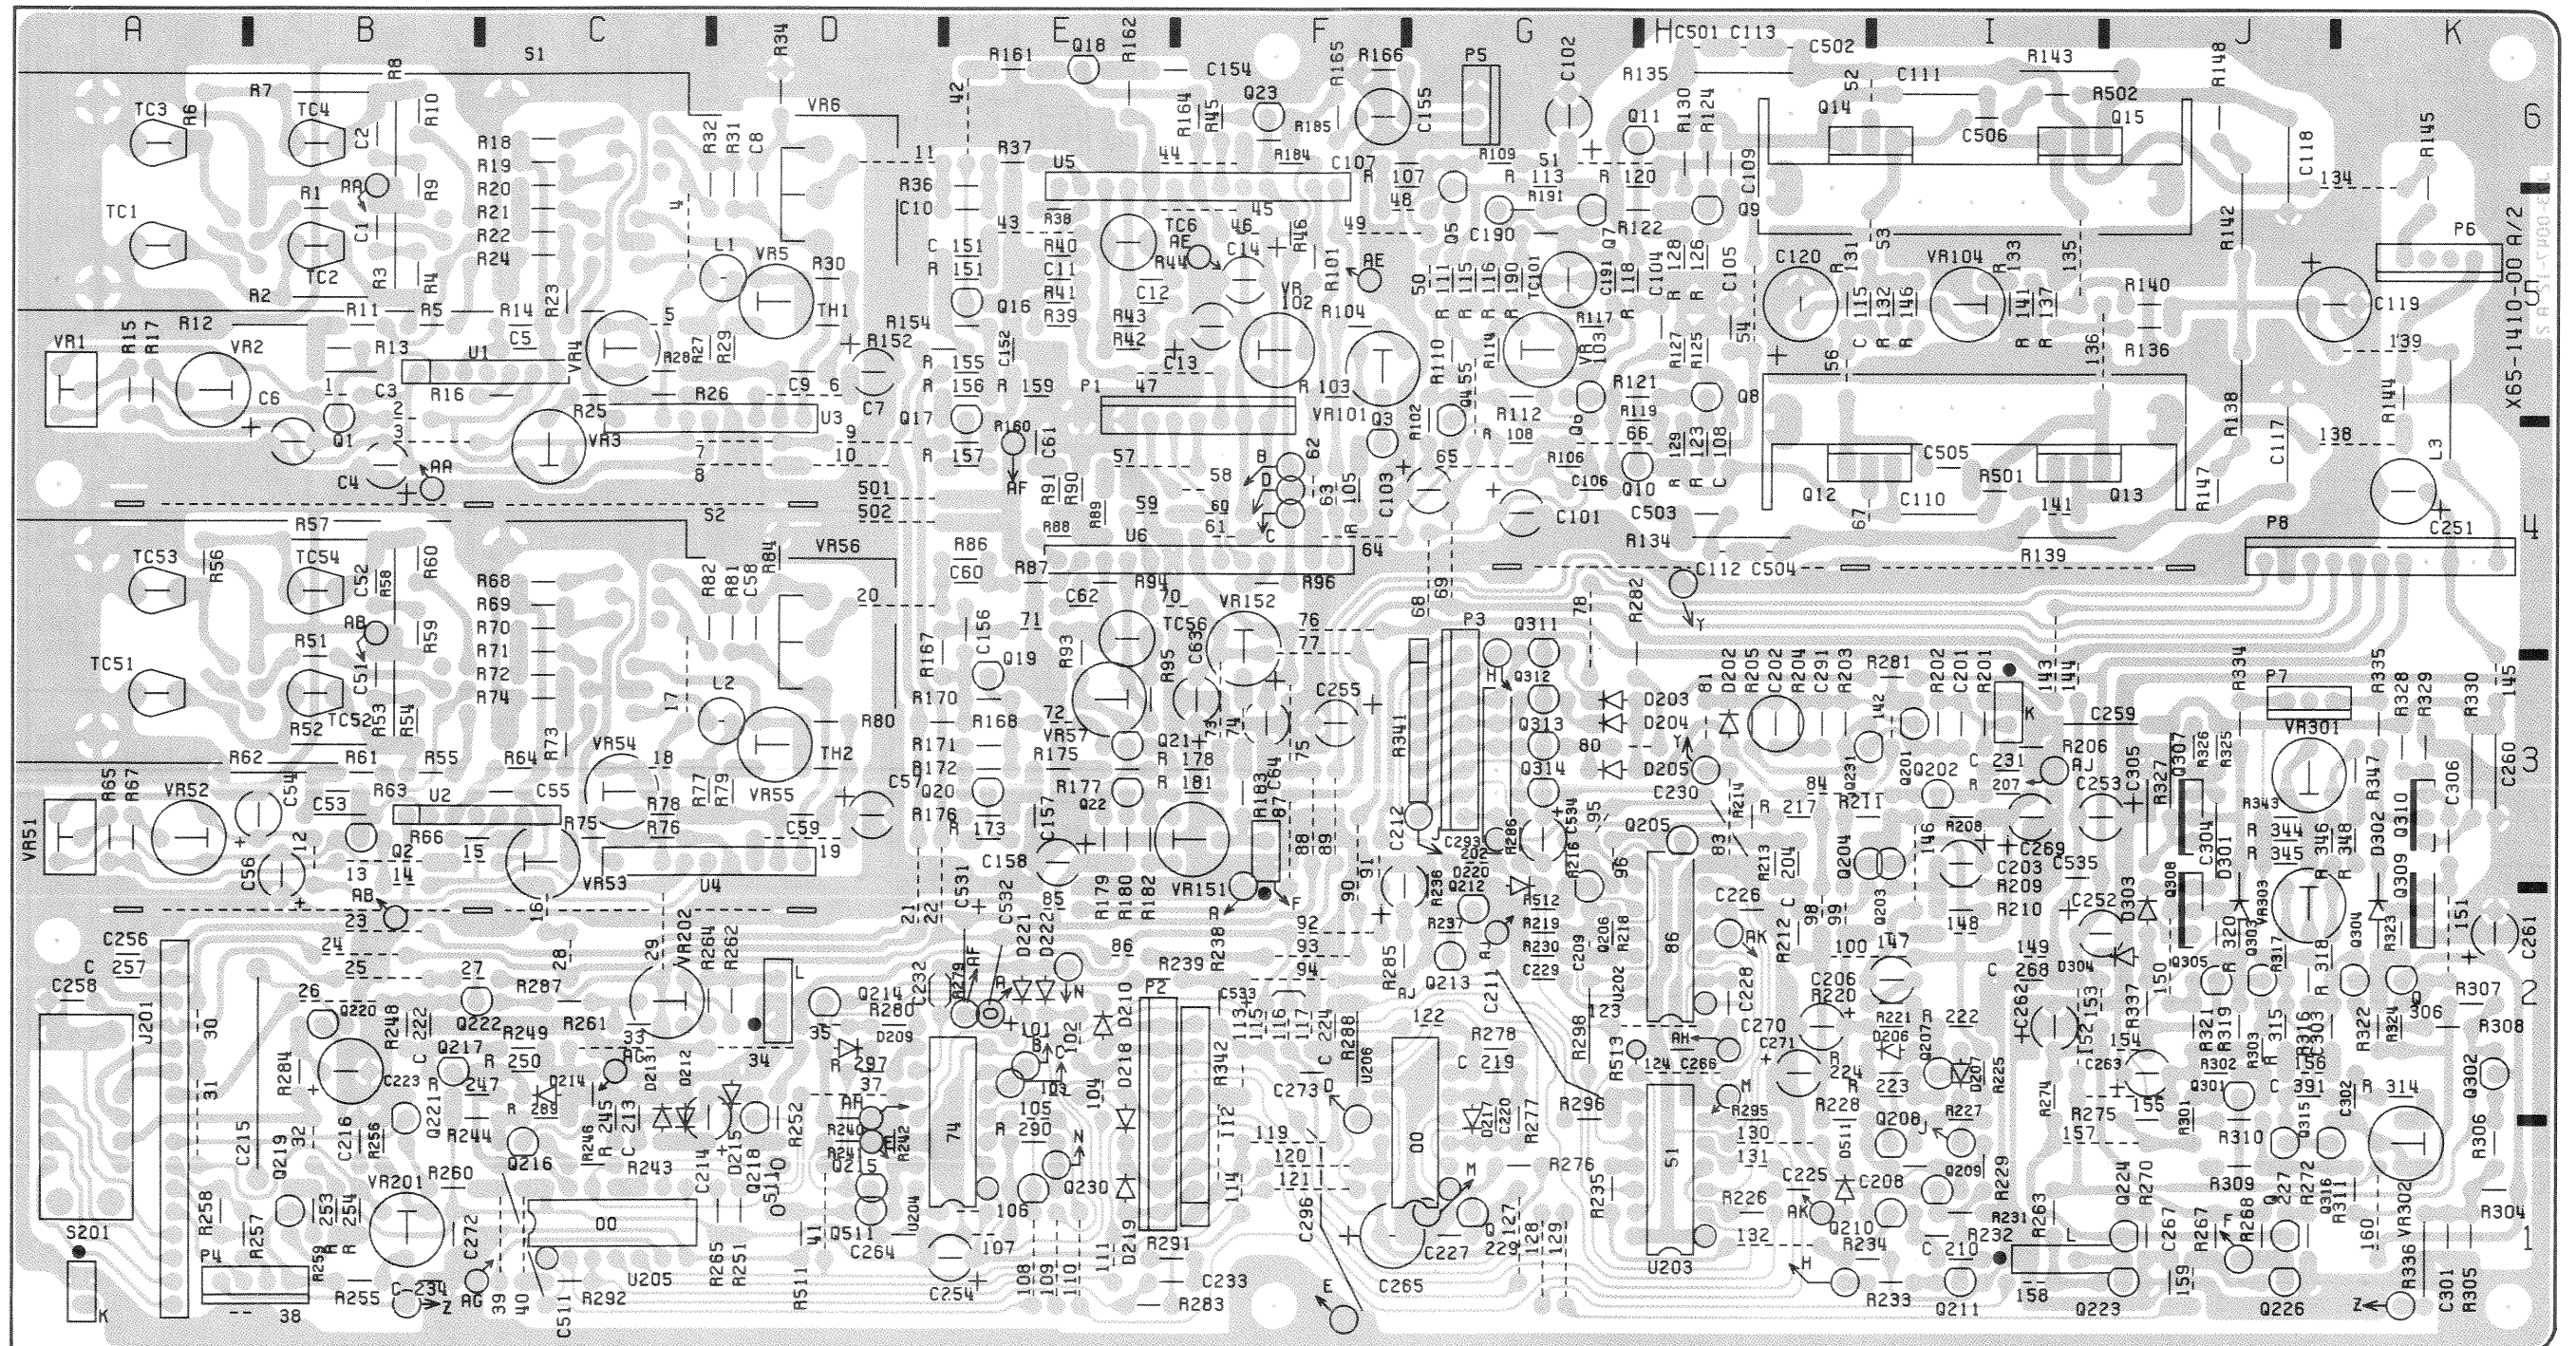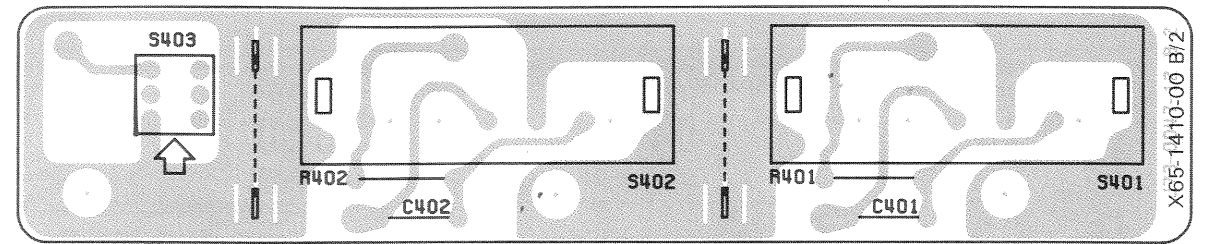


P.C. BOARD


VERTICAL

PANEL UNIT (X66-1150-00)

Pattern side view

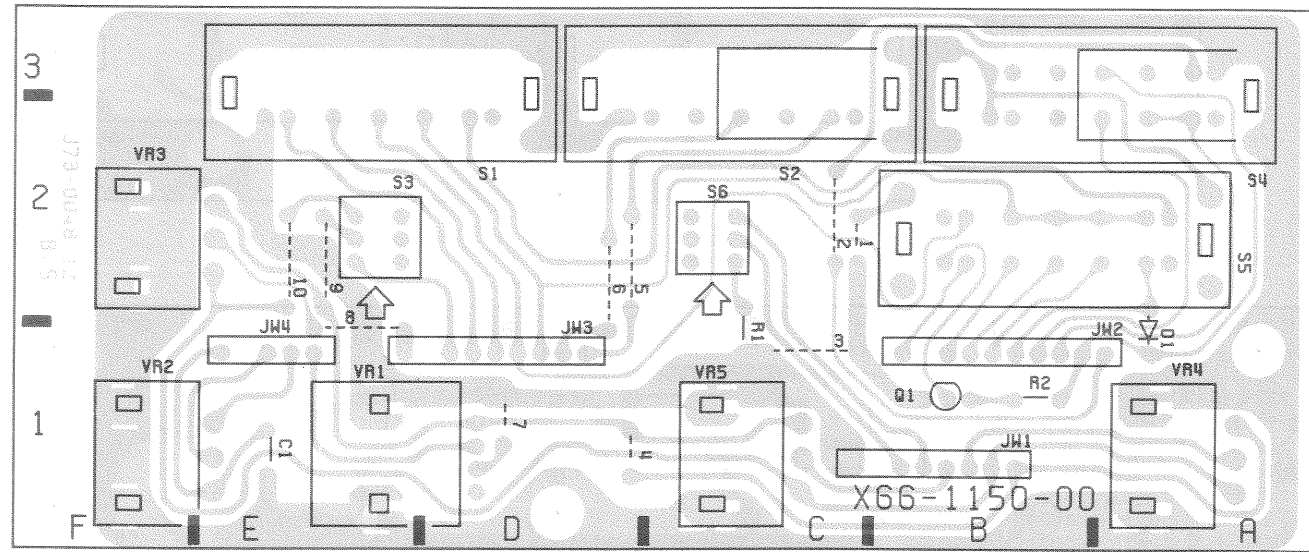


POWER SUPPLY UNIT (X68-1610-00)

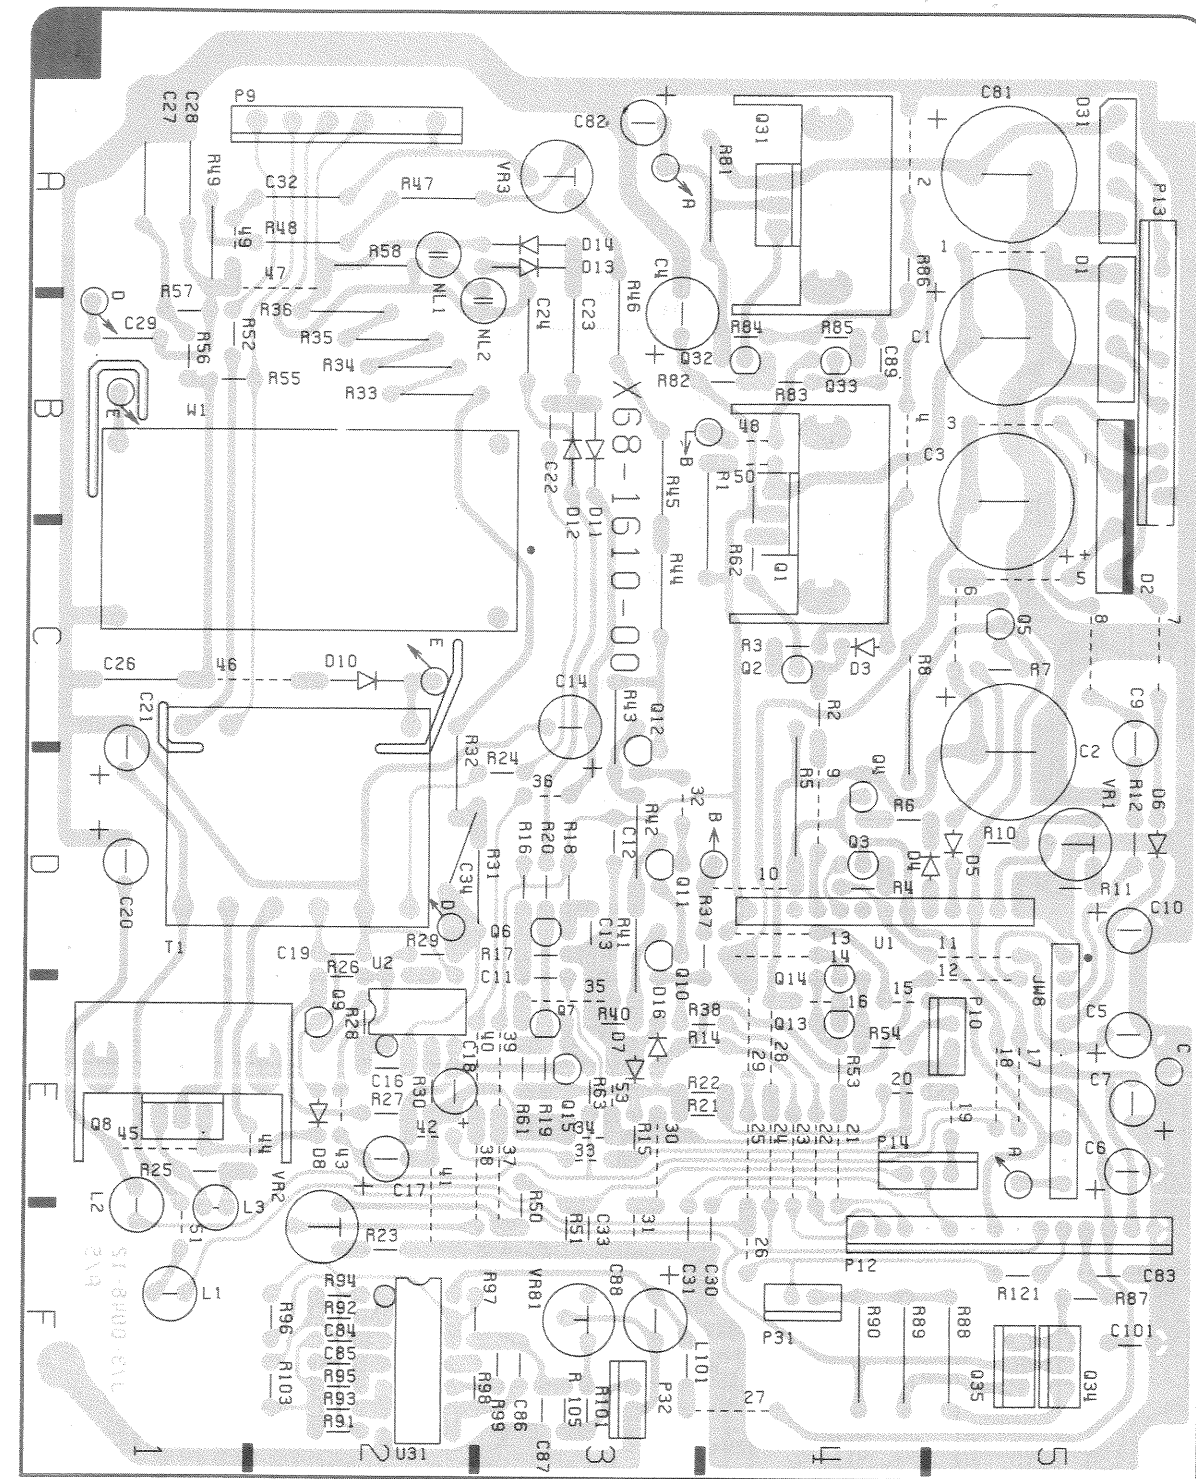


CRT SOCKET UNIT (X81-2960-01)


Pattern side view

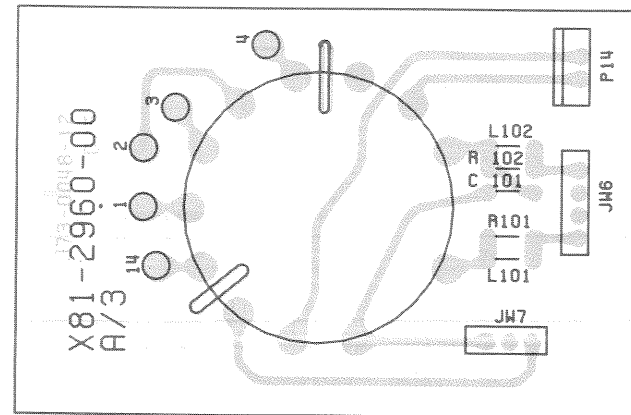

Pattern side view

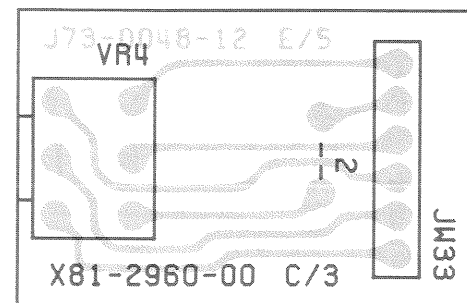

Pattern side view

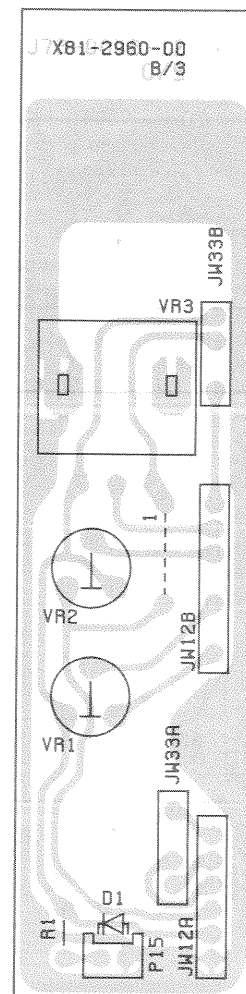

A product of
KENWOOD CORPORATION
17-5, 2-chome, Shibuya, Shibuya-ku, Tokyo 150, Japan

B51-1091-00 (T)