

KENWOOD

100MHz READOUT OSCILLOSCOPE

CS-5270



100MHz OSCILLOSCOPE

CS-5275

- D -

SERVICE MANUAL

KENWOOD CORPORATION

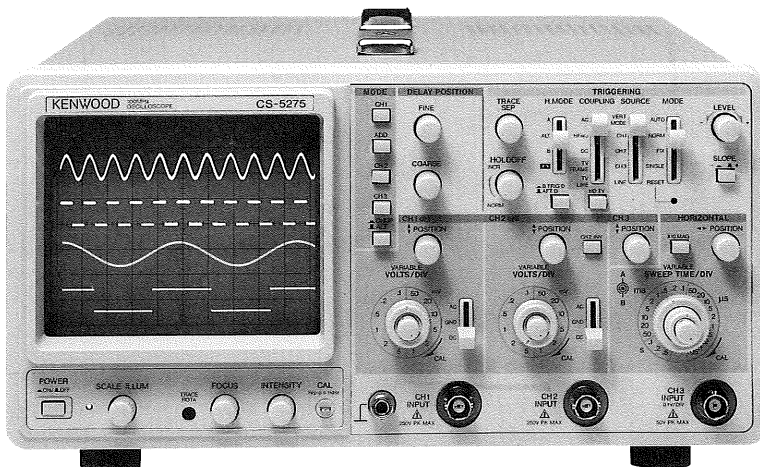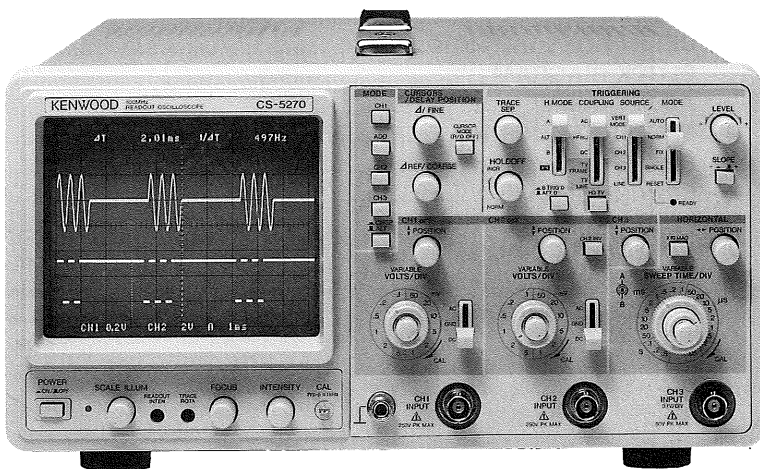

WARNING

The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.

CONTENTS

SPECIFICATIONS	3
SAFETY	8
CIRCUIT DESCRIPTION	9
BLOCK DIAGRAM	15
ADJUSTMENT	17
TROUBLESHOOTING	26
PARTS LIST	28
DISASSEMBLY	29
PARTS LIST (ELECTRICAL)	30
SCHEMATIC DIAGRAM	49
P.C. BOARD	60
SEMICONDUCTORS	65

SPECIFICATIONS

CRT		
Type	150 mm rectangular tube with an integral graticule	
Acceleration voltage	Approx. 12 kV	
Effective area	8 × 10 divisions (1 division = 10 mm)	
VERTICAL AXIS (COMMON TO CHANNELS 1 AND 2)		
Sensitivity (+10 to +35°C)	1 mV, 2 mV/div : ±5%, 5 mV to 5 V/div: ±3%	
Attenuation	1-2-5 steps, 12 ranges, fine control between ranges	
Input impedance	1 MΩ ± 2%, approx. 25 pF	
Frequency response (-3 dB) (+10 to +35°C)	5mV to 5V/div	DC: DC to 100MHz AC: 5Hz to 100MHz
	1mV to 2mV/div	DC: DC to 20MHz, AC: 5Hz to 20MHz
Rise time (+10 to +35°C)	5mV to 5V/div	Approx. 3.5 ns
	1mV to 2mV/div	Approx. 17.5 ns
Signal delay time	The leading edge may be checked using a square wave of the rise time less than that of this model.	
Crosstalk	-40 dB or less (at 1 kHz)	
△Maximum input voltage	500 Vp-p or 250 V (DC+AC peak, 1 kHz or less)	
VERTICAL AXIS (CH3)		
Sensitivity (+10 to +35°C)	0.1 V/div: ±3%	
Input impedance	1MΩ ± 2%, approx. 25 pF	
Frequency response (-3 dB) (+10 to +35°C)	DC to 100 MHz	
Rise time (+10 to +35°C)	Approx. 3.5 ns	
Signal delay time	The leading edge may be checked using a square wave of the rise time less than that of this model.	
△Maximum input voltage	100 Vp-p or 50 V (DC+AC peak, 1 kHz or less)	
Operation	Single trace: CH1, CH2, CH3 or ADD single trace operation Multi-trace : 2 to 4 traces of CH1, CH2, CH3 and ADD	
	ALT/CHOP: Display by selecting ALT and CHOP ADD : Composite waveform of CH1 and CH2 signals are displayed.	

SPECIFICATIONS

Chop frequency	Approx. 250 kHz (in multi-trace operation)	
Channel polarity	Normal or inverted, CH2 only inverted	
Horizontal axis (CH2, except for $\times 10$ MAG operation)		
Sensitivity (+10 to +35°C)	Same as vertical axis (CH2)	
Input impedance	Same as vertical axis (CH2)	
Frequency response (-3 dB) (+10 to +35°C)	DC: DC to 1 MHz, AC: 5 Hz to 1 MHz	
X-Y phase difference	3° or less at 100 kHz	
Operation mode	X-Y mode is selected with H. MODE CH1: Y-axis, CH2: X-axis	
Δ Maximum input voltage	Same as vertical axis (CH2)	
SWEEP		
Sweep types	A : A sweep ALT : Alternate A sweep and B sweep B : B sweep X-Y : X-Y oscilloscope operation	
Sweep time (+10 to +35°C)	A sweep	0.5s to 50ns/div $\pm 3\%$ 1-2-5 steps, 22 ranges, fine adjustment between ranges
	B sweep	50ms to 50ns/div $\pm 3\%$ 1-2-5 steps, 19 ranges, fine adjustment between ranges
Sweep magnified operation (+10 to +35°C)	$\times 10 \pm 5\%$ ($\pm 8\%$ for over 0.5 ns/div)	
Linearity (+10 to +35°C)	$\pm 3\%$ ($\pm 5\%$ in $\times 10$ MAG operation)	
HOLDOFF	Continuously variable from A sweep NORM position	
Trace separation	B sweep is continuously variable by ± 4 divisions or more with respect to A sweep.	
Delayed sweep operation	Continuous delay operation (AFTER DELAY) Synchronous delay operation (B TRG'D) : Synchronous with the trigger signal	
Delay time	Continuous control by 0.2 to 10 divisions for 0.5 div to maximum speed sweep	
Delay time error (+10 to +35°C)	[CS-5275]: $\pm(3\% \text{ of set value} + 1\% \text{ of full scale}) + (0 \text{ to } 300 \text{ ns})$ [CS-5275]: Reading on CRT $\pm 4\%$ (0 to 300 ns)	
Delay jitter	10000 : 1 of a value 10 times as high as A sweep setting	

SPECIFICATIONS

TRIGGERING	
Trigger modes	AUTO : Automatic free running with no signal NORM : Triggered sweep FIX : Sweep at triggering point set to center of signal amplitude SINGLE: Single sweep mode RESET : Restarting single sweep operation
Trigger signal sources	VERT: Input signal selected for V. mode CH1 : Channel 1 input signal CH2 : Channel 2 input signal CH3 : Channel 3 input signal LINE: Commercial power line
Trigger coupling (For trigger sensitivity, see the table below.)	AC : AC coupling from 10 Hz HFrej : Low-pass filter coupling up to 30 kHz DC : DC coupling TV FRAME: Composite video signal, vertical synchronization separation TV LINE : Composite video signal, horizontal synchronization separation

Trigger sensitivity (+10 to +35°C)

MODE	COUPLING	Signal frequency	Sensitivity (Amplitude)	
			NORM	FIX *
NORM	AC	10Hz to 50MHz	1div	1.5div
		50M to 100MHz	1.5div	2div
	HFrej	10Hz to 30kHz	1div	1.5div
		over 30kHz	>min.	>min.
	DC	DC to 50MHz	1div	1.5div
		50M to 100MHz	1.5div	2div
	TV-F, -L	Composite video signal	1.5div	
	HDTV	HDTV video signal	1.5div	

AUTO : Same as above specifications for above 40Hz.

(The table shows the sensitivities in terms of the amplitude displayed on the CRT.)
 (>min. for the HFrej sensitivity shows that the amplitude necessary for synchronization increases.)

FIX * : Same as above specifications for above 50Hz.

SPECIFICATIONS

CALIBRATION SIGNAL : POSITIVE SQUARE WAVE, 1 V _{p-p} ±3%, APPROX. 1 kHz		
INTENSITY MODULATION		
Input voltage	Darkens at TTL level (+5 V).	
Input impedance	Approx. 10 kΩ	
Frequency response (+10 to +35°C)	DC to 5 MHz	
△Maximum input voltage	100 V _{p-p} or 50V (DC+AC peak)	
CH1 OUTPUT SIGNAL (WITH 50 Ω LOAD)		
Output voltage	Approx. 50 mV _{p-p} /div	
Output impedance	Approx. 50 Ω	
Frequency response (-3dB)	1, 2 mV	100 Hz to 20 MHz
	5 mV to	100 Hz to 100 MHz
TRACE ROTATION : TRACE ANGLE IS ADJUSTABLE WITH A SEMI-FIXED CONTROL ON PANEL.		
POWER SUPPLY		
Voltage	100/120/220/230 VAC ± 10 %	
Frequency	50 Hz or 60 Hz	
Power consumption	Approx. 48 W, 43 W Approx. 56VA, 51VA	
DIMENSIONS AND WEIGHT (VALUES ENCLOSED IN PARENTHESES INCLUDE PROJECTIONS.)		
Width	300 mm (300 mm)	
Height	150 mm (172 mm)	
Depth	400 mm (469 mm)	
Weight	Approx. 8.7 kg	
OPERATING TEMPERATURE AND HUMIDITY		
Operating temperature and humidity	0 to 40°C, 85% RH or less	
Storage temperature and humidity	-20 to 70°C, 85% RH or less	
ACCESSORIES		
Probe	PC-31: 10 MΩ ±1%, 12.5 pF±10%, 10:1 [CS-5270] PC-39: 10 MΩ ±1%, 12.5 pF±10%, 10:1 [CS-5275]	
	2 each	
Instruction manual	1 copy	
Adjusting screwdriver	1	
Power cord	1	
Replacement fuse	1 A×2 (for 100 V area) 630 mA×2 (for 200 V area)	

SPECIFICATIONS

[The specifications shown below do not apply to the CS-5275.]

READOUT	
Set values	CH1 and CH2 scale factors (with probe detection), CH3 scale factor (0.1 V/div fixed, with no probe detection), V-UNCAL, ADD, INV, A/B sweep scale factors (MAG-converted), sweep - UNCAL, DELAY TIME, TRIG'D, X-Y
Cursor modes (Between Δ REF and Δ cursors) In X-Y mode, only Δ V1 may be set.	Δ V1 :Displayed in voltage with conversion according to CH1 scale factor Δ V2 :Displayed in voltage with conversion according to CH2 scale factor Δ V3 :Displayed in voltage with conversion according to CH3 0.1 V/div Δ T :Displayed in time with conversion according to A sweep scale factor $1/\Delta$ T:Displayed in frequency with conversion according to A sweep scale factor
In V, H-VARI or UNCAL mode	RATIO:Voltage ratio and time ratio are displayed, with 5 divisions on the CRT as 100%. PHASE:Phase difference is displayed, with 5 divisions on the CRT as 360°
Cursor measurement	Resolution : 10 bits Measuring error: $\pm 4\%$ Measuring range: ± 3.6 divisions or more vertically from CRT center. ± 4.6 divisions or more horizontally from CRT center.

■The specifications shown above are subject to change without notice.

SAFETY

SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

Line voltage

This instrument operates using ac-power input voltages that 100/120/220/230 V at frequencies from 50 Hz to 60 Hz. z.

Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.

Voltage conversion

This oscilloscope may be operated from either a 100 V to 230 V, 50/60 Hz power source. Use the following procedure to change from 100 to 230 volt operation or vice versa.

1. Remove the fuse holder.
2. Replace fuse F 1 with a fuse of appropriate value, 1 amp for 100 VAC to 120 VAC operation, 630 mA for 220 VAC to 230 VAC operation.
3. Reinsert it for appropriate voltage range.
4. When performing the reinsertion of fuse holder for the voltage conversion, the appropriate power cord should be used. (See Fig. 1.)







Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	1 A, 250 V Fast blow 6×30 mm	None	E30-1951-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	North Europe 630 mA, 250 V Slow blow 5×20 mm Other Europe 630 mA, 250 V Slow blow 6×30 mm	None	E30-1952-05
	U.K. 240 volt/50 Hz Rated 13 amp	630 mA, 250 V Slow blow 6×30 mm	None	E30-1947-05
	Australian 240 volt/50 Hz Rated 10 amp	630 mA, 250 V Slow blow 6×30 mm	None	E30-1821-15
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	630 mA, 250 V Slow blow 6×30 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	630 mA, 250 V Slow blow 6×30 mm	None	—

Fig. 1 Power Input Voltage Configuration

CIRCUIT DESCRIPTION

VERTICAL PREAMPLIFIER UNIT

CH1, CH2

Each of the CH1 and CH2 inputs passes through an AC/DC/GND switch and enters the 1st attenuator (1/1, 1/10, 1/100).

The 1st attenuator is used in combination with the 2nd attenuator (1/1, 1/2, 1/4, 1/10) and the 5-fold function of the 2nd amplifier, to switch the 12 vertical ranges.

The head amp is composed of Q102 and U101 (Q202 and U201) and is a 1/1 buffer amp with an input impedance of 1 megohms and used for conversion of impedance. Q102 (Q202) is the source-follower. This head amp is installed between the 1st and 2nd attenuators.

Starting from the 2nd amp, this unit takes the differential amplifier configuration. The functions of U102 (U202) include the variation and inversion functions. The variation function allows to vary the gain continuously according to the voltage applied to pin 5. The inversion function allows to invert the phase according to the voltages applied to pins 6 and 7. As this function is provided only for CH2, CH1 is fixed. At the CH2 side, switch is done by Q215. Q103 (Q203) is the regulated current supply for U102 (U202).

Q106 and Q107 (Q206 and Q207) form an emitter-grounded amp.

Q108 to Q111 (Q208 to Q211) form the cascode amp of the differential amp. The vertical position can be moved by regulating the current applied to the emitter of Q111 (Q211) based on the panel operation.

CH3

With CH3, the attenuator is fixed. The signal impedance is converted by the buffer amp of source follower Q303 and regulated current supply Q304 and the signal is sent to emitter-follower Q305. Q305 is the signal side input stage of the differential amp.

Emitter-follower Q306 is the input stage of a constant-potential differential amp.

The outputs from Q305 and Q306 are input to the differential type cascode amp formed by Q307, Q308, Q310 and Q311. The current of the cascode amp is determined by regulated current supply Q309. The vertical position can be moved by regulating the current applied to the emitter of Q311 based on the panel operation.

Channel selector, delay line drive

As for the outputs from the position amps of the channels, only the signal of the channel with which the cathodes of CH1 - D104, D105, CH2 - D204, D205, CH3 - D301, D302, D304, D305 are turned "H" by the signals from V-MODE LOGIC is sent through CH1 - D103, D106, CH2 - D203, D206, CH3 - D303, D306 and transmitted to the delay line driver.

Q2 and Q3 form a feedback amp. Q1 lets the excessive bias current flow when CH1 or CH2 is in ADD mode.

Trigger amp, trigger selector

With CH1 (CH2), the differential outputs from U102 (U202) are

input to the emitter-followers Q112 and Q113 (Q212 and Q213), where Q113 (Q213) forms a cascode amp with Q114 (Q214). With CH3, the signal after the buffer amp is sent through the buffer of emitter-follower Q314, feedback amp Q312 an output as current from the collector of emitter-follower Q313.

Only the signal of the channel with which the cathode of CH1 - D108, CH2 - D208, CH3 - D308 is turned "H" by the signal from the trigger controller is sent through CH1 - D107, CH2 - D207, CH3 - D307 and output as current to the Horizontal unit. Q31 the excessive bias current flow when CH1 or CH2 is in ADD mode.

CH1 OUT

The CH1 output is sent from the collector of Q112, through emitter-follower Q51 and output at CH1 OUT of the Final unit.

Trigger controller

The data on the trigger source set on the panel is input to pin 1 of U1 and "H" or "L" is output at pins 4 to 8 according to the set state.

U2 is used to switch between the data from U1 and the CRT display data of each channel from V-MODE LOGIC. If the current mode is not V mode, the former data is selected. If the current mode is V mode, the latter data is selected for use in controlling the trigger selector.

Among CH1 - U2 pin 7, CH2 - U2 pin 9, CH3 - U2 pin 12, the terminal set with the panel is turned "H".

V-MODE LOGIC

U3 and U4 generates a signal synchronized with the display channel select signal from the panel and the end of horizontal sweep, and a signal for controlling the channel selector based on the CHOP signal. (Figure 1)

Q34 cuts off the power supply to U4 only at the instant the channel switch is pressed, in order to prevent malfunction.

Vertical range converter

U401, U403, S102 and S202 output the vertical range, CAL and UNCAL data by turning them into analog values using an opamp for use as the R/O data. (Figures 3, 4)

Horizontal range converter

U402 and S401 output the horizontal range data using an opamp, as analog values for R/O data. (Figure 5)

U404 (for main sweep), U405 (for sub-sweep) and S401 are used to switch the reference voltage for letting the sweep current of the 1-2-5 steps of horizontal sweep flow. (Figure 2)

FINAL UNIT

Final amplifier

The signal sent from the vertical preamp through the delay line is input to the feedback amp of Q1 and Q2. During A ALT B sweep, the variation of the vertical position of sweep B is controlled by the current applied to the base of Q2 based on the panel operation.

Q3 to Q6 and U1 are used to amplify the vertical signal and U1,

CIRCUIT DESCRIPTION

Q5 and Q6 are used to amplify the R/O characters.
U1 is used to switch between the vertical signal and R/O signal.
Q9 to Q14 are cascode-connected for use in driving the CRT:

AC inlet, fuse

An external commercial supply voltage switch and fuse holder are provided.

Line filter

A filter for elimination of common mode noise and normal mode noise is provided.

CH1 OUT

The signal from the vertical preamp is output externally via Q201 and Q202 as a signal with 50-ohm impedance.

HORIZONTAL UNIT

Trigger

The trigger signal supplied from the Vertical unit (X73-2070) is AC/DC coupled and the trigger level is added to it.

The obtained signal is input to the trigger shaping circuit to become a pulse signal.

If FIX is selected, the trigger level is fixed so that it is always around the center of the waveform.

With TV-V, the composite video signal is separated by the V sync separator and input to the trigger shaping circuit.

With TV-H, the composite video signal is separated by the H sync separator and input to the trigger shaping circuit.

HFrej is used to apply a 50 kHz LPF to the trigger signal.

The polarity of the trigger pulse signal can be changed with SLOPE +/- . The output signal is input to the sweep logic circuit.

There is an additional circuit which applies the trigger signal to the sweep logic in case the trigger pulse signal has not been input for a certain period and auto free-run mode has been selected.

Sweep

When the trigger pulse is input to the sweep logic, the sweep gate is activated and the sweep wave is output.

When the sweep wave reaches a certain level, the sweep stop circuit is activated to close the sweep gate and end sweep.

When sweep stop is activated, the hold-off circuit is activated and, in a certain period after it, the sweep logic enters the trigger standby state.

The delayed sweep is performed either as the AFTER DELAY sweep or B TRIG'D sweep.

With the AFTER DELAY sweep, the voltage level of the main sweep wave and the voltage set with DTP are compared and delayed sweep is performed using the result signal as the trigger.

With the B TRIG'D sweep, sweep is triggered by the next trigger signal input after the voltage level of sweep wave have reached the voltage set with DTP.

In case ALT sweep is set, the main sweep and delayed sweep are performed alternately.

Horizontal amp

This circuitry switches between the sweep wave generated in the sweep block and the X signal and add H-POSITION.

After being magnified by 10 times if MAG has been selected, the signal is input to the R/O switch.

Here, the R/O signal is added to the vertical signal and the signal is amplified by the final amp to a high enough voltage level to drive the CRT.

Intensity circuit

The Z signal is generated with the sweep gate of the main sweep and that of the delayed sweep. During ALT sweep, a waveform for increasing the intensity of the delayed sweep section is generated with the main sweep. The voltage set with the INTEN potentiometer is added to the X signal and the voltage set with the R/O INTEN potentiometer is added to the R/O blanking signal and they are input to the high voltage circuit.

The high voltage circuits generates the CRT cathode voltage, G1 voltage and P1 voltage based on the intensity signal and the

FOCUS potentiometer.

The cathode voltage is controlled always constant by the opamp.

For use with the after-accelerating CRT, the anode voltage is also generated by the high voltage circuit.

Power supply

AC voltages of +14.8 V, -14.8 V, +6 V, -6 V, +67 V and +170 V are input from the transformer, and they are turned into stable DC voltages of respectively +12 V, -12 V, +5 V, +55 V and +140 V, which are supplied to their respective units.

CHOP

To observe signals of multiple channels simultaneously, the vertical amp is switched with the CHOP signal.

PANEL UNIT

This unit sends the potentiometer and switch data from the control panel to other units.

A limiting circuit is provided to prevent the CHIP operation while multi-channel operation is not selected even when the CHOP key is pressed.

The voltage setting of DTP is made by the opamp in the range from 0 to +4 V. The CAL signal is a 1 kHz, 1 Vp-p square wave. The intensity is controlled by the PWM based on the output from the original oscillator of CAL.

R/O UNIT

The R/O unit (X77-1870-00) accepts the attenuator and sweep data sent from or through the Panel unit and outputs character data to be displayed on the CRT.

It is composed of the controller block (U1, U2, U4, U6, X1), blanking circuit (U5, U14, U15, X2), A/D converter block (U3, U16, U17) and character data output block (U7, U8, U9, U10, U13).

The controller block is composed of the 1-chip CPU (with built-in ROM), RAM, decoder, ALE and oscillator x 1. The 1-chip CPU

CIRCUIT DESCRIPTION

(U1) incorporates a ROM as described above, and the entire unit is controlled by the software written in this ROM. The 1-chip CPU is operated based on X1 (10 MHz). Before the start of operation, the reset signal is input from U18 when the power is switched on. The 1-chip CPU incorporates 8-bit A/D converters in the output ports, input ports and also internally, and it outputs character data for CRT display based on the data input through the A/D converters.

As for the output port configuration, P40 to P47 and P30 to P33 in the circuit diagram output comparison data for an external 12-bit A/D converter and P34 to P37 output the control data for use in switching the analog data to the external 12-bit A/D converter. As for the input port configuration, P60 to P64 are used to recognize the "H" or "L" level of the push switches on the panel and input the CURSOR MODE, B TRIG'D, CH2 INV and X10 MAG signals. Among them, the CURSOR MODE switch is a non-locking switch so a Schmitt circuit is provided before the signal is input to the port. P50 to P57 are the analog voltage input ports. The input voltage is sent to the internal 8-bit A/D converter, converted into digital data and becomes the CRT display data. The 1-chip CPU has a bus configuration of 8 data bus bits and 16 address bus bits. A the lower 8 bits of the address bus are also used as the data bus bits, IC (ALE circuit IC) U6 is provided for their separation.


In addition to above, the controller block also includes a decoder (U4) and memory (U2). The decoder output is supplied to the memory as well as to the X latch CLK input, Y latch CLK input and blanking circuit block which will be described below. The memory functions as the system RAM of the 1-chip CPU and also stored CRT display data. The stored data is some of the data which has originally been prepared in the ROM inside the 1-chip CPU; only the data required for CRT display is stored in this memory.

Next, the blanking circuit block is composed of a 4 MHz oscillator composed of X2 and the inverter (U15), shift register (U14), inverter (U15) and OR (U5). It outputs the Blanking (R/O BLK), request (R/O REQ) and unblanking (R/O UBL) signals. The signals are output at the timing synchronized with the CLK signal from the decoder to X latch (U7) and Y latch (U8) and used to switch the display from waveform to character or from character to waveform and to clear the trace during switching. R/O BLK is used to clear the trace, R/O REQ is used to switch display between characters and traces and R/O UBL is used to illuminate a single dot in the character.

In synchronism with the signal outputs from the blanking circuit block, the character data output block outputs R/O-X (character dot position in Horizontal direction) and R/O-Y (character dot position in Vertical direction). The character data is sent from the memory (U2) described above to the X latch and Y latch, and the position data is sent through the address bus.

These data are latched simultaneously, and the latched data are input to the respective 8-bit D/A converters (U9, U10) to be converted into analog signals. After conversion, the obtained analog signals are input to analog switches U11 and U12, output from opamp U13 as signals with 0 to 4 V amplitudes, and sent respectively to the final amp.

The analog switches are supplied with the cursor voltages, which are used to determine the CRT screen position in case the cursor output is required. The relationship between these voltages and the CRT screen display is as shown in the following diagram.

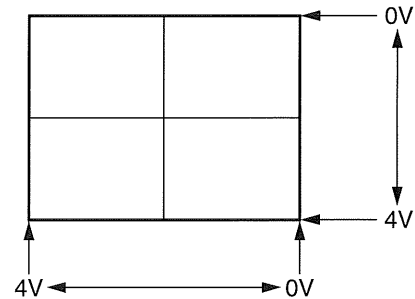

In addition, there is an external 12-bit A/D converter for use as the means to input character data. This converts the cursor voltages, sweep time voltage, DTP voltage, etc., which require a certain resolution into digital data. The A/D converter is formed with an analog switch (U17), comparator (U3) and D/A converter (U16) for A/D conversion with the successive comparison method.

CIRCUIT DESCRIPTION

V-MODE LOGIC

When CH1 is selected with V-MODE

P12-9	$\overline{\text{CH1}}$	L
P12-8	$\overline{\text{CH2}}$	H
P12-7	$\overline{\text{CH3}}$	H
P12-6	$\overline{\text{ADD}}$	H
P9-5	V.CLK	
U3-6	C1E	
U3-9	C2E	
U3-5	$\overline{\text{C1E}}$	
U3-7	$\overline{\text{C2E}}$	
Q310-C	CH3	
Q311-C	$(\overline{\text{C1E}} \text{ AND } \overline{\text{C2E}})$	

Fig. 1-a

When CH2 is selected with V-MODE

P12-9	$\overline{\text{CH1}}$	H
P12-8	$\overline{\text{CH2}}$	L
P12-7	$\overline{\text{CH3}}$	H
P12-6	$\overline{\text{ADD}}$	H
P9-5	V.CLK	
U3-6	C1E	
U3-9	C2E	
U3-5	$\overline{\text{C1E}}$	
U3-7	$\overline{\text{C2E}}$	
Q310-C	CH3	
Q311-C	$(\overline{\text{C1E}} \text{ AND } \overline{\text{C2E}})$	

Fig. 1-b

When CH3 is selected with V-MODE

P12-9	$\overline{\text{CH1}}$	H
P12-8	$\overline{\text{CH2}}$	H
P12-7	$\overline{\text{CH3}}$	L
P12-6	$\overline{\text{ADD}}$	H
P9-5	V.CLK	
U3-6	C1E	
U3-9	C2E	
U3-5	$\overline{\text{C1E}}$	
U3-7	$\overline{\text{C2E}}$	
Q310-C	CH3	
Q311-C	$(\overline{\text{C1E}} \text{ AND } \overline{\text{C2E}})$	

Fig. 1-c

CIRCUIT DESCRIPTION

When ADD is selected with V-MODE

P12-9	$\overline{\text{CH1}}$	H
P12-8	$\overline{\text{CH2}}$	H
P12-7	$\overline{\text{CH3}}$	H
P12-6	$\overline{\text{ADD}}$	L
P9-5	V.CLK	_____
U3-6	C1E	_____
U3-9	C2E	_____
U3-5	C1E	_____
U3-7	$\overline{\text{C2E}}$	_____
Q310-C	CH3	_____
Q311-C	$(\overline{\text{C1E}} \text{ AND } \overline{\text{C2E}})$	_____

Fig. 1-d

There are 16 combinations obtained from the 4 states, and it is abnormal if all of these are "H".

When more than one combination are used, the state is switched at the negative going of V.CLK in the order shown below:

→ CH1 → CH3 → CH2 → ADD

SWEEP CODE	A SWEEP					B SWEEP					VOLTAGE RANGE (V)	VOLTAGE (V)	VOLTAGE (V)	
	S301	a	b	c	d	e	f	g	h	j				k
SWEEP TIME / DIV	0.5s											< 0.168	Approx. -7.6	-12
	0.2s	○										0.168 ~ 0.301	Approx. -6.9	
	0.1s		○									0.302 ~ 0.504	Approx. -5.9	
	50ms			○					○			0.505 ~ 0.704	↓	0
	20ms	○		○			○		○			0.705 ~ 0.838		
	10ms		○	○					○	○		0.839 ~ 1.044		
	5ms				○					○		1.045 ~ 1.247	↓	
	2ms	○			○		○			○		1.248 ~ 1.381		
	1ms		○		○				○	○		1.382 ~ 1.584	↓	
	0.5ms			○	○				○	○		1.585 ~ 1.784		
	0.2ms	○		○	○		○		○	○		1.785 ~ 1.918	↓	
	0.1ms		○	○	○				○	○	○	1.919 ~ 2.124		
	50μs					○					○	2.125 ~ 2.327	↓	
	20μs	○				○	○				○	2.328 ~ 2.461		
	10μs		○			○		○			○	2.462 ~ 2.664	↓	
	5μs			○		○			○		○	2.665 ~ 2.864		
	2μs	○		○		○	○		○		○	2.865 ~ 2.998	↓	
	1μs		○	○		○			○	○	○	2.999 ~ 3.204		
	0.5μs				○	○				○	○	3.205 ~ 3.407	↓	
0.2μs	○			○	○	○			○	○	3.408 ~ 3.541			
0.1μs		○		○	○			○		○	3.542 ~ 3.743	↓		
0.05μs			○	○	○			○	○	○	> 3.743		Approx. -7.6	
CHECK POINTS	X73-2070-00											P11-3, 2	P10-9, 4	P10-6, 1
	X77-1870-00											P23-11, 13		

Fig. 2

CIRCUIT DESCRIPTION

● CH1 ATT & CH2 ATT voltage check table

V-Range (/div)	Voltage range (V)
5V	4.124 ~ 4.450
2V	3.790 ~ 4.123
1V	3.456 ~ 3.789
0.5V	3.130 ~ 3.455
0.2V	2.804 ~ 3.129
0.1V	2.470 ~ 2.803
50mV	2.136 ~ 2.469
20mV	1.810 ~ 2.135
10mV	1.484 ~ 1.809
5mV	1.150 ~ 1.483
2mV	0.816 ~ 1.149
1mV	0.490 ~ 0.815

Fig. 3

CH1 CHECK POINT P23-4
CH2 CHECK POINT P23-6

● UNCAL voltage check table

CH1 CAL	CH2 CAL	SWP CAL	Voltage range (V)
>	>	>	4.406 ~ 4.860
>	>	CAL	3.777 ~ 4.405
>	CAL	>	3.147 ~ 3.776
>	CAL	CAL	2.518 ~ 3.146
CAL	>	>	1.888 ~ 2.517
CAL	>	CAL	1.257 ~ 1.887
CAL	CAL	>	0.626 ~ 1.256
CAL	CAL	CAL	0.156 ~ 0.625

Fig. 4

CHECK POINT P23-15

● SWEEP CODE voltage check table

SWEEP TIME (/div)	Voltage range (V)
50ns	≥ 3.744
0.1μs	3.542 ~ 3.743
0.2μs	3.408 ~ 3.541
0.5μs	3.205 ~ 3.407
1μs	2.999 ~ 3.204
2μs	2.865 ~ 2.998
5μs	2.665 ~ 2.864
10μs	2.462 ~ 2.664
20μs	2.328 ~ 2.461
50μs	2.125 ~ 2.327
0.1ms	1.919 ~ 2.124
0.2ms	1.785 ~ 1.918
0.5ms	1.585 ~ 1.784
1ms	1.382 ~ 1.585
2ms	1.248 ~ 1.381
5ms	1.045 ~ 1.247
10ms	0.839 ~ 1.044
20ms	0.705 ~ 0.838
50ms	0.505 ~ 0.704
0.1s	0.302 ~ 0.504
0.2s	0.168 ~ 0.301
0.5s	≤ 0.167

Fig. 5

14 CHECK POINT
A SWEEP P23-11
B SWEEP P23-13

● V-MODE level check table

V-MODE								
CH1	OFF	ON	OFF	ON	OFF	ON	OFF	ON
ADD	OFF	OFF	ON	ON	OFF	OFF	ON	ON
CH2	OFF	OFF	OFF	OFF	ON	ON	ON	ON
	↓	↓	↓	↓	↓	↓	↓	↓
CH1	L	L	H	L	H	L	H	L
ADD	H	H	L	L	H	H	L	L
CH2	H	H	H	H	L	L	L	L
	↓	↓	↓	↓	↓	↓	↓	↓
Display	CH1 (CH3)*		CH1 + CH2	CH1 + CH2	CH2	CH2	CH1 + CH2	CH1 + CH2

* CH3 display is used when only CH3 is ON.

Fig. 6

CHECK POINT P23-4
P23-10
P24-6

● MAG level check

ON	OFF
L	H

CHECK POINT P23-17

Fig. 7

● CH2 INV level check table

ON	OFF
L	H

CHECK POINT P23-12

Fig. 8

● B TRIG'D level check table

ON	OFF
L	H

CHECK POINT P23-19

Fig. 9

● H DISPLAY voltage check table

	Output voltage range (V)
A	≥ 2.085
ALT	1.381 ~ 2.084
B	0.704 ~ 1.380
X-Y	≤ 0.703

CHECK POINT P23-20

Fig. 10

● Probe voltage check table

	Output voltage range (V)
1/1	≥ 4.197
1/10	3.176 ~ 4.196
1/100	≤ 3.175

CHECK POINT
CH1PB : P23-3
CH2PB : P23-5


Fig. 11

● CURSOR voltage check table


ON	OFF
L	H

Fig. 12

CS-5270 BLOCK DIAGRAM

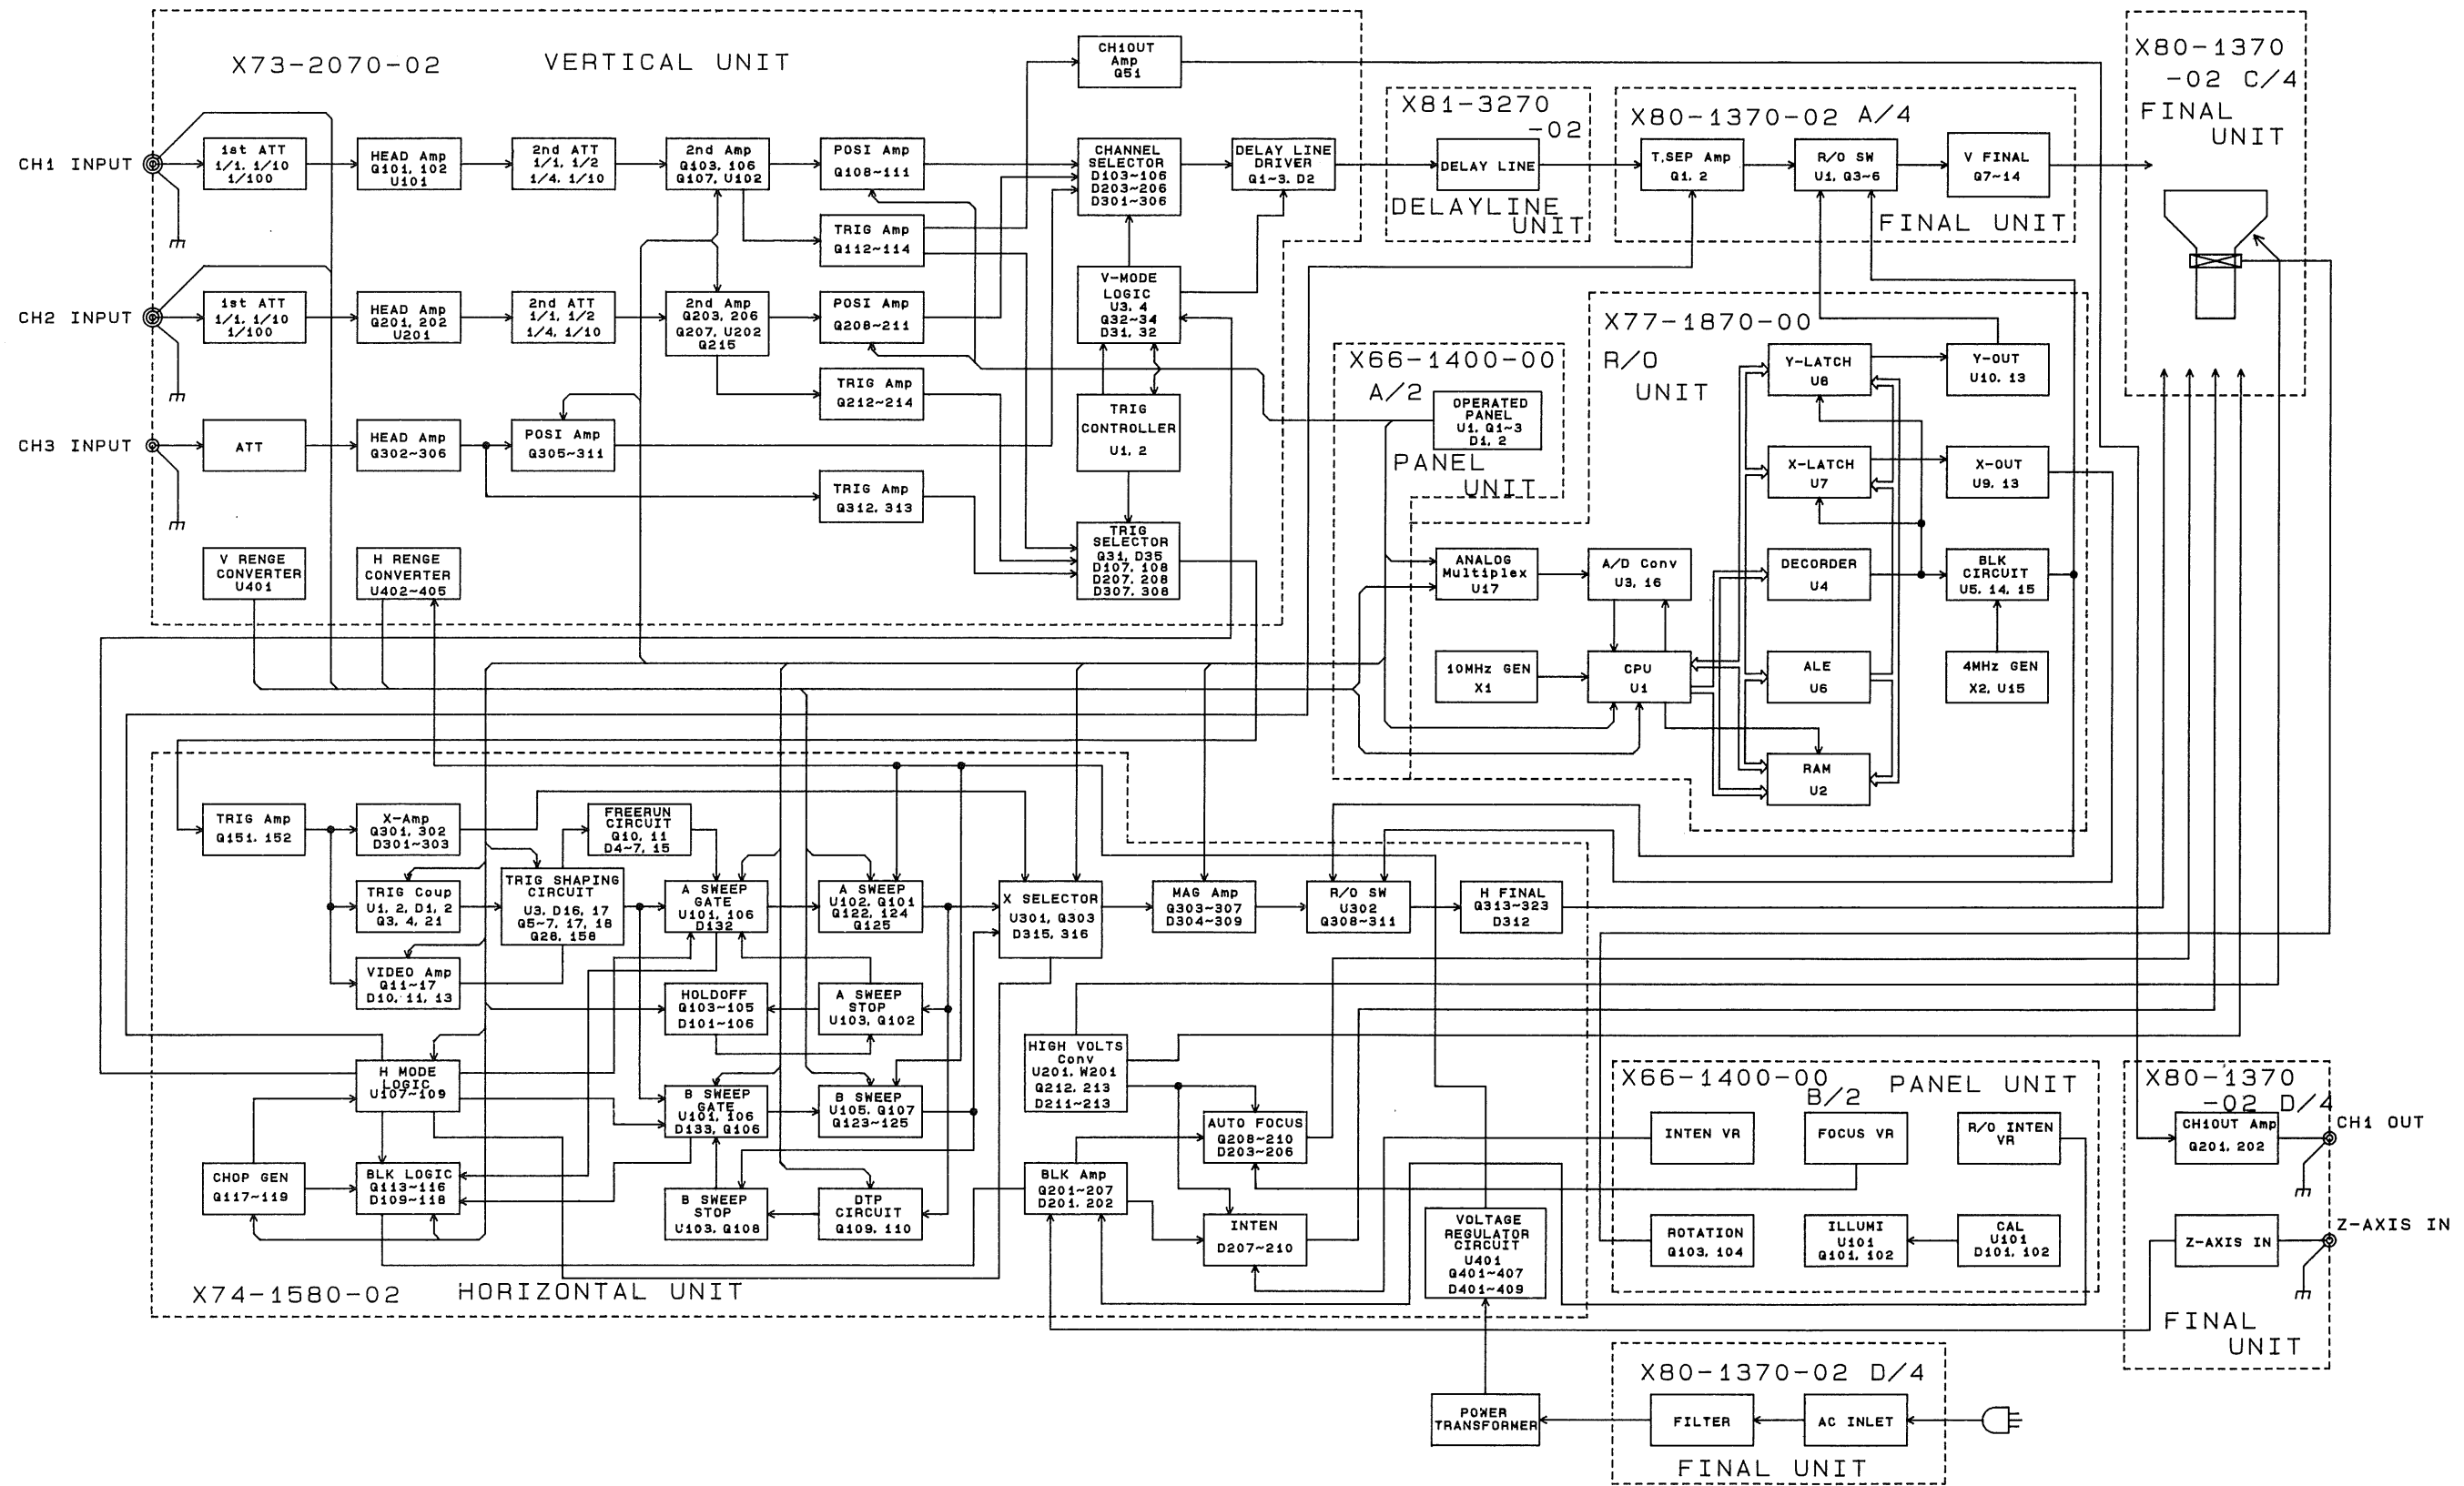

CS-5275 BLOCK DIAGRAM

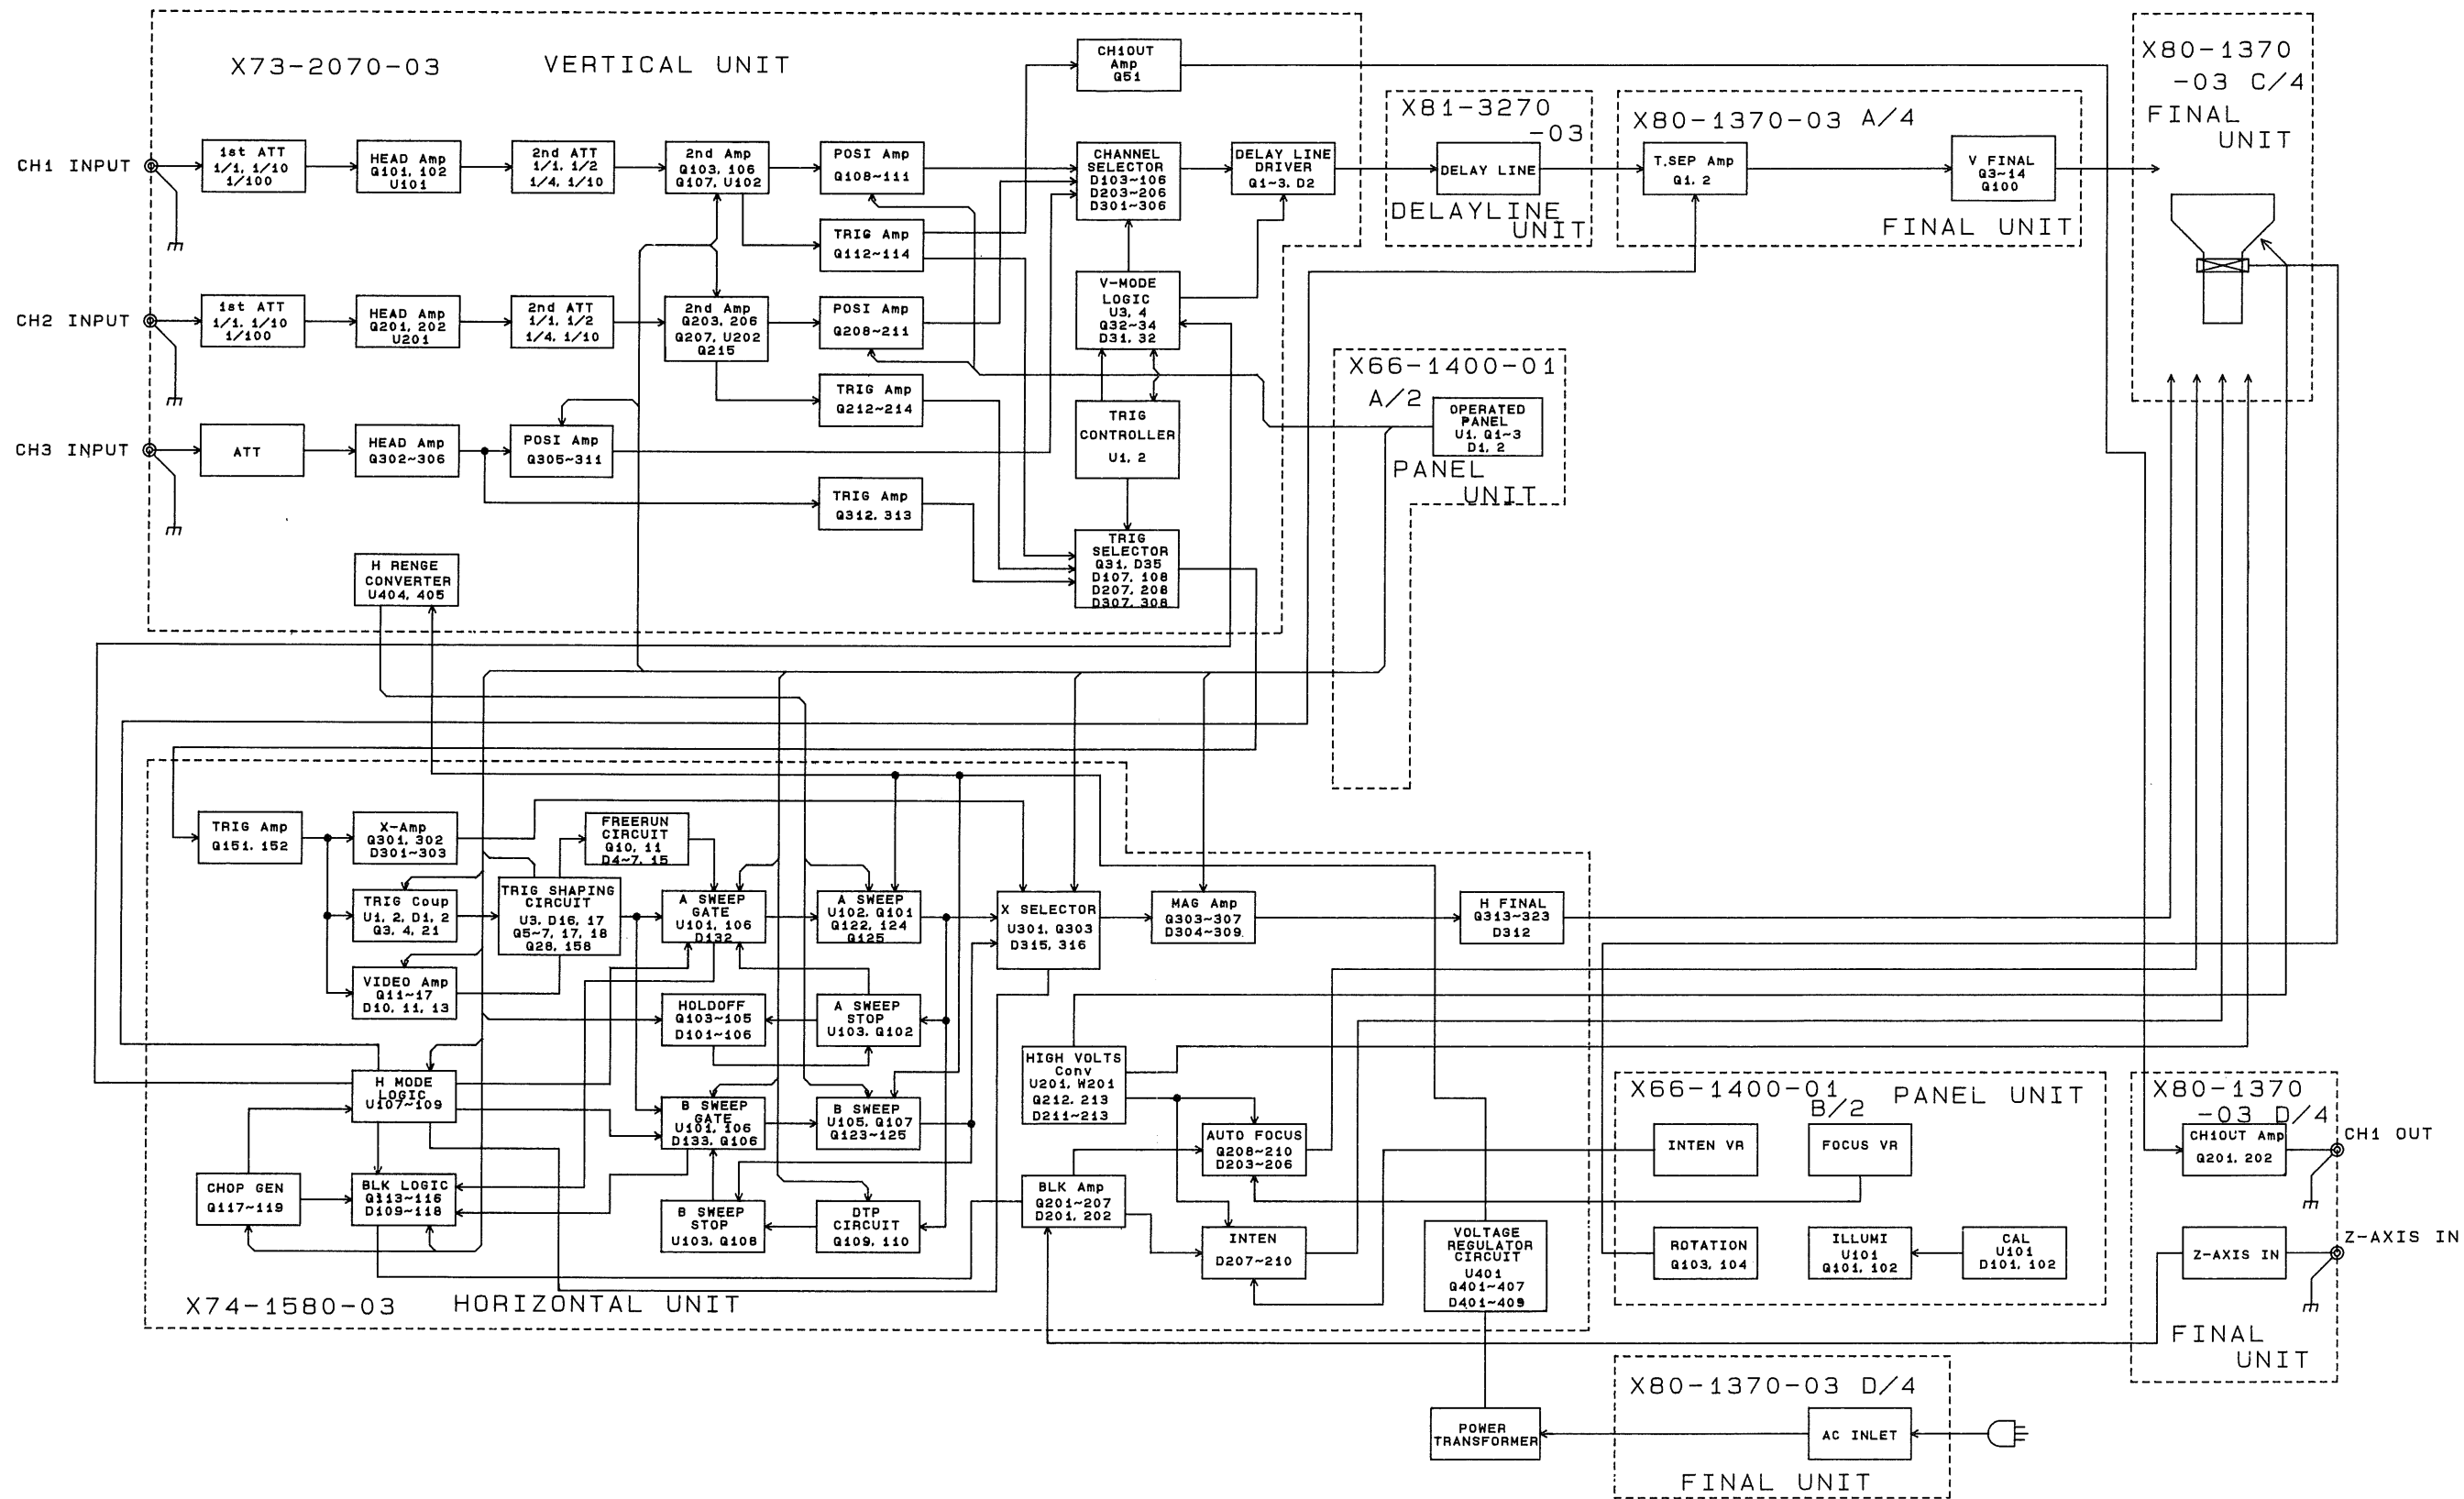

ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting.

Before calibrating the scope, check the power supply voltage.

TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-712 (KENWOOD)	Impedance: More than 10 M Ω , Measuring range: 0.2 V to 1000 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 Ω , constant voltage over tuning range
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within $\pm 1\%$, Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-921 (KENWOOD)	—
Oscilloscope	CS-6040 (KENWOOD)	Sensitivity: more than 1 mV Frequency response: More than 150 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1 μ s repetitive waveform
High-Voltage Probe	—	Input Impedance: 1000 M Ω
Termination	—	Impedance: 50 Ω Accuracy: within 3%
Termination	—	3 watts type impedance: 50 Ω
Attenuator	—	- 20 dB attenuation (50 Ω)

Table 1

PREPARATION FOR ADJUSTMENT

Control Settings

The control settings listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.


NAME OF KNOBS	POSITION
INTEN	12 o'clock
FOCUS	Optimum position
CH1, CH2, CH3 \blacklozenge POSITION	Mechanical center
\blacktriangleleft \blacktriangleright POSITION	Mechanical center
$\times 10$ MAG	OFF
VARIABLE, H.VARIABLE	CAL
(VOLTS/DIV, SWEEP TIME/DIV)	
AC-GND-DC (CH1 and CH2)	DC (GND at no signal)
VERTICAL MODE	CH1
HORIZONTAL MODE	A
TRIGGERING COUPLING	AC
TRIGGERING SOURCE	VERT MODE
TRIGGERING MODE	AUTO
TRIGGERING LEVEL	Mechanical center
VOLTS/DIV (CH1 and CH2)	5 V/DIV
A/B SWEEP TIME/DIV	0.5 s/50 ms
TRACE SEP	Fully CCW
HOLD OFF	Fully CCW
SLOPE	\blacksquare +

Table 2

ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
Operating voltage	VR4 VR303	X80-1370 X74-1580	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISP: X-Y, R/O: OFF 1) Move the spot to the CRT center by operating the POSI controls. 2) Attach the multimeter probes across P5-1 and GND of X80-1370 and adjust VR4 to the voltage 82.5 V. 3) Attach the multimeter probes across P7-1 and GND of X74-1580 and adjust VR303 so that the voltage is 70 V. 4) Attach the probe to P7-4 and ensure that the voltage reading is approx. 70 V.
Focus Center and ASTIG	VR201	X74-1580	V.MODE: CH1, CH2, AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISP: X-Y 1) Move the spot to the CRT center by operating the POSI controls. 2) Adjust the spot to the best point with FOCUS on the panel and ASTIG (VR305). 3) Set FOCUS on the panel to the 12:00 position and adjust VR201 to move the spot to the best point.
Intensity	VR202	X74-1580	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISP: X-Y 1) Set INTEN to the 10:00 position. 2) At the 10:00 position, adjust so that the spot disappears.
Cursor Y-Gain and POSI * In case the R/O unit is not used, ignore this item.	VR3 (Gain) VR2 (POSI)	X80-1370	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISP: A, R/O: ON, A.SWEEP: 1 ms 1) Set the R/O display to 6.00 by operating the cursor POSI controls. 2) Adjust VR3 and VR2 so that the interval between cursors is 6 div. 3) Maximize the cursor interval by operating the cursor POSI controls. 4) Adjust VR2 to make it uniform.
Cursor X-Gain and POSI * In case the R/O unit is not used, adjust only VR304. The VR can be used to adjust the length of the SWEEP TIME 1 ms trace.	VR304 (Gain) VR306 (POSI)	X74-1580	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISP: A, R/O: ON (1/ΔT), A.SWEEP: 1 ms 1) Set the R/O display to 8.00 by operating the cursor POSI controls. 2) Adjust VR304 and V306 so that the cursor interval is 8 div.. 3) Maximize the cursor interval by operating the cursor POSI controls. 4) Adjust VR306 to make it uniform. In case the R/O unit is not used, VR304 is to be adjusted in the SWEEP TIME 1 ms adjustment.
CH1 Gain	VR1 (10 mV) VR102 (1 mV)	X80-1370 X73-2070	V.MODE: CH1, AC-DC: DC, H.DISP: A, VOLTS: 10 mV, VARI: CAL. 1) Input a 50 mV square wave signal. 2) Adjust so that the amplitude is 5 div. (10 mV range) 3) Switch VOLTS to 1 mV and input a 5 mV square wave signal. 4) Adjust so that the amplitude is 5 div. (1 mV range)
CH2 Gain	VR207 (10 mV) VR202 (1 mV)	X73-2070	V.MODE: CH2, AC-DC: DC, H DISP: A, VOLTS: 10 mV, VARI: CAL. 1) Input a 50 mV square wave signal. 2) Adjust so that the amplitude is 5 div. (10 mV range) 3) Switch VOLTS to 1 mV and input a 5 mV square wave signal. 4) Adjust so that the amplitude is 5 div. (1 mV range)




ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
X-Gain * In case the R/O unit is not used, do not adjust this item now but adjust after H.POSI.	VR308	X74-1580	H.DISP: X-Y, AC-DC: DC VOLTS: 10 mV, VARI: CAL. 1) Input a 50 mV square wave signal to CH2. 2) Adjust so that the amplitude is 5 div. (10 mV range) * Make the adjustment to 5 div., at the CRT center. 
CH3 Gain	VR301	X73-2070	V.MODE: CH3, H.DISP: A 1) Input a 0.5 V square wave signal. 2) Adjust so that the amplitude is 5 div. (0.1 V range)
CH1 Step ATT Balance	VR103	X73-2070	V.MODE: CH1, AC-DC: GND (both CH) VOLTS: 5 mV (both CH) H.DISP: A 1) Adjust so that the trace does not move when VOLTS is switched from 5 mV to 2 mV. * Adjust after switching to 2 mV with reference to the 5 mV position.
CH1 VARIABLE Balance	VR104	X73-2070	V.MODE: CH1, AC-DC: GND (both CH) VOLTS: 5 mV (both CH) H.DISP: A Adjust by setting VARIABLE to the MIN (fully counterclockwise) position with reference to the MAX (CAL) position. * Ensure that the trace does not move when VARIABLE is switched between MIN ↔ MAX.
CH2 Step ATT Balance	VR203	X73-2070	V.MODE: CH2, AC-DC: GND, VOLTS: 5 mV, H.DISP: A. 1) Adjust so that the trace does not move when VOLTS is switched from 5 mV to 2 mV. * Adjust after switching to 2 mV with reference to the 5 mV position.
CH2 VARIABLE Balance	VR204	X73-2070	V.MODE: CH2, AC-DC: GND, VOLTS: 5 mV, H.DISP: A. 1) Adjust by setting VARIABLE to the MIN (fully counterclockwise) position with reference to the MAX (CAL) position. * Ensure that the trace does not move when VARIABLE is switched between MIN ↔ MAX.
CH2 INV Balance	VR208	X73-2070	V.MODE: CH2, AC-DC: GND, VOLTS: 5 mV, H.DISP: A. 1) Adjust so that the trace does not move when CH2 INV is switched ON-OFF. 2) Check CH2 STEP ATT BAL and VARI BAL and, if any is deviated, re-adjust following the adjustment procedure.
ADD POSI	VR1	X73-2070	V.MODE: CH1, ADD, AC-DC: GND, VOLTS: 5 mV H.DISP: A 1) Superimpose the two displayed traces by operating CH2 POSI. 2) Switch V.MODE CH2 ON. (After this, CH1, CH2 and ADD of V.MODE are ON.) 3) Superimpose the two displayed traces b operating CH1 POSI. 4) Adjust the trace to the center of scale. (The CRT seems to display a single trace but it actually consists of a superimposition of 3 traces.)





ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
V.POSI Center	VR106 (CH1) VR206 (CH2) VR302 (CH3)	X73-2070	V.MODE: CH1, CH2, CH3, VOLTS: 5 mV, H.DISP: A, AC-DC: GND. 1) Set POSI of each CH to the 12:00 position. 2) Adjust the trace of each CH to the scale center.
CH1 Waveform Shaping	TC102 (0.1 V) TC104 (1 V)	X73-2070	V.MODE: CH1, AC-DC: DC, VARI: CAL, VOLTS: 10 mV (ideal waveform), H.DISP: A. 1) Input a 1 kHz square wave to the CH1 input. 2) Adjust so that the waveforms at 0.1 V and 1 V are flat.
CH2 Waveform Shaping	TC202 (0.1 V) TC204 (1 V)	X73-2070	V.MODE: CH2, AC-DC: DC, VARI: CAL, VOLTS: 10 mV (ideal waveform), H.DISP: A. 1) Input a 1 kHz square wave to the CH2 input. 2) Adjust so that the waveforms at 0.1 V and 1 V are flat.
CH3 Waveform Shaping	TC301	X73-2070	V.MODE: CH3, H.DISP: A. 1) Input a 1 kHz square wave to the CH1 input and adjust so that the waveform is flat.
Input Capacity	TC101 (0.1 V) TC103 (1 V)	X73-2070	V.MODE: CH1, AC-DC: DC, VARI: CAL, VOLTS: 10 mV (reference), H.DISP: A. 1) Connect a capacity meter to the CH1 input. 2) Measure the capacity of the 10 mV range. (No more than 25 p) 3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.
Input Capacity	TC201 (0.1 V) TC203 (1 V)	X73-2070	V.MODE: CH2 AC-DC: DC, VARI: CAL, VOLTS: 10 mV (reference), H.DISP: A. 1) Connect a capacity meter to the CH2 input. 2) Measure the capacity of the 10 mV range. (No more than 25 p) 3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.
FIX Level	VR2	X74-1580	V.MODE: CH1, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: FIX, SWEEP T: 0.2 ms. 1) Input 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 2) Adjust so that the waveform starts from the scale center line when SLOPE is switched between +/-. 3) Set the amplitude to 1 div., switch SLOPE to + and -, and ensure that triggering is applied. (If it is not applied, re-adjust now.) <div style="text-align: center;"> </div>
TRIG Level	VR1	X74-1580	V.MODE: CH1, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms. 1) Input 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 2) Set TRIG LEVEL to the 12:00 position and adjust so that the waveform starts from the scale center line. <div style="text-align: center;"> </div>

ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
CH1 TRIG DC Coupling	VR105	X73-2070	<p>V.MODE: CH1, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms, COUPLING: AC.</p> <ol style="list-style-type: none"> 1) Input 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 2) Adjust TRIG LEVEL so that the waveform starts from the scale center line. 3) Switch COUPLING to DC and adjust so that the waveform starts from the scale center line. <div style="text-align: right; margin-top: 10px;">  </div>
CH2 TRIG DC Coupling	VR205	X73-2070	<p>V.MODE: CH2, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms, COUPLING: AC.</p> <ol style="list-style-type: none"> 1) Input 1 kHz sine wave to CH2 and set it so that it extends by 3 div., above and below the scale center line. 2) Adjust TRIG LEVEL so that the waveform starts from the scale center line. 3) Switch COUPLING to DC and adjust so that the waveform starts from the scale center line. <div style="text-align: right; margin-top: 10px;">  </div>
CH3 TRIG DC Coupling	VR303	X73-2070	<p>V.MODE: CH3, TRIG MODE: AUTO, SWEEP T: 0.2 ms.</p> <ol style="list-style-type: none"> 1) Set the trace to the scale center by operating V.POSI. 2) Input a 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. (As CH3 is fixed to DC, it may not be triggered at this time. But it can be triggered by adjustment.) 3) Adjust so that the waveform starts from the scale center line. <div style="text-align: right; margin-top: 10px;">  </div>
TRIG ADD	VR31	X73-2070	<p>V.MODE: CH1, CH2, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms, COUPLING: AC</p> <ol style="list-style-type: none"> 1) Set the traces of each CH to the scale center position by operating V.POSI. 2) Switch CH1 and CH2 to OFF and ADD to ON. 3) Input a 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 4) Adjust TRIG LEVEL so that the waveform starts from the scale center line. 5) Switch COUPLING to DC and adjust so that the waveform starts from the scale center line.

ADJUSTMENT

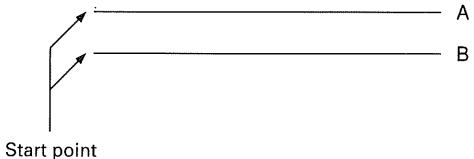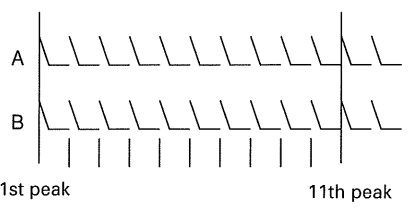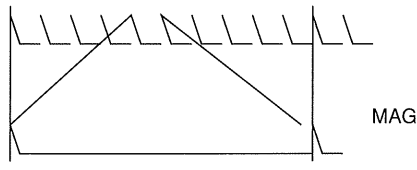
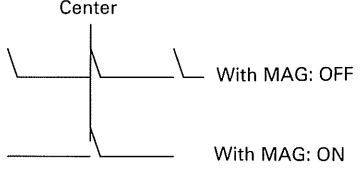
Item	Adjustment	P.C.B.	Procedure
A/B sweep start points	VR102	X74-1580	<p>V.MODE: CH1, AC-DC: DC, SWEEP TIME: A → 1 ms, B → 0.1 ms, H.DISP: ALT DTM: MIN. (Fully counterclockwise) 1) Adjust so that the start points of A.SWEEP and B.SWEEP are aligned.</p> 
A, B SWEEP TIME 1 ms * In case the R/O unit is not used, adjust VR304 alternately so that the total number of marker peaks is 12.	VR403 (A, SWEEP) VR402 (B, SWEEP)	X73-2070	<p>SWEEP TIME: A, B → 1 ms, H.DISP: ALT, DTM: MIN (fully counterclockwise). 1) Input a 1 ms marker signal. 2) Adjust so that the marker peak and scale coincides at every div.</p> 
MAG GAIN	VR302	X74-1580	<p>SWEEP TIME: A → 1 ms, H.DISP: A, AC-DC: DC. 1) Input a 1 ms marker signal. 2) Adjust H.POSI so that the marker peak and scale coincides at every div. 3) Switch X10 MAG ON and adjust so that the interval between two peaks is 10 div.</p> 
MAG Center	VR309	X74-1580	<p>SWEEP TIME: A → 1 ms, H.DISP: A, AC-DC: DC. 1) Input a 5 ms marker signal. 2) Adjust H.POSI so that the center peak is aligned with the scale center. 3) Switch X10 MAG ON and adjust so that the center marker peak is aligned with the scale center. (Adjust by repeating a few times.) 4) After the adjustment, switch MAG between ON-OFF and ensure that the center marker peak does not move.</p> 

ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
H. POSITION X-POSITION * In case the R/O unit is not used. Adjust X-GAIN after H.POSI. (Adjustment sequence) 1) H.POSI 2) X-GAIN 3) X-POSI	VR301 (H.POSI) VR307 (X-POSI)	X74-1580	SWEEP TIME: A → 1 ms, H.DISP: A 1) Set the AC-DC switch to GND. (The marker signal can be left input.) 2) Set H.POSI to the 12:00 position. 3) Adjust VR301 so that the trace start point is aligned with the left end of scale. 4) Set H.DISP to X-Y. 5) Adjust VR307 so that the spot comes on the scale center.
A, B SWEEP TIME 1 μs	TC101 (A, SWEEP) TC102 (B, SWEEP)	X74-1580	SWEEP TIME: A, B → 1 μs, H.DISP: ALT, DTM: MIN (fully counterclockwise). 1) Input a 1 μs marker signal. 2) Adjust so that the marker peak and scale coincides at every div.
A, SWEEP TIME 0.05 μs	TC301 (A, SWEEP)	X74-1580	SWEEP TIME: A, B → 0.05 μs, H.DISP: ALT, DTM: MIN (fully counterclockwise). 1) Input a 50 ns marker signal. 2) Adjust so that the marker peak and scale coincides at every div.
D.T. POSI * In case the R/O unit is not used: 1. Turn the MAIN and FINE potentiometers fully counterclockwise. 2. Align the of B sweep with 0.2 div. 3. Turn the MAIN and FINE potentiometers fully clockwise. 4. Align the start of B sweep with 10 div. The potentiometers used in the start and stop adjustments are the same.	VR103 (Start) VR104 (Stop)	X74-1580	H.DISP: ALT, AC-DC: GND, A.SWEEP: 1 ms, B.SWEEP: 10 μs 1) Turn the MAIN and FINE potentiometers of D.T.M. control fully counterclockwise. 2) Adjust the R/O display to 0.40 ms with FINE. 3) Adjust VR103 so that the start of B sweep is aligned with 0.4 div., of the scale. 4) Turn the MAIN and FINE potentiometers of D.T.M. control fully clockwise. 5) Adjust the R/O display to 10.00 ms with FINE. 6) Adjust VR104 so that the start of B sweep is aligned with 10.00 div., of the scale. <div style="text-align: center;"><p style="margin-left: 100px;">0.410.00</p><p style="margin-left: 100px;">StartStop</p></div>
CH1 1 MHz square wave	TC1 TC62 TC105	X80-1370 X73-2070	V.MODE: CH1, VOLTS: 10 mV, AC-DC: DC H.DISP: A. 1) Input a 1 MHz square wave to CH1 and set its amplitude to 6 div. 2) Adjust the waveform to the best point. * With the 100 MHz band, provide an overshoot of 0.3 to 0.4 div. * With the 60 MHz band, provide an overshoot of 0.1 to 0.2 div. * With the 40 MHz band, provide an overshoot of 0.1 to 0.2 div. Specification: (Above) 0.5, (Below) 0.5, (Above + Below) = Less than 0.7 div.
CH2 1 MHz square wave	TC205 TC206	X73-2070	V.MODE: CH2, VOLTS: 10 mV, AC-DC: DC H.DISP: A. 1) Input a 1 MHz square wave to CH2 and set its amplitude to 6 div. 2) Adjust the waveform to the best point. 3) Check that the overshoot in each range from 5 mV to 0.1 V is within the specification. (Check both CHs.) * Provide overshoot in the same way as CH1. Specification: Same as CH1.
CH3 1 MHz square wave	TC302 TC303	X73-2070	V.MODE: CH3, H.DISP: A. 1) Input a 1 MHz square wave to CH3 and set its amplitude to 6 div. 2) Adjust the waveform to the best point. * Adjust TC303 for only the 100M and 60M bands. Specification: Same as CH1.

ADJUSTMENT


VERTICAL UNIT (X73-2070-0X)

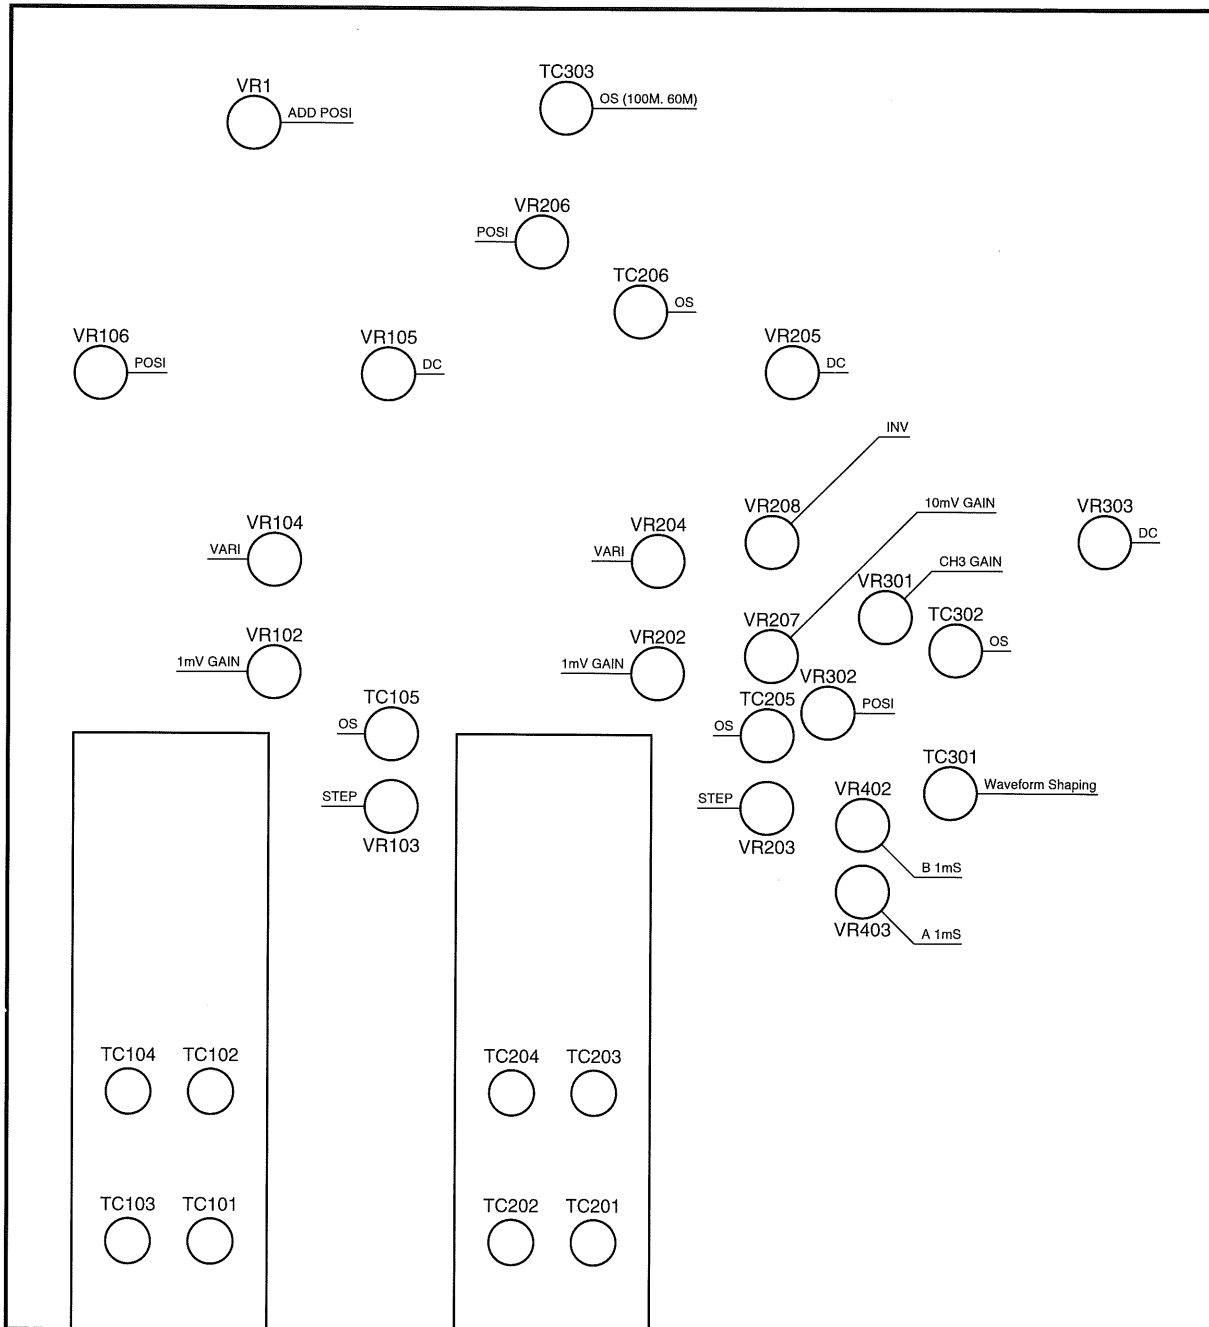

FRONT

ADJUSTMENT


HORIZONTAL UNIT (X74-1580-0X)

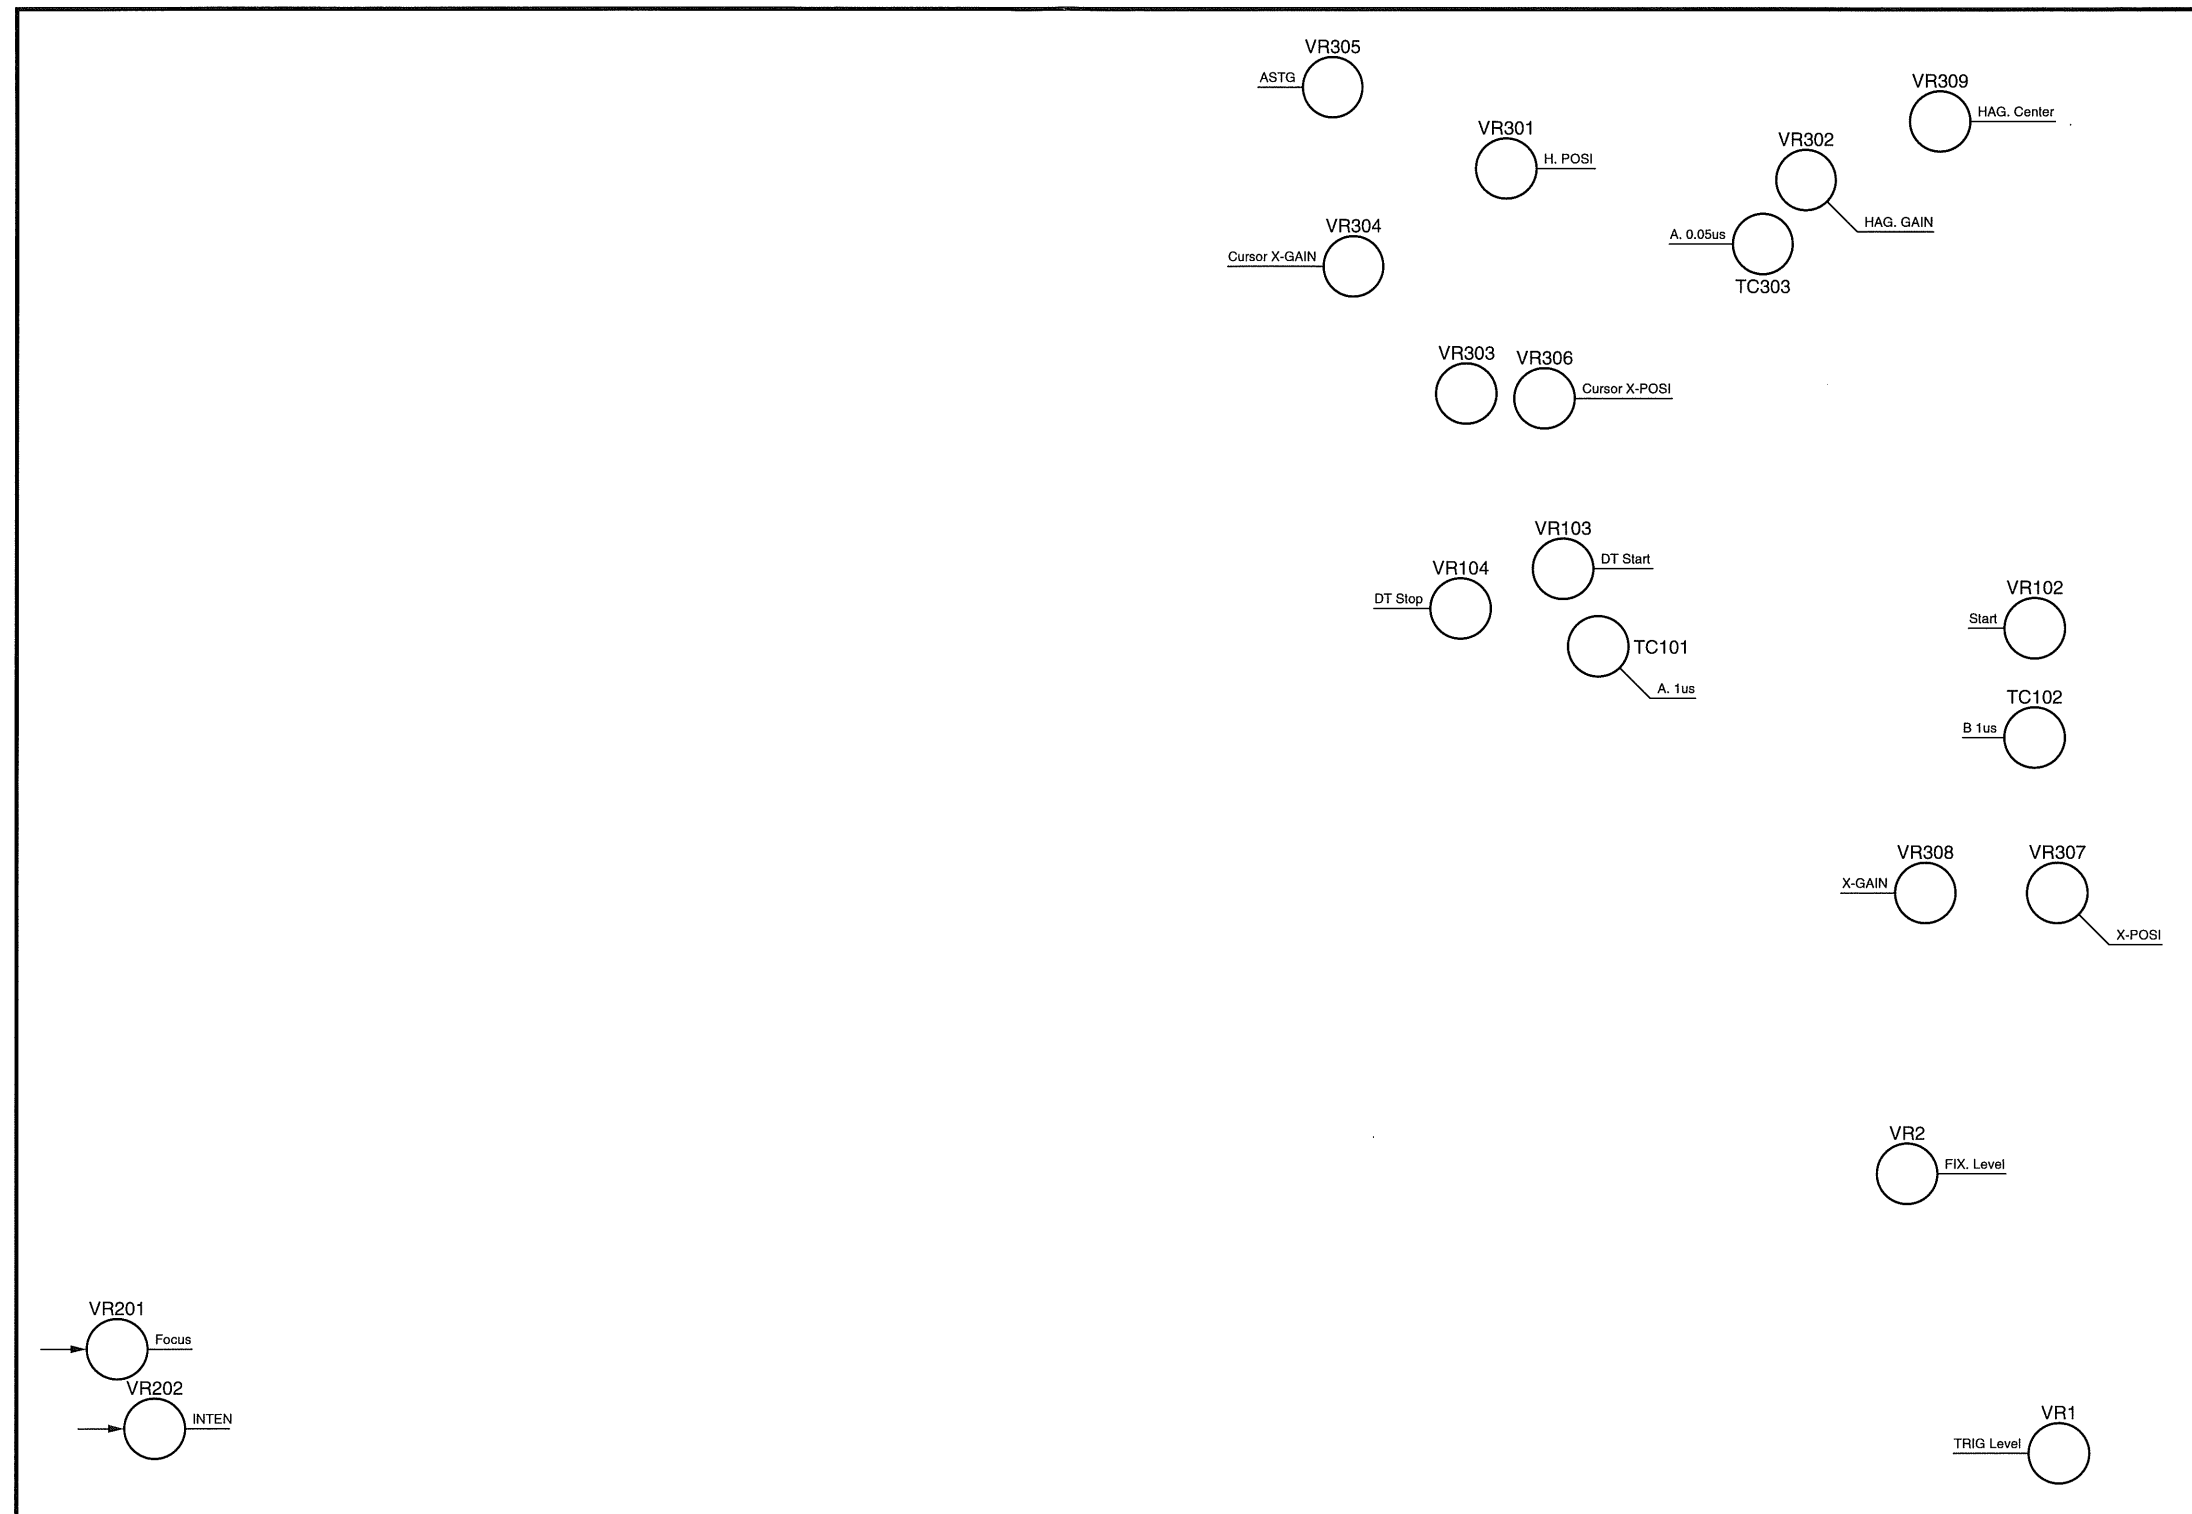

FRONT

ADJUSTMENT

FINAL UNIT (X80-1370-0X)

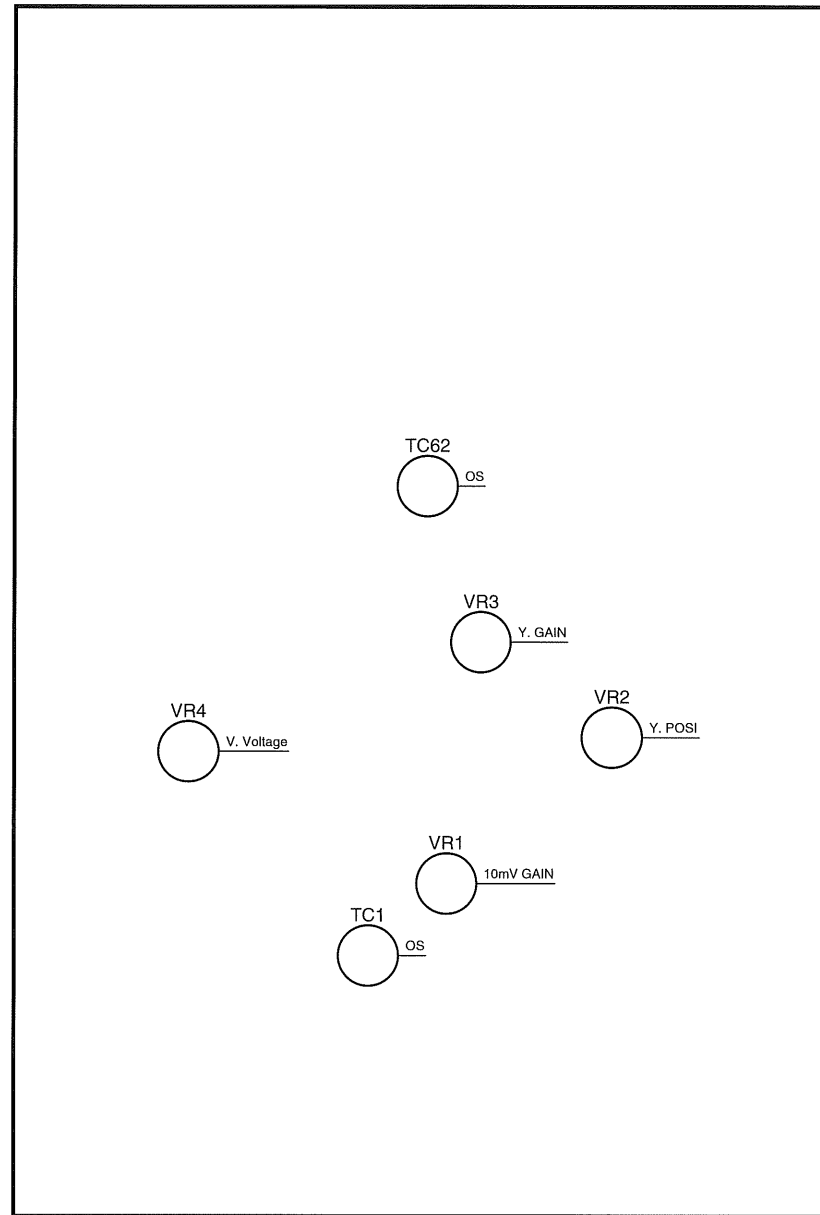

TROUBLESHOOTING

When operating the CS-5200, be sure to use the proper procedure and check all panel settings.

A wrong setting cause abnormal operation from even a good product. For example, observation of a waveform with high noise components is accompanied by jitter. In such a case, the jitter can be corrected by setting the trigger coupling to HFrej. If there is any function which you do not understand, check out by reading the instruction manual.

If the operation is abnormal even when the operating procedure is correct, remove the top case and bottom panel.

CAUTION

HIGH VOLTAGE PARTS ARE INSIDE THE EQUIPMENT. THEY ARE EXTREMELY DANGEROUS.

Check all PC boards to ensure that there is no unplugged connector or soldering defect.

Some problems may be corrected by applying correct adjustment. For example, if the trace moves up and down when the Vertical Variable control is turned, it can be corrected by adjusting the Variable balance. For the adjustment methods, read the descriptions of adjustment procedures.

The description in the troubleshooting section use the same circuit names as those used in the block diagram. Refer to the block diagram when reading the troubleshooting.

First, start with checking the power supply block. Check the voltages at U401 on X74-158.

pin no.	voltage
1	+140
4	+55
6	+12
8	-12
10	+5
11	-8

OK (Acceptable): Go to next step.

NG (Unacceptable): There is a problem in the power supply block. Check the regulator circuit

a: In case no spot is displayed on the CRT in the X-Y mode.

Check that voltages at pins 1 and 4 of P7 on the X74-1580.

OK: Check the voltages at pins 1 and 3 of P5 on the X80-1370.

OK: There is a problem in the BLK amp. (Go to b.)

NG: There is a problem in the vertical amp. (Go to i.)

NG: There is a problem in the horizontal amp. (Go to c.)

b: Check if the voltage at JW18 on X74-1580 is correct.

OK: There is a problem in the BLK amp.

NG: There is a problem in the HIGH Volts converter.

c: Short-circuit the bases of Q306 and Q307 on X74-1580.

A spot is displayed on the CRT:

There is a problem somewhere before the X amp. (Go to d.)

Nothing is displayed on the CRT:

Short the collectors of Q310 and Q311.

A spot is displayed on the CRT:

There is a problem in the MAG amp or R/O SW.

Nothing is displayed on the CRT:

There is a problem in H-FINAL.

d: Short-circuit the collector of Q151 on X74-1580 with the chassis.

A spot is displayed on the CRT:

There is a problem in the Vertical block.

Nothing is displayed on the CRT:

There is a problem in the X amp.

e: In case no trace is displayed on the CRT in the A sweep mode.

Measure the waveform at pin 12 of U102 on X74-1580.

OK: Measure every waveform after U102 to locate the defective position.

NG: Measure the A SWEEP GATE, A SWEEP, A SWEEP STOP and HOLD OFF waveforms to locate the defective position.

f: In case no trace is displayed on the CRT in the B sweep mode.

Measure the waveform at pin 12 of U105 on X74-1580.

OK: Measure every waveform after U105 to locate the defective position.

NG: Measure the B SWEEP GATE, B SWEEP, B SWEEP STOP and DTP circuit waveforms to locate the defective position.

g: Intensity is not modulated in ALT sweep mode.

Check the waveform at the collector of Q116 on X74-1580.

OK: There is a problem in INTEN.

NG: There is a problem in the BLK amp.

h: Triggering cannot be applied.

Check the waveform at the collector of Q151 on the X74-1580.

OK: Check the waveform at the collector of Q158 on X74-1580.

OK: There is a problem in the Schmitt circuit.

NG: There is a problem in the Trig. Coup.

NG: There is a problem in the trigger selector.

TROUBLESHOOTING

i: Trace is not displayed.

Short-circuit the bases of Q7 and Q8 on X80-1370 and check if a trace is displayed on or near the center.

OK: Short-circuit the bases of Q1 and Q2 on X80-1370 and check if a trace is displayed on or near the center.

OK: There is a problem in X73-2070. Check the defective point by shorting each signal line.

NG: There is a problem in the T.SEP amp or R/O SW on X80-1370.

NG: There is a problem in V. FINAL.

j: TV synchronization is impossible.

Check the waveforms of the video amp on X74-1580.

OK: There is a problem in the Schmitt circuit.

NG: There is a problem in the circuitry before the video amp.

Check the defective position following the signal flow. Be sure to check both TV-H and TV-V.

k: The channels are not displayed properly.

Check the outputs from V-MODE LOGIC on X73-2070.

OK: There is a problem in the circuitry before the POSI amp of one of the channels. Check the waveforms.

NG: Check the V-CLK waveform.

OK: There is a problem in the V-MODE LOGIC.

NG: There is a problem in the H-MODE LOGIC on X74-1580.

l: ADD is not possible.

There is a problem in the delay line driver on X73-2070.

m: CHOP sweep is not possible.

Check the waveform at the collector of Q118 on X74-1580.

OK: There is a problem in the H-MODE LOGIC.

NG: There is problem in the CHOP generator.

n: Auto free-run is not possible.

Check +5 V at pin 1 of U106 on X74-1580.

OK: There is a problem in the A sweep gate.

NG: There is a problem in the free-run circuit.

o: Characters are not displayed on the CRT.

- Check the CURSOR MODE SW and R/O INTEN.

- Check the blanking signals at P24-1, 3 and 5.

OK: Check the signals at ROX at P24-8 and ROY at P24-7.

If NG, go to the next check item. If OK, check V FINAL or H FINAL.

NG: There is a problem in the blanking circuitry.

(Check U15, U14, U5 and X2 and their surroundings.)

p: Character are not displayed properly on the CRT:

- Check if the CPU (U1) operates normally.

(Check the conditions of X1, 10 MHz, U1, data bus and address bus.)

- Trace ROX from the input to output to find if there is any abnormal position. Also check ROY from the input to output.

(Check U7, U9, U11, U13, U8, U10 and U12 and their surroundings.)

OK: There is a problem in V FINAL or H FINAL.

NG: There is a problem in the ROX or ROY output circuits.

q: Character data is not displayed properly on the CRT.

- Trace the character data input circuit and its surroundings to find if there is any abnormal position.



(Check U3, U5 and U17.)

OK: There is a problem in the Panel unit.

NG: There is a problem in the character data input circuit.

r: The cursor and DTP do not function properly.

- Check if the cursor and DTP voltages are output properly.

			CHECK POINT
Δ	0V	4V	P23-8
Δ REF	0V	4V	P23-14
DTP	4V	0V	P23-18

OK: There is a problem in the ROX or ROY output circuit.

NG: There is a problem in the Panel unit.

s: Abnormality occurs with other function than above.

Trace the signal path of the defective function referring to the block diagram to locate the defective position.

When all of the troubles have been repaired above, start re-adjustments following the adjustment procedures.

PARTS LIST

CS-5270

Y70-1960-01


REF. NO	PARTS NO	NAME & DESCRIPTION
	A63-0165-03	PANEL ASS'Y
	B41-0710-14	CAUTION LABEL,HIGH VOLTAGE
	B42-3820-05	LABEL; CARTON BOX
	B63-0218-20	INSTRUCTION MANUAL; JAPANESE
	B63-0219-30	INSTRUCTION MANUAL; ENGLISH
	E30-1929-05	BS POWER CORD
	E30-1950-05	JIS POWER CORD
	E30-1951-05	UL/CSA POWER CORD
	E30-1952-05	CEE POWER CORD
	F51-0031-05	FUSE(6X30MM) 630MA/250V
	F51-0033-05	FUSE(6X30MM) 1A/250V
	H10-2883-02	FORMED STYRENE PAD, FRONT
	H10-2884-02	FORMED STYRENE PAD, REAR
	H20-1727-04	VINYL COVER
	H53-0152-04	CARTON BOX
	W01-0406-14	ADJUTMENT ROD
D1	LN322GP	LED; GREEN
D103	LN322GP	LED; GREEN
1	A01-4017-02	CASE, TOP
2	A01-4018-02	CASE, BOTTOM
3	A13-2205-02	FRAME, LEFT
4	A13-2206-02	FRAME, RIGHT
5	A13-2207-12	FRAME, CENTER
6	A21-2423-03	DECORATIVE PANEL, LARGE
7	A21-2425-04	DECORATIVE PANEL, SMALL
8	A22-1307-02	SUB PANEL
9	A63-0110-01	HOLD PANEL, LARGE
10	A63-0111-02	HOLD PANEL, SMALL
11	A83-0067-02	REAR PANEL
12	B11-0518-04	FILTER
13	B41-2069-04	CAUTION LABEL
14	B73-0086-04	NAME PLATE; MODEL NO.
15	D21-0935-04	EXTENSION SHAFT
16	E18-0365-15	AC SELECTOR
16A	E18-0366-15	AC SELECTOR WITH 5X20MM FUSE
17	E21-0686-04	TERMINAL, CAL
18	E23-0552-04	EARTH TERMINAL
20	F11-1206-13	SHIELD CASE, CRT
21	F11-1269-03	SHIELD CASE
22	F15-0733-04	FELT (CRT SHIELD)
23	F20-3013-03	INSULATOR, LARGE
24	F20-3014-04	INSULATOR, SMALL
25	F29-0528-05	INSULATOR TUBE
26	J02-0089-05	RUBBER FOOT
27	J02-0509-04	TILT STAND
28	J19-1622-05	CORD CLAMP
29	J19-1653-23	HOLDER FOR CRT
30	J21-2573-04	HOLDER FOR LEG
31	J21-4853-04	BRACKET, FRONT
32	J21-4854-04	BRACKET, REAR
33	J21-4855-04	BRACKET
34	J42-0558-05	BUSHING
35	J59-0403-05	NYLON RIVET (ILLUMI)
36	K01-0541-05	HANDLE
37	K21-0919-14	KNOB; B SWP
38	K21-0920-04	KNOB; VARI
39	K21-0940-04	KNOB; A SWP
40	K23-0818-04	KNOB; V/DIV
41	K24-3005-04	PUSH SW; POWER
42	K27-0590-04	PUSH BUTTON; GRAYWHITE
43	K27-3618-14	LEVER
44	K29-0877-04	KNOB; VR
45	L07-1509-05	POWER TRANSFORMER
46	L39-0531-05	ROTATION COIL
47	S40-2532-05	POWER SW
48	W01-0503-04	REAR RUBBER FOOT/CORD WRAP
49	X66-1400-00	PANEL UNIT
50	X73-2070-02	VERTICAL UNIT
51	X74-1580-02	HORIZONTAL UNIT
52	X77-1870-00	R/O UNIT
53	X80-1370-02	FINAL AMP UNIT
54	X81-3270-00	DELAY LINE UNIT
55	150JKN31	CRT

CS-5275

Y70-1970-01


REF. NO	PARTS NO	NAME & DESCRIPTION
	A63-0167-03	PANEL ASS'Y
	B41-0710-14	CAUTION LABEL,HIGH VOLTAGE
	B42-3820-05	LABEL; CARTON BOX
	B63-0218-20	INSTRUCTION MANUAL; JAPANESE
	B63-0219-30	INSTRUCTION MANUAL; ENGLISH
	E30-1929-05	BS POWER CORD
	E30-1950-05	JIS POWER CORD
	E30-1951-05	UL/CSA POWER CORD
	E30-1952-05	CEE POWER CORD
	F51-0031-05	FUSE(6X30MM) 630MA/250V
	F51-0033-05	FUSE(6X30MM) 1A/250V
	H10-2883-02	FORMED STYRENE PAD, FRONT
	H10-2884-02	FORMED STYRENE PAD, REAR
	H20-1727-04	VINYL COVER
	H53-0154-04	CARTON BOX
	W01-0406-14	ADJUTMENT ROD
D1	LN322GP	LED; GREEN
D103	LN322GP	LED; GREEN
1	A01-4017-02	CASE, TOP
2	A01-4018-02	CASE, BOTTOM
3	A13-2205-02	FRAME, LEFT
4	A13-2206-02	FRAME, RIGHT
5	A13-2207-12	FRAME, CENTER
6	A21-2424-03	DECORATIVE PANEL, LARGE
7	A21-2426-04	DECORATIVE PANEL, SMALL
8	A22-1307-02	SUB PANEL
9	A63-0110-01	HOLD PANEL, LARGE
10	A63-0111-02	HOLD PANEL, SMALL
11	A83-0067-02	REAR PANEL
12	B11-0518-04	FILTER
13	B41-2069-04	CAUTION LABEL
14	B73-0088-04	NAME PLATE; MODEL NO.
15	D21-0935-04	EXTENSION SHAFT
16	E18-0365-15	AC SELECTOR
16A	E18-0366-15	AC SELECTOR WITH 5X20MM FUSE
17	E21-0686-04	TERMINAL, CAL
18	E23-0552-04	EARTH TERMINAL
20	F11-1206-13	SHIELD CASE, CRT
21	F11-1269-03	SHIELD CASE
22	F15-0733-04	FELT (CRT SHIELD)
23	F20-3013-03	INSULATOR, LARGE
24	F20-3014-04	INSULATOR, SMALL
25	F29-0528-05	INSULATOR TUBE
26	J02-0089-05	RUBBER FOOT
27	J02-0509-04	TILT STAND
28	J19-1622-05	CORD CLAMP
29	J19-1653-23	HOLDER FOR CRT
30	J21-2573-04	HOLDER FOR LEG
31	J21-4853-04	BRACKET, FRONT
32	J21-4854-04	BRACKET, REAR
33	J21-4855-04	BRACKET
34	J42-0558-05	BUSHING
35	J59-0403-05	NYLON RIVET (ILLUMI)
36	K01-0541-05	HANDLE
37	K21-0919-14	KNOB; B SWP
38	K21-0920-04	KNOB; VARI
39	K21-0940-04	KNOB; A SWP
40	K23-0818-04	KNOB; V/DIV
41	K24-3005-04	PUSH SW; POWER
42	K27-0590-04	PUSH BUTTON; GRAYWHITE
43	K27-3618-14	LEVER
44	K29-0877-04	KNOB; VR
45	L07-1509-05	POWER TRANSFORMER
46	L39-0531-05	ROTATION COIL
47	S40-2532-05	POWER SW
48	W01-0503-04	REAR RUBBER FOOT/CORD WRAP
49	X66-1400-01	PANEL UNIT
50	X73-2070-03	VERTICAL UNIT
51	X74-1580-03	HORIZONTAL UNIT
53	X80-1370-03	FINAL AMP UNIT
54	X81-3270-00	DELAY LINE UNIT
55	150JKN31	CRT

MODEL PC-31 (LOW CAPACITY PROBE)




ITEM	DESCRIPTION	PARTS NO.
①	Ground Wire Assembly	E30-1883-08
②	Retractable Hook Tip	E29-0540-08
③	Marker (Orange)	B42-1950-08

MODEL PC-39 (LOW CAPACITY PROBE)



ITEM	DESCRIPTION	PARTS NO.
①	Ground Wire Assembly	E30-1883-08
②	Retractable Hook Tip	E29-0540-08
③	Marker (Orange)	B42-1950-08

DISASSEMBLY

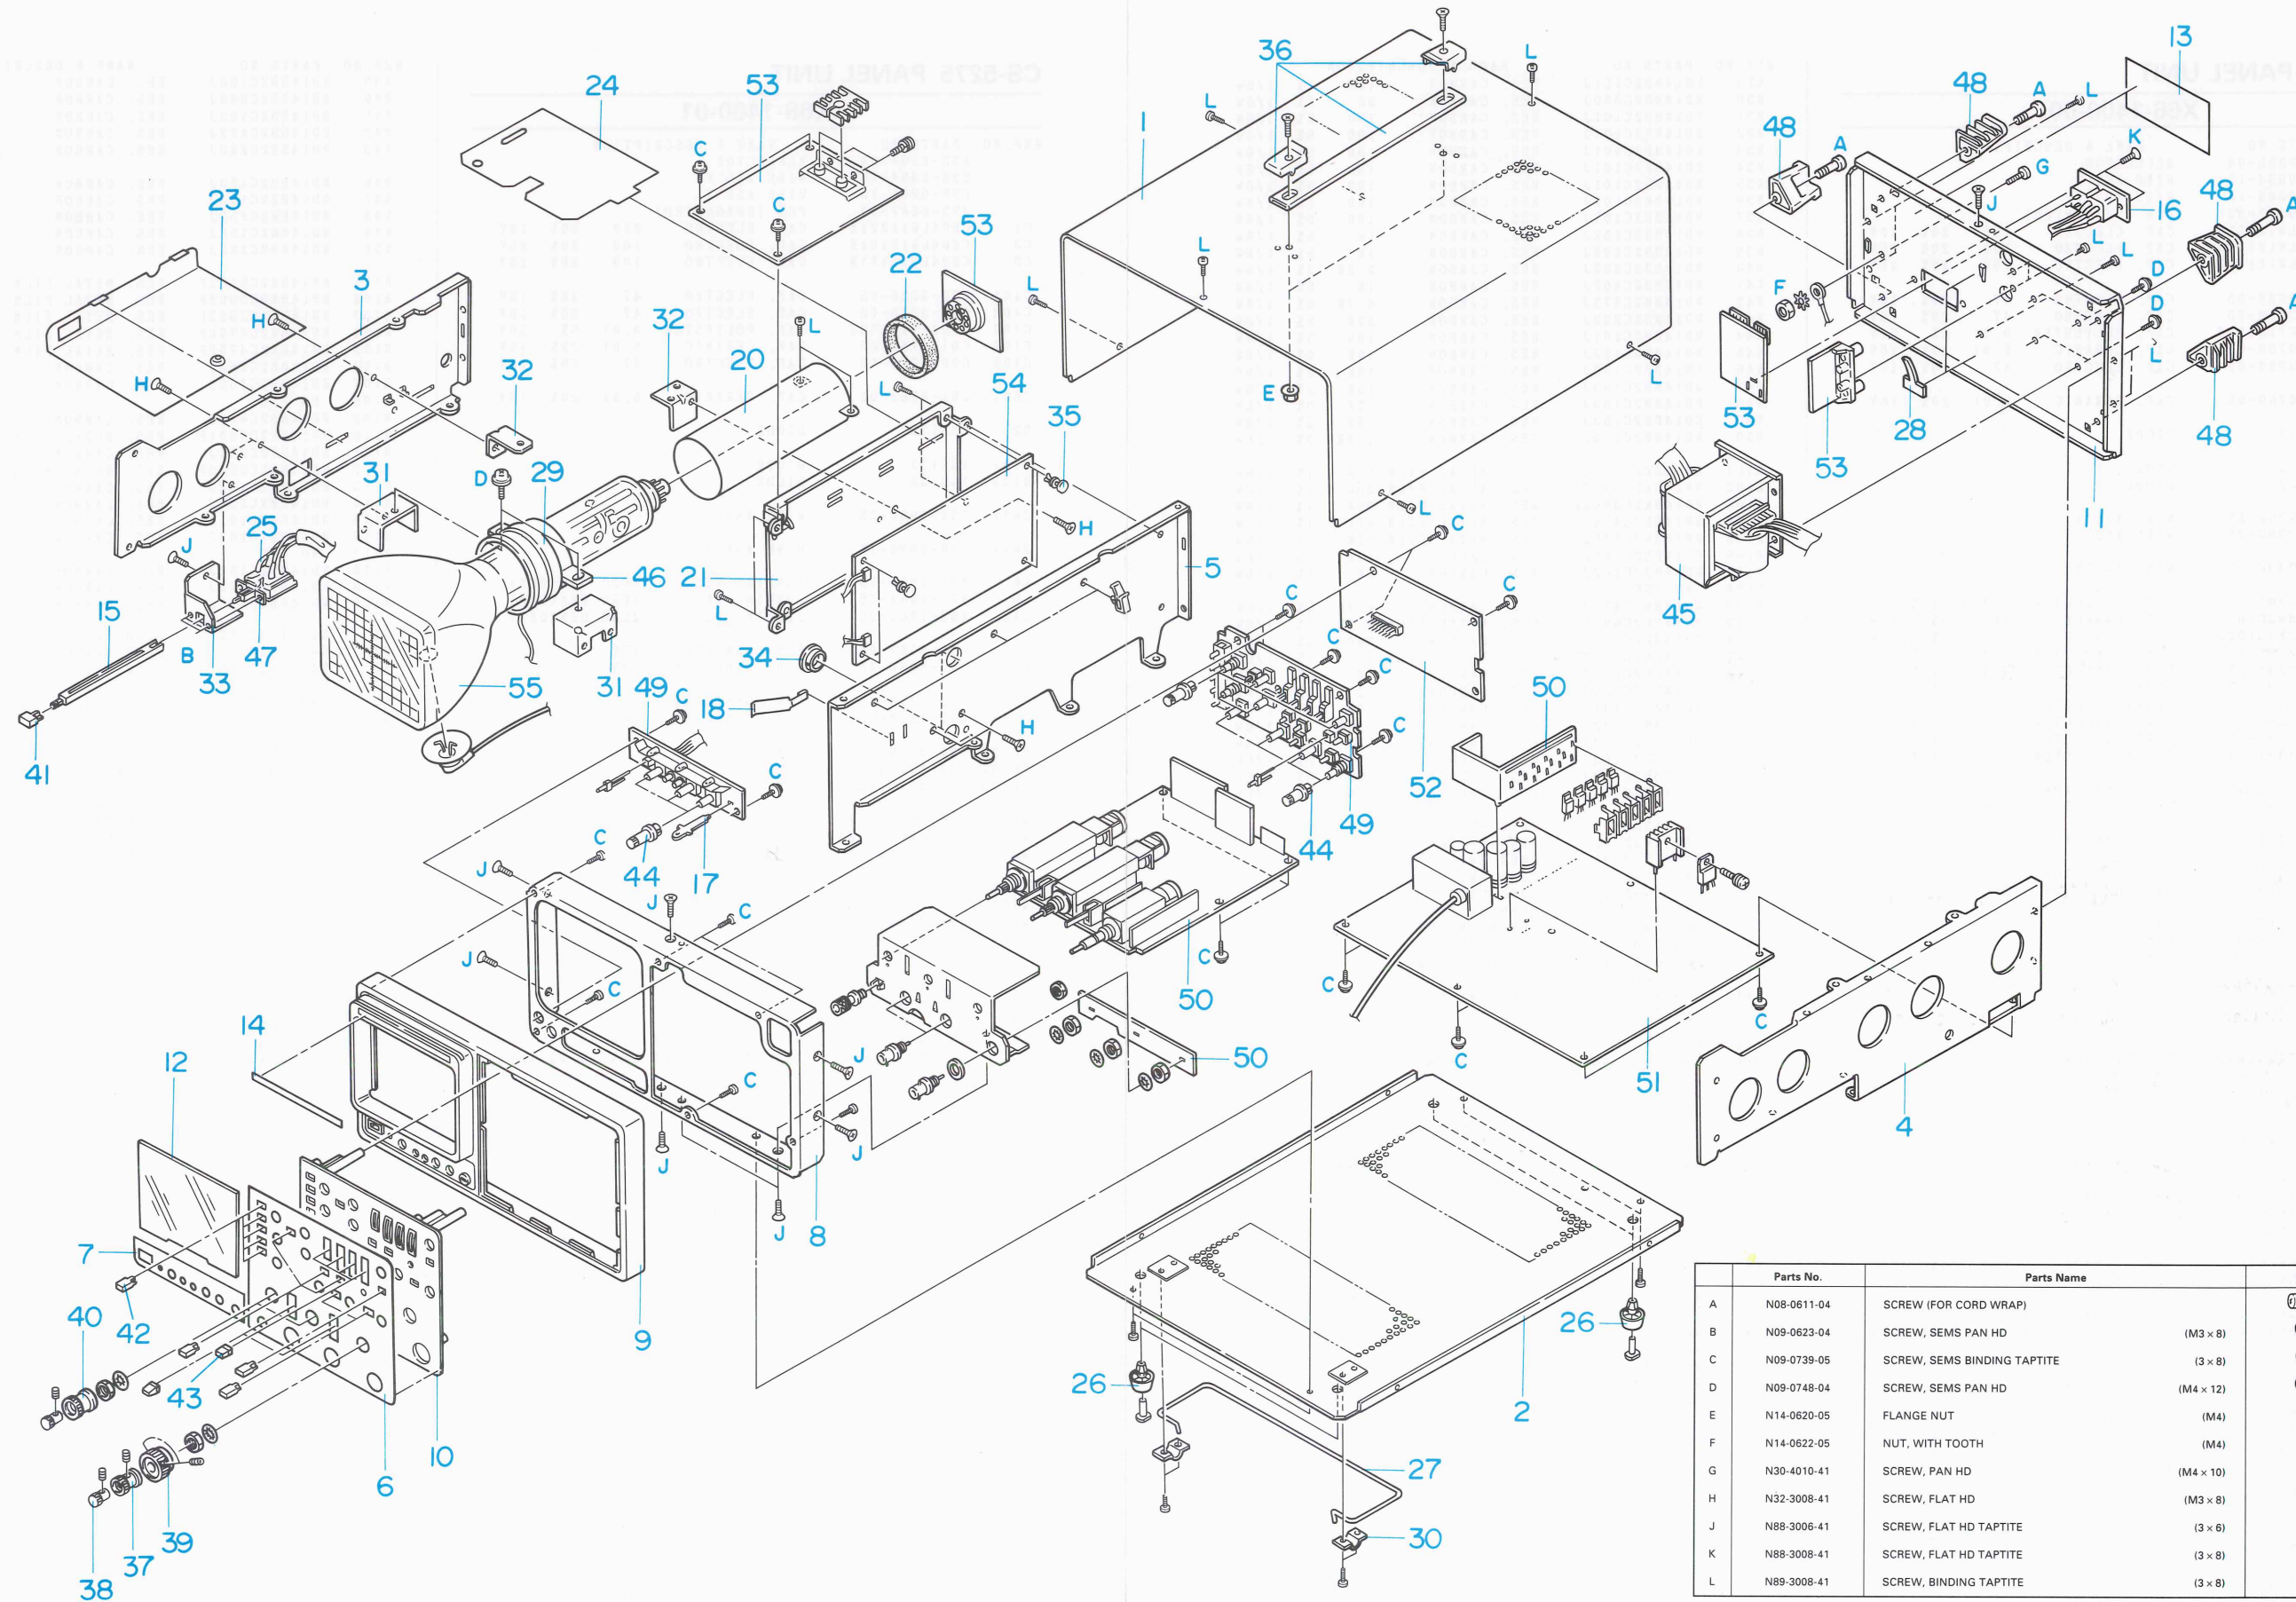

	Parts No.	Parts Name	Figure
A	N08-0611-04	SCREW (FOR CORD WRAP)	
B	N09-0623-04	SCREW, SEMS PAN HD	(M3 x 8)
C	N09-0739-05	SCREW, SEMS BINDING TAPTITE	(3 x 8)
D	N09-0748-04	SCREW, SEMS PAN HD	(M4 x 12)
E	N14-0620-05	FLANGE NUT	(M4)
F	N14-0622-05	NUT, WITH TOOTH	(M4)
G	N30-4010-41	SCREW, PAN HD	(M4 x 10)
H	N32-3008-41	SCREW, FLAT HD	(M3 x 8)
J	N88-3006-41	SCREW, FLAT HD TAPTITE	(3 x 6)
K	N88-3008-41	SCREW, FLAT HD TAPTITE	(3 x 8)
L	N89-3008-41	SCREW, BINDING TAPTITE	(3 x 8)

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
D201	1SS132	DIODE	Q213	2SA1161	TR. SI, PNP
D202	1SS132	DIODE	Q214	2SA1459(K)	TR. SI, PNP
D203	1SS132	DIODE	Q215	2SC1740S(R,S)	TR. SI, NPN
D204	1SS132	DIODE	Q302	2SC1923(O)	TR. SI, NPN
D205	1SS132	DIODE	Q303	2SK404(E)	FET, N-CHANNEL
D206	1SS132	DIODE	Q304	2SC1907	TR. SI, NPN
D207	1SS132	DIODE	Q305	2SA1459(K)	TR. SI, PNP
D208	1SS132	DIODE	Q306	2SA1459(K)	TR. SI, PNP
D301	1SS132	DIODE	Q307	2SC1907	TR. SI, NPN
D302	1SS132	DIODE	Q308	2SC1907	TR. SI, NPN
D303	1SS132	DIODE	Q309	2SC1907	TR. SI, NPN
D304	1SS132	DIODE	Q310	2SA1459(K)	TR. SI, PNP
D305	1SS132	DIODE	Q311	2SA1459(K)	TR. SI, PNP
D306	1SS132	DIODE	Q312	2SC1907	TR. SI, NPN
D307	1SS132	DIODE	Q313	2SA1459(K)	TR. SI, PNP
D308	1SS132	DIODE	Q314	2SA1459(K)	TR. SI, PNP
D309	1SS132	DIODE			
JW6	E38-0985-05	WIRE ASS'Y;V TO H TRG	R1	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
JW10	E38-0986-05	WIRE ASS'Y;V TO H SWP	R2	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
JW301	E38-0987-15	WIRE ASS'Y;CH3 INPUT	R3	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
JW501	E38-0983-25	WIRE ASS'Y;SUB PANEL TO GND	R6	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
L1	L79-0553-05	NOISE FILTER	R7	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
L40	L40-2201-17	FERRI INDUCTOR 22UH 10%	R8	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
L51	L40-4791-17	FERRI INDUCTOR 4.7UH 10%	R9	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
L52	L40-4791-17	FERRI INDUCTOR 4.7UH 10%	R10	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
L301	L40-4781-17	FERRI INDUCTOR 0.47UH 10%	R11	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
P1	E04-0259-05	BNC RECEPTACLE	R12	R92-1553-05	RES. SPECIAL POWER 620 5% 1W
P2	E04-0259-05	BNC RECEPTACLE	R17	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W
P3	E04-0259-05	BNC RECEPTACLE	R18	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W
P4	E40-7515-05	PIN CONNECTOR 3P	R19	RN14BK2C39R0F	RES. METAL FILM 39 1% 1/6W
P9	E40-7518-05	PIN CONNECTOR 6P	R20	RN14BK2C39R0F	RES. METAL FILM 39 1% 1/6W
P12	E40-5066-05	PIN CONNECTOR 9P	R21	NO USE	
P13	E40-7515-05	PIN CONNECTOR 3P	R22	RN14BK2C6802F	RES. METAL FILM 68K 1% 1/6W
P201	E40-7432-05	PIN CONNECTOR 13P	R31	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
P202	E40-7423-05	PIN CONNECTOR 4P	R32	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
P203	E40-7430-05	PIN CONNECTOR 11P	R33	RD14BB2C751J	RES. CARBON 750 5% 1/6W
P204	E40-7426-05	PIN CONNECTOR 7P	R34	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
P205	E40-7422-05	PIN CONNECTOR 3P	R35	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
P206	E40-7426-05	PIN CONNECTOR 7P	R36	R90-0645-05	RES. NETWORK 4X10K
P207	E40-7432-05	PIN CONNECTOR 13P	R37	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
P208	E40-7432-05	PIN CONNECTOR 13P	R38	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q1	2SC1740S(R,S)	TR. SI, NPN	R39	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q2	2SC3779(D)	TR. SI, NPN	R40	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q3	2SC3779(D)	TR. SI, NPN	R41	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
Q32	2SC3066(G)	TR. SI, NPN	R42	RD14BB2C100J	RES. CARBON 10 5% 1/6W
Q33	2SC1740S(R,S)	TR. SI, NPN	R43	RD14BB2C100J	RES. CARBON 10 5% 1/6W
Q34	2SA933S(R,S)	TR. SI, PNP	R44	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
Q51	2SC1923(O)	TR. SI, NPN	R45	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
Q101	2SC1923(O)	TR. SI, NPN	R52	RD14BB2C391J	RES. CARBON 390 5% 1/6W
Q102	2SK404(E)	FET, N-CHANNEL	R59	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
Q103	2SC1907	TR. SI, NPN	R62	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q106	2SC3779(D)	TR. SI, NPN	R63	RD14BB2C201J	RES. CARBON 200 5% 1/6W
Q107	2SC3779(D)	TR. SI, NPN	R64	RD14BB2C133J	RES. CARBON 13K 5% 1/6W
Q108	2SA1459(K)	TR. SI, PNP	R65	RD14BB2C910J	RES. CARBON 91 5% 1/6W
Q109	2SA1459(K)	TR. SI, PNP	R66	RD14BB2C910J	RES. CARBON 91 5% 1/6W
Q110	2SA1459(K)	TR. SI, PNP	R67	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q111	2SA1459(K)	TR. SI, PNP	R68	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q112	2SA1161	TR. SI, PNP	R69	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q113	2SA1161	TR. SI, PNP	R70	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q114	2SA1459(K)	TR. SI, PNP	R71	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q201	2SC1923(O)	TR. SI, NPN	R101	RD14BB2E220J	RES. CARBON 22 5% 1/4W
Q202	2SK404(E)	FET, N-CHANNEL	R102	NO USE	
Q203	2SC1907	TR. SI, NPN	R103	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q206	2SC3779(D)	TR. SI, NPN	R104	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q207	2SC3779(D)	TR. SI, NPN	R107	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
Q208	2SA1459(K)	TR. SI, PNP	R108	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q209	2SA1459(K)	TR. SI, PNP	R109	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
Q210	2SA1459(K)	TR. SI, PNP	R110	NO USE	
Q211	2SA1459(K)	TR. SI, PNP	R111	RD14BB2C160J	RES. CARBON 16 5% 1/6W
Q212	2SA1161	TR. SI, PNP	R112	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
			R113	NO USE	
			R114	RD14BB2C220J	RES. CARBON 22 5% 1/6W
			R115	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
			R116	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
			R117	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
			R118	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
			R119	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
			R120	RD14BB2C301J	RES. CARBON 300 5% 1/6W
			R121	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
			R122	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
			R123	RD14BB2C331J	RES. CARBON 330 5% 1/6W
			R124	RD14BB2C103J	RES. CARBON 10K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
C144	C91-0737-05	CAP. CERAMIC 47P 5% 50V	D7	1SS132	DIODE
C145	CE04LW1C100M	CAP. ELECTRO 10 20% 16V	D8	1SS132	DIODE
C146	CC45FSL1H030C	CAP. CERAMIC 3P 0.25P 50V	D9	1SS132	DIODE
C201	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V	D10	1SS132	DIODE
C202	NO USE		D11	1SS132	DIODE
C203	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V	D12	MA700	DIODE
C204	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D13	1SS132	DIODE
C205	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D14	1SS132	DIODE
C206	NO USE		D15	1SS132	DIODE
C207	CK45B2H472K	CAP. CERAMIC 4700P 10% 500V	D16	1SS132	DIODE
C208	CE04W2E010M	CAP. ELECTRO 1 20% 250V	D17	1SS132	DIODE
C209	CC45FCH2H020C	CAP. CERAMIC 2P 0.25P 500V	D18	1SS132	DIODE
C210	CK45B2H472K	CAP. CERAMIC 4700P 10% 500V	D101	1SS132	DIODE
C211	CE04W2E010M	CAP. ELECTRO 1 20% 250V	D102	1SS132	DIODE
C212	CE04W2E010M	CAP. ELECTRO 1 20% 250V	D103	1SS132	DIODE
C213	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V	D104	1SS132	DIODE
C214	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V	D105	1SS132	DIODE
C215	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K	D106	1SS132	DIODE
C216	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K	D107	1SS132	DIODE
C217	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K	D108	1SS132	DIODE
C218	CE04W2E010M	CAP. ELECTRO 1 20% 250V	D109	MA700	DIODE
C219	NO USE		D110	1SS132	DIODE
C220	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K	D111	1SS132	DIODE
C221	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K	D112	1SS132	DIODE
C222	CE04LW1E221M	CAP. ELECTRO 220 20% 25V	D113	1SS132	DIODE
C223	CE04LW1H101M	CAP. ELECTRO 100 20% 50V	D114	MA700	DIODE
C224	CK45FB1H472K	CAP. CERAMIC 4700P 10% 50V	D115	1SS132	DIODE
C227	CC45FCH2H101J	CAP. CERAMIC 100P 5% 500V	D116	1SS132	DIODE
C228	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V	D117	1SS132	DIODE
C229	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K	D118	1SS132	DIODE
C230	CK45E3D102P	CAP. CERAMIC 1000P 2KV	D119	1SS132	DIODE
C231	C91-2581-05	CAP. CERAMIC 0.01 5% 2KV	D120	1SS132	DIODE
C232	CE04W2E010M	CAP. ELECTRO 1 20% 250V	D121	1SS132	DIODE
C233	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	D122	1SS132	DIODE
C234	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	D123	1SS132	DIODE
C301	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V	D124	1SS132	DIODE
C302	CC45FSL1H331J	CAP. CERAMIC 330P 5% 50V	D125	1SS132	DIODE
C303	C91-0713-05	CAP. CERAMIC 2.2 10% 50V	D126	1SS132	DIODE
C306	C91-1361-05	CAP. NYLAR 0.01 10% 100V	D127	1SS132	DIODE
C307	C91-2585-05	CAP. NYLAR 0.01 10% 250V	D128	1SS132	DIODE
C308	C91-2587-05	CAP. NYLAR 0.1 10% 250V	D129	1SS132	DIODE
C309	C91-1361-05	CAP. NYLAR 0.01 10% 100V	D130	MA700	DIODE
C310	C91-2587-05	CAP. NYLAR 0.1 10% 250V	D131	NO USE	
C311	C91-2585-05	CAP. NYLAR 0.01 10% 250V	D132	MA700	DIODE
C314	CK45FB2H152K	CAP. CERAMIC 1500P 10% 500V	D133	MA700	DIODE
C315	NO USE		D201	1SS132	DIODE
C316	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V	D202	1SS132	DIODE
C317	NO USE		D203	1SS83	DIODE
C318	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V	D204	1SS83	DIODE
C319	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D205	1SS83	DIODE
C320	NO USE		D206	1SS83	DIODE
C321	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D207	1SS83	DIODE
C322	CE04LW1A221M	CAP. ELECTRO 220 20% 10V	D208	1SS83	DIODE
C323	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V	D209	1SS83	DIODE
C324	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V	D210	1SS83	DIODE
C325	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	D211	1SS132	DIODE
C401	CE04W2E470M	CAP. ELECTRO 47 20% 250V	D212	1SS132	DIODE
C402	CE04W2E100M	CAP. ELECTRO 10 20% 250V	D213	1SS132	DIODE
C403	CE04LW1E220M	CAP. ELECTRO 22 20% 25V	D301	MA700	DIODE
C404	CE04E2A471M	CAP. ELECTRO 470 20% 100V	D302	1SS132	DIODE
C405	CE04LW2A220M	CAP. ELECTRO 22 20% 100V	D303	MTZ3.0JA	DIODE, ZENER
C406	CE04E1E472M	CAP. ELECTRO 4700 20% 25V	D304	1SS132	DIODE
C407	CE04LW1C331M	CAP. ELECTRO 330 20% 16V	D305	1SS132	DIODE
C408	CE04E1E472M	CAP. ELECTRO 4700 20% 25V	D306	MA700	DIODE
C409	CE04E1C332M	CAP. ELECTRO 3300 20% 16V	D307	MA700	DIODE
C410	CE04LW0J471M	CAP. ELECTRO 470 20% 6.3V	D308	TLR112	LED, RED
C411	CE04LW1C331M	CAP. ELECTRO 330 20% 16V	D309	TLR112	LED, RED
C412	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V	D312	MTZ5.1JB	DIODE, ZENER
C413	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	D313	1SS132	DIODE
C414	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	D314	NO USE	
C415	CE04E1E102M	CAP. ELECTRO 1000 20% 25V	D315	1SS132	DIODE
C416	CE04E1E102M	CAP. ELECTRO 1000 20% 25V	D316	MTZ3.0JA	DIODE, ZENER
C417	C91-0761-05	CAP. CERAMIC 2200P 20% 50V	D401	S1VB60	DIODE, STACK
C418	C91-0757-05	CAP. CERAMIC 1000P 10% 50V	D402	S1VB60	DIODE, STACK
C801	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D403	S4VB20F	DIODE, STACK
C901	CF92V1H103J	CAP. POLYESTER 0.01 5% 50V	D404	S1VB60	DIODE, STACK
D1	MA700	DIODE	D405	1SS132	DIODE
D2	MA700	DIODE	D406	1SS132	DIODE
D3	MA700	DIODE	D407	MTZ13JC	DIODE, ZENER
D4	MA700	DIODE	D408	MTZ13JC	DIODE, ZENER
D5	MA700	DIODE	D409	MTZ7.5JA	DIODE, ZENER
D6	1SS132	DIODE	D801	MA700	DIODE
F201	F53-0107-05	THERMAL FUSE 400MA/125V			

PARTS LIST

REF. NO PARTS NO NAME & DESCRIPTION

JW1	E38-1005-05	WIRE ASS'Y:3P		
JW2	E38-1006-05	WIRE ASS'Y:6P		
JW9	E38-0988-15	WIRE ASS'Y:H TO V		
JW14	E38-0989-05	WIRE ASS'Y:H TO FINAL		
JW18	E38-0990-05	WIRE ASS'Y:H TO CRT		
JW19	E38-0991-05	WIRE ASS'Y:H TO BNC		
K301	S76-0627-05	RELAY		
L101	L79-0553-05	NOISE FILTER		
L201	L40-1545-06	FERRI INDUCTOR	150MH	5%
L202	L40-1011-04	FERRI INDUCTOR	100UH	10%
L203	L40-1011-04	FERRI INDUCTOR	100UH	10%
L204	L40-3925-05	FERRI INDUCTOR	3.9MH	5%
L301	L40-1001-11	FERRI INDUCTOR	10UH	10%
NL201	NE-38B	NEON LAMP		
NL202	NE-38B	NEON LAMP		
NL203	NE-38B	NEON LAMP		
NL204	NE-38B	NEON LAMP		
P6	E40-7515-05	PIN CONNECTOR	3P	
P7	E40-7519-05	PIN CONNECTOR	4P	
P8	E40-7040-05	PIN CONNECTOR	13P	
P9	NO USE			
P10	E40-5066-05	PIN CONNECTOR	9P	
P15	E40-5067-05	PIN CONNECTOR	10P	
P16	E40-5069-05	PIN CONNECTOR	12P	
P17	E40-3306-05	PIN CONNECTOR	9P	
P20	E40-3299-05	PIN CONNECTOR	2P	
P24	E40-3243-05	PIN CONNECTOR	8P	
Q3	2SC1740S(R,S)	TR. SI, NPN		
Q4	2SC1923(O)	TR. SI, NPN		
Q5	2SC1923(O)	TR. SI, NPN		
Q6	2SC3779(D)	TR. SI, NPN		
Q7	2SC3779(D)	TR. SI, NPN		
Q8	NO USE			
Q9	2SA1459(K)	TR. SI, PNP		
Q10	2SC1740S(R,S)	TR. SI, NPN		
Q11	2SC1740S(R,S)	TR. SI, NPN		
Q12	2SA1005(K)	TR. SI, PNP		
Q13	2SC1740S(R,S)	TR. SI, NPN		
Q14	2SC1740S(R,S)	TR. SI, NPN		
Q15	2SA1005(K)	TR. SI, PNP		
Q16	2SA1005(K)	TR. SI, PNP		
Q17	2SA933S(R,S)	TR. SI, PNP		
Q18	2SA933S(R,S)	TR. SI, PNP		
Q19	2SC1740S(R,S)	TR. SI, NPN		
Q20	2SA933S(R,S)	TR. SI, PNP		
Q21	2SC1907	TR. SI, NPN		
Q28	2SA1459(K)	TR. SI, PNP		
Q101	2SK170(V)	FET, N-CHANNEL		
Q102	2SC1923(O)	TR. SI, NPN		
Q103	2SA933S(R,S)	TR. SI, PNP		
Q104	2SC1740S(R,S)	TR. SI, NPN		
Q105	2SC1740S(R,S)	TR. SI, NPN		
Q106	2SC1740S(R,S)	TR. SI, NPN		
Q107	2SK170(V)	FET, N-CHANNEL		
Q108	2SC1923(O)	TR. SI, NPN		
Q109	2SC3066(G)	TR. SI, NPN		
Q110	2SA1459(K)	TR. SI, PNP		
Q111	2SA933S(R,S)	TR. SI, PNP		
Q112	2SA933S(R,S)	TR. SI, PNP		
Q113	2SA1005(K)	TR. SI, PNP		
Q114	2SA1005(K)	TR. SI, PNP		
Q115	2SA1005(K)	TR. SI, PNP		
Q116	2SA1005(K)	TR. SI, PNP		
Q117	2SC1923(O)	TR. SI, NPN		
Q118	2SC1923(O)	TR. SI, NPN		
Q119	2SA933S(R,S)	TR. SI, PNP		
Q120	2SA1459(K)	TR. SI, PNP		
Q121	2SC1923(O)	TR. SI, NPN		
Q122	2SC1740S(R,S)	TR. SI, NPN		
Q123	2SC1740S(R,S)	TR. SI, NPN		
Q124	2SC1740S(R,S)	TR. SI, NPN		
Q125	2SC1740S(R,S)	TR. SI, NPN		
Q126	2SC1740S(R,S)	TR. SI, NPN		
Q127	2SA1005(K)	TR. SI, PNP		

REF. NO PARTS NO NAME & DESCRIPTION

Q151	2SA1459(K)	TR. SI, PNP		
Q152	2SA1459(K)	TR. SI, PNP		
Q158	2SA1459(K)	TR. SI, PNP		
Q201	2SA933S(R,S)	TR. SI, PNP		
Q202	2SA933S(R,S)	TR. SI, PNP		
Q203	2SC1923(O)	TR. SI, NPN		
Q204	2SC1740S(R,S)	TR. SI, NPN		
Q205	2SA933S(R,S)	TR. SI, PNP		
Q206	2SC2910(S)	TR. SI, NPN		
Q207	2SA1208(S)	TR. SI, PNP		
Q208	2SC2910(S)	TR. SI, NPN		
Q209	2SA1208(S)	TR. SI, PNP		
Q210	2SC2551(O)	TR. SI, NPN		
Q211	2SC2551(O)	TR. SI, NPN		
Q212	2SA933S(R,S)	TR. SI, PNP		
Q213	2SD613(E)	TR. SI, NPN		
Q301	2SC1740S(R,S)	TR. SI, NPN		
Q302	2SC1740S(R,S)	TR. SI, NPN		
Q303	2SC1740S(R,S)	TR. SI, NPN		
Q304	2SC1740S(R,S)	TR. SI, NPN		
Q305	2SA933S(R,S)	TR. SI, PNP		
Q306	2SA1005(K)	TR. SI, PNP		
Q307	2SA1005(K)	TR. SI, PNP		
Q308	2SC1740S(R,S)	TR. SI, NPN		
Q309	2SC1740S(R,S)	TR. SI, NPN		
Q310	2SA933S(R,S)	TR. SI, PNP		
Q311	2SA933S(R,S)	TR. SI, PNP		
Q312	2SC1740S(R,S)	TR. SI, NPN		
Q313	2SC1740S(R,S)	TR. SI, NPN		
Q314	2SC1907	TR. SI, NPN		
Q315	2SC1907	TR. SI, NPN		
Q316	2SA1459(K)	TR. SI, PNP		
Q317	2SA1459(K)	TR. SI, PNP		
Q318	2SC1907	TR. SI, NPN		
Q319	2SC1907	TR. SI, NPN		
Q320	2SC4732(E)	TR. SI, NPN		
Q321	2SC4732(E)	TR. SI, NPN		
Q322	2SA1828(E)	TR. SI, PNP		
Q323	2SA1828(E)	TR. SI, PNP		
Q324	2SA933S(R,S)	TR. SI, PNP		
Q401	2SA1499(P)	TR. SI, PNP		
Q402	2SC2551(O)	TR. SI, NPN		
Q403	2SA1304	TR. SI, PNP		
Q404	2SC2551(O)	TR. SI, NPN		
Q405	2SB1015(Y)	TR. SI, PNP		
Q406	2SD1406(Y)	TR. SI, NPN		
Q407	2SB1015(Y)	TR. SI, PNP		
R1	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R2	RD14BB2C470J	RES. CARBON	47	5% 1/6W
R3	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R4	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R5	RD14BB2C152J	RES. CARBON	1.5K	5% 1/6W
R6	RD14BB2C822J	RES. CARBON	8.2K	5% 1/6W
R7	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R8	RD14BB2C181J	RES. CARBON	180	5% 1/6W
R9	RD14BB2C105J	RES. CARBON	1K	5% 1/6W
R10	RD14BB2C105J	RES. CARBON	1K	5% 1/6W
R11	RD14BB2C105J	RES. CARBON	1K	5% 1/6W
R12	RD14BB2C105J	RES. CARBON	1K	5% 1/6W
R13	NO USE			
R14	RD14BB2C104J	RES. CARBON	100K	5% 1/6W
R15	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R16	RD14BB2C751J	RES. CARBON	750	5% 1/6W
R17	RD14BB2C821J	RES. CARBON	820	5% 1/6W
R18	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R19	RD14BB2C470J	RES. CARBON	47	5% 1/6W
R20	RD14BB2C102J	RES. CARBON	1K	5% 1/6W
R21	RD14BB2C473J	RES. CARBON	47K	5% 1/6W
R22	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R23	RD14BB2C472J	RES. CARBON	4.7K	5% 1/6W
R24	RD14BB2C622J	RES. CARBON	6.2K	5% 1/6W
R25	RD14BB2C512J	RES. CARBON	5.1K	5% 1/6W
R26	RD14BB2C331J	RES. CARBON	330	5% 1/6W
R27	RD14BB2C750J	RES. CARBON	75	5% 1/6W
R28	RD14BB2C750J	RES. CARBON	75	5% 1/6W
R29	RD14BB2C680J	RES. CARBON	68	5% 1/6W
R30	RD14BB2C390J	RES. CARBON	39	5% 1/6W
R31	RD14BB2C122J	RES. CARBON	1.2K	5% 1/6W
R32	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R33	RD14BB2C681J	RES. CARBON	680	5% 1/6W
R34	NO USE			
R35	RD14BB2C223J	RES. CARBON	22K	5% 1/6W
R36	NO USE			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R231	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R232	RD14BB2C134J	RES. CARBON 130K 5% 1/6W
R233	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R234	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R235	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R236	R92-1563-05	RES. METALGLACE 10M 5% 1/4W
R237	R92-1563-05	RES. METALGLACE 10M 5% 1/4W
R238	R92-1562-05	RES. METALGLACE 8.2M 5% 1/4W
R239	R92-1561-05	RES. METALGLACE 3.9M 5% 1/4W
R240	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R241	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R242	RD14BB2C683J	RES. CARBON 68K 5% 1/6W
R243	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R244	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R245	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R246	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R247	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R248	RN14BK2C1203F	RES. METAL FILM 120K 1% 1/6W
R249	R92-1564-05	RES. METALGLACE 15M 1% 1/2W
R250	RD14BB2C124J	RES. CARBON 120K 5% 1/6W
R251	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R252	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R253	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R254	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R255	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R256	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R257	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R258	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R259	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R260	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R261	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R262	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R263	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R264	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R265	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R266	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R267	RD14BB2C224J	RES. CARBON 220K 5% 1/6W
R268	RD14BB2C204J	RES. CARBON 200K 5% 1/6W
R269	R92-1573-05	RES. LINEAR PCT 2.7K 5% 1/6W
R300	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R301	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R302	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R303	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R304	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R305	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R306	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R307	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R308	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R309	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R310	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R311	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R312	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R313	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R314	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R315	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R316	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R317	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R318	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R319	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R320	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R321	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R322	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R323	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R324	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R325	RD14BB2C0912J	RES. CARBON 9.1K 5% 1/6W
R326	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R327	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R328	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R329	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R330	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R331	RD14BB2C271J	RES. CARBON 270 5% 1/6W
R332	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R333	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R334	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R335	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R336	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R337	RD14BB2C241J	RES. CARBON 240 5% 1/6W
R338	RD14BB2C241J	RES. CARBON 240 5% 1/6W
R339	NO USE	
R340	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R341	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R342	RD14BB2C0912J	RES. CARBON 9.1K 5% 1/6W
R343	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R344	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R345	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R346	RD14BB2C561J	RES. CARBON 560 5% 1/6W
R347	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R348	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R349	R92-1552-05	RES. LINEAR PCT 180
R350	RD14BB2C163J	RES. CARBON 16K 5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
R351	NO USE	
R352	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R353	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R354	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R355	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R356	NO USE	
R357	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R358	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R359	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R360	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R361	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R362	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R363	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R364	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
R365	RN14BK2C6201F	RES. METAL FILM 6.2K 1% 1/6W
R366	R92-1560-05	RES. LINEAR PCT 2K
R367	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R368	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R369	RD14BB2C204J	RES. CARBON 200K 5% 1/6W
R370	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R371	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R372	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R373	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R374	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R375	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R376	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R377	R92-1558-05	RES. SPECIAL POWER 39K 5% 1W
R378	R92-1558-05	RES. SPECIAL POWER 39K 5% 1W
R381	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R382	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R383	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R384	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R385	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
R386	RN14BK2C1303F	RES. METAL FILM 130K 1% 1/6W
R387	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R388	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R389	NO USE	
R390	RD14BB2C913J	RES. CARBON 91K 5% 1/6W
R394	R92-1559-05	RES. SPECIAL POWER 47K 5% 1W
R395	R92-1559-05	RES. SPECIAL POWER 47K 5% 1W
R396	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R397	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R398	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R399	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R400	NO USE	
R401	R92-1557-05	RES. SPECIAL POWER 6.8K 5% 2W
R402	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R403	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R404	R92-1556-05	RES. SPECIAL POWER 1K 5% 2W
R405	R92-1556-05	RES. SPECIAL POWER 1K 5% 2W
R406	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R407	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R408	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R409	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R410	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R411	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R412	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R413	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R414	R92-1554-05	RES. SPECIAL POWER 15 5% 2W
R415	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R416	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R417	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
TC101	C05-0470-05	CAP. TRIMMER 20P
TC102	C05-0470-05	CAP. TRIMMER 20P
TC303	C05-0490-05	CAP. TRIMMER 20P
TH301	112-103-2FM	THERMISTOR
U1	TC4053BP	IC, TRIPLE 2-CH MPX/DE-MPX
U2	NJM072BD	IC, JFET INPUT OP AMP
U3	MC10H102L	IC, GATE FUNCTION
U4	KMS01	IC, LINEAR
U101	MC10H131L	IC, DUAL D-FILP FLOP
U102	KND05	IC, LINEAR
U103	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U104	KNS01	IC, LINEAR
U105	KND05	IC, LINEAR
U106	SN74ALS02N	IC, QUAD 2 INPUT NOR
U107	KNS01	IC, LINEAR
U108	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U109	TC74HC4053AP	IC, TRIPLE 2-CH ANALOG MPX
U201	NJK4558D	IC, DUAL OP-AMP
U301	TC74HC4053AP	IC, TRIPLE 2-CH ANALOG MPX
U302	KNG01	IC, LINEAR

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
U401	KNA02	IC, LINEAR
VR1	R12-0680-05	RES. SEMI FIXED 47K
VR2	R12-0680-05	RES. SEMI FIXED 47K
VR102	R12-0694-05	RES. SEMI FIXED 4.7KB
VR103	R12-0680-05	RES. SEMI FIXED 47K
VR104	R12-1860-05	RES. SEMI FIXED 1KB
VR201	R12-5545-05	RES. SEMI FIXED 2.2MB
VR202	R12-6507-05	RES. SEMI FIXED 470K
VR301	R12-0680-05	RES. SEMI FIXED 47K
VR302	R12-0882-05	RES. SEMI FIXED 100 B
VR303	R12-0678-05	RES. SEMI FIXED 10KB
VR304	R12-0694-05	RES. SEMI FIXED 4.7KB
VR305	R12-6501-05	RES. SEMI FIXED 470KB
VR306	R12-0680-05	RES. SEMI FIXED 47K
VR307	R12-0680-05	RES. SEMI FIXED 47K
VR308	R12-0890-05	RES. SEMI FIXED 470 B
VR309	R12-0883-05	RES. SEMI FIXED 220 B
W201	W02-2256-05	HIGH VOLTAGE BLOCK

CS-5275 HORIZONTAL UNIT

X74-1580-03

REF. NO	PARTS NO	NAME & DESCRIPTION
	E23-0149-05	GND TERMINAL
	E23-0557-14	EARTH LUG, THERMAL FUSE
	F01-0867-05	HEAT SINK, HIGH VOLTAGE
	F01-2316-05	HEAT SINK, POWER
	J73-0284-22	PCB (UNMOUNTED)
	N09-0623-04	SCREW, SEMS PAN HD M3X8
C1	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C2	NO USE	
C3	C91-2595-05	CAP. CERAMIC 68P 5% 50V
C4	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V
C5	C91-2596-05	CAP. CERAMIC 82P 5% 50V
C6	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C7	CC45FCH1H010C	CAP. CERAMIC 1P 0.25P 50V
C8	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C9	NO USE	
C10	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V
C11	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C12	C91-2538-05	CAP. NYLAR 0.1 63V
C13	C91-2593-05	CAP. CERAMIC 47P 5% 50V
C14	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C15	NO USE	
C16	CE04LW1E100M	CAP. ELECTRO 10 20% 25V
C17	CE04LW1H010M	CAP. ELECTRO 1 20% 50V
C18	CE04LW1H010M	CAP. ELECTRO 1 20% 50V
C19	CF92FV1H682J	CAP. POLYESTER 6800P 5% 50V
C20	CF92FV1H222J	CAP. POLYESTER 2200P 5% 50V
C21	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C22	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C23	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C24	NO USE	
C25	CE04LW1E100M	CAP. ELECTRO 10 20% 25V
C26	CF92FV1H684J	CAP. POLYESTER 0.68 5% 50V
C27	CF92FV1H684J	CAP. POLYESTER 0.68 5% 50V
C28	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C29	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C30	C91-2538-05	CAP. NYLAR 0.1 63V
C31	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
C32	CE04EW1A101M	CAP. ELECTRO 100 20% 10V
C33	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
C34	CE04LW1C331M	CAP. ELECTRO 330 20% 16V
C37	CC45FSL1H221J	CAP. CERAMIC 220P 5% 50V
C38	C91-0745-05	CAP. CERAMIC 100P 10% 50V
C39	C91-0745-05	CAP. CERAMIC 100P 10% 50V
C101	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C102	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C103	CF92FV1H332J	CAP. POLYESTER 3300P 5% 50V
C104	C91-2582-05	CAP. POLYESTER 0.47 5% 100V
C105	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
C106	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C107	CE04HW1H2R2M	CAP. ELECTRO 2.2 20% 50V
C108	CC45FCH1H010J	CAP. CERAMIC 100P 5% 50V
C109	NO USE	
C110	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C111	CF92FV1H104J	CAP. POLYESTER 0.1 5% 50V
C112	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
C113	CC45FCH1H330J	CAP. CERAMIC 33P 5% 50V

REF. NO	PARTS NO	NAME & DESCRIPTION
C114	CE04LW1A220M	CAP. ELECTRO 22 20% 10V
C115	C91-2604-05	CAP. CERAMIC 390P 5% 50V
C116	C91-2598-05	CAP. CERAMIC 120P 5% 50V
C117	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
C118	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
C119	NO USE	
C120	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C121	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C122	CC45FCH1H390J	CAP. CERAMIC 39P 5% 50V
C123	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C124	C91-2582-05	CAP. POLYESTER 0.47 5% 100V
C125	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
C126	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C127	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C128	C91-2538-05	CAP. NYLAR 0.1 63V
C129	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C132	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C135	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
C136	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
C137	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
C138	CE04LW1C101M	CAP. ELECTRO 100 20% 16V
C139	CC45FSL1H331J	CAP. CERAMIC 330P 5% 50V
C140	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C141	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C142	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C143	C91-0737-05	CAP. CERAMIC 47P 5% 50V
C144	C91-0737-05	CAP. CERAMIC 47P 5% 50V
C145	CE04LW1C100M	CAP. ELECTRO 10 20% 16V
C146	CC45FSL1H030C	CAP. CERAMIC 3P 0.25P 50V
C201	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C202	NO USE	
C203	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V
C204	NO USE	
C205	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C206	NO USE	
C207	CK45B2H472K	CAP. CERAMIC 4700P 10% 500V
C208	CE04W2E010M	CAP. ELECTRO 1 20% 250V
C209	CC45FCH2H020C	CAP. CERAMIC 2P 0.25P 500V
C210	CK45B2H472K	CAP. CERAMIC 4700P 10% 500V
C211	CE04W2E010M	CAP. ELECTRO 1 20% 250V
C212	CE04W2E010M	CAP. ELECTRO 1 20% 250V
C213	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V
C214	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V
C215	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C216	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C217	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C218	CE04W2E010M	CAP. ELECTRO 1 20% 250V
C219	NO USE	
C220	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C221	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C222	CE04LW1E221M	CAP. ELECTRO 220 20% 25V
C223	CE04LW1H101M	CAP. ELECTRO 100 20% 50V
C224	CK45FB1H472K	CAP. CERAMIC 4700P 10% 50V
C227	CC45FCH2H101J	CAP. CERAMIC 100P 5% 500V
C228	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V
C229	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C230	CK45E3D102P	CAP. CERAMIC 1000P 2KV
C231	C91-2581-05	CAP. CERAMIC 0.01 5% 2KV
C232	CE04W2E010M	CAP. ELECTRO 1 20% 250V
C233	CE04LW1C101M	CAP. ELECTRO 100 20% 16V
C234	CE04LW1C101M	CAP. ELECTRO 100 20% 16V
C301	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C302	CC45FSL1H331J	CAP. CERAMIC 330P 5% 50V
C303	C91-0713-05	CAP. CERAMIC 2.2 10% 50V
C306	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C307	C91-2585-05	CAP. NYLAR 0.01 10% 250V
C308	C91-2587-05	CAP. NYLAR 0.1 10% 250V
C309	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C310	C91-2587-05	CAP. NYLAR 0.1 10% 250V
C311	C91-2585-05	CAP. NYLAR 0.01 10% 250V
C314	CK45FB2H152K	CAP. CERAMIC 1500P 10% 500V
C315	NO USE	
C316	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
C317	NO USE	
C318	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
C319	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C320	NO USE	
C321	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C322	CE04LW1A221M	CAP. ELECTRO 220 20% 10V
C323	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
C324	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
G325	CE04LW1C101M	CAP. ELECTRO 100 20% 16V
C401	CE04W2E470M	CAP. ELECTRO 47 20% 250V

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			
C402	CE04W2E100M	CAP. ELECTRO	10	20%	250V
C403	CE04LW1E220M	CAP. ELECTRO	22	20%	25V
C404	CE04EW2A471M	CAP. ELECTRO	470	20%	100V
C405	CE04LW2A220M	CAP. ELECTRO	22	20%	100V
C406	CE04EW1E472M	CAP. ELECTRO	4700	20%	25V
C407	CE04LW1C331M	CAP. ELECTRO	330	20%	16V
C408	CE04EW1E472M	CAP. ELECTRO	4700	20%	25V
C409	CE04EW1C332M	CAP. ELECTRO	3300	20%	16V
C410	CE04LW0J471M	CAP. ELECTRO	470	20%	6.3V
C411	CE04LW1C331M	CAP. ELECTRO	330	20%	16V
C412	CE04LW0J331M	CAP. ELECTRO	330	20%	6.3V
C413	CE04LW1C101M	CAP. ELECTRO	100	20%	16V
C414	CE04LW1C101M	CAP. ELECTRO	100	20%	16V
C415	CE04EW1E102M	CAP. ELECTRO	1000	20%	25V
C416	CE04EW1E102M	CAP. ELECTRO	1000	20%	25V
C417	C91-0761-05	CAP. CERAMIC	2200P	20%	50V
C418	C91-0757-05	CAP. CERAMIC	1000P	10%	50V
C801	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C901	CF92V1H103J	CAP. POLYESTER	0.01	5%	50V
D1	MA700	DIODE			
D2	MA700	DIODE			
D3	MA700	DIODE			
D4	MA700	DIODE			
D5	MA700	DIODE			
D6	1SS132	DIODE			
D7	1SS132	DIODE			
D8	1SS132	DIODE			
D9	1SS132	DIODE			
D10	1SS132	DIODE			
D11	1SS132	DIODE			
D12	MA700	DIODE			
D13	1SS132	DIODE			
D14	1SS132	DIODE			
D15	1SS132	DIODE			
D16	1SS132	DIODE			
D17	1SS132	DIODE			
D18	1SS132	DIODE			
D101	1SS132	DIODE			
D102	1SS132	DIODE			
D103	1SS132	DIODE			
D104	1SS132	DIODE			
D105	1SS132	DIODE			
D106	1SS132	DIODE			
D107	1SS132	DIODE			
D108	1SS132	DIODE			
D109	MA700	DIODE			
D110	1SS132	DIODE			
D111	NO USE				
D112	1SS132	DIODE			
D113	1SS132	DIODE			
D114	MA700	DIODE			
D115	1SS132	DIODE			
D116	NO USE				
D117	1SS132	DIODE			
D118	1SS132	DIODE			
D119	1SS132	DIODE			
D120	1SS132	DIODE			
D121	1SS132	DIODE			
D122	1SS132	DIODE			
D123	1SS132	DIODE			
D124	1SS132	DIODE			
D125	1SS132	DIODE			
D126	1SS132	DIODE			
D127	1SS132	DIODE			
D128	1SS132	DIODE			
D129	1SS132	DIODE			
D130	MA700	DIODE			
D131	NO USE				
D132	MA700	DIODE			
D133	MA700	DIODE			
D201	1SS132	DIODE			
D202	1SS132	DIODE			
D203	1SS83	DIODE			
D204	1SS83	DIODE			
D205	1SS83	DIODE			
D206	1SS83	DIODE			
D207	1SS83	DIODE			
D208	1SS83	DIODE			
D209	1SS83	DIODE			
D210	1SS83	DIODE			
D211	1SS132	DIODE			
D212	1SS132	DIODE			
D213	1SS132	DIODE			
D301	MA700	DIODE			
D302	1SS132	DIODE			

REF. NO	PARTS NO	NAME & DESCRIPTION			
D303	MTZ3.0JA	DIODE,ZENER			
D304	1SS132	DIODE			
D305	1SS132	DIODE			
D306	MA700	DIODE			
D307	MA700	DIODE			
D308	TLR112	LED,RED			
D309	TLR112	LED,RED			
D312	MTZ5.1JB	DIODE,ZENER			
D313	1SS132	DIODE			
D314	NO USE				
D315	1SS132	DIODE			
D316	MTZ3.0JA	DIODE,ZENER			
D401	S1VB60	DIODE,STACK			
D402	S1VB60	DIODE,STACK			
D403	S4VB20F	DIODE,STACK			
D404	S1VB60	DIODE,STACK			
D405	1SS132	DIODE			
D406	1SS132	DIODE			
D407	MTZ13JC	DIODE,ZENER			
D408	MTZ13JC	DIODE,ZENER			
D409	MTZ7.5JA	DIODE,ZENER			
D801	MA700	DIODE			
F201	F53-0107-05	THERMAL FUSE	400MA/125V		
JW1	E38-1005-05	WIRE ASS'Y;3P			
JW2	E38-1006-05	WIRE ASS'Y;6P			
JW9	E38-0988-15	WIRE ASS'Y;H TO V			
JW14	E38-0989-05	WIRE ASS'Y;H TO FINAL			
JW18	E38-0990-05	WIRE ASS'Y;H TO CRT			
JW19	E38-0991-05	WIRE ASS'Y;H TO BNC			
K301	S76-0627-05	RELAY			
L101	L79-0553-05	NOISE FILTER			
L201	L40-1545-06	FERRI INDUCTOR	150MH	5%	
L202	L40-1011-04	FERRI INDUCTOR	100UH	10%	
L203	L40-1011-04	FERRI INDUCTOR	100UH	10%	
L204	L40-3825-05	FERRI INDUCTOR	3.9MH	5%	
L301	L40-1001-11	FERRI INDUCTOR	10UH	10%	
NL201	NE-38B	NEON LAMP			
NL202	NE-38B	NEON LAMP			
NL203	NE-38B	NEON LAMP			
NL204	NE-38B	NEON LAMP			
P6	E40-7515-05	PIN CONNECTOR	3P		
P7	E40-7519-05	PIN CONNECTOR	4P		
P8	E40-7040-05	PIN CONNECTOR	13P		
P9	NO USE				
P10	E40-5066-05	PIN CONNECTOR	9P		
P15	E40-5067-05	PIN CONNECTOR	10P		
P16	E40-5069-05	PIN CONNECTOR	12P		
P17	E40-3306-05	PIN CONNECTOR	9P		
P20	E40-3299-05	PIN CONNECTOR	2P		
Q3	2SC1740S(R,S)	TR. SI, NPN			
Q4	2SC1923(O)	TR. SI, NPN			
Q5	2SC1923(O)	TR. SI, NPN			
Q6	2SC3778(D)	TR. SI, NPN			
Q7	2SC3778(D)	TR. SI, NPN			
Q8	NO USE				
Q9	2SA1459(K)	TR. SI, PNP			
Q10	2SC1740S(R,S)	TR. SI, NPN			
Q11	2SC1740S(R,S)	TR. SI, NPN			
Q12	2SA1005(K)	TR. SI, PNP			
Q13	2SC1740S(R,S)	TR. SI, NPN			
Q14	2SC1740S(R,S)	TR. SI, NPN			
Q15	2SA1005(K)	TR. SI, PNP			
Q16	2SA1005(K)	TR. SI, PNP			
Q17	2SA933S(R,S)	TR. SI, PNP			
Q18	2SA933S(R,S)	TR. SI, PNP			
Q19	2SC1740S(R,S)	TR. SI, NPN			
Q20	2SA933S(R,S)	TR. SI, PNP			
Q21	2SC1907	TR. SI, NPN			
Q28	2SA1459(K)	TR. SI, PNP			
Q101	2SK170(V)	FET, N-CHANNEL			
Q102	2SC1923(O)	TR. SI, NPN			
Q103	2SA933S(R,S)	TR. SI, PNP			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
Q104	2SC1740S(R,S)	TR. SI, NPN
Q105	2SC1740S(R,S)	TR. SI, NPN
Q106	2SC1740S(R,S)	TR. SI, NPN
Q107	2SK170(Y)	FET, N-CHANNEL
Q108	2SC1923(O)	TR. SI, NPN
Q109	2SC3066(G)	TR. SI, NPN
Q110	2SA1459(K)	TR. SI, PNP
Q111	2SA933S(R,S)	TR. SI, PNP
Q112	2SA933S(R,S)	TR. SI, PNP
Q113	2SA1005(K)	TR. SI, PNP
Q114	2SA1005(K)	TR. SI, PNP
Q115	2SA1005(K)	TR. SI, PNP
Q116	2SA1005(K)	TR. SI, PNP
Q117	2SC1923(O)	TR. SI, NPN
Q118	2SC1923(O)	TR. SI, NPN
Q119	2SA933S(R,S)	TR. SI, PNP
Q120	2SA1459(K)	TR. SI, PNP
Q121	2SC1923(O)	TR. SI, NPN
Q122	2SC1740S(R,S)	TR. SI, NPN
Q123	2SC1740S(R,S)	TR. SI, NPN
Q124	2SC1740S(R,S)	TR. SI, NPN
Q125	2SC1740S(R,S)	TR. SI, NPN
Q126	2SC1740S(R,S)	TR. SI, NPN
Q127	2SA1005(K)	TR. SI, PNP
Q151	2SA1459(K)	TR. SI, PNP
Q152	2SA1459(K)	TR. SI, PNP
Q158	2SA1459(K)	TR. SI, PNP
Q201	2SA933S(R,S)	TR. SI, PNP
Q202	NO USE	
Q203	2SC1923(O)	TR. SI, NPN
Q204	2SC1740S(R,S)	TR. SI, NPN
Q205	2SA933S(R,S)	TR. SI, PNP
Q206	2SC2910(S)	TR. SI, NPN
Q207	2SA1208(S)	TR. SI, PNP
Q208	2SC2910(S)	TR. SI, NPN
Q209	2SA1208(S)	TR. SI, PNP
Q210	2SC2551(O)	TR. SI, NPN
Q211	2SC2551(O)	TR. SI, NPN
Q212	2SA933S(R,S)	TR. SI, PNP
Q213	2SD613(E)	TR. SI, NPN
Q301	2SC1740S(R,S)	TR. SI, NPN
Q302	2SC1740S(R,S)	TR. SI, NPN
Q303	2SC1740S(R,S)	TR. SI, NPN
Q304	2SC1740S(R,S)	TR. SI, NPN
Q305	2SA933S(R,S)	TR. SI, PNP
Q306	2SA1005(K)	TR. SI, PNP
Q307	2SA1005(K)	TR. SI, PNP
Q313	2SC1740S(R,S)	TR. SI, NPN
Q314	2SC1907	TR. SI, NPN
Q315	2SC1907	TR. SI, NPN
Q316	2SA1459(K)	TR. SI, PNP
Q317	2SA1459(K)	TR. SI, PNP
Q318	2SC1907	TR. SI, NPN
Q319	2SC1907	TR. SI, NPN
Q320	2SC4732(E)	TR. SI, NPN
Q321	2SC4732(E)	TR. SI, NPN
Q322	2SA1828(E)	TR. SI, PNP
Q323	2SA1828(E)	TR. SI, PNP
Q324	2SA933S(R,S)	TR. SI, PNP
Q401	2SA1499(P)	TR. SI, PNP
Q402	2SC2551(O)	TR. SI, NPN
Q403	2SA1304	TR. SI, PNP
Q404	2SC2551(O)	TR. SI, NPN
Q405	2SB1015(Y)	TR. SI, PNP
Q406	2SD1406(Y)	TR. SI, NPN
Q407	2SB1015(Y)	TR. SI, PNP
R1	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R2	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R3	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R4	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R5	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R6	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R7	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R8	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R9	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R10	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R11	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R12	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R13	NO USE	
R14	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R15	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R16	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R17	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R18	RD14BB2C101J	RES. CARBON 100 5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
R19	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R22	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R23	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R24	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R25	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R26	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R27	RD14BB2C750J	RES. CARBON 75 5% 1/6W
R28	RD14BB2C750J	RES. CARBON 75 5% 1/6W
R29	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R30	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R31	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R32	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R33	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R34	NO USE	
R35	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R36	NO USE	
R37	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R38	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R39	R90-0660-05	RES. NETWORK 4X1K
R40	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R41	RD14BB2C683J	RES. CARBON 68K 5% 1/6W
R42	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R43	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R44	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R45	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R46	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R47	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R48	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R49	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R50	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R51	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R52	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R53	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R54	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R55	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R56	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R57	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R58	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R59	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R60	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R61	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R62	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R63	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R64	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R65	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R66	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R67	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R68	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R69	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R70	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R71	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R72	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R73	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R74	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R75	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R76	NO USE	
R77	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R78	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R79	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R80	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R81	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R82	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R83	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R84	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R85	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R86	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R87	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R88	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R89	NO USE	
R90	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R91	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R101	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R102	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R103	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R104	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R105	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R106	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R107	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R108	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R109	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R110	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R111	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R112	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R113	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R114	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R115	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R116	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R117	RD14BB2C473J	RES. CARBON 47K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
L1	L79-0551-05	NOISE FILTER
L2	L79-0551-05	NOISE FILTER
L3	L79-0551-05	NOISE FILTER
L4	L79-0551-05	NOISE FILTER
L5	R92-1061-05	JUMPING RES. ZERO OHM(5MM)
P23	E40-7404-05	PIN CONNECTOR 26P
R1	RN14BK2C0100F	RES. METAL FILM 910 1% 1/6W
R4	RN14BK2C1101F	RES. METAL FILM 1.1K 1% 1/6W
R7	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
R8	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
R9	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R10	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R11	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R12	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R13	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
R14	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W
R15	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R16	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R17	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R18	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R19	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R20	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R21	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R22	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R23	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R24	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R25	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R26	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R27	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R28	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R29	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R30	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R31	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R32	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R33	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R34	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R35	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R36	RN14BK2C1202D	RES. METAL FILM 12K 0.5% 1/6W
R37	RN14BK2C1202D	RES. METAL FILM 12K 0.5% 1/6W
R38	RN14BK2C3001D	RES. METAL FILM 3K 0.5% 1/6W
R39	RN14BK2C1521D	RES. METAL FILM 1.52K 0.5% 1/6W
R40	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R41	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R42	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R43	R90-0653-05	RES. NETWORK 8X10K
R44	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R45	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R46	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R47	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R48	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R49	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R50	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R51	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R52	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R53	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R54	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R55	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R56	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R57	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R58	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R59	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R60	RD14BB2C101J	RES. CARBON 100 5% 1/6W
U1	CTM5280	IC GATE ARRAY
U2	LC3664ASL-10	IC, CMOS 64K SRAM
U3	NJM311D	IC, COMPARATOR
U4	SN74ALS138N	IC, 3-8 DECODER/DE-MPX
U5	SN74ALS32N	IC, QUAD 2 INPUT OR
U6	SN74AS373N	IC, OCTAL D TRANSPARENT LATCHES
U7	SN74ALS374AN	IC, OCTAL D-F.F.
U8	SN74ALS374AN	IC, OCTAL D-F.F.
U9	DAC0808LCN	IC, 8-BIT D/A CONVERTER
U10	DAC0808LCN	IC, 8-BIT D/A CONVERTER
U11	TC74HC4051AP	IC, 8-CH ANALOG MULTIPLEXER
U12	TC74HC4051AP	IC, 8-CH ANALOG MULTIPLEXER
U13	NJM072BD	IC, JFET INPUT OP AMP
U14	SN74ALS164N	IC, 8-BIT PARA-OUT SERI. REGIST
U15	SN74ALS04BN	IC, HEX INVERTERS
U16	HA17012PB	IC, 12-BIT D/A CONVERTER
U17	HD14051BP	IC, 8-CH ANALOG MPX/DE-MP
U18	PST518B	IC, RESET
X1	L78-0131-05	CERALOCK
X2	L78-0130-05	CERALOCK

CS-5270 FINAL AMP UNIT

X80-1370-02

REF. NO	PARTS NO	NAME & DESCRIPTION
	E01-0103-05	CRT SOCKET
	E23-0149-05	GND TERMINAL
	F01-2318-04	HEAT SINK
	F01-2319-05	HEAT SINK
	J21-4879-04	BRACKET
	J73-0285-22	PCB (UNMOUNTED)
	N09-0718-05	SCREW, SEMS PAN HD M3X6
	CK45FB1H152K	CAP. CERAMIC 1500P 10% 50V
C1		NO USE
C2		NO USE
C3	C90-3178-05	CAP. METAL FILM 0.047 5.5V
C4	C90-3178-05	CAP. METAL FILM 0.047 5.5V
C5		NO USE
C6	CC45FSL1H821J	CAP. CERAMIC 820P 5% 50V
C7	CC45FCH1H121J	CAP. CERAMIC 120P 5% 50V
C8	CF92FV1H102J	CAP. POLYESTER 1000P 5% 50V
C9	CF92FV1H102J	CAP. POLYESTER 1000P 5% 50V
C10	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C11	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C12	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C13	CC45FCH1H180J	CAP. CERAMIC 18P 5% 50V
C14	CC45FCH1H151J	CAP. CERAMIC 150P 5% 50V
C15	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C16	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C17	CF92V1H103J	CAP. POLYESTER 0.01 5% 50V
C18	CF92V1H104J	CAP. POLYESTER 0.1 5% 50V
C101	CE04LW1E101H	CAP. ELECTRO 100 20% 25V
C102	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C103	CE04LW1E101H	CAP. ELECTRO 100 20% 25V
C104	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C105		NO USE
C106	C91-1357-05	CAP. POLYESTER 0.1 10% 100V
C107	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C108	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C109		NO USE
C110	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C111	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C201	C91-2583-05	CAP. CERAMIC 0.1 20% 250V
C202	C91-2584-05	CAP. CERAMIC 1000P 10% 250V
C203	C91-2584-05	CAP. CERAMIC 1000P 10% 250V
C207	CE04LW1E220H	CAP. ELECTRO 22 20% 25V
C208		NO USE
C209	CE04LW0J101H	CAP. ELECTRO 100 20% 6.3V
C210		NO USE
C211	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V
C801	C91-1229-05	CAP. CERAMIC 3.3P 10% 50V
C802	C91-1229-05	CAP. CERAMIC 3.3P 10% 50V
JW5	E38-0997-05	WIRE ASS'Y; CRT TO FINAL
JW6		NO USE
JW7	E38-0998-05	WIRE ASS'Y; CRT TO H
JW13	E38-0999-05	WIRE ASS'Y; BNC TO V
L1	L40-2201-17	FERRI INDUCTOR 22UH 10%
L2	L40-1001-17	FERRI INDUCTOR 10UH 10%
L61	L40-2281-17	FERRI INDUCTOR 0.22UH 10%
L62	L40-3981-17	FERRI INDUCTOR 0.39UH 10%
L63	L40-2281-17	FERRI INDUCTOR 0.22UH 10%
L64	L40-3981-17	FERRI INDUCTOR 0.39UH 10%
L201	L33-0808-05	CHOKE COIL 1000UH
L202	L40-2281-17	FERRI INDUCTOR 0.22UH 10%
L203	L40-2281-17	FERRI INDUCTOR 0.22UH 10%
P4	E40-7515-05	PIN CONNECTOR 3P
P5	E40-3300-05	PIN CONNECTOR 3P
P14	E40-5066-05	PIN CONNECTOR 9P
P18	E40-7518-05	PIN CONNECTOR 6P
P19	E40-7515-05	PIN CONNECTOR 3P
P20		NO USE
P21	E40-7412-05	PIN CONNECTOR 2P
P22	E40-7413-05	PIN CONNECTOR 6P
P105	E40-7515-05	PIN CONNECTOR 3P
P114	E40-7517-05	PIN CONNECTOR 5P
P201	E04-0277-05	BNC CONNECTOR

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
Q1	2SA1161	TR. SI, PNP
Q2	2SA1161	TR. SI, PNP
Q3	2SC3779(D)	TR. SI, NPN
Q4	2SC3779(D)	TR. SI, NPN
Q5	2SC3779(D)	TR. SI, NPN
Q6	2SC3779(D)	TR. SI, NPN
Q7	2SC3779(D)	TR. SI, NPN
Q8	2SC3779(D)	TR. SI, NPN
Q9	2SC3779(D)	TR. SI, NPN
Q10	2SC3779(D)	TR. SI, NPN
Q11	2SC3779(D)	TR. SI, NPN
Q12	2SC3779(D)	TR. SI, NPN
Q13	2SC1252	TR. SI, NPN
Q14	2SC1252	TR. SI, NPN
Q201	2SC3779(D)	TR. SI, NPN
Q202	2SC3779(D)	TR. SI, NPN
R1	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R2	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R3	RD14BB2E822J	RES. CARBON 8.2K 5% 1/4W
R4	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R5	RD14BB2C131J	RES. CARBON 130 5% 1/6W
R6	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R7	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R8	RD14BB2C911J	RES. CARBON 910 5% 1/6W
R9	RD14BB2C911J	RES. CARBON 910 5% 1/6W
R10	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R11	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R12	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R13	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R14	RD14BB2E273J	RES. CARBON 27K 5% 1/4W
R15	R92-1575-05	RES. LINEAR PCT 100 5% 1/6W
R16	R92-1575-05	RES. LINEAR PCT 100 5% 1/6W
R17	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R18	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R19	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R20	RD14BB2C561J	RES. CARBON 560 5% 1/6W
R21	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R22	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R23	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R24	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R25	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R26	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R27	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R28	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R29	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R30	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R34	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R35	RD14BB2C623J	RES. CARBON 62K 5% 1/6W
R36	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R37	RD14BB2E752J	RES. CARBON 7.5K 5% 1/4W
R38	NO USE	
R39	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R40	NO USE	
R41	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R42	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R43	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R44	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R45	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R46	RD14BB2C911J	RES. CARBON 910 5% 1/6W
R47	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R48	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R49	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R50	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R51	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R52	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R53	RD14BB2C1R0J	RES. CARBON 1 5% 1/6W
R54	RD14BB2C1R0J	RES. CARBON 1 5% 1/6W
R55	RD14BB2E121J	RES. CARBON 120 5% 1/4W
R56	RD14BB2E121J	RES. CARBON 120 5% 1/4W
R57	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R58	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R59	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R60	NO USE	
R61	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R62	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R63	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R64	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R65	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R66	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R67	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R68	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R69	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R70	RD14BB2C271J	RES. CARBON 270 5% 1/6W
R71	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R72	RN14BK2C30R0F	RES. METAL FILM 30.0 1% 1/6W
R73	R92-1567-05	RES. SPECIAL POWER 100 5% 1W
R74	R92-1567-05	RES. SPECIAL POWER 100 5% 1W

REF. NO	PARTS NO	NAME & DESCRIPTION
R75	R92-1566-05	RES. SPECIAL POWER 91 5% 1W
R76	R92-1566-05	RES. SPECIAL POWER 91 5% 1W
R77	R92-1566-05	RES. SPECIAL POWER 91 5% 1W
R78	R92-1566-05	RES. SPECIAL POWER 91 5% 1W
R79	RD14BB2E2R2J	RES. CARBON 2.2 5% 1/4W
R80	RD14BB2E2R2J	RES. CARBON 2.2 5% 1/4W
R81	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R82	R92-1565-05	RES. SPECIAL POWER 27 5% 1W
R85	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R86	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R87	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R88	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R89	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R90	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R91	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R92	R92-1569-05	RES. SPECIAL POWER 360 5% 2W
R93	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R94	NO USE	
R95	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R96	NO USE	
R97	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R98	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R201	R92-0173-05	RES. FIXED 2.2H 20% 350V
R202	NO USE	
R203	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R204	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R205	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R206	NO USE	
R207	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R208	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R209	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R210	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R211	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R212	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R213	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R214	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R215	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R216	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R217	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R218	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R219	RD14BB2C121J	RES. CARBON 120 5% 1/6W

TC1	C05-0469-05	CAP. TRIMMER 10P
TC62	C05-0472-05	CAP. TRIMMER 50P
TH1	112-103-2FM	THERMISTOR
TH2	112-103-2FM	THERMISTOR
U1	KMG01	IC, LINEAR
VR1	R12-1857-05	RES. SEMI FIXED 1K
VR2	R12-0679-05	RES. SEMI FIXED 22KB
VR3	R12-1860-05	RES. SEMI FIXED 1KB
VR4	R12-0679-05	RES. SEMI FIXED 22KB

CS-5275 FINAL AMP UNIT

X80-1370-03

REF. NO	PARTS NO	NAME & DESCRIPTION
	E01-0103-05	CRT SOCKET
	E23-0149-05	GND TERMINAL
	F01-2318-04	HEAT SINK
	F01-2319-05	HEAT SINK
	J21-4879-04	BRACKET
	J73-0285-22	PCB (UNMOUNTED)
	N09-0718-05	SCREW, SEMS PAN HD M3X6
C1	CK45FB1H152K	CAP. CERAMIC 1500P 10% 50V
C2	NO USE	
C3	C90-3178-05	CAP. METAL FILM 0.047 5.5V
C4	C90-3178-05	CAP. METAL FILM 0.047 5.5V
C5	NO USE	
C6	CC45FSL1H821J	CAP. CERAMIC 820P 5% 50V
C7	CC45FCH1H121J	CAP. CERAMIC 120P 5% 50V
C8	CF92FV1H102J	CAP. POLYESTER 1000P 5% 50V
C9	CF92FV1H102J	CAP. POLYESTER 1000P 5% 50V
C10	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C11	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C12	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C13	CC45FCH1H180J	CAP. CERAMIC 18P 5% 50V
C14	CC45FCH1H151J	CAP. CERAMIC 150P 5% 50V
C15	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C16	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C17	CF92V1H103J	CAP. POLYESTER 0.01 5% 50V
C18	CF92V1H104J	CAP. POLYESTER 0.1 5% 50V

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			
C101	CE04LW1E101M	CAP. ELECTRO	100	20%	25V
C102	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C103	CE04LW1E101M	CAP. ELECTRO	100	20%	25V
C104	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C105	NO USE				
C106	C91-1357-05	CAP. POLYESTER	0.1	10%	100V
C107	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C108	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C109	NO USE				
C110	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V
C111	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C207	CE04LW1E220M	CAP. ELECTRO	22	20%	25V
C208	NO USE				
C209	CE04LW0J101M	CAP. ELECTRO	100	20%	6.3V
C210	NO USE				
C211	CC45FCH1H120J	CAP. CERAMIC	12P	5%	50V
C801	C91-1229-05	CAP. CERAMIC	3.3P	10%	50V
C802	C91-1229-05	CAP. CERAMIC	3.3P	10%	50V
D100	MA700	DIODE			
D101	MA700	DIODE			
JW5	E38-0997-05	WIRE ASS'Y; CRT TO FINAL			
JW6	NO USE				
JW7	E38-0998-05	WIRE ASS'Y; CRT TO H			
JW13	E38-0999-05	WIRE ASS'Y; BNC TO V			
L1	L40-2201-17	FERRI INDUCTOR	22UH	10%	
L2	L40-1001-17	FERRI INDUCTOR	10UH	10%	
L61	L40-2281-17	FERRI INDUCTOR	0.22UH	10%	
L62	L40-3981-17	FERRI INDUCTOR	0.39UH	10%	
L63	L40-2281-17	FERRI INDUCTOR	0.22UH	10%	
L64	L40-3981-17	FERRI INDUCTOR	0.39UH	10%	
L202	L40-2281-17	FERRI INDUCTOR	0.22UH	10%	
L203	L40-2281-17	FERRI INDUCTOR	0.22UH	10%	
P4	E40-7515-05	PIN CONNECTOR	3P		
P5	E40-3300-05	PIN CONNECTOR	3P		
P14	E40-5066-05	PIN CONNECTOR	9P		
P18	E40-7518-05	PIN CONNECTOR	6P		
P19	E40-7515-05	PIN CONNECTOR	3P		
P20	NO USE				
P21	E40-7412-05	PIN CONNECTOR	2P		
P22	E40-7413-05	PIN CONNECTOR	6P		
P105	E40-7515-05	PIN CONNECTOR	3P		
P114	E40-7517-05	PIN CONNECTOR	5P		
P201	E04-0277-05	BNC CONNECTOR			
Q1	2SA1161	TR. SI, PNP			
Q2	2SA1161	TR. SI, PNP			
Q3	2SC3779(D)	TR. SI, NPN			
Q4	2SC3779(D)	TR. SI, NPN			
Q5	2SC3779(D)	TR. SI, NPN			
Q6	2SC3779(D)	TR. SI, NPN			
Q7	2SC3779(D)	TR. SI, NPN			
Q8	2SC3779(D)	TR. SI, NPN			
Q9	2SC3779(D)	TR. SI, NPN			
Q10	2SC3779(D)	TR. SI, NPN			
Q11	2SC3779(D)	TR. SI, NPN			
Q12	2SC3779(D)	TR. SI, NPN			
Q13	2SC1252	TR. SI, NPN			
Q14	2SC1252	TR. SI, NPN			
Q100	2SC1740S(R,S)	TR. SI, NPN			
Q201	2SC3779(D)	TR. SI, NPN			
Q202	2SC3779(D)	TR. SI, NPN			
R1	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R2	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R3	RD14BB2E822J	RES. CARBON	8.2K	5%	1/4W
R4	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R5	RD14BB2C131J	RES. CARBON	130	5%	1/6W
R6	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R7	RD14BB2C751J	RES. CARBON	750	5%	1/6W
R8	RD14BB2C911J	RES. CARBON	910	5%	1/6W
R9	RD14BB2C911J	RES. CARBON	910	5%	1/6W
R10	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R11	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W
R12	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W

X80-1370-03

REF. NO	PARTS NO	NAME & DESCRIPTION			
R13	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R14	RD14BB2E273J	RES. CARBON	27K	5%	1/4W
R15	R92-1575-05	RES. LINEAR PCT	100	5%	1/6W
R16	R92-1575-05	RES. LINEAR PCT	100	5%	1/6W
R17	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R18	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R19	RD14BB2C113J	RES. CARBON	11K	5%	1/6W
R20	RD14BB2C561J	RES. CARBON	560	5%	1/6W
R21	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R22	RN14BK2C5600F	RES. METAL FILM	560	1%	1/6W
R23	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R24	RD14BB2C303J	RES. CARBON	30K	5%	1/6W
R25	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R26	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R27	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W
R28	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W
R29	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R30	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R31	NO USE				
R32	RD14BB2E222J	RES. CARBON	2.2K	5%	1/4W
R33	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W
R34	RD14BB2C241J	RES. CARBON	240	5%	1/6W
R35	NO USE				
R36	RD14BB2C203J	RES. CARBON	20K	5%	1/6W
R37	NO USE				
R38	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R39	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R40	NO USE				
R41	RD14BB2C680J	RES. CARBON	68	5%	1/6W
R42	RD14BB2C621J	RES. CARBON	620	5%	1/6W
R43	RD14BB2C621J	RES. CARBON	620	5%	1/6W
R44	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W
R45	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W
R46	RD14BB2C911J	RES. CARBON	910	5%	1/6W
R47	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R48	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R49	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R50	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R51	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R52	RD14BB2E220J	RES. CARBON	22	5%	1/4W
R53	RD14BB2C1R0J	RES. CARBON	1	5%	1/6W
R54	RD14BB2C1R0J	RES. CARBON	1	5%	1/6W
R55	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R56	RD14BB2E121J	RES. CARBON	120	5%	1/4W
R57	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R58	RD14BB2C333J	RES. CARBON	33K	5%	1/6W
R59	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R60	NO USE				
R61	RD14BB2C431J	RES. CARBON	430	5%	1/6W
R62	RD14BB2C431J	RES. CARBON	430	5%	1/6W
R63	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R64	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R65	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R66	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R67	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R68	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R69	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R70	RD14BB2C271J	RES. CARBON	270	5%	1/6W
R71	RD14BB2C390J	RES. CARBON	39	5%	1/6W
R72	RN14BK2C30R0F	RES. METAL FILM	30.0	1%	1/6W
R73	R92-1567-05	RES. SPECIAL POWER	100	5%	1W
R74	R92-1567-05	RES. SPECIAL POWER	100	5%	1W
R75	R92-1566-05	RES. SPECIAL POWER	91	5%	1W
R76	R92-1566-05	RES. SPECIAL POWER	91	5%	1W
R77	R92-1566-05	RES. SPECIAL POWER	91	5%	1W
R78	R92-1566-05	RES. SPECIAL POWER	91	5%	1W
R79	RD14BB2E2R2J	RES. CARBON	2.2	5%	1/4W
R80	RD14BB2E2R2J	RES. CARBON	2.2	5%	1/4W
R81	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R82	R92-1565-05	RES. SPECIAL POWER	27	5%	1W
R85	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R86	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R87	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R88	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R89	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R90	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R91	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R92	R92-1569-05	RES. SPECIAL POWER	360	5%	2W
R93	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R94	NO USE				
R95	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R96	NO USE				
R97	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R98	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R203	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R204	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R205	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W
R206	NO USE				
R207	RD14BB2C201J	RES. CARBON	200	5%	1/6W

PARTS LIST


REF. NO	PARTS NO	NAME & DESCRIPTION			
R208	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R209	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R210	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R211	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R212	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R213	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R214	RD14BB2E223J	RES. CARBON	22K	5%	1/4W
R215	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R216	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R217	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R218	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R219	RD14BB2C121J	RES. CARBON	120	5%	1/6W
TC1	C05-0469-05	CAP. TRIMMER	10P		
TC62	C05-0472-05	CAP. TRIMMER	50P		
TH1	112-103-2FM	THERMISTOR			
TH2	112-103-2FM	THERMISTOR			
VR1	R12-1857-05	RES. SEMI FIXED	1K		
VR2	NO. USE				
VR3	R12-1860-05	RES. SEMI FIXED	1KB		
VR4	R12-0679-05	RES. SEMI FIXED	22KB		

DELAY LINE UNIT


X81-3270-00

REF. NO	PARTS NO	NAME & DESCRIPTION			
	J73-0286-03	PCB (UNMOUNTED)			
	R92-1061-05	JUMPING RES.	ZERO OHM	(5MM)	
JW4	E38-1001-05	WIRE ASS'Y			

CS-5270 SCHEMATIC DIAGRAM

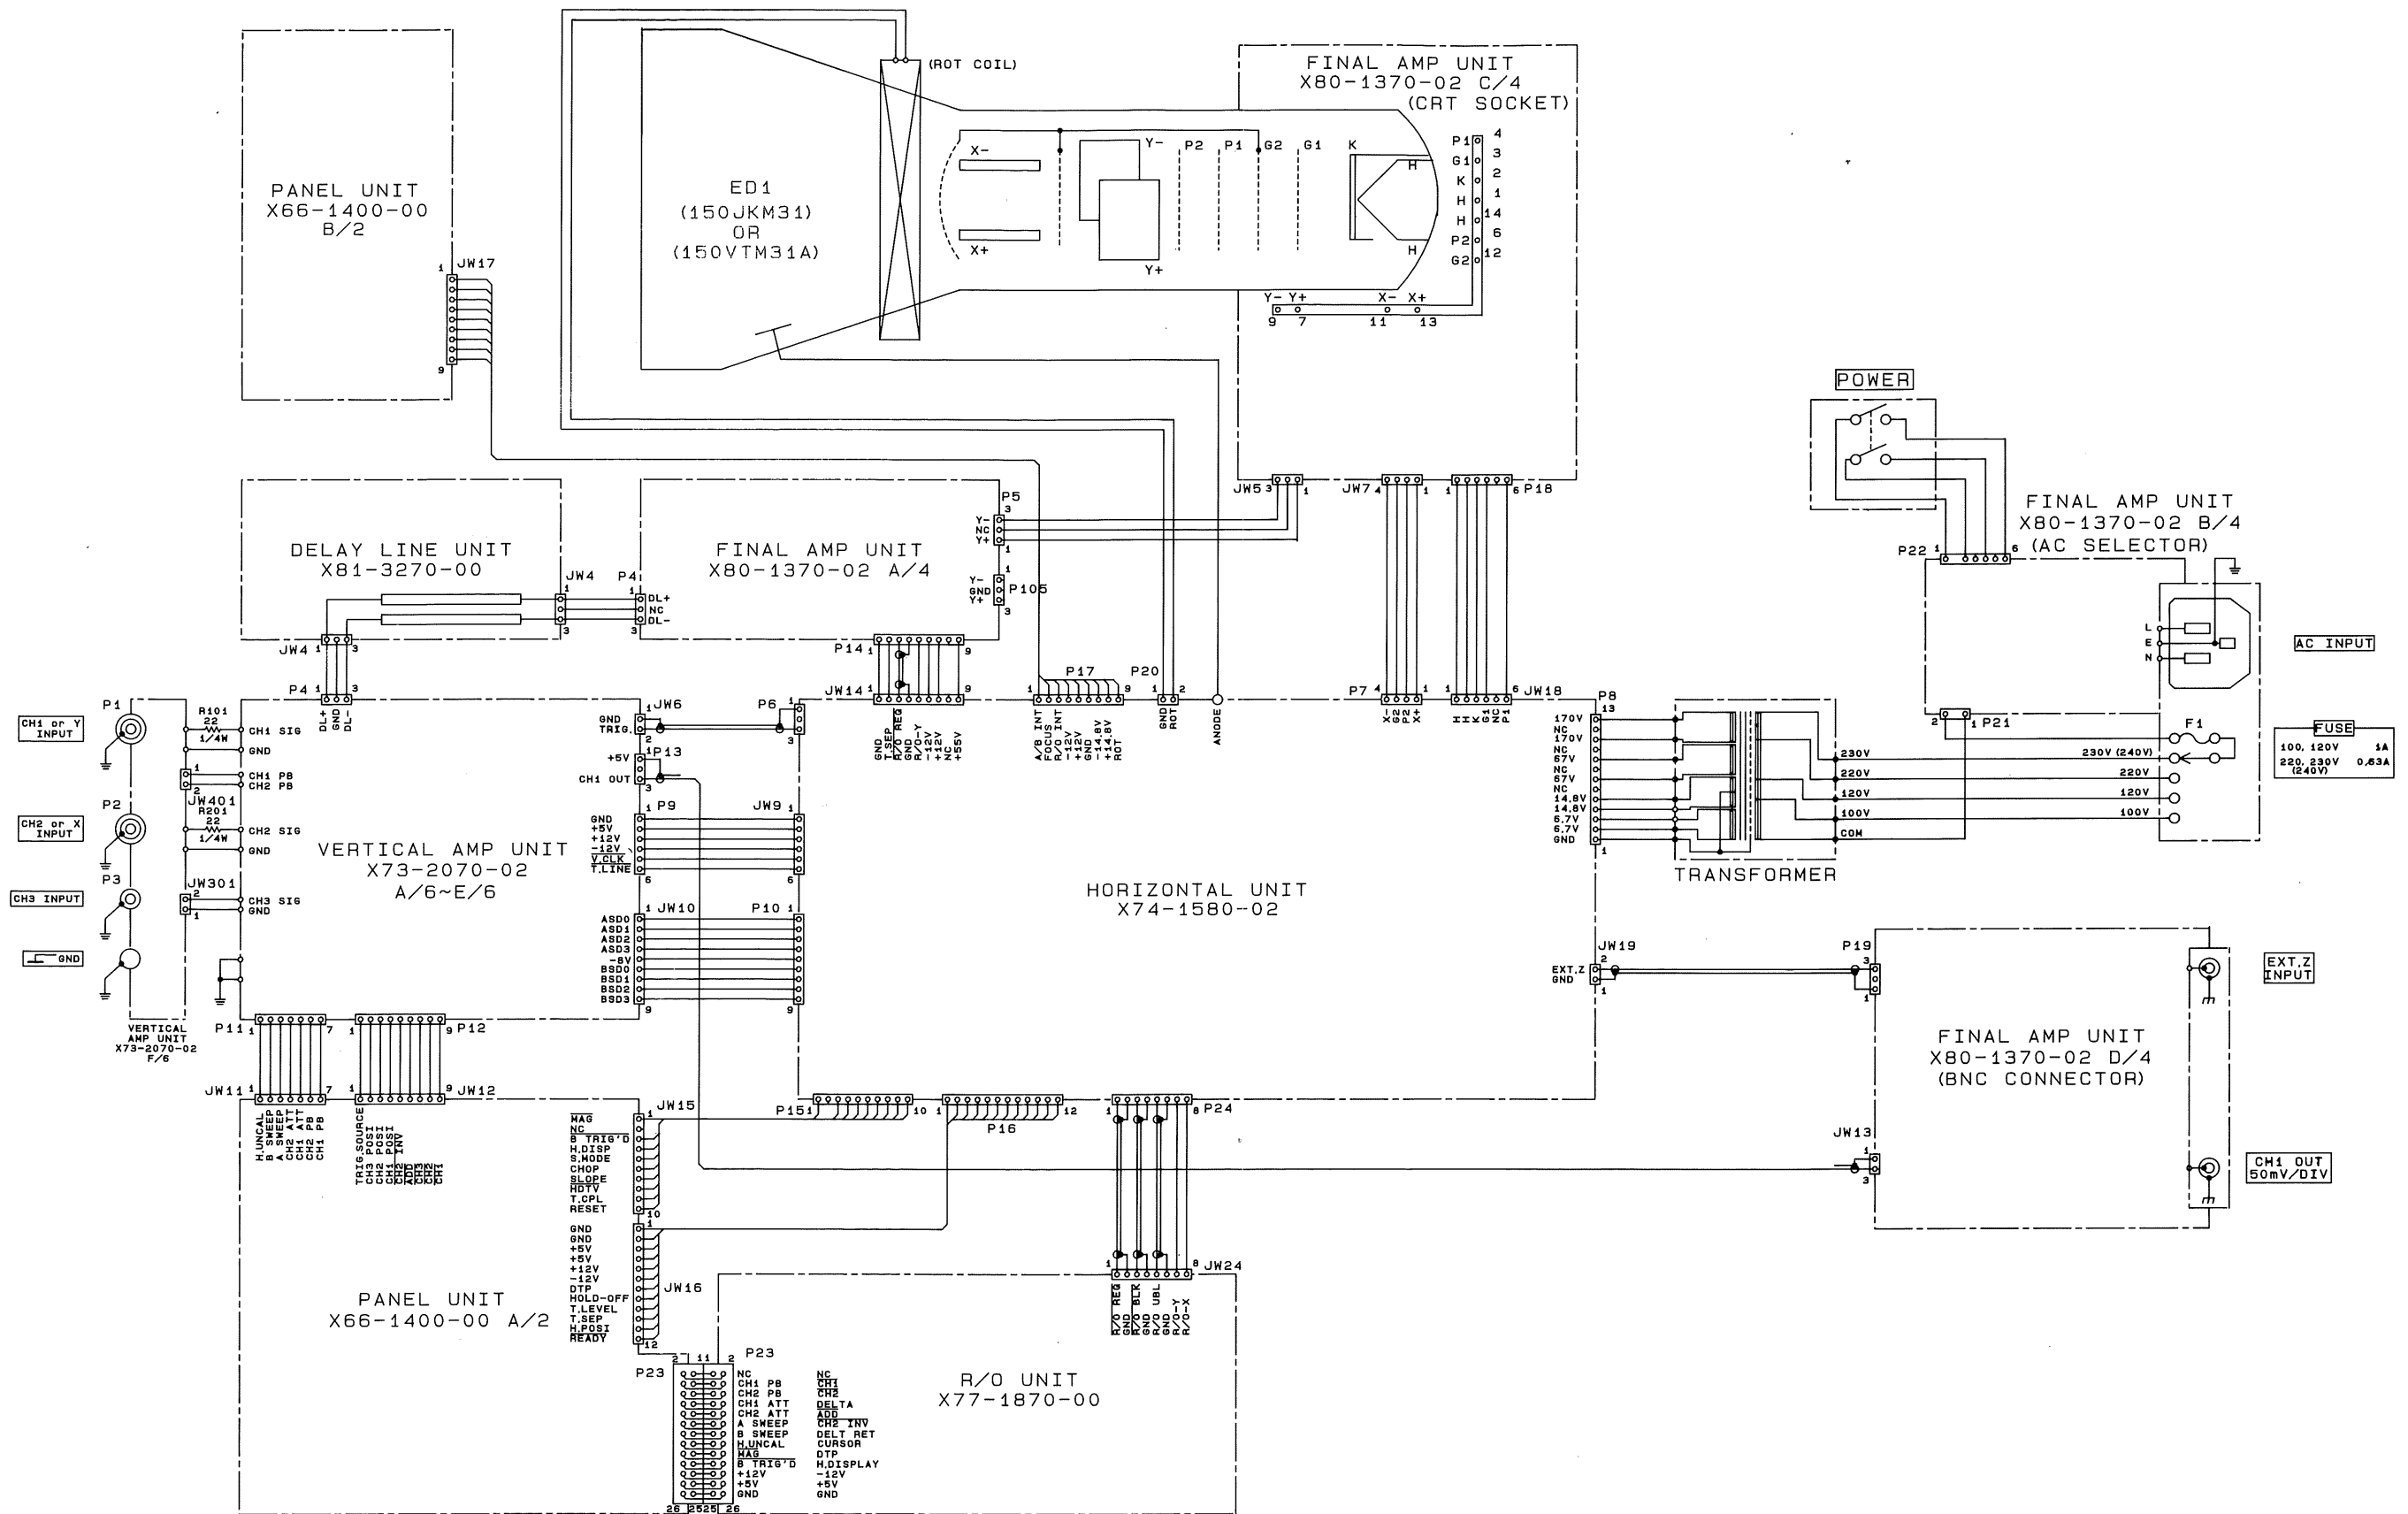


CS-5275 SCHEMATIC DIAGRAM

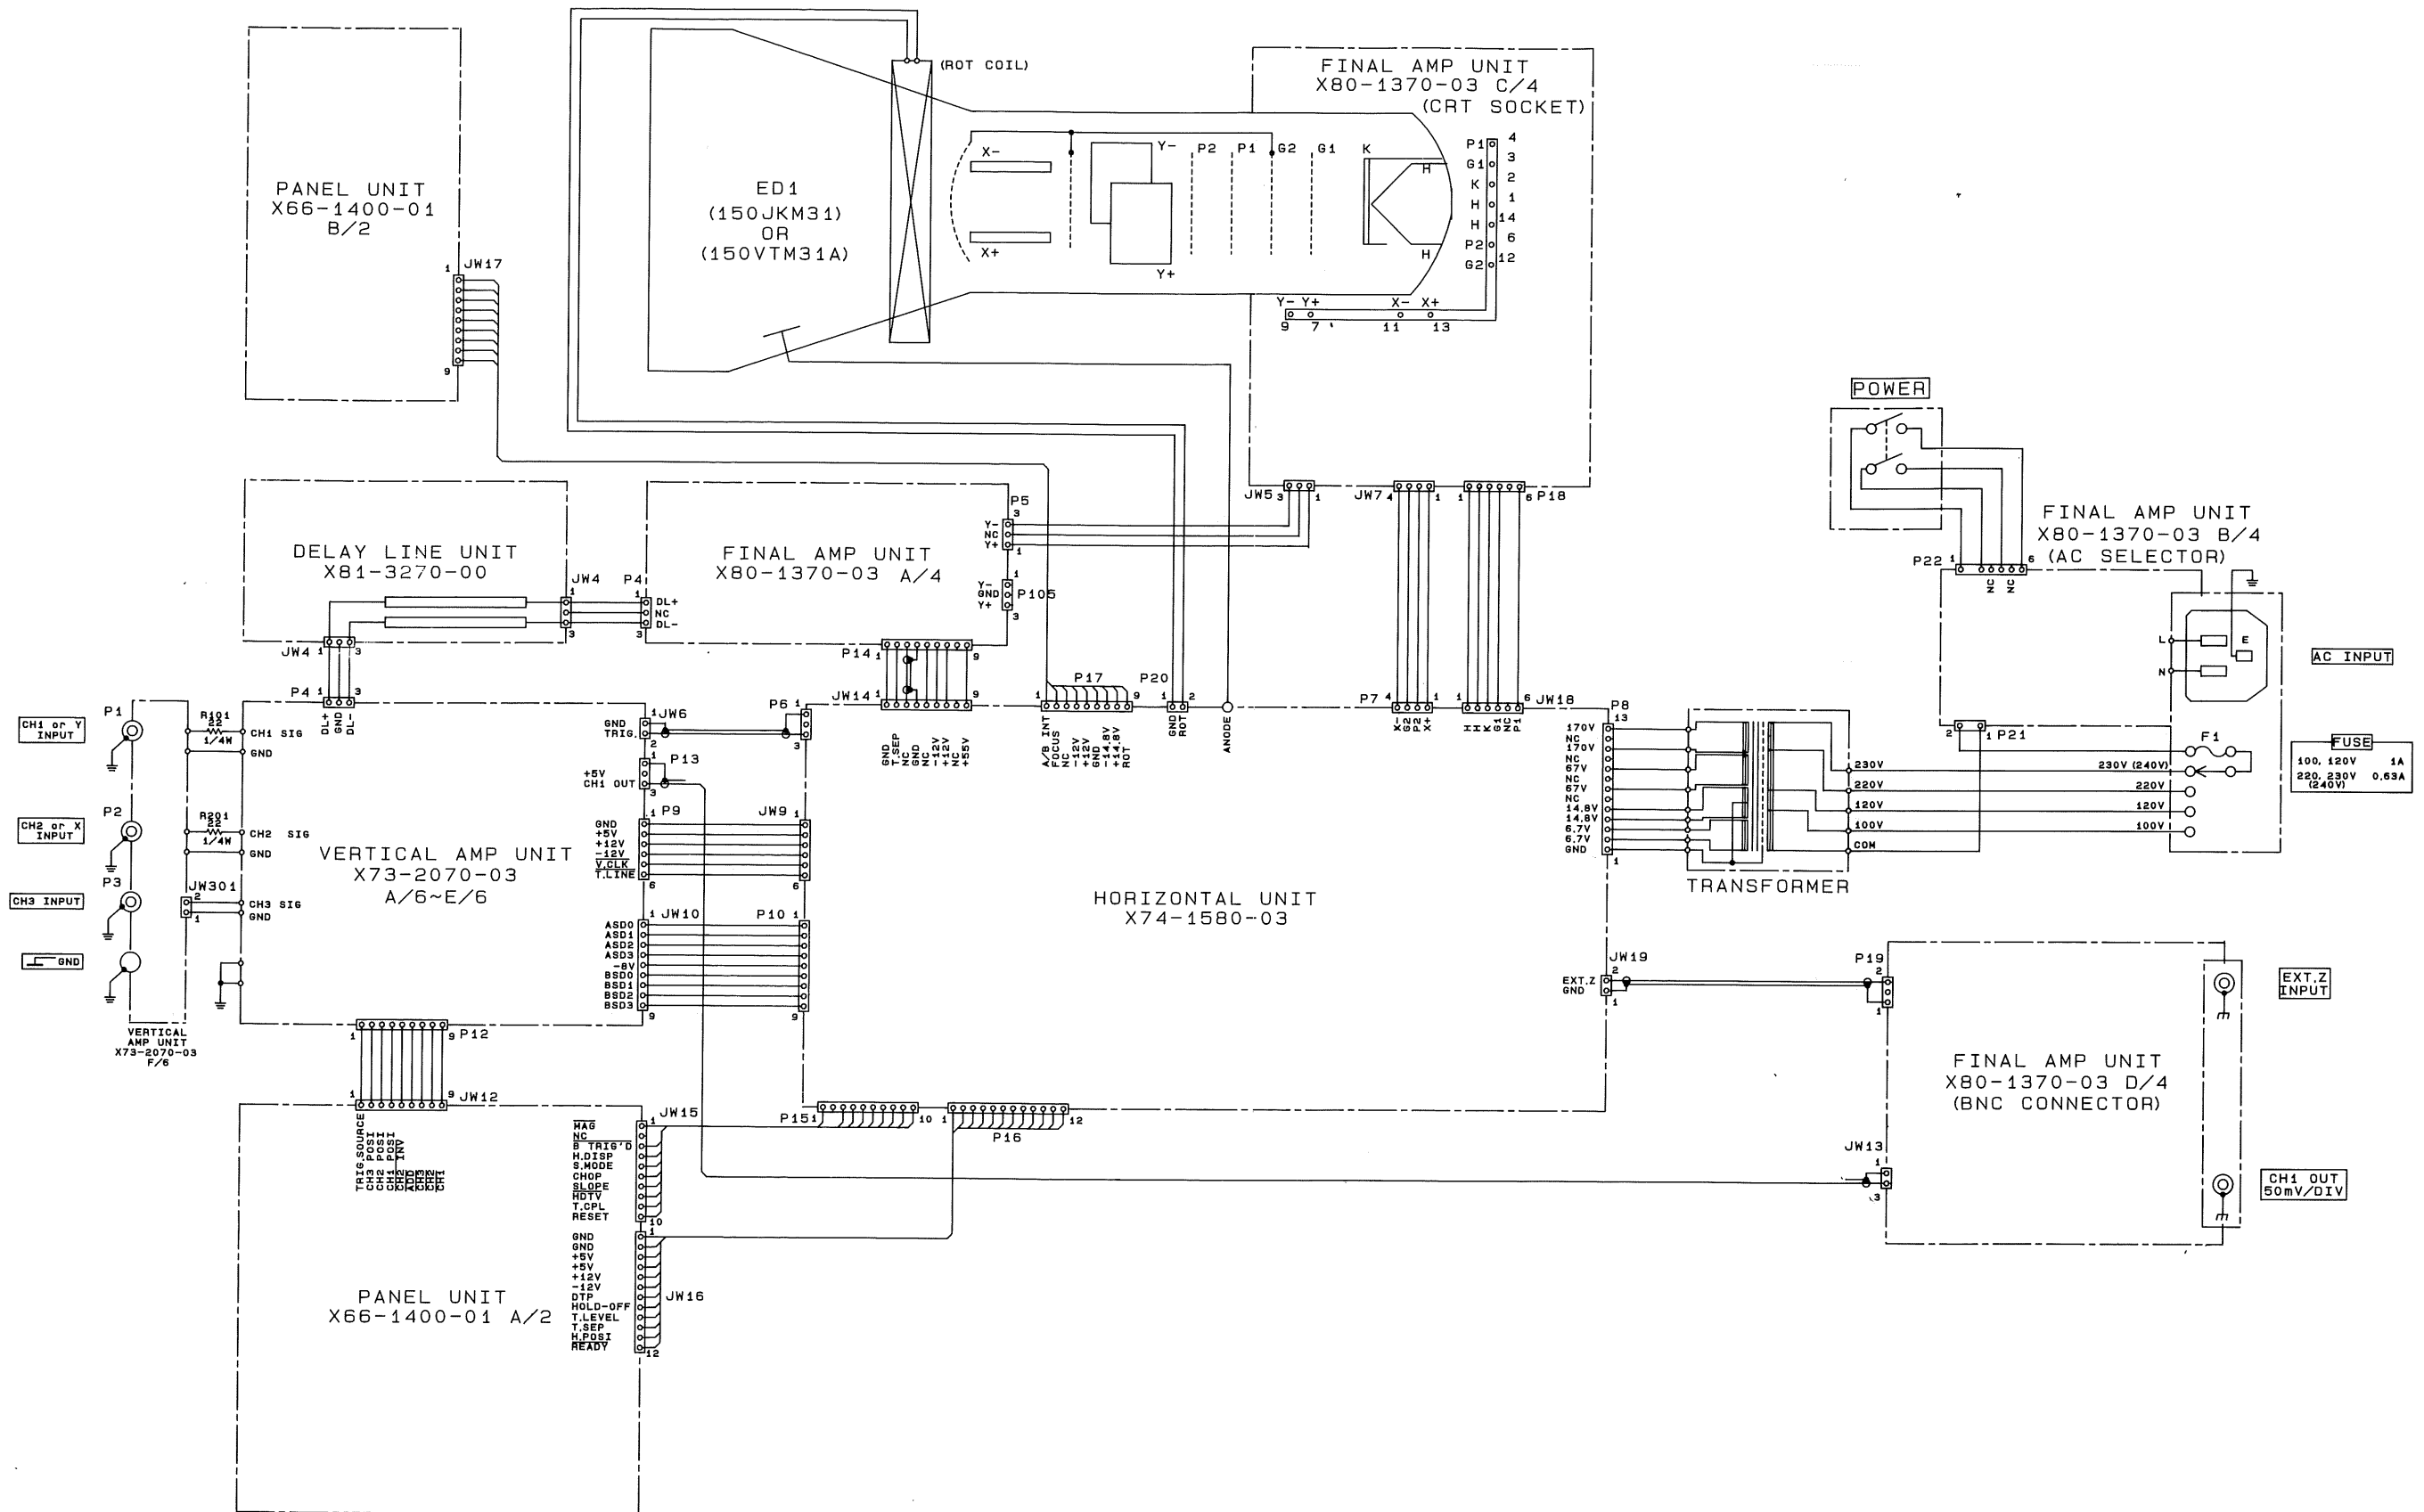


CS-5270 SCHEMATIC DIAGRAM

PANEL UNIT (X66-1400-00)

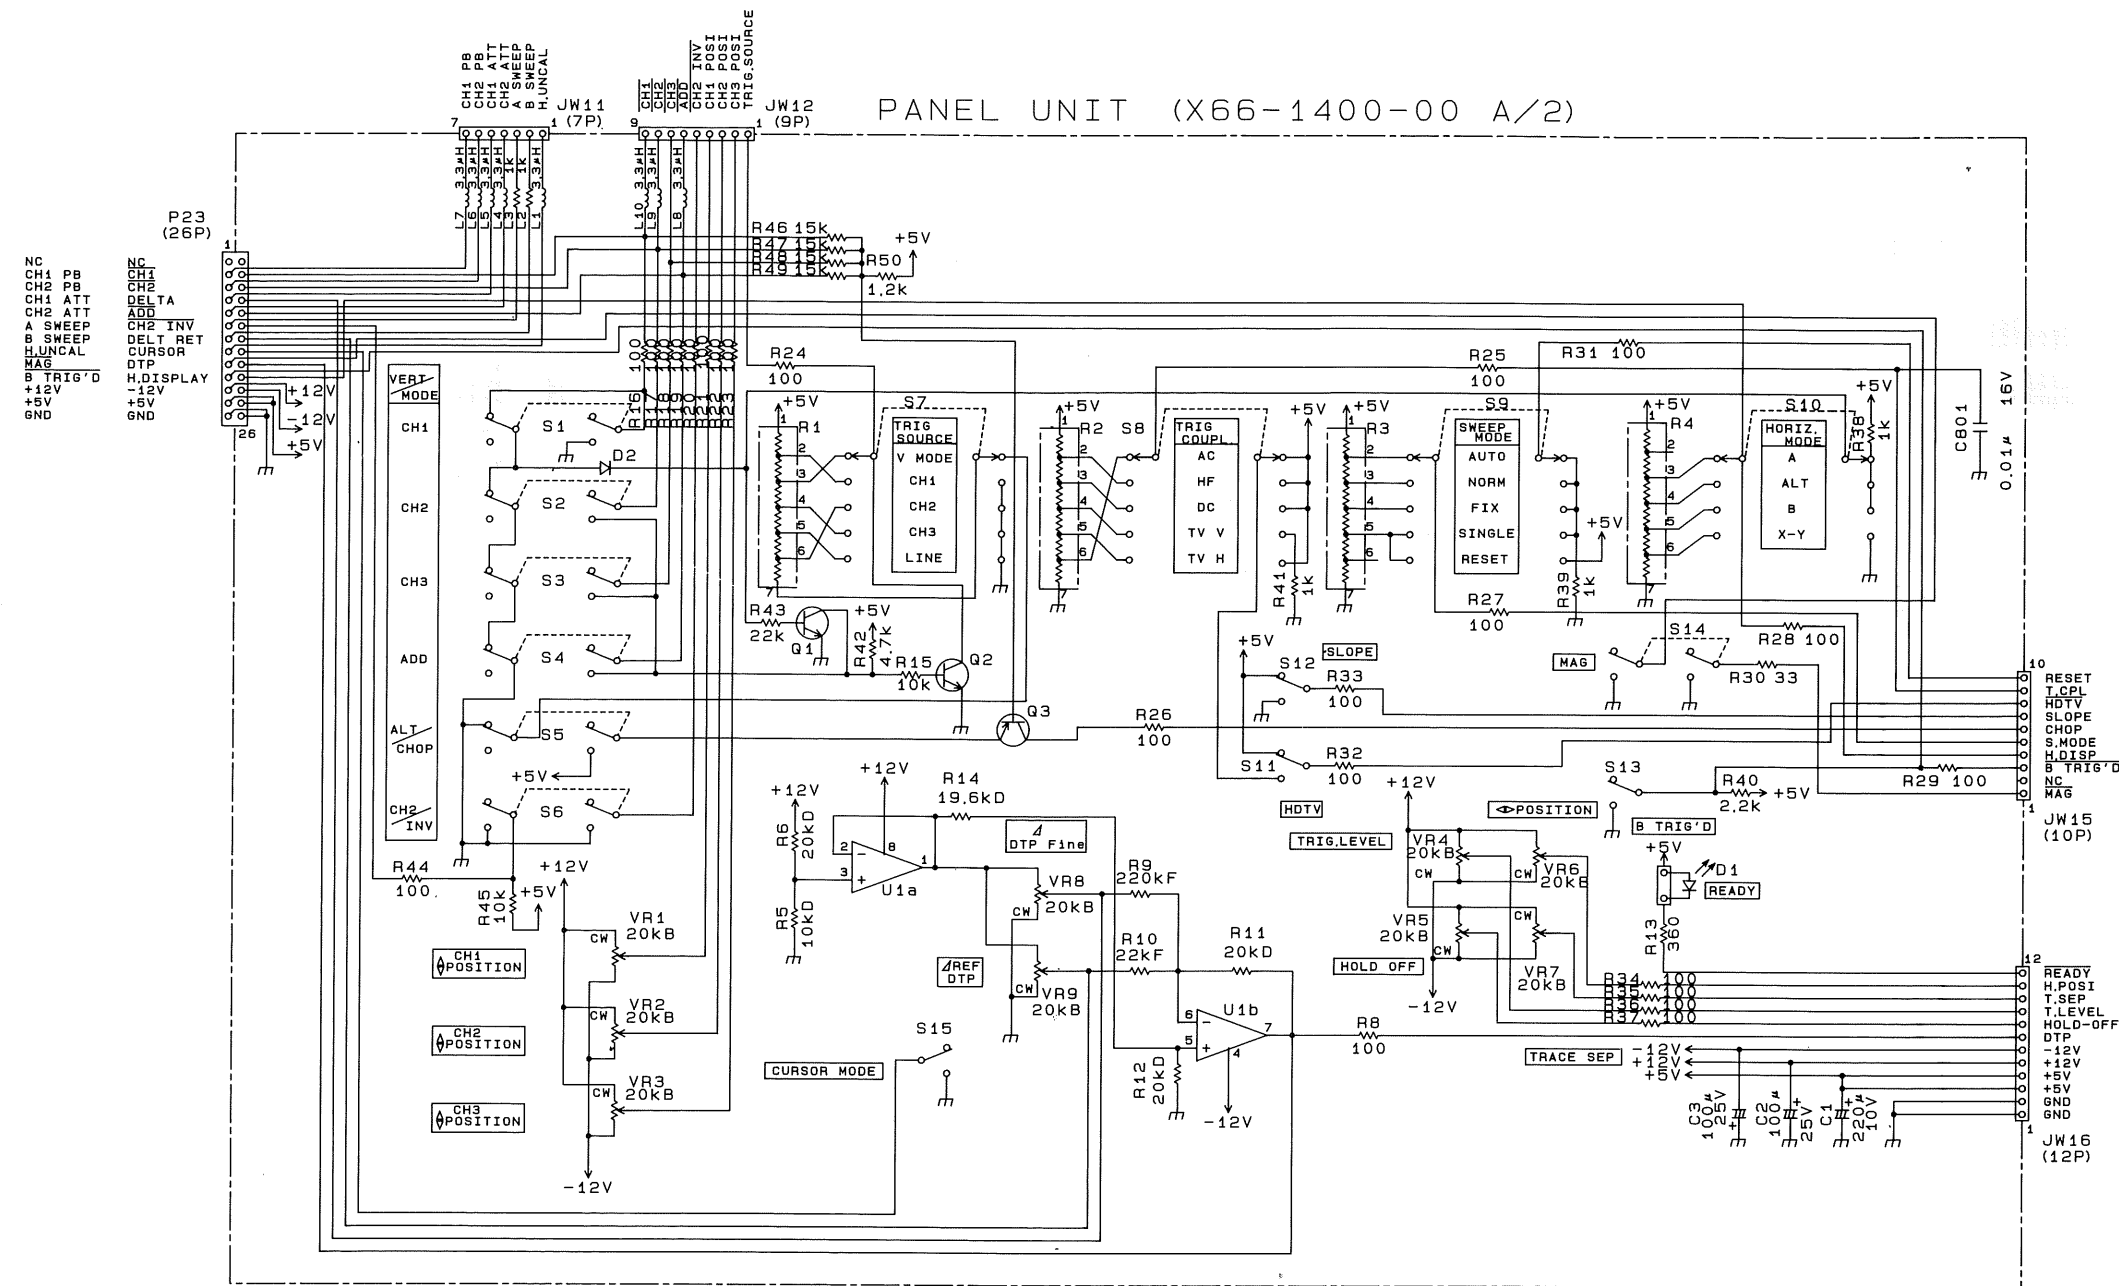


(X66-1400-00 B/2)

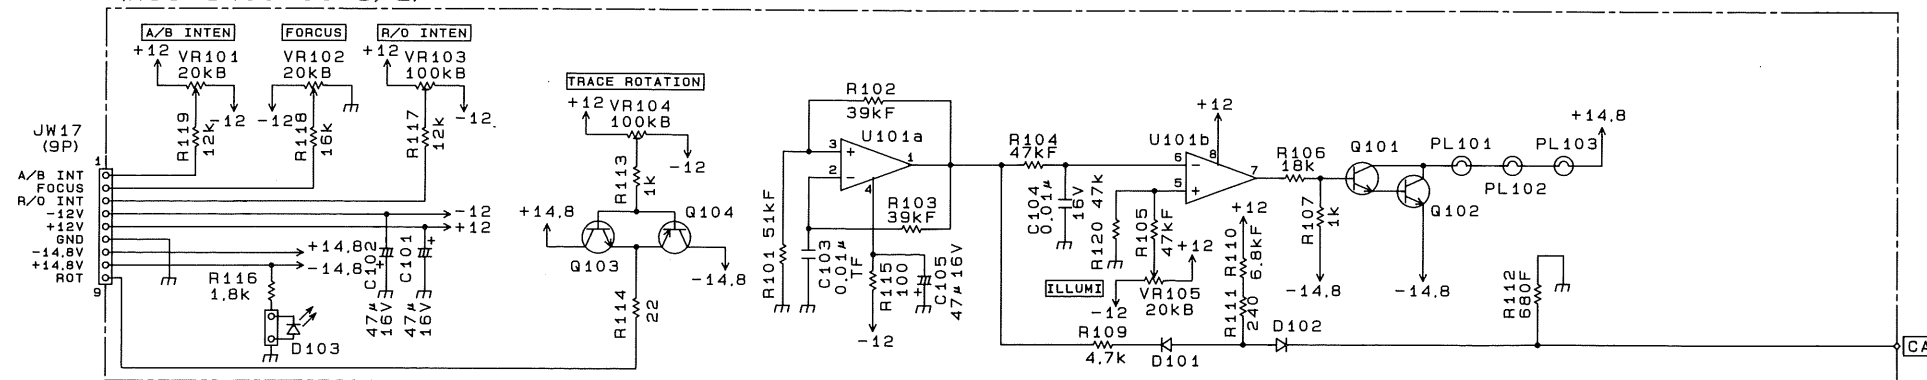


CS-5275 SCHEMATIC DIAGRAM

PANEL UNIT (X66-1400-01)

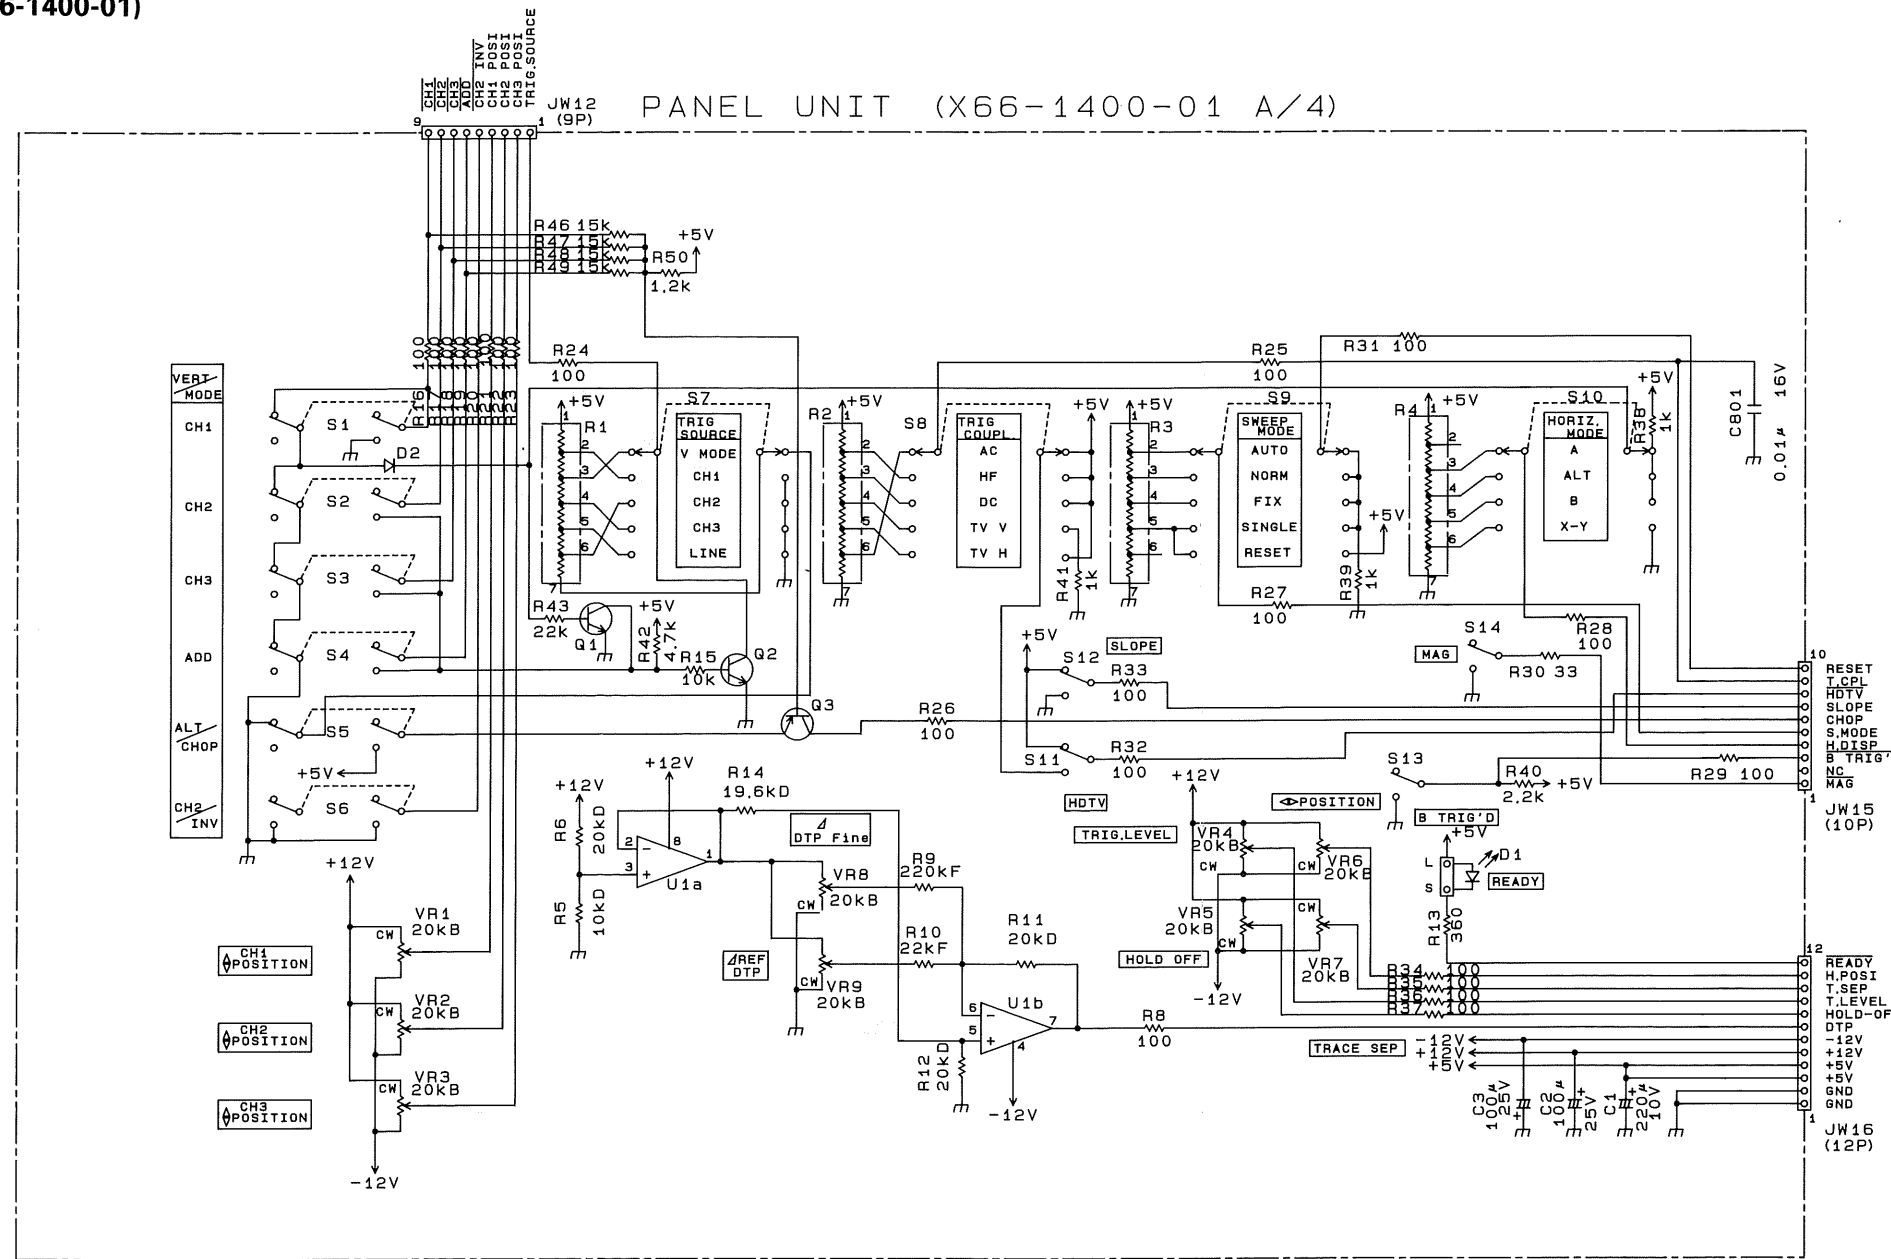


- Q1 2SC1740S (R, S)
- Q2 2SC1740S (R, S)
- Q3 2SA933S (R, S)
- U1 NJM4558L
- D1 LN3226P
- D2 1SS132


(X66-1400-01 B/2)

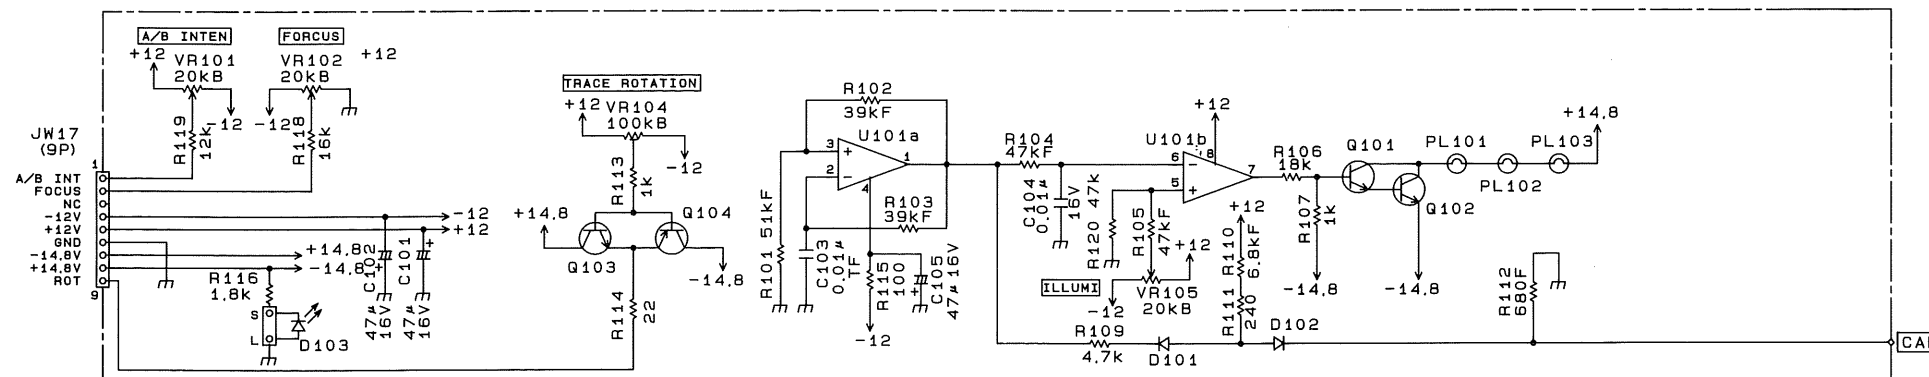

- U101 NJM4558L
- Q101 2SC1740S (R, S)
- Q102 2SC1740S (R, S)
- Q103 2SC1318A (R)
- Q104 2SA720A (R)
- D101 1SS132
- D102 1SS132
- D103 LN3226P

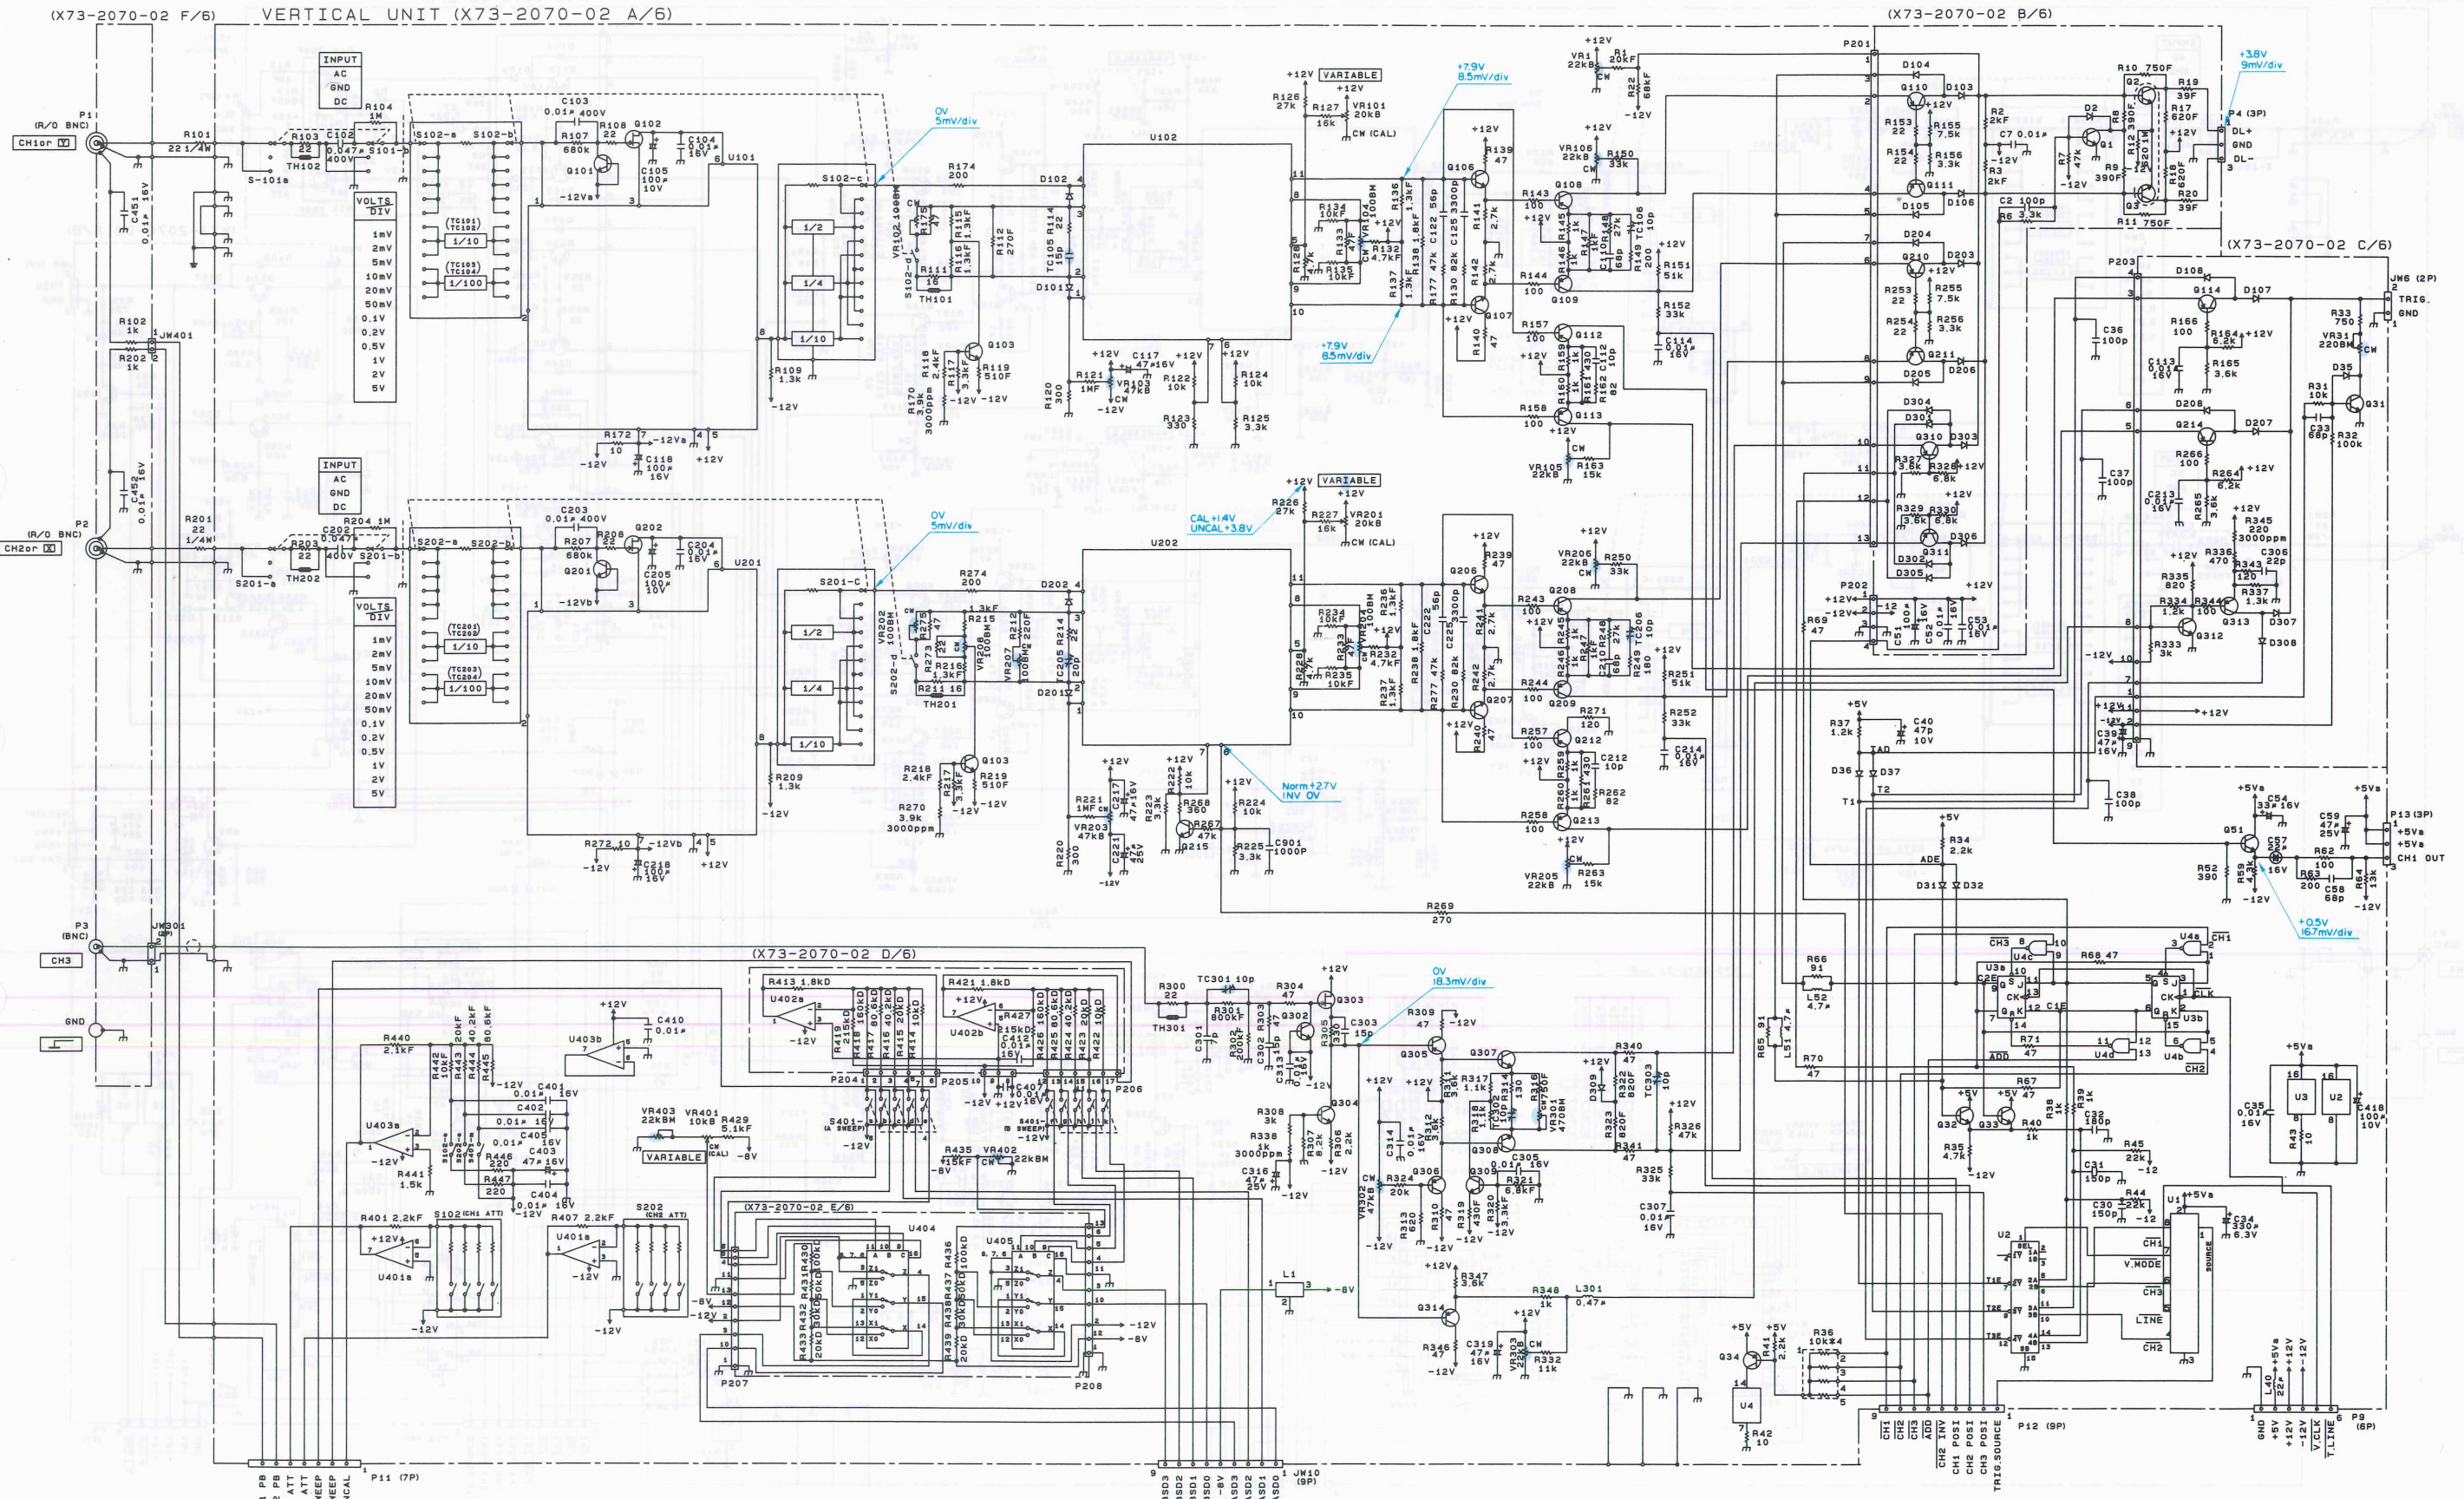


- | | | | | | |
|-----------|--------------|-------------------------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| U1 | :KMS01 | Q1, 33, 215 | :2SC1740S (R, S) | Q112, 113, 212, 213 | |
| U2 | :SN74LS15BN | Q2, 3, 106, 107, 206, 207 | :2SC307 | Q114, 115, 214, 215 | :2N4116A |
| U3 | :SN74LS112AN | Q4, 5, 108, 109, 208, 209 | :2SC3779 (D) | | |
| U4 | :SN74LS00N | Q34 | :2SA933S (R, S) | D101, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500 | |
| U101, 201 | :KMC13 | Q51, 101, 201, 302 | :2SC1923 (O) | | |
| U102, 202 | :KMC12 | Q102, 202, 303 | :2SK404 (E) | | |
| U401 | :NJM072L | Q103, 203, 304 | :2SC3030, 312 | | |
| U402 | :NJM072D | Q108-111, 114, 208-211, 214, 308-311, 314 | :2SA1559 (K) | | |
| U403 | :NJM4558L | | | | |
| U404, 405 | :TC4053BP | | | | |

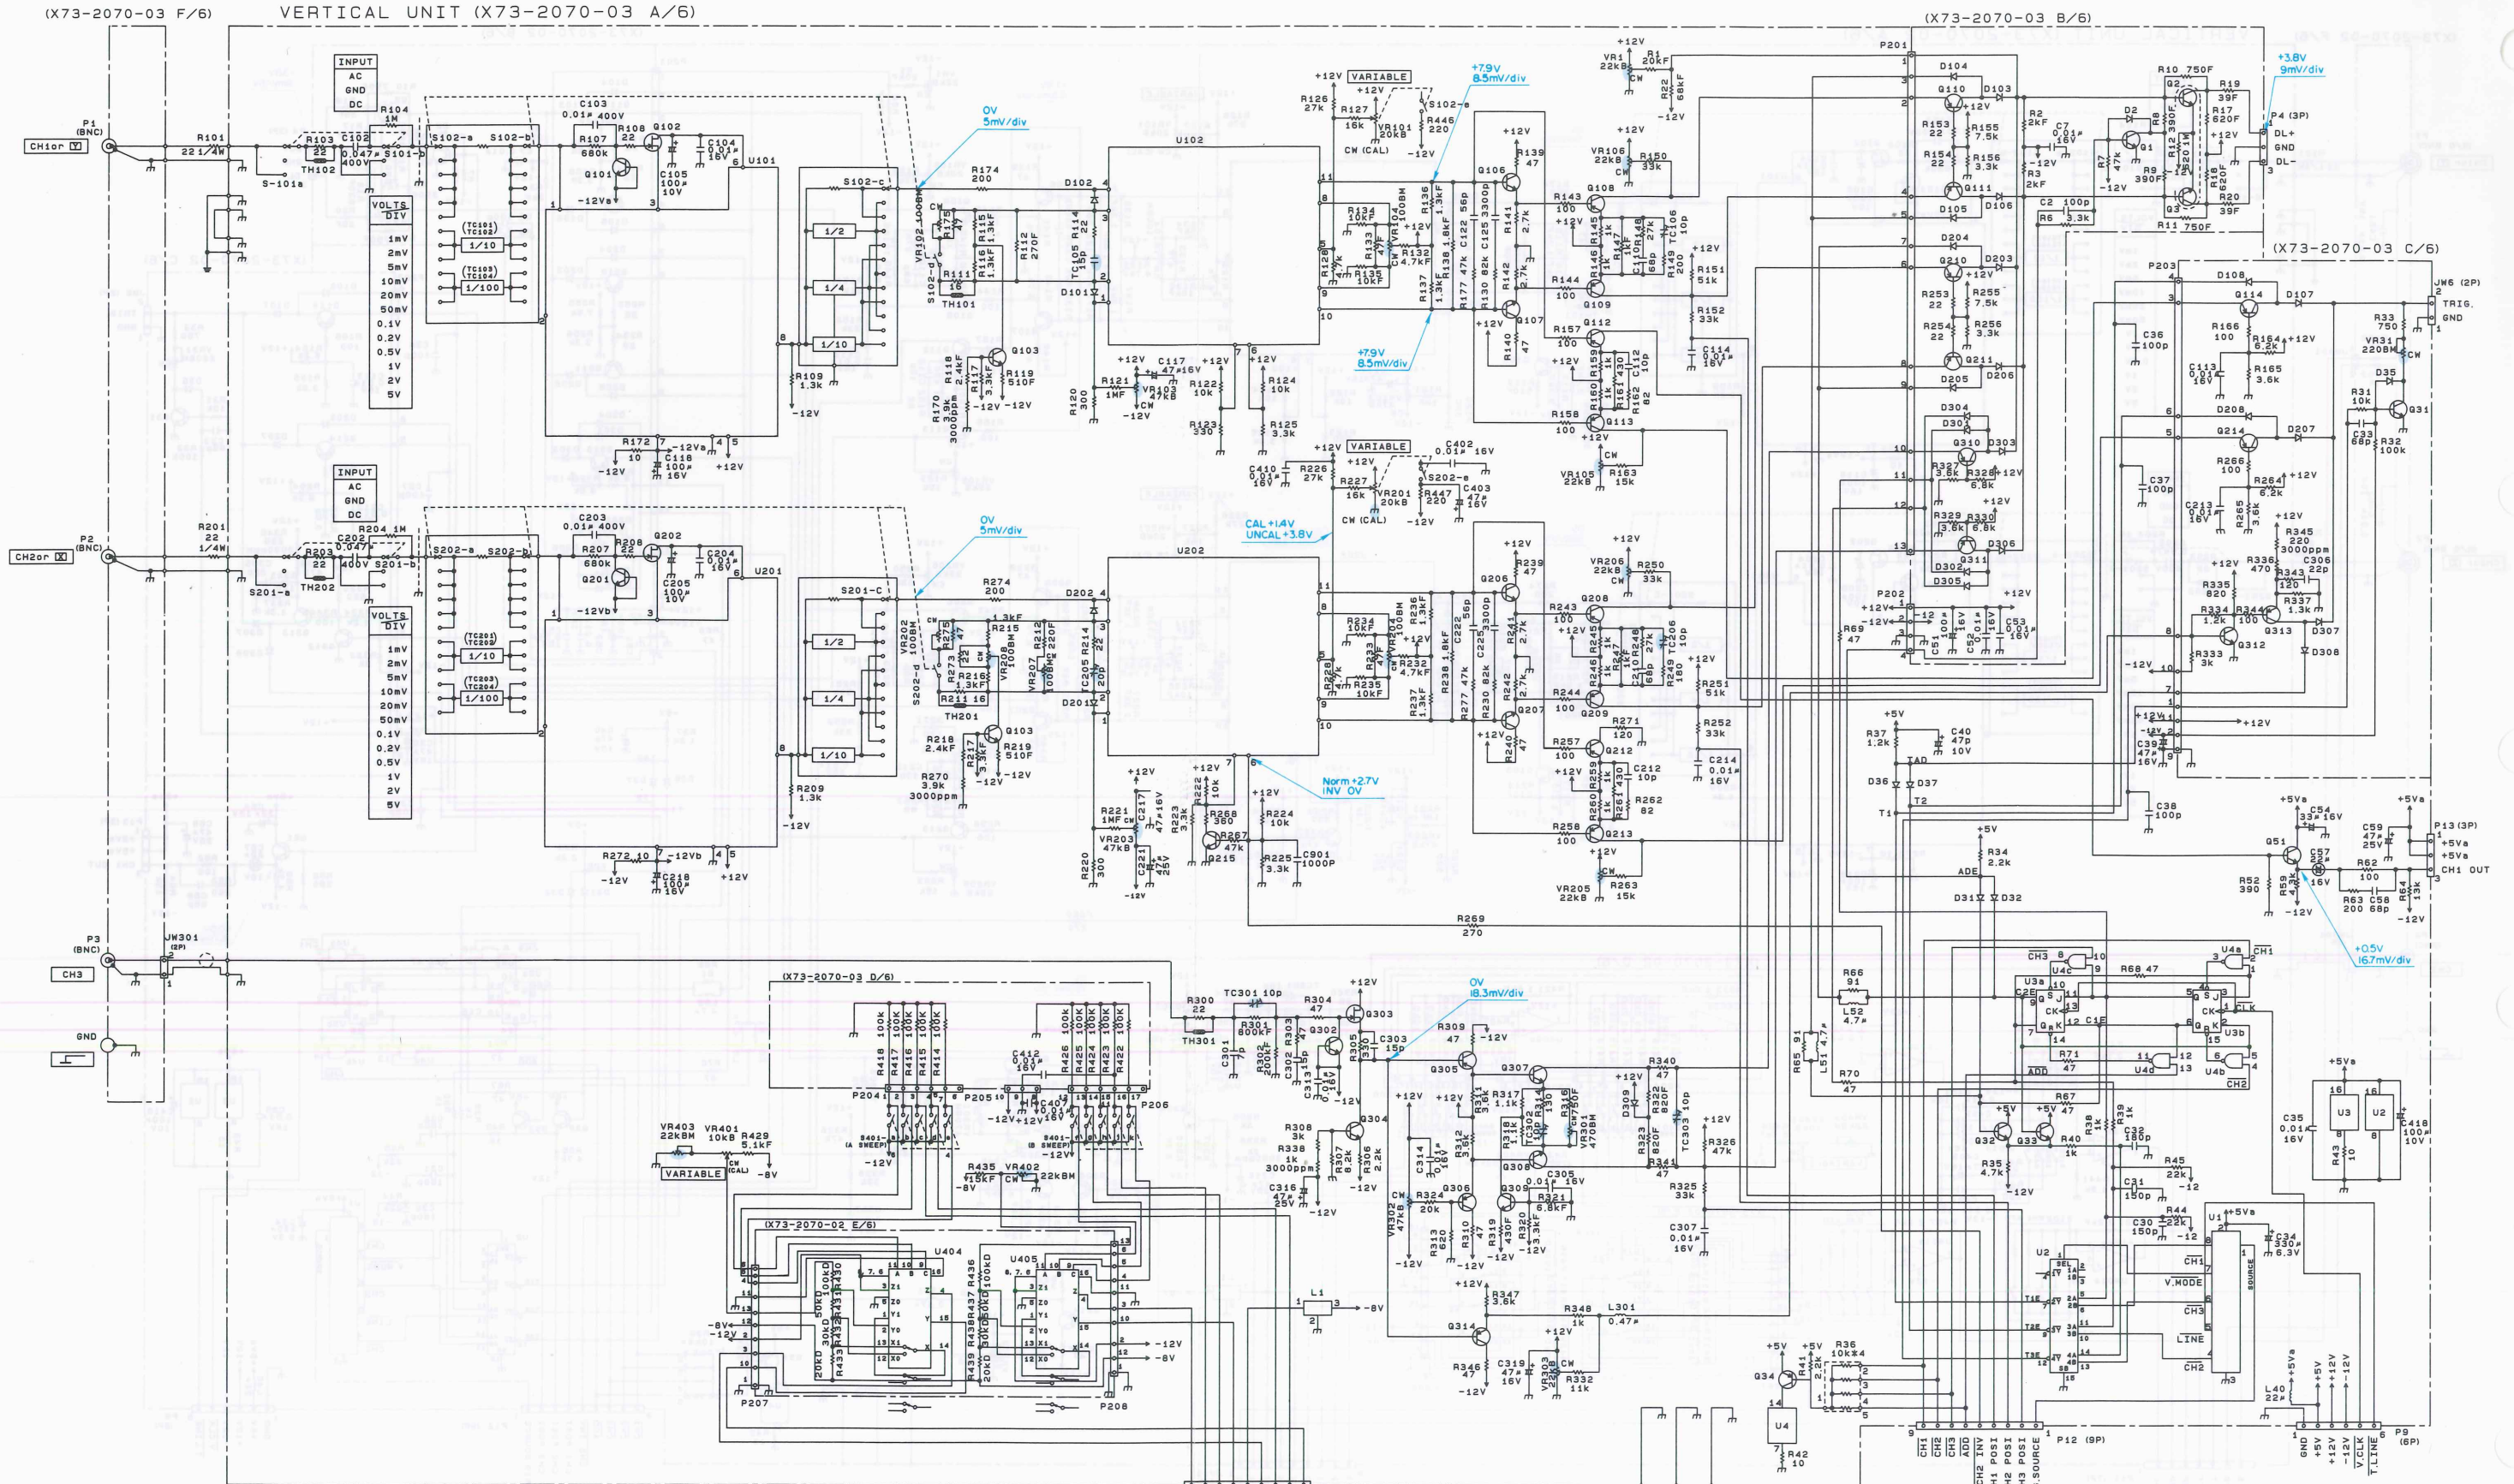


U1	:KMS01	Q1. 33. 215	:2SC1740S (R. S)	Q103. 203. 304. 307-309. 312	D2. 31. 302. 35-37. 101-108. 201-208
U2	:SN74LS158N	Q2. 3. 106. 107. 205. 207	:2SC3779 (D)	Q108-111. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 305	TH101. 201
U3	:SN74LS112AN	Q32	:2SC3066 (G)	Q112. 113. 212. 213. 214. 306	TH102. 202. 301: 112-102-2
U4	:SN74LS500N	Q34	:2SA933S (R. S)	Q109-110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 305	TH102. 202. 301: 112-201-2FM
U101. 201	:KMC13	Q51. 101. 201. 301	:2SC1923 (D)	Q112. 113. 212. 213. 214. 306	
U102. 202	:KMC12	Q102. 202. 303	:2SK404 (E)	Q109-110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 305	
U404. 405	:TC4053BP				

HORIZONTAL UNIT (X74-1580-02)

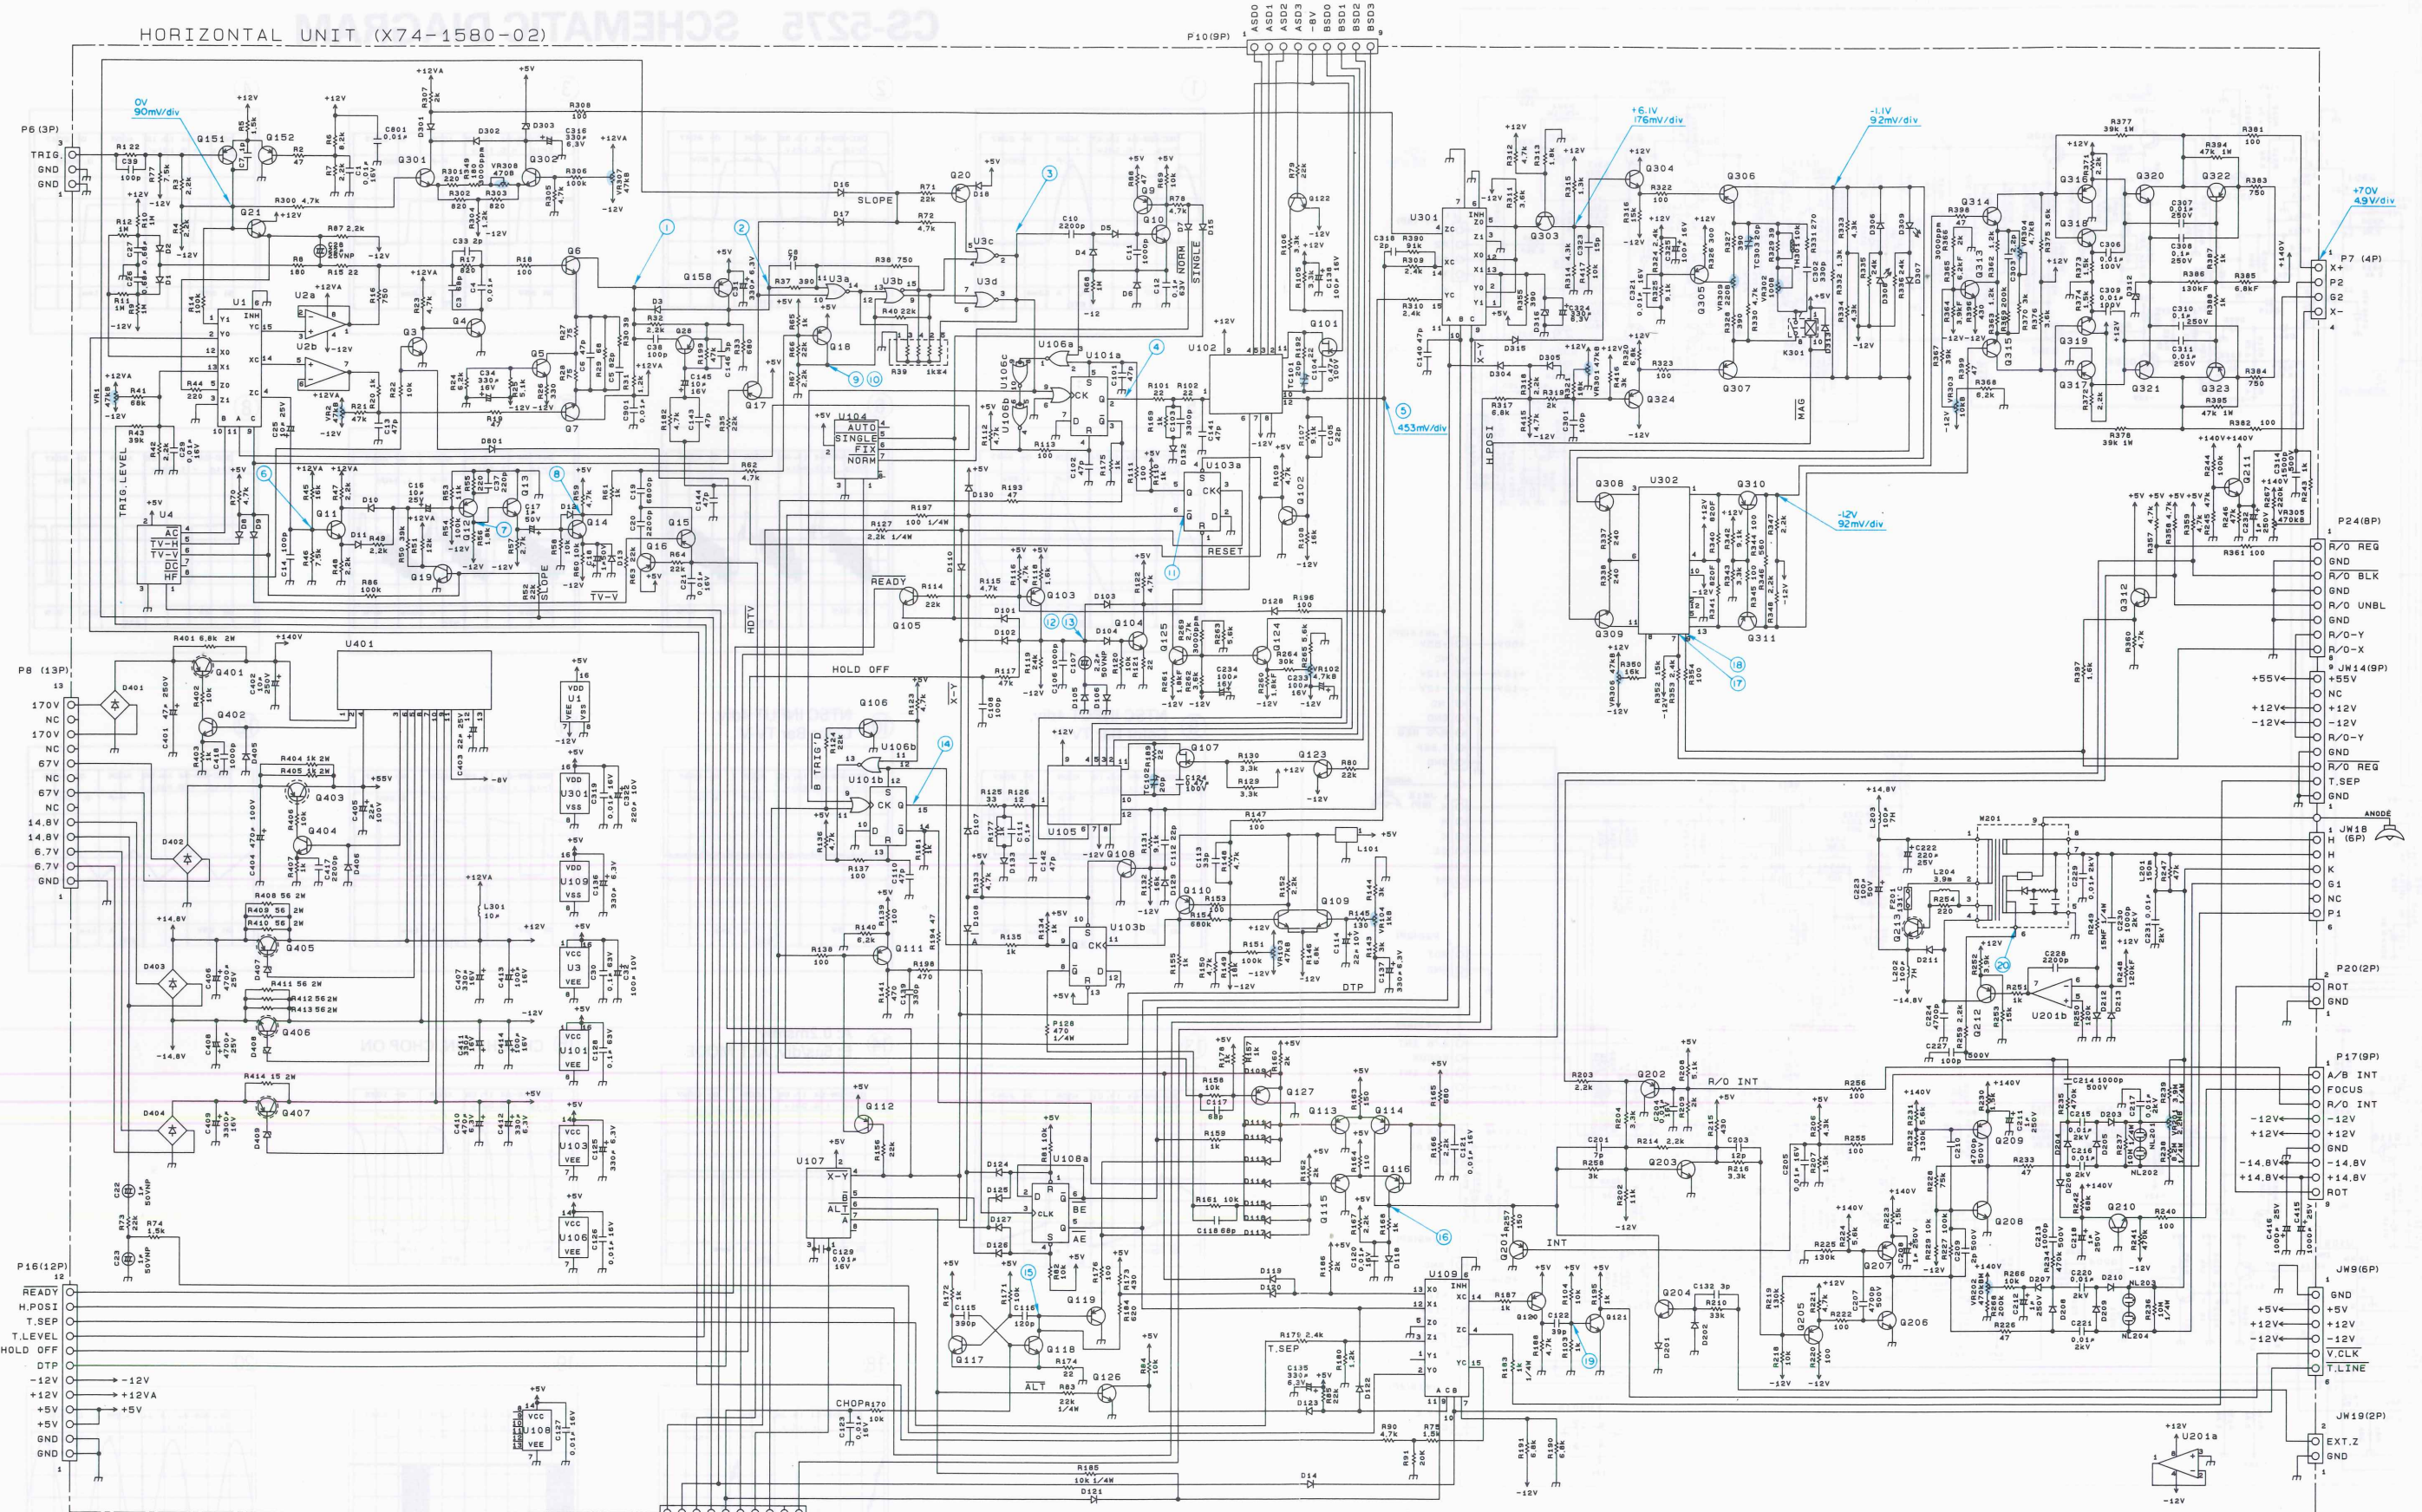


U1	: TC4053BP	Q21, 314, 315, 3	Q403	: 2SA1304	D309, 316	: MTZ3.0JA	NL201~204	: NE-38B
U2	: NJM072BD	Q101, 107	Q405, 407	: 2SB1035 (Y)	D309, 309	: TLH12		
U3	: MC10H102L	Q109	Q406	: 2SD1406 (Y)	D314, 309	: MTZ5.1UB		
U4, 104, 107	: KM501	Q206, 208			D40, 40, 40, 4	: S1V550		
U101	: MC10H131L	Q207, 209			D407, 408	: S4V820F		
U102, 105	: KMD05	Q210, 211, 402			D407, 408	: MTZ13UC		
U103, 108	: SN74ALS74AN	Q401			D409	: MTZ7.5JA		
U106	: SN74ALS02N	Q213						
U109, 301	: TC74HC4053AP	Q320, 301						
U201	: NJM4558D	Q322, 303						
U302	: KM601	Q401						
U401	: KMA02							




CS-5270 SCHEMATIC DIAGRAM


①




②




③




④




⑤




⑥




⑦




⑧

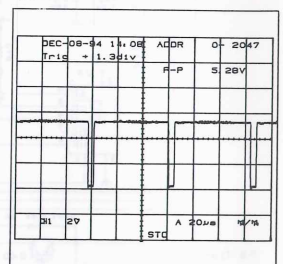


⑨ NTSC INPUT 4div, Color Bar TV-H




⑩ NTSC INPUT 4div, Color Bar TV-V




⑪




⑫




⑬




⑭ A: 0.2ms/div
B: 5µs/div, ALT MODE

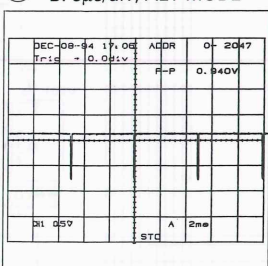


⑮ CH1/CH2: ON, CHOP ON




⑯ A: 0.5ms/div
B: 50µs/div, ALT MODE

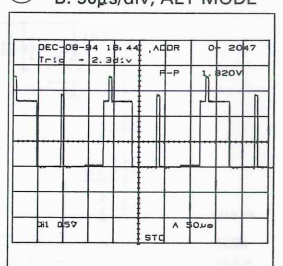


⑰

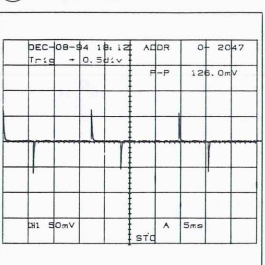


⑱



⑲








⑳



HORIZONTAL UNIT (X74-1580-03)

HORIZONTAL UNIT (X74-1583-03)

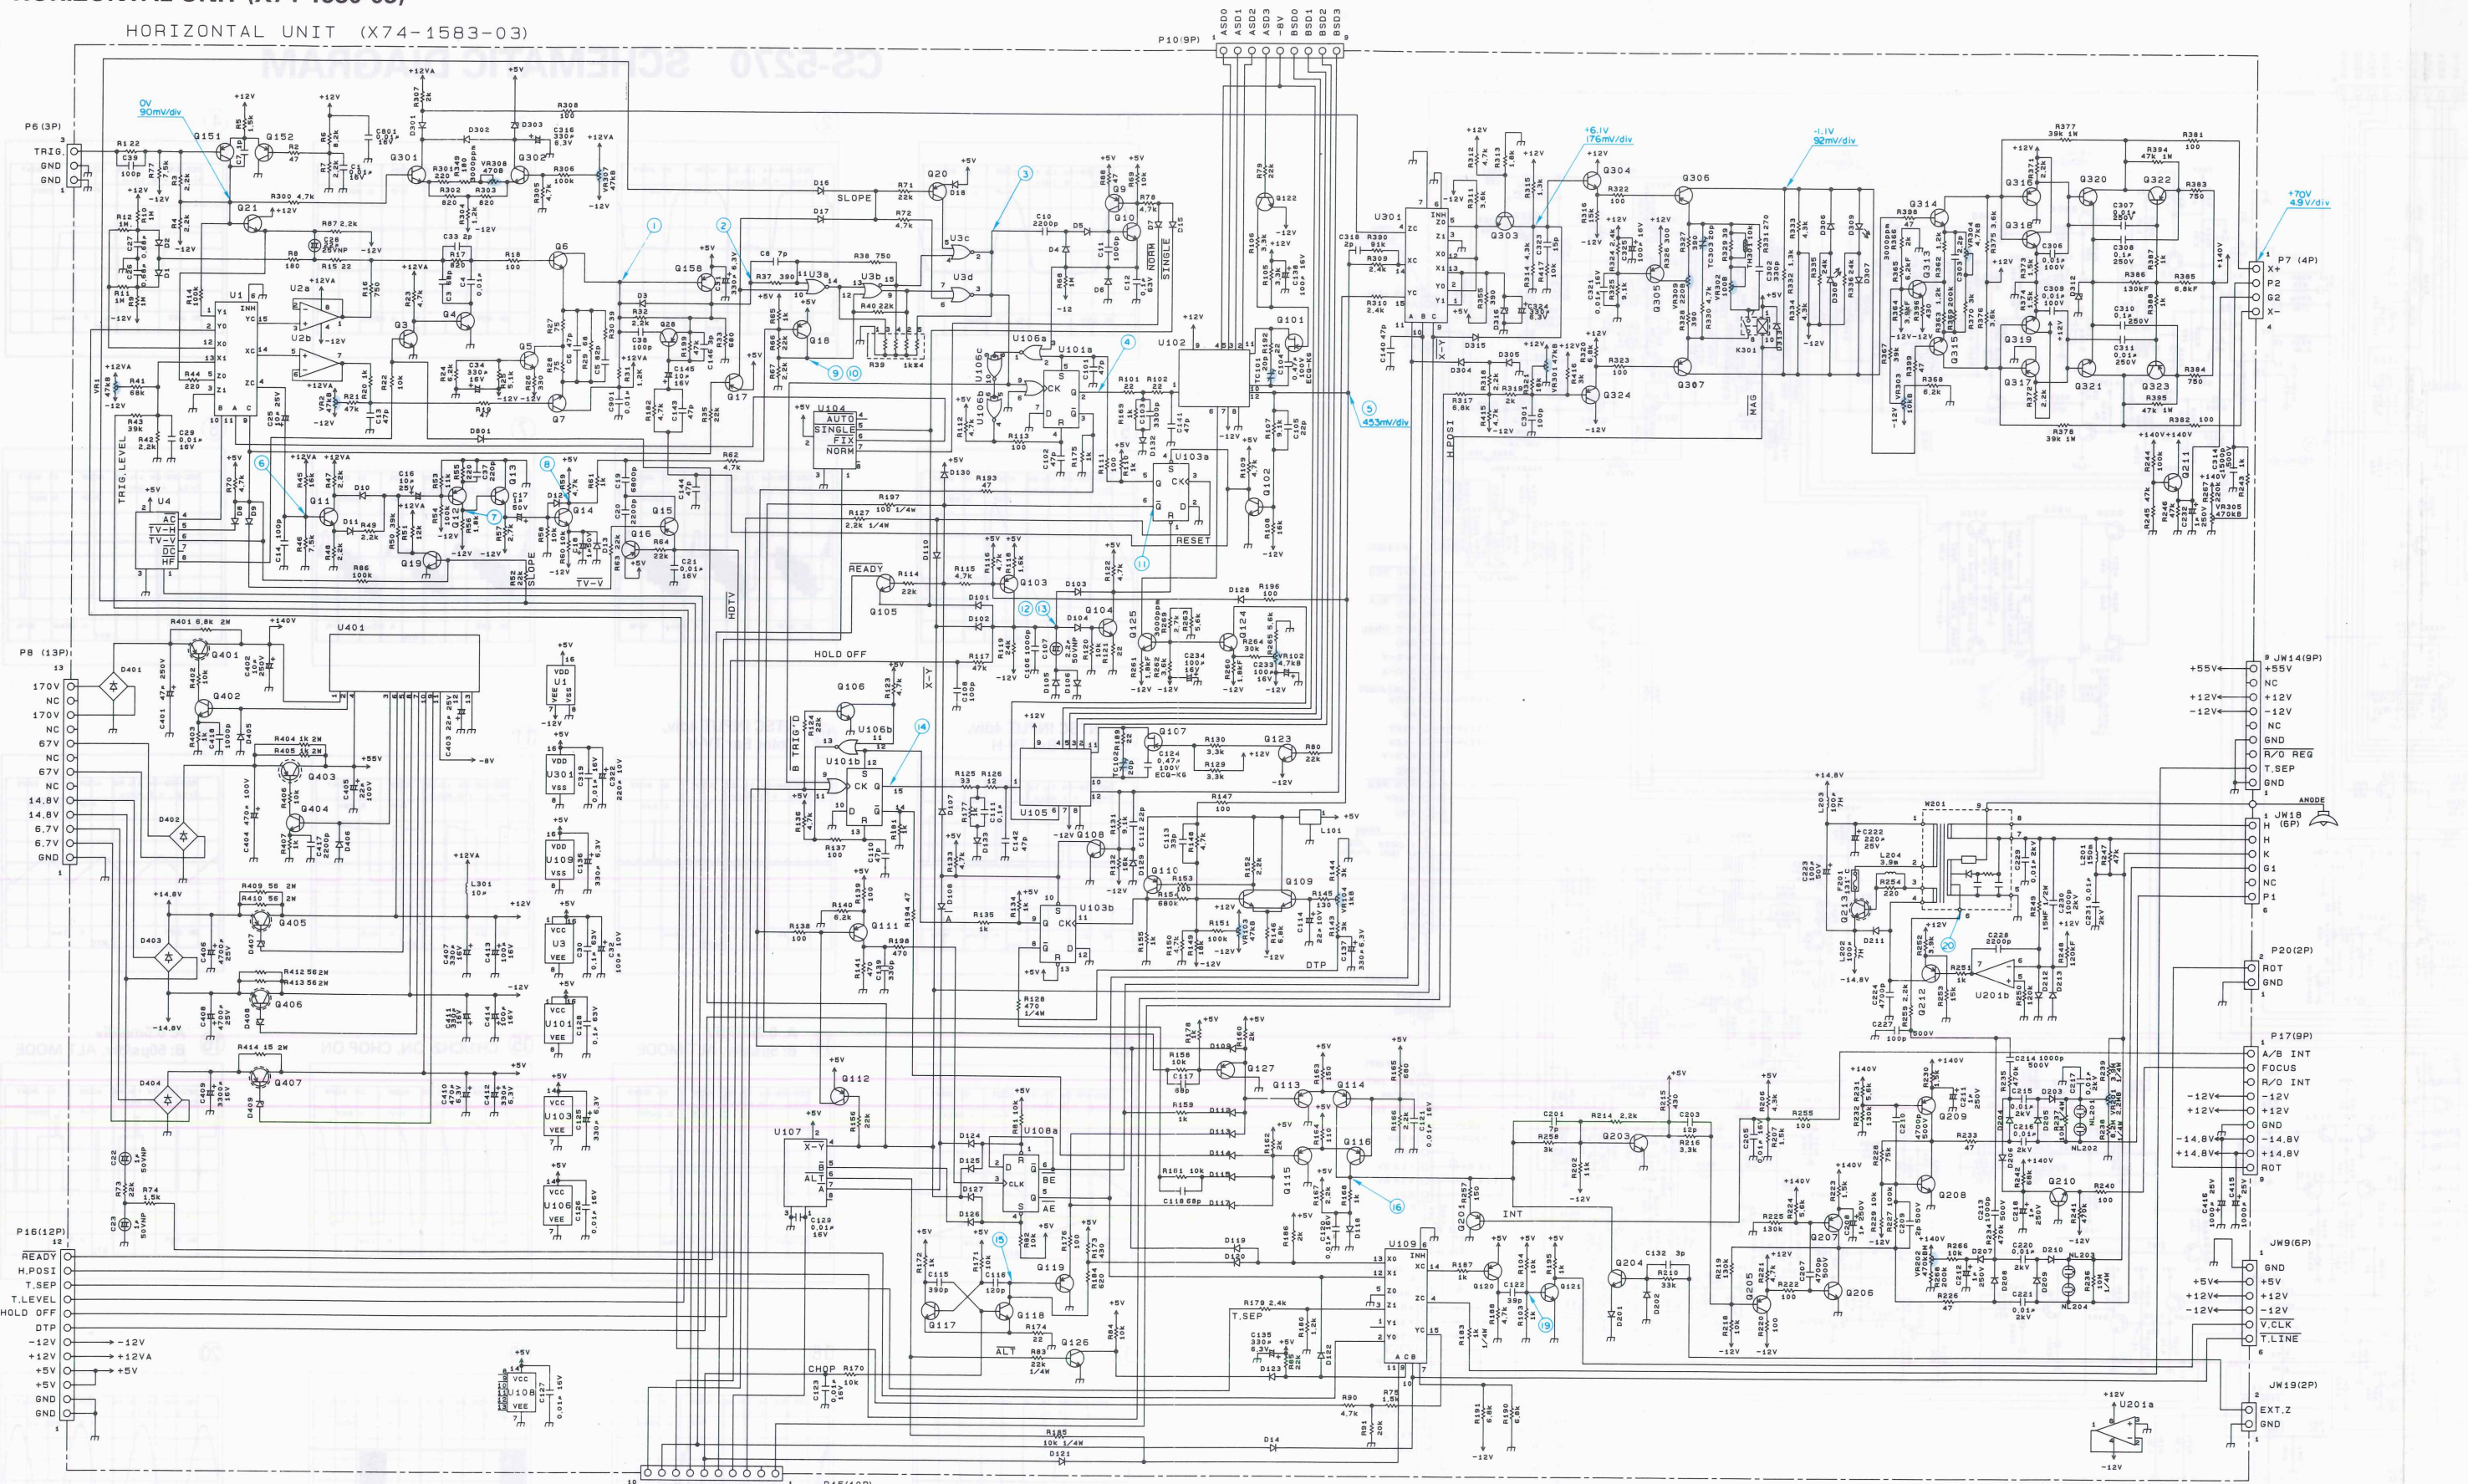



















U1	: 4053BP	Q3, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100
U2	: NJM0728D	
U3	: MC10H102L	
U4, 107, 104	: KMS01	
U101, 105	: MC10H131L	
U102, 106	: KMD05	
U103, 108	: SN74ALS74AN	
U106	: SN74ALS02N	
U109, 301	: TC74HC4053AP	
U201	: NJM4558D	
U401	: KMA02	

Q21, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500	
Q101, 107	: 2SK170 (V)
Q109	: 2SC3066 (G)
Q205, 208	: 2SC979 (S)
Q207, 209	: 2SA1208 (S)
Q210, 111, 402	: 2SC2551 (O)
Q213	: 2SD613 (E)
Q320, 321	: 2SC473 (E)
Q322, 323	: 2SA1828 (E)
Q401	: 2SA1499 (P)

Q403	: 2SA1304
Q405, 407	: 2SB1035 (Y)
Q406	: 2SD1406 (Y)
Q101, 107	: 2SK170 (V)
Q109	: 2SC3066 (G)
Q205, 208	: 2SC979 (S)
Q207, 209	: 2SA1208 (S)
Q210, 111, 402	: 2SC2551 (O)
Q213	: 2SD613 (E)
Q320, 321	: 2SC473 (E)
Q322, 323	: 2SA1828 (E)
Q401	: 2SA1499 (P)


D203 - 210	: 1SS83
D303, 310	: MT23.0JA
D305, 309	: TLR112
D306	: MT25.1JB
D401, 402, 404	: S1V80
D403	: S4V20F
D407, 408	: MT213JC
D409	: MT7.5JA

CS-5275 SCHEMATIC DIAGRAM

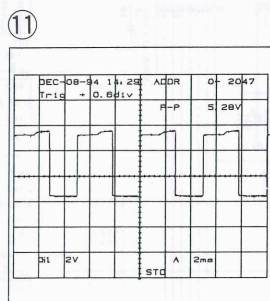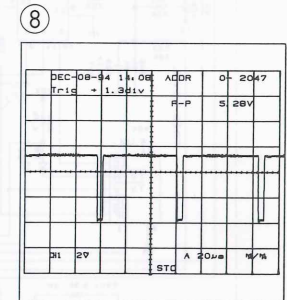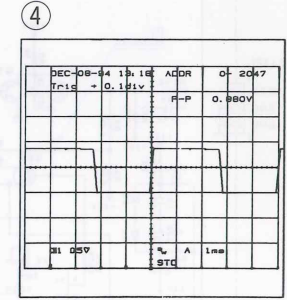


CS-5270 SCHEMATIC DIAGRAM


FINAL AMP UNIT (X80-1370-02)

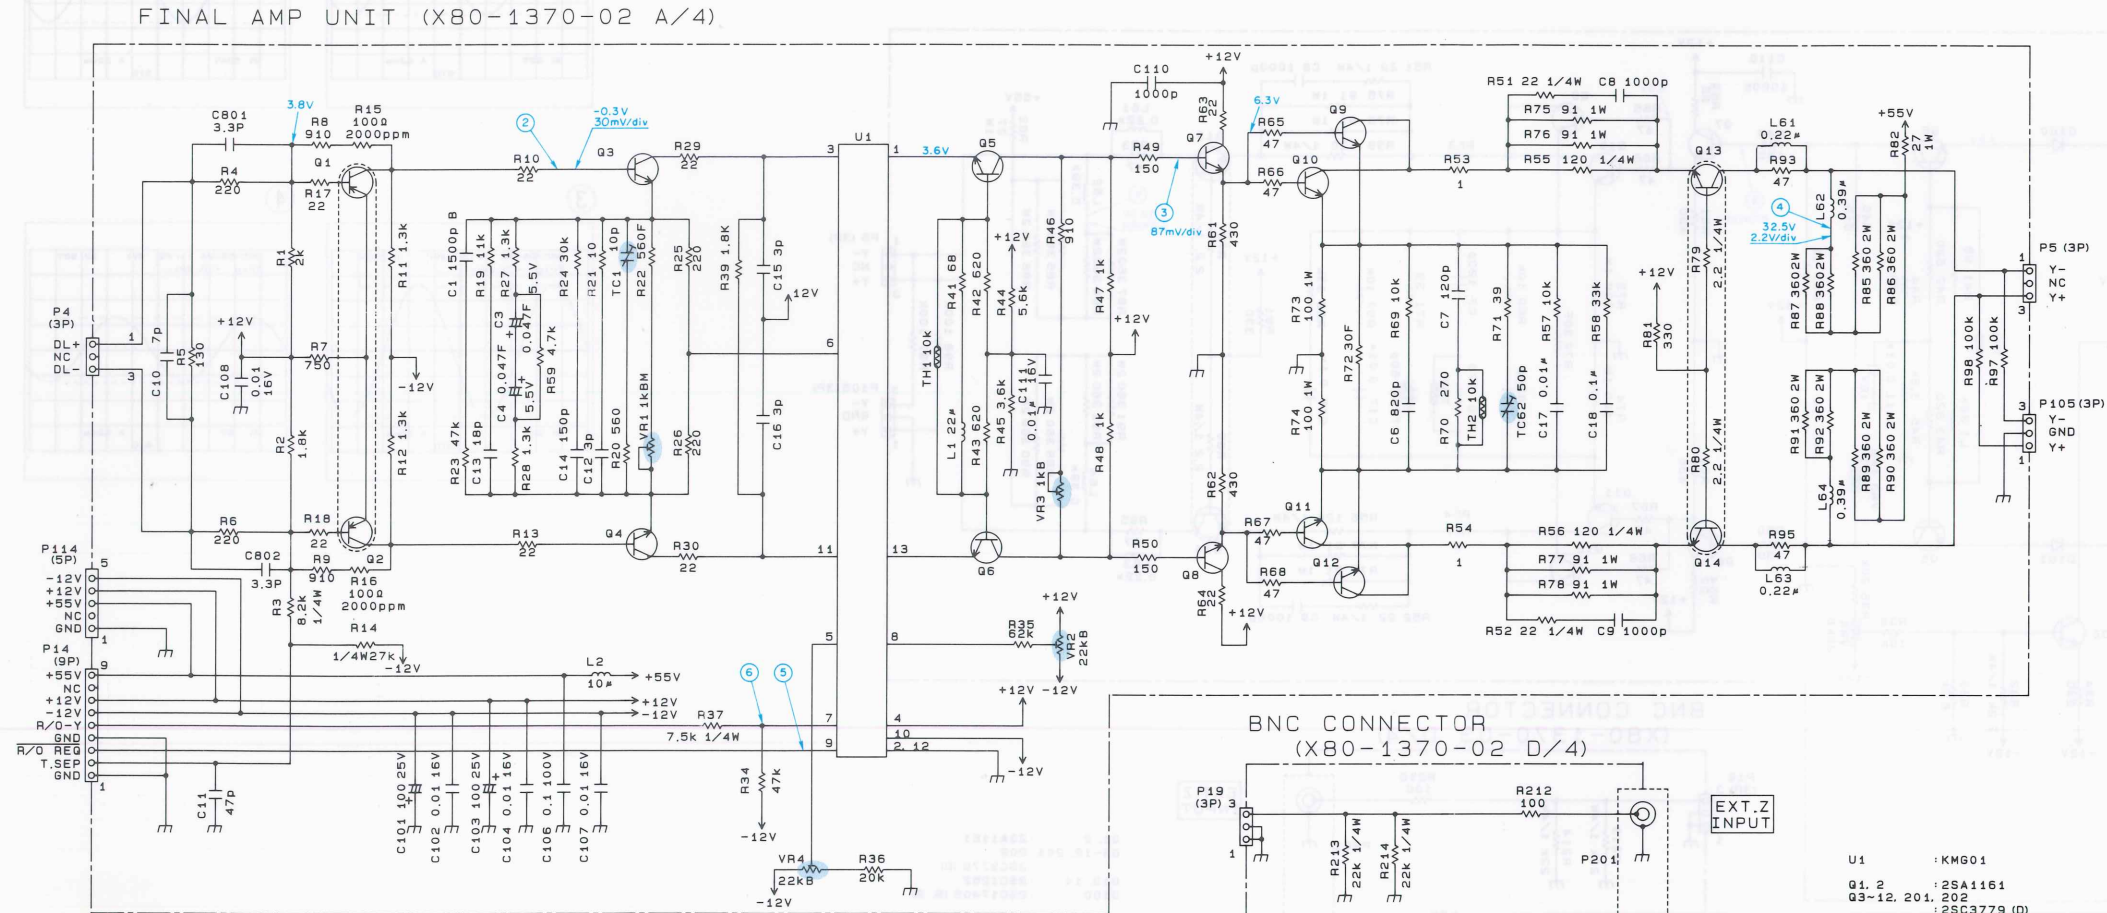


① INPUT: 1kHz 6div
5mV/div




②




③




④



⑤




⑥




GND
CH1
ΔV1 cursor
+3div, -3div


AC SELECTOR (X80-1370-02 B/4)

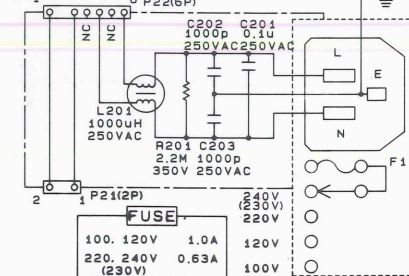

CRT SOCKET (X80-1370-02 C/4)

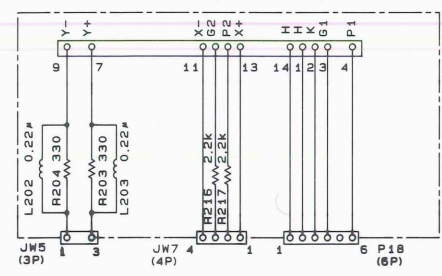


BNC CONNECTOR (X80-1370-02 D/4)

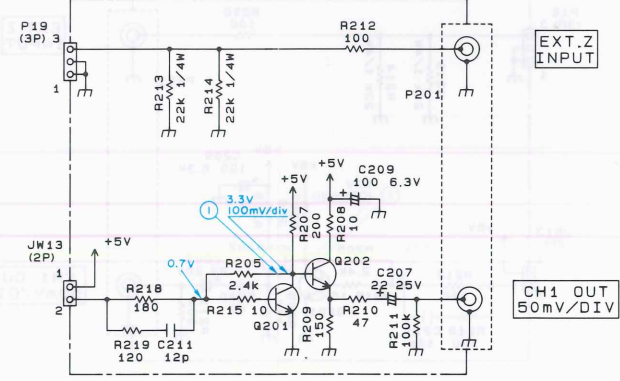


CS-5275 SCHEMATIC DIAGRAM


FINAL AMP UNIT (X80-1370-03)

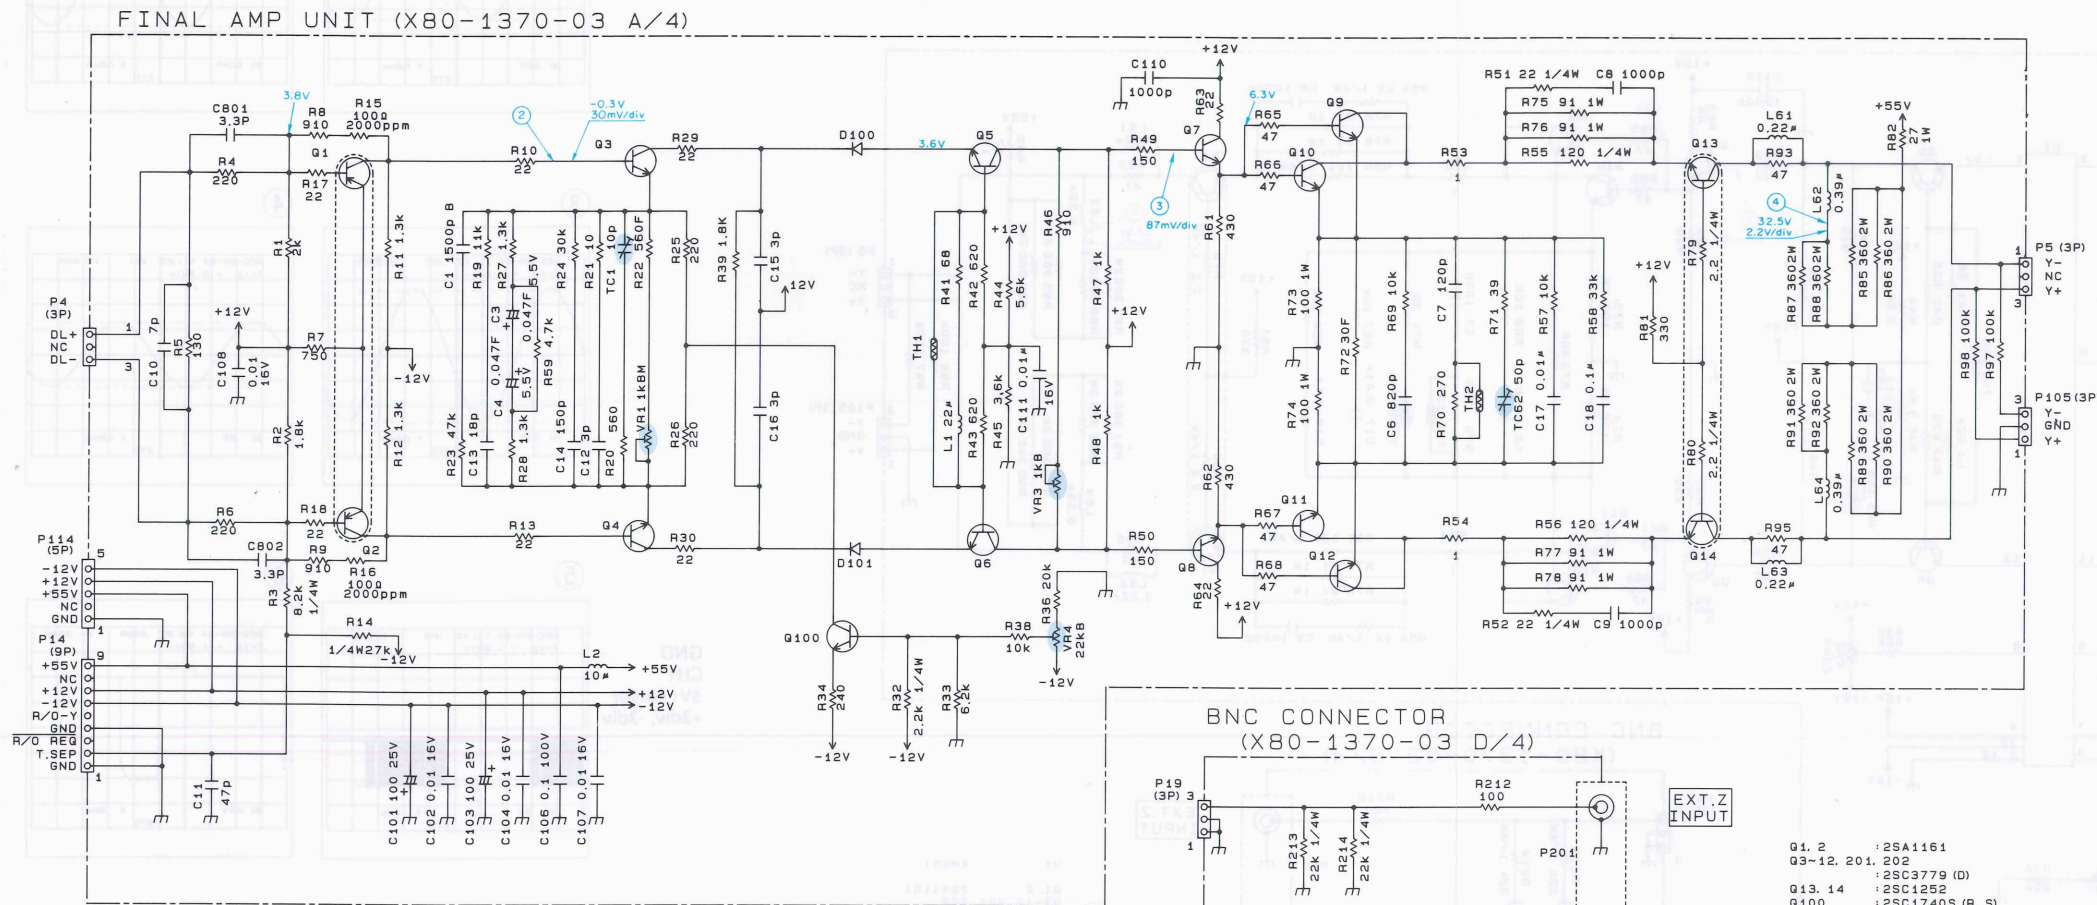


AC SELECTOR (X80-1370-03 B/4)

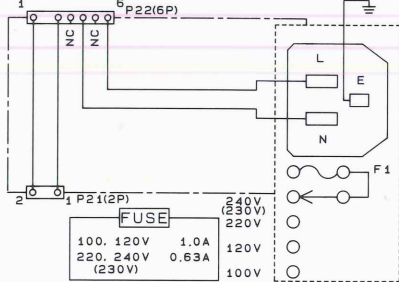

CRT SOCKET (X80-1370-03 C/4)

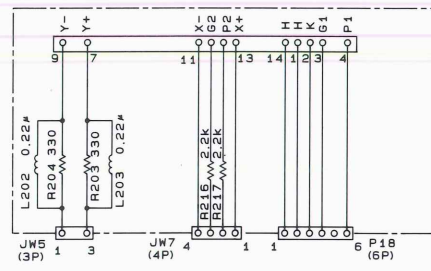


BNC CONNECTOR (X80-1370-03 D/4)

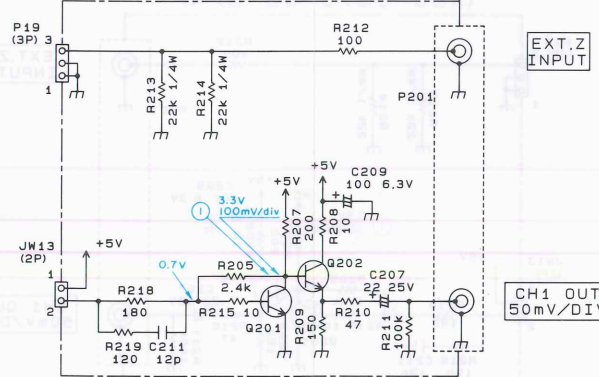


- Q1, 2 : 2SA1161
- Q3-12, 201, 202 : 2SC3779 (D)
- Q13, 14 : 2SC1252
- Q100 : 2SC1740S (R, S)
- D100, 101 : MA700
- TH1, 2 : 112-103-2FM


① INPUT: 1kHz 6div
5mV/div




②



③



④




CS-5270 SCHEMATIC DIAGRAM

R/O UNIT (X77-1870-00)

R/O UNIT (X77-1870-00)

- U1 : CTM5280
- U2 : LC3664ASL-10
- U3 : NJM311D
- U4 : SN74ALS138N
- U5 : SN74ALS32N
- U6 : SN74ALS373N
- U7, 8 : SN74ALS374AN
- U9, 10 : DAC0808LCN
- U11, 12 : TC74HC4051AP
- U13 : NJM072BD
- U14 : SN74LS164N
- U15 : SN74ALS04BN
- U16 : HA17012PB
- U17 : HD14051BP
- U18 : PST518B

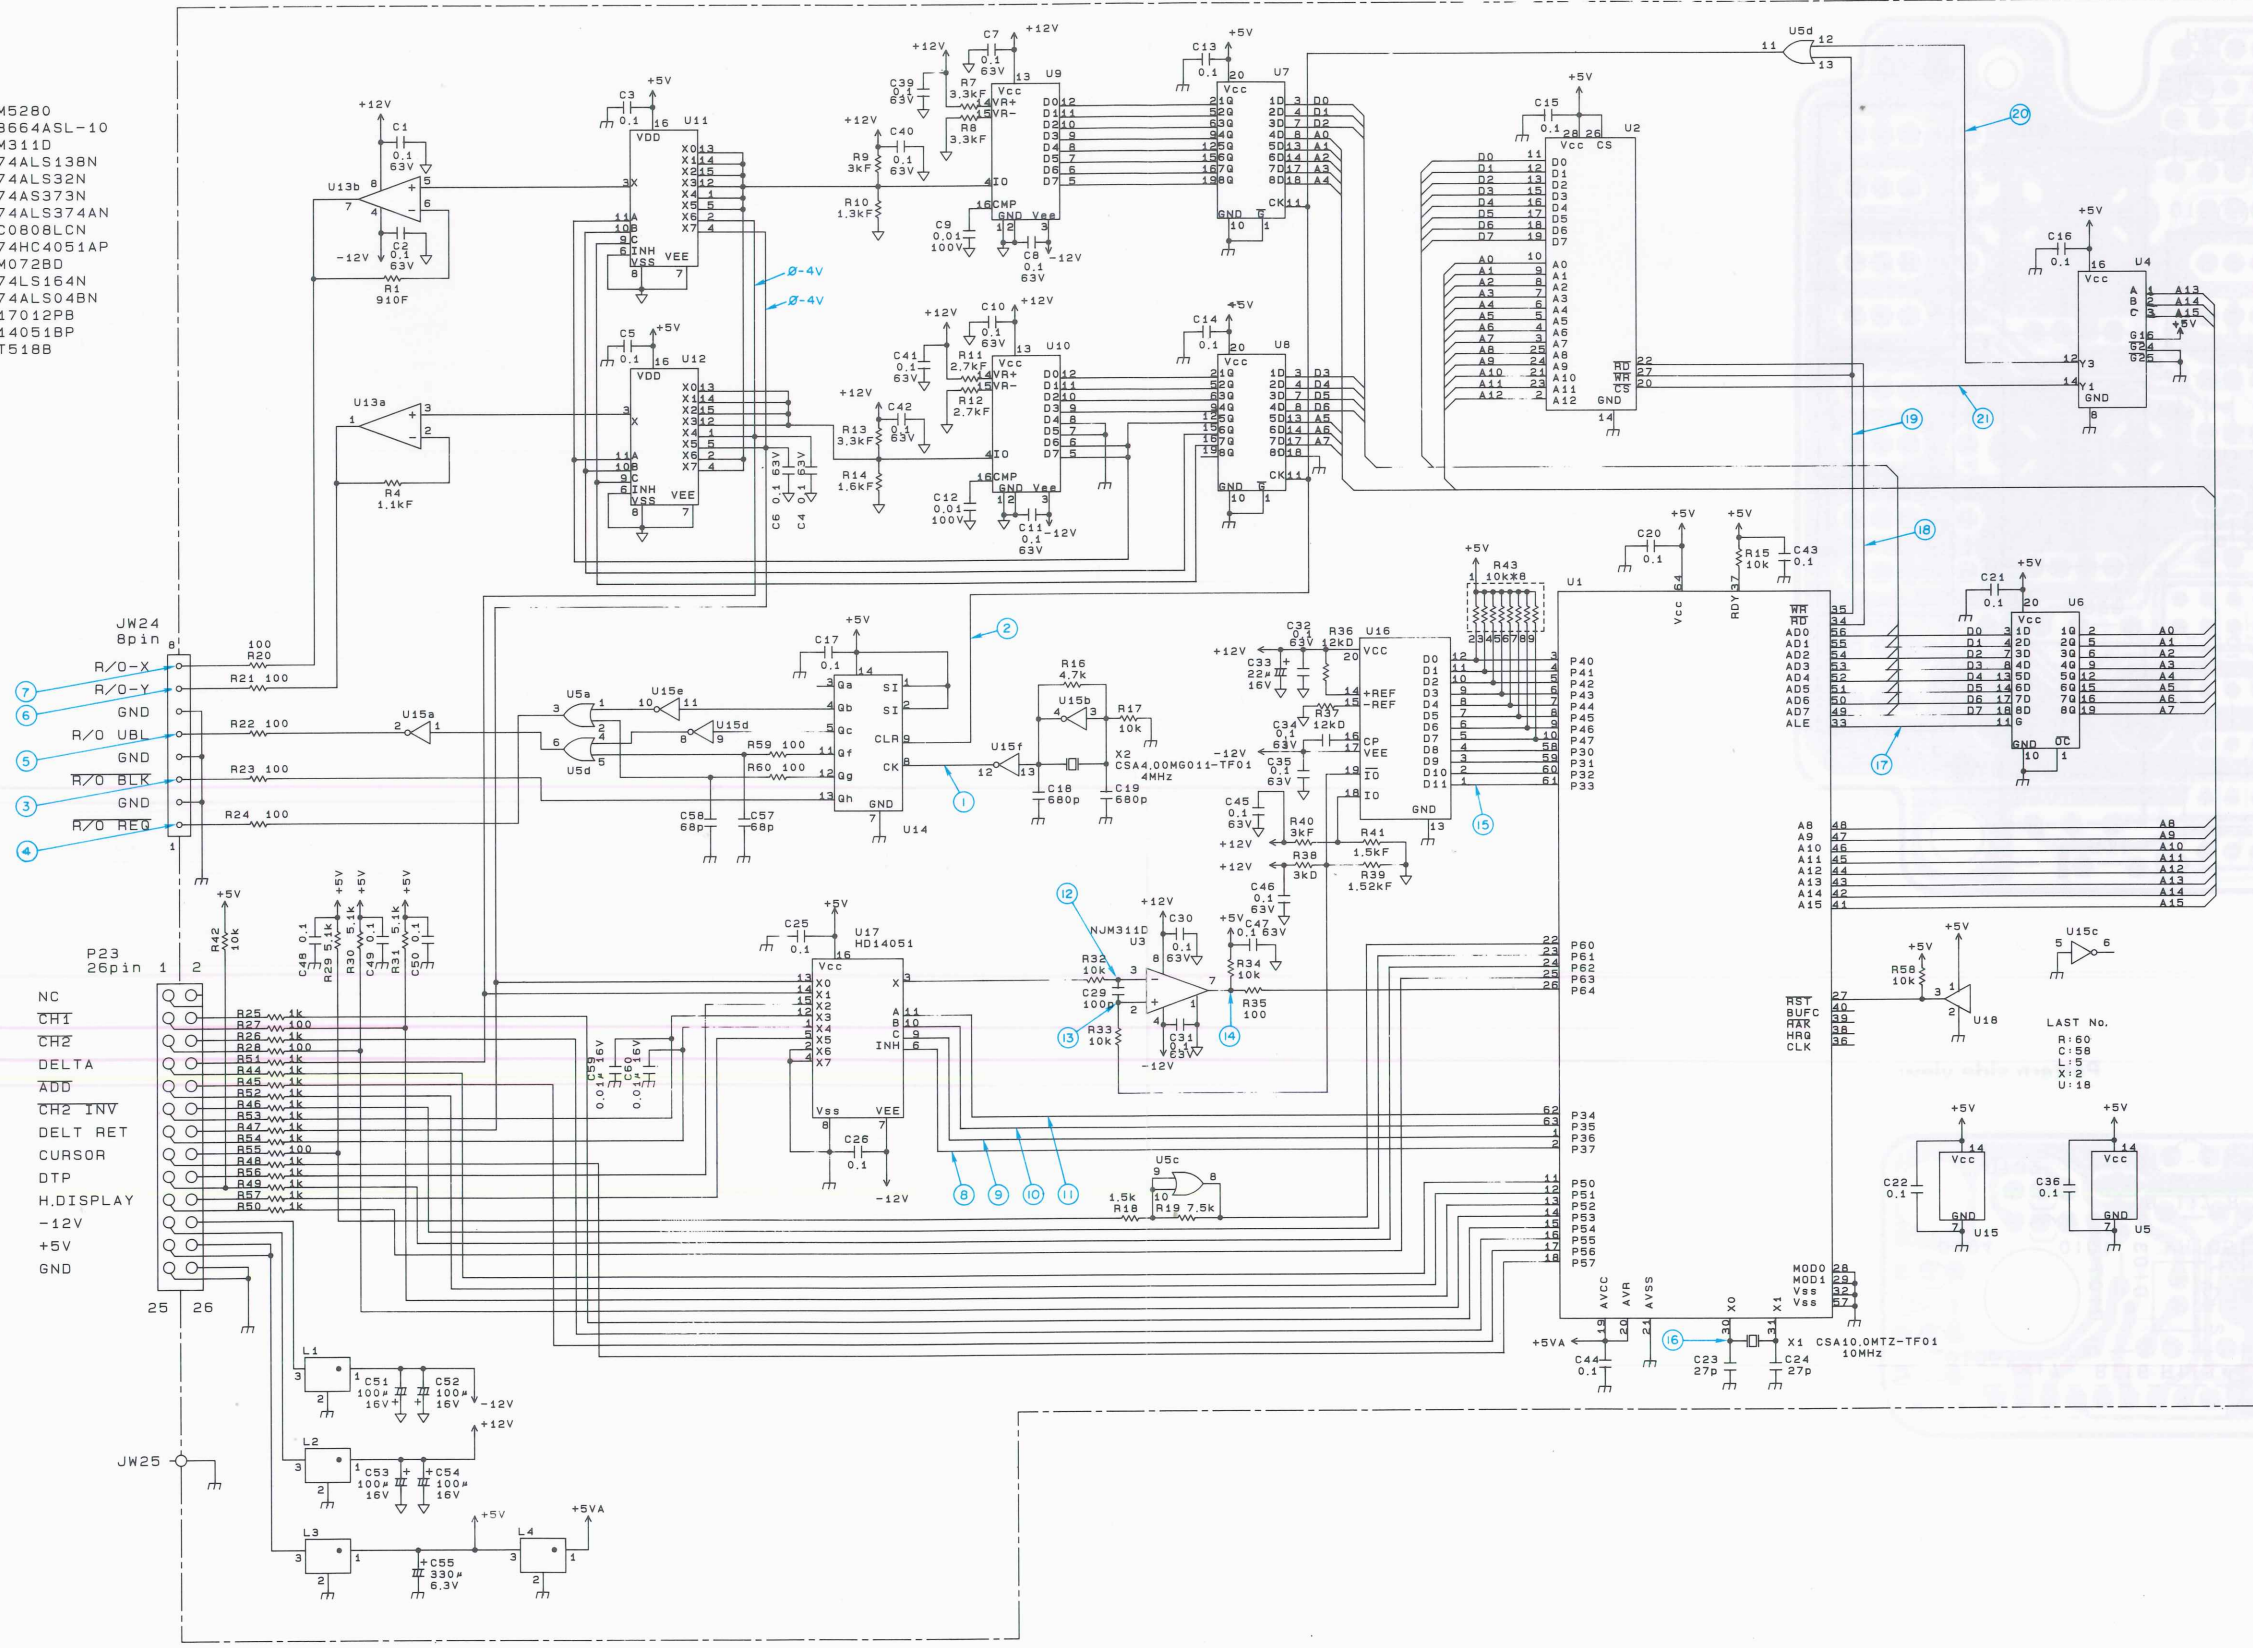

NC	NC	R25	1k
CH1 PB	CH1	R27	100
CH2 PB	CH2	R28	1k
CH1 ATT	DELTA	R29	100
CH2 ATT	ADD	R44	1k
A SWEEP	CH2 INV	R45	1k
B SWEEP	DELT RET	R46	1k
H.UNCAL	CURSOR	R47	1k
MAG	DTP	R48	1k
B TRIG'D	H.DISPLAY	R49	1k
+12V	-12V	R50	1k
+5V	+5V		
GND	GND		

1



5

10


15

20


①




②




③




④




⑤




⑥




⑦




⑧




⑨




⑩




⑪




⑫




⑬




⑭




⑮




⑯




⑰




⑱




⑲



⑳



㉑



Measuring condition


- V-MODE: CH1
- H-MODE: A
- CURSOR MODE: ON
- ΔT , $I/\Delta T$ MODE
- Δ CURSOR 10div
- Δ REF CURSOR 0div

P.C. BOARD


C2-5270 SCHEMATIC DIAGRAM

PANEL UNIT (X66-1400-0X)

Pattern side view

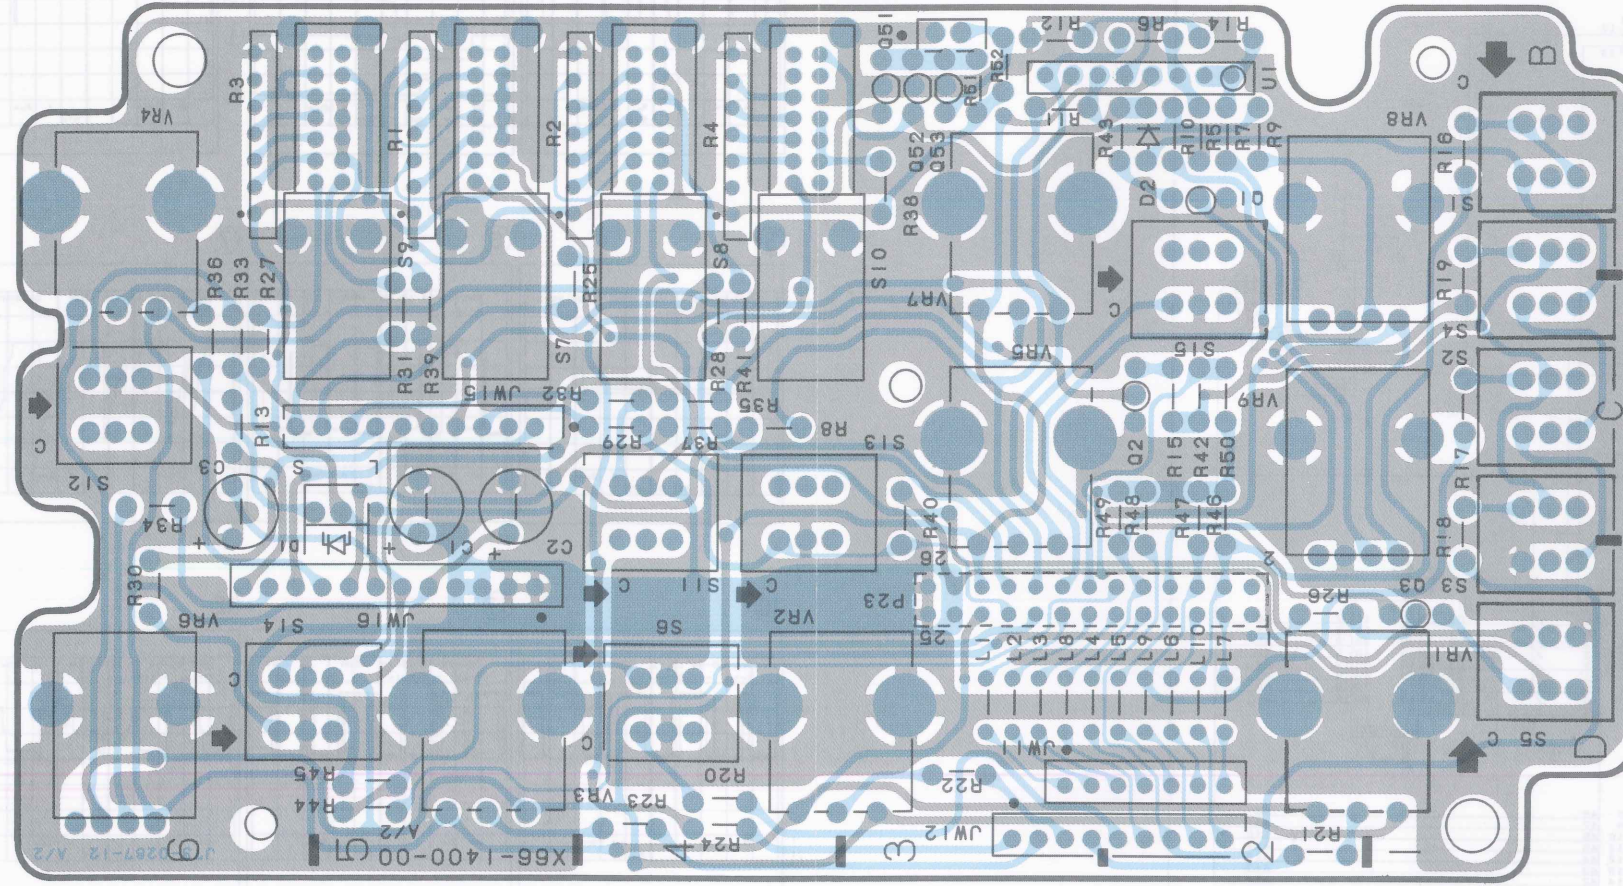

Pattern side view






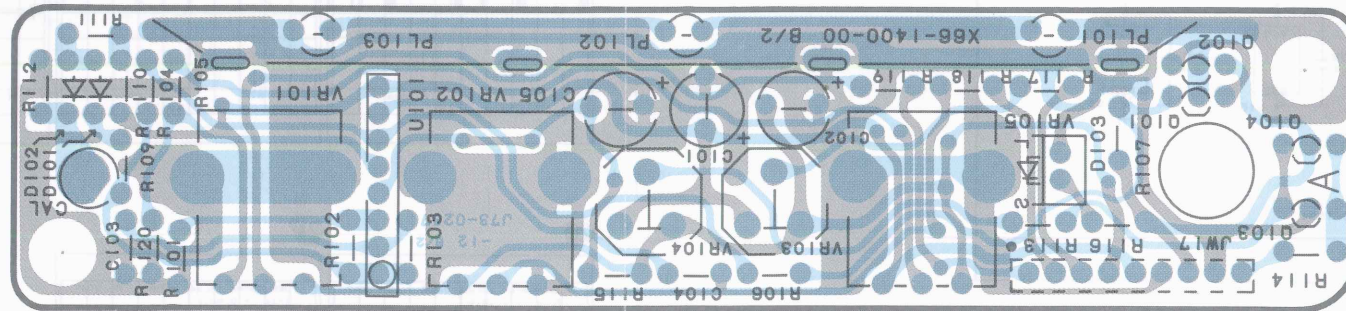


Measuring condition
 * V MODE: CH1
 * H MODE: A
 * CURSOR MODE: GM
 * ST: VLT MODE
 * CURSOR: 100V
 * REF CURSOR: 0V

P.C. BOARD

VERTICAL UNIT (X73-2070-0X)

Pattern side view

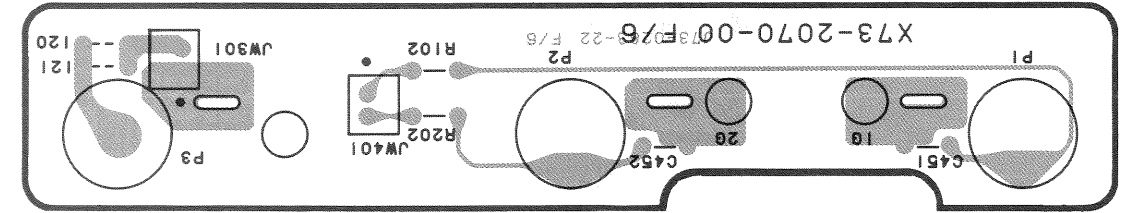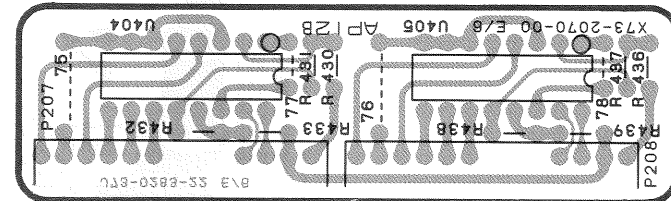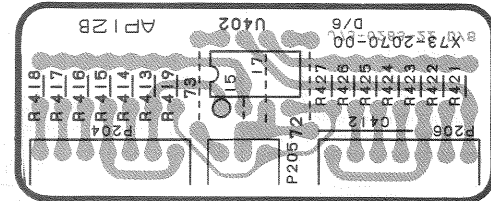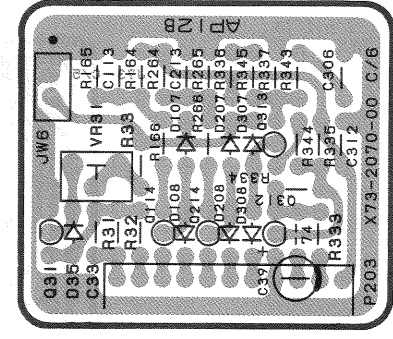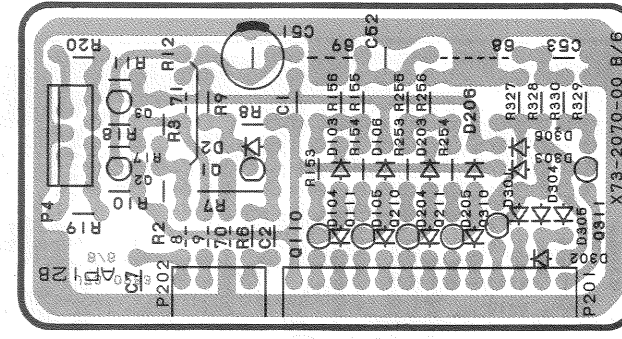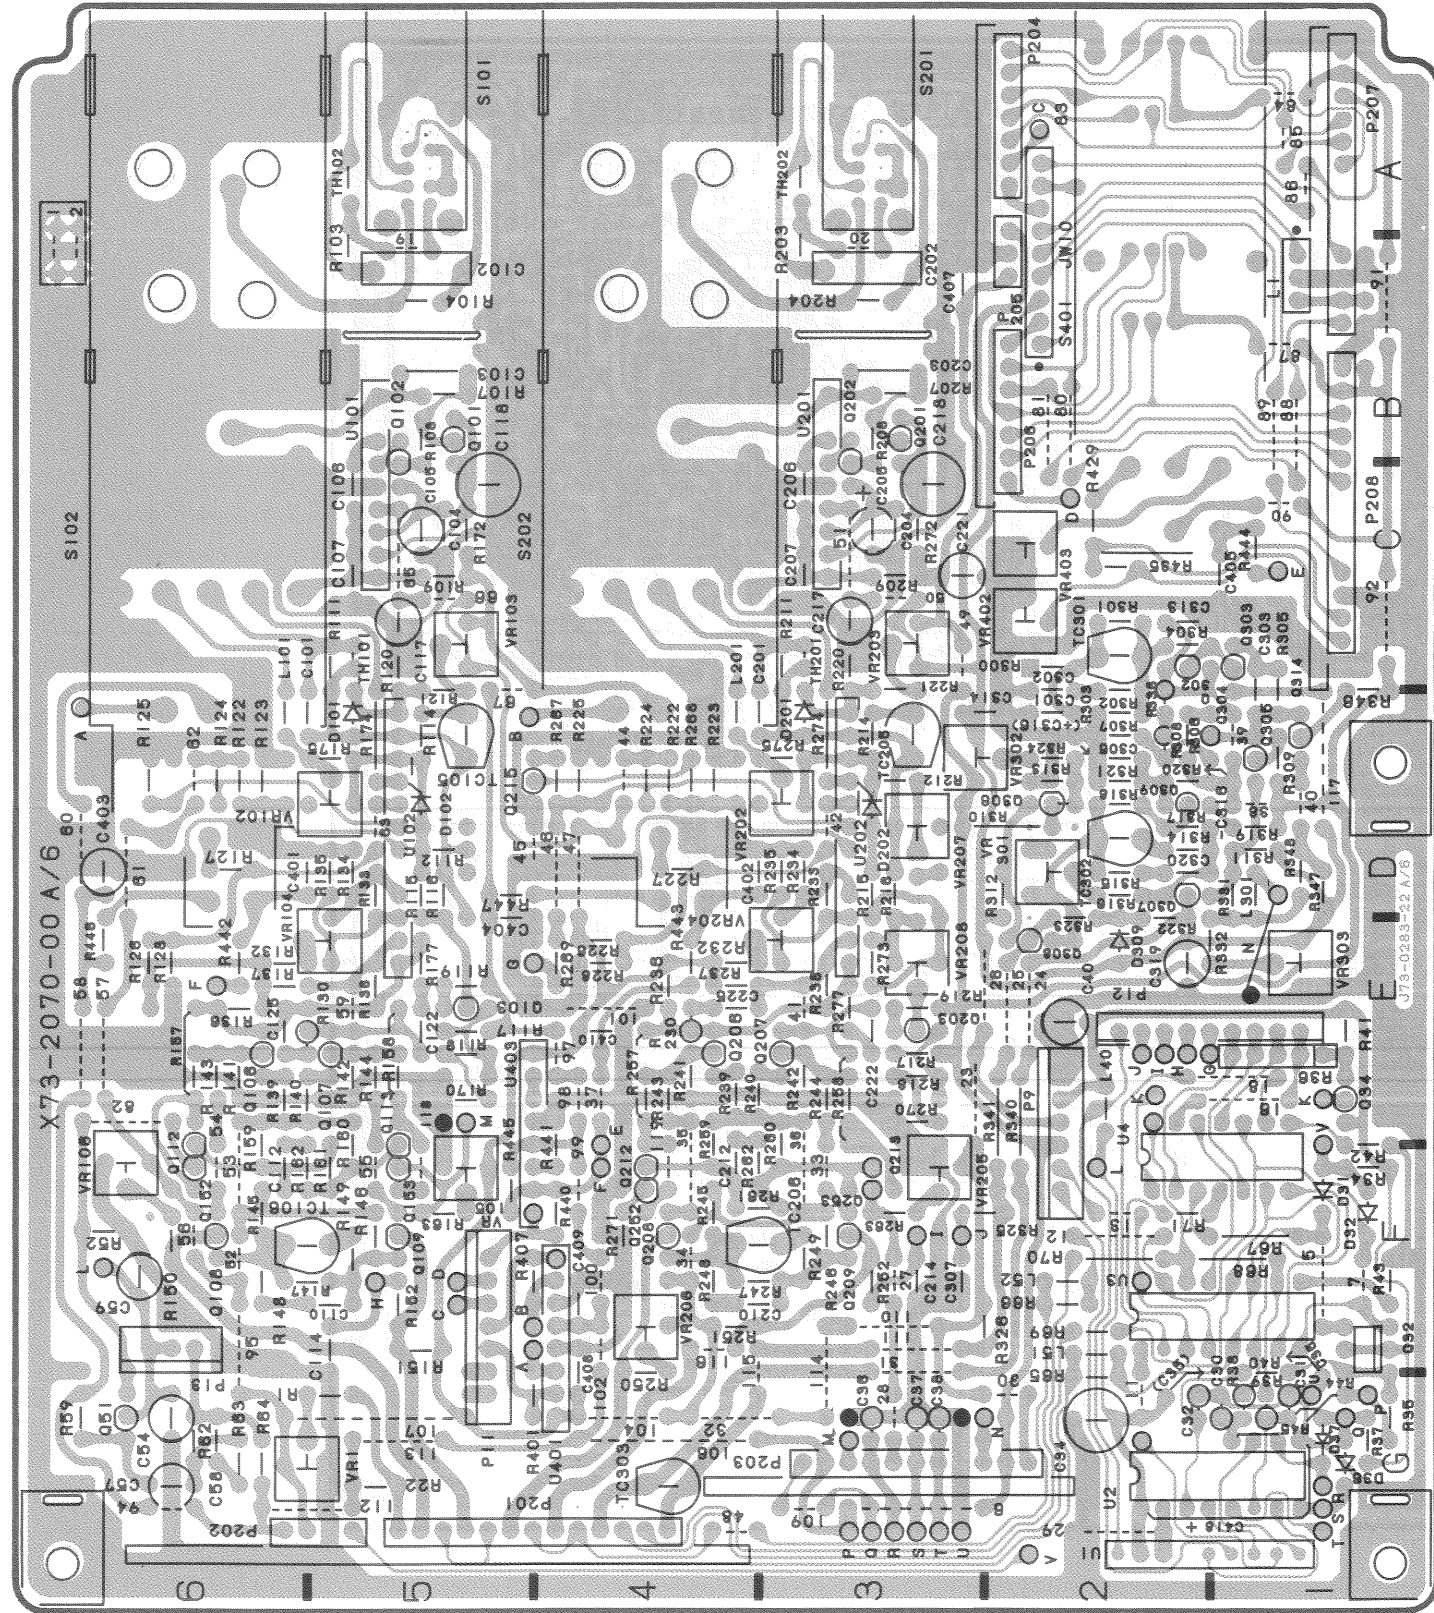


Pattern side view

P.C. BOARD

HORIZONTAL UNIT (X74-1580-0X)

Pattern side view

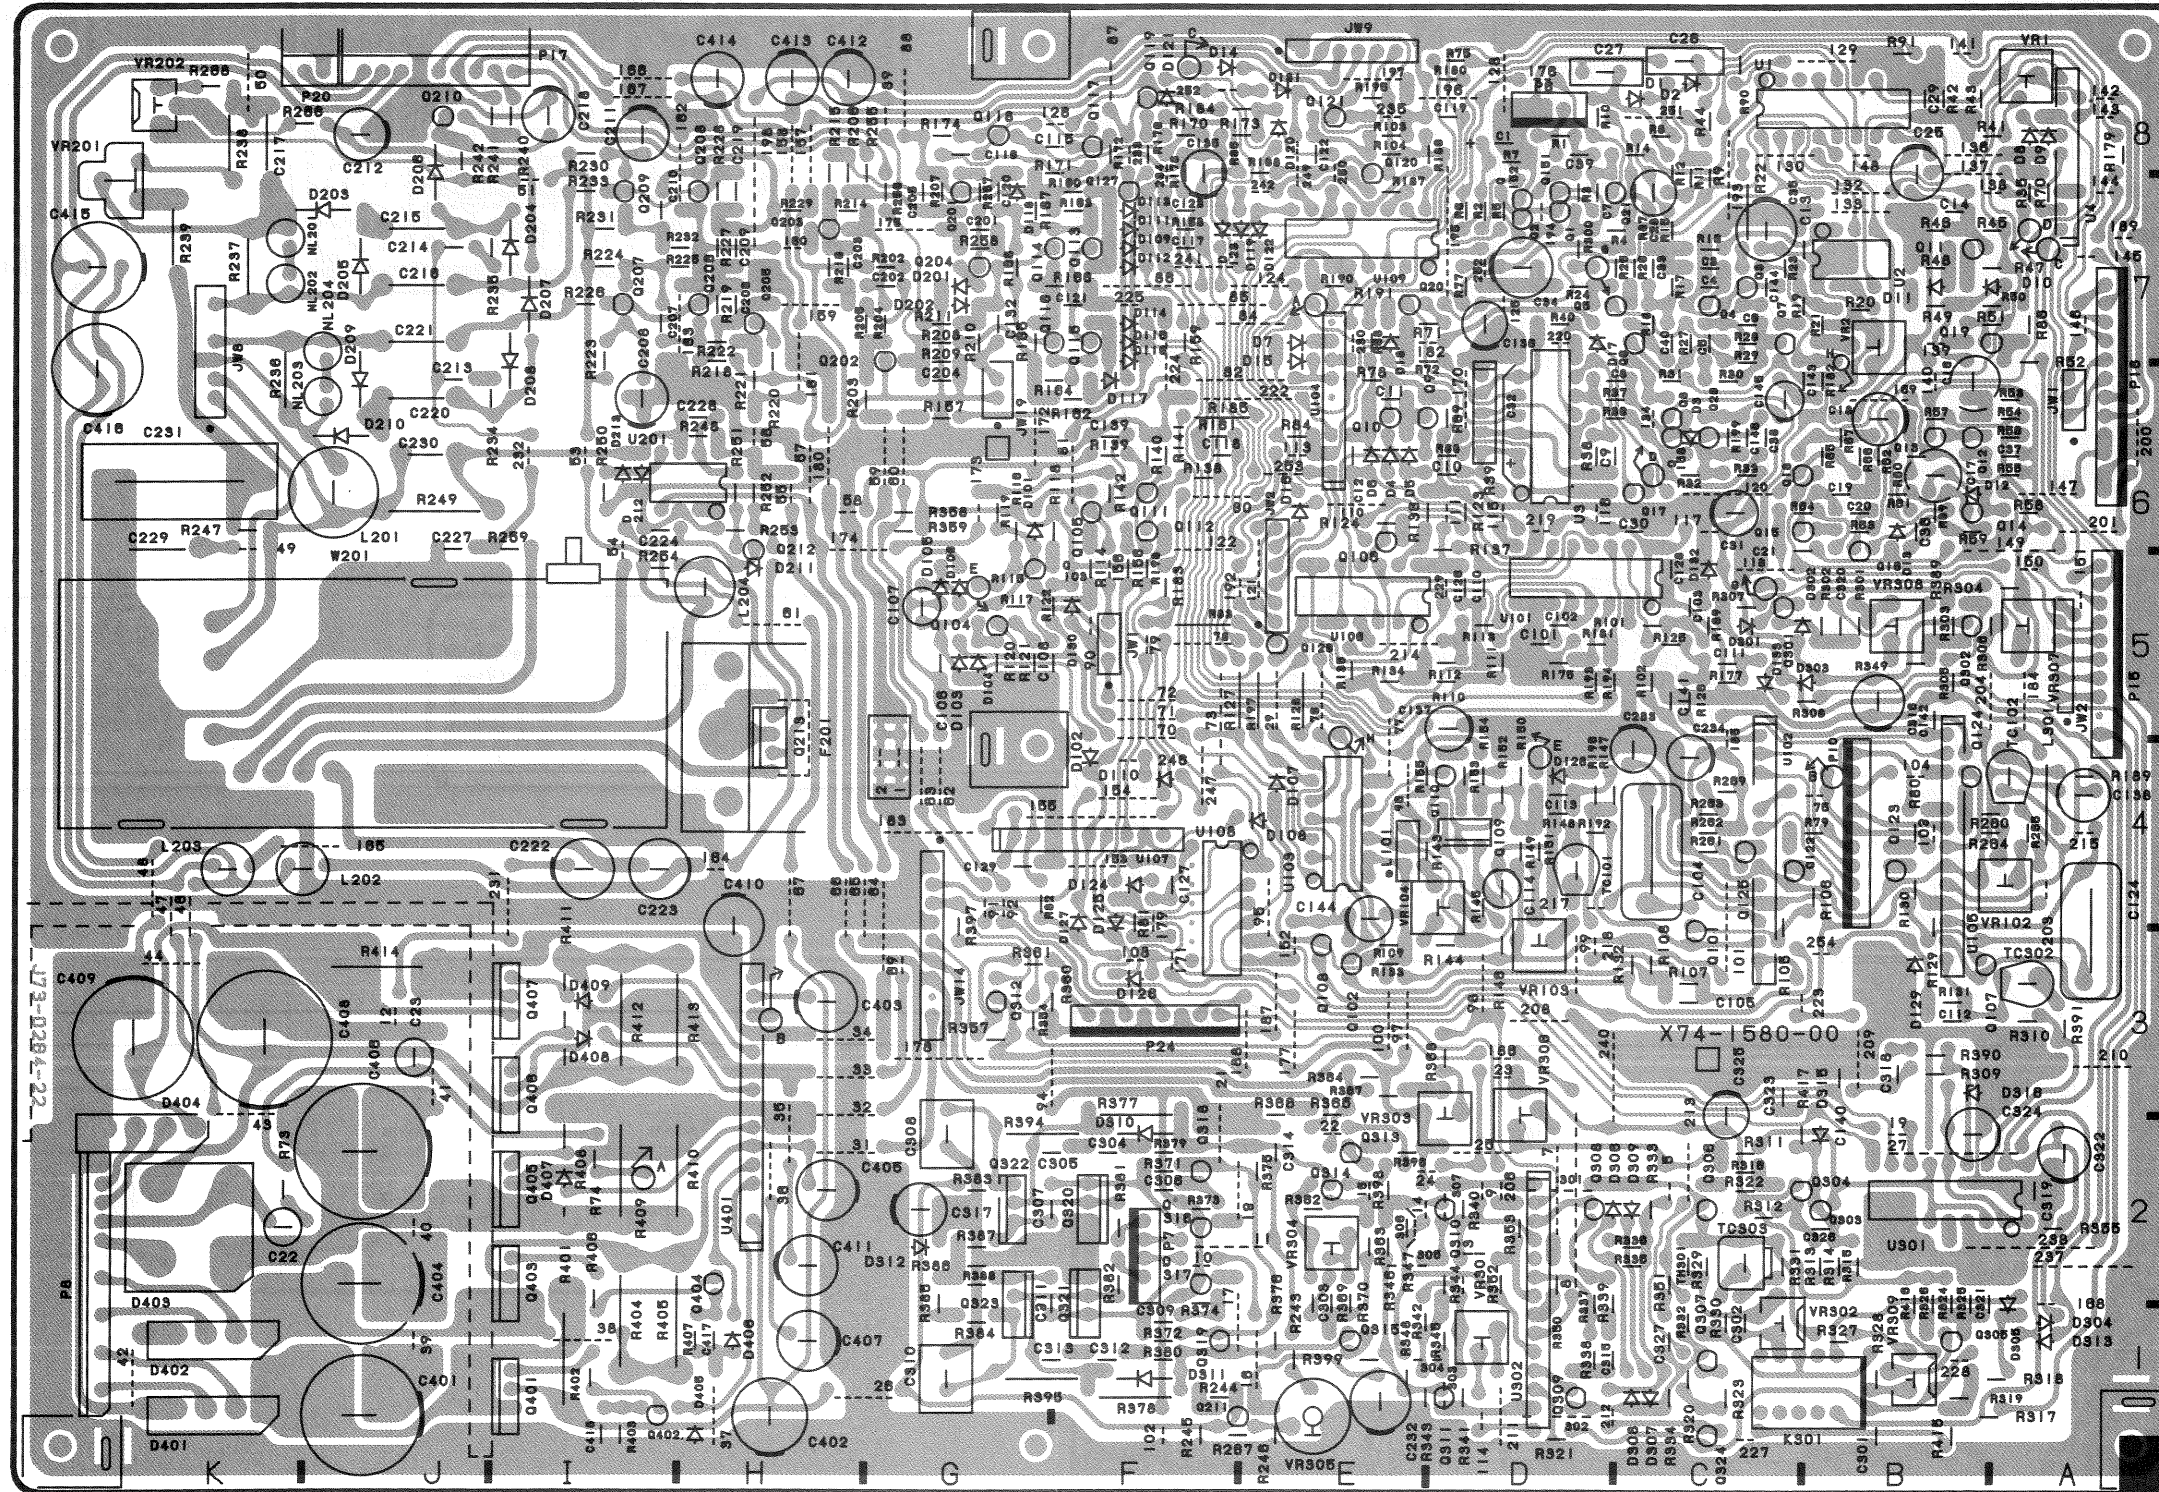




P.C. BOARD

R/O UNIT (X77-1870-0X)

FINAL AMP UNIT (X90-1370-0X)


Pattern side view

Pattern side view

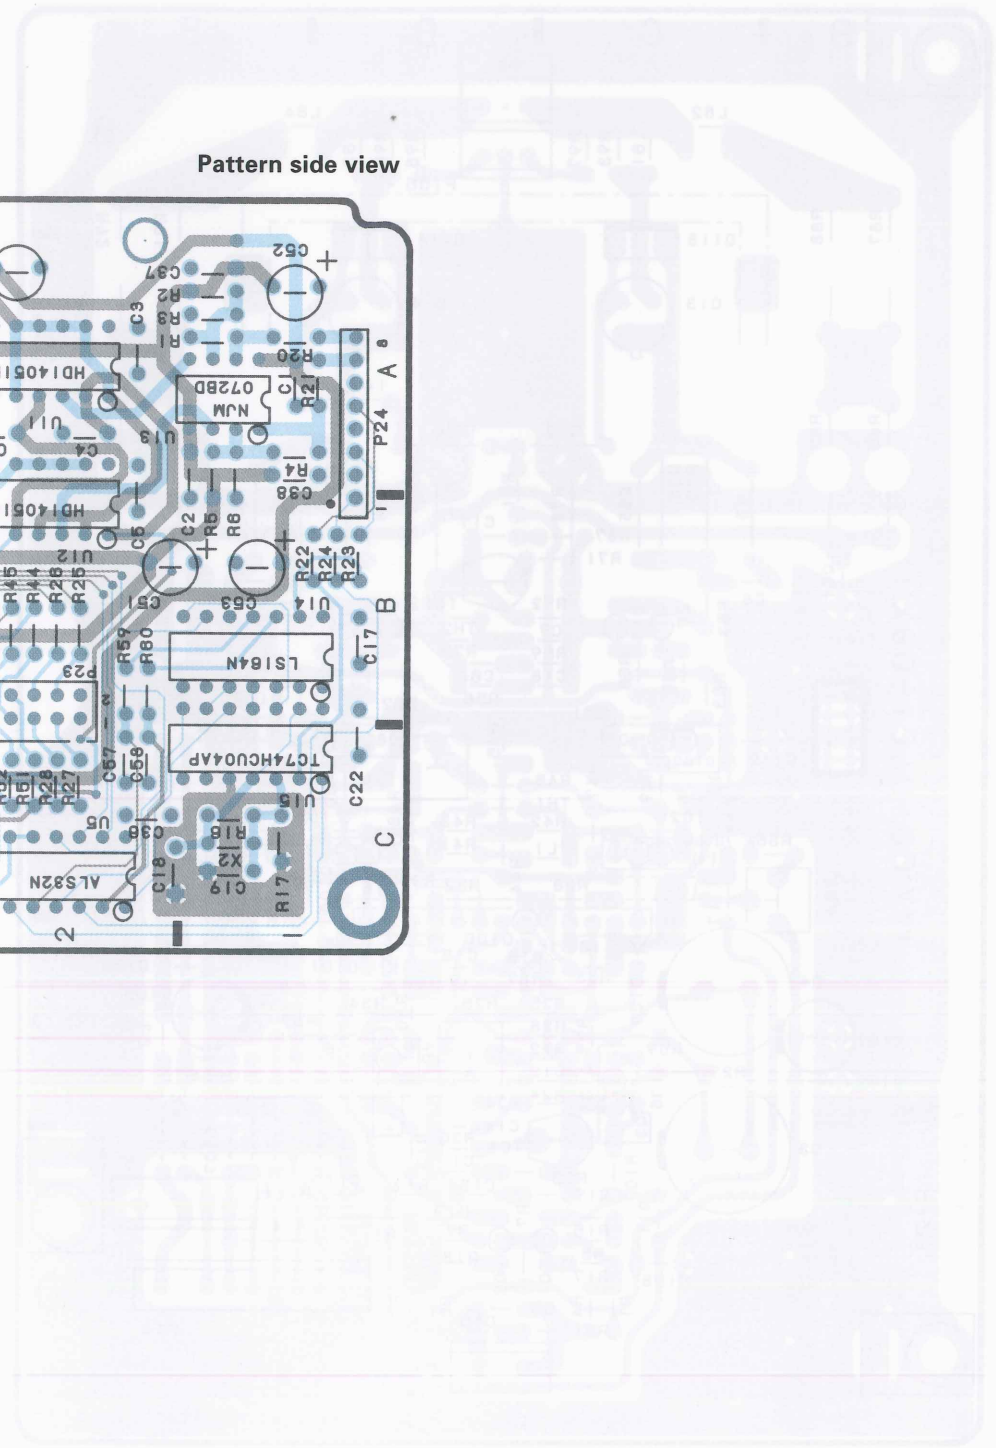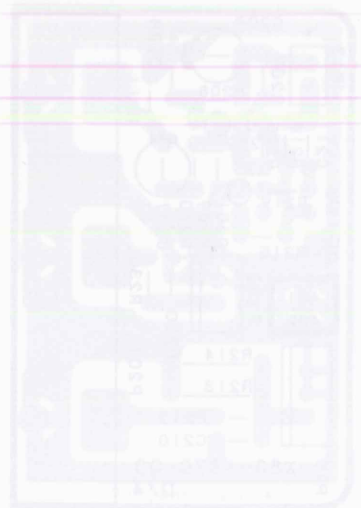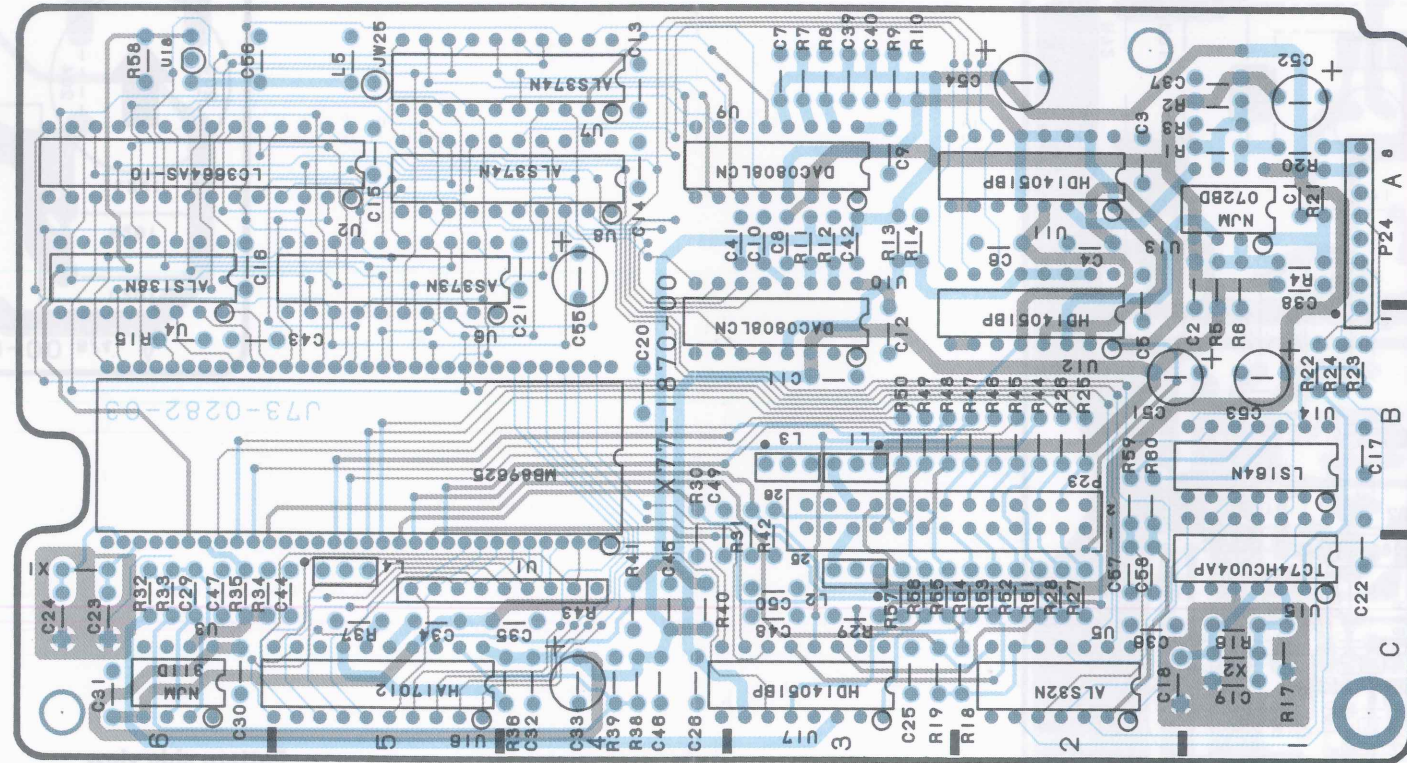


P.C. BOARD



FINAL AMP UNIT (X80-1370-0X)

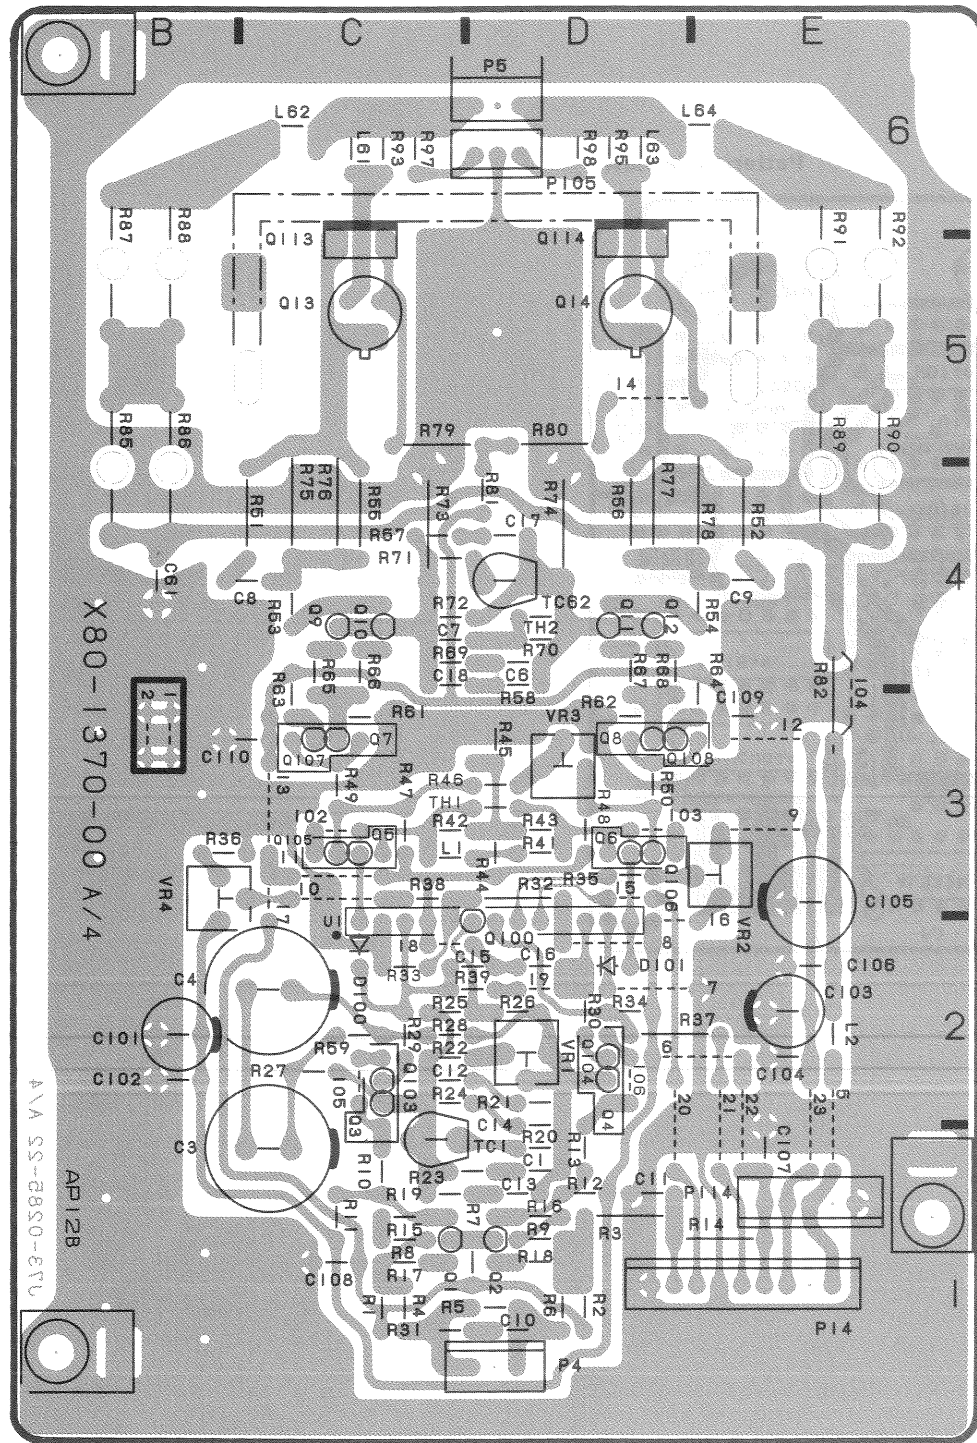


Pattern side view

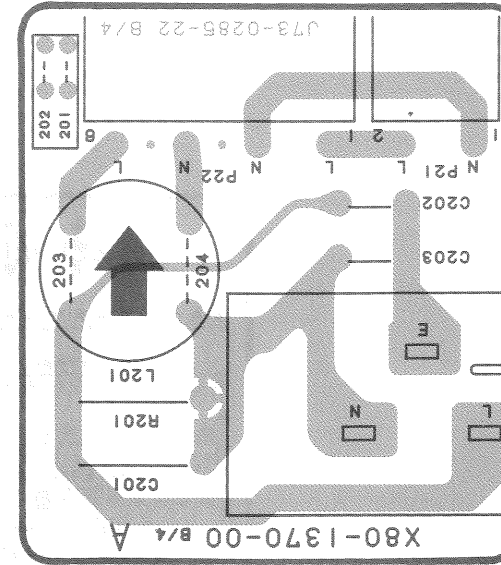


Pattern side view

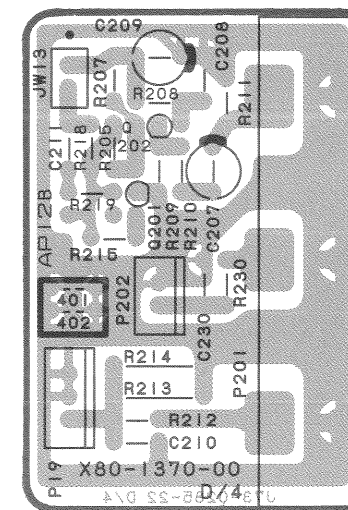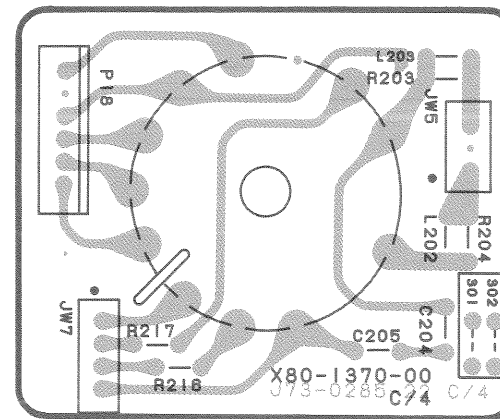


SEMICONDUCTORS

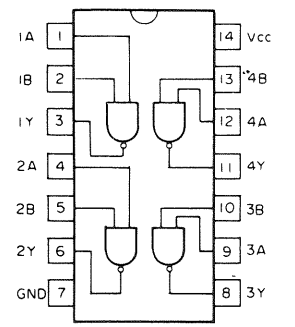


SN74LS00N




SN74ALS02N

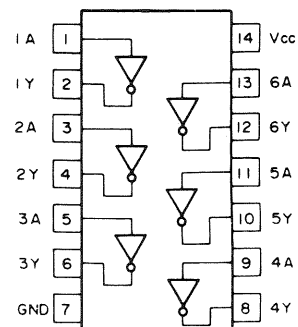


SN74ALS04BN

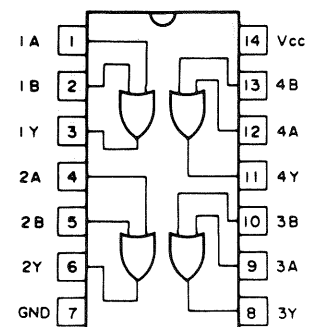


SN74ALS32N

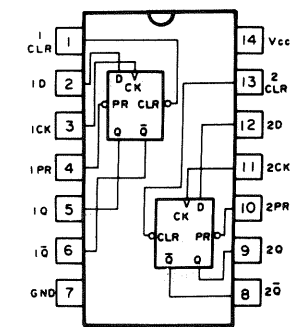


SN74ALS74AN

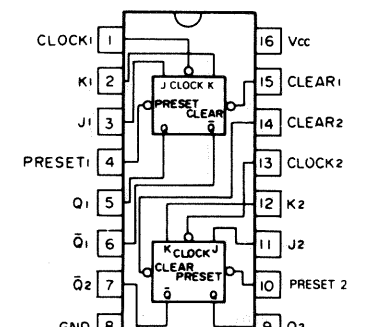


SN74LS112AN

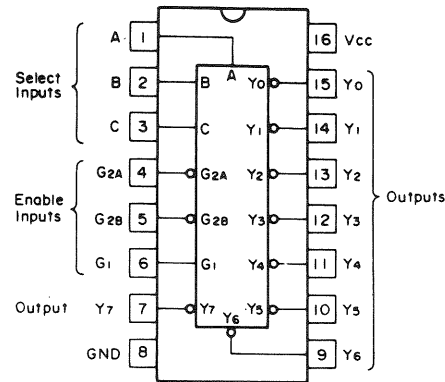


SN74ALS138N

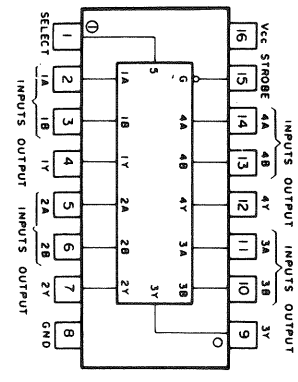


SN74LS158N

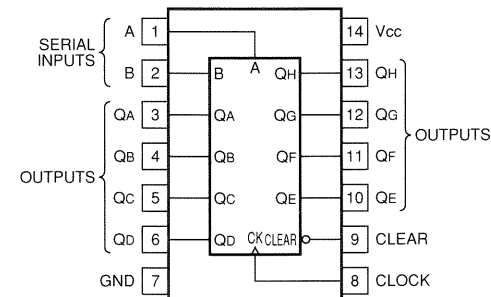


SN74LS164N

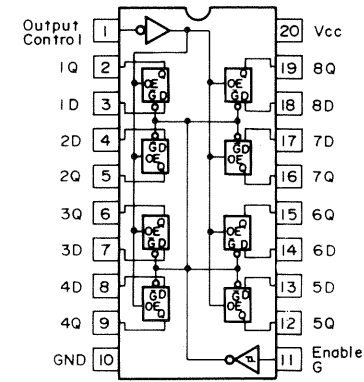


SN74AS373N

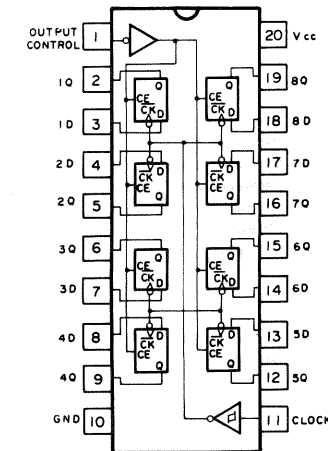


SN74ALS374AN




TC74HC4051AP

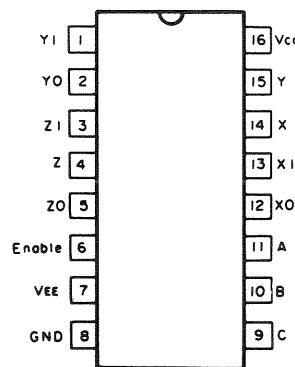


TC74HC4053AP

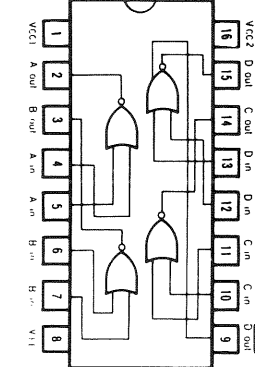


MC10102L
MC10H102L

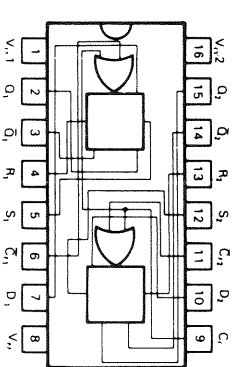


MC10131L
MC10H131L

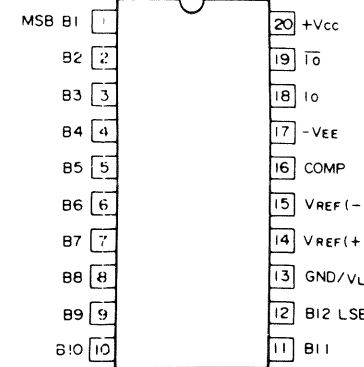

HA17012PB

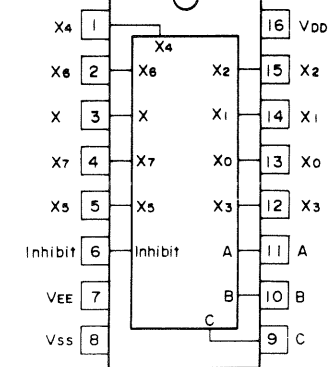


HD14051BP

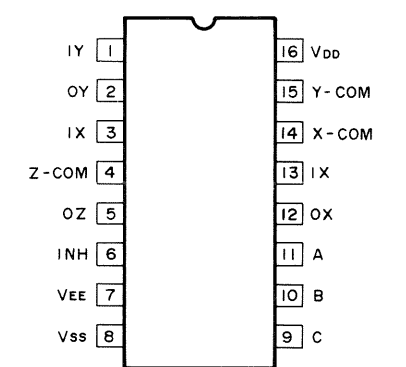


TC4053BP

SEMICONDUCTORS

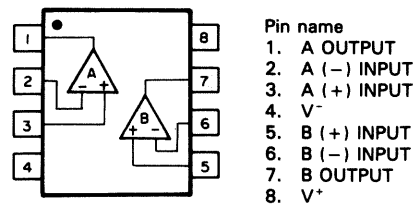


- Pin name
1. A OUTPUT
 2. A (-) INPUT
 3. A (+) INPUT
 4. V⁻
 5. B (+) INPUT
 6. B (-) INPUT
 7. B OUTPUT
 8. V⁺

NJM072BD
NJM072D
NJM4558D




- Pin name
1. A OUTPUT
 2. A-INPUT
 3. A+INPUT
 4. V⁻
 5. B+INPUT
 6. B-INPUT
 7. B OUTPUT
 8. V⁺

NJM072L
NJM4558L




- Pin name
1. GROUND
 2. + INPUT
 3. - INPUT
 4. V⁻
 5. BAL
 6. BAL/STROBE
 7. OUTPUT
 8. V⁺


NJM311D

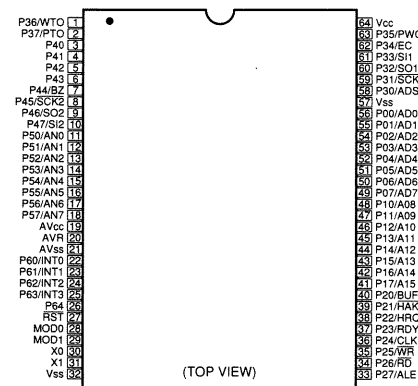


CTM5280

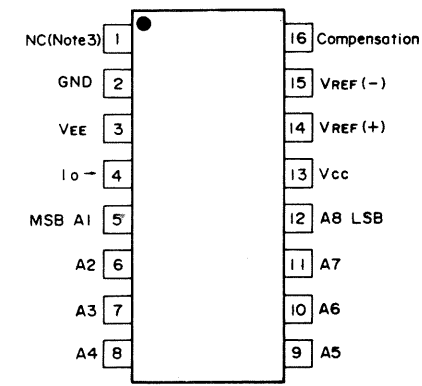


DAC0808LCN

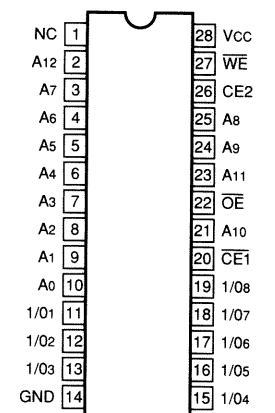



LC3664ASL-10



1. MIX signal output A
2. GND
3. Signal input A
4. + power supply
5. Bias setting
6. External control
7. R/O character signal input
8. R/O character position input
9. R/O switching signal
10. - power
11. Signal input B
12. GND
13. MIX signal output B




1. Sweep gate input
2. Sweep range input A
3. Sweep range input B
4. Sweep reference voltage input
5. Sweep range input C
6. Offset input
7. - power
8. GND
9. + power
10. External capacitor connection
11. External FET connection
12. Sweep signal output

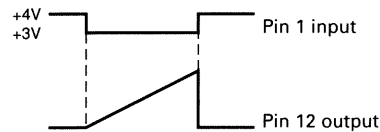


1. Analog signal input
2. + power
3. GND
4. Digital signal output A
5. Digital signal output B
6. Digital signal output C
7. Digital signal output D
8. Digital signal output E

Analog signal input [V]	Output				
	A	B	C	D	E
0.25 ~ 0.45	L	H	H	H	H
0.95 ~ 1.15	H	L	H	H	H
1.65 ~ 1.85	H	H	L	H	H
2.35 ~ 2.55	H	H	H	L	H
3.05 ~ 3.25	H	H	H	H	L

L : 1.0 [V] max
H : 4.5 [V] min




1. Signal input
2. Compensation
3. FET (source) connection
4. GND
5. + power
6. FET (drain) connection
7. - power
8. Signal output




1. +140 V output
2. +140 V control
3. +55 V control
4. +55 V output
5. +12 V control
6. +12 V output
7. -12 V control
8. -12 V output
9. +5 V control
10. +5 V output
11. Sweep time reference voltage output
12. External capacitor connection
13. GND


SEMICONDUCTORS




PST518B




2SA720 (R)
2SA1005 (K)
2SA1208 (S)
2SC1318A (R)
2SC1907
2SC1923 (O)
2SC2551 (O)
2SC2910 (S)



2SA933S
2SC1740S (R,S)




2SA1161
2SC2644
2SC3779 (D)




2SA1304
2SB1015 (Y)
2SD1406 (Y)




2SA1459 (K)




2SA1499 (P)




2SA1828 (E)
2SC4732 (E)




2SC1252




2SC3066 (G)




2SC3952 (D)




2SD613 (E)




2SK170 (V)



2SK404 (E)



S1VB60



S4VB20F

A product of
KENWOOD CORPORATION
 14-B Dogenkwa 1-chome, Setagaya-ku, Tokyo, Japan

ORIGINAL



A product of
KENWOOD CORPORATION
14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150, Japan
