


KENWOOD

150MHz READOUT OSCILLOSCOPE

CS-6040

SERVICE MANUAL

KENWOOD CORPORATION

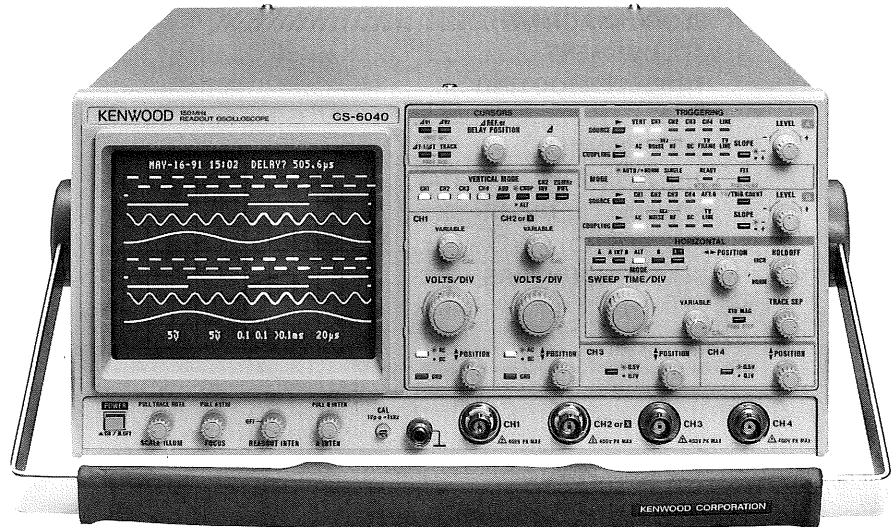

WARNING

The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.

CONTENTS

SPECIFICATIONS	3
SAFETY	7
CIRCUIT DESCRIPTION	8
BLOCK DIAGRAM	15
ADJUSTMENT	16
TROUBLESHOOTING	29
PARTS LIST	62
DISASSEMBLY	63
PARTS LIST (ELECTRICAL)	64
SCHEMATIC DIAGRAM	77
P.C. BOARD	85
SEMICONDUCTORS	98

SPECIFICATIONS

CRT		150 mm rectangular with internal graticule
Acceleration Voltage		20 kV
Display Area		8 × 10 div (1 div = 10 mm)
VERTICAL AXIS (CH1 and CH2)		
Sensitivity		5 mV/div to 5 V/div ± 2% (10 °C to 35 °C) 1 mV/div to 2 V/div ± 4% (10 °C to 35 °C)
Attenuator		12 steps, 1 mV/div to 5 V/div in 1-2-5 sequence Vernier control for fully adjustable sensitivity between steps
Input Impedance		1 MΩ ± 1%, 20 pF ± 3 pF
Frequency Response		
5 mV/div to 5 V/div		DC; DC to 150 MHz, within -3 dB AC; 5 Hz to 150 MHz, within -3 dB
1 mV/div, 2 mV/div		DC; DC to 20 MHz, within -3 dB AC; 5 Hz to 20 MHz, within -3 dB
Rise Time		2.3 ns or less (5 mV/div to 5 V/div) 17.5 ns or less (1 mV/div, 2 mV/div)
Signal Delay Time		More than 10 ns on the CRT screen
Crosstalk		-40 dB or less (at 1 kHz)
Operating Modes	CH1	CH1 single trace display, and dual to quad trace display in combination with other channel (s)
	CH2	CH2 single trace display, and dual to quad trace display in combination with other channel (s)
	CH3	CH3 single trace display, and dual to quad trace display in combination with other channel (s)
	CH4	CH4 single trace display, and dual to quad trace display in combination with other channel (s)
	ADD	CH1 + (± CH2) added display, and dual to quad trace display in combination with other channel (s)
	ALT	Dual to quad trace alternating
	CHOP	Dual to quad trace chopped
Channel Polarity		Normal or inverted, channel 2 only inverted
Bandwidth Limiting		Approx. 20 MHz
Chop Frequency		Approx. 500 kHz
Delay Time Difference		CH1 to CH2 ; 0.5 ns or less CH1, CH2 to CH3, CH4 ; 1 ns or less
Non-distorted Maximum Amplitude		More than 8 div (DC to 150 MHz)
⚠ Maximum Input Voltage		800 Vp-p or 400 V (DC + AC peak)
VERTICAL AXIS (CH3 and CH4)		
Sensitivity		0.1 V/div, 0.5 V/div, ± 2% (10 °C to 35 °C)
Input Impedance		1 MΩ ± 1%, 20 pF ± 3 pF
Coupling Method		DC coupling
Frequency Response		DC to 150 MHz, within -3 dB
Rise Time		2.3 ns or less (at 150 MHz)
⚠ Maximum Input Voltage		800 Vp-p or 400 V (DC + AC peak)
HORIZONTAL AXIS (Input thru CH2)		
Operating Modes		With HORIZ. MODE switch, X-Y operation is selectable CH1 to CH4 and ADD ; Y axis CH2 ; X axis
Sensitivity		Same as vertical axis (CH2)
Input Impedance		Same as vertical axis (CH2)
Frequency Response	DC	DC to 2 MHz, within -3 dB
	AC	5 Hz to 2 MHz, within -3 dB
X-Y Phase Difference		3° or less at 100 kHz
⚠ Maximum Input Voltage		Same as vertical axis (CH2)

SPECIFICATIONS

SWEEP		
Type	A	A sweep
	A INT B	B sweep waveform is displayed as an intensified portion of the A sweep.
	ALT	A sweep (intensified for duration of B sweep) and B sweep (delayed sweep) alternating
	B	B sweep
	X-Y	X-Y oscilloscope
Sweep Time	A	20 ns/div to 0.5 s/div, $\pm 2\%$ (10 °C to 35 °C), in 23 ranges, in 1-2-5 sequence Vernier control provides fully adjustable sweep time all ranges.
	B	20 ns/div to 5 ms/div, $\pm 2\%$ (10 °C to 35 °C), in 20 ranges, in 1-2-5 sequence
Sweep Magnification	$\times 10$ (ten times) $\pm 5\%$ (A and B)	
Linearity	20 ns/div to 0.5 s/div : $\pm 3\%$ ($\pm 5\%$, at $\times 10$ MAG)	
Holdoff	Continuously variable for A sweep from NORM to more than five times	
Trace Separation	B sweep can be separated from A sweep up to 4 divisions downward, continuously adjustable.	
Delay Method	Continuous delay, Trigger delay and Trigger count	
Delay Time	Continuous delay, Trigger delay ; 0.2 to 10 times of A SWEEP TIME/DIV set value (5,000 count fullscale)	
Trigger Count	1 to 2,000 count, Max. usable frequency: 10 MHz	
Delay Accuracy	$\pm (2\% \text{ of set value} + 1\% \text{ of fullscale}) + (0 \text{ to } 100 \text{ ns})$	
Delay Jitter	1/20,000	
TRIGGERING		
A Trigger Modes	AUTO, NORM, SINGLE, FIX	
A Trigger Source	V. MODE	Triggered by input signal selected with VERTICAL MODE selector
	CH1	Triggered by CH1 vertical axis input signal
	CH2	Triggered by CH2 vertical axis input signal
	CH3	Triggered by CH3 vertical axis input signal
	CH4	Triggered by CH4 vertical axis input signal
	LINE	Triggered by line frequency
A Trigger Coupling	AC, NOISE _{REJ} , HF _{REJ} , DC, TV FRAME, (In TV COUNT mode, enables switching between FLD1/FLD2 and 525/625 lines.), TV LINE	
A Trigger Level	$\pm 90^\circ$ adjustable	
A Trigger Polarity	+/-	
B Trigger Modes	Starts After Delay, B Triggerable After Delay and TRIG COUNT	
B Trigger Source	CH1	Triggered by CH1 vertical axis input signal
	CH2	Triggered by CH2 vertical axis input signal
	CH3	Triggered by CH3 vertical axis input signal
	CH4	Triggered by CH4 vertical axis input signal
B Trigger Coupling	AC, NOISE _{REJ} , HF _{REJ} , DC, TV LINE	
B Trigger Level	$\pm 90^\circ$ adjustable	
B Trigger Polarity	+/-	

SPECIFICATIONS

Trigger Sensitivity	COUPLING	FREQUENCY RANGE	MINIMUM SYNC AMPLITUDE
	DC	DC to 50 MHz/DC to 150 MHz	1 div/1.5 div
	AC	20 Hz to 50 MHz/20 Hz to 150 MHz	1 div/1.5 div
	NOISE _{REJ}	Two times of minimum sync amplitude.	
	HF _{REJ}	Increased minimum sync amplitude for above 30 kHz.	
	TV FRAME	1 div (140 IRE)	
	TV LINE	1 div (140 IRE)	
AUTO: Same as above specification FIX: Same as above specification for above 40 Hz. for above 50 Hz			
Jitter	0.5 ns or less at 150 MHz at 2 ns/div sweep rate (× 10 MAG on)		
INTENSITY MODULATION			
Sensitivity	+ 5 V, Negative voltage increases brightness, positive voltage decreases brightness		
Input Impedance	Approx. 10 k Ω		
Usable Frequency Range	DC to 10 MHz		
Δ Maximum Input Voltage	50 V (DC + AC peak)		
VERTICAL AXIS OUTPUT (CH1 only)			
Output voltage	Approx. 50 mVp-p/div (into 50 Ω load)		
Output Impedance	Approx. 50 Ω		
Frequency Response	100 Hz to 150 MHz, within -3 dB (at into 50 Ω)		
TRACE ROTATION	Electrical, adjustable from front panel		
CALIBRATION VOLTAGE	1 V p-p \pm 1%, Positive square wave, 1 kHz \pm 3%		
READOUT			
Calendar	Year/Month/Day/O'clock/Minute Clock accuracy; \pm 2 min./month Battery life: About 30,000 hours (at room temperature)		
Set Value	CH1-CH4 scale factor (with probe detection), GND, AC/DC, V-UNCAL, ADD, INVERT, BW, A and B sweep scale factor (magnification conversion), SWEEP VARIABLE UNCAL, X-Y (CH2-X), DELAY TIME, TRIG COUNT, TV COUNT		
Cursor Mode	Δ V1	Voltage difference between Δ REF and Δ cursors on a CH1 scale factor basis	
	Δ V2	Voltage difference between Δ REF and Δ cursors on a CH2 scale factor basis	
	Δ T	Time difference between Δ REF and Δ cursors on the basis of sweep scale factor	
	1/ Δ T	Frequency between Δ REF and Δ cursors on the basis of sweep scale factor	
		RATIO: Voltage ratio and time ratio between Δ REF and Δ cursors, supposing 5-division on the CRT as 100% PHASE: Phase difference between Δ REF and Δ cursors, supposing 5-division on the CRT as 360°	
Cursor Measurement	Resolution	10 bits	
	Measurement accuracy	\pm 3%	
	Measurement range	Vertical direction: \pm 3.6 div or more from the CRT center Horizontal direction: \pm 4.6 div or more from the CRT center	

SPECIFICATIONS

PROGRAM MODE				
Programming capacity		20 steps × 5 blocks		
Programmable parameters	CURSORS	CURSOR MODE	$\Delta V1, \Delta V2, \Delta T, 1/\Delta T, \text{TRACKING}$	
		CURSOR	$\Delta \text{REF}, \Delta$	
	VERTICAL	VERTICAL MODE	CH1, CH2, CH3, ADD, CHOP, ALT, CH2 INV, 20 MHz BWL	
		ALT	CH1, CH2, CH3, CH4	
		ACC, DC, GND	CH1, CH2	
	HORIZONTAL	HORIZONTAL MODE	A, A INT B, ALT, B, X-Y	
		SWEEP TIME	A, B	
	TRIGGERING	A SOURCE	VERT, CH1, CH2, CH3, CH4, LINE	
		A COUPLE	AC, NOISE _{REJ} , HF _{REJ} , DC, TV FRAME (TV COUNT FLD1/FLD2), TV LINE	
		A SLOPE	+/-	
		B SLOPE	CH1, CH2, CH3, CH4, TRIG DELAY, AFT DELAY, TRIG COUNT	
		B COUPLE	AC, NOISE _{REJ} , HF _{REJ} , DC, TV LINE	
B SLOPE		+/-		
SWEEP MODE		AUTO, NORM, SINGLE, FIX		
Program Step Input	Input voltage	"H" (above 3.2 V), "L" (0.5 V or less), setting to "L" advances count one step		
	Input impedance	Approx. 10 k Ω		
	Maximum input voltage	50 V (DC + AC peak)		
POWER REQUIREMENT				
Line Voltage		100 V/120 V/220 V/240 V AC \pm 10%		
Line Frequency		50/60 Hz		
Power Consumption		73 W		
DIMENSIONS (W×H×D)		310 (332) × 150 (163) × 400 (448) mm () dimensions include protrusion from basic outline dimensions		
WEIGHT		Approx. 9 kg		
ENVIRONMENTAL				
Within Specifications		10°C to 35°C, 85% max. relative humidity		
Full Operation		0°C to 40°C, 85% max. relative humidity		
ACCESSORIES SUPPLIED				
Probe		PC-31 (READOUT compatible probe) × 2 Attenuation.....1/10 Input impedance.....10 M Ω \pm 1%, 14 pF \pm 10%		
Replacement Fuse		1.2 A × 2, 0.8 A × 2		
Instruction Manual		1		

* Circuit and rating are subject to change without notice due to developments in technology.

SAFETY

SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

Line voltage

This instrument operates using ac-power input voltages that 100/120/220/240 V at frequencies from 50 Hz to 60 Hz.

Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.

Voltage conversion

This oscilloscope may be operated from either a 100 V to 240 V, 50/60 Hz power source. Use the following procedure to change from 100 to 240 volt operation or vice versa.

1. Remove the fuse holder.
2. Replace fuse F 1 with a fuse of appropriate value, 1.2 amp for 100 VAC to 120 VAC operation, 0.8 amp for 220 VAC to 240 VAC operation.
3. Reinsert it for appropriate voltage range.
4. When performing the reinsertion of fuse holder for the voltage conversion, the appropriate power cord should be used. (See Fig. 1.)







Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord and plate
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	1.2 A, 250 V Fast blow 6 × 30 mm	None	Cord: E30-1820-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	North Europe 0.8 A, 250 V Slow blow 5 × 20 mm	None	Cord: E30-1819-05
		Other Europe 0.8 A, 250 V Fast blow 6 × 30 mm		
	U.K. 240 volt/50 Hz Rated 13 amp	0.8 A, 250 V Fast blow 6 × 30 mm	0.8 A Type C	—
	Australian 240 volt/50 Hz Rated 10 amp	0.8 A, 250 V Fast blow 6 × 30 mm	None	Cord: E30-1821-05
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	0.8 A, 250 V Fast blow 6 × 30 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	0.8 A, 250 V Fast blow 6 × 30 mm	None	—

Fig. 1 Power Input Voltage Configuration

CIRCUIT DESCRIPTION

Vertical Attenuator Circuit (X75-1180-01)

The attenuators for channel 1 and channel 2 are operated by the signals from the panel, and AC/DC/GND input coupling and attenuation of 1/1, 1/10, and 1/100 are switched.

The vertical input signal from the BNC input terminal passes through the attenuator and is input to the buffer amp formed by U101 and Q101 (CH2: U201 and Q201). U101 is a source follower and constant current supply and Q101 is for input protection. The input signal is impedance converted by these components and is input to the 1st amp formed by U102 and Q102 (CH2: U202, Q202). A differential signal is created here, and the 1st amp for channel 2 contains an INV circuit that switches the inversion transistor ON/OFF using the data from the R/O unit.

U1 and U2 produce a voltage signal from the serial data from the R/O unit, and this serial data is converted to a 0/5 V parallel signal. Although inversion is not possible on the channel 1 side, the same circuit as the channel 2 circuit is used for circuit stability, and the bias of the inversion transistor is fixed at the off state. The channels 1 and 2 input signals are input to the vertical preamp unit after passing through the 1st amp.

The channels 3 and 4 input signals are input to the 1/1 or 1/5 attenuator as selected by the K301 (CH4 : K401) relay. The signal is then input to the buffer amp formed by Q301 and 302 (CH4: Q401, 402). Q301 is a source follower, Q302 is a constant current supply, and Q303 is for input protection. The signal is impedance converted by this amp. The signal is then input to the 1st amp formed by Q304 and 305 (CH4: Q404, 405). This amplifier produces a differential signal. The channel 3 and channel 4 signals are input to the vertical preamp unit after passing through the 1st amp.

Switch Unit (X69-1150-02)

* Switch Matrix

All the tact switches on the panel form a switch matrix. Pins 1, 2, 3, 4, and 15 of U9 are all low when a tact switch is not pressed, and the output (D0 to D7) is at +5 V.

When a switch is pressed, the output of the switch (one of D0 through D7) goes to low due to Pin 15, 1, 2, 3, or 4 of U9 going to low. The output from D0 through D7 is connected to the R/O unit, and when any of these outputs goes to low, an interrupt is applied to the CPU and serial data is sent to U9. U9 which receives data from the R/O unit, first switches all of Pins 15, 1, 2, 3, and 4 to high and then switches each pin to low. The resulting voltage from

the output (D0 to D7) is used to determine which switch was pressed.

* Panel LED

The corresponding LEDs on the panel are illuminated when Pins 15 and 1 through 7 of U2 through U8 go from high to low. Serial data from the R/O unit is sent to U2 through U8, and the LED to be illuminated is selected according to that signal.

* Rotary Encoder

Rotary encoders are used for the VOLTS/DIV and SWEEP TIME controls for channel 1 and channel 2. The data from these encoders is received by the R/O unit. Refer to the section on the R/O unit regarding operation.

Panel Unit (X66-1050-01)


* VR (VR1 to 10), Uncal Search

Variable resistors (VR) are used for setting the position, V-variable, trig level, hold off, and T-sep for each channel. Both terminals of each of the VRs are connected to ± 10 V, +10 V and GND, or +5 V and GND, and the set voltage is sent to the various units.

The collector of Q1, 2 (CH1) or Q3, 4 (CH2) goes from 0 V to approximately +5 V when V-VARIABLE is set to the UNCAL state, voltage is supplied to the R/O unit, and the UNCAL mark (●) appears on the screen.

* Comparator, Endless VR

Endless VRs are used in four locations: horizontal position, Δ , and Δ REF. As shown in Fig. 1, two resistance elements are used alternately for this operation. The output voltage is received by the R/O unit. U1a supplies stable voltage to each terminal of the endless VRs.

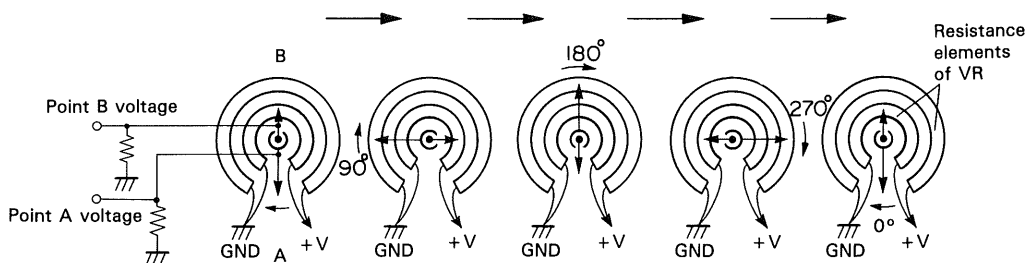

CIRCUIT DESCRIPTION

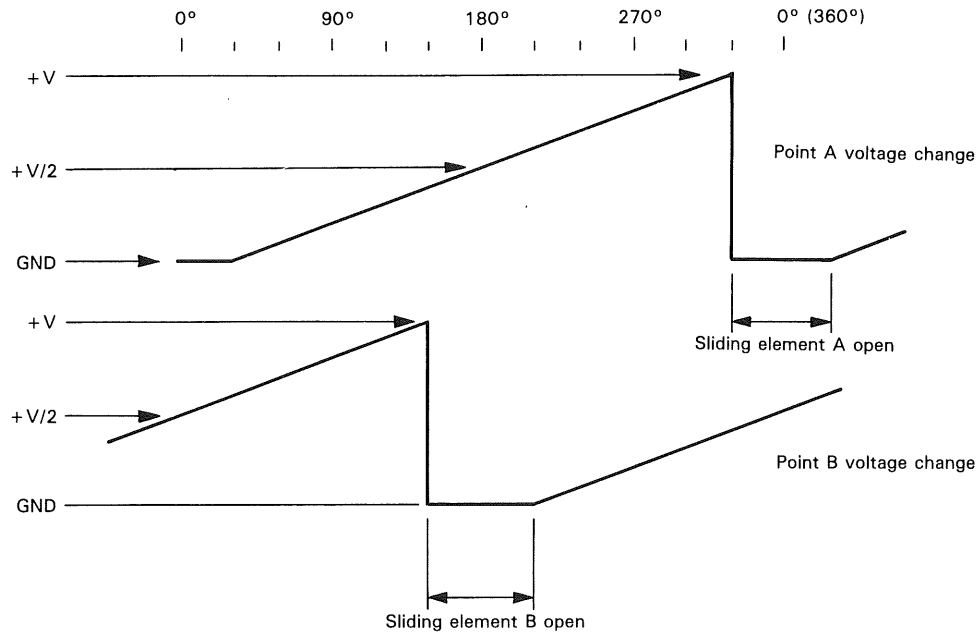


Fig. 1 Endless VR Operation

High Voltage Unit (X68-1510-02)

* Blanking Circuit

This is a circuit for amplifying the blanking signal from the horizontal unit. The signal input from P19 passes through the Q8 emitter follower, and is input to Q6 for amplification. Q5 is a constant current supply for Q6 and Q7 is a transistor for absorbing current. Negative feedback is applied to this by R26, and the degree of amplification is determined by R26 and R358 of the horizontal unit. The blanking signal amplified to high voltage is then applied to G1 of the CRT from the high voltage oscillation circuit (described below) using D8 through D10. The G1 potential from K (cathode) is set a low level, and the brightness decreases as this level decreases.

The voltage of the blanking signal of the horizontal unit is altered according to the INT VR of the VR unit, altering the brightness which results.

The output from Q6, i.e., the amplified blanking signal, is input to Q4. The brightness is altered by the auto-focus so that the focus point is not lost.

Q3 is a constant current supply for Q4. The signal is then overlapped with the high voltage level using D4 through 7, in the same manner, and the resulting signal is applied to the P1 terminal of the CRT after the potential is controlled by VR23 of the VR unit.

* High Voltage Oscillation Circuit

Oscillation at 30 kHz is invoked by Q1, and becomes high voltage by the high voltage block. U1 and Q2 provide negative feedback for control.

Power Supply Unit (X68-1500-01)

The power supply circuits are composed of six regulated output systems (+5, +/− 10, +15, +60, and +140 V) and two unregulated systems (+/− 13 V).

The regulated outputs are all with reference to −10 V. This −10 V output uses a 5 V Zener diode (D5) as reference, and is obtained by the drive transistor (Q6) and op amp U3. Other regulated output is obtained using op amps (U1, 2, and 3) and transistors (Q1, 3, 5, 6, 7, and 8), with this −10 V output as reference.

The unregulated output of +/− 13 V uses the voltage before regulation to obtain regulated output of +/− 10 V.

VR Unit (X81-2330-02)

* Calibration Voltage Generation Circuit

Op amp U1 is used as an oscillator, and the DC voltage is switched using D1 to generate a 1kHz square wave.

* Scale Illumination Circuit

This circuit drives an illumination lamp with the Q6 emitter follower as an output stage. D4 and 5 are used for switching to provide one-shot illumination.

* Trace Rotation Circuit

This circuit drives a coil for rotation by the Q2 and 3 emitter followers.

* Intensity Circuit

This circuit has three 20kΩ VRs, A SWEEP, B SWEEP, and R/O, both ends are connected to +/− 10 V, and the set voltage is sent to the horizontal unit to create a blanking signal. The R/O VR is equipped with an ON/OFF switch.

CIRCUIT DESCRIPTION

Final Unit (X80-1100-02)

* Vertical Amplification System — Vertical Final Preamp to Vertical R/O Switching to Vertical Final Amp

The signal output from the vertical preamp unit and which passed through the delay line, is input to the vertical amplification system of the final unit. The signal first passes through the Q1 and Q2 emitter followers, and is input to Q3 and Q4 for amplification. Q203 and 204 alternately select Q3 and Q4 that amplify the waveform for output of characters on the CRT screen by the R/O function and Q201 and Q202 which amplify the character information sent from the R/O unit. When the ROREQ signal from the R/O unit is high, Q204 is switched ON, Q3 and 4 are switched ON, Q203 is switched OFF, and Q201 and 202 are switched OFF. The signal is amplified and the character information is not input. When the ROREQ signal is low, the opposite occurs, and the character information is amplified without signal input. The signal then enters the Q5 and 6 base grounded amp, is impedance converted by the Q7 and 8 emitter follower, is input to the final amp formed by Q9, 10, 13, 11, 12, and 14, and is input to the deflection plate of the CRT.

* Horizontal Amplification System — Horizontal Final Preamp to Horizontal R/O Switching to Horizontal Final Amp

The signal sent from the horizontal unit is input to the Q101, 102 base grounded amp, and is amplified by Q103, 104 after passing through D101, 102, 105 and 106 for excessive input limiting. In the same manner as the vertical system, Q208, 209 switches between the amp for signal formed by Q103, 104 and the amp for characters formed by Q206, 207.

Following this, the signal is input to the Q105, 106 base grounded amp, is impedance converted by the Q107, 108 emitter follower, is amplified by Q109, 110, is impedance converted by the Q112, 113 emitter follower, and is input to the Q114, 115 amp. Q116, 117 form a constant current supply to supply a fixed current level to Q114, 115. Negative feedback is applied to the output by R114, 145, 153, and 154, and the degree of amplification is determined by R144, 145, 153, 154 and R152, 133. This configuration provides stability and allows for amplification with high amplitude.

Vertical Preamp Unit (X73-1760-01)

The channel 1 and channel 2 signal output from the ATT unit enter the vertical preamp unit and are first input to the buffer amp formed by Q101 (CH2: Q201). The signals are then input to the X5 and X1 amps. The X5 amp is formed by Q102 (CH2: Q202) and the X1 amp by Q103 and 104 (CH2: Q203, 204). Switching between the amps is by Q105 and 106. When Q105 is ON, Q106 is OFF and the X5 amp is selected. When Q106 is ON, Q105 is OFF and the X1 amp is selected. The signal which passed through Q108, 109 (CH2: Q208, 209) cascade connected to Q102, 103, 104 (CH2: Q202, 203, 204) is input to the 1/1, 1/2, or 1/4 ATT, switched by the K101 (CH2: K201) relay. The signal emerging from the ATT is impedance converted by Q112, 113 (CH2: Q21, 213), and input to Q114, 115 (CH2: Q214, 215). There is a vertical variable circuit formed by R169,

170, U102 (CH2: R269, 270, U201) between the cascade connections. This circuit applies the DC signal for variable control sent from the panel by U101 (CH2: U201) connections. This circuit applies the DC signal for variable control, sent from the panel by U101 (CH2: U201) and varies the gain by varying the impedance of HIC U102 (CH2: U202). The CH1 and CH2 signals emerging from the cascade amp that forms the 3rd amp are impedance converted by the buffer amp formed by Q119, 120 (CH2: 219, 220), and input to the amp for trig signal output (formed by Q601 to 604), Q528 and 529 cascade connected to Q501 and 502. Between the cascode amps, there is an amp for POSI variation by Q503, Q504 (CH2: Q507, 508) and a CH selection circuit formed by Q1 and 2 (CH2: Q3, 4). Although the trigger signal output amp is a balanced circuit using Q601 and 602 (CH2: 605, 606), only Q601 (CH2: Q605) actually extracts the trigger signal, and this component is cascode connected to Q603 (CH2: Q607). Subsequent explanation on this trigger amp will be given below.

* CH3 and 4 3rd Amp to Select SW

Q301 and 302 (CH4: Q401, 402) are cascode connected to Q304 and 305 (CH4: 404, 405) of the attenuator unit, and there are resistors and capacitors for gain control and frequency response correction between them. The signal emerging from the cascode amp enters the buffer amp formed by Q304, 305 (CH4: Q404, 405), is impedance converted, and input to the 1st trig amp.

The input to the trig amp is approximately 50% of the output from the 3rd amp, and a balance circuit is formed by Q609 and 610 (CH4: Q613, 614) for balancing. However, the signal extracted as the trigger signal is actually only the signal from the Q609 side (CH4: Q613). Subsequent explanation on this trigger amp will be given below.

The signal output from the 3rd amp will be input to the trig amp and V. mode select switch. This is formed by Q509, 510 (CH4: Q513, 514) and Q5, 6 (CH4: Q7, 8). When the V. mode is selected, Q5, 6 (CH4: Q7, 8) are OFF, and the signal passes through D505, 506 (CH4: D507, 508), and is input to the mix amp. When this mode is not selected, Q5, 6 (CH4: Q7, 8) are ON, and the signal is canceled. This operation is the same for channels 1 and 2. Q511, 512 (CH4: Q515, 516) between Q509, 510 (CH4: Q513, 514) and Q5, 6 (CH4: Q7, 8) form a POSI variable amp that changes the bias of Q512 (CH4: Q516) to vary the position, according to the DC voltage from the panel.

* Mix Amp to 4-ch Amp to T. SEP Amp to 20 MHz BW SW

The signals that passed through the select switches for the various channels and diodes D501 through 508, are input to the mix amp formed by Q528, 529. Q518 is ON when ADD is selected in the V. mode. The impedance of the signal is then converted by the buffer amp formed by Q519, 520, and input to the T. SEP amp formed by Q522 and 523. In this T. SEP amp, the B SWEEP position is altered by input of a control signal to the base of Q523 for switching so that the amp only operates by the B sweep signal. The impedance of the signal which passed through the T. SEP amp is converted by the buffer amp formed by Q524, 525, and the signal is input to the delay line. A switch for performing 20 MHz BW is formed by Q526, 527, a low-pass

CIRCUIT DESCRIPTION

filter is formed by C509, 510, and the circuit functions as a 20 MHz BW. The signal then passes through a delay line and is input to the final unit.

* 1st Trig Amp — Trig Select — 2nd Trig Amp

The trigger signal extracted by Q601 and 602 (CH1), Q605 and 606 (CH2), Q609 and 610 (CH3), and Q613 and 614 (CH4) is input to the amps formed by Q603 and 604 (CH1), Q607 and 608 (CH2), Q611 and 612 (CH3), and Q615 and 616 (CH4). It is then input to trig select after impedance conversion. At this time, a portion of the channel 1 signal is split to the CH1 out amp formed by Q621 and 622, and a portion of the channel 2 passes through Q620 and becomes the X signal for the X-Y mode.

Trig select is a switch formed by D601, 602, 603, and Q623 to 621. When the various transistors are switched on by the CH select logic signal, the diode connected to the transistor has reverse polarity and goes off. The diode can be switched on by switching the transistor off, and the trigger signal will be output to the amp in the next stage. D601 receives the A trig, D602 receives the B trig, and D603 receives the line trig.

The trigger signal received by trig select is impedance converted by the 2nd trig amp formed by Q617 and 632 (A trig) and Q618 and 633 (B trig), and is then sent to the horizontal unit.

* Control of vertical preamp unit

The following signals are sent from the R/O unit for control of the vertical preamp unit.

- (1) Serial data this signal is sent from the R/O unit together with the clock signal, and input to U1, U2, U3, U4, U5, U6, U7, and U8 for conversion to parallel data.

The following are controlled by this signal:

- X1 and X5 amp switching
- 1/1, 1/2, 1/4 ATT switching
- V-MODE switching
- 20 MHz BW limit
- Trigger signal selection

- (2) Voltage supplied directly from panel voltage between 0 V and 10 V is created by the variable resistors on the panel, and is input as a signal to the vertical preamp unit through the R/O unit.

- POSI variation
- V-VAR

The above are the signals externally input for control.

Horizontal Unit (X74-1480-02)

The trigger signals (ATR, BTR signal) supplied from the vertical preamp unit (X73-1760-01) are input to the trig preamps. The A trig preamp is formed from Q1 and Q2, etc., and the B trig preamp is formed from Q14 and Q15, etc. When a TV signal is input, TV coupling is selected to amplify the TV sync signal. The control signal to perform this is output from U29, and the gain of Q1 and Q14 is changed by switching with Q9 to correspond to the TV sync signal. The trigger level is altered after the signal passes through the trig preamp. The trigger level of A-sweep is altered by U21 and the level of B-sweep by U22. The level is switched by the U16 analog switch by panel switch operation, and the FIX signal, TV signal, and A BLVL signal are selected.

The input signal with trigger level altered is input to the trig amp formed by Q5, Q6, Q7 and Q17, Q18, and Q19. When coupling is set to HFR_{EXT} by operation of the panel switch, a control signal is output from U29, Q8 or Q20 is switched on, and the high frequency components are attenuated. The signal is input to the Schmitt circuit formed by U1 or U2 after passing through the trig amp. The hysteresis width of the Schmitt circuit is altered by the noise rejection control signal output from U29, allowing stable triggering even for input signals containing noise. The control signal output from U30 determines whether the slope is positive or negative. The signal output from the A-sweep Schmitt circuit is input to the auto freerun circuit formed by Q103 and Q104 to control U39 according to the auto or normal mode. This sets the unit to the sweep mode or trigger standby mode. The AS signal output from Q of U3a is input to Q109 of the A-sweep circuit, performing start and stop control of the A-sweep. U24b in the A-sweep circuit takes the analog voltage supplied from U101 unit and amplifies it to 5 V at range 1, 2.5 V at range 2, and 1 V at range 5. The current is determined by this voltage and the aggregate resistance selected by the U17 analog switch. This determines the sweep time.

The AS signal output from Q of U3a and the BS signal output from Q of U3b are input to the blanking circuit formed by U4, the UNBL signal is generated from ROUBL, ROINT, BINT, AINT, etc., and supplied to the high voltage unit (X68-1500-01).

In the same manner as the A-sweep circuit, U26d in the B-sweep circuit amplifies the analog voltage fed from the R/O unit, and determines the current by the U18 analog switch to determine the sweep time.

The A-sweep signal output from Q116 and the B-sweep signal output from Q134 are input to the mix amp formed by U19, Q302, Q303, Q304, Q306, and Q307. In this circuit, the analog voltage supplied from X10 MAG and the R/O unit are amplified by U27, and H-POSI control is performed. The signals output from this circuit are fed to the final unit (X80-1100-01) as the X+ and X- signals.

Switching between A-sweep and B-sweep is controlled by U7, and this signal is sent to the mix amp and blanking circuit. The switching signal for chopping of A-sweep and B-sweep is generated by the circuit formed by Q403 and Q404. The chop frequency at this time is 500 kHz.

Delayed sweep is performed by comparing the voltage of the A-sweep output from Q116 and the DTP signal supplied from the R/O unit by the delay comparator formed by Q102, U25, etc, and the position to start the B-sweep is determined. The signal to start the B-sweep at this time is input to the logic circuit for B-sweep formed by U13a, b, c, and U6, and the signal to output the BS signal is sent to U3b. In the single sweep mode, the SGL signal supplied from the R/O unit is input to the A-sweep logic circuit formed by U11b, U12d, and U5, and the A-sweep trigger standby mode is selected when the RESET signal is input.

There is also a 1-shot ILLM circuit which illuminates a lamp for approximately 1 second when the single sweep is completed. This circuit is formed from U12, Q405, Q406, C405, and C406, etc.

CIRCUIT DESCRIPTION

Readout unit (X77-1490-01)

The R/O unit contains an 8-bit Z-80A CPU, and has two major functions: control of the operation of the various sections and the output of CRT character information.

The basic clock which forms the basis for the timing of all IC operations is generated by the 10 MHz oscillator formed by U11d and X1. The 10 MHz CLK is used for operation of U33 (R/O controller), and this clock signal is divided to 1/4 by U10 to create the 2.5 MHz CLK. This clock signal is used for operation of the U5 CPU (Z-80A) and as a control signal for sending data and addresses to U33.

Changes in information from the switch unit (X69-1150-02) and the timing, clock, and soft timers for the CRT display are all realized through interrupts which are sent to the CPU. Changes at the switch unit include interrupts issued when a pushbutton switch is pressed and when the rotary encoders used for VOLTS/DIV and SWEEP/DIV are rotated. When a switch is pressed, one of lines D0 through D7 of U24 connected as a data bus for switch information goes to "L". U14e goes to "L" causing Q of U21a to also go to "L", notifying the CPU that a switch position has been changed. When CRT information is changed by operation of the switches or variable resistors on the panel, the timing for updating the CRT indication is output every 13.5 μ s from U33. The change is latched to U21a, and indicated to the CPU as an interrupt. The CPU recognizes this interrupt and performs processing to update the CRT indication.

U12, U13, U17, and U18 form the import section which outputs the data decoded by U6 and U8 to the data bus. U12 is an import IC for evaluating the probe detection (1/1 to 1/10), battery capacity, and status of the CH1 and CH2 variables. Probe detection and variable status is fetched by the CPU approximately every 15 μ s, and evaluated and processing performed. The B1 battery capacity is monitored by U46a, and when the level drops below approximately 2.4 V, the status (H level) is fetched from the import at POWER ON, and "BATT DOWN" is displayed on the CRT screen.

U13 is an import IC for interrupt evaluation, and it determines whether an interrupt such as rotary encoder (CH1, CH2, SWEEP), 2 ms, clock, switch, or CRT indication has been transmitted to the CPU.

U17 receives the A-phase and B-phase status of the rotary encoder, receives and evaluates the movement of the endless VR, and receives and evaluates the single ready state. Reception and evaluation of the endless VR movement is made by having U35 compare the endless VR voltage and D/A converter (U37) voltage, to determine whether the endless VR has been rotated. U18 is an IC for fetching data from the panel switches, and it receives the state when a switch is pressed.

U6 through U9 are a decoder circuit, and U6 uses PAL. The PAL has a circuit configuration capable of decoding the import and output clocks, ROM, and RAM. U7 through U9 decode individual information selected by U9.

U8 outputs the decoded information from inport U12, 13, 17, and 18, and the latch CLK (VLC, HLC, ALC, and LLC) for serial transfer.

U19 outputs the latch CLK (SLC) for serial transfer and the shift CLK (ASC, LSC, SSC, HSC, VSC).

U7 outputs the data latch CLK for serial transfers, the in-

terrupt latches (U20, U21, U22, and U23), and the RESET pulse. The data latch CLK is also used as the CLK for latching the data for serial transfers by U16.

A blanking signal is applied during serial transfer to prevent the effects of noise on the waveform. This blanking is output from Pin 21 of U33.

U1 is RAM, and 8 K \times 8 bit memory is used. This SRAM is backed up by B1 when the power is off, and the power is switched by U19 when the power is turned on/off. Switching is performed by the U4 power reset IC, and a reset signal is supplied to U3, U5, and U19 at 4.4V \pm 0.2 V. U2 is a software ROM, and both 16 K and 32 K can be used by switching by R128 and R256.

Although CTM5020 (U33) can be directly connected to 8080-type CPUs, direct connection of address and data is not possible with the Z-80 due to the absence of an ALE terminal. For this reason an ALE signal is generated by the ADD/DATA SELE circuit formed by U27, U28, U23b, U14b and d, U25b, and U29c to allow connection with U33.

The software timer needed for CPU operation is created by U26 as a 2 ms timer. This is latched to U20a every 2 ms to indicate an interrupt to the CPU.

U3 is backed up by lithium battery B1 when the power is off, and the 32.768 kHz basic clock from the crystal oscillator operates. An interrupt signal is output from U3 once every minute, and is latched to U20b. The calendar indication on the CRT is advanced one minute by the input of this interrupt.

The U37 D/A convertor creates the voltage output for endless VR comparison, the analog control voltage used by the horizontal unit (X74-1480-02), and the cursor control voltage. The latter control voltage is switched by the U41 analog switch, and is output once every 4 ms by time division. This output control is performed by AX0 through AX3 of U33, and AX3 is a control terminal to prevent the comparison voltage being output to the control voltage when this voltage for endless VR comparison is output from the U37 D/A convertor.

The cursor control voltage (Δ and Δ REF) output from U41 is switched with R/O-Y and R/O-X by the U40 and 43 analog switches, and output to the final amp.

There are analog control voltages used by the horizontal unit: B-vari, DTP, and H-posi.

B-vari output the reference voltages for sweep B, and the voltage determined by the 1-2-5 range is output (during CAL). During UNCAL, the B-vari voltage changes and the sweep time changes. At this time, the voltage is changed so that the amount of variation changes at the various ranges so that variation rate corresponds to the rotational speed of the endless VR. The count distribution is 2000 for range 1, 1000 for range 2, and 400 for range 5, and the amount of change per step is altered every 10, 6, and 2 counts respectively. B-vari passes through the U47a buffer amp before it is fed to the horizontal unit (X74-1480-02). The following is a description of the operation of the rotary encoder used for switching volts/div and sweep time. The rotary encoder has two outputs, and rotation to the right or left is determined by the output resulting from the phase difference.

CIRCUIT DESCRIPTION

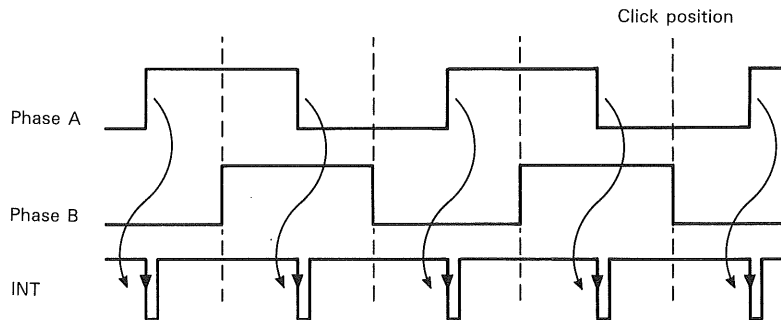


Fig. 2

Figure 2 shows the output waveforms of the rotary encoder, and phases A and B have the output waveforms indicated. In the case of the CH1 VOLTS/DIV rotary encoder, for example, the outputs from phases A and B are input to U29b and U31c respectively. U29 and U31 form a Schmitt circuit, eliminating chattering occurring when the rotary encoder is rotated, and shaping the waveforms to resemble those shown in the above diagram. (This is performed to prevent spurious operation.)

The signal with the waveform shaped is input to U30c, output as the INT signal shown in Figure 2. Q of U22a goes to "L" at the point indicated by the arrow and an interrupt signal is sent to the CPU. When the CPU enters the interrupt state, it immediately evaluates the status of phases A and B, determines the rotation to the right or left by the status of the change, and performs the appropriate processing. (The figure shows rotation to the right.)

U31a and U31b form the Schmitt for the CH2 VOLTS/div rotary encoder, U30d receives the signal after waveform shaping, and U23a receives the INT signal. U31d and U30a form the Schmitt for the CH2 Sweep Time/div rotary encoder, U30b receives the signal after waveform shaping, U22b receives the INT signal.

The DTP adds two analog voltages and is a 5000 count FS. These analog voltages are V-Delay and C-Delay. V-Delay is counted up to 4000 counts with C-Delay as 0 V, and is added by U45b. Following this, V-Delay and C-Delay are decreased one count each until 5000 counts are reached. This is equivalent to doubling the D/A resolution. The added DTP voltage passes through the U46b buffer amp, and is fed to the horizontal unit (X74-1480-02).

The voltage from the endless VRs used for cursor, H-POSI is received by the U34 analog switch, and the control signal for selecting the endless VR is selected by VX0 to VX2 of U33. The output of the endless VR selected by U34 is input to U35, and compared with the voltage output from D/A convertor U37 by U35. As the U37 D/A convertor is a 12-bit unit and 8 bits are output to the D/A (U33 DA0 to DA7), the upper 4 bits are latched by U36 and the remaining 8 bits are then output. The discrete circuit formed by Q1, Q2, etc., and connected to Pin 17 of U37 is a DC-DC convertor circuit used to supply -11 V to the D/A convertor.

The H-POSI voltage is supplied to the horizontal unit through the hold circuit.

A random can method (X-Y display) is used for character display, and the U32 character generator is controlled by the character counter of the U33 R/O controller and the dot counter.

One cycle for readout indication is divided into four, and consists of lower characters, upper characters, Δ REF cursor, and Δ cursor.

Character data having a basic configuration of 5×7 dots is input to the U32 character generator. The 3 bits from DO0 to DO2 are X-axis data, the four bits DO3 to DO6 are the Y-axis data, and DO7 is the character start/end control signal. The digital signal output from U32 is converted to the analog voltages by the U42 D/A convertor for the X-axis signal and the D/A convertor for the Y-axis signal formed by U39 and R58. These signals pass through analog switches U40 and U43, the U44 buffer amp, and are supplied to the final unit (X80-1100-02) as the R/O-X and R/O-Y character signals.

Character dot display on the CRT is controlled by the ROUB, ROB, and ROQ signals output from Pins 86, 87, and 88 of U33.

The ROB signal erases the real waveform display, the real waveform and readout are switched by the ROQ signal, and dot indication on the readout is performed by the ROUB signal.

CIRCUIT DESCRIPTION

TV Counter Unit (X76-1400-00)

The TV signal is input through pin 7 of P35, and the polarity is selected by U1a. When the base of Q4 is "L", Q2 goes ON and U1a becomes an inverted amplifier. The signal output from pin 1 of U1a passes through buffer amp U1b, clamps the sync signal at D1, and enters video amp U2. Then, the signal output from pin 7 of U2 is subjected to peak detection at D6 in order to maintain the amplitude of the output from pin 7 of U2 constant by controlling Q1. Q3 is the circuit which goes ON in other modes than the TV COUNT mode to cut the TV signal. The signal output from pin 7 of U2 is input to sync separator circuit U3. U4a is the circuit for extracting the equivalent pulse of horizontal sync signal. The pulse is supplied through gate U7 and used as the clock pulse of the TV counter circuit.

U5b detects the TV signal input and controls the auto-freerun circuit. U5a is the detector circuit of the interlaced, progressive signal.

U4b is the circuit which generates equivalent vertical sync signal when the progressive signal is input.

The output signal from U6a is differentiated by U7, sent through U6b, and output from pin 4 of P35 as the TV counter load pulse.

U8 is the shift register which loads and latches the serial data from the R/O.

U8 pin No.

- 1: "H" in TV counter mode, otherwise "L".
- 2: "L" in TV counter mode, otherwise "H".
- 3: "H" when A sweep time is between 0.2 ms/div and 20 ns/div in TV counter mode, otherwise "L".
- 15: "L" when TV is +SLOPE, "H" with -SLOPE.

U10 is the circuit which eliminates a flicker of waveform in TV counter mode, and which also controls U33 (X77-1490-01).


* Chattering prevention circuit

The signal input to pin 1 of P36 as the program count-up signal is sent through the protector circuit of D7 and D8, and input to pin 1 of U9. When the signal is input to U9, its pin 4 outputs pulse for the specified period of time, during which chattering can be prevented.

The output signal passes through D10, Q5 and U7, and controls D1 of the panel unit (X66-1050-01) and pin 5 of U9 to increment the count of the program.

D9 is the diode used to maintain the output "H" while the input signal level is "L" regardless of the time constant of U9.


BLOCK DIAGRAM

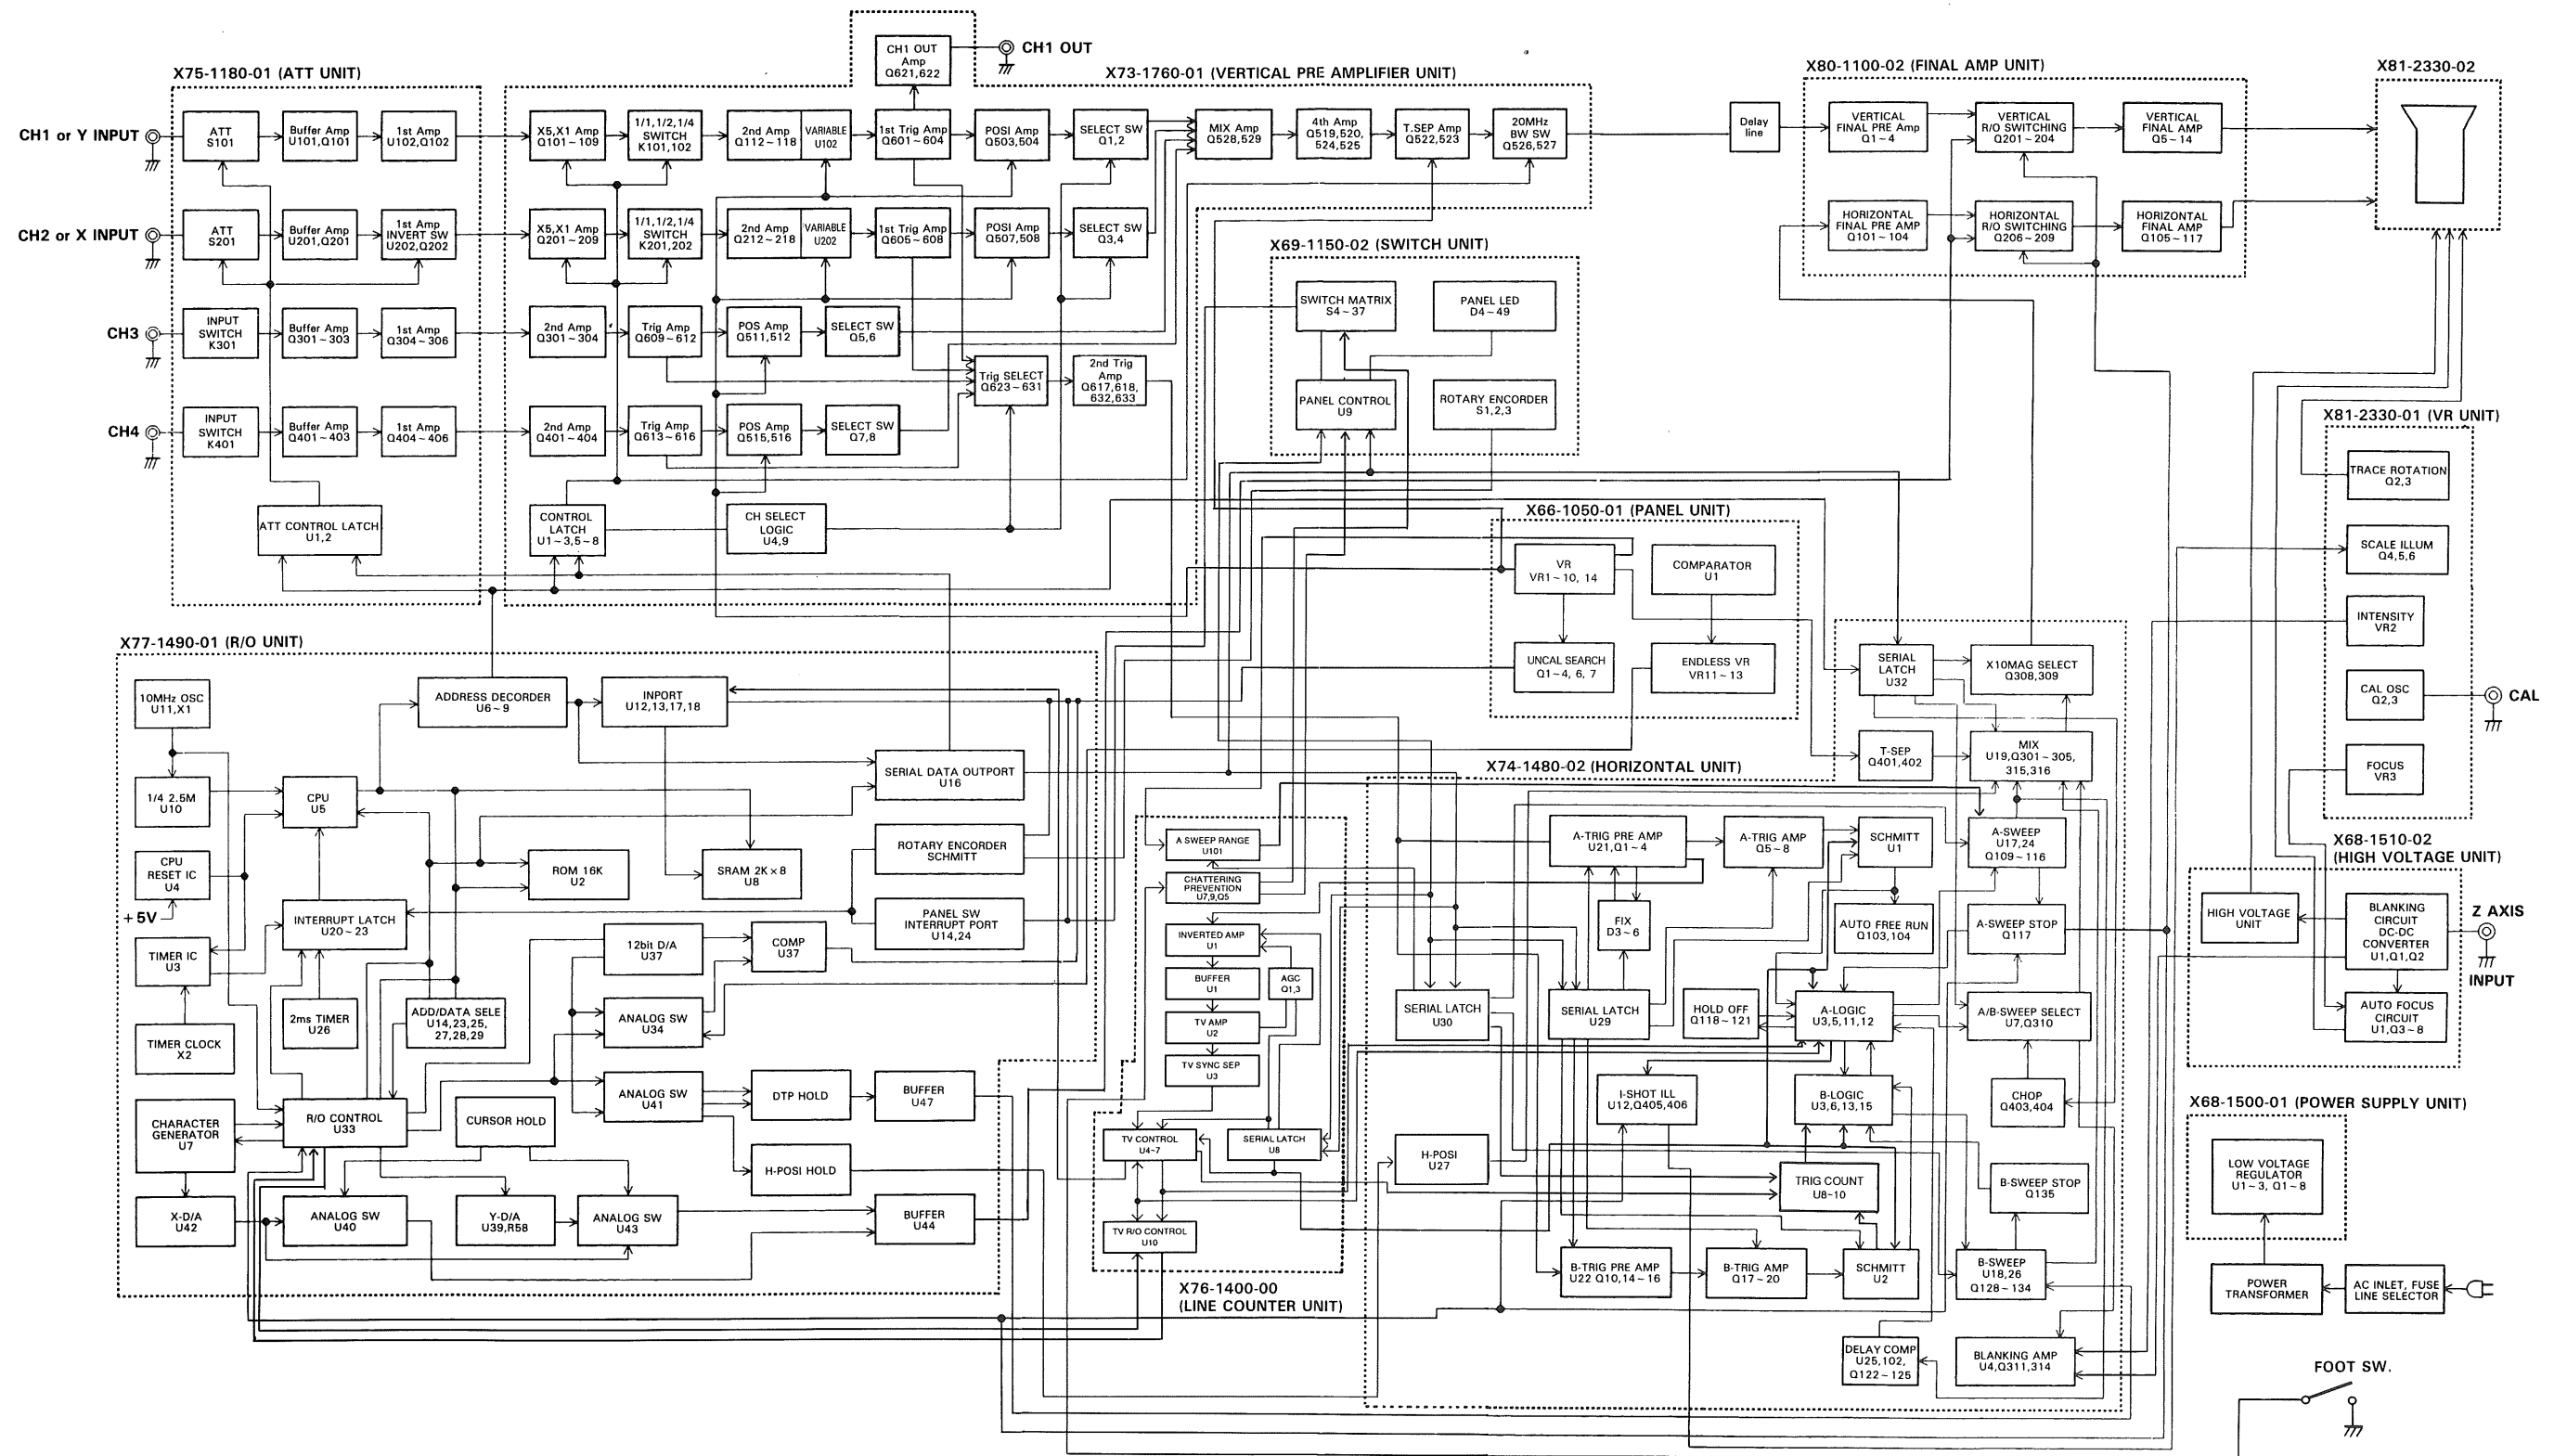

ADJUSTMENT


Item	Adjustment VR (TC)	P.C.B.	Procedure
CH2 Step ATT Balance	VR203 VR201	X73-1760	Adjust in the same way as for CH1.
CH1 Position Center	VR503	X73-1760	CH1 POSITION : Mechanical center position CH1 VOLTS/DIV : 10 mV Adjust VR503 so that the trace is located on the center of the screen.
CH2 Position Center	VR506	X73-1760	Adjust in the same way as for CH1.
CH3 Position Center	VR509	X73-1760	Adjust in the same way as for CH1.
CH4 Position Center	VR512	X73-1760	Adjust in the same way as for CH1.
CH1 Variable Balance	VR104	X73-1760	Adjust VR104 so that the position of the luminescent line does not change even if the VARIABLE knob is rotated. Vary the settings of the VOLTS/DIV and VARIABLE controls and see if the trace position also moves; if it does, adjust VR103, 101 and 104 again.
CH2 Variable Balance	VR204	X73-1760	Adjust in the same way as for CH1.
CH1 Gain	VR501	X73-1760	CH1 VOLTS/DIV: 10 mV Input a square wave signal having an amplitude of 50 mV, and adjust VR501 so that the CRT amplitude becomes 5 div.
CH1 1 mV Range Gain	VR102	X73-1760	CH1 VOLTS/DIV: 1 mV Input a square wave signal having an amplitude of 5 mV, and adjust VR102 so that the CRT amplitude becomes 5 div.
CH2 Gain	VR504	X73-1760	Adjust in the same way as for CH1.
CH2 1 mV Range Gain	VR202	X73-1760	Adjust in the same way as for CH1.
CH3 Gain	VR507	X73-1760	CH3 VOLTS/DIV: 0.5 V Input a square wave signal having an amplitude of 0.5 V, and adjust VR507 so that the CRT amplitude becomes 5 div.
CH4 Gain	VR510	X73-1760	Adjust in the same way as for CH3.
CH1 Waveform Shaping	TC105 TC103	X75-1180	AC-GND-DC: DC Apply 1 kHz square wave to CH1 input (with the amplitude extending over 4 to 6 div). Set CH1 VOLTS/DIV to 0.1 V range (and 1 V range), and adjust TC105 (and TC103) so that the waveform becomes flat in both ranges.
CH1 Input Capacity	TC104 TC102	X75-1180	AC-GND-DC : DC CH1 VOLTS/DIV : 10 mV Connect the capacity meter to the CH1 input, and measure the input capacity in the 10 mV range. Adjust TC104 and TC102, alternately, so that the input capacity in the 0.1 V and the 1 V ranges equals the same capacity as in the 10 mV range.
CH2 Waveform Shaping	TC205 TC203	X75-1180	Adjust in the same way as for CH1.
CH2 Input Capacity	TC204 TC202	X75-1180	Adjust in the same way as for CH1.
CH3 Waveform Shaping	TC302	X75-1180	Apply 1 kHz square wave to CH1 input (with the amplitude extending over 4 to 6 div). Set CH3 volts/div to 0.5 V range, and adjust TC302 so that the waveform becomes flat.



ADJUSTMENT



"MIN": Rotated fully counterclockwise
 "MAX": Rotated fully clockwise

TC (without lock mechanism)



Counterclockwise rotation: Unclear waveform  (Under)
 Clockwise rotation: Clear waveform  (over)

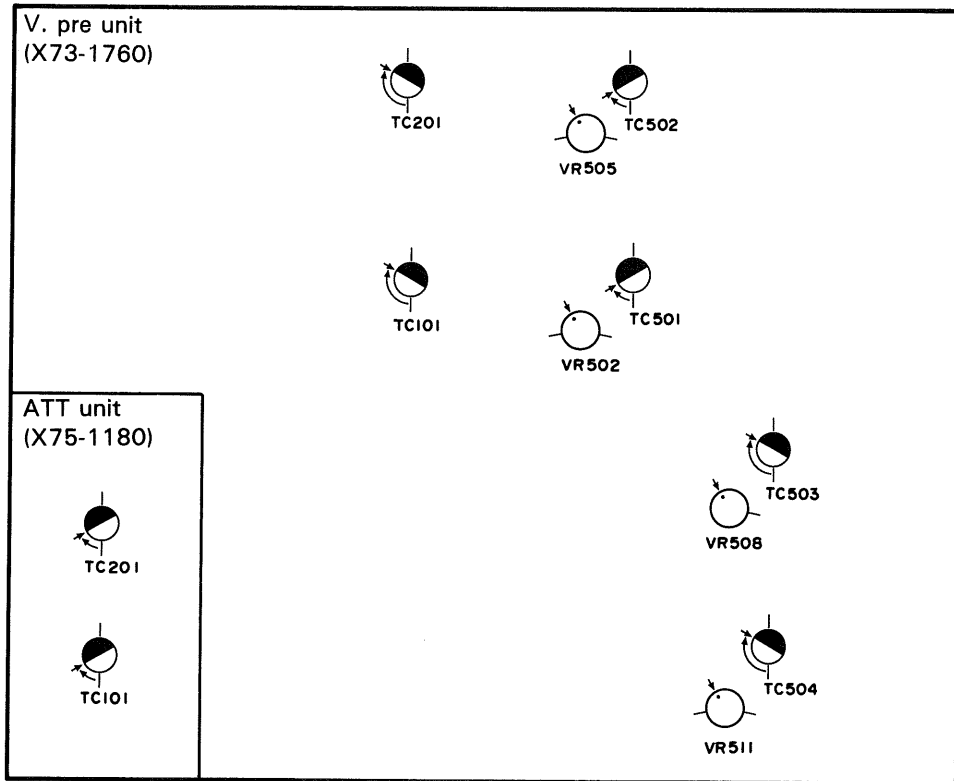


Fig. 1

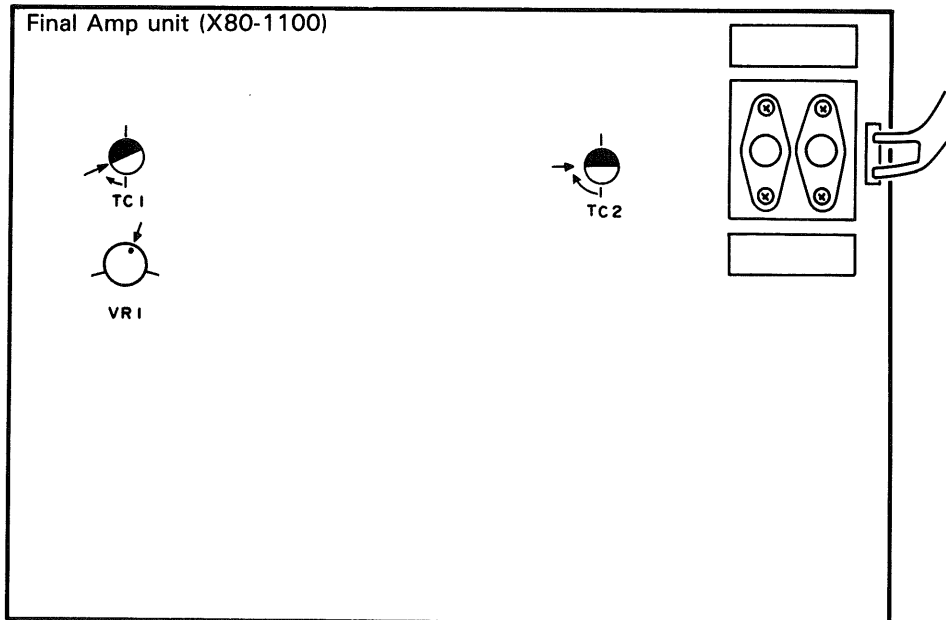


Fig. 2

ADJUSTMENT

3. TRIGGER SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
FIX Level Center	VR1	X74-1480	VERTICAL MODE : CH1 AC-GND-DC : DC TRIG. SOURCE : VERT V. VARIABLE : CAL HORIZONTAL MODE : A SWEEP TIME/DIV : 0.2 ms CH1 VOLTS/DIV : 0.1 V Input a 1 kHz sine wave into CH1, and adjust the oscillator so that the CRT amplitude becomes 6 div. Adjust VR1 so that start point of the luminescent line is at the center of the CRT (vertical direction).
A TRIG. DC Coupling	VR601(CH1) VR602(CH2) VR603(CH3) VR604(CH4)	X73-1760	After adjusting the trigger level center, set the TRIGGERING COUPLING to the DC position. Adjust VR601 so that the start point of the luminescent line is at the same position as in the AC mode.
B TRIG. Level Center	VR4	X74-1480	VERTICAL MODE : CH1 B. COUPLING : AC TRIG. SOURCE : VERT SWEEP TIME/DIV : 0.2 ms HORIZONTAL MODE : B LEVEL : Mechanical center CH1 VOLTS/DIV : 0.1 V Input a 1 kHz sine wave to CH2, and adjust the oscillator so that the CRT amplitude becomes 6 div. Adjust VR4 so that start point of the luminescent line is at the center of the CRT (vertical direction).
B TV sensitivity	VR3	X74-1480	V. MODE : CH1 TRIG. SOURCE : VERT AC-GND-DC : DC VOLTS/DIV : 0.2 V SWEEP TIME/DIV : A 10 μ s. B 5 μ s HORIZONTAL MODE : ALT A. COUPLING : TV LINE Connect the jig to CH1 and apply 100 kHz square wave through the jig. Adjust SLOPE +/- until triggering occurs. Perform the adjustment until the triggering amplitude becomes 0.8 div or less. <div style="text-align: center;"> </div>


ADJUSTMENT

4. HORIZONTAL SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
A SWEEP Time	VR301	X74-1480	SWEEP TIME/DIV: 1 ms Input a 1 ms marker signal into CH1. Adjust VR301 so that the peak of the marker signal matches the CRT scale divided in 1 div.
	VR307	X74-1480	SWEEP TIME/DIV: 1 ms Input a 1 ms marker signal into CH1, and match the peak of the marker signal with the CRT scale divided in 1 div. Set to the X10 MAG status, and adjust VR307 so that the interval between peaks becomes 10 div.
	VR103	X80-1100	SWEEP TIME/DIV: 0.2 μ s Input a 0.2 μ s marker signal into CH1. Set to the X10 MAG status, and adjust the horizontal POSITION so that the peak of the waveform is at the vertical scale line at the center of the CRT. Release the X10 MAG mode and adjust VR103 so that the peak of the waveform matches the vertical scale line at the center of the CRT.
	TC101	X74-1480	SWEEP TIME/DIV: 2 μ s Adjust TC101 in the same way as for 1 ms adjustment.
	TC302		SWEEP TIME/DIV: 20 ns Adjust TC302 in the same way as for 1 ms adjustment.
	TC103	X80-1100	SWEEP TIME/DIV: 50 ns X10 MAG : ON Input a 5 ns marker signal into CH1. Adjust TC103 so that the peak of the marker signal matches the CRT scale divided in 1 div.
	TC101	X80-1100	SWEEP TIME/DIV: 20 ns X10 MAG : ON Input a 2 ns sine wave signal into CH1. Adjust TC101 so that the peak of the marker signal matches the CRT scale divided in 2 div. Repeat this adjustment for 20 ns, 5 ns, then 2 ns to obtain optimum point.
B SWEEP Time	VR302	X74-1480	SWEEP TIME/DIV: 1 ms Input a 1 ms marker signal into CH1. Adjust VR302 so that the peak of the marker signal matches the CRT scale divided in 1 div.
	VR104	X74-1480	SWEEP TIME/DIV: 1 ms ~ 5 ms Input a 1 ms ~ 5 ms signal into CH1, and adjust in the same way as for 1 ms
	TC102	X74-1480	SWEEP TIME/DIV: 2 μ s Input a 2 μ s marker signal into CH1, and adjust in the same way as for 1 ms adjustment.
	TC303	X74-1480	SWEEP TIME/DIV: 20 ns Input a 20 ns marker signal into CH1, and adjust in the same way as for 1 ms adjustment.

ADJUSTMENT

POWER SUPPLY UNIT (X68-1500-01)

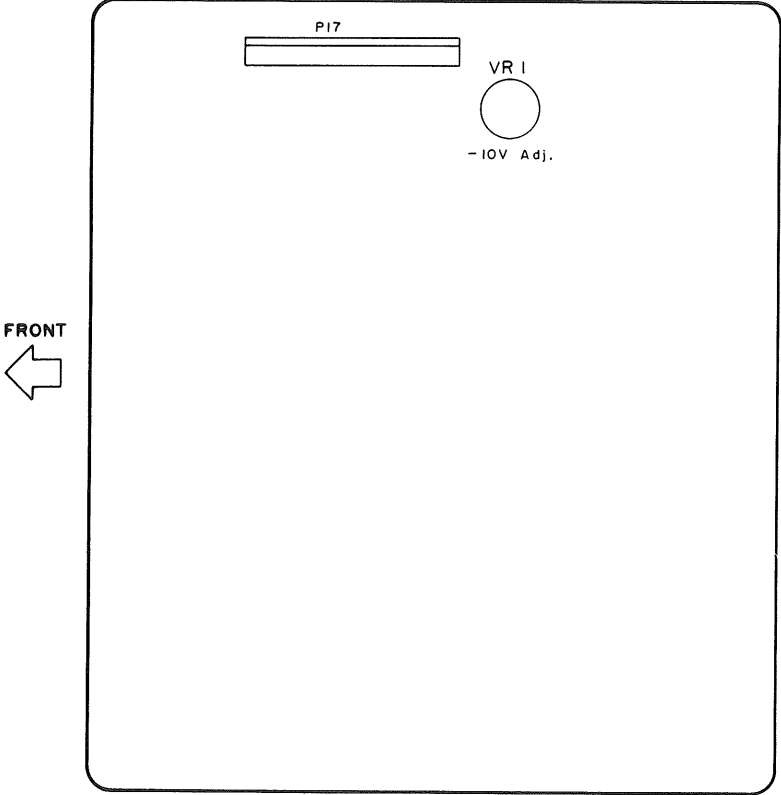


ADJUSTMENT

HIGH VOLTAGE UNIT (X68-1510-02)




Pattern side

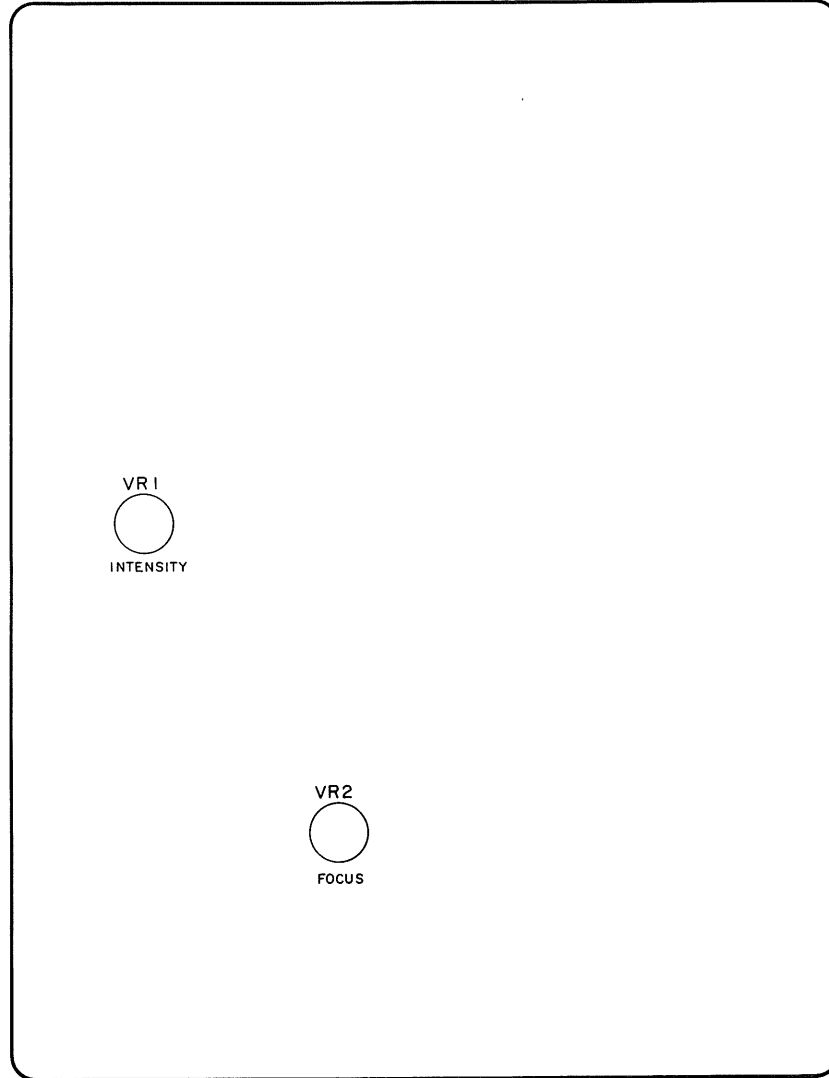

ADJUSTMENT


VERTICAL PRE AMPLIFIER UNIT (X73-1760-01)

FRONT

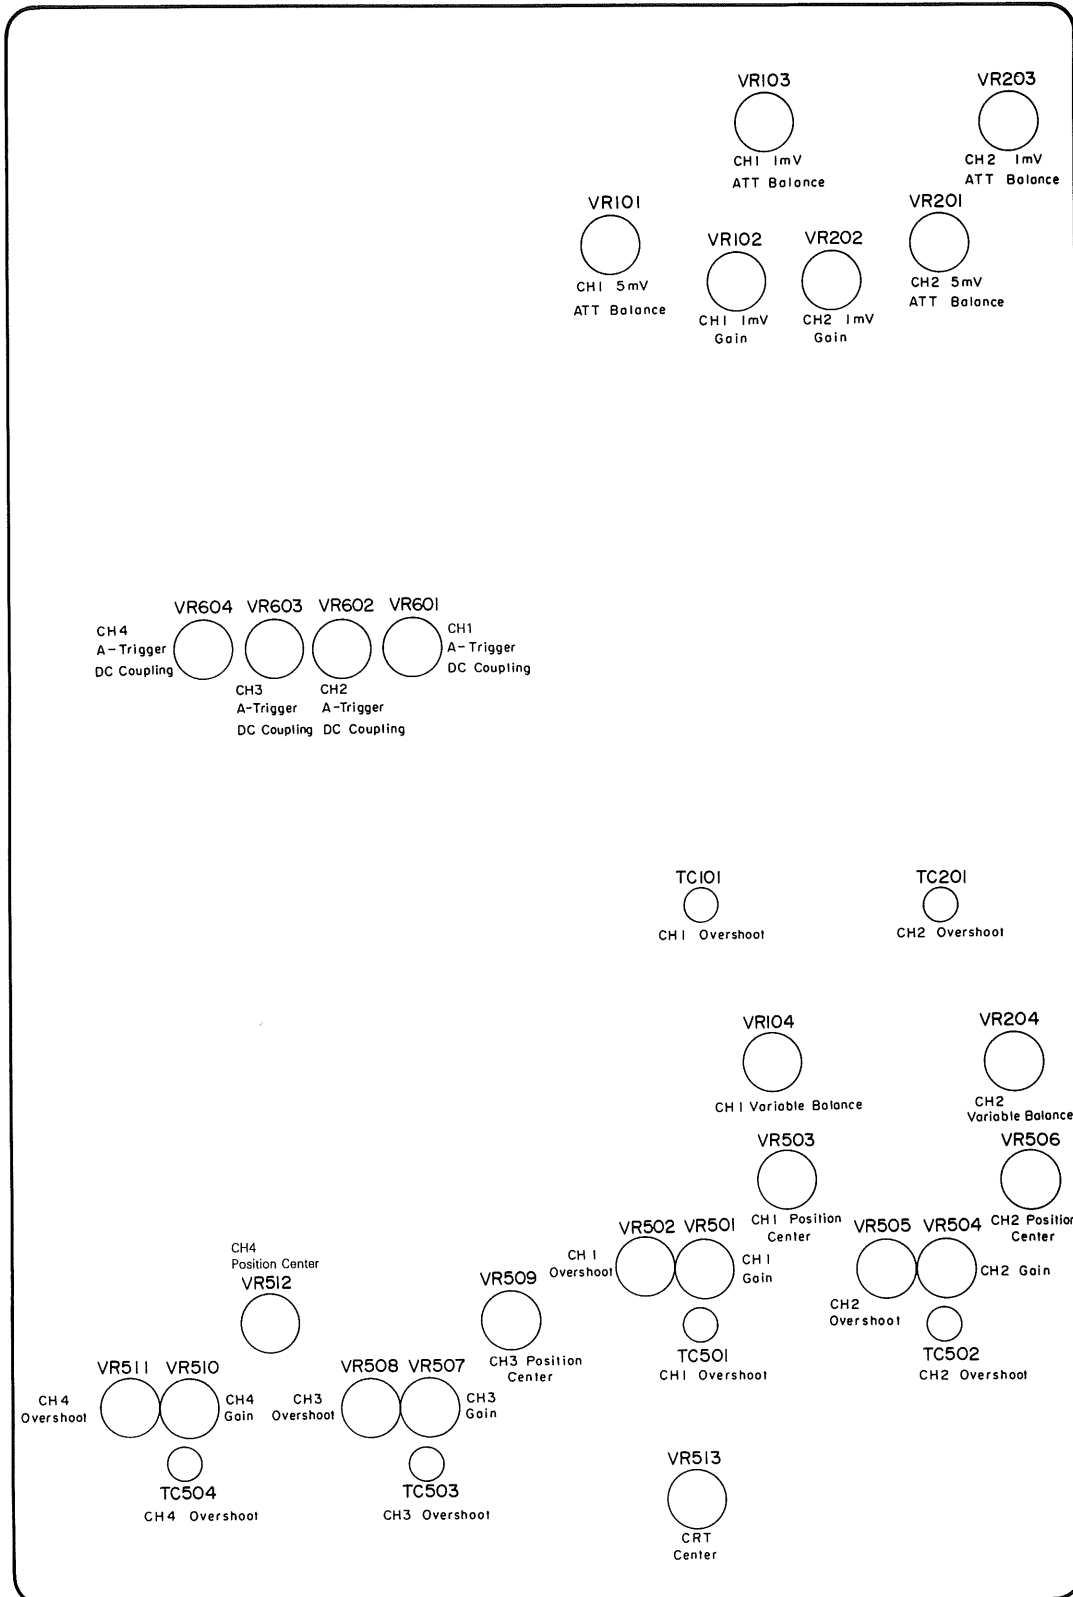

ADJUSTMENT

HORIZONTAL UNIT (X74-1480-02)

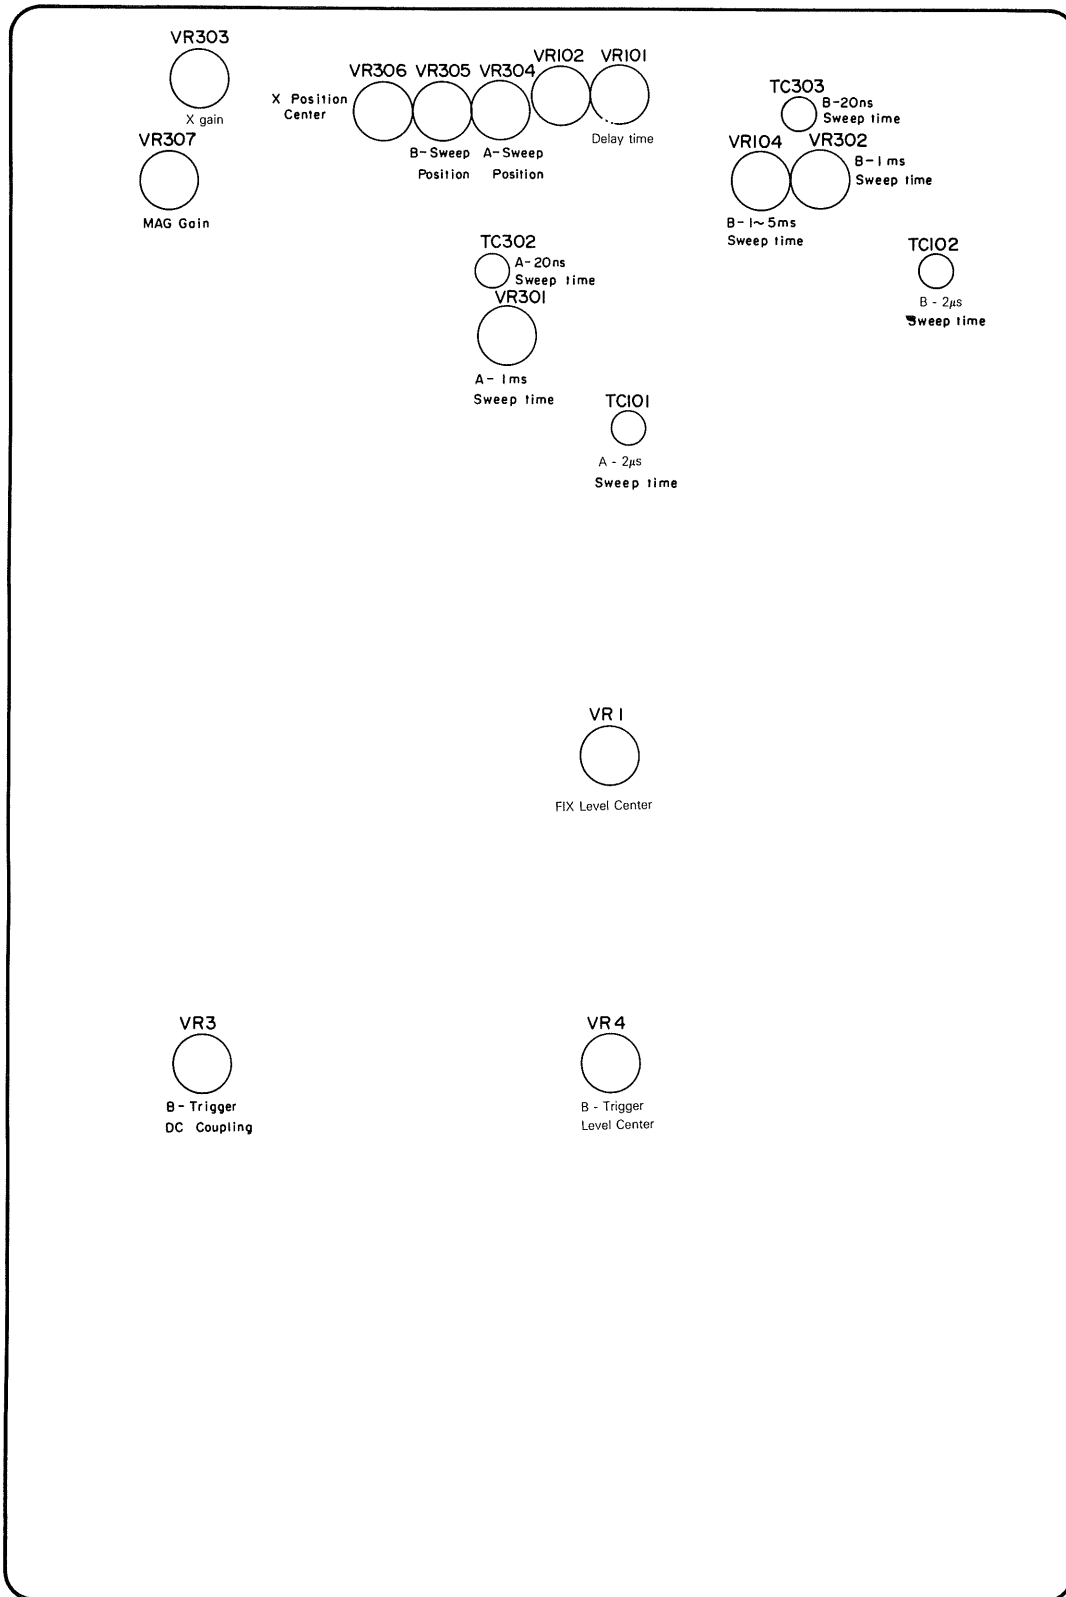


FRONT

ADJUSTMENT


ATT UNIT (X75-1180-01)

FRONT

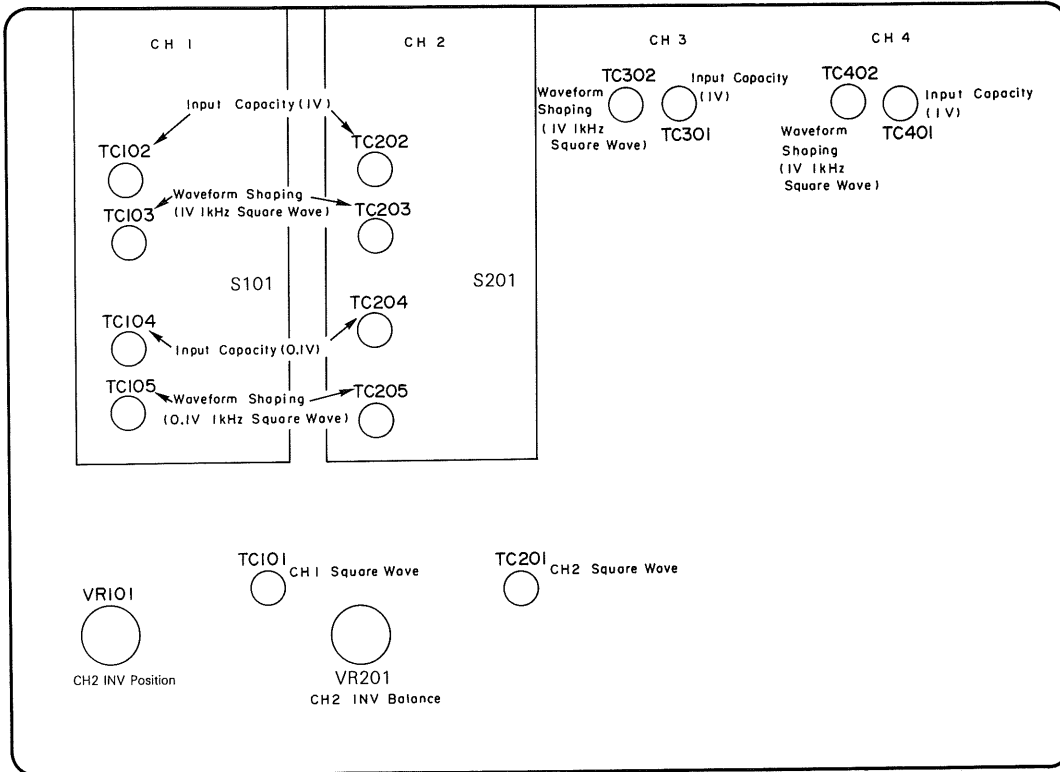


VOLUME UNIT (X81-2330-02)

FRONT

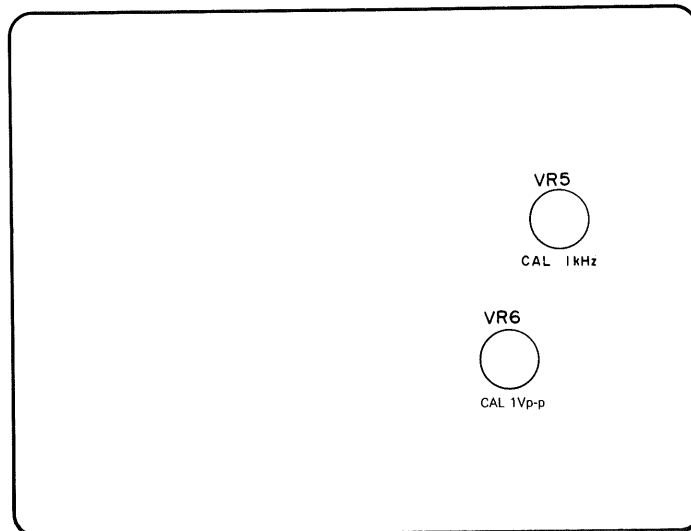

ADJUSTMENT

FINAL AMP UNIT (X80-1100-02)

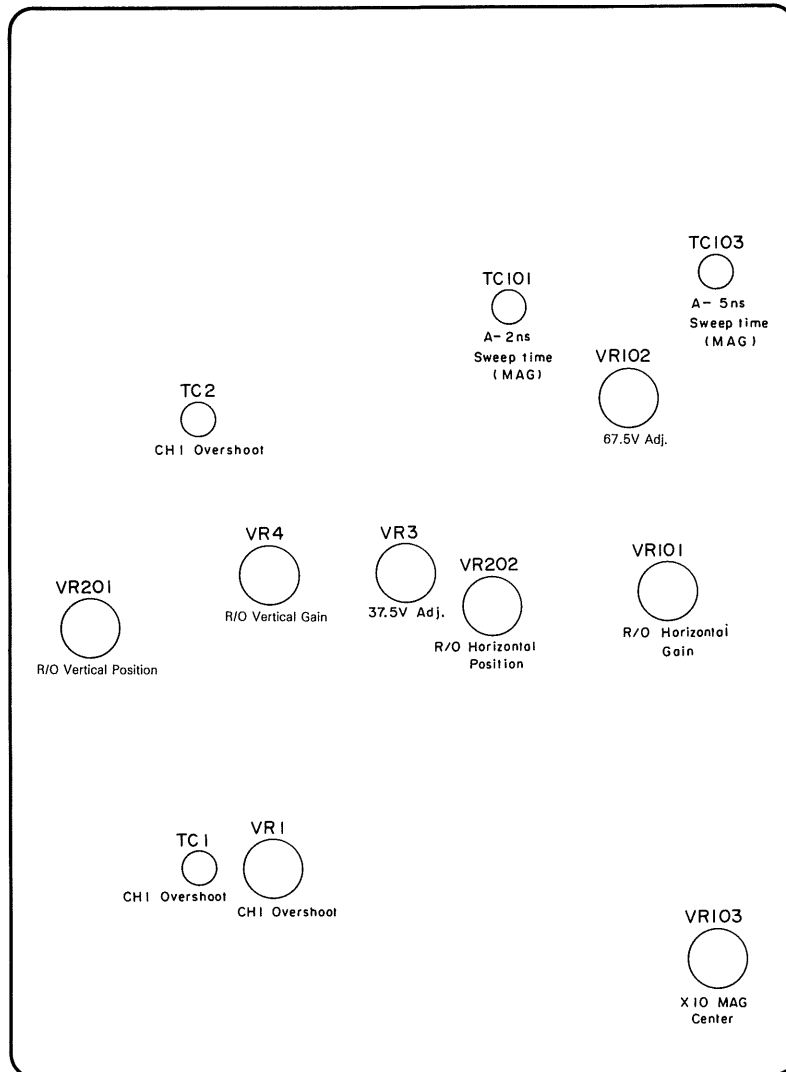

FRONT

TROUBLESHOOTING

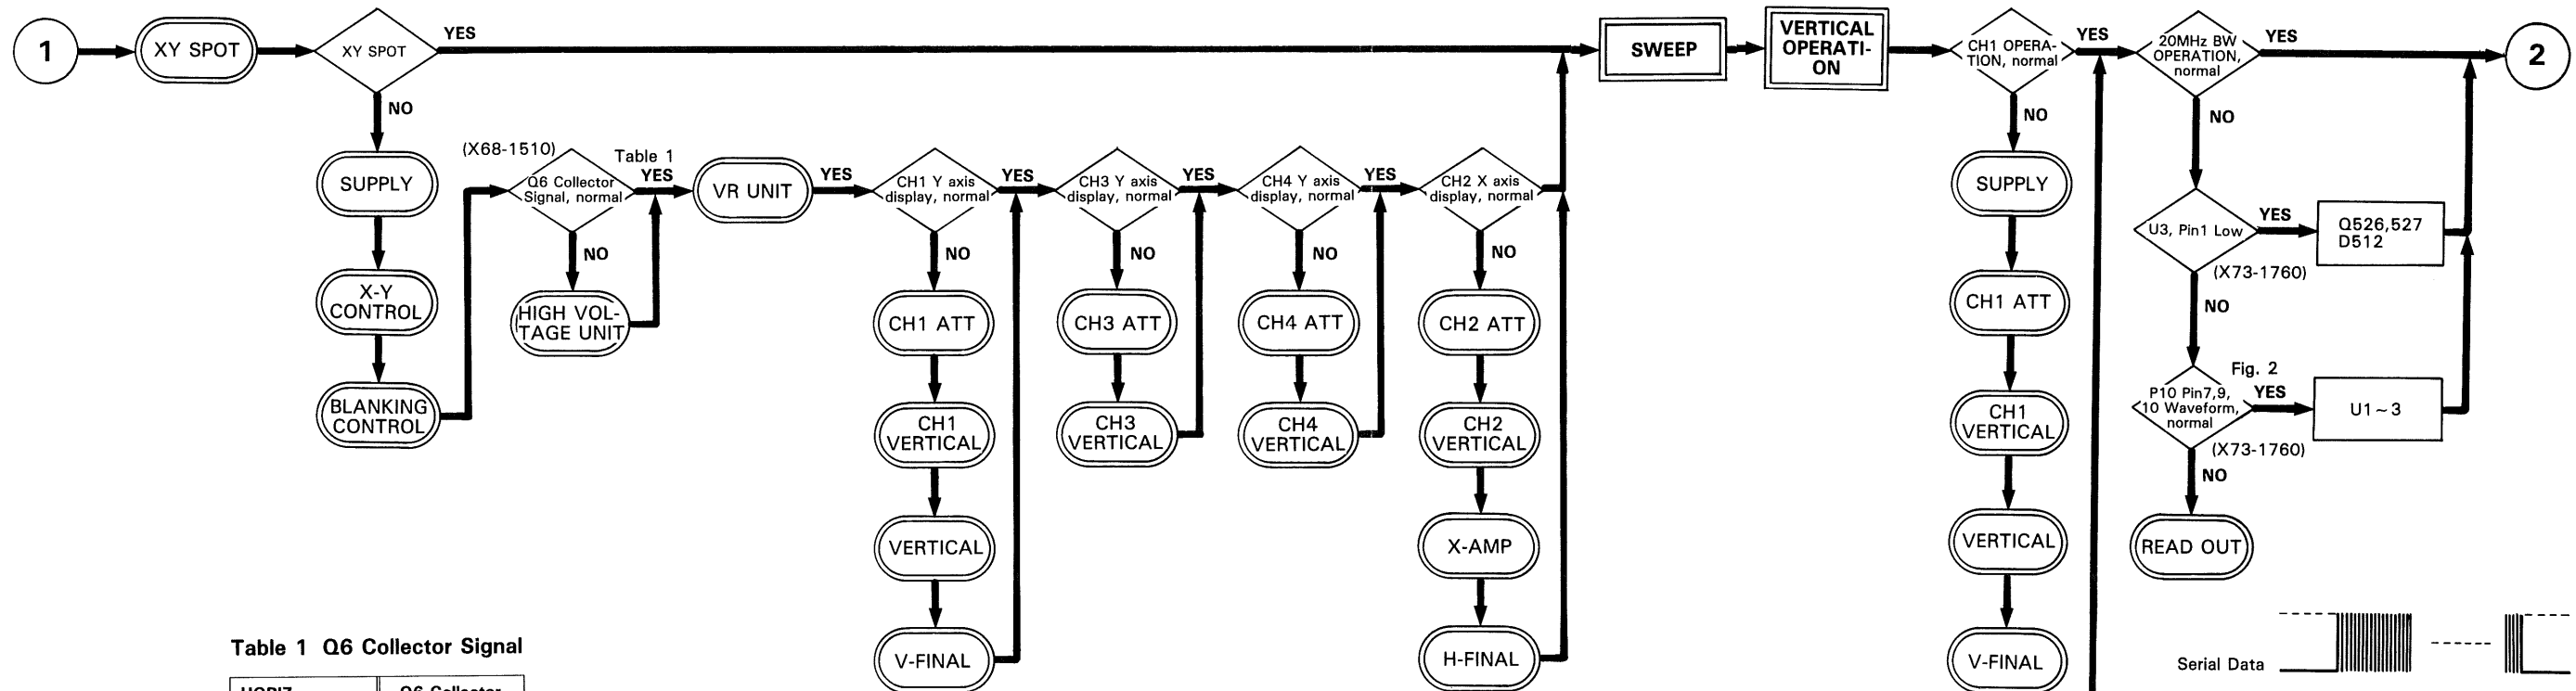
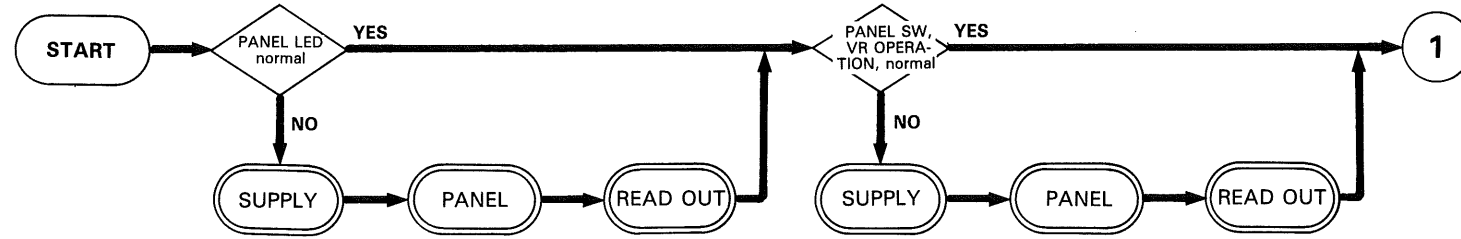


Table 1 Q6 Collector Signal

HORIZ DISPLAY MODE	Q6 Collector Signal
A	Fig. 1
A INT B AFT. D	Fig. 1
ALT AFT. D	Fig. 1
B AFT. D	Fig. 1
X-Y	30 ~ 60V

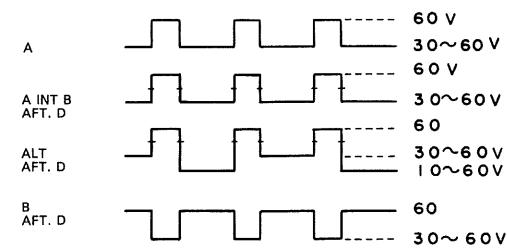


Fig. 1 Q6 Collector Signal




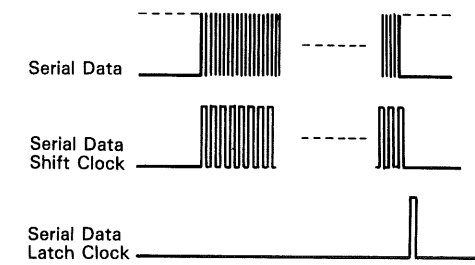


Fig. 2 Serial transmit timing chart

	Panel SW SCAN	Panel LED Control	ATT UNIT Control	V UNIT Control	H UNIT Control
Serial Data	P1 Pin 4 (SD)	P1 Pin 1 (LD)	P4 Pin 9 (AD)	U16 Pin 16 (VD)	U16 Pin 19 (HD)
Serial Data Shift Clock	P1 Pin 5 (SSC)	P1 Pin 2 (LSC)	P4 Pin 8 (ASC)	U9 Pin 14 (VSC)	U9 Pin 10 (HSC)
Serial Data Latch Clock	P1 Pin 6 (SLC)	P1 Pin 3 (LLC)	P4 Pin 7 (ALC)	U8 Pin 11 (VLC)	U8 Pin 7 (HLC)

TROUBLESHOOTING

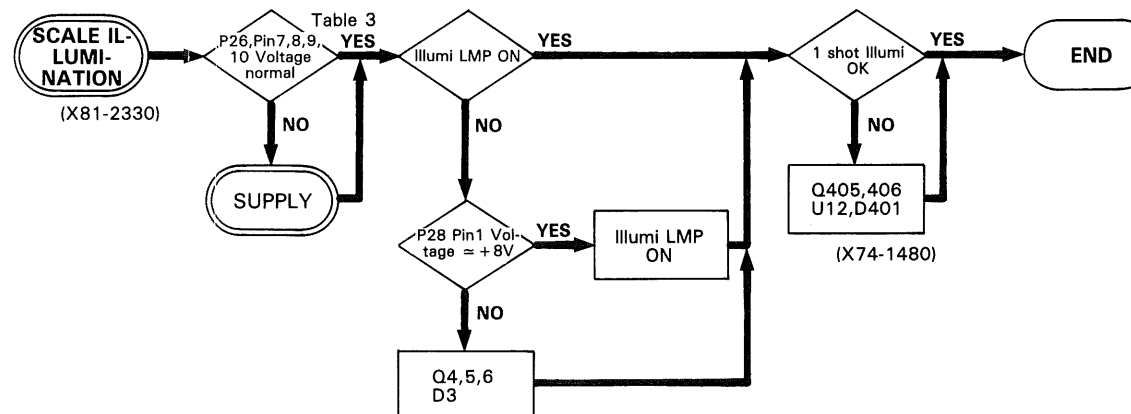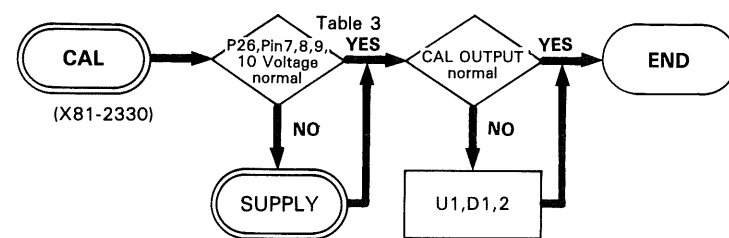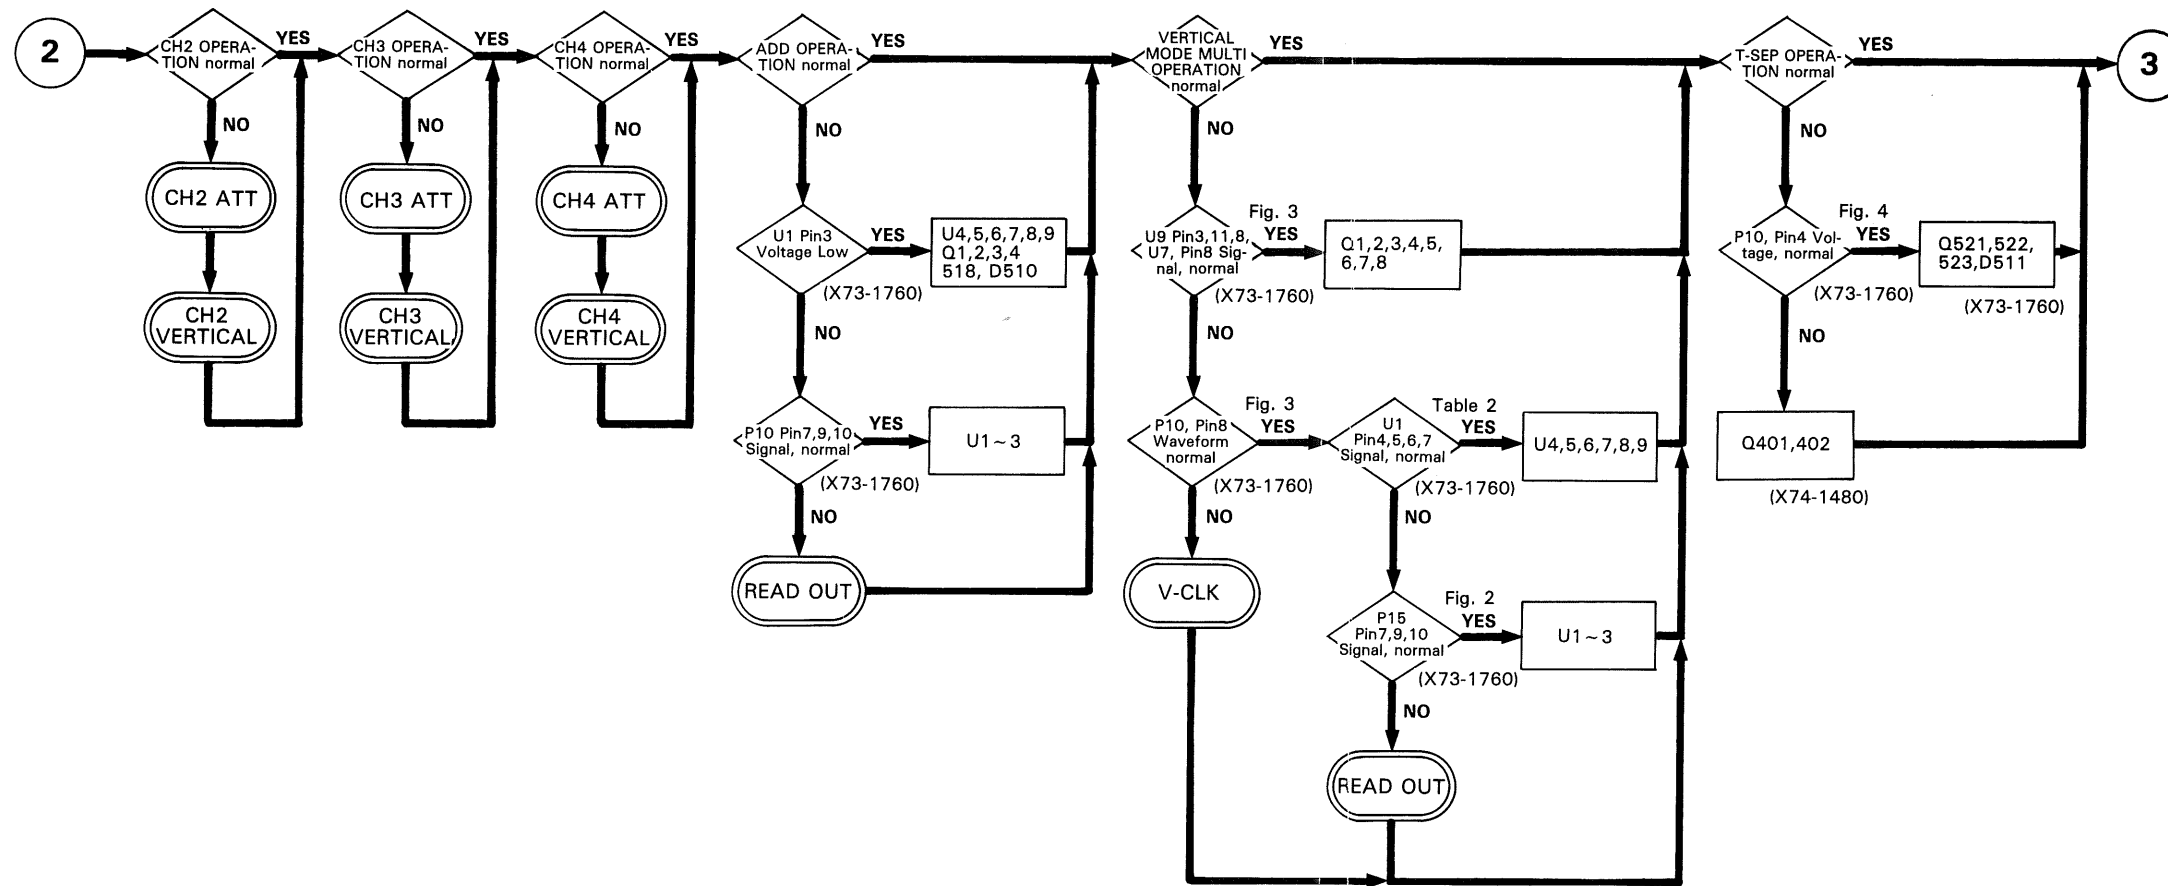

TROUBLESHOOTING


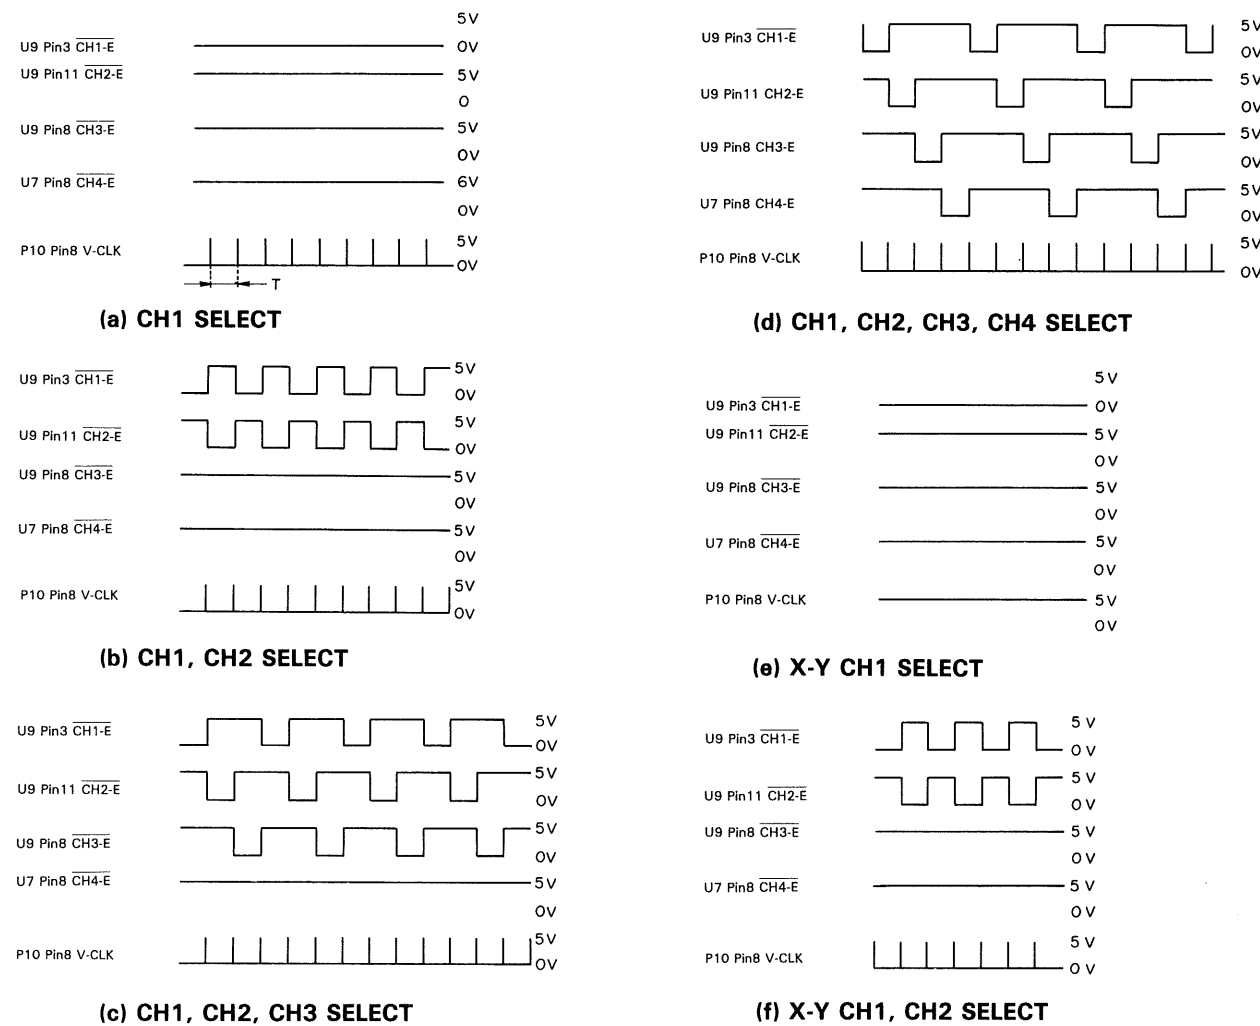


Fig. 3 VERTICAL CH SELECT WAVEFORM

T: H-MODE A, A INT B, B, X-Y
42 μ s: 24kHz
T: H-MODE ALT
84 μ s: 12kHz

Table 2 U1, CH SELECT Voltage

CH SELECT	U1				
	Pin3	Pin4	Pin5	Pin6	Pin7
CH1					L
CH2				L	
CH3			L		
CH4		L			
ADD	LOW				

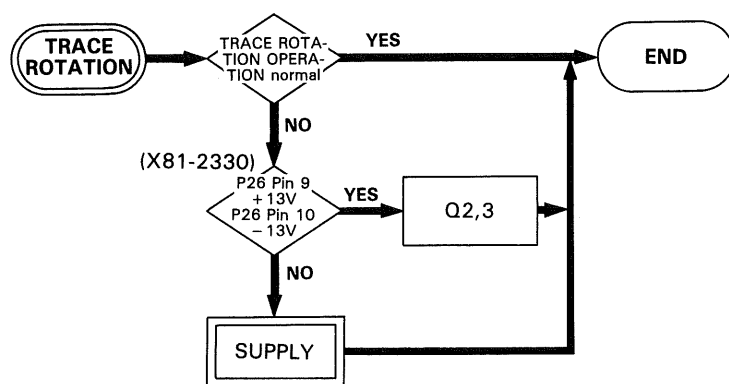

(a) FULLY CW



(b) FULLY CCW

Fig. 4 P10, Pin4 Waveform

Table 3 Voltage

P26 Pin No.	Voltage [V]
7	+10
8	-10
9	+13
10	-13

TROUBLESHOOTING

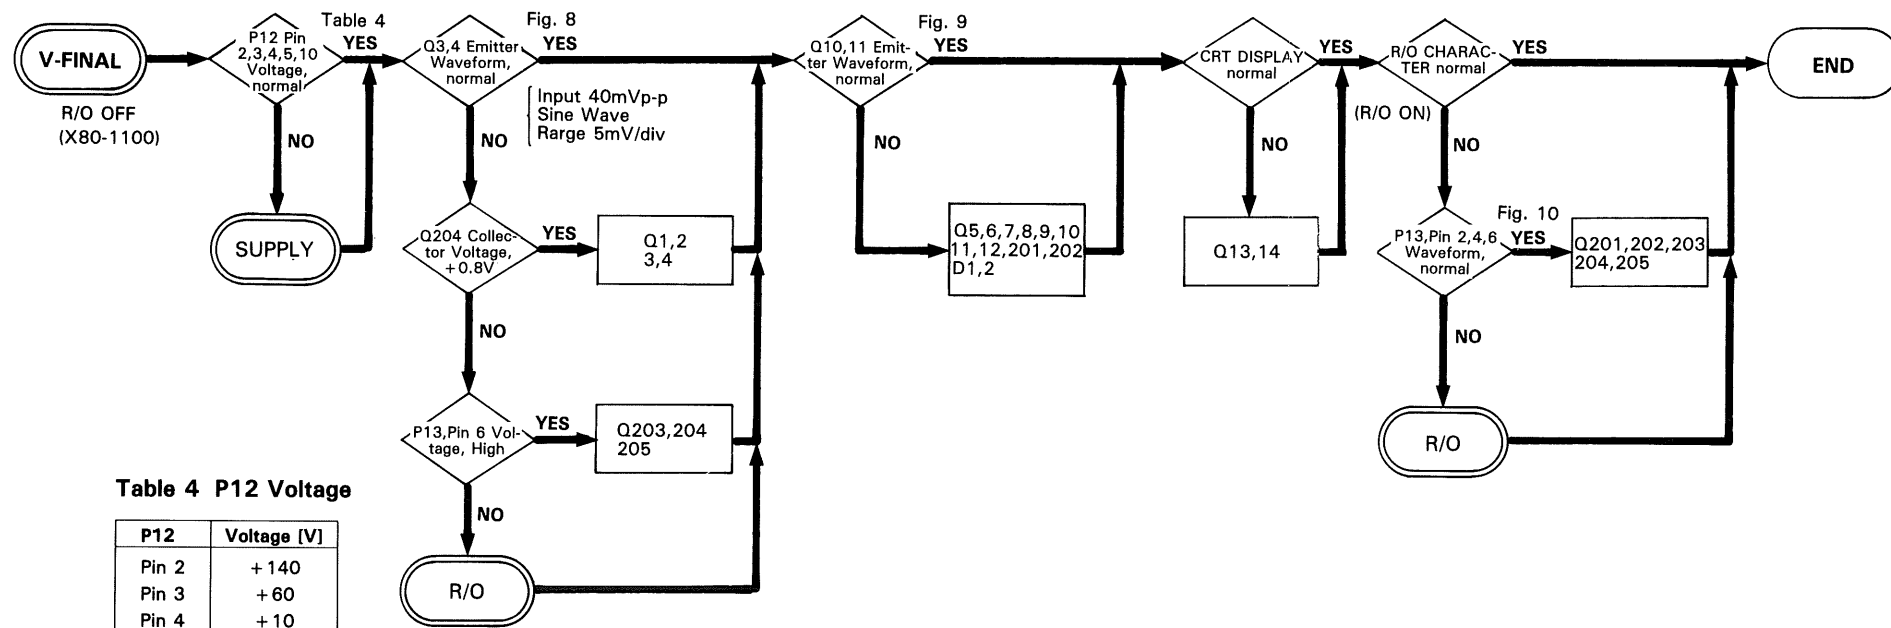
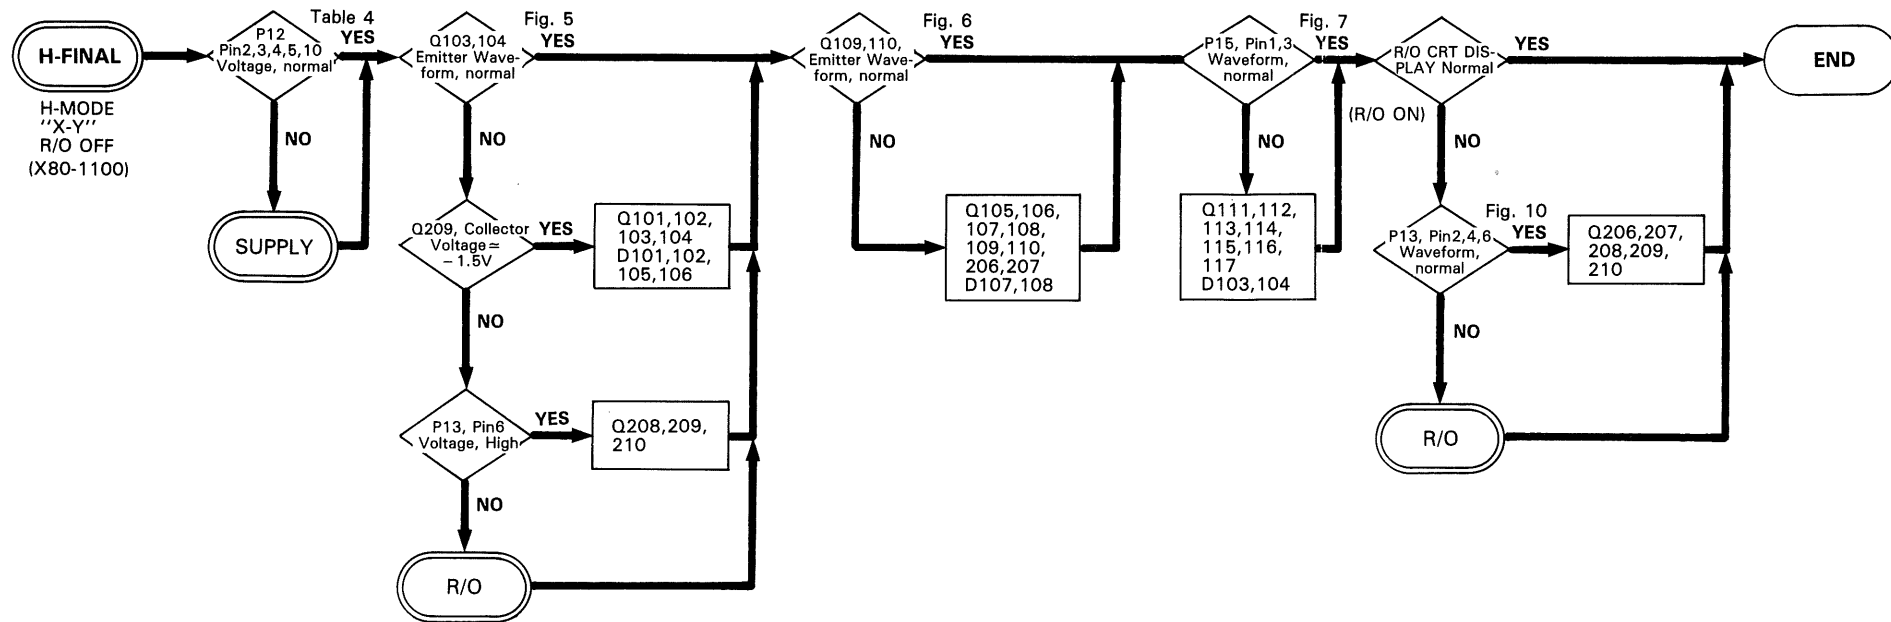


Table 4 P12 Voltage

P12	Voltage [V]
Pin 2	+140
Pin 3	+60
Pin 4	+10
Pin 5	-10
Pin10	+15

TROUBLESHOOTING

H-MODE "X-Y"
 CH2 Input: 40mVp-p 1kHz Sine Wave
 Volts/div: 5mV/div



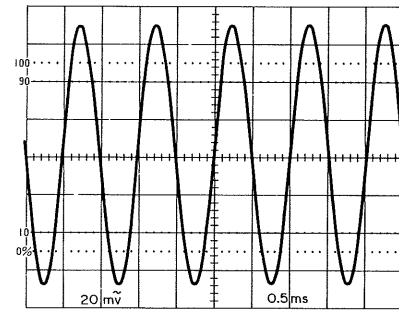


Fig. 5 DC - 0.3V

Input: 40mVp-p, 1 kHz
 Sine Wave
 Volts/div: 5mV/div

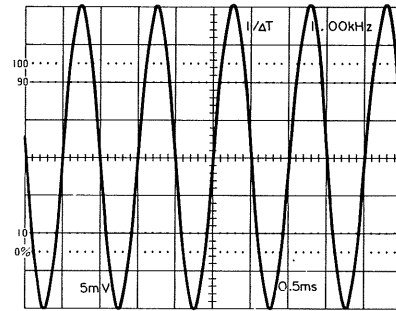

CRT

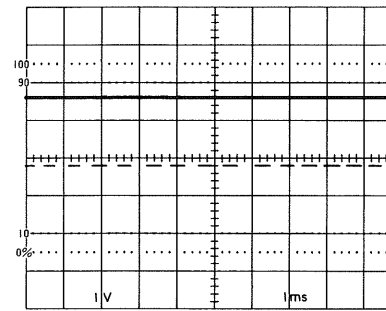

Pin 6

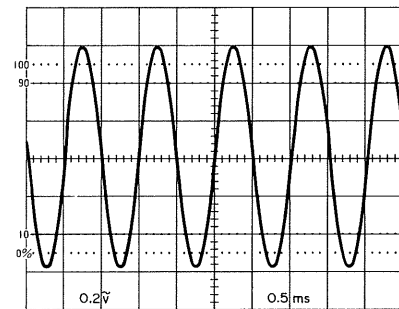


Fig. 6 DC - 4V


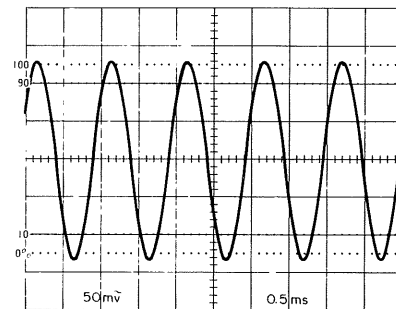


Fig. 8 DC + 2.6V

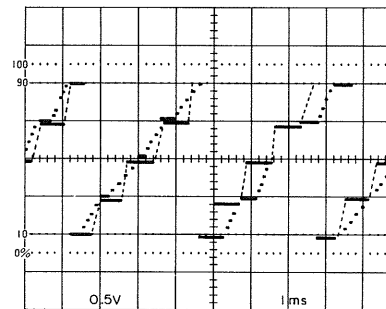

Pin 4

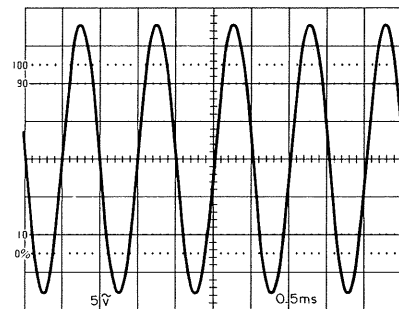


Fig. 7 DC + 70V


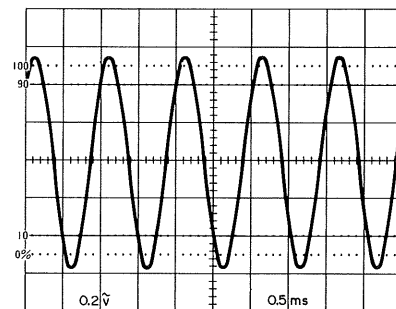


Fig. 9 DC + 3.7V

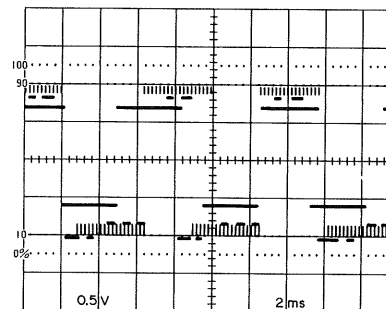

Pin 2

Fig. 10 P13. R/O Signal (R/O ON)

TROUBLESHOOTING

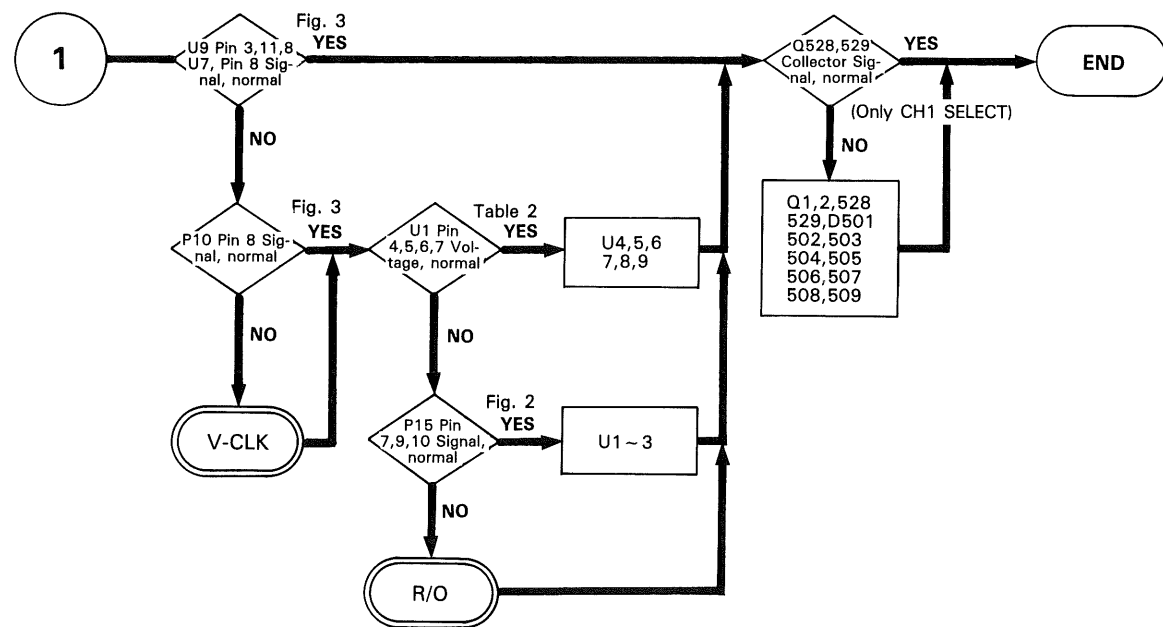
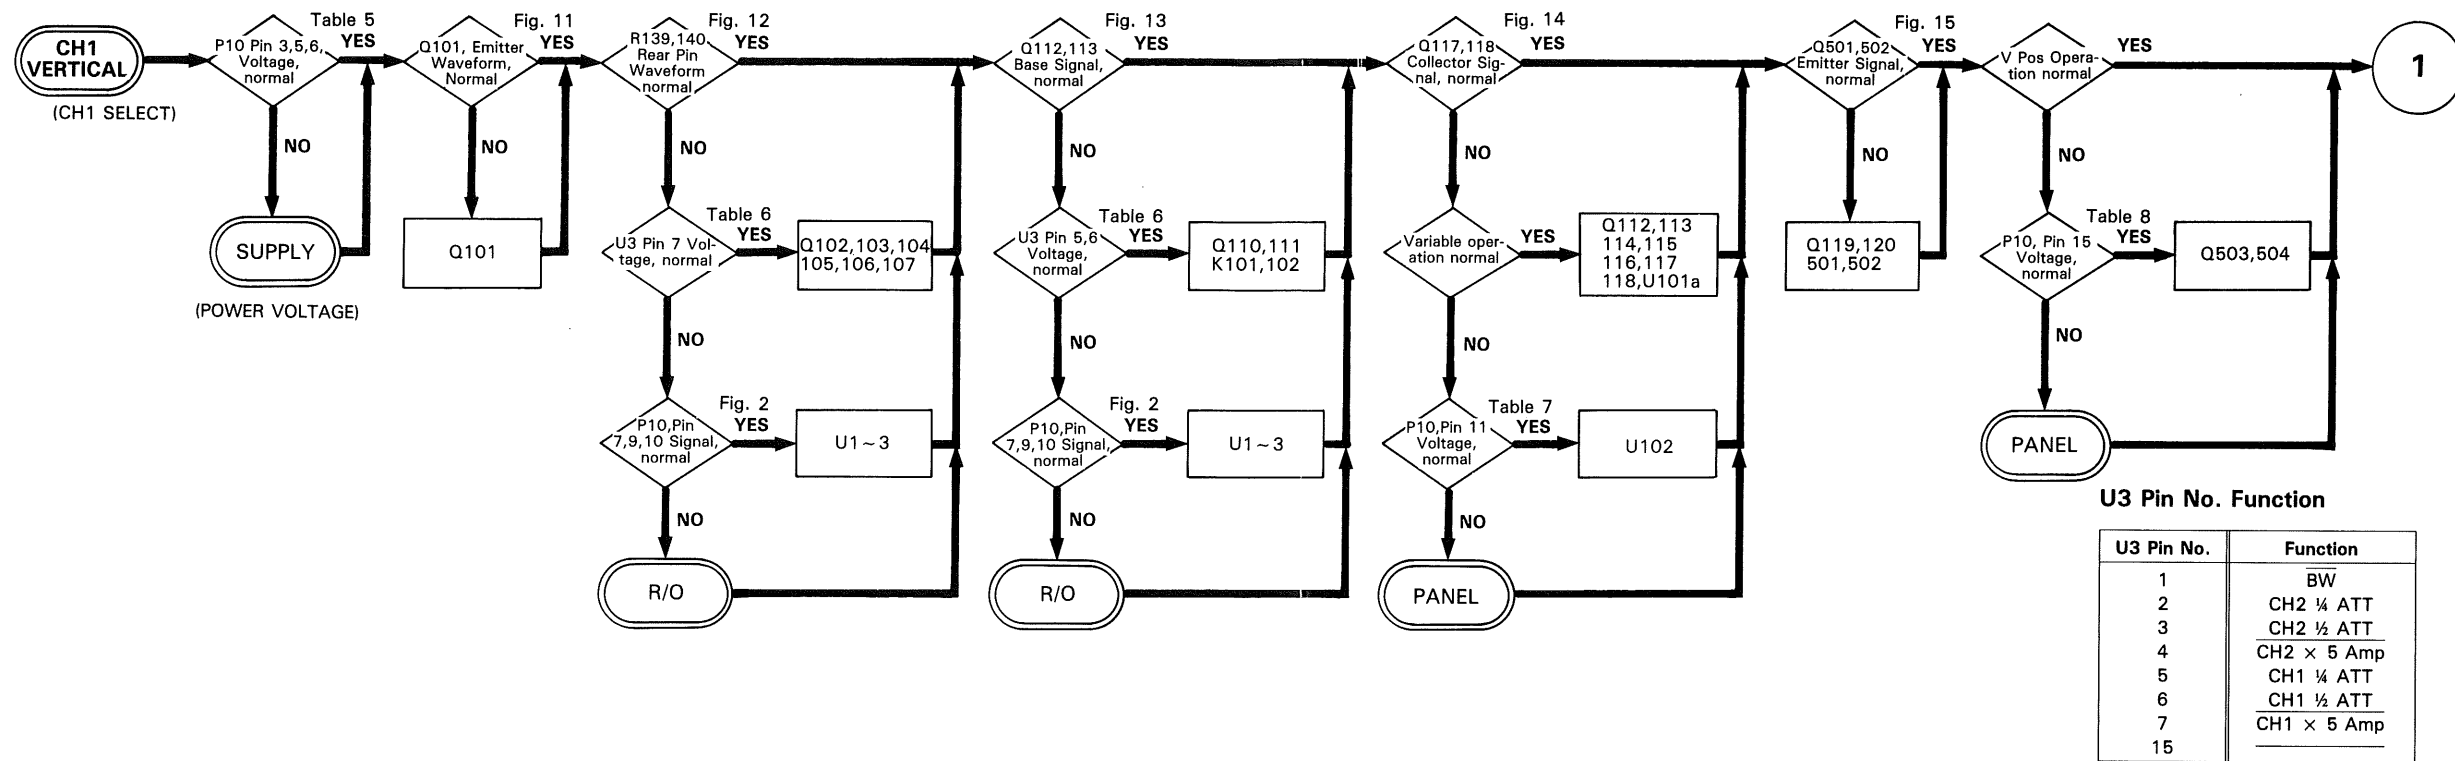


Table 5 Vpre Power Voltage

P10	Voltage [V]
Pin3	+ 10
Pin5	+ 5
Pin6	- 10

Table 6 U3 Pin Voltage

Volts/div	CH2			CH1		
	Pin2	Pin3	Pin4	Pin5	Pin6	Pin7
1 mV						
2		H			H	
5						H
10		H	H		H	H
20	H	H	H	H	H	H
50						H
0.1 V		H	H		H	H
0.2	H	H	H	H	H	H
0.5						H
1.0		H	H		H	H
2.0	H	H	H	H	H	H
5.0			H			H

Table 7 P10 CAL ~ UNCAL

P10	CAL ~ UNCAL
Pin11	0 ~ +10V
Pin12	0 ~ +10V

Table 8 P10 POS VR

P10	Pos VR Fully CW ~ Fully CCW
Pin15	- 10V ~ +10V
Pin16	- 10V ~ +10V
Pin13	- 10V ~ +10V
Pin14	- 10V ~ +10V

TROUBLESHOOTING

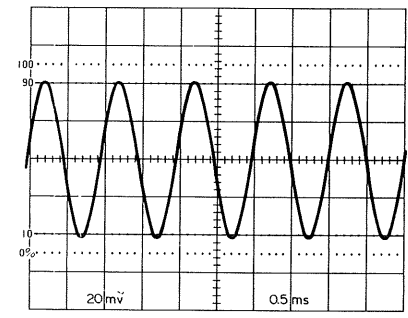
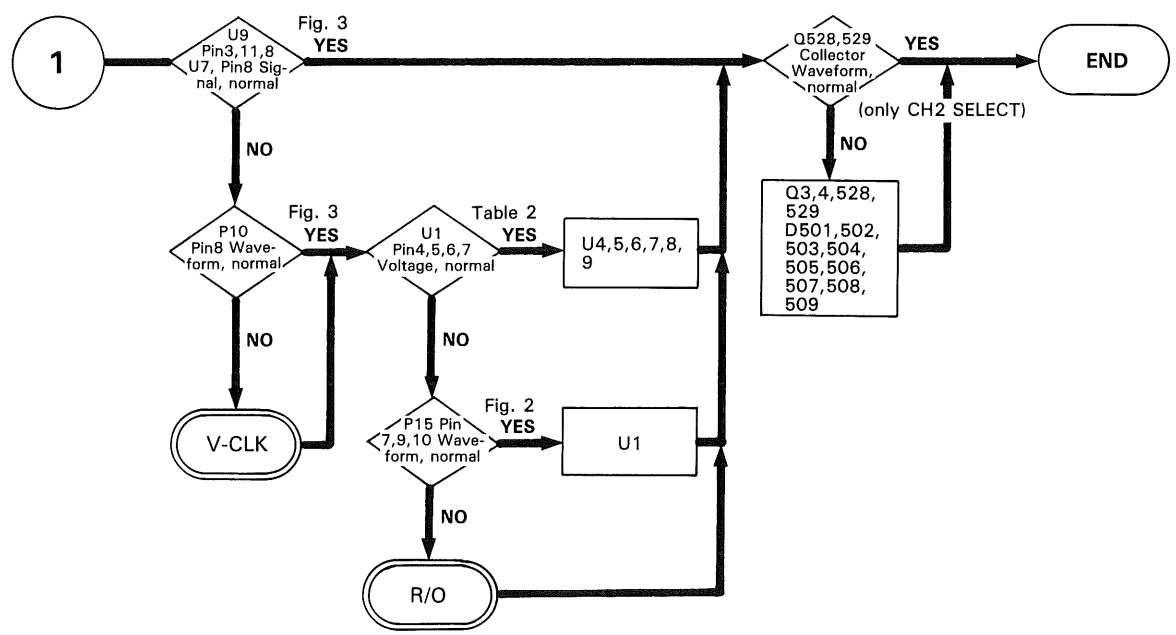
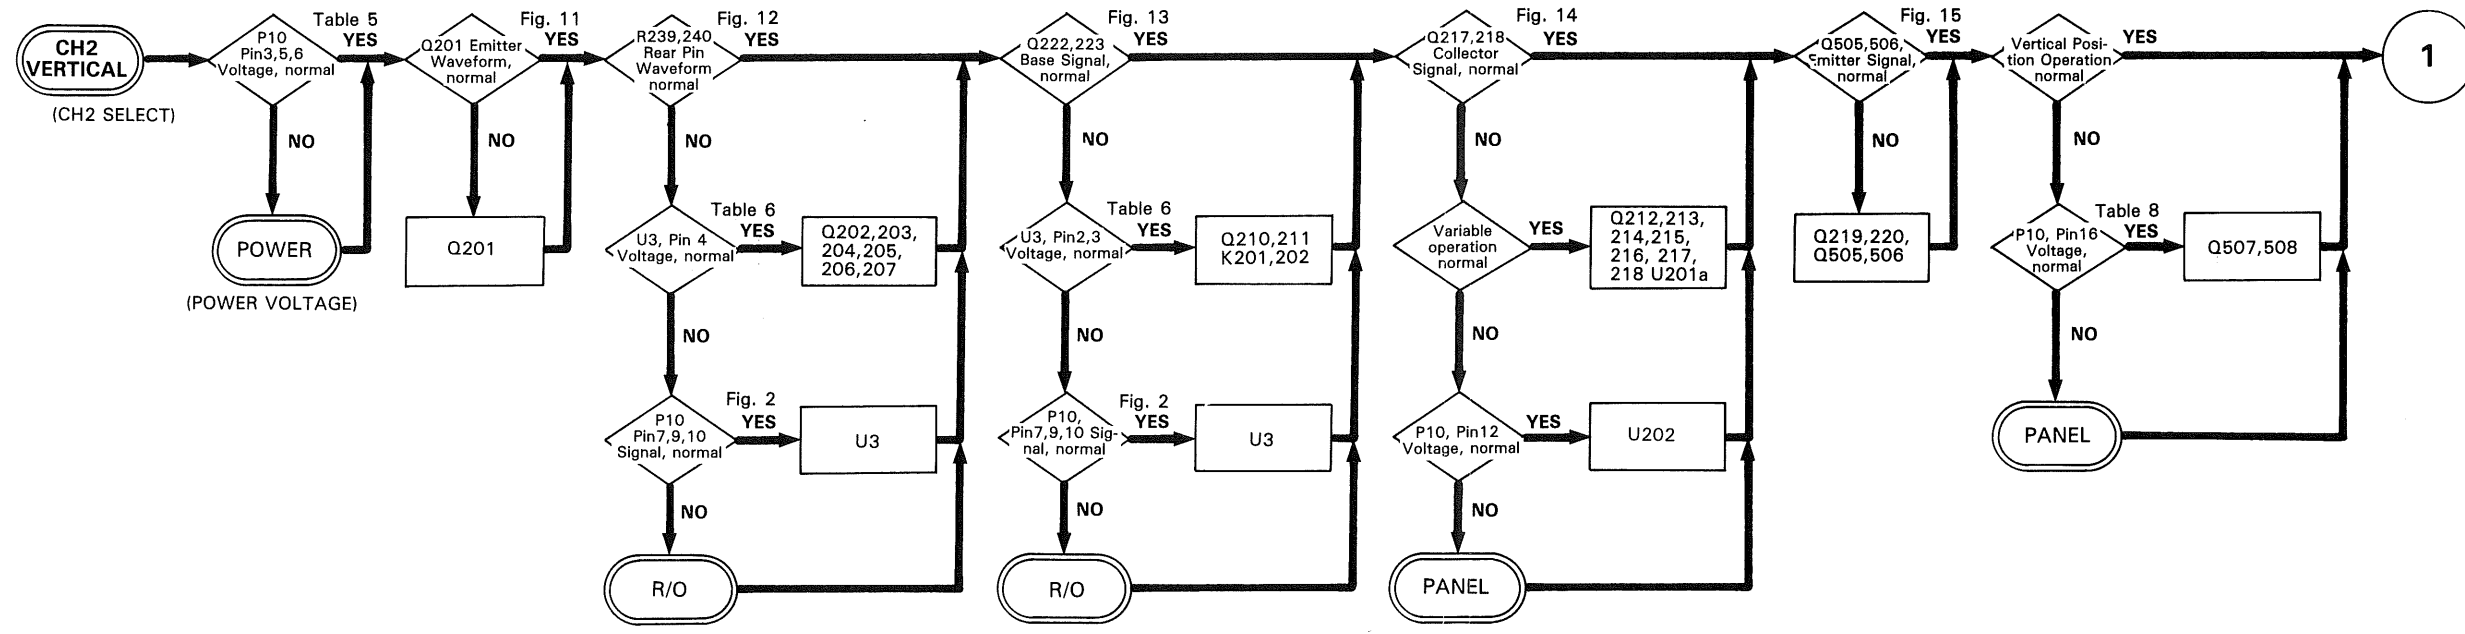


Fig. 11 DC +6V

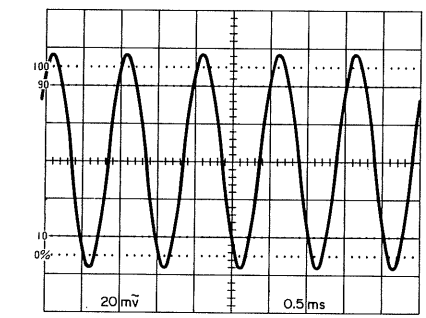


Fig. 12 DC -1.8V

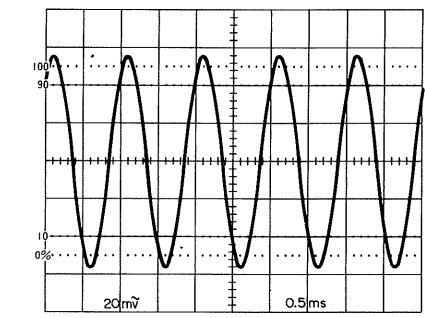


Fig. 13 DC -1.8V

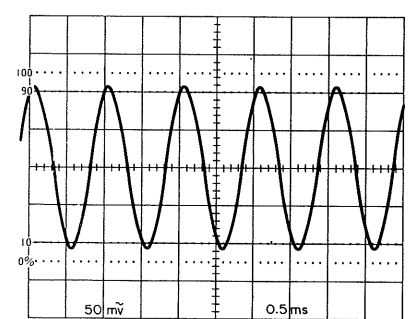


Fig. 14 DC +4.8V



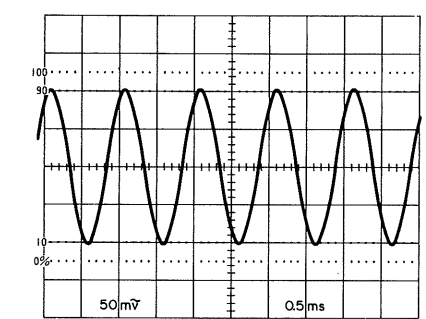


Fig. 15 DC +4.8V

TROUBLESHOOTING

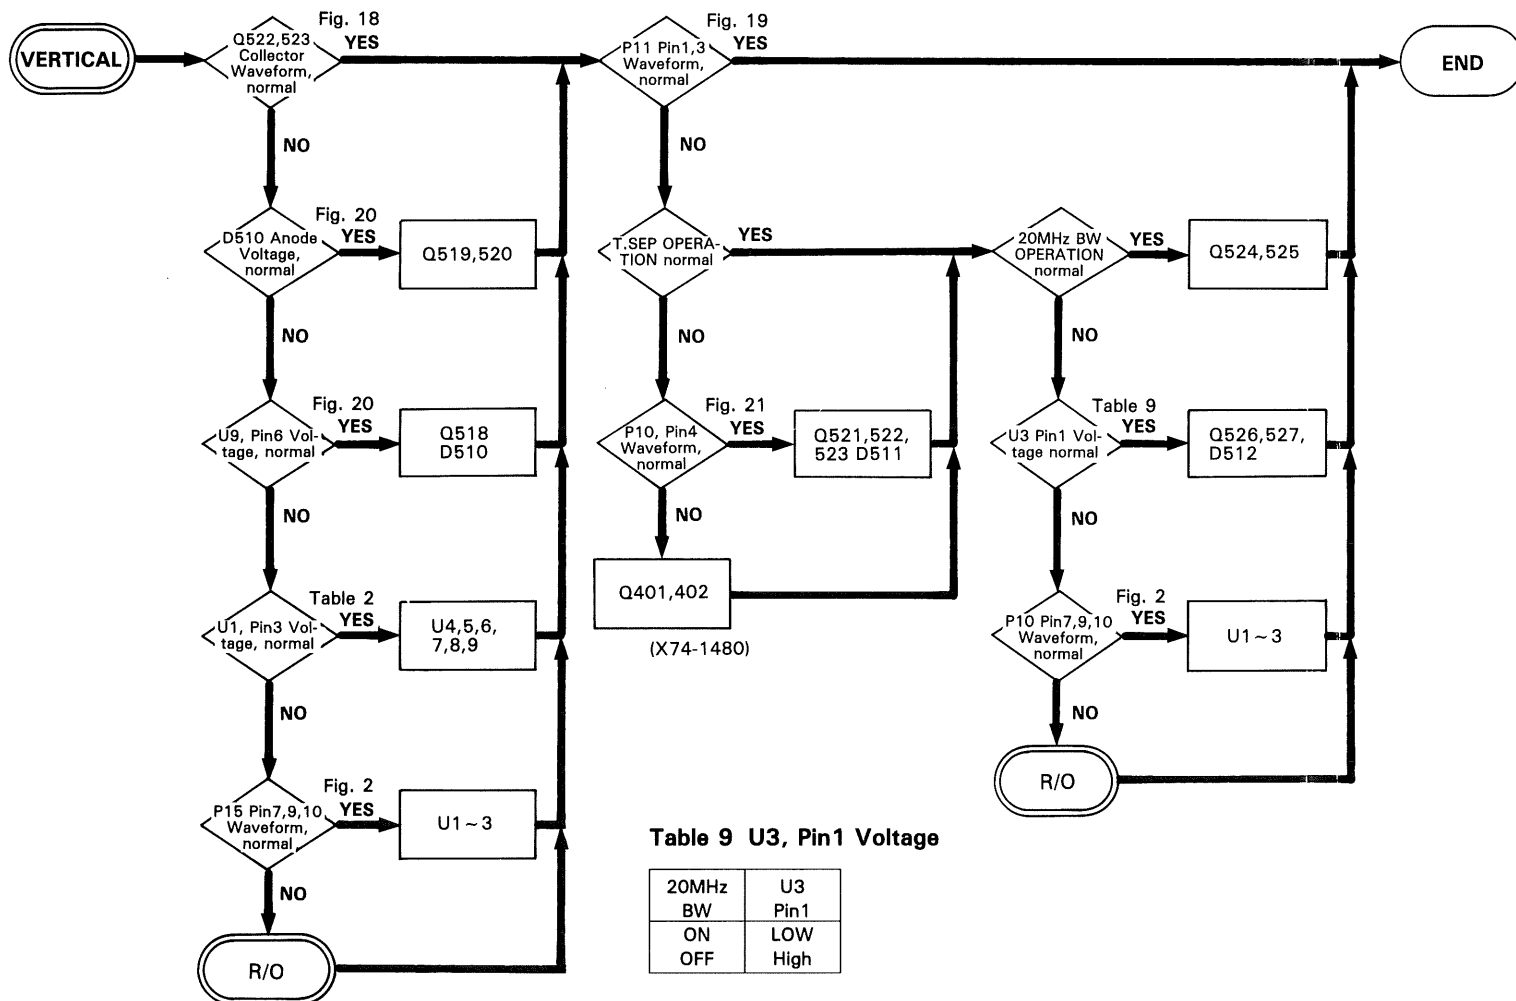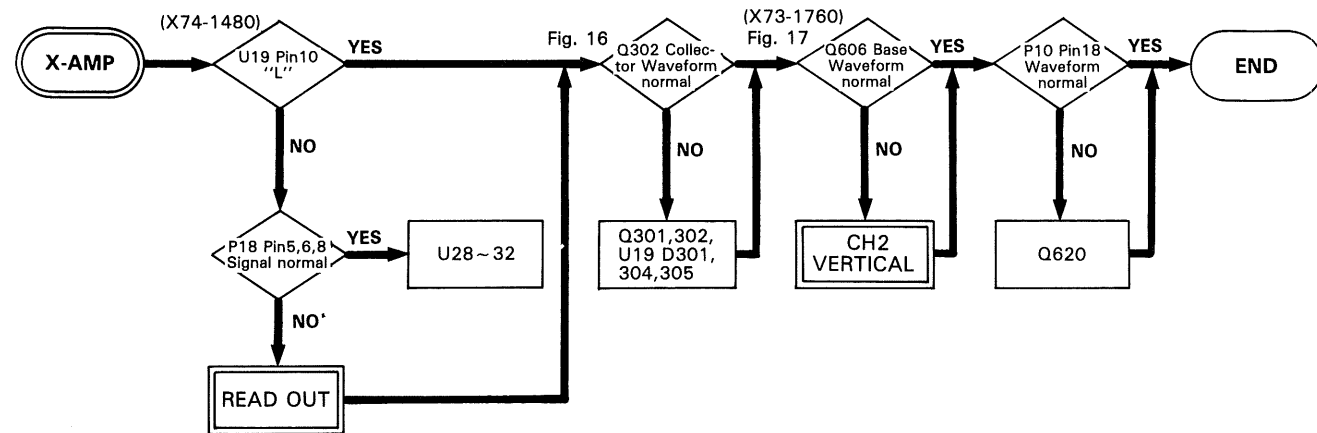

H-MODE "X-Y"
Input: 40mVp-p 1kHz
Sine Wave
Volts/div: 5mV/div

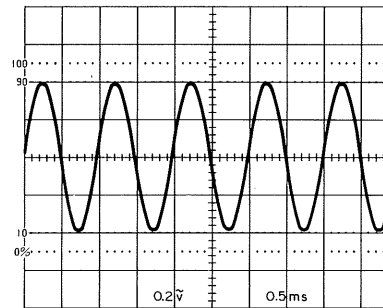


Fig. 16 DC +2.4V

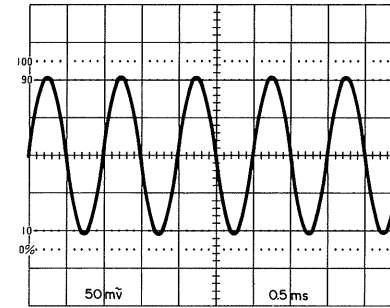


Fig. 17 DC +5V

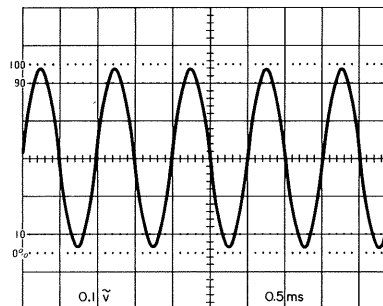


Fig. 18 DC -5.0V



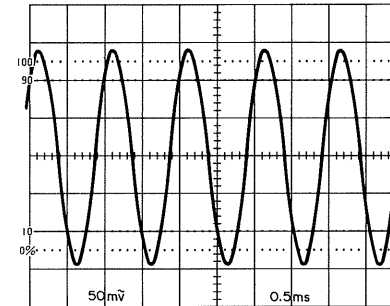



Fig. 19 DC +5V



(a) V-MODE "ADD" + The other one



(b) V-MODE "ADD" + CH x 2




(c) V-MODE "ADD" is not selected

Fig. 20 D510 Anode, U9, Pin6 Waveform



(a) T. SEP FULLY CCW



(b) T. SEP FULLY CW

Fig. 21 T. SEP. P10 Pin4 Waveform H-MODE "ALT"

TROUBLESHOOTING

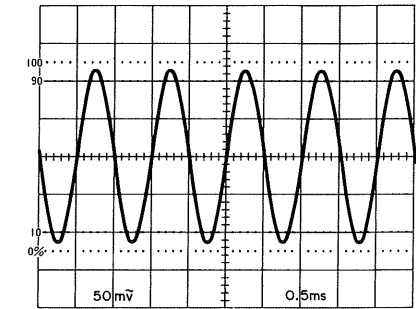
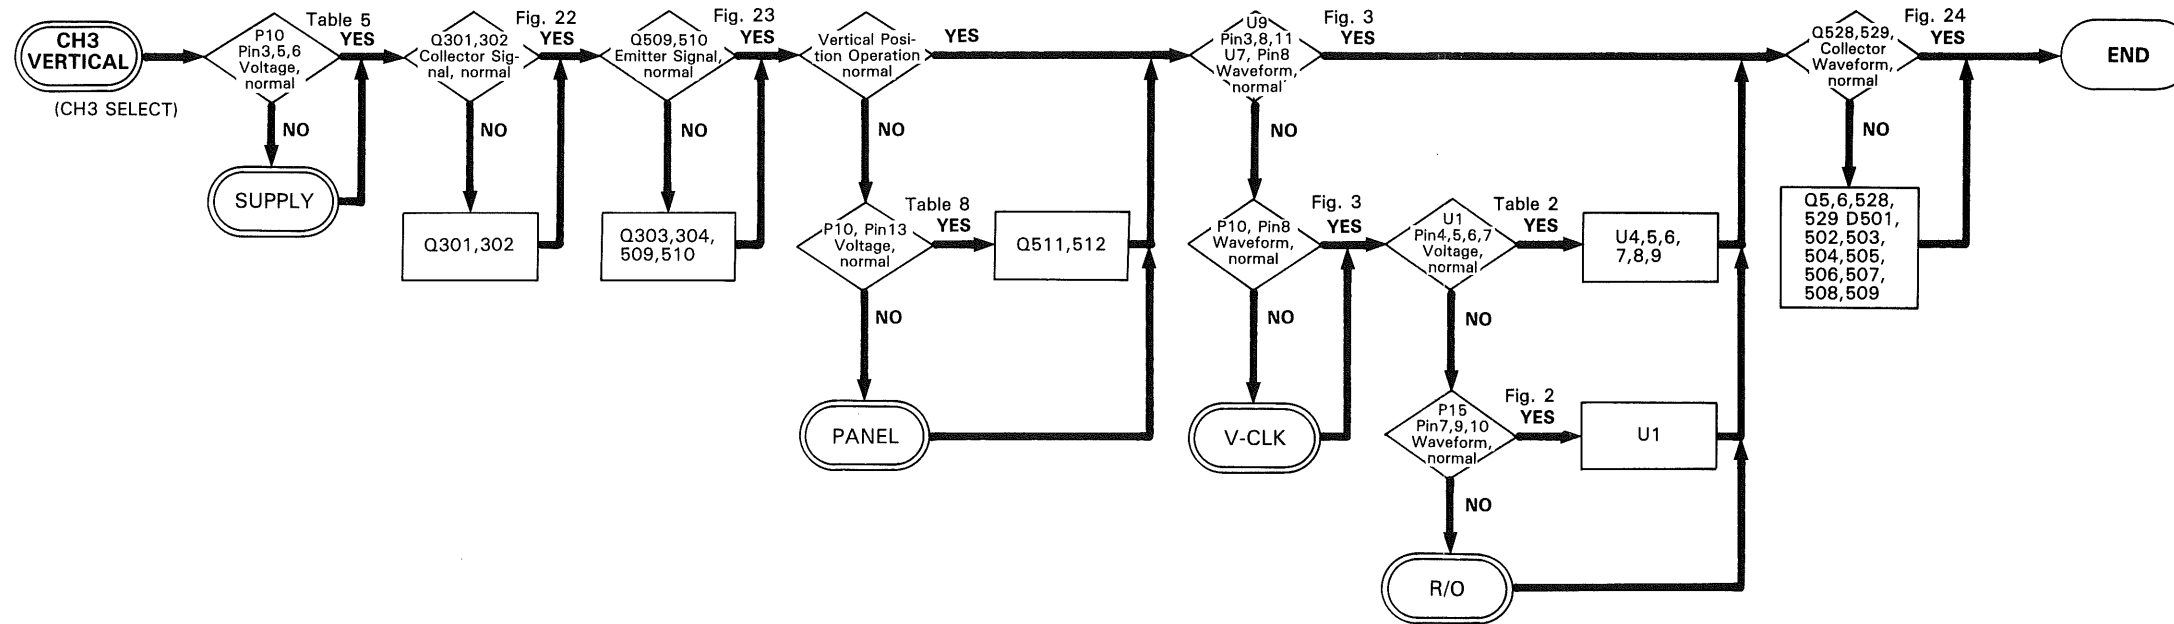


Fig. 22 DC - 5.0V

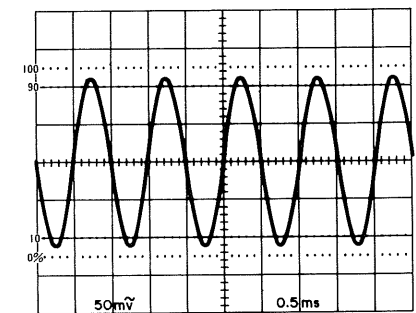


Fig. 23 DC + 5.0V

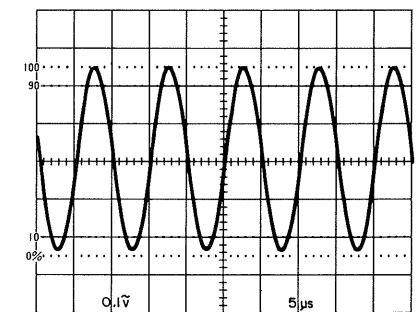
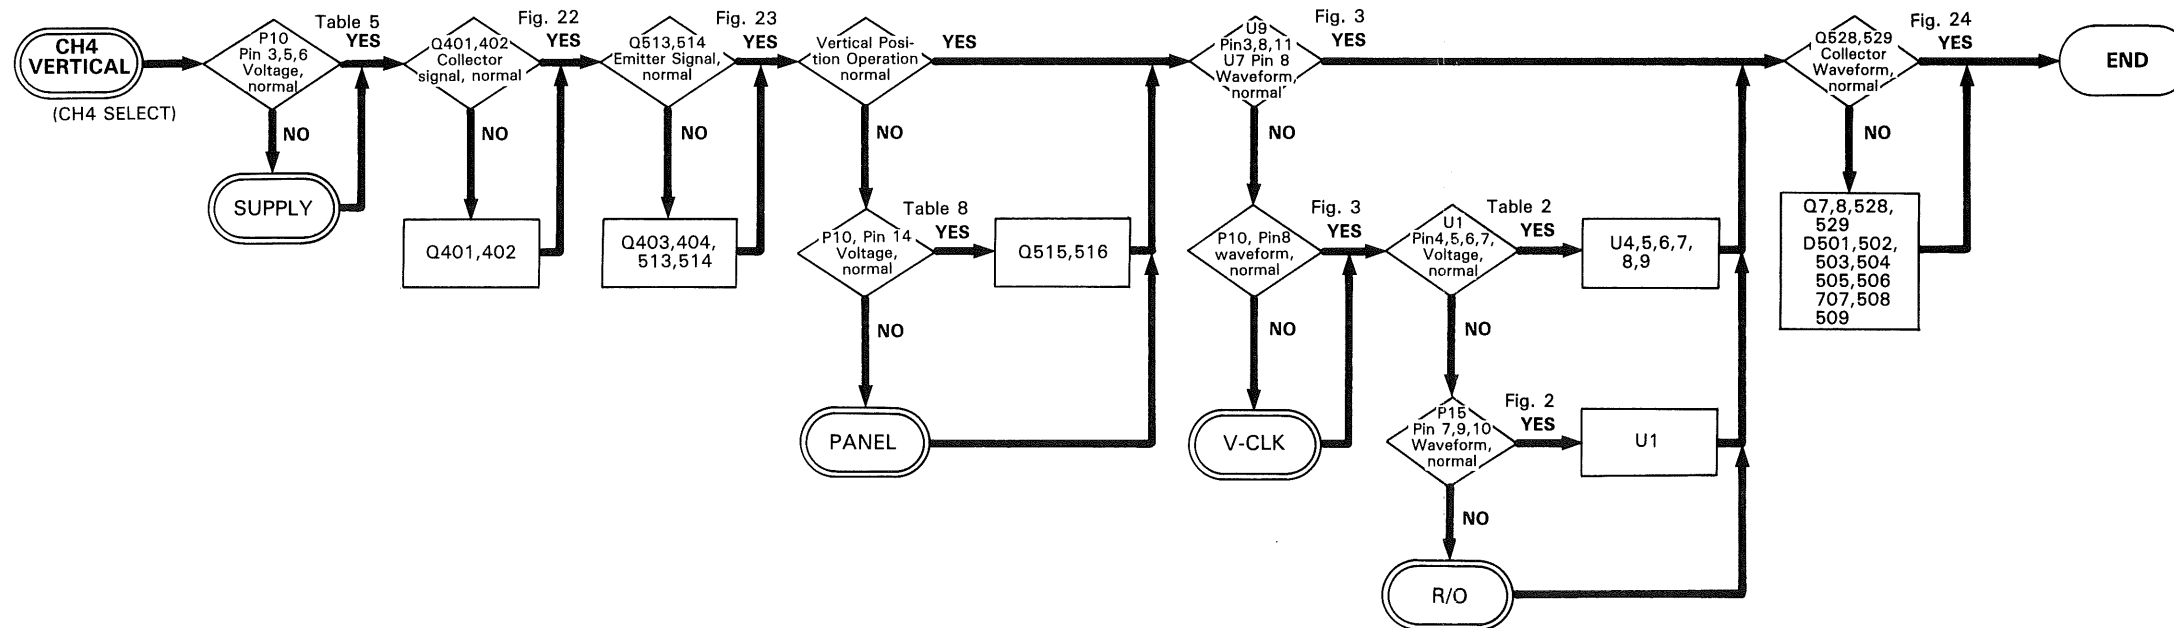


Fig. 24 DC - 5.0V
Input 0.8Vp-p Sine Wave

TROUBLESHOOTING

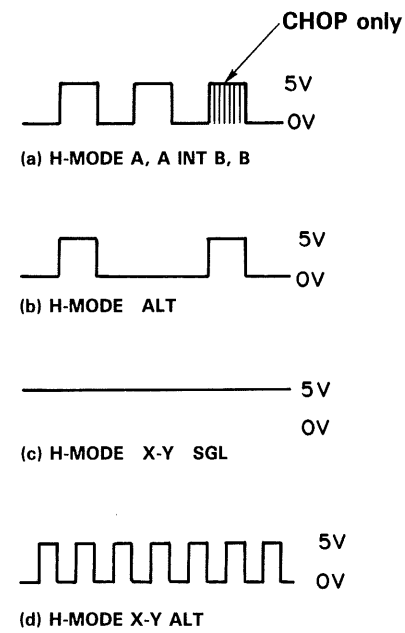
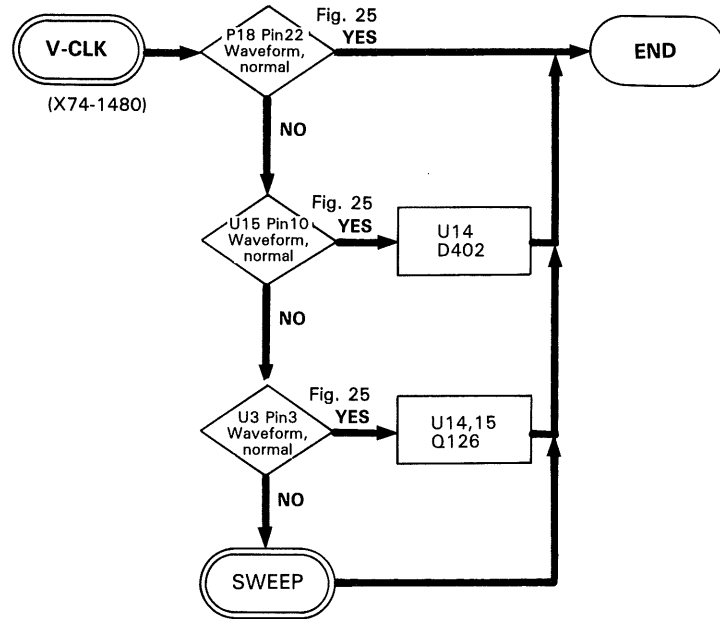


Fig. 25 Waveform

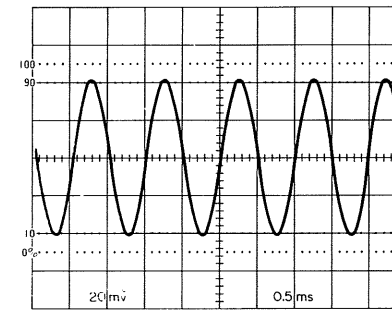


Fig. 26 DC + 5V

Table 10 INPUT Voltage


Ref. No.	Pin No.	Voltage [V]
P4	2	+5
P9	2	-10
P9	3	+10

Table 11

Volts/div	X75-1180		X73-1760			
	1/10 ATT	1/100 ATT	× 5 Amp	× 1 Amp	1/2 ATT	1/4 ATT
1mV			○		○	
2			○			
5				○		
10				○		
20				○		
50				○		
0.1V	○			○	○	
0.2	○			○	○	
0.5				○	○	
1.0				○	○	
2.0				○	○	
5.0	○			○		

Table 12 U1, U2 FUNCTION

Pin No.	U1	U2
1	CH2 GND	
2	CH2 1/10	CH3 1/5
3	CH2 1/100	CH4 1/5
4	CH1 AC/DC	CH2 INV
5	CH1 GND	
6	CH1 1/10	
7	CH1 1/100	
15	CH2 AC/DC	

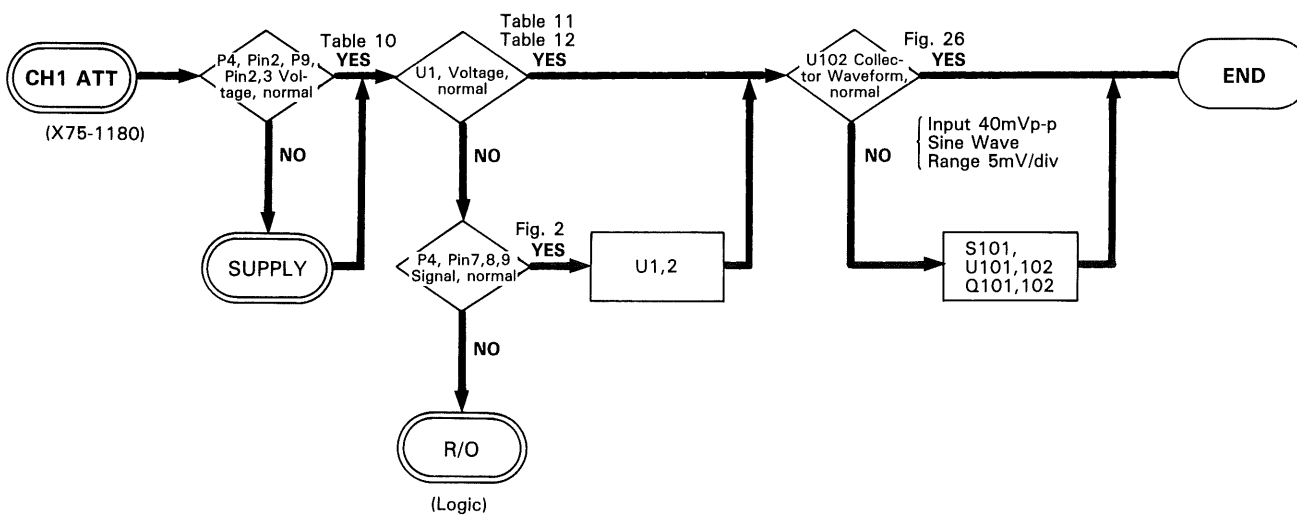

TROUBLESHOOTING

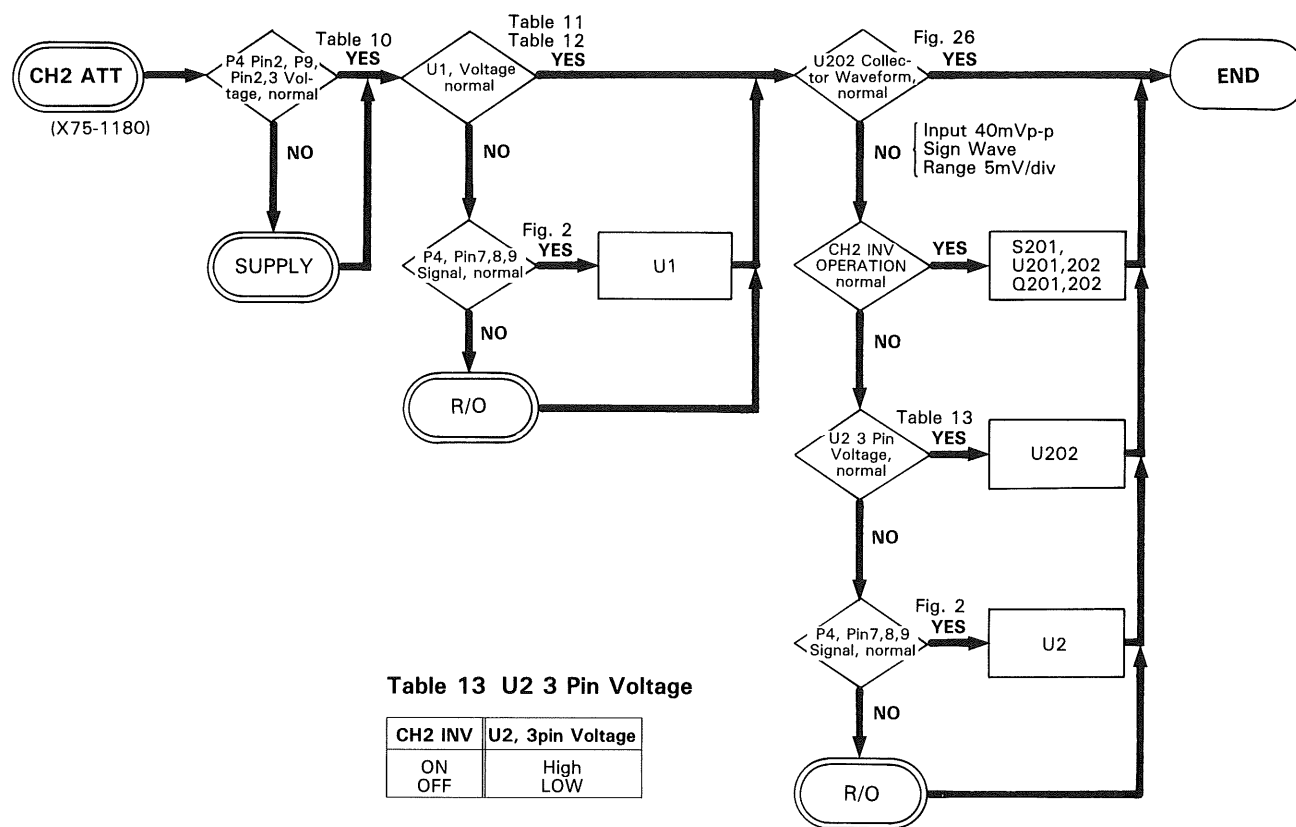


Table 13 U2 3 Pin Voltage

CH2 INV	U2, 3pin Voltage
ON	High
OFF	LOW

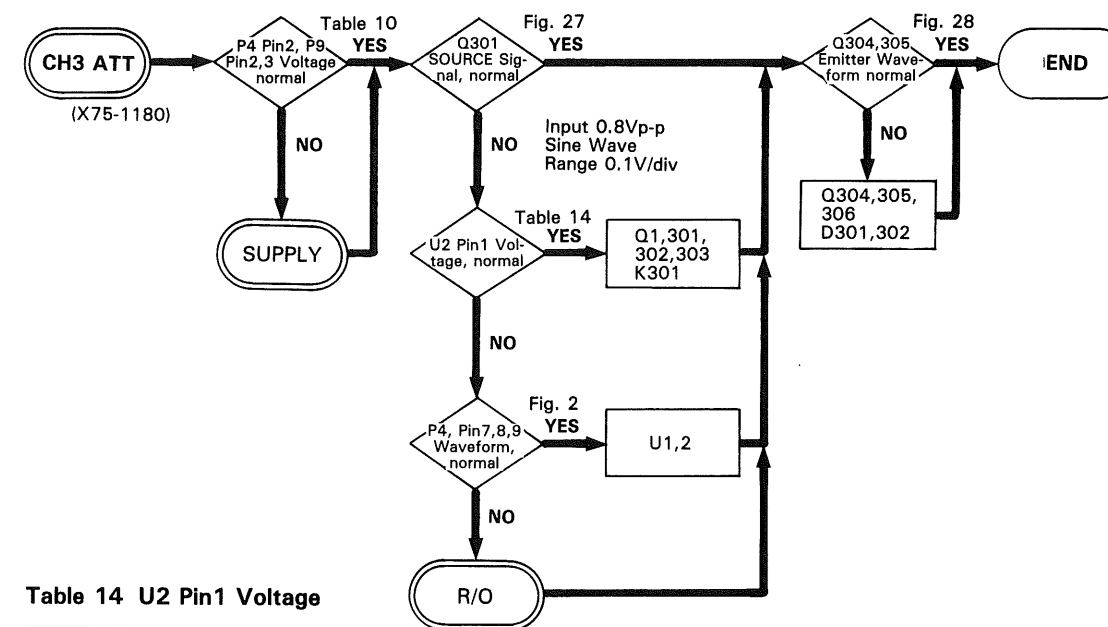


Table 14 U2 Pin1 Voltage

CH3 RANGE	U2 Pin 1
0.5 V/div	High
0.1 V/div	LOW

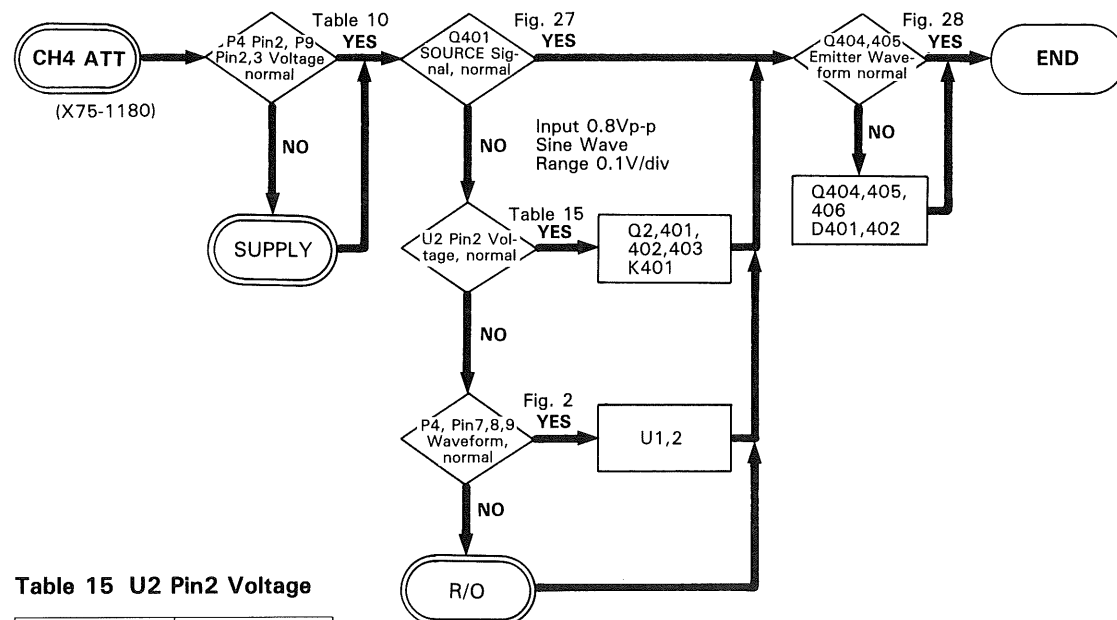


Table 15 U2 Pin2 Voltage

CH4 RANGE	U2 Pin 2
0.5 V/div	High
0.1 V/div	LOW

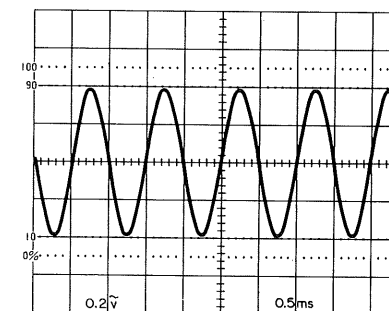


Fig. 27 DC - 0.27 V

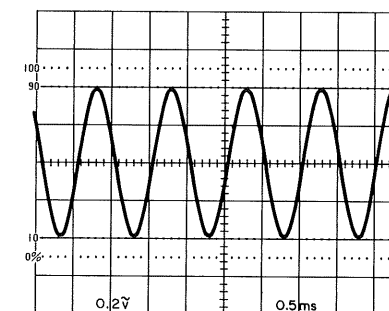


Fig. 28 DC - 1.0 V

TROUBLESHOOTING

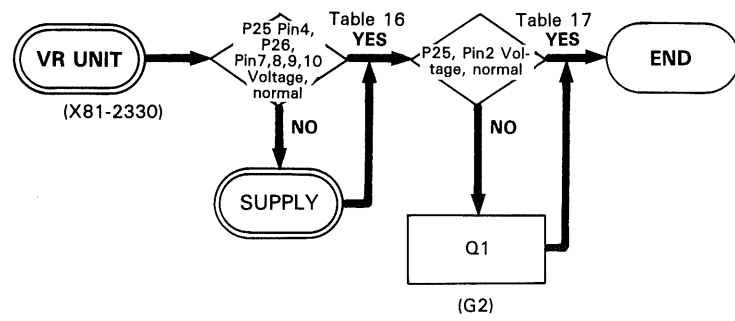


Table 16 Voltage

P25 Pin No.	Voltage [V]
4	+ 140
P26 Pin No.	Voltage [V]
7	+ 10
8	- 10
9	+ 13
10	- 13

Table 17 Voltage

P25 Pin 2	Voltage [V]
	+ 20

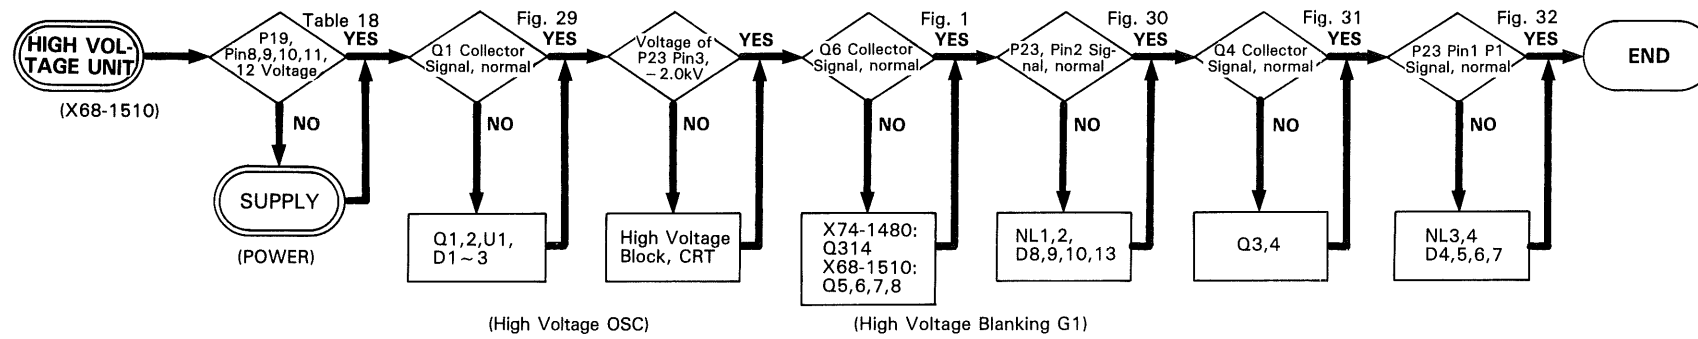


Table 18

P19 Pin No.	Voltage [V]
8	+ 10
9	- 10
10	+ 13
11	- 13
12	+ 140

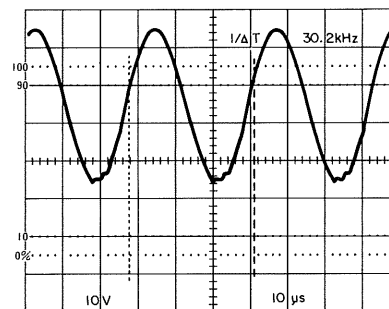


Fig. 29 Q1, Collector Waveform



Fig. 30 G1, P23, Pin2





Fig. 31 Q4, Collector Signal
A SWEEP TIME = B SWEEP TIME
DELAY TIME MIN




Fig. 32 P1, P23, Pin1 Signal

TROUBLESHOOTING

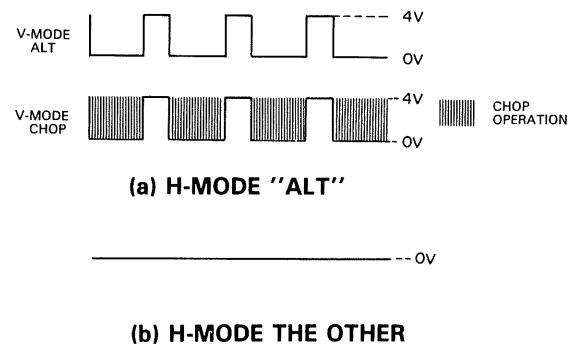


Fig. 37 U7, Pin9 Signal

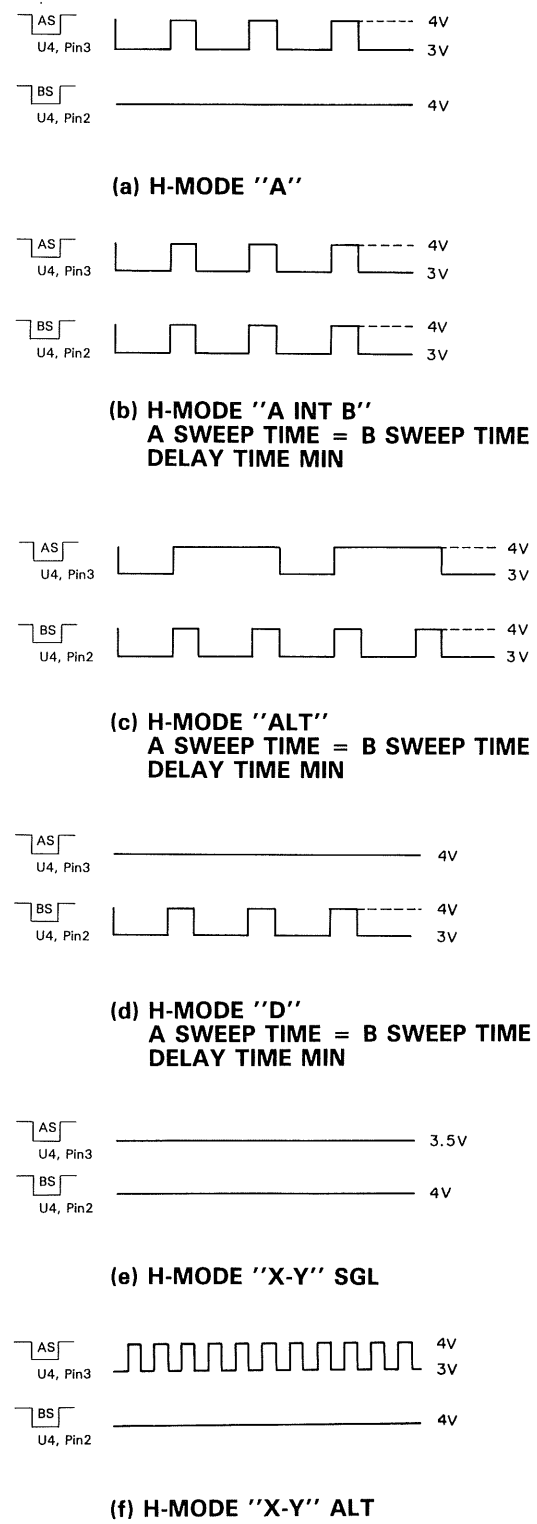


Fig. 38 U4, Pin2,3 Signal

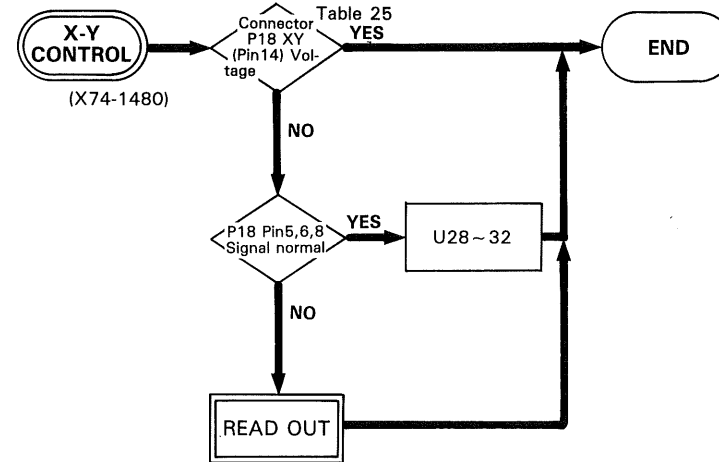


Table 25 X-Y Signal

X-Y	P18 Pin14 X-Y
ON	L
OFF	H

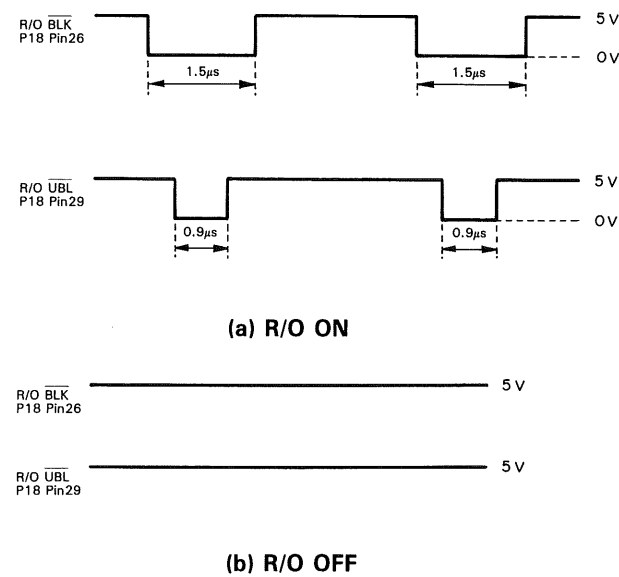


Fig. 39 P18 Pin26, 29, R/O BLK, R/O UBL Signal

TROUBLESHOOTING

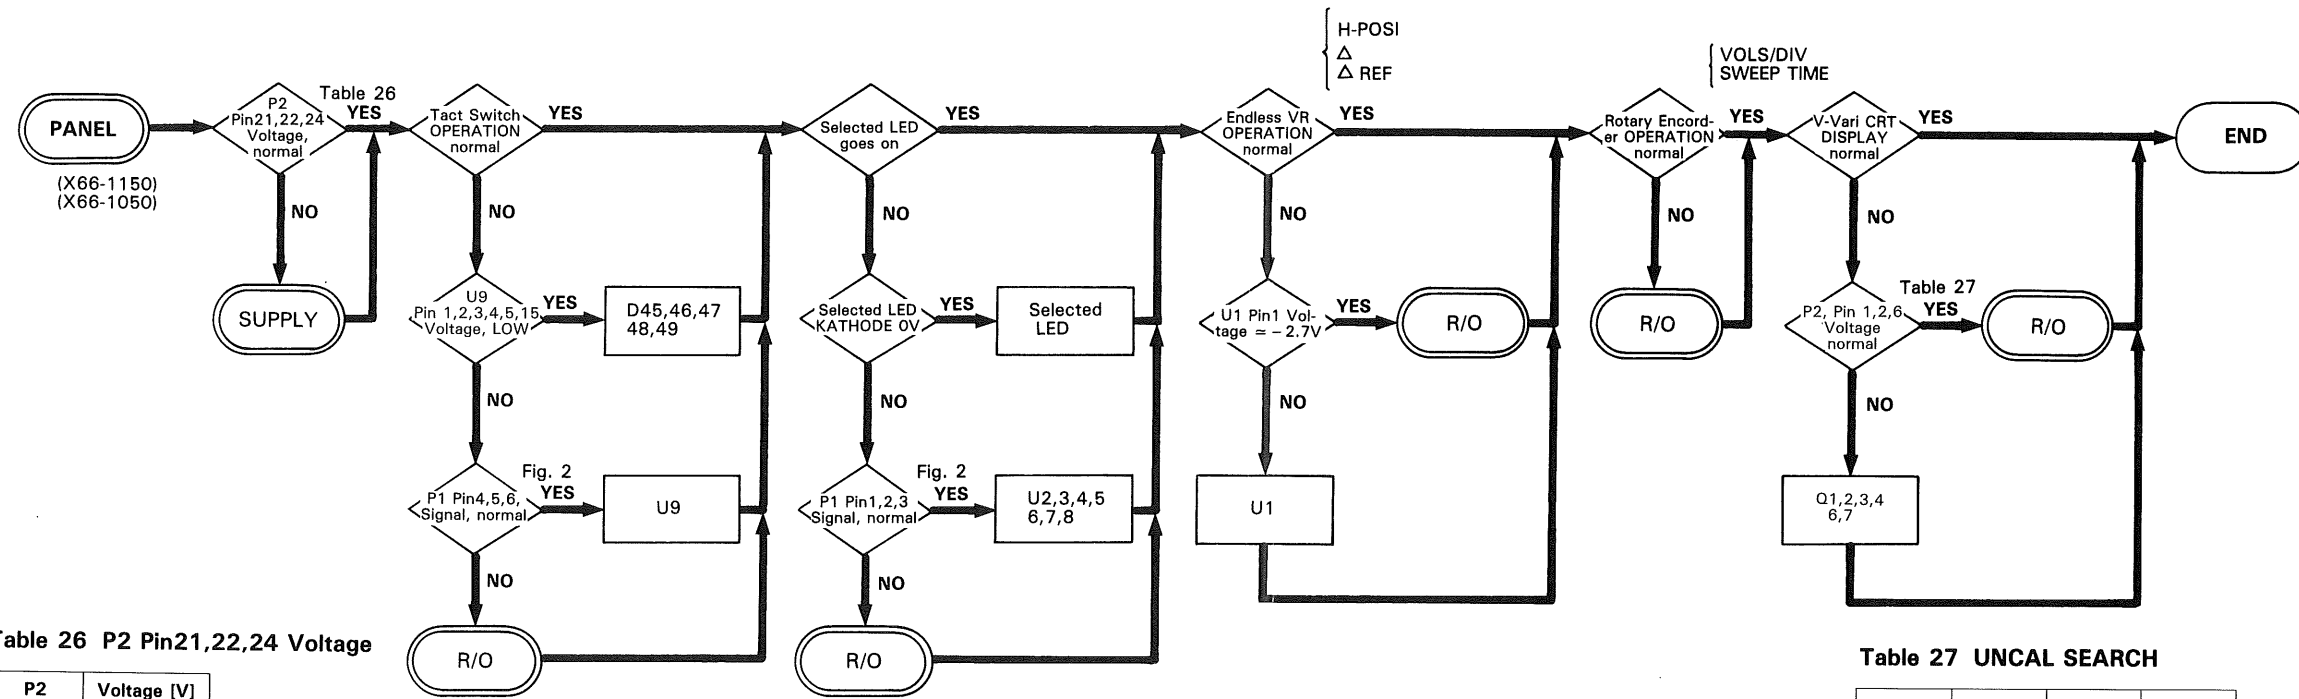




Table 26 P2 Pin21,22,24 Voltage

P2	Voltage [V]
Pin 21	+10
22	-10
24	+5



Table 27 UNCAL SEARCH

	CH1 P2, Pin1	CH2 P2, Pin2	H.Vari P2, Pin6
CAL	+0.12 [V]	+0.12 [V]	+4.85 [V]
UNCAL	+4.85 [V]	+4.85 [V]	+0.12 [V]



TROUBLESHOOTING

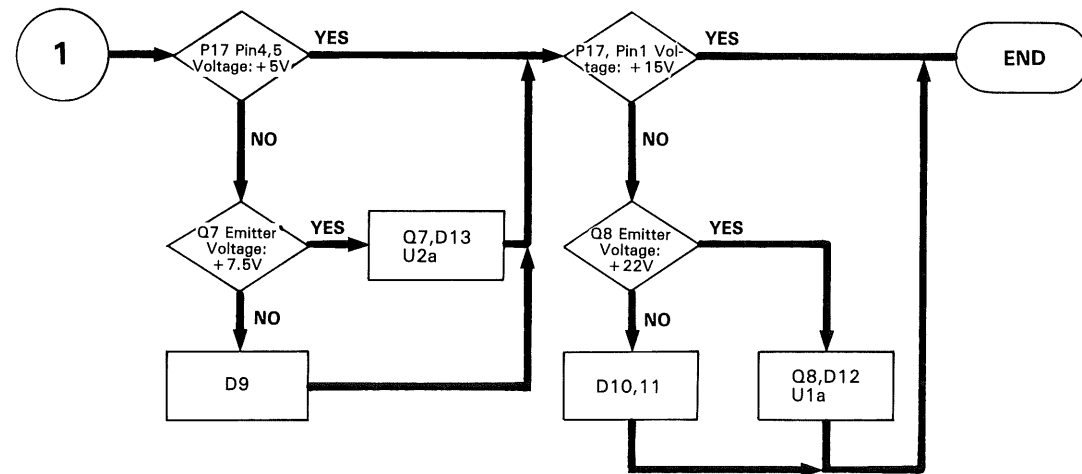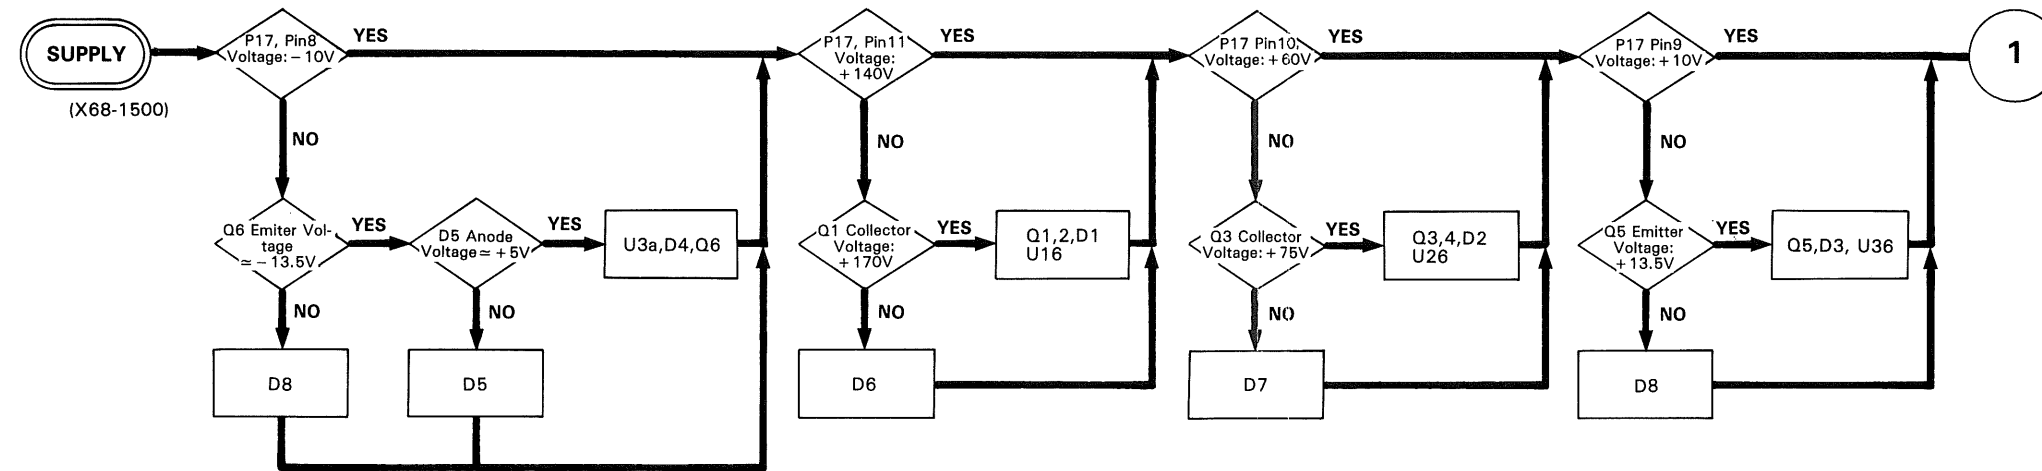



TROUBLESHOOTING

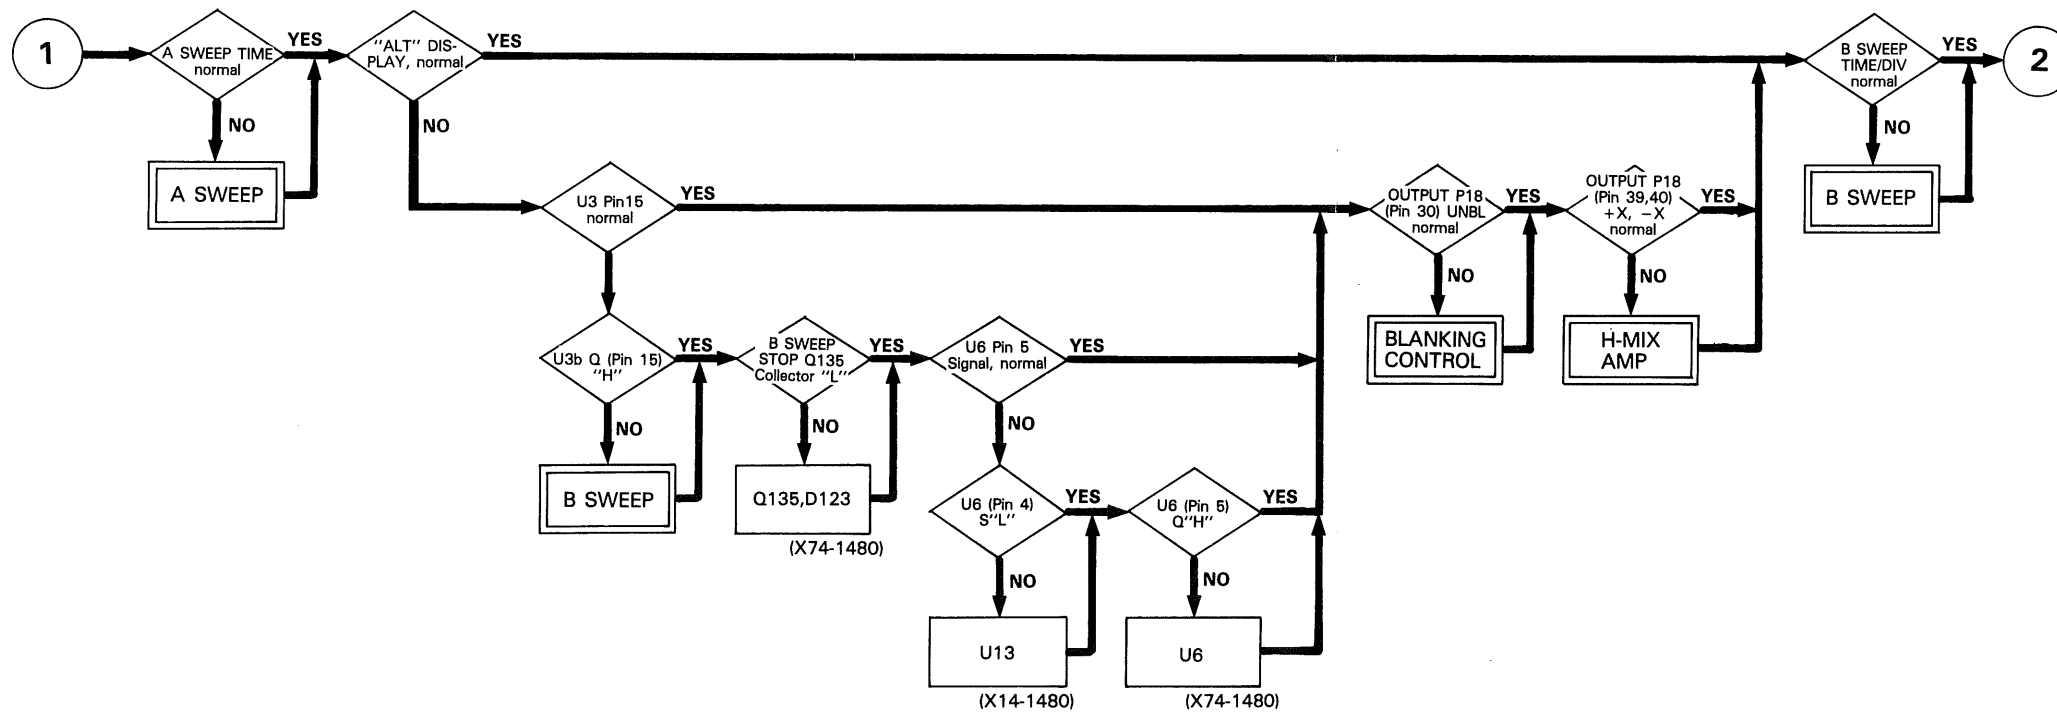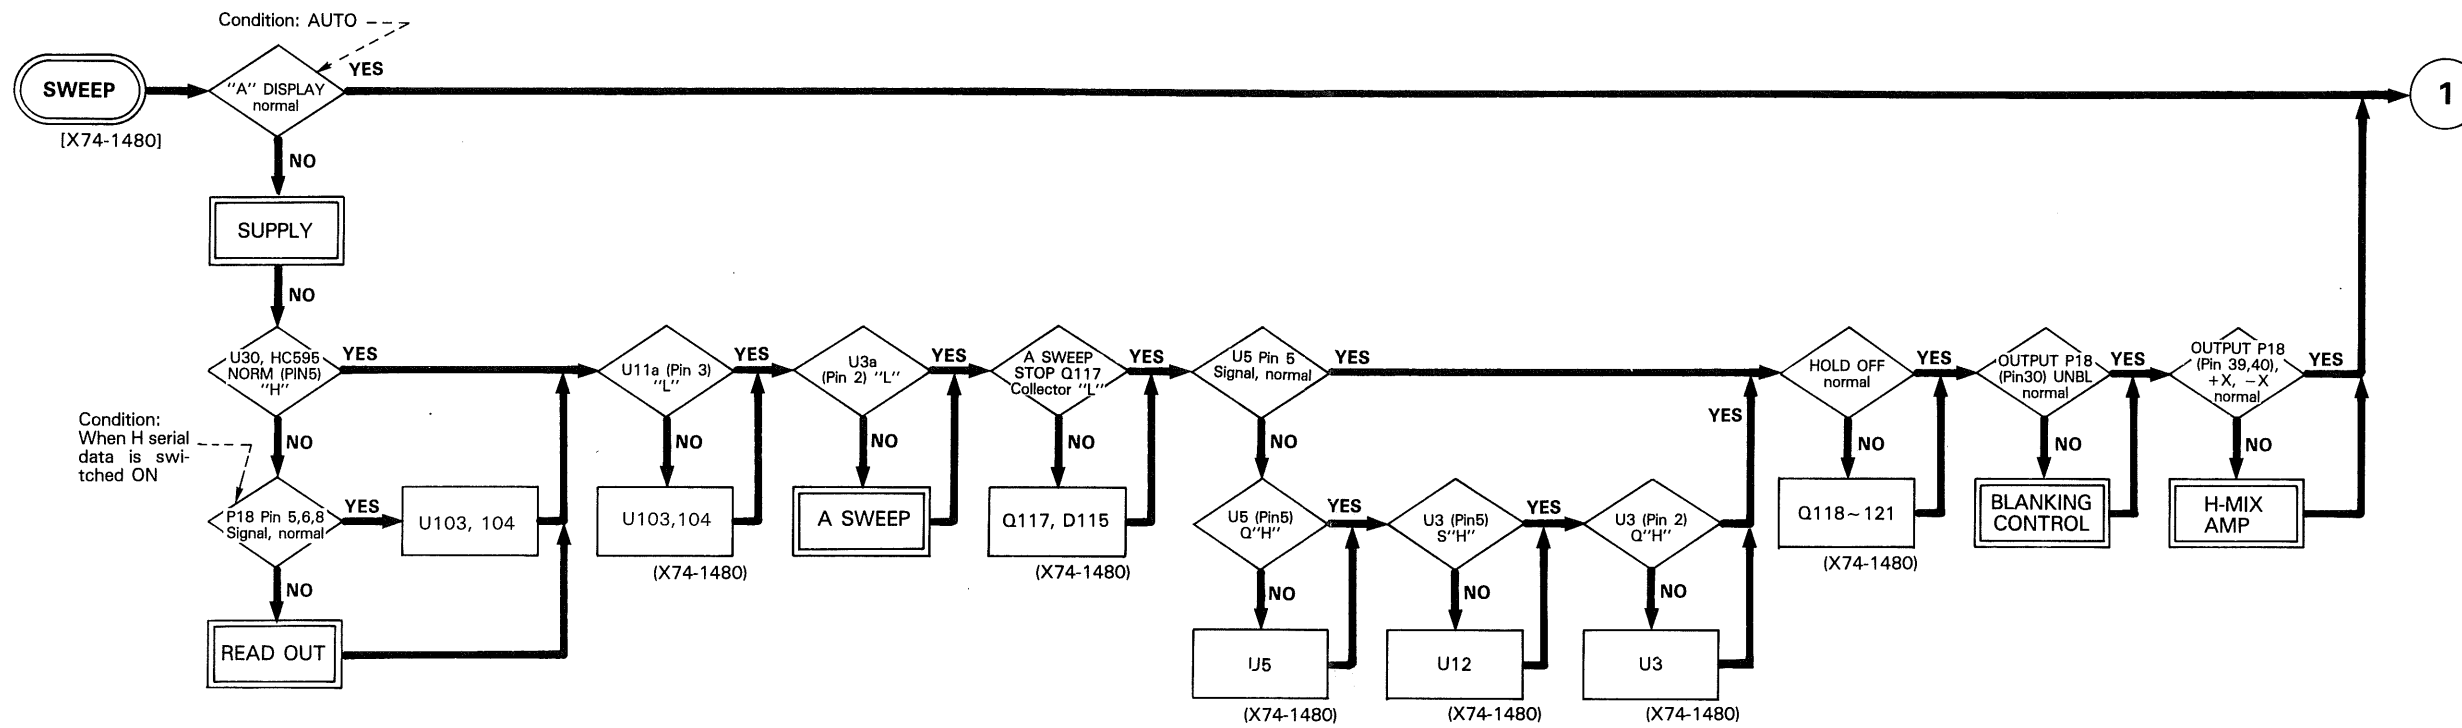

TROUBLESHOOTING

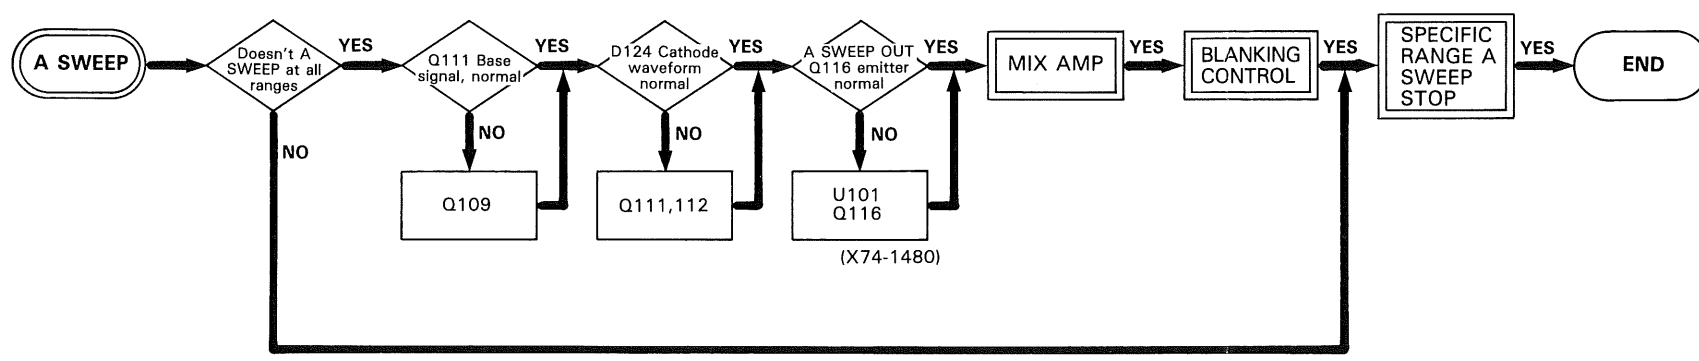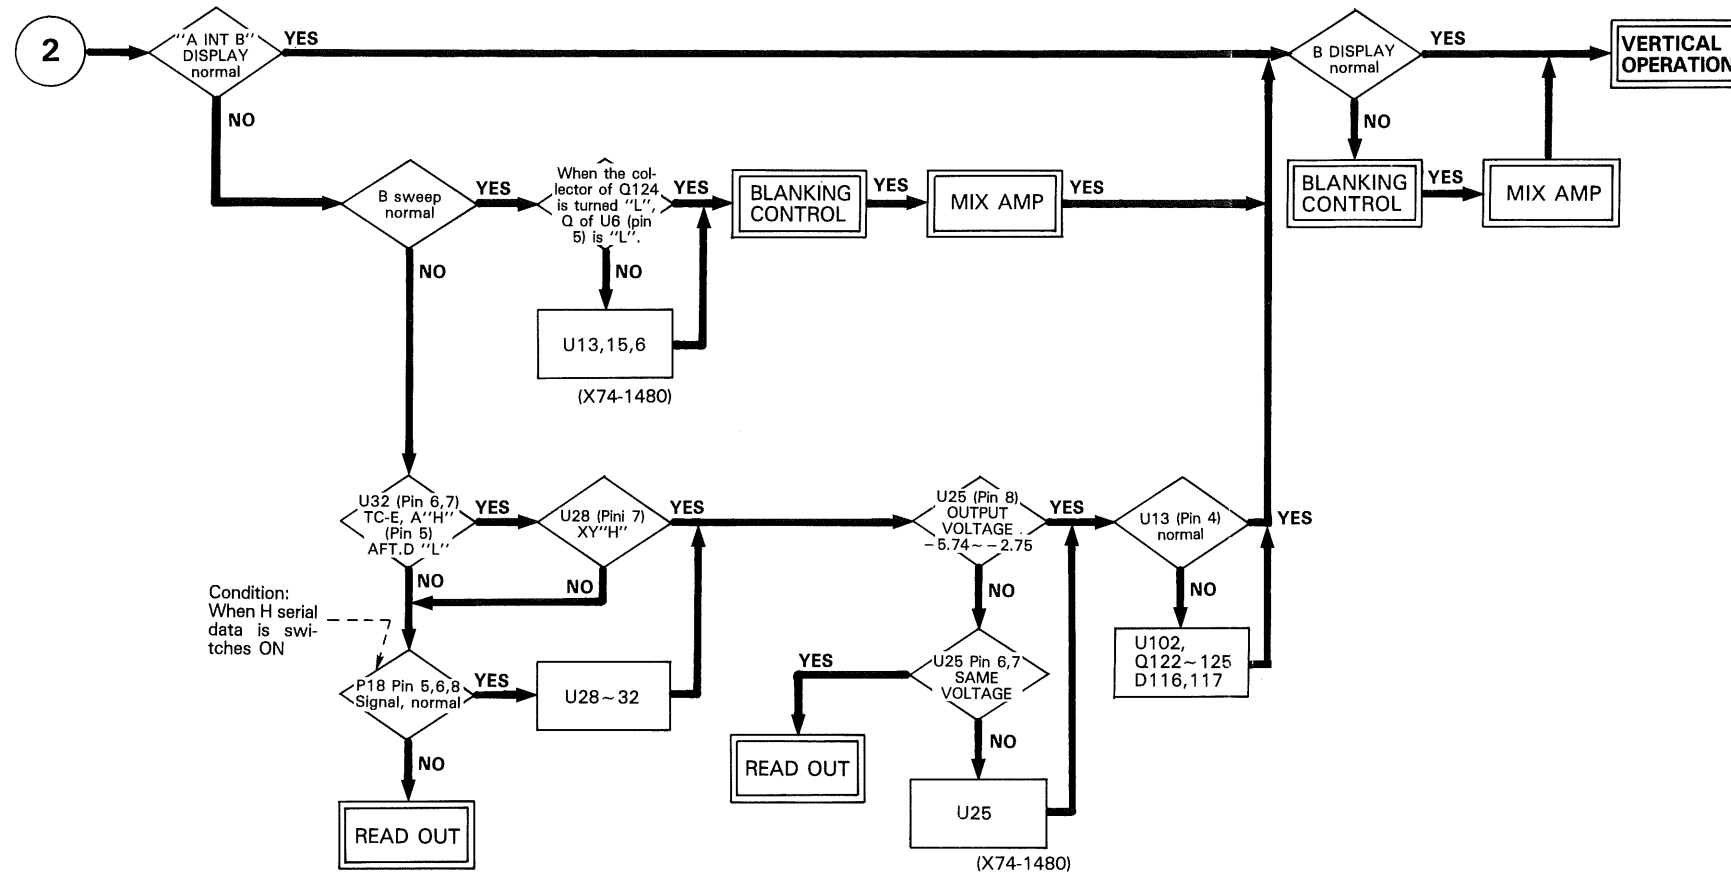

TROUBLESHOOTING

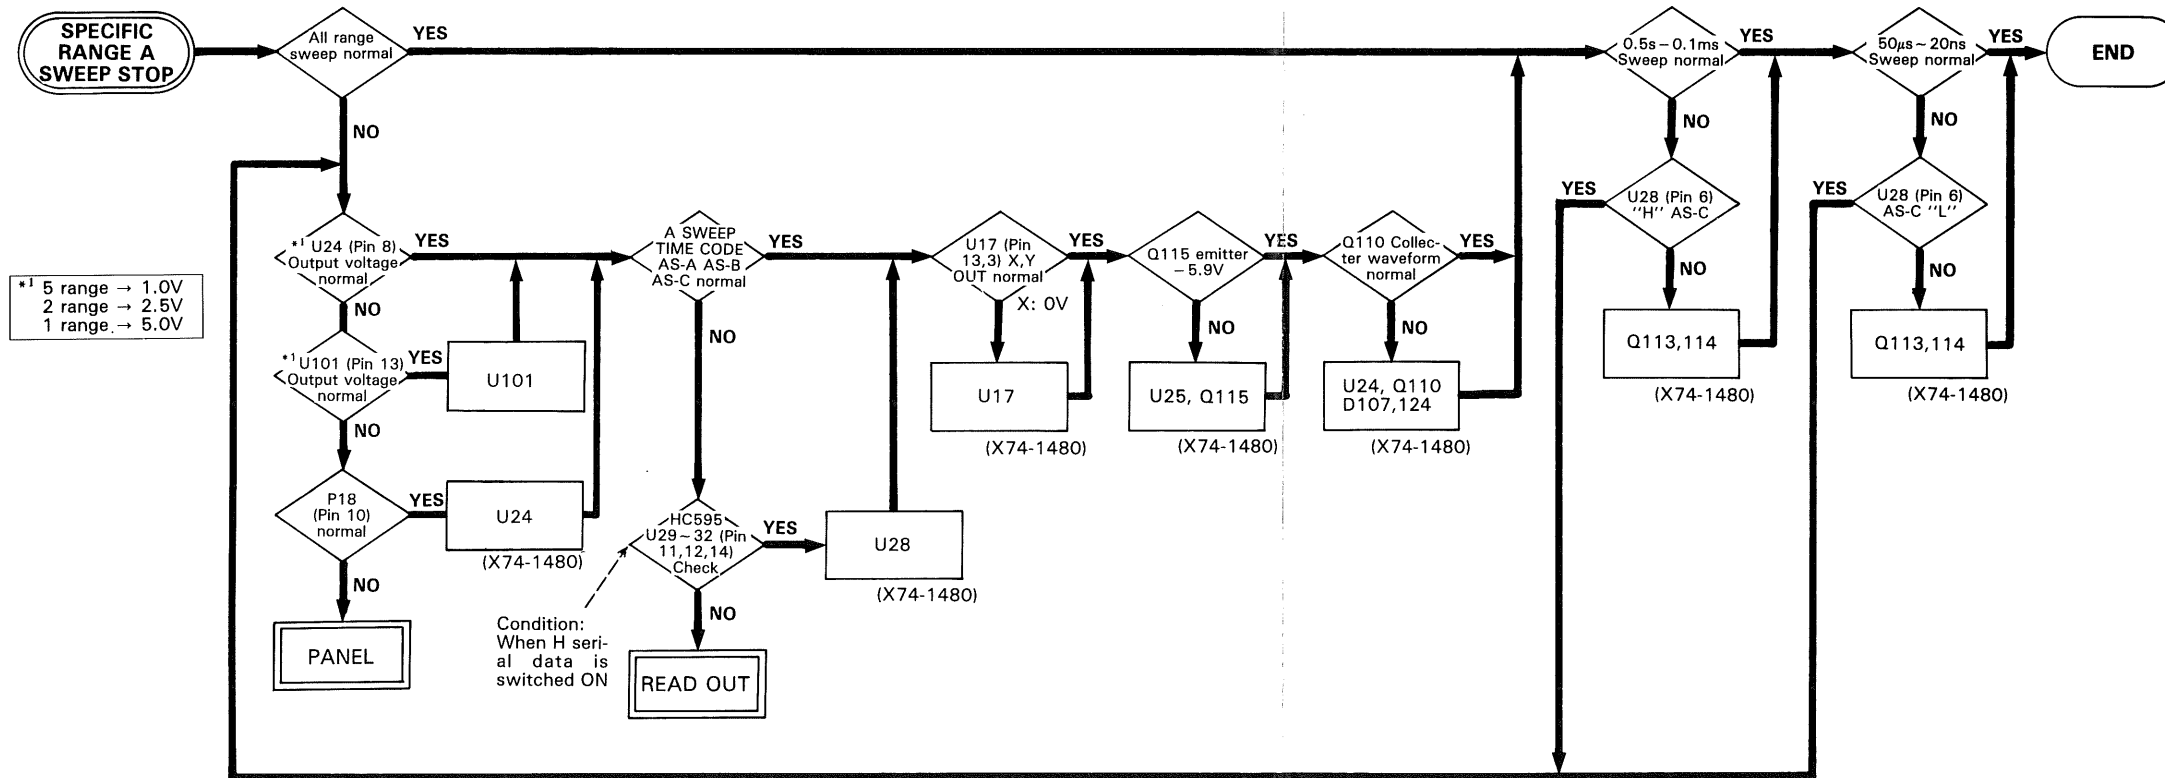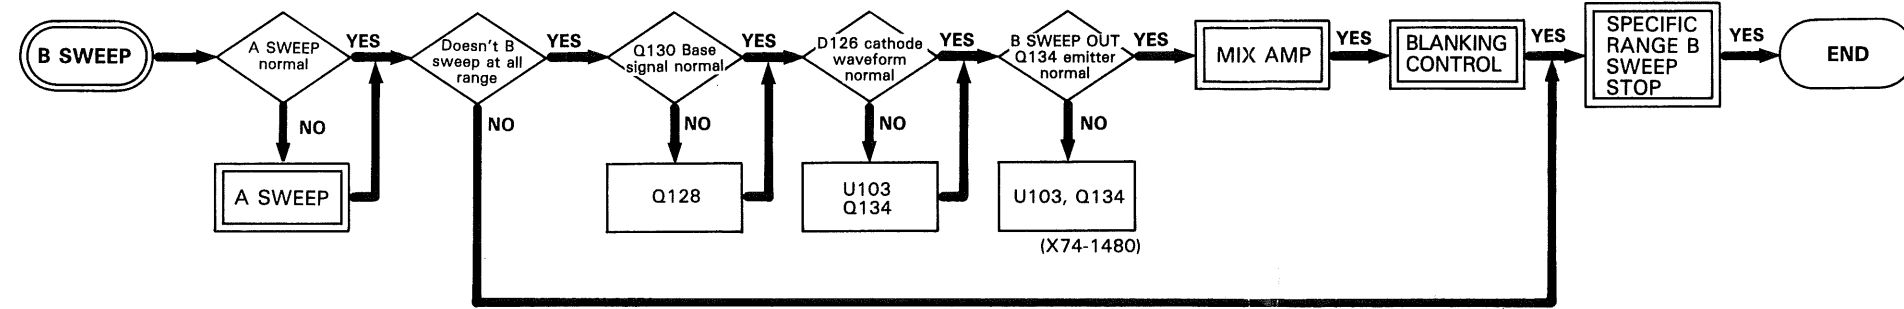

TROUBLESHOOTING



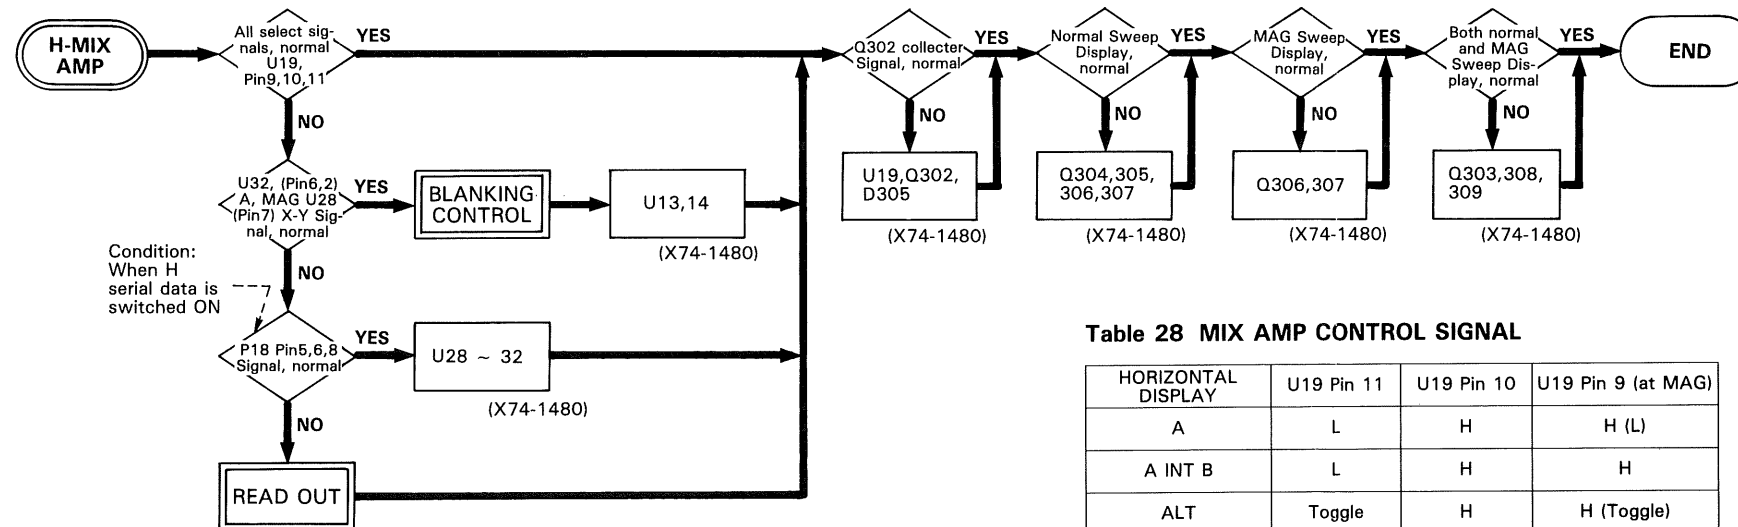



Table 28 MIX AMP CONTROL SIGNAL

HORIZONTAL DISPLAY	U19 Pin 11	U19 Pin 10	U19 Pin 9 (at MAG)
A	L	H	H (L)
A INT B	L	H	H
ALT	Toggle	H	H (Toggle)
B	H	H	H (L)
X-Y	L	L	H


TROUBLESHOOTING

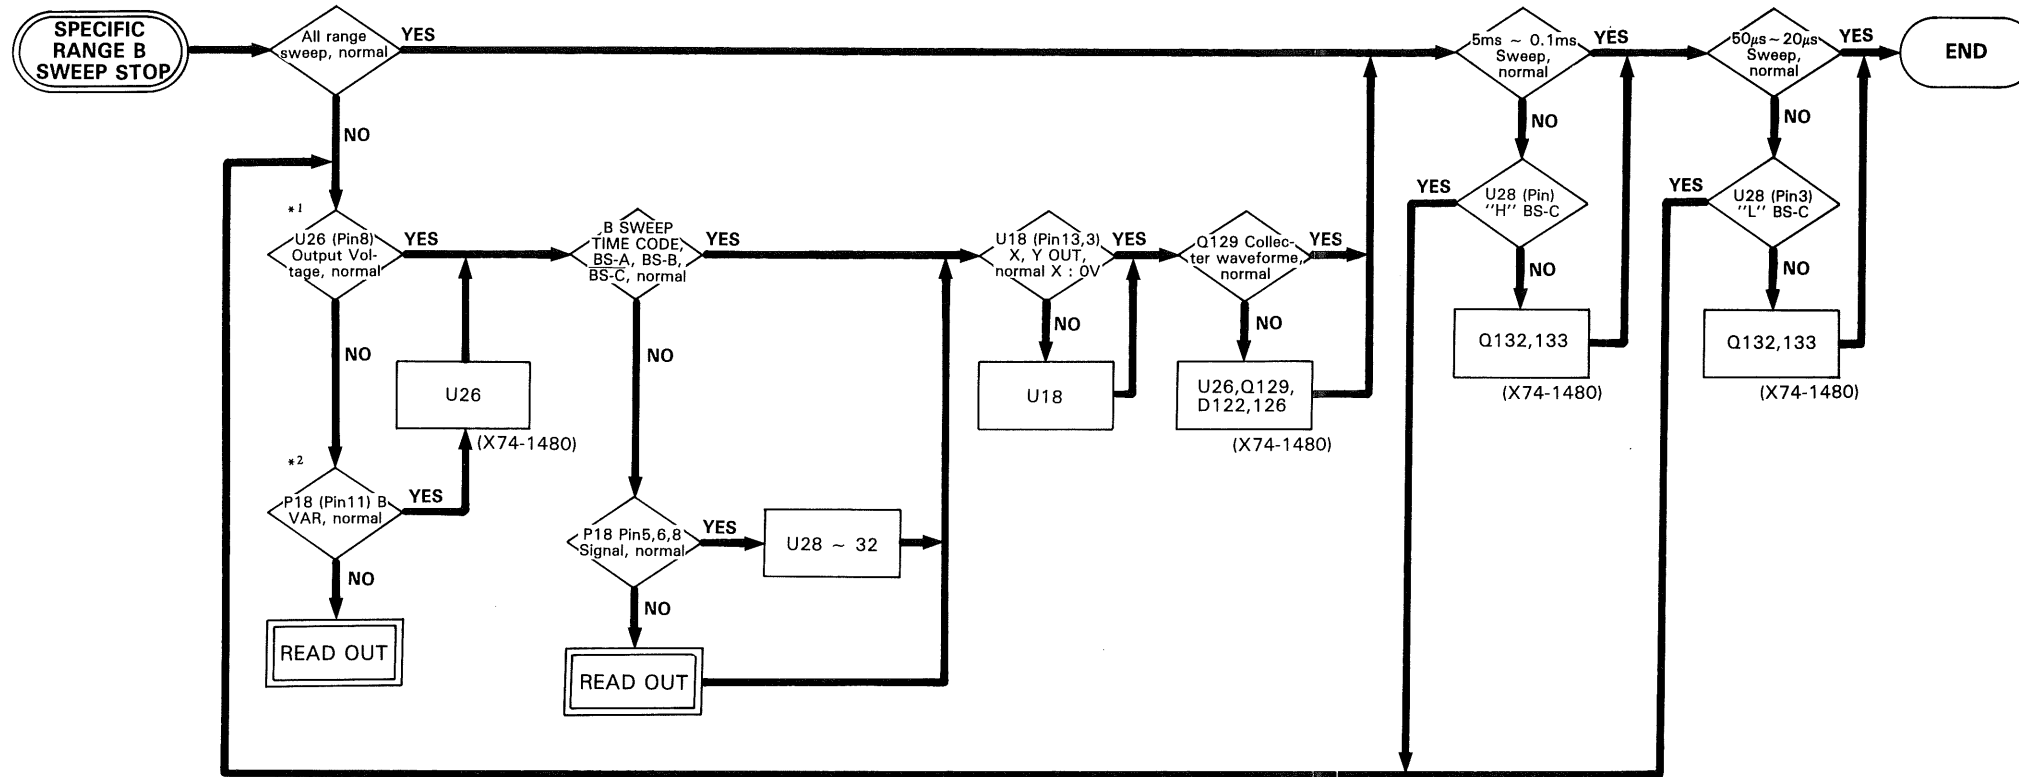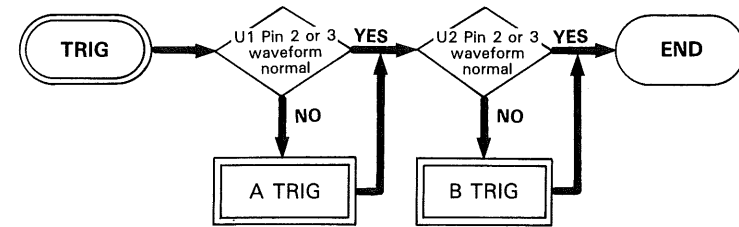


TROUBLESHOOTING

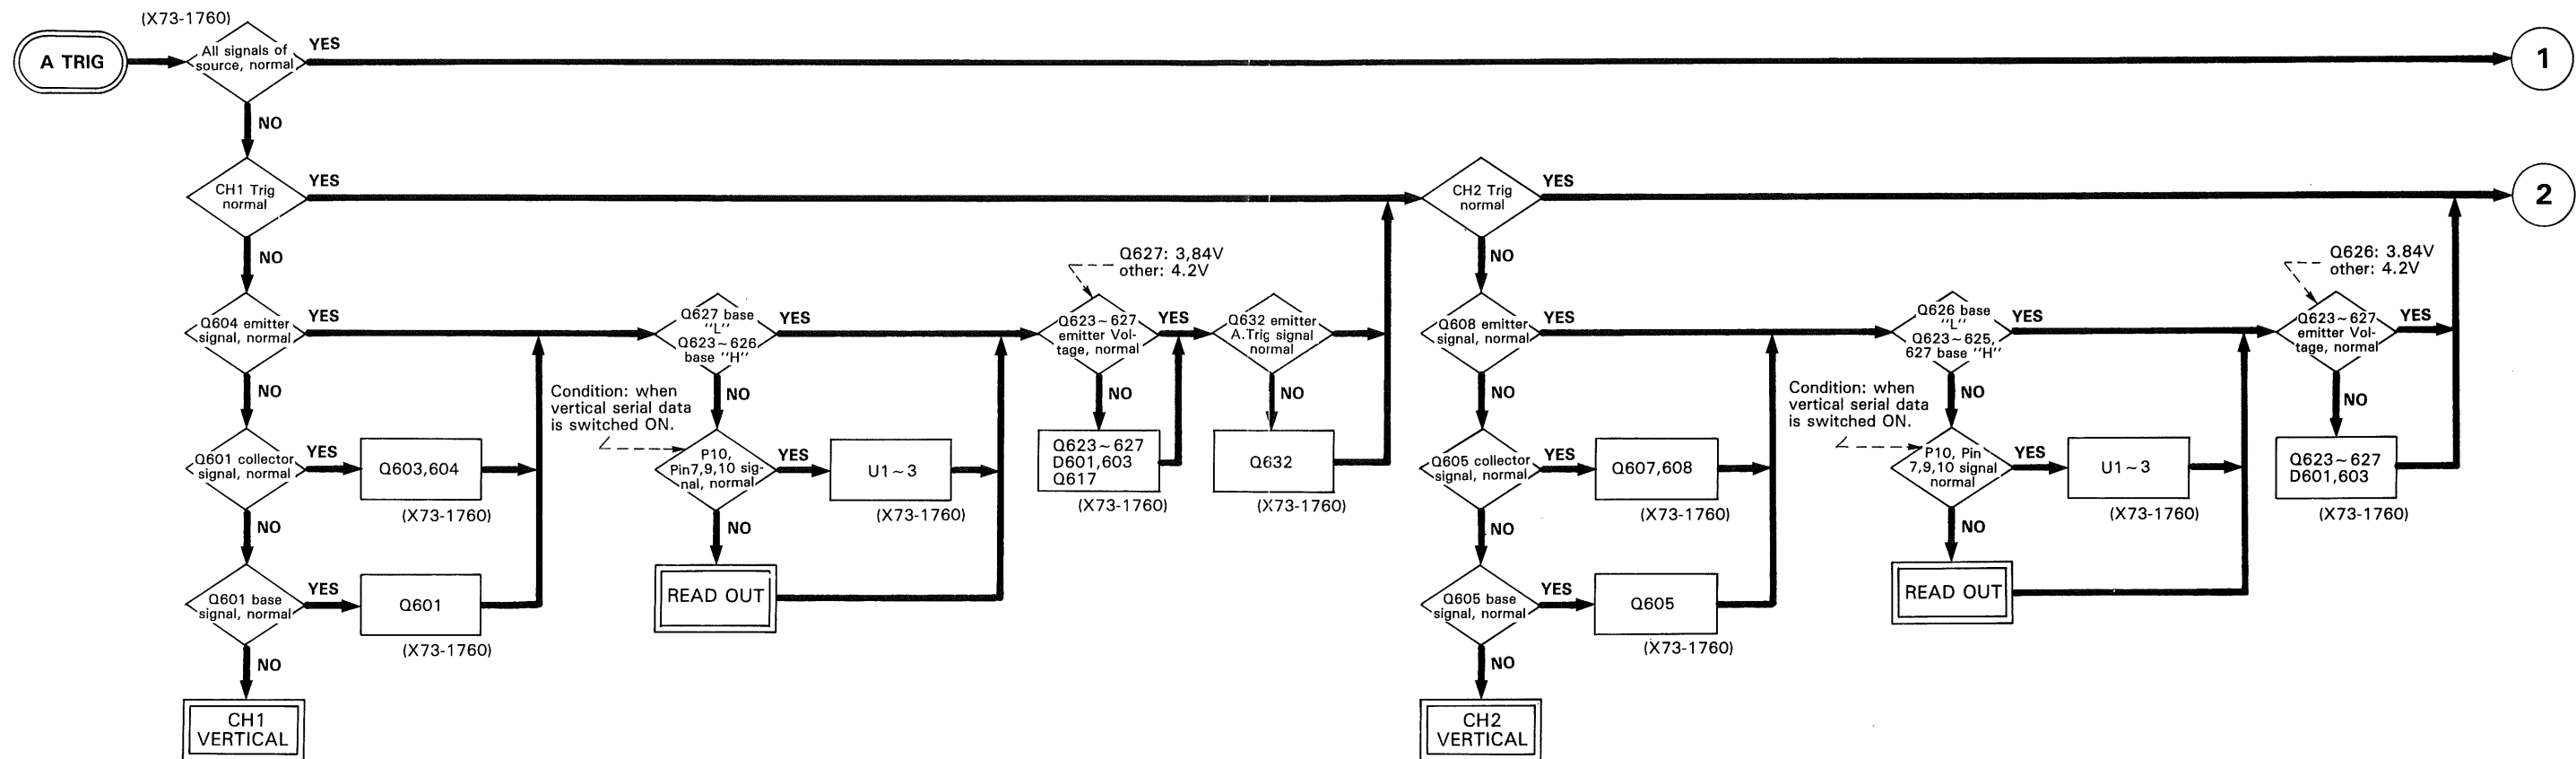



1 ————— 1

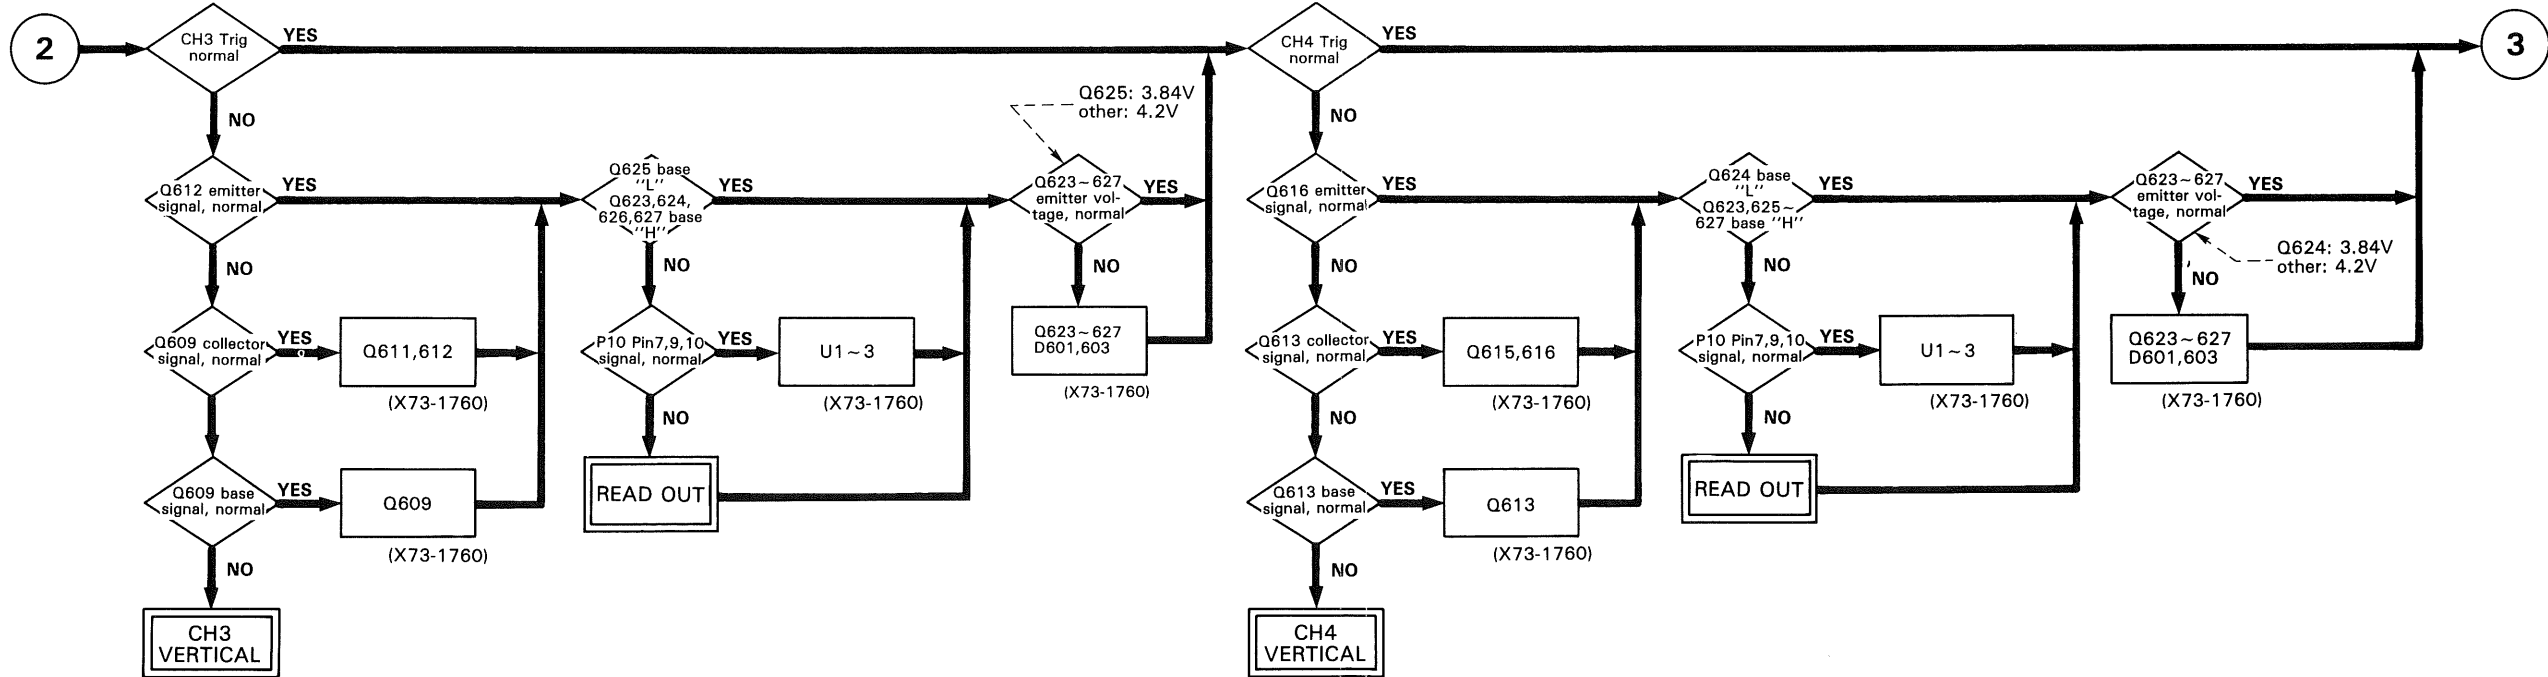

TROUBLESHOOTING

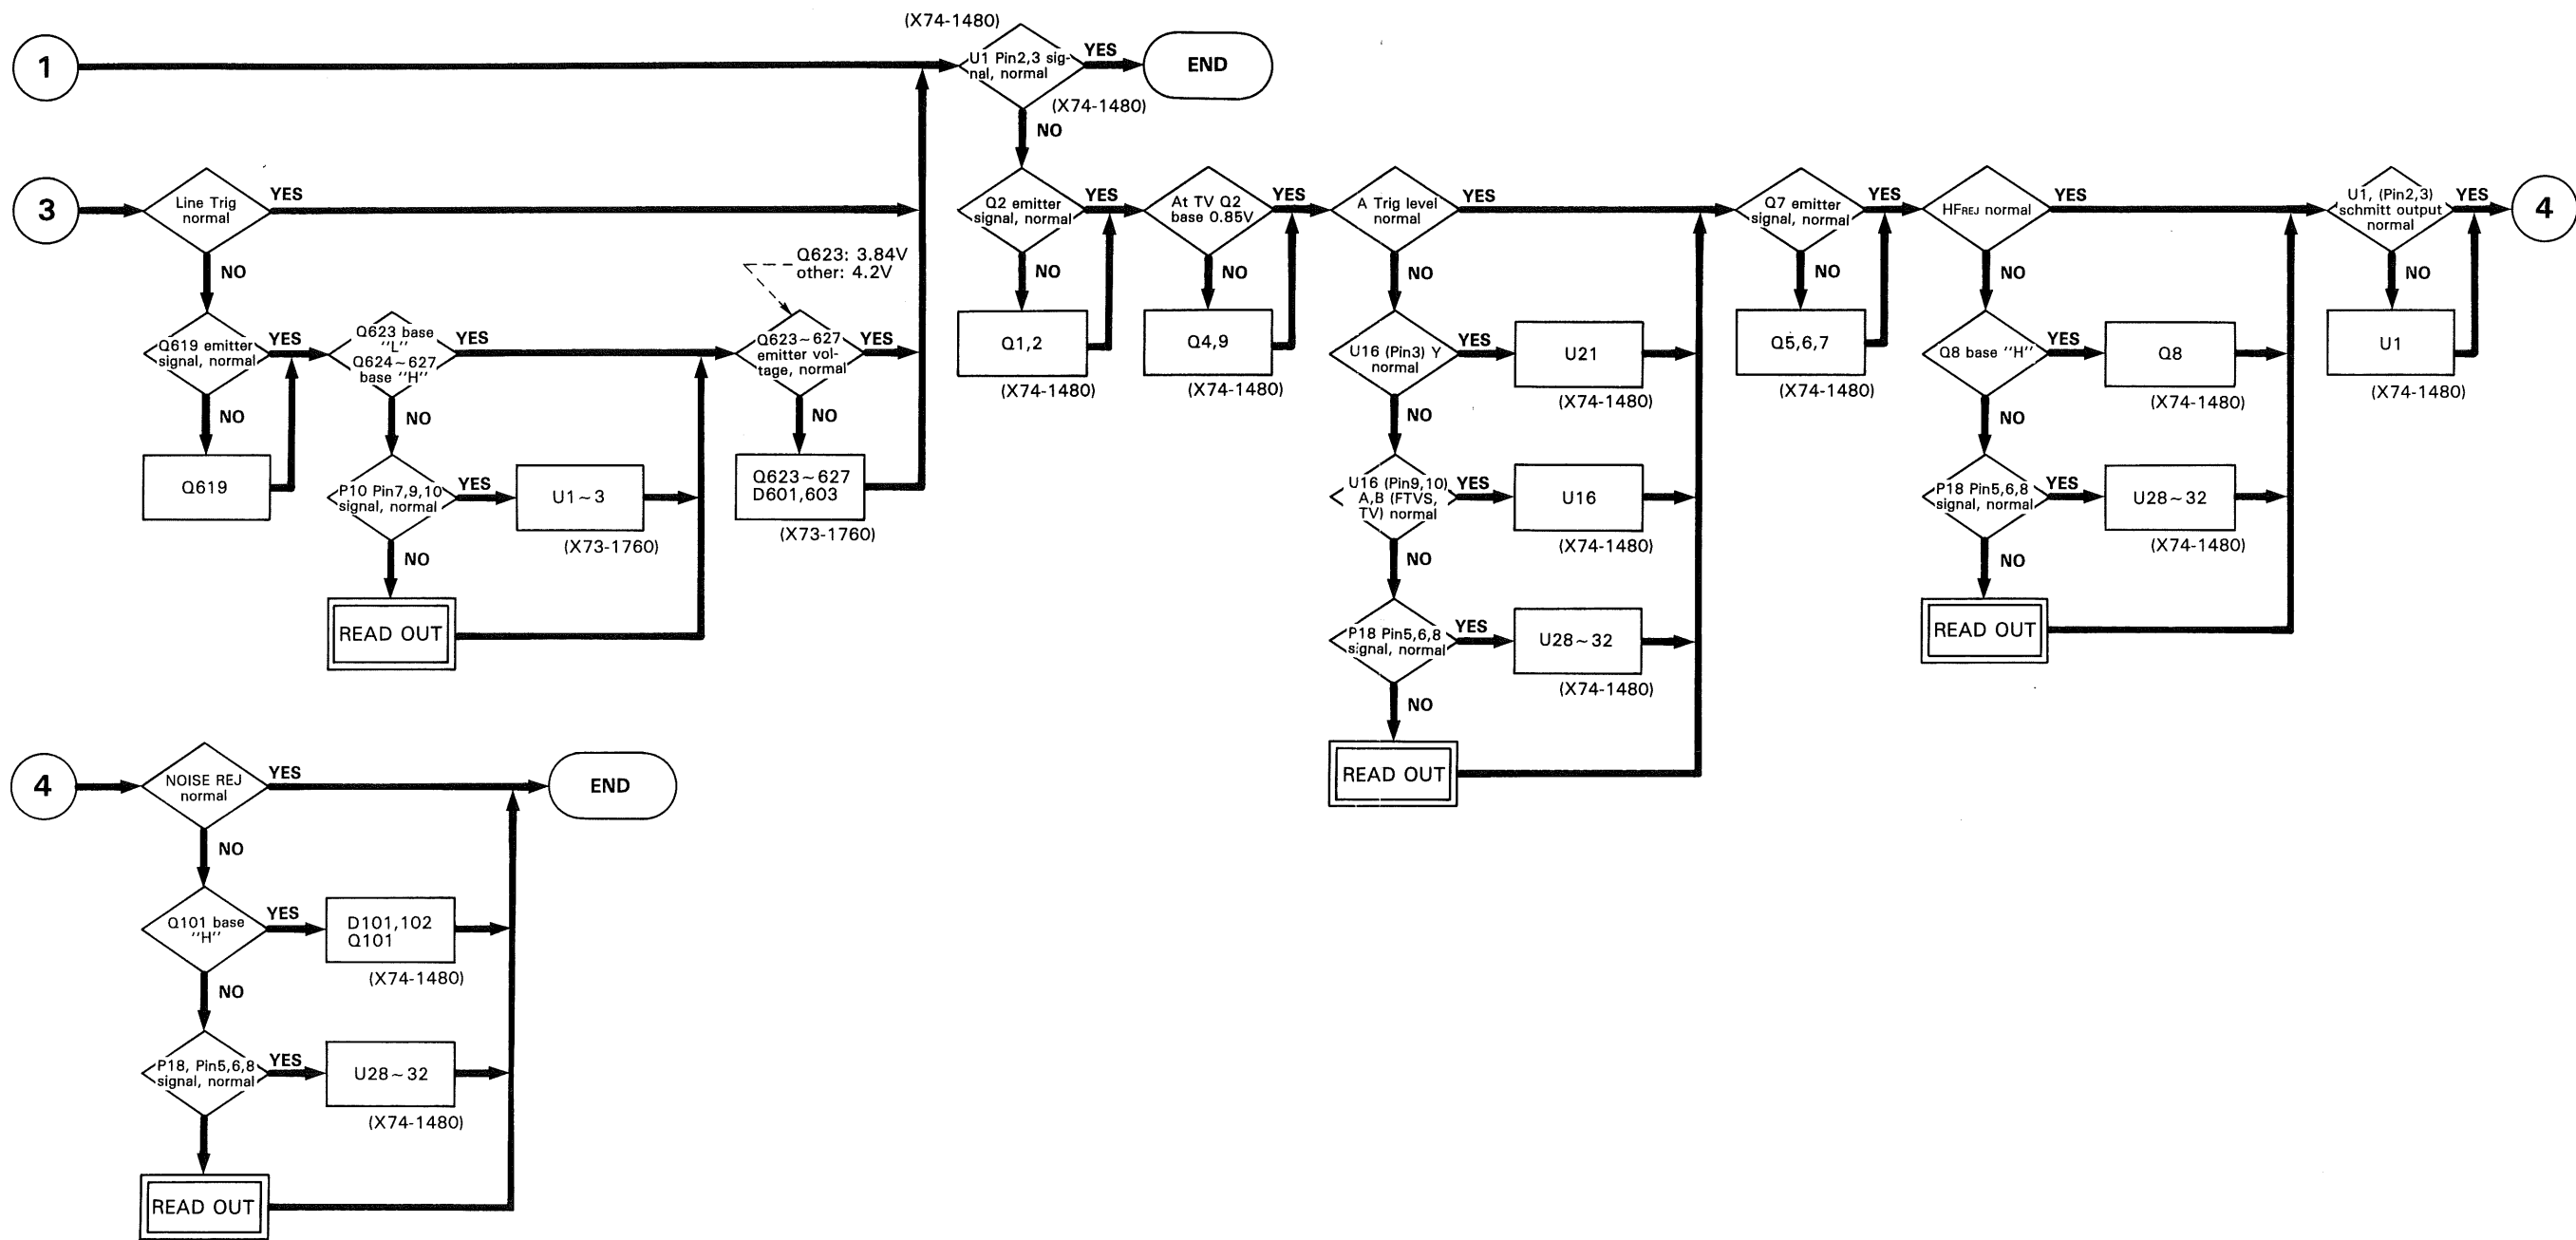

TROUBLESHOOTING

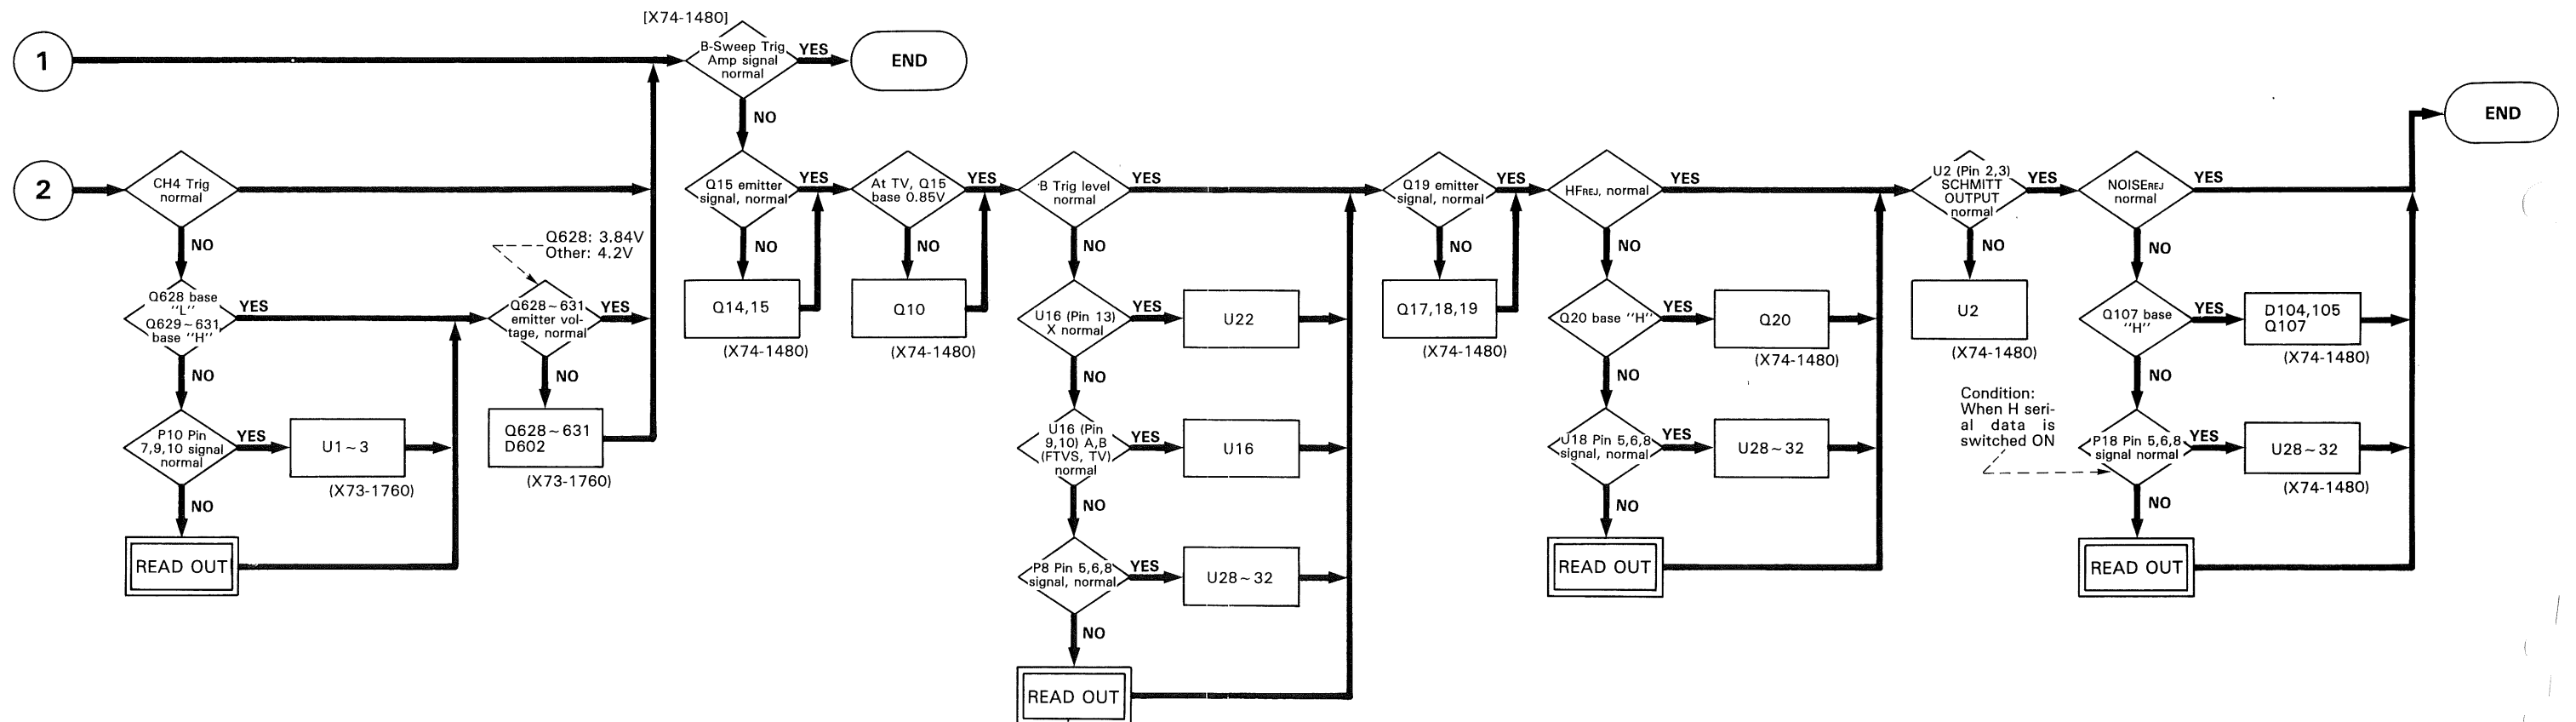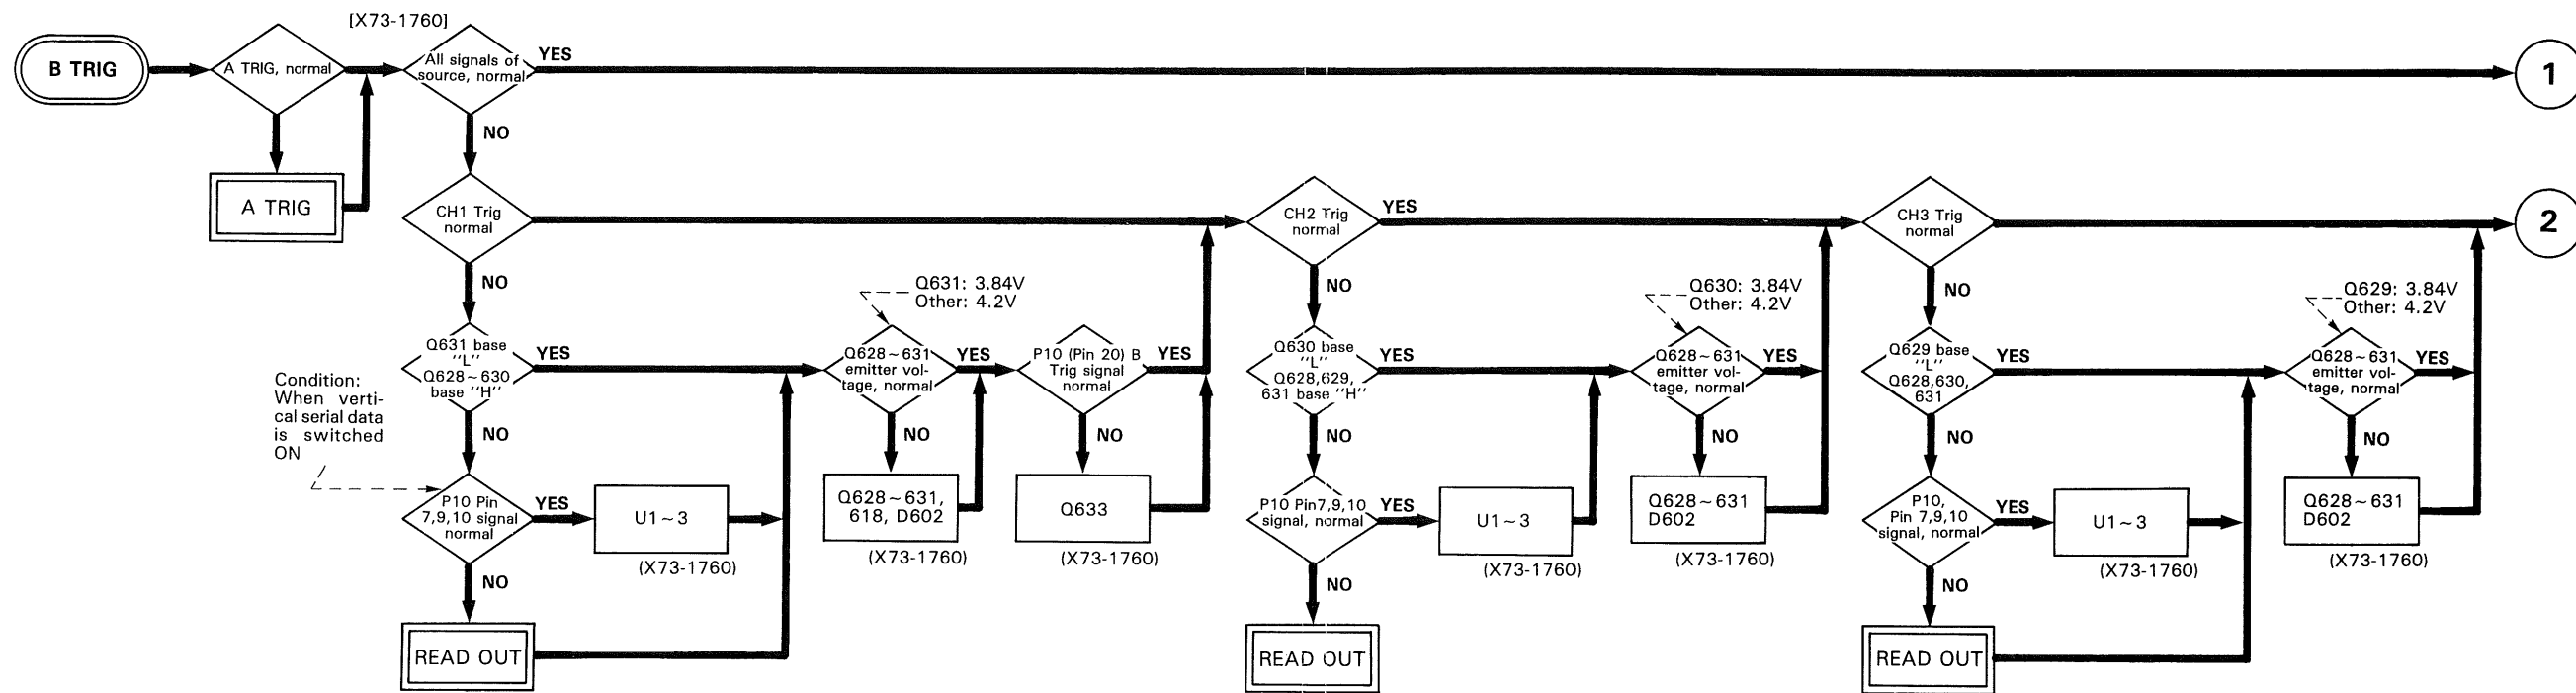

TROUBLESHOOTING

ATT Unit Serial Data Active Level

ATT Code (CH1 and CH2)

	1/2* U3 Pin6 (U3 Pin3)	1/4* U3 Pin5 (U3 Pin2)	1/10 U1 Pin6 (U1 Pin2)	1/100 U1 Pin7 (U1 Pin3)	MAG* U3 Pin7 (U3 Pin4)	CH1 (CH2) Display
1 mV	L	L	L	L	L	1 mV
2 mV	H	L	L	L	L	2 mV
5 mV	L	L	L	L	H	5 mV
10 mV	H	L	L	L	H	10 mV
20 mV	L	H	L	L	H	20 mV
50 mV	L	L	H	L	H	50 mV
0.1 V	H	L	H	L	H	0.1 V
0.2 V	L	H	H	L	H	0.2 V
0.5 V	L	L	L	H	H	0.5 V
1 V	H	L	L	H	H	1 V
2 V	L	H	L	H	H	2 V
5 V	L	L	H	H	H	5 V

() CH2
*1/2, 1/4, MAG Signal Vertical Unit IC.

ATT Code (CH3 and CH4)

	CH3 U2 Pin1	CH4 U2 Pin2	Display
0.1V	H	H	0.1
0.5V	L	L	0.5

CH1,CH2 Coupling	Active	Output IC	Display
CH1 AC	L	U1 Pin4	mV or \checkmark
CH1 GND	L	U1 Pin5	\nrightarrow
CH2 AC	L	U1 Pin15	mV or \checkmark
CH2 GND	L	U1 Pin1	\nrightarrow

CH2 Polarity	U2 Pin3	Display
Normal	H	space
Invert	L	space

Vertical Unit Serial Data Active Level

A-Source	Active	Output IC
CH1	L	U2 Pin 4
CH2	L	U2 Pin 3
CH3	L	U2 Pin 2
CH4	L	U2 Pin 1
LINE	L	U2 Pin 15

B-Source	Active	Output IC
CH1	L	U1 Pin 2
CH2	L	U1 Pin 1
CH3	L	U1 Pin 15
CH4	L	U2 Pin 5

V-Mode	Active	Output IC
CH1E	L	U1 Pin 7
CH2E	L	U1 Pin 6
CH3E	L	U1 Pin 5
CH4E	L	U1 Pin 4
ADDE	L	U1 Pin 3

20MHz BWL	Active	Output IC	Display
BW	L	U3 Pin 1	Bw

Horizontal Unit Serial Data Active Level

(A-Coupling)	Active	Output IC	Condition
AC	L	U29 Pin 7	A Coupling "AC" or A-Source "LINE"
NOISE _{REJ}	H	U29 Pin 5	A-Coupling "NOISE _{REJ} "
HF _{REJ}	H	U29 Pin 6	A-Coupling "HF _{REJ} " or "TV-V" or A-Source "LINE"
TV (B-Coupling)	H	U29 Pin 4	A-Coupling "TV-V" or "TV-H"
AC	L	U29 Pin 15	B-Coupling "AC"
NOISE _{REJ}	H	U29 Pin 2	B-Coupling "NOISE _{REJ} "
HF _{REJ}	H	U29 Pin 1	B-Coupling "HF _{REJ} "
FTVS	H	U29 Pin 3	A-Coupling "TV-V" "TV-H" and Slope "-" or "FIX"

ASLOPE	U30 Pin 7
+	H
-	L

B SLOPE	U30 Pin 6
+	H
-	L

SWEEP MODE	U30 Pin 5	Condition
NORMAL	L	Non "AUTO" or "X-Y"

HORIZONTAL MODE	Active	Output IC	Condition	Display
A	L	U32 Pin 6	Horizontal Mode "A"	A Sweep Time
ALT	L	U32 Pin 1	Horizontal Mode "ALT"	A, B Sweep Time
B	L	U32 Pin 3	Horizontal Mode "B"	A, B Sweep Time
X, Y	L	U28 Pin 7	Horizontal Mode "X, Y"	"CH2-X"
X-Y SGL	H	U32 Pin 4	Horizontal Mode "X-Y" and single sweep	

MAG	U32 Pin 2	Condition
normal	H	Horizontal Mode "A INT B" or "X-Y" or MAG normal
X10 MAG	L	

Single Sweep	Active	Output IC
Single	L	U30 Pin 2

CHOP	Active	Output IC
CHOP	L	U30 Pin 15



B (TV)	A (FTVS)	Y	X
0	0	Y0 (ALVL)	Y0 (BLVL)
0	1	Y1 (FIX)	X1 (BLVL) (X0=X1)
1	0	Y2 (TV+)	X2 (TV+)
1	1	Y3 (TV-)	X3 (TV-)

X74-1480
U16 Analog SW Control signal
TV...TV-V or TV-H "H" other "L"
FTVS...Fix or TV SLOPE \ominus "H" other "L"




SWEEP TIME CODE

Sweep Time	A Sweep Time Code			B Sweep Time Code		
	AS-A	AS-B	AS-C	BS-A	BS-B	BS-C
0.5s	0	0	0			
0.2s	0	0	0			
0.1s	0	0	0			
50ms	1	0	0	1	0	0
20ms	1	0	0	1	0	0
10ms	1	0	0	1	0	0
5ms	0	1	0	0	1	0
2ms	0	1	0	0	1	0
1ms	0	1	0	0	1	0
0.5ms	1	1	0	1	1	0
0.2ms	1	1	0	1	1	0
0.1ms	1	1	0	1	1	0
50 μ s	0	0	1	0	0	1
20 μ s	0	0	1	0	0	1
10 μ s	0	0	1	0	0	1
5 μ s	1	0	1	1	0	1
2 μ s	1	0	1	1	0	1
1 μ s	1	0	1	1	0	1
0.5 μ s	0	1	1	0	1	1
0.2 μ s	0	1	1	0	1	1
0.1 μ s	0	1	1	0	1	1
50ns	1	1	1	1	1	1
20ns	1	1	1	1	1	1




TROUBLESHOOTING

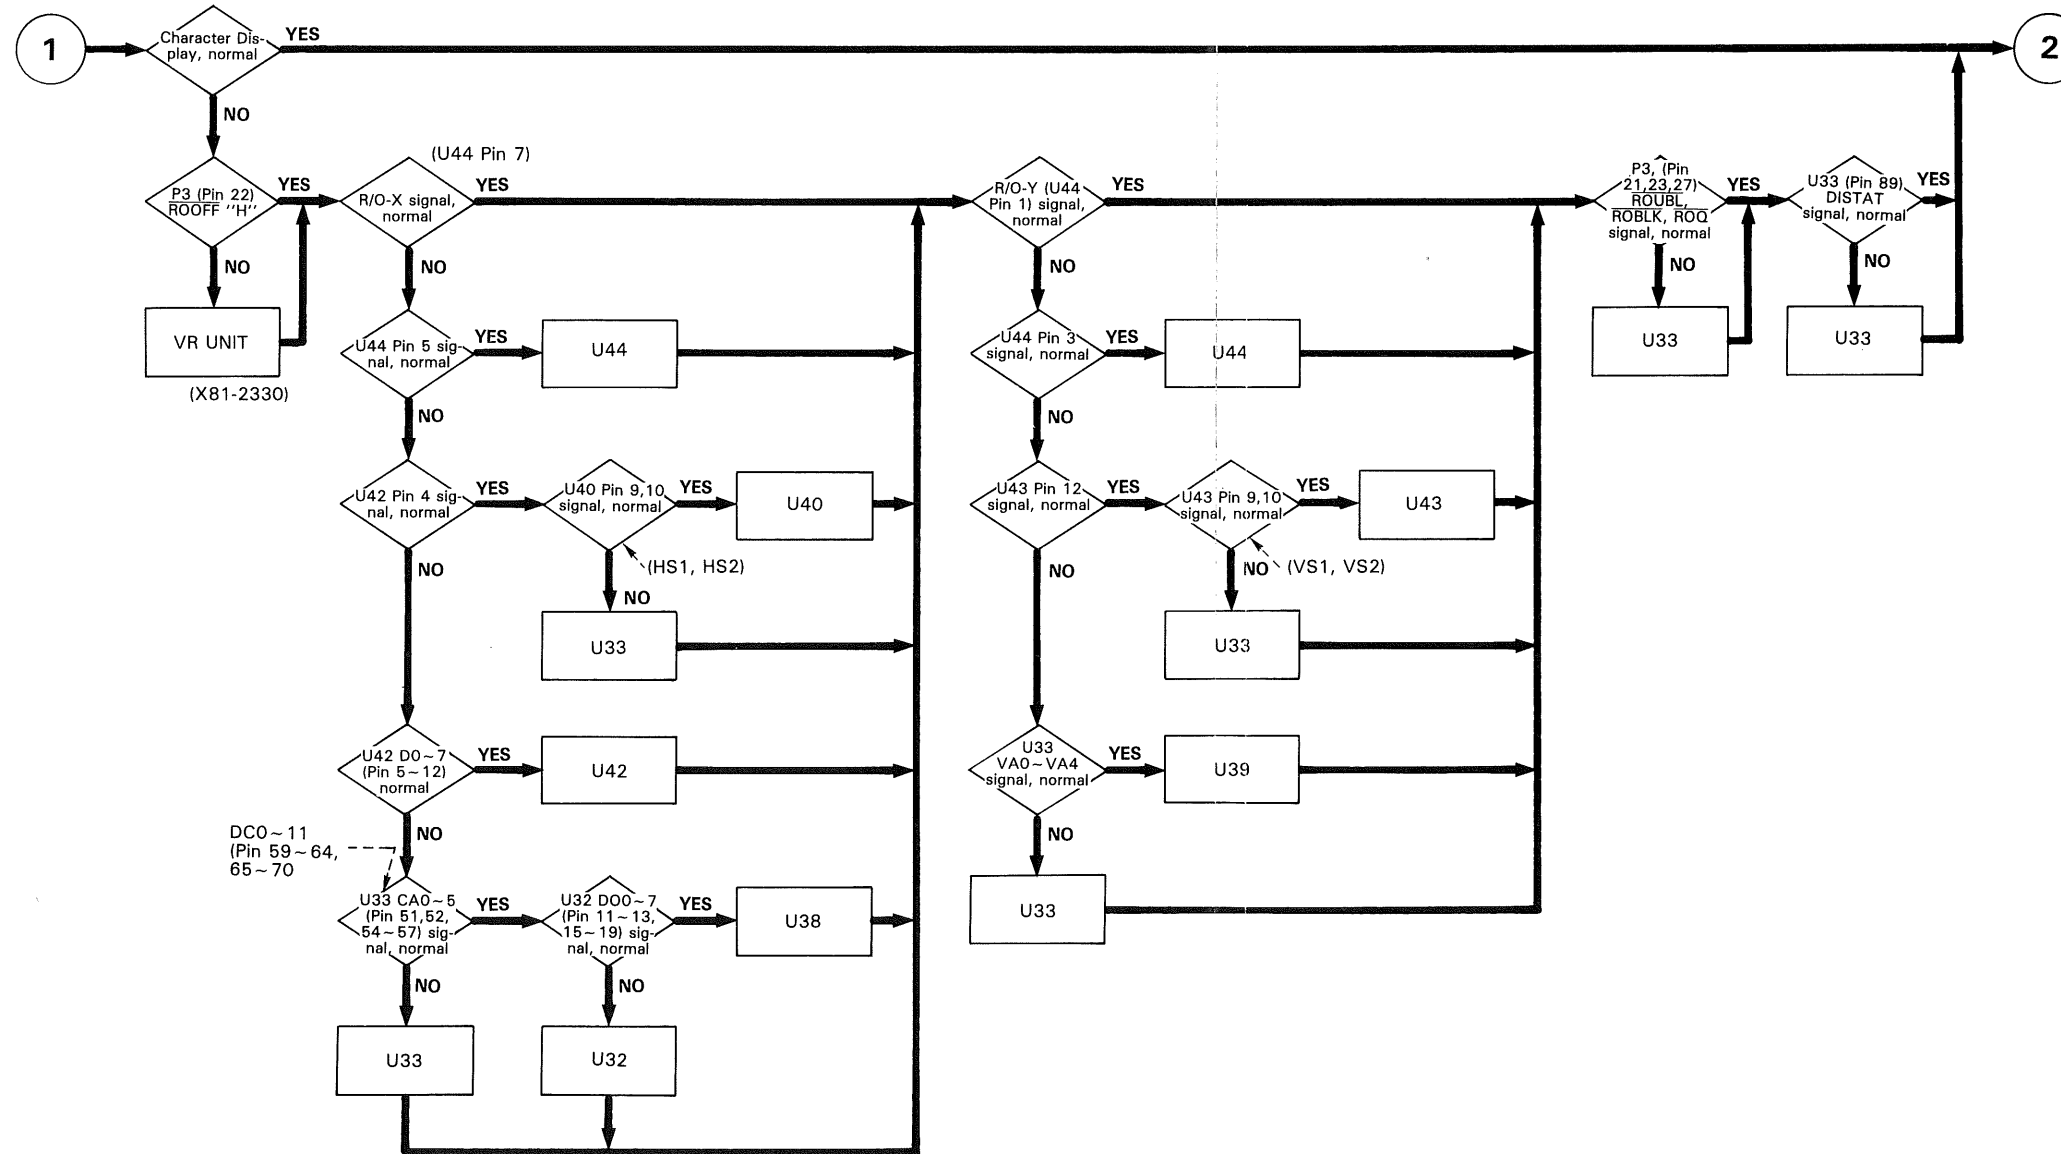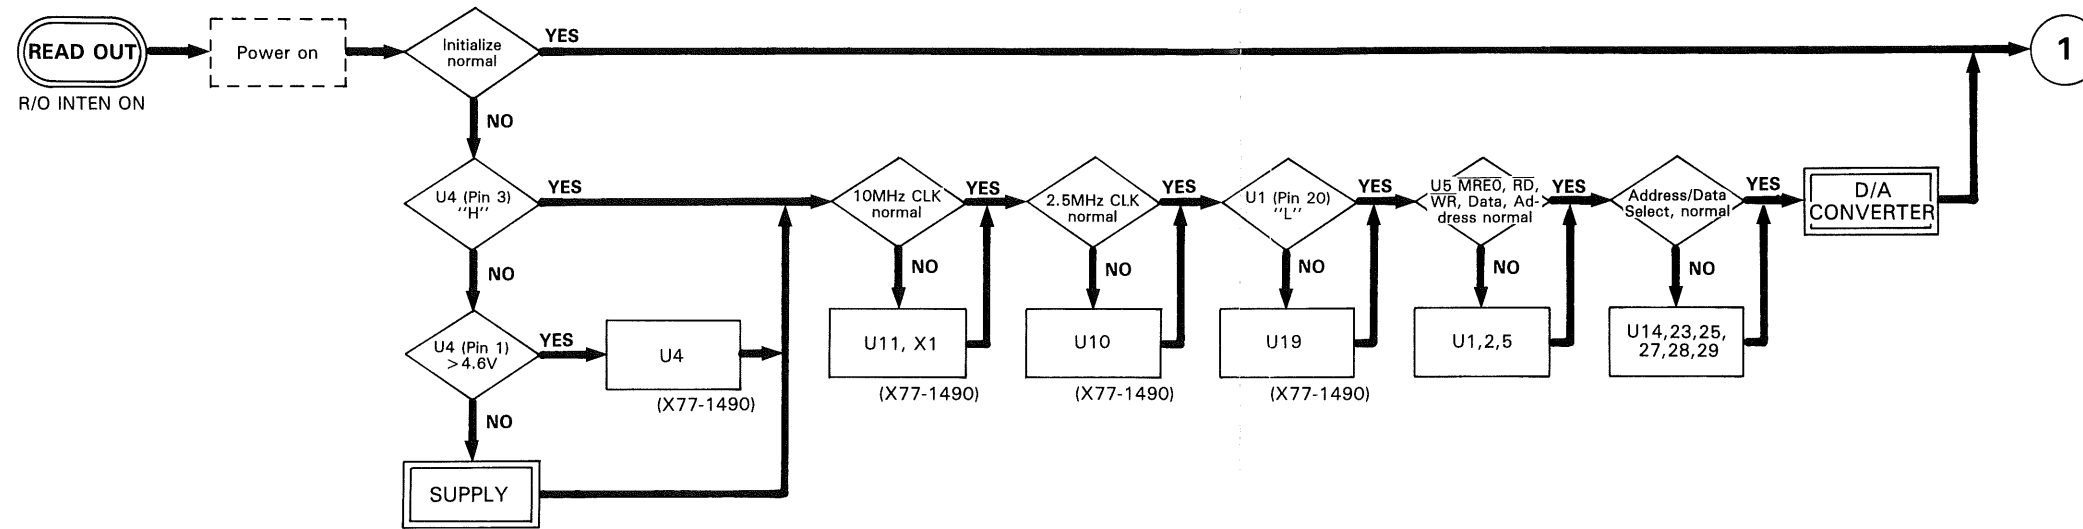




TROUBLESHOOTING

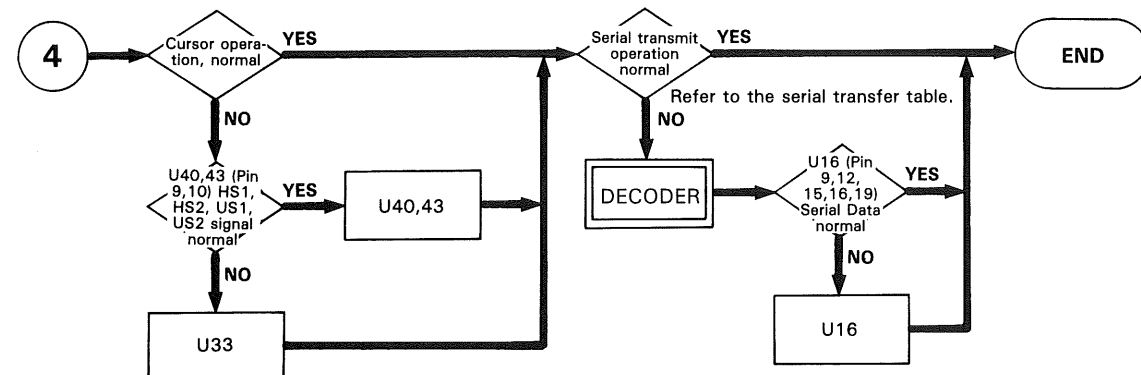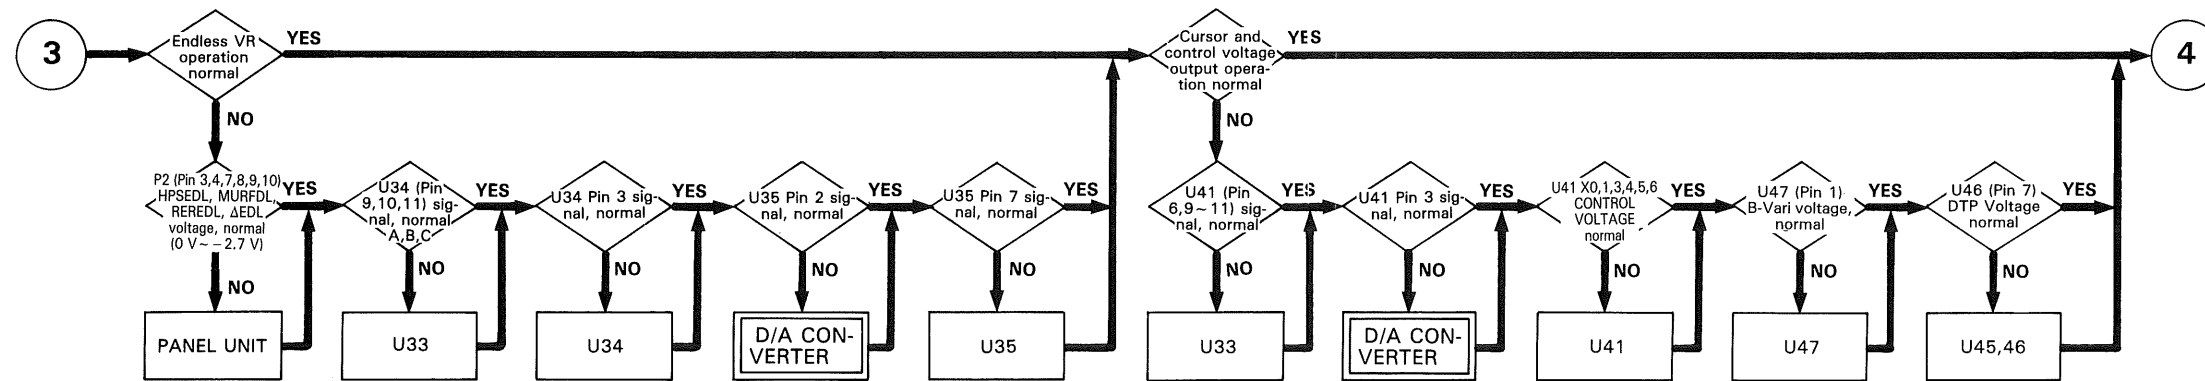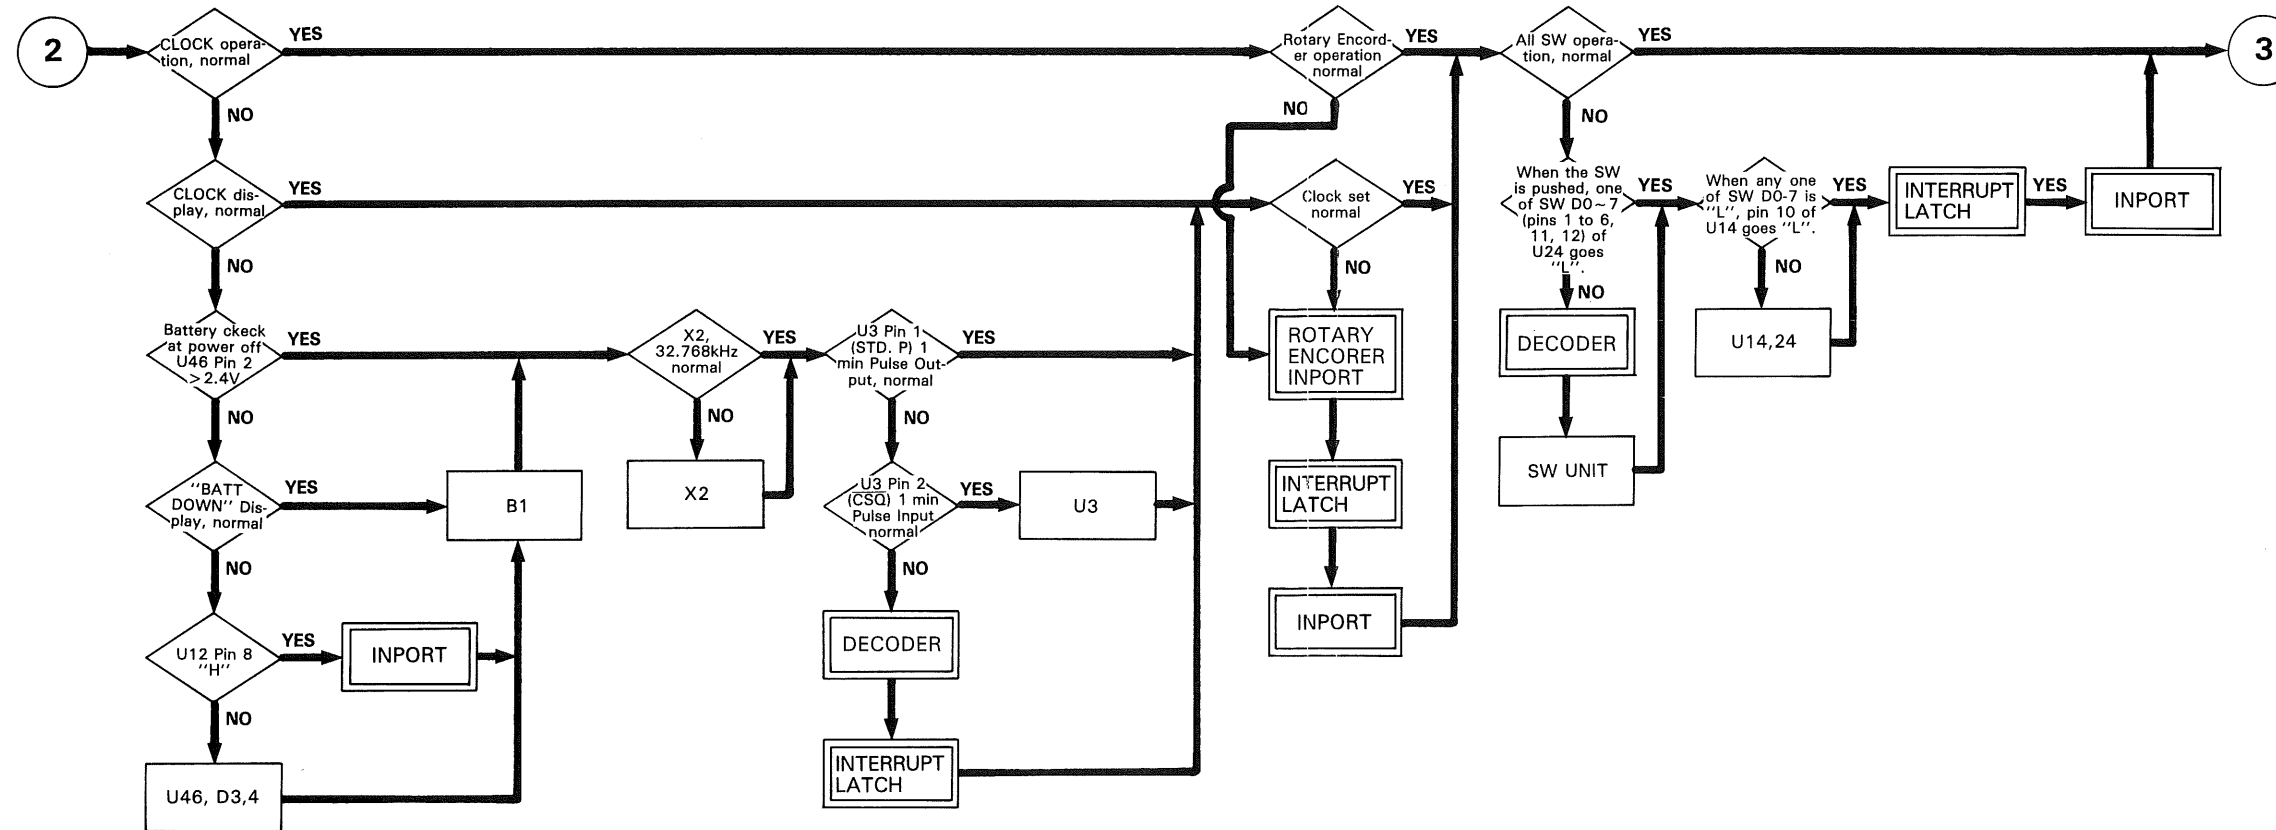





TROUBLESHOOTING

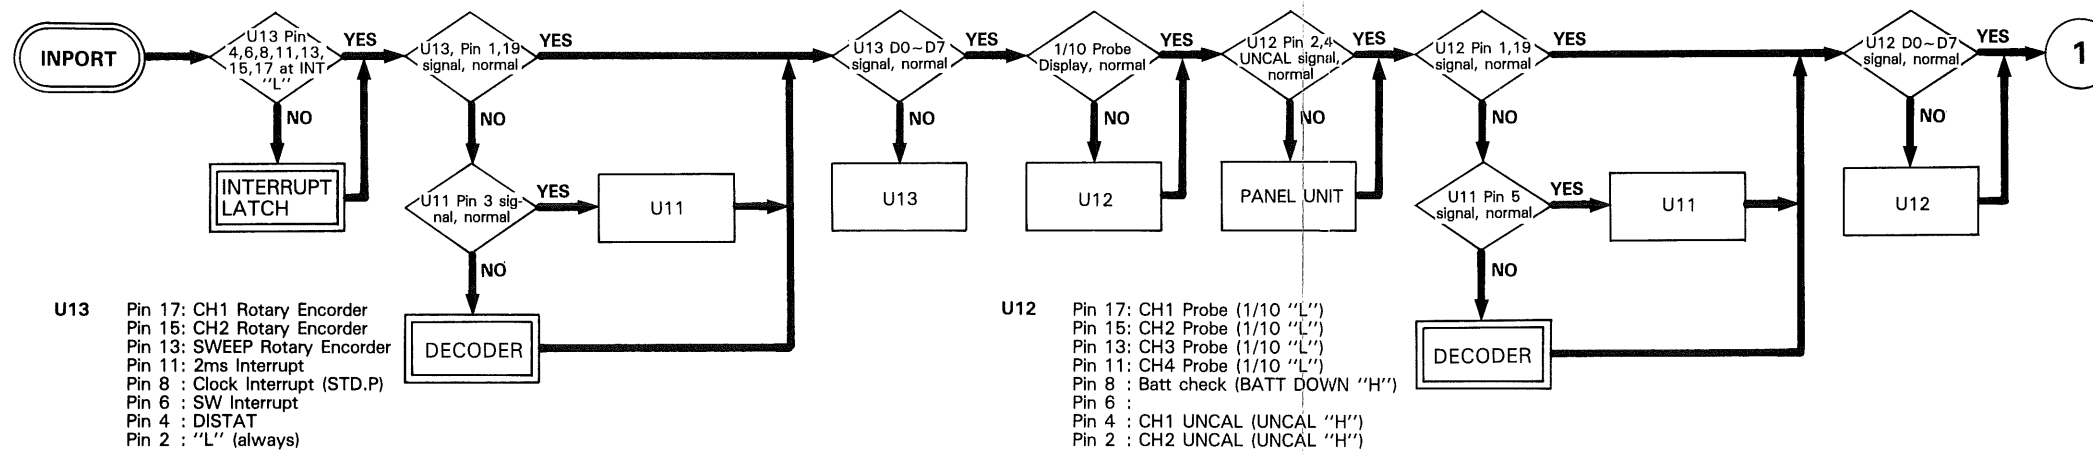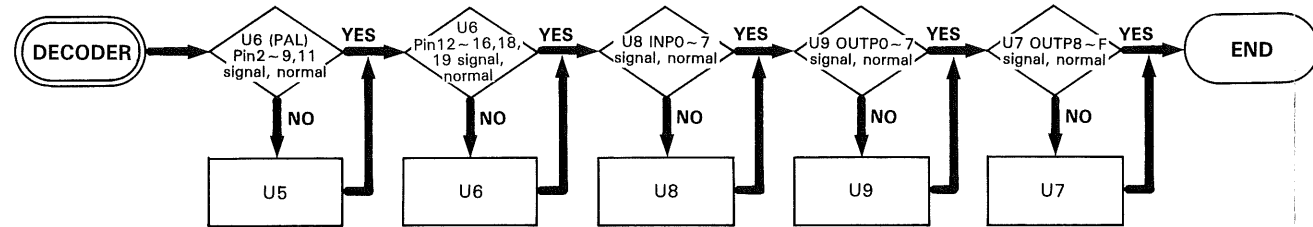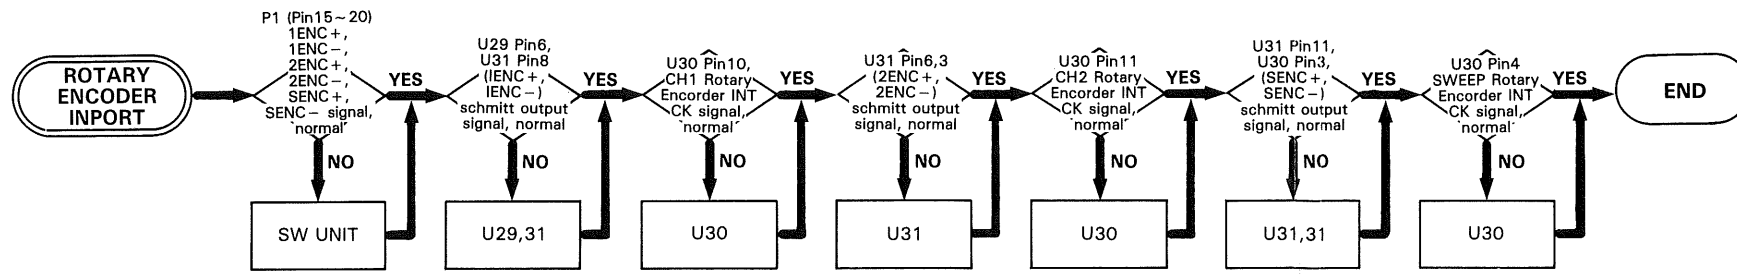

TROUBLESHOOTING

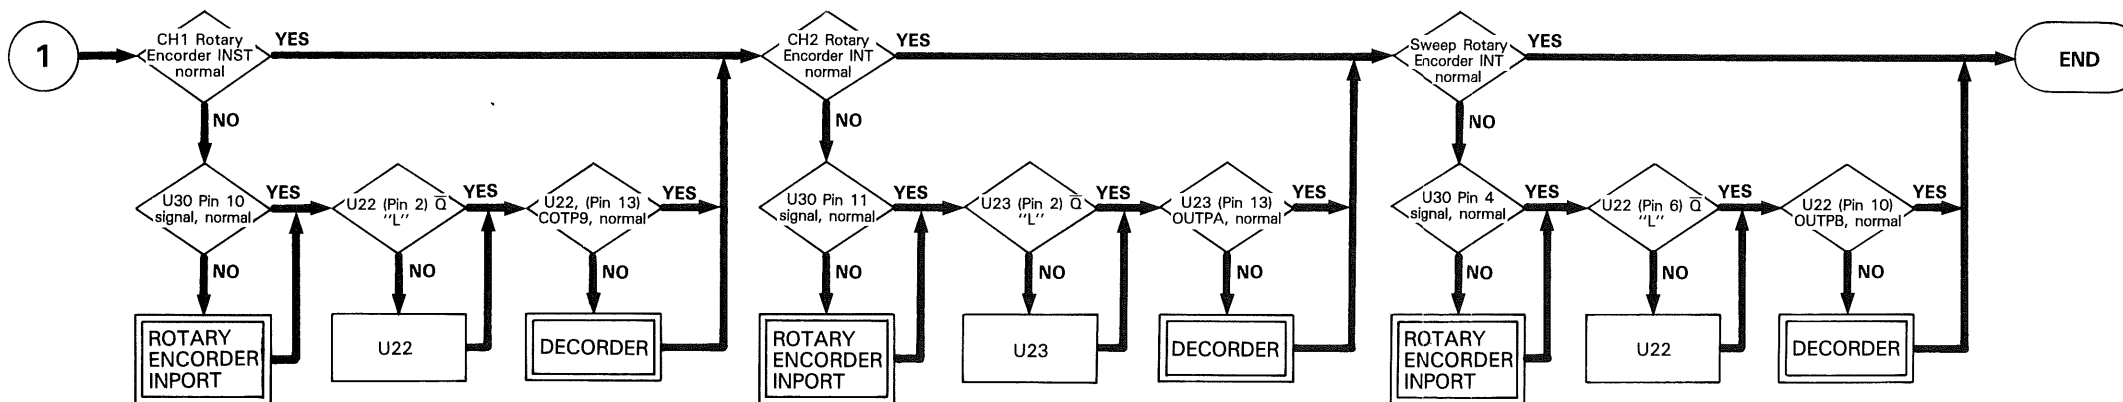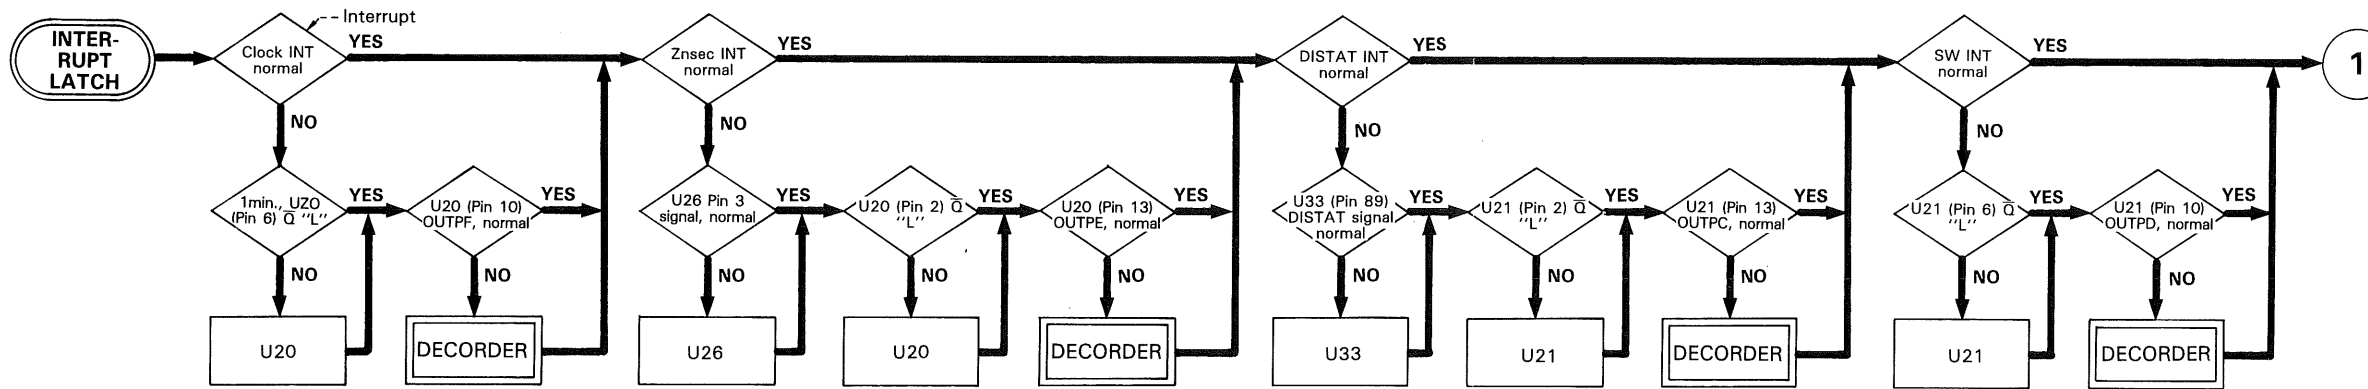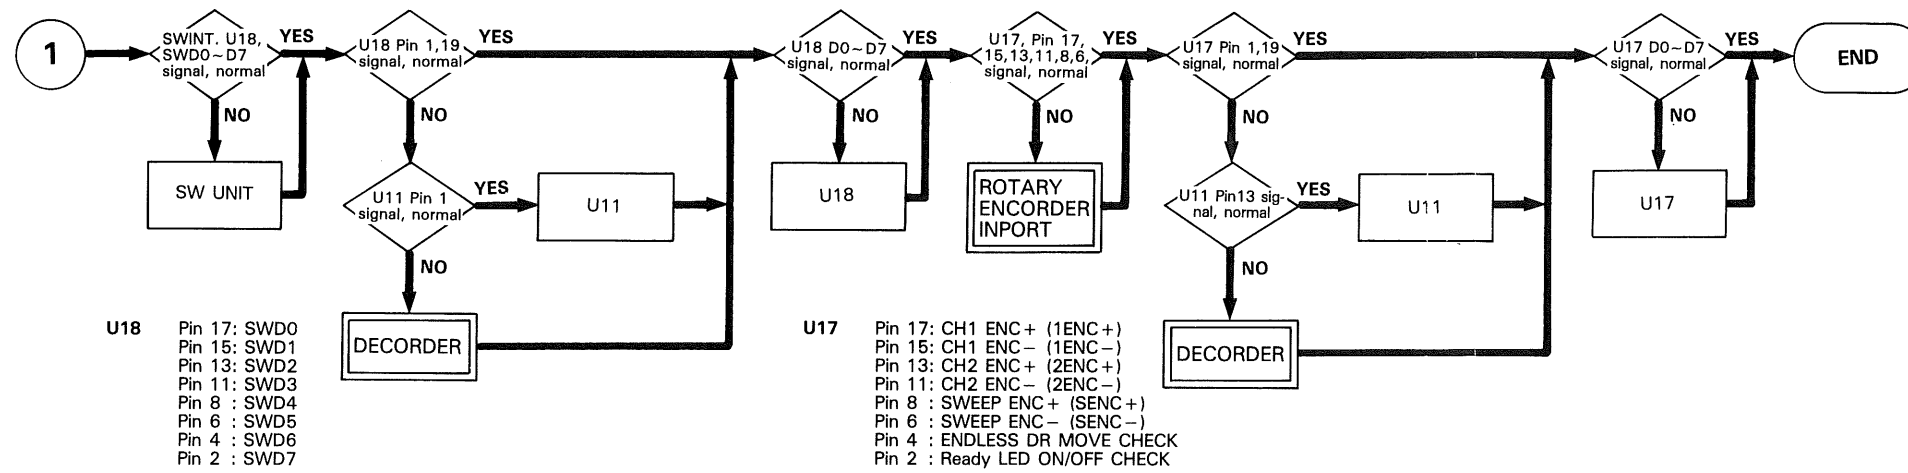


TROUBLESHOOTING

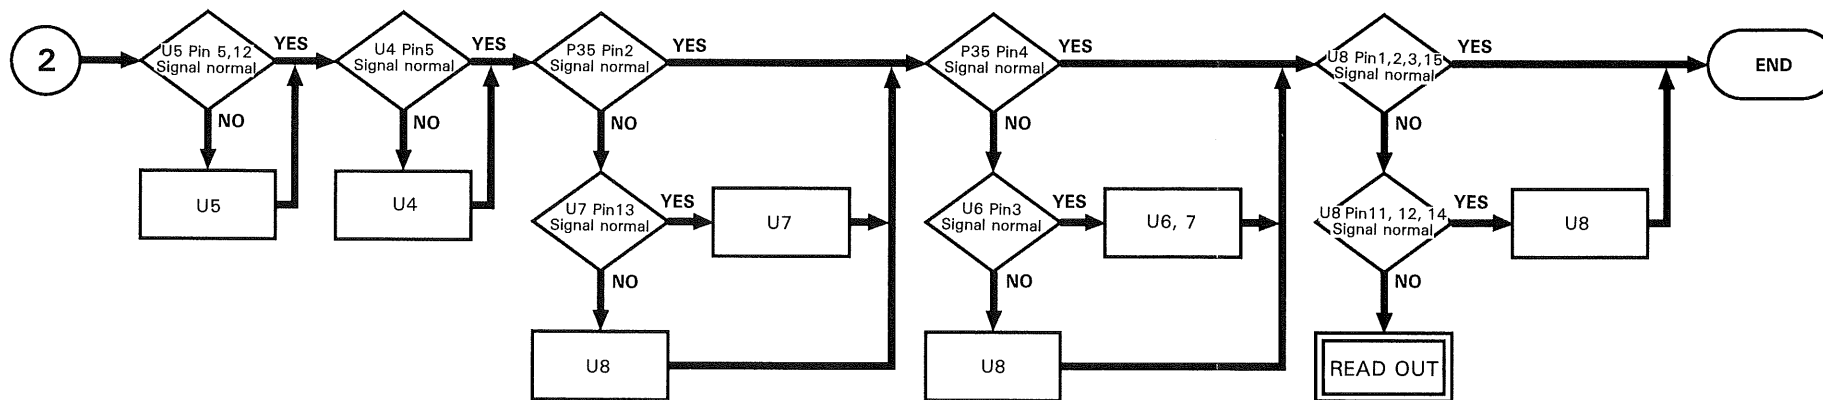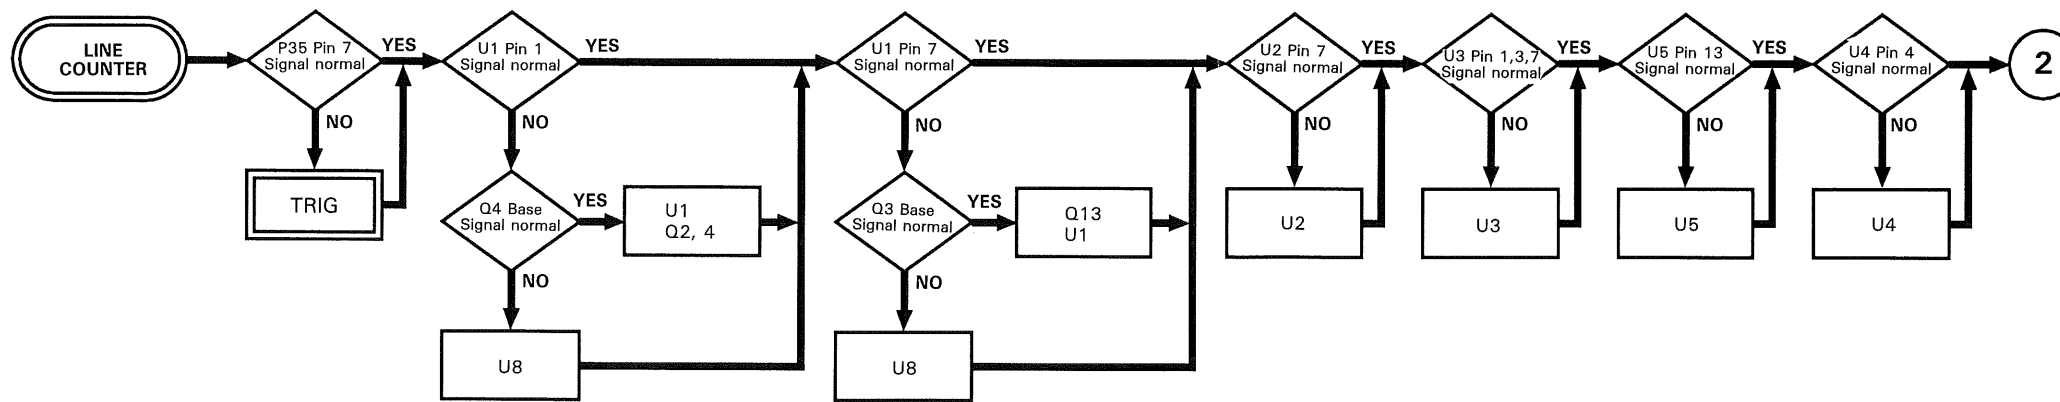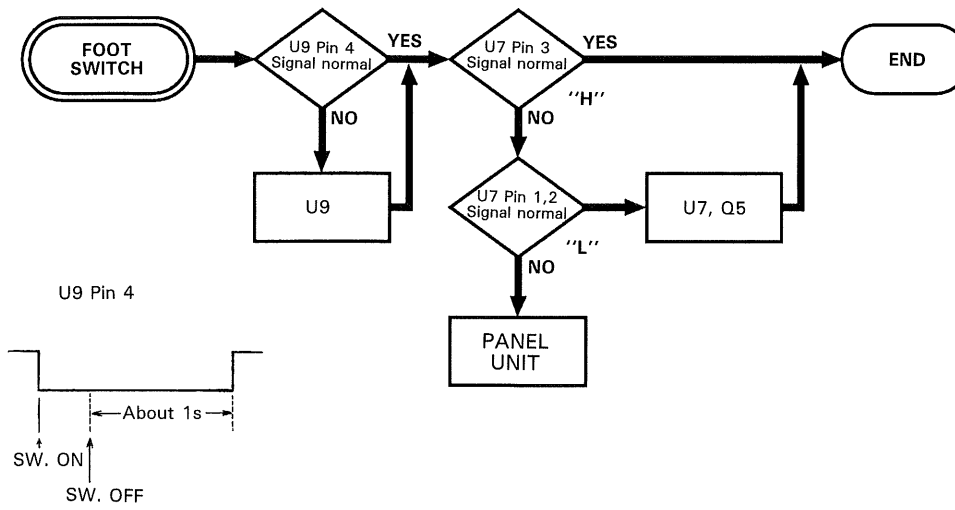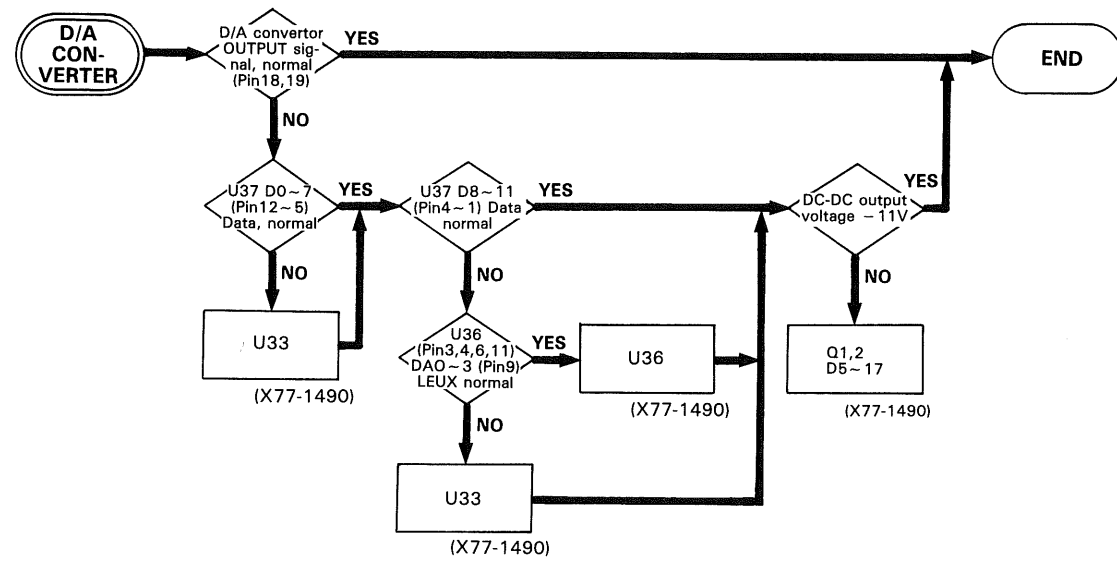

TROUBLESHOOTING

CTM5020 PIN ASSIGNMENT (100-pin FPT) (with RAM)

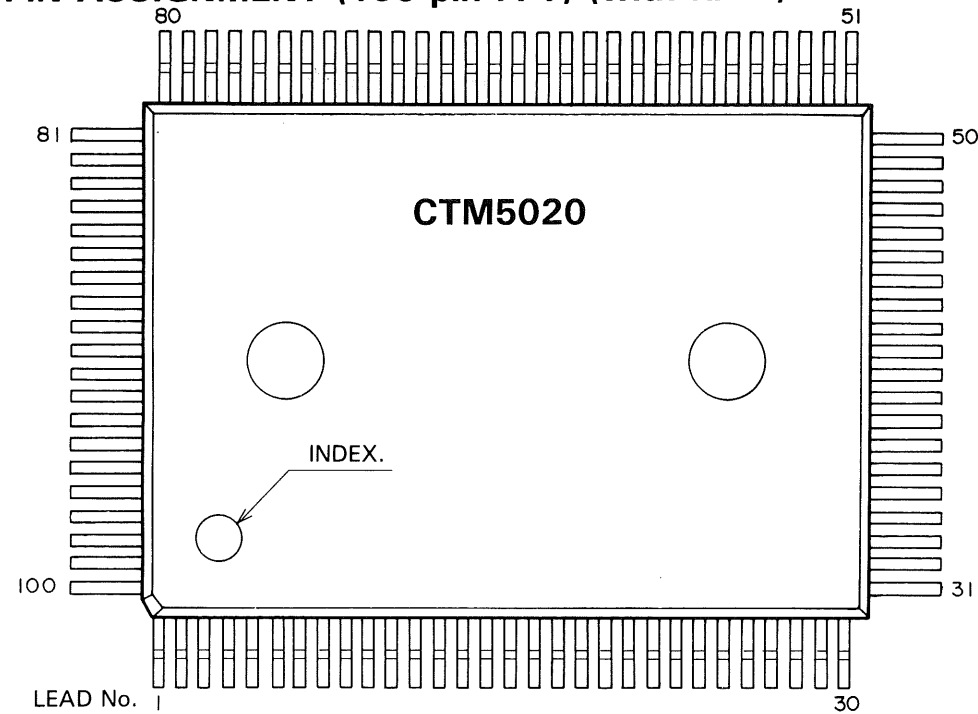

CTM5020 PIN DESCRIPTION

Pin No.	I/O	Pin Name	Function
1	I	CONT	Selection between X-Y mode and normal mode
2	I	A13	Address bus A13
3	-	VDD	+5 V power supply
4	I	A14	Address bus A14
5	I	A15	Address bus A15
6	O	INT0	1/2 period of ROSF signal (Open pin)
7	O	VX3	Selection signal of analog switch to input the endless VR voltage
8	O	VX2	Selection signal of analog switch to input the endless VR voltage
9	O	VX1	Selection signal of analog switch to input the endless VR voltage
10	O	VX0	Selection signal of analog switch to input the endless VR voltage
11	O	DA0	Output (8004H) D0 D/A data (LSB or D8)
12	O	DA1	Output (8004H) D1 D/A data (D1 or D9)
13	O	DA2	Output (8004H) D2 D/A data (D2 or D10)
14	O	DA3	Output (8004H) D3 D/A data (D3 or MSB)
15	-	VSS	GND
16	O	DA4	Output (8004H) D4 D/A data (D4)
17	O	DA5	Output (8004H) D5 D/A data (D5)
18	O	DA6	Output (8004H) D6 D/A data (D6)
19	O	DA7	Output (8004H) D7 D/A data (D7)
20	O	DA8	Output (8005H) D0 (Open pin)
21	O	DA9	Output (8005H) D1 (Serial blanking control signal)
22	O	ROR	Readout monitor terminal


Pin No.	I/O	Pin Name	Function
23	I	ROA	Readout monitor terminal
24	O	LEVX	Output (8005H) D7 D/A Data D8-MSB Latch signal
25	I	TCL	Test pin (UDD)
26	I	TSD0	Test pin (GND)
27	I	TSD1	Test pin (GND)
28	-	VDD	+5 V power supply
29	I	TSD2	Test pin (GND)
30	O	AX2	Selection signal of analog switch to output the cursor, H Variable, Delay Position, H Position voltage
31	O	AX1	Selection signal of analog switch to output the cursor H variable, Delay Position, H Position voltage
32	O	AX0	Selection signal of analog switch to output the cursor H variable, Delay Position, H position voltage
33	O	AX3	Selection signal of analog switch to output the cursor H variable, Delay Position, H Position voltage
34	O	HS2	Selection signal of analog switch for the readout X-axis signal
35	O	HS1	Selection signal of analog switch for the readout X-axis signal
36	O	TDIO	Test pin (VDD)
37	I	TWE	Test pin (VDD)
38	I	TCK1	Test pin (VDD)
39	I	TST1	Test pin (VDD)

Pin No.	I/O	Pin Name	Function
40	-	VSS	GND
41	I	TST2	Test pin (VDD)
42	I	TADD	Test pin (VDD)
43	I	TCK2	Test pin (VDD)
44	O	VS2	Selection signal of analog switch for the readout Y-axis signal
45	O	VS1	Selection signal of analog switch for the readout Y-axis signal
46	O	VA0	Character Y-axis DAC data
47	O	VA4	Character Y-axis DAC data
48	O	VA3	Character Y-axis DAC data
49	O	VA2	Character Y-axis DAC data
50	O	VA1	Character Y-axis DAC data
51	O	GETD	Character X-axis data latch clock
52	O	CA0	Character counter data
53	-	VDD	+5 V power supply
54	O	CA4	Character counter data
55	O	CA3	Character counter data
56	O	CA2	Character counter data
57	O	CA1	Character counter data
58	O	CD3	Character ROM address
59	O	CD2	Character ROM address
60	O	CD4	Character ROM address
61	O	CD1	Character ROM address
62	O	CD5	Character ROM address
63	O	DC4	Dot counter data
64	O	CD7	Character ROM address
65	-	VSS	GND
66	O	DC3	Dot counter data
67	O	DC2	Dot counter data
68	O	CD6	Character ROM address
69	O	DC1	Dot counter data

Pin No.	I/O	Pin Name	Function
70	O	DC0	Dot counter data
71	O	CD0	Character ROM address (Open pin)
72	I	D07	Character ROM Y-axis DAC data
73	I	D06	Character ROM Y-axis DAC data
74	I	D05	Character ROM Y-axis DAC data
75	I	D04	Character ROM Y-axis DAC data
76	I	D03	Character ROM Y-axis DAC data
77	I	SING	Terminal for SINGLE signal
78	-	VDD	+5 V power supply
79	I	R10M	10 MHz clock
80	I	10M	10 MHz clock
81	I	HLDF	Holdoff input
82	I	SGA	Sweep gate
83	I	ROSP	Readout off
84	I	ROD	Character counter reset
85	O	HLDL	Holdoff output
86	O	ROUB	Readout unblanking
87	O	ROB	Readout blanking
88	O	ROQ	Readout request
89	O	ROED	Readout end
90	-	VSS	GND
91	I	D7	Data bus D7
92	I	D5	Data bus D5
93	I	D3	Data bus D3
94	I	D1	Data bus D1
95	I	ALE	Address/Data latch
96	I	D6	Data bus D6
97	I	D4	Data bus D4
98	I	D2	Data bus D2
99	I	D0	Data bus D0
100	I	WR	Write timing signal


TROUBLESHOOTING

Rotary Encoder Timing chart (X77-1490-01),

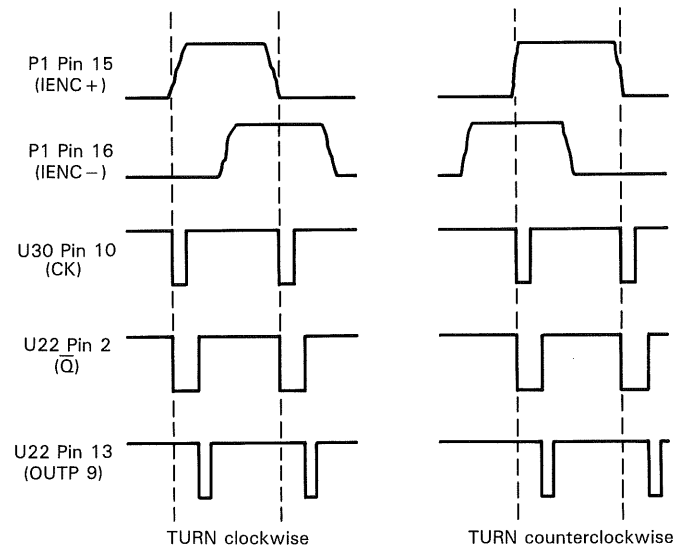


The timing charts of the CH2 rotary encoder and sweep rotary encoder are also the same.


Address/Data Select Timing Chart (X77-1490-01)

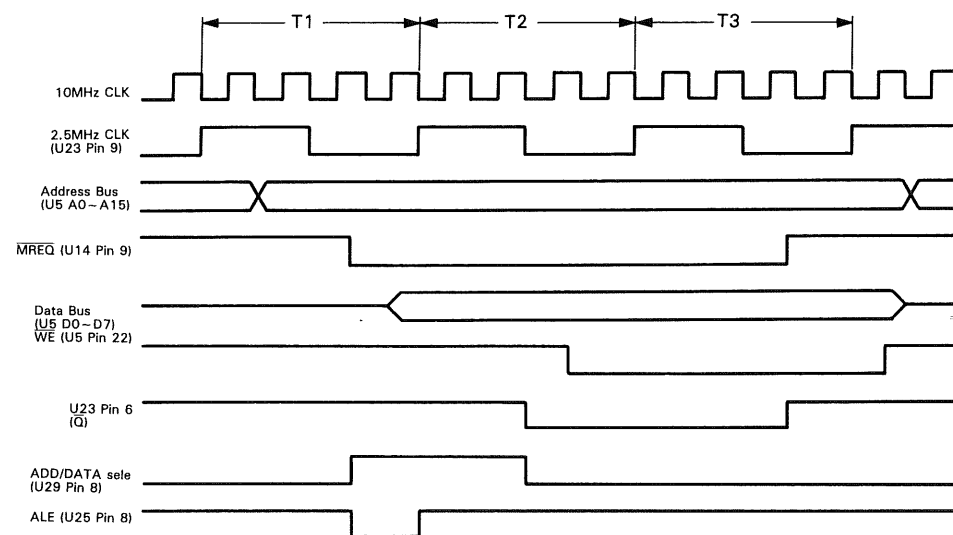


Interrupt Timing Chart

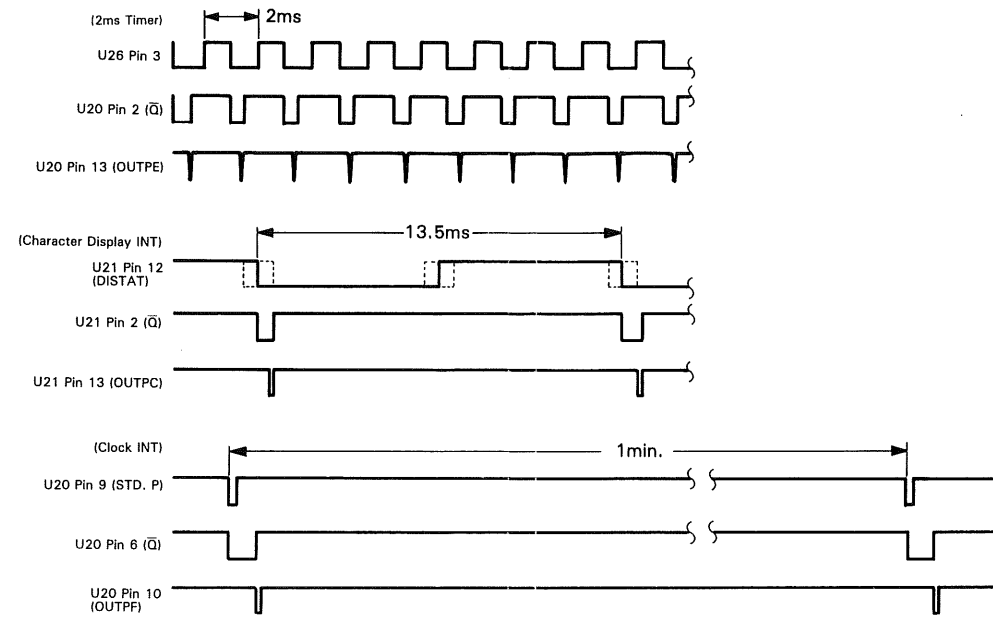

Endless VR Select and Control Timing Chart

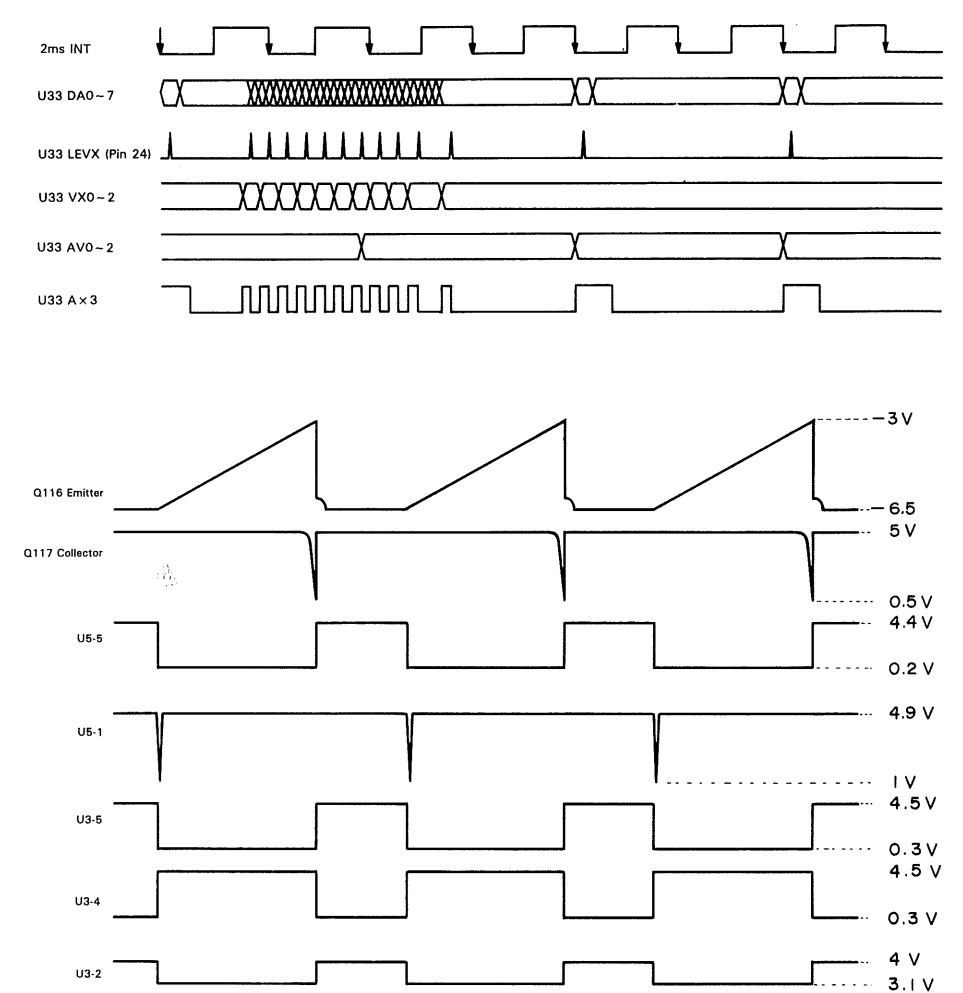

Serial Transmit Timing Chart

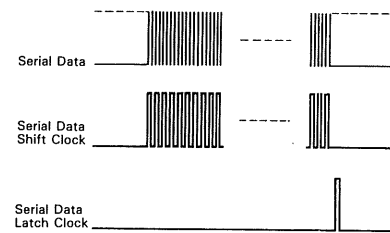

	Panel SW SCAN	Panel LED Control	ATT UNIT Control	V UNIT Control	H UNIT Control
Serial Data	P1 Pin 4 (SD)	P1 Pin 1 (LD)	P4 Pin 9 (AD)	U16 Pin 16 (VD)	U16 Pin 19 (HD)
Serial Data shift Clock	P1 Pin 5 (SSC)	P1 Pin 2 (LSC)	P4 Pin 8 (ASC)	U9 Pin 14 (VSC)	U9 Pin 10 (HSC)
Serial Data Latch clock	P1 Pin 6 (SLC)	P1 Pin 3 (LLC)	P4 Pin 7 (ALC)	U8 Pin 11 (VLC)	U8 Pin 7 (HLC)

Endless VR Select

V x 2	V x 1	V x 0	Select CH	Endless VR
L	L	L	U34 Pin 13	Δ Endless VR
L	L	H	U34 Pin 14	
L	H	L	U34 Pin 15	REF Endless VR
L	H	H	U34 Pin 12	
H	L	L	U34 Pin 1	H-Posi Endless VR
H	L	H	U34 Pin 5	
H	H	L	U34 Pin 2	H-Vari Endless VR
H	H	H	U34 Pin 4	

CH1 (CH2) Vertical Gain VARIABLE

V. Variable	U12 Pin 4 (2)	Display
CAL	L	Space
UNCAL	H	>

CH1 ~ CH4 Probe

Probe	U12 Pin 17,15,13,11	Display
1/1	H	Volts/div x 1 display
1/10	L	Volts/div x 10 display

CONTROL Voltage Select

A x 3	A x 2	A x 1	A x 0	Select CH	Control Voltage
L	L	L	L	U41 Pin 13	REF Cursor
L	L	L	H	U41 Pin 14	Δ Cursor
L	L	H	L	U41 Pin 15	A-Variable
L	L	H	H	U41 Pin 12	B-Variable
L	H	L	L	U41 Pin 1	V-Delay } (DTP)
L	H	L	H	U41 Pin 5	
L	H	H	L	U41 Pin 2	H-Posi
L	H	H	H	U41 Pin 4*	
H	X	X	X	All off	Inhibit

* Items marked * are not selected.
X Items marked X can be either L or H.

PARTS LIST


CS-6040 UNIT

Y70-1700-00

REF. NO	PARTS NO	NAME & DESCRIPTION
A20-2828-52		PANEL ASS'Y
B07-0703-04		ESCUTCHEON FOR ASTIG
B30-0925-05		LAMP
B41-0874-04		SERIAL NO. PLATE
B50-7670-20		INSTRUCTION MANUAL, JAPANESE
B50-7671-20		INSTRUCTION MANUAL, ENGLISH
E01-1404-05		CRT SOCKET
E23-0565-05		EARTH WASHER
E23-0567-04		EARTH BRACKET; COPPER
E30-1644-15		BS POWER CORD
E30-1818-05		JIS POWER CORD SET
E30-1819-15		CEE POWER CORD SET
E30-1820-05		UL/CSA POWER CORD SET
E30-1821-05		SAA POWER CORD SET
E31-0717-25		WIRE ASS'Y; INLET TO GND
E31-5560-05		WIRE ASS'Y; HV
E38-0068-05		WIRE ASS'Y; FOOT SWITCH BNC
E38-0069-05		WIRE ASS'Y; FOOT SWITCH PANEL
E38-0075-05		WIRE ASS'Y; +/-Y
E38-0076-05		WIRE ASS'Y; +/-X
E38-0077-05		WIRE ASS'Y; P2, G2
E38-0078-05		WIRE ASS'Y; EXT Z
E38-0079-05		WIRE ASS'Y; CH1 OUTPUT
E38-0080-05		WIRE ASS'Y; VR1
E38-0081-05		WIRE ASS'Y; VR2
E38-0082-05		WIRE ASS'Y; CAL
E38-0083-05		WIRE ASS'Y; R/O TO ATT
F05-1224-05		FUSE (6X30MM) 1.2A/250V
F05-8013-05		FUSE (5X20MM) T800MA/250V
F05-8015-05		FUSE (6X30MM) 0.8A/250V
F15-0733-04		FELT (CRT SHIELD)
F20-0674-04		INSULATED SHEET, HIGH VOLTAGE
H10-2901-02		FOAMED STYRENE PAD, FRONT
H10-2902-12		FOAMED STYRENE PAD, REAR
H20-1727-04		VINYL COVER
H53-0031-04		CARTON BOX
J31-0604-04		SPACER
J61-0408-05		WIRE WRAPPING BAND
J61-0509-05		WIRE WRAPPING BAND
J61-0516-05		SUPPORT
W03-2301-15		R/O PROBE, PC-31
C1	CC45CH2H330J	CAP. CERAMIC 33P 5% 500V
R1	RD14BB2C471J	RES. CARBON 470 5% 1/6W
1	A01-1194-12	CASE, TOP
2	A01-1195-32	CASE, BOTTOM
3	A13-0924-12	FRAME, RIGHT
4	A13-0925-22	FRAME, CENTER
5	A13-0926-22	FRAME, LEFT
6	A13-0927-13	FRAME, PCB SUPPORT
7	A13-0928-13	FRAME
8	A13-0929-03	FRAME
10	A20-2830-52	MOLDED PANEL ASS'Y
11	A21-1173-13	DECORATIVE PANEL
12	A21-1136-03	DECORATIVE PANEL
13	A23-1683-22	REAR PANEL
14	B11-0504-14	FILTER
15	B30-0979-05	LAMP ASS'Y; SCALE ILLUMINATION
16	B40-2935-03	NAME PLATE, MODEL
17	B41-0710-04	CAUTION LABEL; (HIGH VOLTAGE)
18	D19-0505-05	FLEXIBLE WIRE, FOR POWER SWITCH
19	G53-0015-14	BUSHING
20	E04-0259-05	BNC RECEPTACLE
21A	E18-0365-05	AC SELECTOR WITH 6X30MM FUSE
21B	E18-0366-15	AC SELECTOR WITH 5X20MM FUSE
22	E21-0660-04	TERMINAL, CAL
23	E21-0667-05	METAL TERMINAL
25	E31-5568-05	FLAT CABLE (AXM126)
26	E31-5569-05	FLAT CABLE (AXM120)
27	F07-0936-04	COVER, HANDLE LATCH
28	F10-1604-04	SHIELD, R/O UNIT
29	F10-1605-13	SHIELD PLATE
30	F10-1606-03	SHIELD, HIGH VOLTAGE UNIT
31	F11-1209-02	SHIELD, CRT: FRONT
32	F11-1210-03	SHIELD, CRT: REAR
33	F20-0673-04	INSULATED SHEET
34	G02-0606-14	SPRING, FOR HANDLE
35	J02-0089-05	RUBBER FOOT (REAR)
36	J11-0508-05	CABLE CLAMP
37	J19-1656-03	HOLDER, COIL
38	J19-1657-04	WEDGE
39	J21-2906-05	GEAR, FOR HANDLE
40	J21-2907-05	RING, FOR HANDLE
41	J21-4642-04	BRACKET
42	J21-4613-04	BRACKET
43	J32-0887-04	BOSS, FOR POWER SWITCH






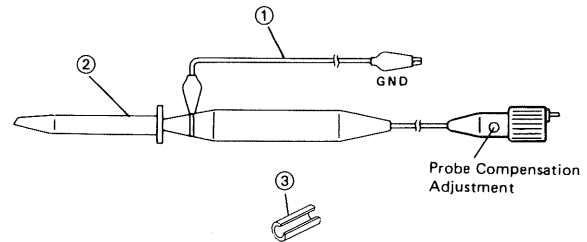





REF. NO	PARTS NO	NAME & DESCRIPTION
44	J21-4710-04	BRACKET
45	J61-0521-05	SUPPORT
46	K01-0528-05	HANDLE, CARRYING
47	K21-0898-23	KNOB
48	K23-0808-03	KNOB (18 USED)
49	K27-0504-04	BUTTON; GRAY
50	K27-0543-04	BUTTON (34 USED)
51	L01-9766-05	POWER TRANSFORMER
52	L39-0533-05	COIL, TRACE ROTATION
53	L76-0120-05	DELAY LINE
54	S40-1524-05	PUSH SWITCH, POWER
55	W01-0503-04	REAR RUBBER FOOT/CORD WRAP
56	X66-1050-01	PANEL UNIT
57	X68-1500-01	POWER SUPPLY UNIT
58	X68-1510-02	HIGH VOLTAGE UNIT
59	X69-1150-02	SWITCH UNIT
60	X73-1760-01	VERTICAL PREAMP UNIT
61	X74-1480-02	HORIZONTAL UNIT
62	X75-1180-01	ATT. UNIT
63	X77-1490-01	R/O UNIT
64	X77-1500-01	CONNECTION UNIT
65	X80-1100-02	FINAL UNIT
66	X81-2330-02	VR UNIT
67	X76-1400-00	LINE COUNTER UNIT
68	J59-0403-05	NYLON RIVET (ILLUM1)
69	J19-1660-05	SUPPORT, FOR PCB
70	150XTN31A	CRT


MODEL PC-31 (LOW CAPACITY PROBE)



ITEM	DESCRIPTION	PARTS NO.
①	Ground Wire Assembly	E30-1883-08
②	Retractable Hook Tip	E29-0540-08
③	Marker (Orange)	B42-1950-08

DISASSEMBLY

Parts No.	Parts Name	Figure
A N08-0611-04	Cord wrapping screw	
B N09-0705-05	Hexagon socket flat head screw (M4×8)	
C N09-0718-05	Sems screw (M3×6)	
D N09-0739-05	Sems taptite screw (3×8)	
E N09-0720-05	Sems screw (M4×10)	
F N09-0733-15	Sems screw (M3×20)	
G N32-3008-41	Flat head screw (M3×8)	
H N88-3008-41	Flat head taptite screw (3×8)	
I N89-3008-41	Binding head taptite screw (3×8)	
J N35-3006-41	Binding head screw (M3×6)	
K N09-0731-05	Sems screw (M3×12)	

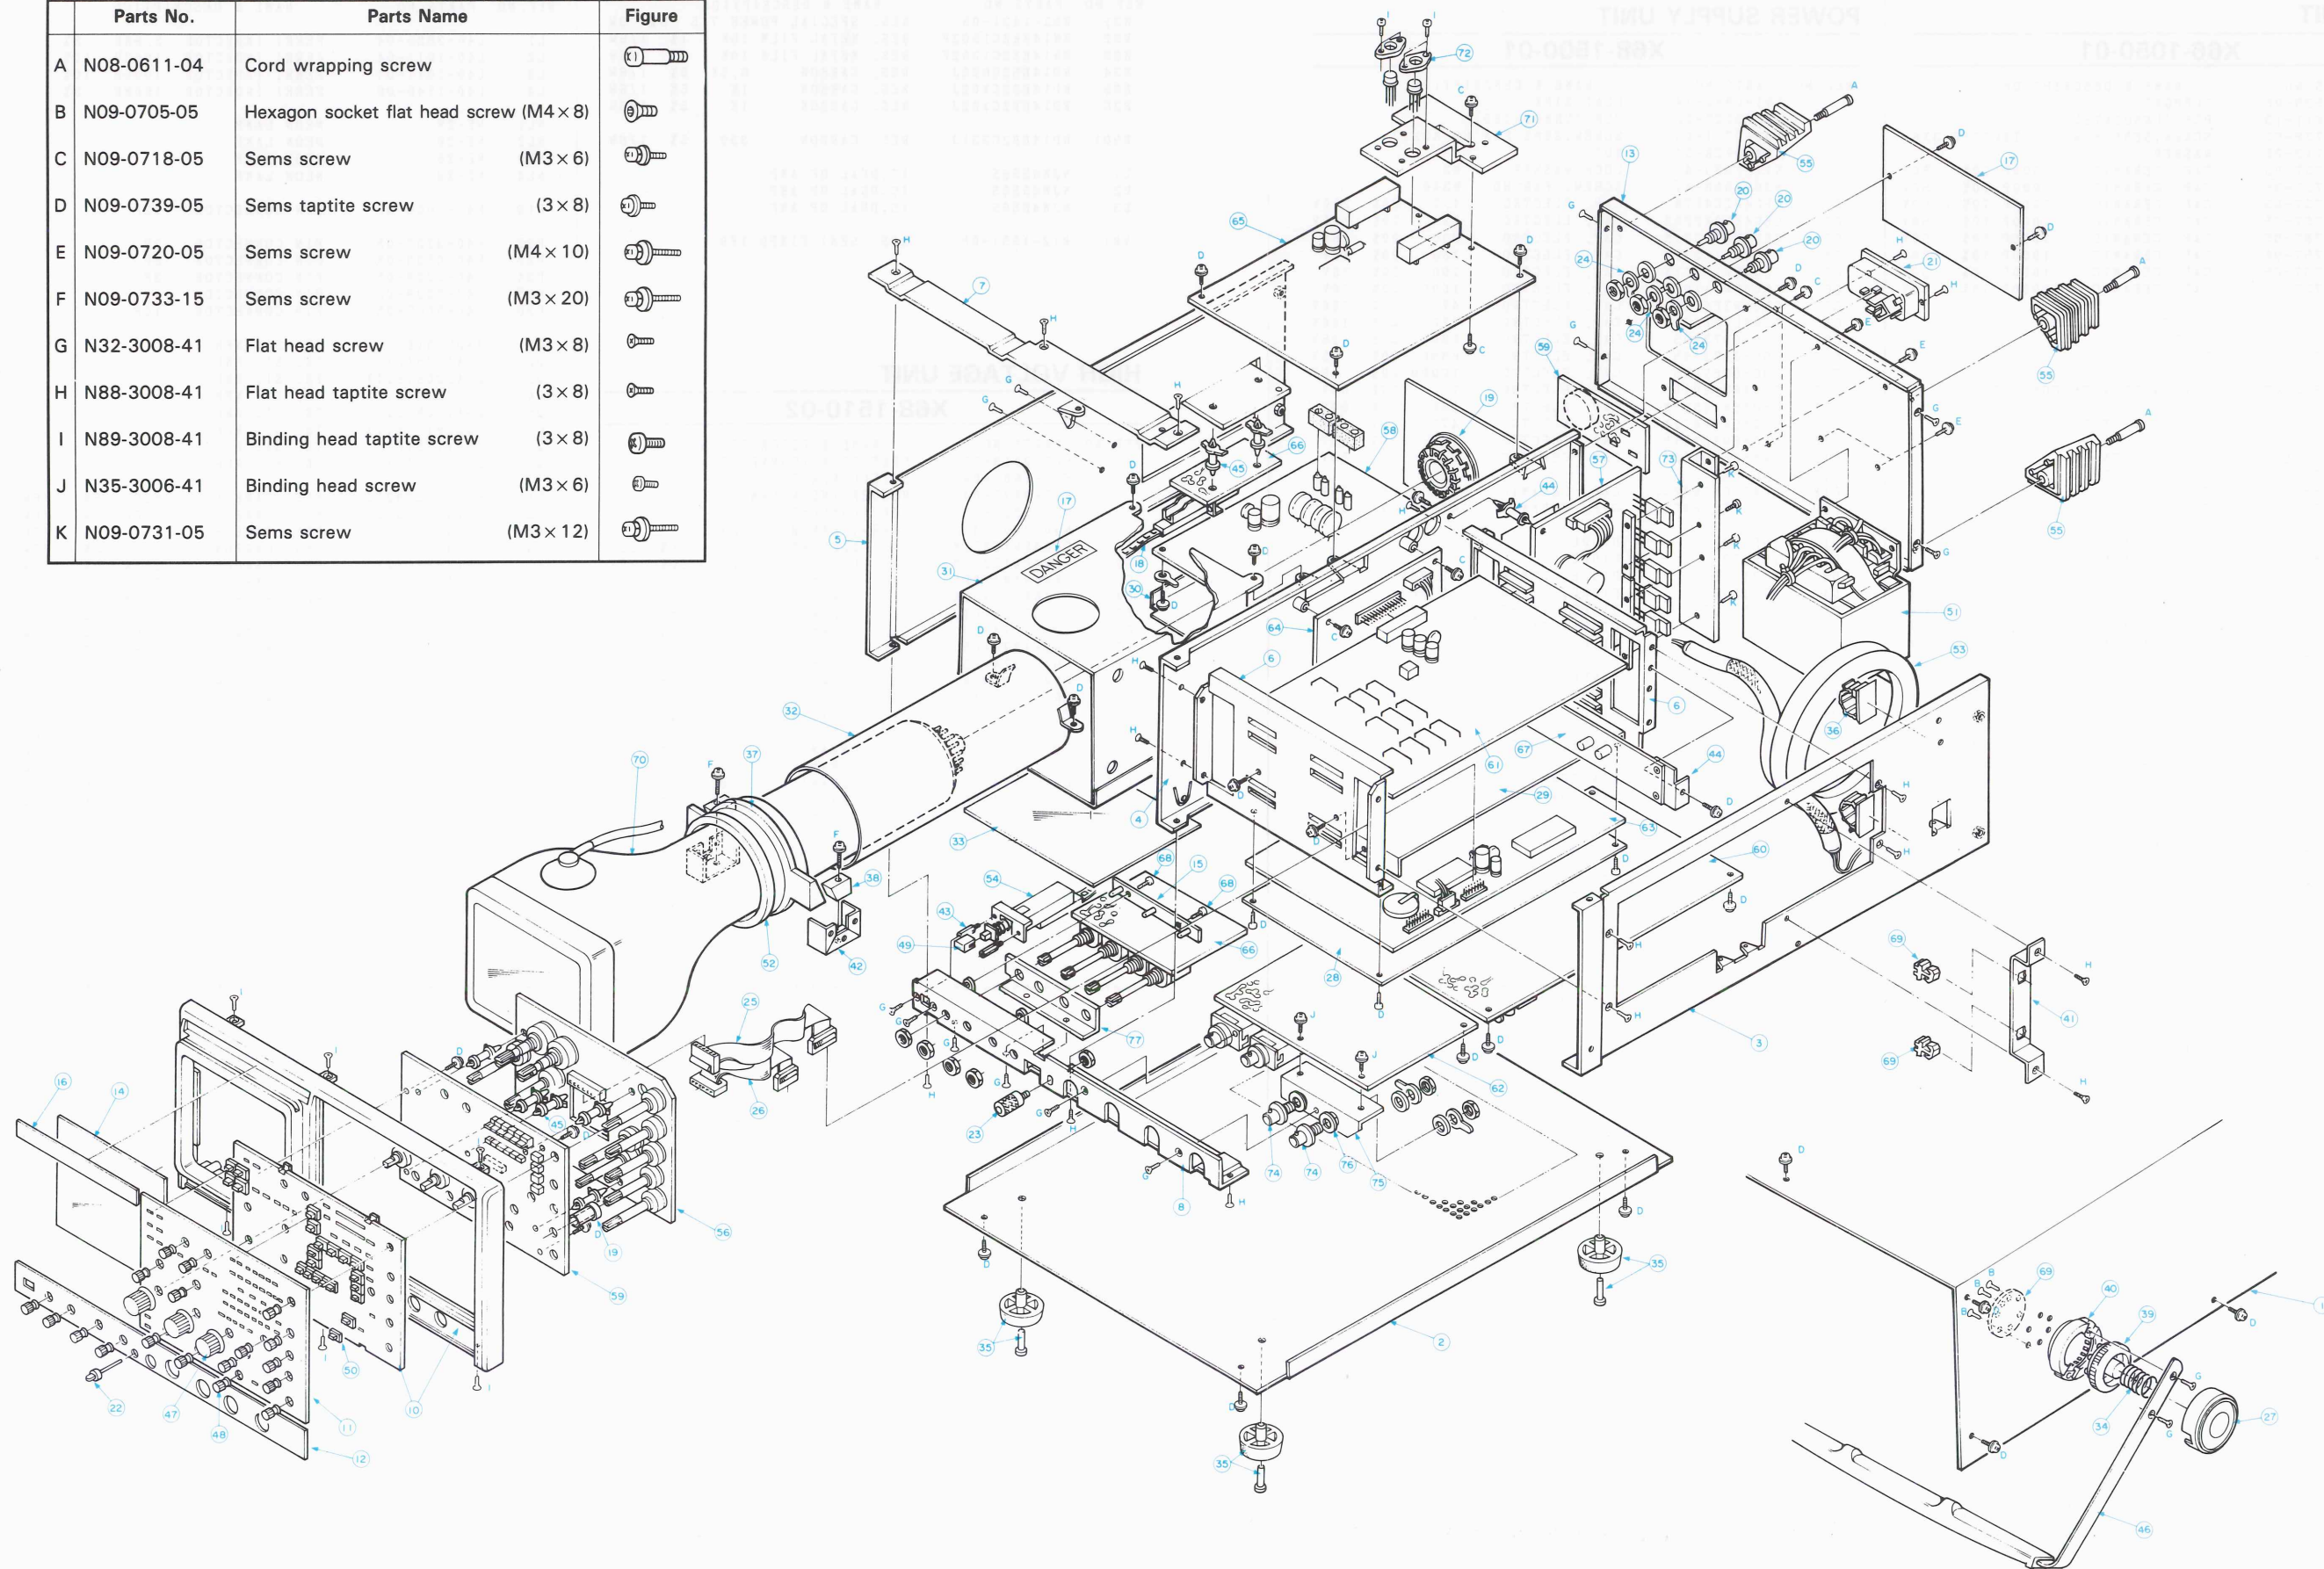

PARTS LIST

PANEL UNIT

X66-1050-01

REF. NO	PARTS NO	NAME & DESCRIPTION
	J61-0529-05	SUPPORT
	J73-0011-13	PCB (UNMOUNTED)
	N09-0739-05	SCREW,SEMS BINDING TAPTITE 3X8
	N19-0713-05	WASHER
C1	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C2	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C3	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C4	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C5	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C6	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C7	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C8	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
D1	MA700	DIODE
D2	MA700	DIODE
D3	1SS132	DIODE
J31	E31-5555-05	LEAD WIRE WITH CONNECTOR
P2	E40-7038-05	PIN CONNECTOR 26P
Q1	2SC2785(F)	TR. SI, NPN
Q2	2SA1175(F)	TR. SI, PNP
Q3	2SC2785(F)	TR. SI, NPN
Q4	2SA1175(F)	TR. SI, PNP
Q5	NO USE	
Q6	2SC2785(F)	TR. SI, NPN
Q7	2SC2785(F)	TR. SI, NPN
R1	RN14BK2C2202F	RES. METAL FILM 22K 1% 1/6W
R2	RN14BK2C9103F	RES. METAL FILM 910K 1% 1/6W
R3	RN14BK2C9103F	RES. METAL FILM 910K 1% 1/6W
R4	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R5	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R6	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R7	RN14BK2C2202F	RES. METAL FILM 22K 1% 1/6W
R8	RN14BK2C9103F	RES. METAL FILM 910K 1% 1/6W
R9	RN14BK2C9103F	RES. METAL FILM 910K 1% 1/6W
R10	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R11	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R12	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R13	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
R14	RN14BK2C1802F	RES. METAL FILM 18K 1% 1/6W
R15	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R16	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R17	RN14BK2C4303F	RES. METAL FILM 430K 1% 1/6W
R18	RN14BK2C5102F	RES. METAL FILM 51K 1% 1/6W
R19	RN14BK2C3003F	RES. METAL FILM 300K 1% 1/6W
R20	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R21	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R22	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R23	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
U1	NJM4558D	IC,DUAL OP AMP
VR1	R05-3525-15	V. R. 20K B
VR2	R05-3525-15	V. R. 20K B
VR3	R05-3525-15	V. R. 20K B
VR4	R05-3525-15	V. R. 20K B
VR5	R05-3525-15	V. R. 20K B
VR6	R05-3525-15	V. R. 20K B
VR7	R05-3525-15	V. R. 20K B
VR8	R05-3525-15	V. R. 20K B
VR9	R05-3525-15	V. R. 20K B
VR10	R05-3525-15	V. R. 20K B
VR11	R10-3504-15	ENDLESS VOLUME 2X10K B
VR12	R10-3504-15	ENDLESS VOLUME 2X10K B
VR13	R10-3504-15	ENDLESS VOLUME 2X10K B
VR14	R05-3525-15	V. R. 20K B

POWER SUPPLY UNIT

X68-1500-01

REF. NO	PARTS NO	NAME & DESCRIPTION
	F01-0865-14	HEAT SINK
	J25-5227-13	PCB (UNMOUNTED)
	N09-0731-05	SCREW,SEMS PAN HD M3X12
	N14-0626-04	NUT
	N17-1030-41	LOCK WASHER M3
	N30-3008-41	SCREW, PAN HD M3X8
C1	CE04W2E4R7M	CAP. ELECTRO 4.7 20% 250V
C2	CE04EW2A220M	CAP. ELECTRO 22 20% 100V
C3	CE04EW1C331M	CAP. ELECTRO 330 20% 16V
C4	CE04EW1C331M	CAP. ELECTRO 330 20% 16V
C5	CE04EW1E101M	CAP. ELECTRO 100 20% 25V
C6	CE04EW1A102M	CAP. ELECTRO 1000 20% 10V
C7	CE04W2E470M	CAP. ELECTRO 47 20% 250V
C8	CE04EW2A471M	CAP. ELECTRO 470 20% 100V
C9	C90-0973-05	CAP. ELECTRO 6800 20% 25V
C10	C90-0973-05	CAP. ELECTRO 6800 20% 25V
C11	C90-0982-05	CAP. ELECTRO 10000 20% 16V
C12	CE04BW1H010M	CAP. ELECTRO 1 20% 50V
C13	CE04EW1H331M	CAP. ELECTRO 330 20% 50V
C14	CE04EW1V471M	CAP. ELECTRO 470 20% 35V
C15	CE04EW1E101M	CAP. ELECTRO 100 20% 25V
C16	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C17	NO USE	
C18	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C19	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
D1	1SS132	DIODE
D2	1SS132	DIODE
D3	MTZ13JB	DIODE, ZENER 12.88V
D4	MTZ13JB	DIODE, ZENER 12.88V
D5	MTZ5.1JB	DIODE, ZENER 5.07V
D6	S1VB60	DIODE, STACK
D7	S1VB60	DIODE, STACK
D8	S4VB40F	DIODE, BRIDGE
D9	S4VB40F	DIODE, BRIDGE
D10	1SR35-200A	DIODE
D11	1SR35-200A	DIODE
D12	MTZ20JC	DIODE, ZENER 19.73V
D13	MTZ7.5JA	DIODE, ZENER 7.04V
P17	E40-5068-05	PIN CONNECTOR 11P
P18	E40-7040-05	PIN CONNECTOR 13P
Q1	2SD1409	TR. SI, NPN
Q2	2SC2271(D)	TR. SI, NPN
Q3	2SD1409	TR. SI, NPN
Q4	2SC2271(D)	TR. SI, NPN
Q5	2SB1133(S)	TR. SI, PNP
Q6	2SD1666(S)	TR. SI, NPN
Q7	2SB1133(S)	TR. SI, PNP
Q8	2SA684(Q)	TR. SI, PNP
R1	RN14BK2C1302F	RES. METAL FILM 13K 1% 1/6W
R2	RN14BK2C1803F	RES. METAL FILM 180K 1% 1/6W
R3	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R4	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R5	RN14BK2C1203F	RES. METAL FILM 120K 1% 1/6W
R6	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R7	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R8	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R9	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R10	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R11	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R12	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R13	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R14	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R15	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R16	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R17	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R18	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R19	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R20	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R21	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R22	NO USE	
R23	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R24	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R25	R92-1402-05	RES. SPECIAL POWER 24 5% 2W
R26	NO USE	
R27	R92-1402-05	RES. SPECIAL POWER 24 5% 2W
R28	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R29	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R30	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R31	R92-1421-05	RES. SPECIAL POWER 7.5 5% 3W
R32	RN14BK2C1502F	RES. METAL FILM 15K 1% 1/6W
R33	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R34	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R35	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R36	RD14BB2C102J	RES. CARBON 1K 5% 1/6W

R901	RD14BB2C331J	RES. CARBON 330 5% 1/6W
------	--------------	-------------------------

U1	NJM4556S	IC,DUAL OP AMP
U2	NJM4556S	IC,DUAL OP AMP
U3	NJM4556S	IC,DUAL OP AMP

VR1	R12-1551-05	RES. SEMI FIXED 1KB
-----	-------------	---------------------

HIGH VOLTAGE UNIT

X68-1510-02

REF. NO	PARTS NO	NAME & DESCRIPTION
	F01-0813-05	HEAT SINK (CONVERTER)
	F10-1601-04	SHIELD PLATE
	F15-0727-04	HOLDER (NEON LAMP)
	J25-5226-13	PCB (UNMOUNTED)
	N30-3006-41	SCREW, PAN HD M3X6
C1	CE04EW1E221M	CAP. ELECTRO 220 20% 25V
C2	CE04EW1E221M	CAP. ELECTRO 220 20% 25V
C3	CK45B1H472K	CAP. CERAMIC 4700P 10% 50V
C4	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V
C5	CC45S12H101J	CAP. CERAMIC 100P 5% 500V
C6	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C7	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C8	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C9	CK45B2H102K	CAP. CERAMIC 1000P 10% 500V
C10	CF92V1H224J	CAP. POLYESTER 0.22 5% 50V
C11	CF92V1H224J	CAP. POLYESTER 0.22 5% 50V
C12	CK45E3F102P	CAP. CERAMIC 1000P 3.1K
C13	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C14	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C15	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C16	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C17	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C18	CK45B2H102K	CAP. CERAMIC 1000P 10% 500V
C19	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C20	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C21	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V
C22	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V
C23	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C24	CC45CH2H020C	CAP. CERAMIC 2P 0.25P 500V
C25	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V
C26	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C27	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C31	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C32	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C33	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C34	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K
C35	CE04W2C2R2M	CAP. ELECTRO 2.2 20% 160V
C36	CE04W2C2R2M	CAP. ELECTRO 2.2 20% 160V
C37	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C38	CE04EW1C101M	CAP. ELECTRO 100 20% 16V
C39	CE04EW1C101M	CAP. ELECTRO 100 20% 16V
C40	CE04EW1C101M	CAP. ELECTRO 100 20% 16V
C43	CE04EW0J102M	CAP. ELECTRO 1000 20% 6.3V
D1	1SS132	DIODE
D2	1SS132	DIODE
D3	1SS132	DIODE
D4	1SR35-200A	DIODE
D5	1SR35-200A	DIODE
D6	1SS83	DIODE
D7	1SS83	DIODE
D8	1SR35-200A	DIODE
D9	1SR35-200A	DIODE
D10	1SS83	DIODE
D11	1SS132	DIODE
D12	1SS132	DIODE
D13	1SS83	DIODE

REF. NO	PARTS NO	NAME & DESCRIPTION
L1	L40-3825-04	FERRI INDUCTOR 3.9MH 5%
L2	L40-1011-04	FERRI INDUCTOR 100UH 10%
L3	L40-1011-04	FERRI INDUCTOR 100UH 10%
L4	L40-1545-06	FERRI INDUCTOR 150MH 5%

NL1	NE-2B	NEON LAMP
NL2	NE-2B	NEON LAMP
NL3	NE-2B	NEON LAMP
NL4	NE-2B	NEON LAMP

P19	E40-5069-05	PIN CONNECTOR 12P
-----	-------------	-------------------

P22	E40-3237-05	PIN CONNECTOR 2P
P23	E40-0503-05	PIN CONNECTOR 5P
P24	E40-3238-05	PIN CONNECTOR 3P
P25	E40-3239-05	PIN CONNECTOR 4P
P26	E40-5067-05	PIN CONNECTOR 10P

Q1	2SD613(E)	TR. SI, NPN
Q2	2SA1175(F)	TR. SI, PNP
Q3	2SA1208(S,T)	TR. SI, PNP
Q4	2SC2910(S,T)	TR. SI, NPN
Q5	2SA1209(S,T)	TR. SI, PNP
Q6	2SC2911(S,T)	TR. SI, NPN
Q7	2SA1175(F)	TR. SI, PNP
Q8	2SC3315(C)	TR. SI, NPN

R1	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R2	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R3	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R4	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R5	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W

PARTS LIST

SWITCH UNIT

X69-1150-02

REF. NO	PARTS NO	NAME & DESCRIPTION		
	J73-0012-03	PCB (UNMOUNTED)		
C4	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C5	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C6	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C7	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C8	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C9	CK45F1H103Z	CAP. CERAMIC	0.01	50V
D38	B30-0964-05	LED		
D39	B30-0965-05	LED		
D40	B30-0964-05	LED		
D41	B30-0965-05	LED		
D42	B30-0964-05	LED		
D43	B30-0965-05	LED		
D44	B30-0965-05	LED		
D45	1SS132	DIODE		
D46	1SS132	DIODE		
D47	1SS132	DIODE		
D48	1SS132	DIODE		
D49	1SS132	DIODE		
P1	E40-7036-05	PIN CONNECTOR	20P	
P37	E40-3237-05	PIN CONNECTOR	2P	
R15	R90-0652-05	RES. NETWORK	6X10K 5%	
R16	R90-0653-05	RES. NETWORK	8X10K 5%	
R17	R90-0614-05	RES. NETWORK	8X390 5%	
R18	R90-0639-05	RES. NETWORK	6X390 5%	
R19	R90-0639-05	RES. NETWORK	6X390 5%	
R20	R90-0639-05	RES. NETWORK	6X390 5%	
R21	RD14BB2C391J	RES. CARBON	390 5% 1/6W	
R22	RD14BB2C391J	RES. CARBON	390 5% 1/6W	
R23	RD14BB2C391J	RES. CARBON	390 5% 1/6W	
R24	RD14BB2C391J	RES. CARBON	390 5% 1/6W	
S1	W02-0497-05	ROTARY ENCODER		
S2	W02-0497-05	ROTARY ENCODER		
S3	W02-0497-05	ROTARY ENCODER		
S4	S40-2525-05	SWITCH		
S5	S40-2525-05	SWITCH		
S6	S40-2525-05	SWITCH		
S7	S40-2525-05	SWITCH		
S8	S40-2525-05	SWITCH		
S9	S40-2525-05	SWITCH		
S10	S40-2525-05	SWITCH		
S11	S40-2525-05	SWITCH		
S12	S40-2525-05	SWITCH		
S13	S40-2525-05	SWITCH		
S14	S40-2525-05	SWITCH		
S15	S40-2525-05	SWITCH		
S16	S40-2525-05	SWITCH		
S17	S40-2525-05	SWITCH		
S18	S40-2525-05	SWITCH		
S19	S40-2525-05	SWITCH		
S20	S40-2525-05	SWITCH		
S21	S40-2525-05	SWITCH		
S22	S40-2525-05	SWITCH		
S23	S40-2525-05	SWITCH		
S24	S40-2525-05	SWITCH		
S25	S40-2525-05	SWITCH		
S26	S40-2525-05	SWITCH		
S27	S40-2525-05	SWITCH		
S28	S40-2525-05	SWITCH		
S29	S40-2525-05	SWITCH		
S30	S40-2525-05	SWITCH		
S31	S40-2525-05	SWITCH		
S32	S40-2525-05	SWITCH		
S33	S40-2525-05	SWITCH		
S34	S40-2525-05	SWITCH		
S35	S40-2525-05	SWITCH		
S36	S40-2525-05	SWITCH		
S37	S40-2525-05	SWITCH		
U2	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		
U3	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		
U4	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		
U5	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		
U6	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		
U7	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		
U8	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		
U9	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH		

VERTICAL PREAMP UNIT

X73-1760-01

REF. NO	PARTS NO	NAME & DESCRIPTION		
	E31-5576-05	WIRE ASS'Y (GND TO GND)		
	E31-5577-05	WIRE ASS'Y (NO. A, B, C, D)		
	F07-0949-04	COVER		
	J61-0408-05	WIRE WRAPPING BAND		
	J73-0010-02	PCB (UNMOUNTED)		
C1	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C2	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C3	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C4	CE04EW1A101M	CAP. ELECTRO	100 20%	10V
C5	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C6	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C7	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C8	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C9	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C19	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C20	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C21	CE04EW1C100M	CAP. ELECTRO	10 20%	16V
C22	CE04EW1C100M	CAP. ELECTRO	10 20%	16V
C23		NO USE		
C24	CE04EW1C470M	CAP. ELECTRO	47 20%	16V
C25	CQ92FM1H103K	CAP. NYLAR	0.01 10%	50V
C26	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C27	CE04EW1C470M	CAP. ELECTRO	47 20%	16V
C28	CE04EW1C470M	CAP. ELECTRO	47 20%	16V
C29	CC45FCH1H470J	CAP. CERAMIC	47P 5%	50V
C30	CC45FCH1H470J	CAP. CERAMIC	47P 5%	50V
C31	CC45FCH1H470J	CAP. CERAMIC	47P 5%	50V
C32	CC45FCH1H470J	CAP. CERAMIC	47P 5%	50V
C33	CE04EW1C470M	CAP. ELECTRO	47 20%	16V
C34	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C35	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C36	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C37	CE04EW1C470M	CAP. ELECTRO	47 20%	16V
C38	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C39	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C40	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C41	CC45CH1H101J	CAP. CERAMIC	100P 5%	50V
C42	CC45CH1H101J	CAP. CERAMIC	100P 5%	50V
C43	CC45CH1H101J	CAP. CERAMIC	100P 5%	50V
C44	CC45CH1H101J	CAP. CERAMIC	100P 5%	50V
C45	CQ92FM1H104K	CAP. NYLAR	0.1 10%	50V
C46	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C103	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V
C104	CC45FCH1H050C	CAP. CERAMIC	5P 0.25P	50V
C105		NO USE		
C106	CC45FCH1H060D	CAP. CERAMIC	6P 0.5P	50V
C107	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C108	CC45FCH1H150J	CAP. CERAMIC	15P 5%	50V
C109	CK45B1H102K	CAP. CERAMIC	1000P 10%	50V
C110	CC45CH1H010C	CAP. CERAMIC	1P 0.25P	50V
C111	CC45FCH1H030C	CAP. CERAMIC	3P 0.25P	50V
C112	CC45CH1H010C	CAP. CERAMIC	1P 0.25P	50V
C113	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V
C114	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V
C203	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V
C204	CC45FCH1H050C	CAP. CERAMIC	5P 0.25P	50V
C205		NO USE		
C206	CC45FCH1H060D	CAP. CERAMIC	6P 0.5P	50V
C207		NO USE		
C208	CC45FCH1H150J	CAP. CERAMIC	15P 5%	50V
C209	CK45B1H102K	CAP. CERAMIC	1000P 10%	50V
C210	CC45CH1H010C	CAP. CERAMIC	1P 0.25P	50V
C211	CC45FCH1H030C	CAP. CERAMIC	3P 0.25P	50V
C212	CC45CH1H010C	CAP. CERAMIC	1P 0.25P	50V
C213	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V
C214	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V
C301	CK45FF1H103Z	CAP. CERAMIC	0.01	50V
C401	CK45F1H103Z	CAP. CERAMIC	0.01	50V
C402	CQ92M1H104K	CAP. NYLAR	0.1 10%	50V
C501	CC45FCH1H680J	CAP. CERAMIC	68P 5%	50V
C502	CC45FCH1H680J	CAP. CERAMIC	68P 5%	50V
C503	CC45CH1H120J	CAP. CERAMIC	12P 5%	50V
C504	CC45CH1H120J	CAP. CERAMIC	12P 5%	50V
C505	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V
C506	CC45FCH1H020C	CAP. CERAMIC	2P 0.25P	50V

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
C509	CC45SL1H471J	CAP. CERAMIC 470P 5% 50V	D506	1SS132	DIODE
C510	CC45SL1H471J	CAP. CERAMIC 470P 5% 50V	D507	1SS132	DIODE
C511	CQ92M1H104K	CAP. NYLAR 0.1 10% 50V	D508	1SS132	DIODE
C512	NO USE		D509	1SS132	DIODE
C513	CC45FCH1H040C	CAP. CERAMIC 4P 0.25P 50V	D510	MT210JC	DIODE, ZENER 9.95V
C514	CC45FCH1H040C	CAP. CERAMIC 4P 0.25P 50V	D511	1SS132	DIODE
C515	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	D512	MTZ5.1JB	DIODE, ZENER 5.07V
C516	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	D601	DAP401	DIODE ARRAY
C517	CQ92FM1H103K	CAP. NYLAR 0.01 10% 50V	D602	DAP401	DIODE ARRAY
C518	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V	D603	1SS132	DIODE
C519	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	K101	S51-2508-05	RELAY
C520	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	K102	S51-2508-05	RELAY
C601	CC45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V	K201	S51-2508-05	RELAY
C602	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V	K202	S51-2508-05	RELAY
C603	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V	P5	E40-3238-05	PIN CONNECTOR 3P
C604	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V	P6	E40-3238-05	PIN CONNECTOR 3P
C605	CE04HW1E1010M	CAP. ELECTRO 1 20% 50V	P7	E38-0089-05	WIRE ASS'Y
C606	CC45CH1H010C	CAP. CERAMIC 1P 0.25P 50V	P8	E38-0089-05	WIRE ASS'Y
C607	CE04HW1E220M	CAP. ELECTRO 22 20% 25V	P9	E40-3238-05	PIN CONNECTOR 3P
C608	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	P10	E40-7039-05	PIN CONNECTOR 20P
C609	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	P11	E40-3238-05	PIN CONNECTOR 3P
C610	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	P30	E40-3237-05	PIN CONNECTOR 2P
C611	NO USE		Q1	2SA1005(K)	TR. S1, PNP
C612	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V	Q2	2SA1005(K)	TR. S1, PNP
C701	CC45CH1H470J	CAP. CERAMIC 47P 5% 50V	Q3	2SA1005(K)	TR. S1, PNP
C702	CC45CH1H470J	CAP. CERAMIC 47P 5% 50V	Q4	2SA1005(K)	TR. S1, PNP
C703	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	Q5	2SA1005(K)	TR. S1, PNP
C704	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	Q6	2SA1005(K)	TR. S1, PNP
C705	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V	Q7	2SA1005(K)	TR. S1, PNP
C706	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V	Q8	2SA1005(K)	TR. S1, PNP
C707	CQ92M1H104K	CAP. NYLAR 0.1 10% 50V	Q101	2SC4072	TR. S1, NPN
C708	NO USE		Q102	2SC4072	TR. S1, NPN
C709	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	Q103	2SC3779(D)	TR. S1, NPN
C710	NO USE		Q104	2SC3779(D)	TR. S1, NPN
C711	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	Q105	2SC3315(C)	TR. S1, NPN
C714	CE04EW1A101M	CAP. ELECTRO 100 20% 10V	Q106	2SC3315(C)	TR. S1, NPN
C715	CE04EW1A101M	CAP. ELECTRO 100 20% 10V	Q107	2SC3315(C)	TR. S1, NPN
C716	CE04EW1C330M	CAP. ELECTRO 33 20% 16V	Q108	2SA1161	TR. S1, PNP
C720	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V	Q109	2SA1161	TR. S1, PNP
C721	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V	Q110	2SC4049	TR. S1, NPN
C801	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	Q111	2SC4049	TR. S1, NPN
C802	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	Q112	2SC3779(D)	TR. S1, NPN
C803	CC45CH1H0R5C	CAP. CERAMIC 0.5P 0.25P 50V	Q113	2SC3779(D)	TR. S1, NPN
C804	CC45CH1H0R5C	CAP. CERAMIC 0.5P 0.25P 50V	Q114	2SC3779(D)	TR. S1, NPN
C805	CC45CH1H330J	CAP. CERAMIC 33P 5% 50V	Q115	2SC3779(D)	TR. S1, NPN
C806	CC45SL1H470J	CAP. CERAMIC 47P 5% 50V	Q116	2SC2785(F)	TR. S1, NPN
C807	CC45SL1H470J	CAP. CERAMIC 47P 5% 50V	Q117	2SC3779(D)	TR. S1, NPN
C808	CQ92M1H104K	CAP. NYLAR 0.1 10% 50V	Q118	2SC3779(D)	TR. S1, NPN
C809	CQ92M1H104K	CAP. NYLAR 0.1 10% 50V	Q119	2SC3779(D)	TR. S1, NPN
C810	CQ92FM1H473K	CAP. NYLAR 0.047 10% 50V	Q120	2SC3779(D)	TR. S1, NPN
C811	CQ92FM1H473K	CAP. NYLAR 0.047 10% 50V	Q201	2SC4072	TR. S1, NPN
C812	CQ92FM1H473K	CAP. NYLAR 0.047 10% 50V	Q202	2SC4072	TR. S1, NPN
C813	CQ92FM1H473K	CAP. NYLAR 0.047 10% 50V	Q203	2SC3779(D)	TR. S1, NPN
C901	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q204	2SC3779(D)	TR. S1, NPN
C902	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q205	2SC3315(C)	TR. S1, NPN
C903	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q206	2SC3315(C)	TR. S1, NPN
C904	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q207	2SC3315(C)	TR. S1, NPN
C905	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q208	2SA1161	TR. S1, PNP
C906	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q209	2SA1161	TR. S1, PNP
C907	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q210	2SC4049	TR. S1, NPN
C908	CC45CH1H040C	CAP. CERAMIC 4P 0.25P 50V	Q211	2SC4049	TR. S1, NPN
C909	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	Q212	2SC3779(D)	TR. S1, NPN
C910	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	Q213	2SC3779(D)	TR. S1, NPN
C911	CQ92M1H103K	CAP. NYLAR 0.01 10% 50V	Q214	2SC3779(D)	TR. S1, NPN
C912	CC45CH1H030C	CAP. CERAMIC 3P 0.25P 50V	Q215	2SC3779(D)	TR. S1, NPN
C913	CC45CH1H030C	CAP. CERAMIC 3P 0.25P 50V	Q216	2SC2785(F)	TR. S1, NPN
D101	1SS132	DIODE	Q217	2SC3779(D)	TR. S1, NPN
D102	1SS132	DIODE	Q218	2SC3779(D)	TR. S1, NPN
D201	1SS132	DIODE	Q219	2SC3779(D)	TR. S1, NPN
D202	1SS132	DIODE	Q220	2SC3779(D)	TR. S1, NPN
D501	1SS132	DIODE	Q301	2SC3779(D)	TR. S1, NPN
D502	1SS132	DIODE	Q302	2SC3779(D)	TR. S1, NPN
D503	1SS132	DIODE	Q303	2SC3779(D)	TR. S1, NPN
D504	1SS132	DIODE	Q304	2SC3779(D)	TR. S1, NPN
D505	1SS132	DIODE	Q401	2SC3779(D)	TR. S1, NPN
			Q402	2SC3779(D)	TR. S1, NPN

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			
Q403	2SC3779(D)	TR. SI, NPN			
Q404	2SC3779(D)	TR. SI, NPN			
Q501.	2SA1206	TR. SI, PNP			
Q502	2SA1206	TR. SI, PNP			
Q503	2SC3315(C)	TR. SI, NPN			
Q504	2SC3315(C)	TR. SI, NPN			
Q505	2SA1206	TR. SI, PNP			
Q506	2SA1206	TR. SI, PNP			
Q507	2SC3315(C)	TR. SI, NPN			
Q508	2SC3315(C)	TR. SI, NPN			
Q509	2SA1206	TR. SI, PNP			
Q510	2SA1206	TR. SI, PNP			
Q511	2SC3315(C)	TR. SI, NPN			
Q512	2SC3315(C)	TR. SI, NPN			
Q513	2SA1206	TR. SI, PNP			
Q514	2SA1206	TR. SI, PNP			
Q515	2SC3315(C)	TR. SI, NPN			
Q516	2SC3315(C)	TR. SI, NPN			
Q517	NO USE				
Q518	2SC3732(L)	TR. SI, NPN			
Q519	2SA1206	TR. SI, PNP			
Q520	2SA1206	TR. SI, PNP			
Q521	2SA1175(F)	TR. SI, PNP			
Q522	2SA1175(F)	TR. SI, PNP			
Q523	2SA1175(F)	TR. SI, PNP			
Q524	2SC3779(D)	TR. SI, NPN			
Q525	2SC3779(D)	TR. SI, NPN			
Q526	2SA1206	TR. SI, PNP			
Q527	2SA1206	TR. SI, PNP			
Q528	2SA1161	TR. SI, PNP			
Q529	2SA1161	TR. SI, PNP			
Q601	2SA1206	TR. SI, PNP			
Q602	2SA1206	TR. SI, PNP			
Q603	2SC3779(D)	TR. SI, NPN			
Q604	2SA1206	TR. SI, PNP			
Q605	2SA1206	TR. SI, PNP			
Q606	2SA1206	TR. SI, PNP			
Q607	2SC3779(D)	TR. SI, NPN			
Q608	2SA1206	TR. SI, PNP			
Q609	2SA1206	TR. SI, PNP			
Q610	2SA1206	TR. SI, PNP			
Q611	2SC3779(D)	TR. SI, NPN			
Q612	2SA1206	TR. SI, PNP			
Q613	2SA1206	TR. SI, PNP			
Q614	2SA1206	TR. SI, PNP			
Q615	2SC3779(D)	TR. SI, NPN			
Q616	2SA1206	TR. SI, PNP			
Q617	2SA1161	TR. SI, PNP			
Q618	2SA1161	TR. SI, PNP			
Q619	2SA1175(F)	TR. SI, PNP			
Q620	2SA1175(F)	TR. SI, PNP			
Q621	2SC3779(D)	TR. SI, NPN			
Q622	2SC3779(D)	TR. SI, NPN			
Q623	2SC2785(F)	TR. SI, NPN			
Q624	2SC3315(C)	TR. SI, NPN			
Q625	2SC3315(C)	TR. SI, NPN			
Q626	2SC3315(C)	TR. SI, NPN			
Q627	2SC3315(C)	TR. SI, NPN			
Q628	2SC3315(C)	TR. SI, NPN			
Q629	2SC3315(C)	TR. SI, NPN			
Q630	2SC3315(C)	TR. SI, NPN			
Q631	2SC3315(C)	TR. SI, NPN			
Q632	2SC3779(D)	TR. SI, NPN			
Q633	2SC3779(D)	TR. SI, NPN			
R1	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R2	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R3	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R4	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R5	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R6	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R7	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R8	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R9	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R10	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R11	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R12	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R13	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R14	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R101	RD14BB2C751J	RES. CARBON	750	5%	1/6W
R102	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R103	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R104	RD14BB2C221J	RES. CARBON	220	5%	1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION			
R105	NO USE				
R106	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R107	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R108	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R109	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R110	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R111	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R112	RD14BB2C820J	RES. CARBON	82	5%	1/6W
R117	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R118	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R119	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R120	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R121	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R122	RD14BB2C750J	RES. CARBON	75	5%	1/6W
R123	RD14BB2C301J	RES. CARBON	300	5%	1/6W
R124	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R125	RD14BB2C471J	RES. CARBON	470	5%	1/6W
R126	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R127	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R128	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W
R129	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W
R130	NO USE				
R131	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W
R132	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W
R133	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R134	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R135	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R136	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R137	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W
R138	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W
R139	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R140	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R141	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W
R142	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W
R143	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R144	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R145	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W
R146	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W
R147	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R148	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R149	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R150	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R151	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R152	RD14BB2C680J	RES. CARBON	68	5%	1/6W
R153	RD14BB2C680J	RES. CARBON	68	5%	1/6W
R154	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R155	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R156	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R157	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R158	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W
R159	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W
R160	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W
R161	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R162	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R163	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R164	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R167	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R168	NO USE				
R169	RN14BK2C91ROF	RES. METAL FILM	91.0	1%	1/6W
R170	RN14BK2C91ROF	RES. METAL FILM	91.0	1%	1/6W
R171	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R172	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R173	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R174	RN14BK2C4702F	RES. METAL FILM	47K	1%	1/6W
R175	RN14BK2C4702F	RES. METAL FILM	47K	1%	1/6W
R176	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
R177	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W
R178	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W
R179	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R180	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R181	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W
R182	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W
R183	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R184	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R185	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R186	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R187	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R190	RD14BB2C270J	RES. CARBON	27	5%	1/6W
R201	RD14BB2C751J	RES. CARBON	750	5%	1/6W
R202	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R203	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R204	NO USE				

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			
R205	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R206	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R207	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R208	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R209	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R210	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R211	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R212	RD14BB2C820J	RES. CARBON	82	5%	1/6W
R217	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R218	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R219	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R220	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R221	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R222	RD14BB2C750J	RES. CARBON	75	5%	1/6W
R223	RD14BB2C301J	RES. CARBON	300	5%	1/6W
R224	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R225	RD14BB2C471J	RES. CARBON	470	5%	1/6W
R226	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R227	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R228	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W
R229	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W
R230	NO USE				
R231	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W
R232	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W
R233	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R234	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R235	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R236	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R237	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W
R238	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W
R239	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R240	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R241	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W
R242	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W
R243	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R244	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R245	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W
R246	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W
R247	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R248	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R249	NO USE				
R250	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R251	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R252	RD14BB2C680J	RES. CARBON	68	5%	1/6W
R253	RD14BB2C680J	RES. CARBON	68	5%	1/6W
R254	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R255	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R256	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R257	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R258	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W
R259	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W
R260	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W
R261	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R262	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R263	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R264	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R267	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R268	NO USE				
R269	RN14BK2C91R0F	RES. METAL FILM	91.0	1%	1/6W
R270	RN14BK2C91R0F	RES. METAL FILM	91.0	1%	1/6W
R271	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R272	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R273	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R274	RN14BK2C4702F	RES. METAL FILM	47K	1%	1/6W
R275	RN14BK2C4702F	RES. METAL FILM	47K	1%	1/6W
R276	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W
R277	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W
R278	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W
R279	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R280	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R281	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W
R282	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W
R283	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R284	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R285	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R286	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R287	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R290	RD14BB2C270J	RES. CARBON	27	5%	1/6W
R301	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R302	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R303	RD14BB2C220J	RES. CARBON	22	5%	1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION			
R304	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R305	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W
R306	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R307	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R308	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R309	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W
R310	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R311	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R312	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R313	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R314	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R315	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R401	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R402	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R403	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R404	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R405	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W
R406	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R407	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R408	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R409	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W
R410	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R411	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R412	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R413	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R414	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R415	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R501	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R502	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R503	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R504	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R505	RD14BB2C391J	RES. CARBON	390	5%	1/6W
R506	RD14BB2C433J	RES. CARBON	43K	5%	1/6W
R507	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R508	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R509	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R510	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R511	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R512	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R513	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R514	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R515	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R516	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R517	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R518	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R519	RD14BB2C391J	RES. CARBON	390	5%	1/6W
R520	RD14BB2C433J	RES. CARBON	43K	5%	1/6W
R521	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R522	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R523	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R524	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R525	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R526	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R527	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R528	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R529	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R530	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R531	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R532	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R533	RD14BB2C391J	RES. CARBON	390	5%	1/6W
R534	RD14BB2C822J	RES. CARBON	8.2K	5%	1/6W
R535	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R536	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R537	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R538	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R539	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R540	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R541	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R542	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R543	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R544	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R545	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R546	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R547	RD14BB2C391J	RES. CARBON	390	5%	1/6W
R548	RD14BB2C822J	RES. CARBON	8.2K	5%	1/6W
R549	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R550	RD14BB2C181J	RES. CARBON	180	5%	1/6W
R551	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R552	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R553	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R554	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R555	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R556	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R557	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R558	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R644	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R559	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R645	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R560	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	R646	RN14BK2C1300F	RES. METAL FILM 130 1% 1/6W
R561	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	R647	NO USE	
R562	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	R648	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R563	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	R649	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R564	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R650	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R565	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R651	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R566	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R652	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R567	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R653	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R568	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R654	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R569	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R655	R90-0657-05	RES. MULTIPLE 8X330 1%
R570	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W	R656	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R571	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W	R657	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R572	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R658	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R573	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R659	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R574	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W	R660	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R575	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W	R661	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R576	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W	R662	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R577	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W	R663	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R578	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W	R664	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R579	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R665	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R580	RD14BB2C113J	RES. CARBON 11K 5% 1/6W	R666	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R581	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	R667	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R582	RD14BB2C393J	RES. CARBON 39K 5% 1/6W	R668	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R583	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	R669	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R584	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	R670	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R585	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W	R671	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R586	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W	R672	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R587	RN14BK2C9190F	RES. METAL FILM 91.0 1% 1/6W	R673	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R588	RN14BK2C9190F	RES. METAL FILM 91.0 1% 1/6W	R674	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R589	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R675	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R590	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R676	E31-2170-05	JUMPING WIRE
R591	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	R677	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R592	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R678	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R593	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R679	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R594	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R680	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R595	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R681	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R596	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R682	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W
R597	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R683	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R598	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R684	RD14BB2C300J	RES. CARBON 30 5% 1/6W
R599	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R685	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R600	NO USE		R686	RD14BB2C111J	RES. CARBON 110 5% 1/6W
R601	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R687	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R602	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R688	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R603	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R689	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R604	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R690	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R605	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R691	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
R606	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R701	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R607	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W	R702	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R608	NO USE		R703	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R609	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R704	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R610	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R705	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W
R611	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R706	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R612	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W	R707	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R613	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R708	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R614	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R709	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R615	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R710	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W
R616	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R711	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R617	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R712	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R618	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R713	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R619	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R714	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R620	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W	R801	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R621	NO USE		R802	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R622	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R803	RD14BB2C561J	RES. CARBON 560 5% 1/6W
R623	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R811	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R624	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R812	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R625	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W	R821	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R626	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R822	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R627	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R901	RD14BB2C560J	RES. CARBON 56 5% 1/6W
R628	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R902	RD14BB2C560J	RES. CARBON 56 5% 1/6W
R629	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	TC101	C05-0469-05	CAP. TRIMMER 10P
R630	RD14BB2C101J	RES. CARBON 100 5% 1/6W	TC201	C05-0469-05	CAP. TRIMMER 10P
R631	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	TC501	C05-0469-05	CAP. TRIMMER 10P
R632	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	TC502	C05-0469-05	CAP. TRIMMER 10P
R633	RN14BK2C1300F	RES. METAL FILM 130 1% 1/6W	TC503	C05-0469-05	CAP. TRIMMER 10P
R634	NO USE		TC504	C05-0469-05	CAP. TRIMMER 10P
R635	RD14BB2C302J	RES. CARBON 3K 5% 1/6W			
R636	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R637	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W			
R638	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W			
R639	RD14BB2C101J	RES. CARBON 100 5% 1/6W			
R640	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R641	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R642	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W			
R643	RD14BB2C101J	RES. CARBON 100 5% 1/6W			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
TH501	SDT100	THERMISTOR
U1	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U2	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U3	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U4	HD74LS42P	IC,BCD TO DECIMAL DECODER
U5	SN74ALS00AN	IC,QUAD 2 INPUT NAND GATE
U6	SN74ALS112AN	IC, DUAL J-K F.F.(WITH PR&CLR)
U7	SN74ALS00AN	IC,QUAD 2 INPUT NAND GATE
U8	SN74ALS112AN	IC, DUAL J-K F.F.(WITH PR&CLR)
U9	SN74ALS00AN	IC,QUAD 2 INPUT NAND GATE
U101	NJM4558D	IC,DUAL OP AMP
U102	KMC03	IC, LINEAR
U201	NJM4558D	IC,DUAL OP AMP
U202	KMC03	IC, LINEAR
VR101	R12-0569-05	RES. SEMI FIXED 100 B
VR102	R12-0569-05	RES. SEMI FIXED 100 B
VR103	R12-2520-05	RES. SEMI FIXED 5KB
VR104	R12-3543-05	RES. SEMI FIXED 20KB
VR201	R12-0569-05	RES. SEMI FIXED 100 B
VR202	R12-0569-05	RES. SEMI FIXED 100 B
VR203	R12-2520-05	RES. SEMI FIXED 5KB
VR204	R12-3543-05	RES. SEMI FIXED 20KB
VR501	R12-0570-05	RES. SEMI FIXED 200 B
VR502	R12-1538-05	RES. SEMI FIXED 1KB
VR503	R12-3543-05	RES. SEMI FIXED 20KB
VR504	R12-0570-05	RES. SEMI FIXED 200 B
VR505	R12-1538-05	RES. SEMI FIXED 1KB
VR506	R12-3543-05	RES. SEMI FIXED 20KB
VR507	R12-0570-05	RES. SEMI FIXED 200 B
VR508	R12-1538-05	RES. SEMI FIXED 1KB
VR509	R12-3543-05	RES. SEMI FIXED 20KB
VR510	R12-0570-05	RES. SEMI FIXED 200 B
VR511	R12-1538-05	RES. SEMI FIXED 1KB
VR512	R12-3543-05	RES. SEMI FIXED 20KB
VR513	R12-3543-05	RES. SEMI FIXED 20KB
VR601	R12-3543-05	RES. SEMI FIXED 20KB
VR602	R12-3543-05	RES. SEMI FIXED 20KB
VR603	R12-3543-05	RES. SEMI FIXED 20KB
VR604	R12-3543-05	RES. SEMI FIXED 20KB

HORIZONTAL UNIT

X74-1480-02

REF. NO	PARTS NO	NAME & DESCRIPTION
	J61-0408-05	WIRE WRAPPING BAND
	J73-0008-02	PCB (UNMOUNTED)
C1	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C2	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
C3	CC45CH1H030C	CAP. CERAMIC 3P 0.25P 50V
C4	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
C5	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C6	CC45CH1H221J	CAP. CERAMIC 220P 5% 50V
C7	CC45FCH1H200J	CAP. CERAMIC 20P 5% 50V
C8	CF92V1H333J	CAP. PLASTIC FILM 0.033 5% 50V
C9	CF92V1H684J	CAP. PLASTIC FILM 0.68 5% 50V
C10	CF92V1H684J	CAP. PLASTIC FILM 0.68 5% 50V
C11	CE04EW1A470M	CAP. ELECTRO 47 20% 10V
C12	CC45CH1H150J	CAP. CERAMIC 15P 5% 50V
C13	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C14	CC45CH1H030C	CAP. CERAMIC 3P 0.25P 50V
C15	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
C16	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C17	CC45FCH1H200J	CAP. CERAMIC 20P 5% 50V
C18	CF92V1H333J	CAP. PLASTIC FILM 0.033 5% 50V
C19	CC45CH1H221J	CAP. CERAMIC 220P 5% 50V
C20	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C21	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C22	NO USE	
C23	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C24	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C25	NO USE	
C26	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C27	CK45FF1H103Z	CAP. CERAMIC 0.01 50V

REF. NO	PARTS NO	NAME & DESCRIPTION
C101	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
C102	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V
C103	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C104	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
C105	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V
C106	CK45B1H222K	CAP. CERAMIC 2200P 10% 50V
C107	CE04EW1A470M	CAP. ELECTRO 47 20% 10V
C108	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C109	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C110	CM93BD2A101J	CAP. MICA 100P 5% 100V
C111	C91-1272-05	CAP. POLYESTER 1.5 5% 100V
C112	CE04EW1C220M	CAP. ELECTRO 22 20% 16V
C113	CE04EW1A470M	CAP. ELECTRO 47 20% 10V
C114	CE04EW1C220M	CAP. ELECTRO 22 20% 16V
C115	CC45FSL1H391J	CAP. CERAMIC 390P 5% 50V
C116	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C117	CF92V1H224J	CAP. POLYESTER 0.22 5% 50V
C118	CC45CH1H330J	CAP. CERAMIC 33P 5% 50V
C119	NO USE	
C120	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C121	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
C122	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C123	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C124	CM93BD2A101J	CAP. MICA 100P 5% 100V
C125	C91-1272-05	CAP. POLYESTER 1.5 5% 100V
C126	NO USE	
C127	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C128	CE04EW1A470M	CAP. ELECTRO 47 20% 10V
C129	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C130	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C131	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C132	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C133	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C134	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C135	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C136	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C137	CE04EW1C220M	CAP. ELECTRO 22 20% 16V
C138	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C139	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C140	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C141	CC45FCH1H200J	CAP. CERAMIC 20P 5% 50V
C145	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C302	CE04EW1A470M	CAP. ELECTRO 47 20% 10V
C303	NO USE	
C304	CC45CH1H470J	CAP. CERAMIC 47P 5% 50V
C305	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C306	C90-0987-05	CAP. ELECTRO 1000 20% 6.3V
C310	CC45CH1H070D	CAP. CERAMIC 7P 0.5P 50V
C311	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C312	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C313	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C325	CE04EW1H2R2M	CAP. ELECTRO 2.2 20% 50V
C401	CC45CH1H680J	CAP. CERAMIC 68P 5% 50V
C402	CC45FCH1H910J	CAP. CERAMIC 91P 5% 50V
C403	CC45CH1H910J	CAP. CERAMIC 91P 5% 50V
C404	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C405	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C406	CE04EW1C100M	CAP. ELECTRO 10 20% 16V
C407	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C501	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C502	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C503	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C504	CQ92FM1H104K	CAP. NYLAR 0.1 10% 50V
C505	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C506	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C507	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C508	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C509	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C510	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C511	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C512	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C513	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C514	NO USE	
C515	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C516	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C517	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C518	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C519	CE04EW1A101M	CAP. ELECTRO 100 20% 10V

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
C528	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	D401	1SS132	DIODE
C529	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	D402	MA700	DIODE
C530	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	D801	1SS132	DIODE
C531	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	D802	1SS132	DIODE
C532	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	D803	1SS132	DIODE
C533	CE04EW1A101M	CAP. ELECTRO 100 20% 10V	D804	HTZ3.3JA	DIODE, ZENER 3.27V
C534	CE04EW1A101M	CAP. ELECTRO 100 20% 10V	D805	1SS132	DIODE
C535	CK45F1H103Z	CAP. CERAMIC 0.01 50V	D806	1SS132	DIODE
C551	CE04EW1A471M	CAP. ELECTRO 470 20% 10V	D807	1SS132	DIODE
C552	CE04EW1C331M	CAP. ELECTRO 330 20% 16V	D808	1SS132	DIODE
C553	CE04EW1C331M	CAP. ELECTRO 330 20% 16V	D809	1SS132	DIODE
C554	CE04EW1A102M	CAP. ELECTRO 1000 20% 10V	JW1	E31-5572-05	WIRE ASS'Y
C555	CE04EW1C101M	CAP. ELECTRO 100 20% 16V	K1	S51-1527-05	RELAY
C556	CK45FF1H103Z	CAP. CERAMIC 0.01 50V	K2	S51-1527-05	RELAY
C557	CQ92FM1H103K	CAP. MYLAR 0.01 10% 50V	L1	L40-1011-04	FERRI INDUCTOR 100UH 10%
C558	CQ92FM1H103K	CAP. MYLAR 0.01 10% 50V	L2	L40-2201-03	FERRI INDUCTOR 22UH 10%
C801	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	L3	L40-2201-03	FERRI INDUCTOR 22UH 10%
C802	CE04BW1H010M	CAP. ELECTRO 1 20% 50V	P18	E40-7035-05	SOCKET 40P
C805	CC45CH1H270J	CAP. CERAMIC 27P 5% 50V	P101	E40-0711-05	PIN CONNECTOR 7P
C806	CQ92FM1H103K	CAP. MYLAR 0.01 10% 50V	Q1	2SC3779(D)	TR. SI, NPN
C807	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V	Q2	2SC3779(D)	TR. SI, NPN
C808	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V	Q3	2SA1565	TR. SI, PNP
C809	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V	Q4	2SK304(F)	FET, N-CHANNEL
C810	CK45F1H103Z	CAP. CERAMIC 0.01 50V	Q5	2SA1206	TR. SI, PNP
C901	CC45CH1H470J	CAP. CERAMIC 47P 5% 50V	Q6	2SC3779(D)	TR. SI, NPN
D2	1SS132	DIODE	Q7	2SA1206	TR. SI, PNP
D3	MA700	DIODE	Q8	2SC2785(F)	TR. SI, NPN
D4	MA700	DIODE	Q9	2SA1565	TR. SI, PNP
D5	MA700	DIODE	Q10	2SK304(F)	FET, N-CHANNEL
D6	MA700	DIODE	Q14	2SC3779(D)	TR. SI, NPN
D7	MA700	DIODE	Q15	2SC3779(D)	TR. SI, NPN
D8	NO USE		Q16	2SA1565	TR. SI, PNP
D9	1SS132	DIODE	Q17	2SA1206	TR. SI, PNP
D10	MA700	DIODE	Q18	2SC3779(D)	TR. SI, NPN
D101	MA700	DIODE	Q19	2SA1206	TR. SI, PNP
D102	MA700	DIODE	Q20	2SC2785(F)	TR. SI, NPN
D103	MA700	DIODE	Q101	2SC4049	TR. SI, NPN
D104	MA700	DIODE	Q102	NO USE	
D105	MA700	DIODE	Q103	2SA1206	TR. SI, PNP
D106	MA700	DIODE	Q104	2SC2785(F)	TR. SI, NPN
D107	MA700	DIODE	Q105	2SC4049	TR. SI, NPN
D108	MA700	DIODE	Q106	2SC4049	TR. SI, NPN
D109	MA700	DIODE	Q107	2SC4049	TR. SI, NPN
D110	MA700	DIODE	Q108	NO USE	
D111	MA700	DIODE	Q109	2SA1005(K)	TR. SI, PNP
D112	1SS132	DIODE	Q110	2SA1174(E,F)	TR. SI, PNP
D113	1SS132	DIODE	Q111	2SC3732(L)	TR. SI, NPN
D114	NO USE		Q112	2SC3732(L)	TR. SI, NPN
D115	MA700	DIODE	Q113	2SA1175(F)	TR. SI, PNP
D116	MA700	DIODE	Q114	2SC3315(C)	TR. SI, NPN
D117	MA700	DIODE	Q115	2SA1175(F)	TR. SI, PNP
D118	1SS132	DIODE	Q116	2SC3354(T,S)	TR. SI, NPN
D119	1SS132	DIODE	Q117	2SC3315(C)	TR. SI, NPN
D120	1SS132	DIODE	Q118	2SC2785(F)	TR. SI, NPN
D121	NO USE		Q119	2SA1175(F)	TR. SI, PNP
D122	MA700	DIODE	Q120	2SC2785(F)	TR. SI, NPN
D123	MA700	DIODE	Q121	2SC3732(L)	TR. SI, NPN
D124	1S1587	DIODE	Q122	2SA1206	TR. SI, PNP
D125	NO USE		Q123	2SC3315(C)	TR. SI, NPN
D126	1S1587	DIODE	Q124	2SA1206	TR. SI, PNP
D127	NO USE		Q125	2SA1565	TR. SI, PNP
D128	1SS132	DIODE	Q126	2SA1206	TR. SI, PNP
D301	1SS132	DIODE	Q127	2SA1206	TR. SI, PNP
D302	1SS132	DIODE	Q128	2SA1005(K)	TR. SI, PNP
D303	1SS132	DIODE	Q129	2SA1174(E,F)	TR. SI, PNP
D304	MA700	DIODE	Q130	2SC3732(L)	TR. SI, NPN
D305	1SS132	DIODE	Q131	2SC3732(L)	TR. SI, NPN
D306	MA700	DIODE	Q132	2SA1175(F)	TR. SI, PNP
D307	1SS132	DIODE	Q133	2SC3315(C)	TR. SI, NPN
D308	1SS132	DIODE	Q134	2SC3354(T,S)	TR. SI, NPN
D309	1SS132	DIODE	Q135	2SC3315(C)	TR. SI, NPN
D310	MA700	DIODE	Q136	2SC3732(L)	TR. SI, NPN
D311	MA700	DIODE	Q137	2SC3732(L)	TR. SI, NPN
D312	MA700	DIODE			
D313	MA700	DIODE			
D314	MA700	DIODE			
D315	1SS132	DIODE			
D316	1SS132	DIODE			

PARTS LIST

REF.NO PARTS NO NAME & DESCRIPTION

Q301 2SA1175(F) TR. SI, PNP
 Q302 2SC2785(F) TR. SI, NPN
 Q303 2SC3315(C) TR. SI, NPN
 Q304 2SC3315(C) TR. SI, NPN
 Q305 2SC3315(C) TR. SI, NPN
 Q306 2SC3315(C) TR. SI, NPN
 Q307 2SC3315(C) TR. SI, NPN
 Q308 2SC3315(C) TR. SI, NPN
 Q309 2SC3315(C) TR. SI, NPN
 Q310 2SA1565 TR. SI, PNP
 Q311 2SC3354(T,S) TR. SI, NPN

Q314 2SC3354(T,S) TR. SI, NPN

Q401 2SK583 FET, N-CHANNEL
 Q402 2SA1175(F) TR. SI, PNP
 Q403 2SA1005(K) TR. SI, PNP
 Q404 2SA1005(K) TR. SI, PNP
 Q405 2SA1175(F) TR. SI, PNP
 Q406 2SC2785(F) TR. SI, NPN

Q801 2SC2785(F) TR. SI, NPN

R1 RD14BB2C361J RES. CARBON 360 5% 1/6W
 R2 RN14BK2C1201F RES. METAL FILM 1.2K 1% 1/6W
 R3 RN14BK2C3901F RES. METAL FILM 3.9K 1% 1/6W
 R4 RN14BK2C1600F RES. METAL FILM 160 1% 1/6W
 R5 RN14BK2C1501F RES. METAL FILM 1.5K 1% 1/6W
 R6 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R7 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R8 RD14BB2C202J RES. CARBON 2K 5% 1/6W
 R9 RD14BB2C153J RES. CARBON 15K 5% 1/6W
 R10 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W
 R11 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W
 R12 RD14BB2C220J RES. CARBON 22 5% 1/6W
 R13 RD14BB2C682J RES. CARBON 6.8K 5% 1/6W
 R14 RD14BB2C302J RES. CARBON 3K 5% 1/6W
 R15 RD14BB2C472J RES. CARBON 4.7K 5% 1/6W
 R16 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R17 RN14BK2C2200F RES. METAL FILM 220 1% 1/6W
 R18 RN14BK2C3301F RES. METAL FILM 3.3K 1% 1/6W
 R19 RN14BK2C6800F RES. METAL FILM 680 1% 1/6W
 R20 RD14BB2C101J RES. CARBON 100 5% 1/6W
 R21 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R22 RD14BB2C181J RES. CARBON 180 5% 1/6W
 R23 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R24 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W
 R25 RD14BB2C105J RES. CARBON 1M 5% 1/6W
 R26 RD14BB2C105J RES. CARBON 1M 5% 1/6W
 R27 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W
 R28 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R29 RD14BB2C181J RES. CARBON 180 5% 1/6W

R33 RD14BB2C754J RES. CARBON 750K 5% 1/6W
 R34 RD14BB2C754J RES. CARBON 750K 5% 1/6W
 R35 RD14BB2C105J RES. CARBON 1M 5% 1/6W
 R36 RD14BB2C105J RES. CARBON 1M 5% 1/6W
 R37 RD14BB2C472J RES. CARBON 4.7K 5% 1/6W
 R38 RD14BB2C361J RES. CARBON 360 5% 1/6W
 R39 RN14BK2C5100F RES. METAL FILM 510 1% 1/6W
 R40 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R41 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R42 RN14BK2C5100F RES. METAL FILM 510 1% 1/6W
 R43 RN14BK2C6801F RES. METAL FILM 6.8K 1% 1/6W
 R44 RD14BB2C473J RES. CARBON 47K 5% 1/6W
 R45 NO USE
 R46 RN14BK2C6801F RES. METAL FILM 6.8K 1% 1/6W

R51 RD14BB2C361J RES. CARBON 360 5% 1/6W
 R52 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R53 RN14BK2C3901F RES. METAL FILM 3.9K 1% 1/6W
 R54 RN14BK2C1600F RES. METAL FILM 160 1% 1/6W
 R55 RN14BK2C1501F RES. METAL FILM 1.5K 1% 1/6W
 R56 NO USE
 R57 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R58 RD14BB2C202J RES. CARBON 2K 5% 1/6W
 R59 RD14BB2C153J RES. CARBON 15K 5% 1/6W
 R60 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W
 R61 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W
 R62 RD14BB2C220J RES. CARBON 22 5% 1/6W
 R63 RD14BB2C682J RES. CARBON 6.8K 5% 1/6W
 R64 RD14BB2C302J RES. CARBON 3K 5% 1/6W
 R65 RD14BB2C472J RES. CARBON 4.7K 5% 1/6W
 R66 RD14BB2C470J RES. CARBON 47 5% 1/6W

REF.NO PARTS NO NAME & DESCRIPTION

R67 RN14BK2C2200F RES. METAL FILM 220 1% 1/6W
 R68 RN14BK2C3301F RES. METAL FILM 3.3K 1% 1/6W
 R69 RN14BK2C6800F RES. METAL FILM 680 1% 1/6W
 R70 RD14BB2C101J RES. CARBON 100 5% 1/6W
 R71 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R72 RD14BB2C181J RES. CARBON 180 5% 1/6W
 R73 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R74 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W

R77 RN14BK2C1003F RES. METAL FILM 100K 1% 1/6W
 R78 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R79 RD14BB2C472J RES. CARBON 4.7K 5% 1/6W
 R80 RD14BB2C361J RES. CARBON 360 5% 1/6W
 R81 RD14BB2C222J RES. CARBON 2.2K 5% 1/6W
 R82 RD14BB2C153J RES. CARBON 15K 5% 1/6W
 R83 RD14BB2C153J RES. CARBON 15K 5% 1/6W

R101 RD14BB2C331J RES. CARBON 330 5% 1/6W
 R102 RD14BB2C751J RES. CARBON 750 5% 1/6W
 R103 RD14BB2C391J RES. CARBON 390 5% 1/6W
 R104 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R105 R90-0659-05 RES. NETWORK 4X510 5% 1/8W
 R106 NO USE

R107 RD14BB2C105J RES. CARBON 1K 5% 1/6W
 R108 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R109 R90-0660-05 RES. NETWORK 4X1K 5% 1/8W
 R110 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R111 RD14BB2C331J RES. CARBON 330 5% 1/6W
 R112 RD14BB2C751J RES. CARBON 750 5% 1/6W
 R113 RD14BB2C391J RES. CARBON 390 5% 1/6W
 R114 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R115 R90-0659-05 RES. NETWORK 4X510 5% 1/8W
 R116 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R117 R90-0660-05 RES. NETWORK 4X1K 5% 1/8W
 R118 RD14BB2C472J RES. CARBON 4.7K 5% 1/6W
 R119 RD14BB2C472J RES. CARBON 4.7K 5% 1/6W
 R120 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R121 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R122 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R123 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R124 RD14BB2C101J RES. CARBON 100 5% 1/6W
 R125 RD14BB2C331J RES. CARBON 330 5% 1/6W
 R126 RD14BB2C242J RES. CARBON 2.4K 5% 1/6W
 R127 R90-0658-05 RES. NETWORK
 R128 RD14BB2C102J RES. CARBON 1K 5% 1/6W

R129 NO USE
 R130 RD14BB2C473J RES. CARBON 47K 5% 1/6W
 R131 NO USE
 R132 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R133 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R134 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R135 RD14BB2C241J RES. CARBON 240 5% 1/6W
 R136 RD14BB2C152J RES. CARBON 1.5K 5% 1/6W
 R137 RD14BB2C362J RES. CARBON 3.6K 5% 1/6W
 R138 RD14BB2C561J RES. CARBON 560 5% 1/6W
 R139 RD14BB2C471J RES. CARBON 470 5% 1/6W
 R140 RD14BB2C162J RES. CARBON 1.6K 5% 1/6W
 R141 RD14BB2C182J RES. CARBON 1.8K 5% 1/6W
 R142 RD14BB2C220J RES. CARBON 22 5% 1/6W
 R143 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R144 RD14BB2C472J RES. CARBON 4.7K 5% 1/6W
 R145 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R146 RD14BB2C222J RES. CARBON 2.2K 5% 1/6W
 R147 RD14BB2C242J RES. CARBON 2.4K 5% 1/6W
 R148 RN14BK2C4701F RES. METAL FILM 4.7K 1% 1/6W
 R149 RN14BK2C6801F RES. METAL FILM 6.8K 1% 1/6W
 R150 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R151 RD14BB2C470J RES. CARBON 47 5% 1/6W
 R152 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R153 RN14BK2C4301F RES. METAL FILM 4.3K 1% 1/6W
 R154 RN14BK2C1152F RES. METAL FILM 11.5K 1% 1/6W
 R155 RD14BB2C182J RES. CARBON 1.8K 5% 1/6W
 R156 RD14BB2C222J RES. CARBON 2.2K 5% 1/6W
 R157 RD14BB2C563J RES. CARBON 56K 5% 1/6W
 R158 RN14BK2C9101F RES. METAL FILM 9.1K 1% 1/6W
 R159 RD14BB2C102J RES. CARBON 1K 5% 1/6W
 R160 RN14BK2C5601F RES. METAL FILM 5.6K 1% 1/6W
 R161 RN14BK2C9101F RES. METAL FILM 9.1K 1% 1/6W
 R162 RD14BB2C182J RES. CARBON 1.8K 5% 1/6W
 R163 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R164 RD14BB2C103J RES. CARBON 10K 5% 1/6W
 R165 RD14BB2C682J RES. CARBON 6.8K 5% 1/6W
 R166 RD14BB2C222J RES. CARBON 2.2K 5% 1/6W
 R167 RD14BB2C100J RES. CARBON 10 5% 1/6W
 R168 RD14BB2C681J RES. CARBON 680 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	RES.	CARBON	47	5%	1/6W
R169	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R170	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W		
R171	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R172	RD14BB2C471J	RES. CARBON	470	5%	1/6W		
R173	RD14BB2C271J	RES. CARBON	270	5%	1/6W		
R174	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W		
R175	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		
R176	RD14BB2C224J	RES. CARBON	220K	5%	1/6W		
R177	RD14BB2C821J	RES. CARBON	820	5%	1/6W		
R178	RD14BB2C681J	RES. CARBON	680	5%	1/6W		
R179	RD14BB2C752J	RES. CARBON	7.5K	5%	1/6W		
R180	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W		
R181	RN14BK2C1102F	RES. METAL FILM	11K	1%	1/6W		
R182	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		
R183	RN14BK2C1202F	RES. METAL FILM	12K	1%	1/6W		
R184	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R185	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R186	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W		
R187	RD14BB2C471J	RES. CARBON	470	5%	1/6W		
R188	RD14BB2C221J	RES. CARBON	220	5%	1/6W		
R189	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W		
R190	RN14BK2C2701F	RES. METAL FILM	2.7K	1%	1/6W		
R191	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R192	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R193	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R194	RD14BB2C331J	RES. CARBON	330	5%	1/6W		
R195	R90-0658-05	RES. NETWORK					
R196	RD14BB2C123J	RES. CARBON	12K	5%	1/6W		
R197	RN14BK2C8201F	RES. METAL FILM	8.2K	1%	1/6W		
R198	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W		
R199	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W		
R200	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R201	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R202	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R203	RD14BB2C241J	RES. CARBON	240	5%	1/6W		
R204	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W		
R205	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W		
R206	RD14BB2C561J	RES. CARBON	560	5%	1/6W		
R207	RD14BB2C471J	RES. CARBON	470	5%	1/6W		
R208	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W		
R209	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W		
R210	RD14BB2C220J	RES. CARBON	22	5%	1/6W		
R211	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R212	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		
R213	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R214	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R215	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R216	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R217	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W		
R218	RN14BK2C1302F	RES. METAL FILM	13K	1%	1/6W		
R219	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W		
R220	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R221	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R222	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R223	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R224	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W		
R225	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W		
R226	RD14BB2C123J	RES. CARBON	12K	5%	1/6W		
R227	RD14BB2C223J	RES. CARBON	22K	5%	1/6W		
R228	NO USE						
R229	RD14BB2C105J	RES. CARBON	1M	5%	1/6W		
R301	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W		
R302	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R305	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W		
R306	RD14BB2C220J	RES. CARBON	22	5%	1/6W		
R307	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W		
R308	RD14BB2C220J	RES. CARBON	22	5%	1/6W		
R309	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W		
R310	NO USE						
R311	RN14BK2C3001F	RES. METAL FILM	3K	1%	1/6W		
R312	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W		
R313	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W		
R314	RD14BB2C203J	RES. CARBON	20K	5%	1/6W		
R315	RD14BB2C273J	RES. CARBON	27K	5%	1/6W		
R316	RD14BB2C273J	RES. CARBON	27K	5%	1/6W		
R317	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R318	RN14BK2C1961F	RES. METAL FILM	1.96K	1%	1/6W		
R319	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R320	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W		
R321	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W		
R322	RN14BK2C3301F	RES. METAL FILM	3.3K	1%	1/6W		
R323	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W		
R324	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W		

REF. NO	PARTS NO	NAME & DESCRIPTION	RES.	CARBON	160K	5%	1/6W
R325	RD14BB2C164J	RES. CARBON	160K	5%	1/6W		
R326	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W		
R327	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W		
R328	RD14BB2C131J	RES. CARBON	130	5%	1/6W		
R329	RD14BB2C220J	RES. CARBON	22	5%	1/6W		
R330	RD14BB2C220J	RES. CARBON	22	5%	1/6W		
R331	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W		
R332	RD14BB2C302J	RES. CARBON	3K	5%	1/6W		
R333	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		
R334	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W		
R335	RN14BK2C5602F	RES. METAL FILM	56K	1%	1/6W		
R336	RN14BK2C1502F	RES. METAL FILM	15K	1%	1/6W		
R337	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		
R338	NO USE						
R339	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R340	RD14BB2C471J	RES. CARBON	470	5%	1/6W		
R341	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R342	R90-0660-05	RES. NETWORK	4X1K	5%	1/8W		
R343	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W		
R344	RN14BK2C2200F	RES. METAL FILM	220	1%	1/6W		
R345	RN14BK2C5601F	RES. METAL FILM	5.6K	1%	1/6W		
R346	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R347	RD14BB2C104J	RES. CARBON	100K	5%	1/6W		
R348	RD14BB2C104J	RES. CARBON	100K	5%	1/6W		
R349	RN14BK2C2001F	RES. METAL FILM	2K	1%	1/6W		
R350	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W		
R351	RN14BK2C2702F	RES. METAL FILM	27K	1%	1/6W		
R352	RD14BB2C243J	RES. CARBON	24K	5%	1/6W		
R353	RD14BB2C243J	RES. CARBON	24K	5%	1/6W		
R354	RD14BB2C243J	RES. CARBON	24K	5%	1/6W		
R355	RN14BK2C3301F	RES. METAL FILM	3.3K	1%	1/6W		
R356	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W		
R357	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W		
R358	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		
R359	RD14BB2C220J	RES. CARBON	22	5%	1/6W		
R360	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W		
R361	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		
R362	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R363	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R364	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R365	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R366	RD14BB2C473J	RES. CARBON	47K	5%	1/6W		
R367	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R368	RN14BK2C1602F	RES. METAL FILM	16K	1%	1/6W		
R369	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W		
R370	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R371	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R372	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R373	RD14BB2C682J	RES. CARBON	6.8K	5%	1/6W		
R374	RD14BB2C912J	RES. CARBON	9.1K	5%	1/6W		
R401	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R402	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R403	NO USE						
R404	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W		
R405	RD14BB2C752J	RES. CARBON	7.5K	5%	1/6W		
R406	RD14BB2C432J	RES. CARBON	4.3K	5%	1/6W		
R407	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R408	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R409	RD14BB2C273J	RES. CARBON	27K	5%	1/6W		
R410	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R411	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R412	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R413	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R414	RD14BB2C470J	RES. CARBON	47	5%	1/6W		
R415	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R416	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R417	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		
R418	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		
R419	RD14BB2C331J	RES. CARBON	330	5%	1/6W		
R420	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R421	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R422	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R423	RD14BB2C471J	RES. CARBON	470	5%	1/6W		
R801	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R802	RD14BB2C220J	RES. CARBON	22	5%	1/6W		
R803	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R806	RD14BB2C393J	RES. CARBON	39K	5%	1/6W		
R807	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		
R808	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		
R809	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W		
R810	RD14BB2C101J	RES. CARBON	100	5%	1/6W		
R811	RD14BB2C473J	RES. CARBON	47K	5%	1/6W		
R812	RD14BB2C511J	RES. CARBON	510	5%	1/6W		

REF. NO	PARTS NO	NAME & DESCRIPTION	RES.	CARBON	510	5%	1/6W
R813	RD14BB2C511J	RES. CARBON	510	5%	1/6W		
R814	NO USE						
R815	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		
R816	RN14BK2C750F	RES. METAL FILM	75.0	1%	1/6W		
R817	RD14BB2C910J	RES. CARBON	91	5%	1/6W		
R901	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W		
TC101	C05-0446-05	CAP. TRIMMER	30P				
TC102	C05-0446-05	CAP. TRIMMER	30P				
TC302	C05-0						

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
JW5	E38-0084-05	WIRE ASS'Y
JW6	E38-0085-05	WIRE ASS'Y
K301	S51-2508-05	RELAY
K401	S51-2508-05	RELAY
L1	L40-1011-03	FERRI INDUCTOR 100UH 10%
P4	E40-5066-05	PIN CONNECTOR 9P
P7	E40-3239-05	PIN CONNECTOR 4P
P8	E40-3239-05	PIN CONNECTOR 4P
P9	E40-3238-05	PIN CONNECTOR 3P
Q1	2SA1565	TR. SI, PNP
Q2	2SA1565	TR. SI, PNP
Q101	2SC3354(T,S)	TR. SI, NPN
Q102	2SC3354(T,S)	TR. SI, NPN
Q201	2SC3354(T,S)	TR. SI, NPN
Q202	2SC3354(T,S)	TR. SI, NPN
Q301	2SK241(GR)	FET, N-CHANNEL
Q302	2SK241(GR)	FET, N-CHANNEL
Q303	2SC3354(T,S)	TR. SI, NPN
Q304	2SC3779(D)	TR. SI, NPN
Q305	2SC3779(D)	TR. SI, NPN
Q306	2SC3354(T,S)	TR. SI, NPN
Q401	2SK241(GR)	FET, N-CHANNEL
Q402	2SK241(GR)	FET, N-CHANNEL
Q403	2SC3354(T,S)	TR. SI, NPN
Q404	2SC3779(D)	TR. SI, NPN
Q405	2SC3779(D)	TR. SI, NPN
Q406	2SC3354(T,S)	TR. SI, NPN
R1	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R2	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R3	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R4	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R5	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R6	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R7	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R8	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R9	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R101	RN14BK2E1004D	RES. METAL FILM 1M 0.5% 1/4W
R102	RD14BB2C824J	RES. CARBON 820K 5% 1/6W
R103	RN14BK2C62R0F	RES. METAL FILM 62.0 1% 1/6W
R104	RN14BK2C62R0F	RES. METAL FILM 62.0 1% 1/6W
R105	R92-1431-15	RES. TEMP. COEFF: 330 5% 1/6W
R106	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
R107	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
R108	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R109	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R110	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R111	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R112	NO USE	
R113	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
R114	RN14BK2C4301F	RES. METAL FILM 4.3K 1% 1/6W
R115	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R116	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
R117	RN14BK2C7501F	RES. METAL FILM 7.5K 1% 1/6W
R118	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R119	RN14BK2C7501F	RES. METAL FILM 7.5K 1% 1/6W
R120	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R121	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R122	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R123	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R124	NO USE	
R125	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R126	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R127	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W
R128	RN14BK2C3300F	RES. METAL FILM 330 1% 1/6W
R150	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R201	RN14BK2E1004D	RES. METAL FILM 1M 0.5% 1/4W
R202	RD14BB2C824J	RES. CARBON 820K 5% 1/6W
R203	RN14BK2C62R0F	RES. METAL FILM 62.0 1% 1/6W
R204	RN14BK2C62R0F	RES. METAL FILM 62.0 1% 1/6W
R205	R92-1431-15	RES. TEMP. COEFF: 330 5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
R206	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
R207	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
R208	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R209	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R210	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R211	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R212	NO USE	
R213	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
R214	RN14BK2C4301F	RES. METAL FILM 4.3K 1% 1/6W
R215	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R216	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
R217	RN14BK2C7501F	RES. METAL FILM 7.5K 1% 1/6W
R218	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
R219	RN14BK2C7501F	RES. METAL FILM 7.5K 1% 1/6W
R220	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R221	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R222	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R223	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R224	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R225	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R226	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R227	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W
R228	RN14BK2C3300F	RES. METAL FILM 330 1% 1/6W
R250	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R301	RD14BB2E330J	RES. CARBON 33 5% 1/4W
R302	RD14BB2C560J	RES. CARBON 56 5% 1/6W
R303	R92-1433-05	RES. METAL FILM 800K 0.5% 1/2W
R304	R92-1432-05	RES. METAL FILM 250K 0.5% 1/2W
R305	RD14BB2C240J	RES. CARBON 24 5% 1/6W
R306	RN14BK2E1004D	RES. METAL FILM 1M 0.5% 1/4W
R307	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
R308	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R309	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R310	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
R311	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
R312	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R313	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R314	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R315	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
R316	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
R317	NO USE	
R318	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R319	RD14BB2C820J	RES. CARBON 82 5% 1/6W
R320	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R350	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R401	RD14BB2E330J	RES. CARBON 33 5% 1/4W
R402	RD14BB2C560J	RES. CARBON 56 5% 1/6W
R403	R92-1433-05	RES. METAL FILM 800K 0.5% 1/2W
R404	R92-1432-05	RES. METAL FILM 250K 0.5% 1/2W
R405	RD14BB2C240J	RES. CARBON 24 5% 1/6W
R406	RN14BK2E1004D	RES. METAL FILM 1M 0.5% 1/4W
R407	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
R408	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R409	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R410	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
R411	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
R412	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R413	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R414	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R415	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
R416	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W
R417	NO USE	
R418	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R419	RD14BB2C820J	RES. CARBON 82 5% 1/6W
R420	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R450	RD14BB2C221J	RES. CARBON 220 5% 1/6W
S101	S02-4511-15	ATTENUATOR UNIT
S201	S02-4511-15	ATTENUATOR UNIT
TC101	C05-0459-05	CAP. TRIMMER 10P
TC201	C05-0459-05	CAP. TRIMMER 10P
TC301	C05-0031-15	CAP. TRIMMER 10P
TC302	C05-0031-15	CAP. TRIMMER 10P
TC401	C05-0031-15	CAP. TRIMMER 10P
TC402	C05-0031-15	CAP. TRIMMER 10P

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
U1	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U2	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U101	DN1901	FET, DUAL, N-CHANNEL
U102	UPA101G	IC, NPN TRANSISTOR ARRAY
U201	DN1901	FET, DUAL, N-CHANNEL
U202	UPA101G	IC, NPN TRANSISTOR ARRAY
VR101	R12-3543-05	RES. SEMI FIXED 20KB
VR201	R12-3543-05	RES. SEMI FIXED 20KB

LINE COUNTER UNIT

X76-1400-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	J73-0015-13	PCB (UNMOUNTED)
C1	CQ92M1H104K	CAP. MYLAR 0.1 10% 50V
C2	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C3	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C4	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C5	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C6	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C7	CC45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V
C8	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C9	CE04BW1E220M	CAP. ELECTRO 22 20% 25V
C10	CE04BW1E220M	CAP. ELECTRO 22 20% 25V
C11	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C12	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C13	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C14	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C15	CQ92M1H104K	CAP. MYLAR 0.1 10% 50V
C16	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C17	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C18	CQ92F1H682K	CAP. MYLAR 6800P 10% 50V
C19	CQ92F1H154K	CAP. MYLAR 0.15 10% 50V
C20	CQ92F1H103K	CAP. MYLAR 0.01 10% 50V
C21	CE04EW1H010M	CAP. ELECTRO 1 20% 50V
C22	CQ92F1H102K	CAP. MYLAR 1000P 10% 50V
C23	CE04EW1H010M	CAP. ELECTRO 1 20% 50V
C24	CQ92M1H104K	CAP. MYLAR 0.1 10% 50V
C25	CE04EW1H010M	CAP. ELECTRO 1 20% 50V
C26	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C27	NO USE	
C28	CC45FSL1H221J	CAP. CERAMIC 220P 5% 50V
C29	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C101	CQ92F1H104K	CAP. MYLAR 0.1 10% 50V
C801	CC45SL1H221J	CAP. CERAMIC 220P 5% 50V

REF. NO	PARTS NO	NAME & DESCRIPTION
D1	MA700	DIODE
D2	MTZ3.0JA	DIODE, ZENER 2.96V
D3	MTZ3.0JA	DIODE, ZENER 2.96V
D4	1SS132	DIODE
D5	1SS132	DIODE
D6	1SS132	DIODE
D7	1SS132	DIODE
D8	1SS132	DIODE
D9	1SS132	DIODE
D10	MA700	DIODE
D11	1SS132	DIODE

REF. NO	PARTS NO	NAME & DESCRIPTION
P34	E40-7121-05	PIN CONNECTOR 10P
P35	E40-3242-05	PIN CONNECTOR 7P
P36	E40-3238-05	PIN CONNECTOR 3P
P37	E40-3237-05	PIN CONNECTOR 2P
P38	E40-3238-05	PIN CONNECTOR 3P
P101	E40-0718-05	PIN CONNECTOR 7P

REF. NO	PARTS NO	NAME & DESCRIPTION
Q1	2SK241(GR)	FET, N-CHANNEL
Q2	2SK304(F)	FET, N-CHANNEL
Q3	2SC2785(F)	TR. SI, NPN
Q4	2SA1175(F)	TR. SI, PNP
Q5	2SC2785(F)	TR. SI, NPN

REF. NO	PARTS NO	NAME & DESCRIPTION
R1	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R2	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R3	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R4	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R5	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R6	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R7	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R8	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R9	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R10	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R11	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R12	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R13	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R14	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R15	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R16	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R17	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
R18	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R19	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R20	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R21	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R22	RD14BB2C103J	RES. CARBON 10K 5

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	QTY	UNIT
C18	CC45FCH1H220J	CAP. CERAMIC	22P	5%	50V	
C19	CE04EW1C220M	CAP. ELECTRO	22	20%	16V	
C20	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C21	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	
C22	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C23	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	
C24	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C25	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C26	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C27	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C28	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C29	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C30	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C31	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C32	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C33	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	
C34	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C35	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C36	CE04EW1C220M	CAP. ELECTRO	22	20%	16V	
C37	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C38	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C39	CE04EW1C331M	CAP. ELECTRO	330	20%	16V	
C40	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C41	CE04EW1E470M	CAP. ELECTRO	47	20%	25V	
C42	CC45FSL1H471J	CAP. CERAMIC	470P	5%	50V	
C43	CE04EW1A471M	CAP. ELECTRO	470	20%	10V	
C44	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C45	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C46	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C47	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C48	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C49	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C50	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C51	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C52	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C53	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C54	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C55	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C56	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C57	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C58	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C59	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C60	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C61	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C62	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C63	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C64	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C65	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C66	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C67	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C68	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C69	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C70	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C71	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C72	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C73	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C74	CK45F1H103Z	CAP. CERAMIC	0.01	50V		
C75	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C76	CE04EW1C470M	CAP. ELECTRO	47	20%	16V	
C77	CE04EW1C471M	CAP. ELECTRO	470	20%	16V	
C78	CE04EW1C471M	CAP. ELECTRO	470	20%	16V	
C79	C91-1273-05	CAP. NETWORK	6X0.01	50V		
C80	CE04EW1A102M	CAP. ELECTRO	1000	20%	10V	
C81	NO USE					
C82	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V	
C86	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	
C87	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C88	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V	
C89	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V	
C90	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V	
C91	CC45FSL1H471J	CAP. CERAMIC	470P	5%	50V	
C92	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V	
C901	C91-0745-05	CAP. CERAMIC	100P	10%	50V	
D1	1SS132	DIODE				
D2	1SS132	DIODE				
D3	1SS132	DIODE				
D4	1SS132	DIODE				
D5	MTZ12JC	DIODE, ZENER	12.05V			
D6	1SS132	DIODE				
D7	1SS132	DIODE				
L1	L40-1011-03	FERRI INDUCTOR	100UH	10%		
L2	L40-1021-03	FERRI INDUCTOR	1MH	10%		
L3	L40-1092-03	FERRI INDUCTOR	1UH	20%		

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	QTY	UNIT
L4	L40-1011-03	FERRI INDUCTOR	100UH	10%		
P1	E40-7036-05	PIN CONNECTOR	20P			
P2	E40-7037-05	PIN CONNECTOR	26P			
P3	E40-7035-05	SOCKET	40P			
P4	E40-5066-05	PIN CONNECTOR	9P			
Q1	2SA1175(F)	TR. SI, PNP				
Q2	2SC1384(R,S)	TR. SI, NPN				
R1	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R2	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R3	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R4	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R5	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R6	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R7	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R8	NO USE					
R9	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R10	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	
R11	RD14BB2C243J	RES. CARBON	24K	5%	1/6W	
R12	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R13	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R14	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R15	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R16	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R17	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R18	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R19	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R20	RN14BK2C5600F	RES. METAL FILM	560	1%	1/6W	
R21	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R22	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W	
R23	RD14BB2C474J	RES. CARBON	470K	5%	1/6W	
R24	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R25	RN14BK2C9100F	RES. METAL FILM	910	1%	1/6W	
R26	RN14BK2C3302F	RES. METAL FILM	33K	1%	1/6W	
R27	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W	
R28	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W	
R29	RD14BB2C513J	RES. CARBON	51K	5%	1/6W	
R30	RD14BB2C513J	RES. CARBON	51K	5%	1/6W	
R31	RD14BB2C513J	RES. CARBON	51K	5%	1/6W	
R32	RD14BB2C513J	RES. CARBON	51K	5%	1/6W	
R33	RD14BB2C513J	RES. CARBON	51K	5%	1/6W	
R34	RD14BB2C513J	RES. CARBON	51K	5%	1/6W	
R35	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	
R36	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	
R37	RN14BK2C2400F	RES. METAL FILM	240	1%	1/6W	
R38	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W	
R39	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W	
R40	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W	
R41	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W	
R42	RN14BK2C2400F	RES. METAL FILM	240	1%	1/6W	
R43	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	
R44	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R45	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R46	NO USE					
R47	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	
R48	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R49	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	
R50	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	
R51	RD14BB2C134J	RES. CARBON	130K	5%	1/6W	
R52	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	
R53	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	
R54	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R55	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R58	R90-0662-05	RES. NETWORK				
R59	R90-0661-05	RES. NETWORK	4X100K			
R60	RD14BB2C471J	RES. CARBON	470	5%	1/6W	
R61	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R62	R90-0663-05	RES. NETWORK	8X1M			
R63	NO USE					
R64	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R65	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R66	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R67	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R68	NO USE					
R69	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R70	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W	
R71	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R72	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R73	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R74	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R75	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R76	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	QTY	UNIT
R77	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R78	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R79	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R80	NO USE					
R81	RN14BK2C2001F	RES. METAL FILM	2K	1%	1/6W	
R82	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W	
R83	RN14BK2C5600F	RES. METAL FILM	560	1%	1/6W	
R84	NO USE					
R85	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	
R86	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	
R87	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	
R88	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R89	RD14BB2C912J	RES. CARBON	9.1K	5%	1/6W	
R90	R90-0286-05	RES. NETWORK	4X4.7K			
R91	R90-0415-05	RES. NETWORK	3X4.7K			
R92	R90-0286-05	RES. NETWORK	4X4.7K			
R256	R92-1061-05	JUMPING RES.	ZERO OHM (5MM)			
U1	MB8464A-15LL	IC,64K-BIT SRAM				
U2	MBM27C256*T	IC,256K-BIT EPROM				
U3	MSM6242BGS-VK	IC,REAL TIME CLOCK				
U4	PST518B	IC,RESET				
U5	LH0080A	IC,CPU				
U6	DTM-5010	IC, GATE ARRAY				
U7	HD74LS138FP	IC,3-TO-8 DEMULTIPLEXER				
U8	HD74HC238FP	IC,3-TO-8 LINE DECODER				
U9	HD74HC238FP	IC,3-TO-8 LINE DECODER				
U10	HD74HC107FP	IC,DUAL J-K FLIP-FLOP				
U11	HD74LS04FP	IC,HEX INVERTERS				
U12	HD74LS244FP	IC,OCTAL 3-STATE BUS BUFFER				
U13	HD74LS244FP	IC,OCTAL 3-STATE BUS BUFFER				
U14	HD74LS04FP	IC,HEX INVERTERS				
U15	HD74LS30FP	IC,8-INPUT NAND				
U16	HD74LS374FP	IC,OCTAL 3-STATE D-FF				

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
D106	TLR112	LED, RED
D107	1SS132	DIODE
D108	1SS132	DIODE
D201	1SS132	DIODE
D202	1SS132	DIODE
L1	L33-0806-05	CHOKE COIL (0.52UH)
L2	L33-0806-05	CHOKE COIL (0.52UH)
L3	L40-2282-70	FERRI INDUCTOR 0.22UH 20%
L4	L40-2282-70	FERRI INDUCTOR 0.22UH 20%
L5	L40-2202-70	FERRI INDUCTOR 22UH 20%
P11	E40-3238-05	PIN CONNECTOR 3P
P12	E40-5067-05	PIN CONNECTOR 10P
P13	E40-3241-05	PIN CONNECTOR 6P
P14	E40-3238-05	PIN CONNECTOR 3P
P15	E40-3238-05	PIN CONNECTOR 3P
Q1	2SC3779(D)	TR. SI, NPN
Q2	2SC3779(D)	TR. SI, NPN
Q3	2SC3779(D)	TR. SI, NPN
Q4	2SC3779(D)	TR. SI, NPN
Q5	2SA1161	TR. SI, PNP
Q6	2SA1161	TR. SI, PNP
Q7	2SC3779(D)	TR. SI, NPN
Q8	2SC3779(D)	TR. SI, NPN
Q9	2SC3779(D)	TR. SI, NPN
Q10	2SC3779(D)	TR. SI, NPN
Q11	2SC3779(D)	TR. SI, NPN
Q12	2SC3779(D)	TR. SI, NPN
Q13	2SC1164(O)*S	TR. SI, NPN
Q14	2SC1164(O)*S	TR. SI, NPN
Q101	2SA1005(K)	TR. SI, PNP
Q102	2SA1005(K)	TR. SI, PNP
Q103	2SC3315(C)	TR. SI, NPN
Q104	2SC3315(C)	TR. SI, NPN
Q105	2SA1005(K)	TR. SI, PNP
Q106	2SA1005(K)	TR. SI, PNP
Q107	2SA1005(K)	TR. SI, PNP
Q108	2SA1005(K)	TR. SI, PNP
Q109	2SC3354(T,S)	TR. SI, NPN
Q110	2SC3354(T,S)	TR. SI, NPN
Q111	2SA1206	TR. SI, PNP
Q112	2SC3354(T,S)	TR. SI, NPN
Q113	2SC3354(T,S)	TR. SI, NPN
Q114	2SC3600(E,F)	TR. SI, NPN
Q115	2SC3600(E,F)	TR. SI, NPN
Q116	2SA1406(E,F)	TR. SI, PNP
Q117	2SA1406(E,F)	TR. SI, PNP
Q201	2SC3315(C)	TR. SI, NPN
Q202	2SC3315(C)	TR. SI, NPN
Q203	2SC3354(T,S)	TR. SI, NPN
Q204	2SC3354(T,S)	TR. SI, NPN
Q205	2SC2785(F)	TR. SI, NPN
Q206	2SC3315(C)	TR. SI, NPN
Q207	2SC3315(C)	TR. SI, NPN
Q208	2SC3354(T,S)	TR. SI, NPN
Q209	2SC3354(T,S)	TR. SI, NPN
Q210	2SC2785(F)	TR. SI, NPN
R1	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R2	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R3	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R4	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R5	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R6	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R7	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R8	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R9	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R10	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R11	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R12	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R13	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R14	RD14BB2C753J	RES. CARBON 75K 5% 1/6W
R15	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R16	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R17	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R18	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R19	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R20	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W
R21	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W
R22	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R23	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R24	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R25	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W
R26	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W
R27	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R28	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R29	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R30	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R31	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R32	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R33	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R34	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R35	RN14BK2E82R0F	RES. METAL FILM 82.0 1% 1/4W
R36	RN14BK2E82R0F	RES. METAL FILM 82.0 1% 1/4W
R37	RN14BK2C3600F	RES. METAL FILM 360 1% 1/6W
R38	NO USE	
R39	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R40	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R41	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R42	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R43	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R44	RD14BB2C223J	RES. CARBON 2.2K 5% 1/6W
R45	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R46	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R47	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R48	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R49	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R50	R92-1420-05	RES. METAL FILM 510 5% 7W
R51	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R52	R92-1420-05	RES. METAL FILM 510 5% 7W
R53	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R54	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R55	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R56	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R59	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R101	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R102	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R103	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
R104	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
R105	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R106	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R107	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R108	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
R109	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
R110	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R111	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R112	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R113	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R114	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R115	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R116	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R117	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R118	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R119	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R120	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
R121	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R122	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R123	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R124	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R125	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R126	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R127	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R128	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R129	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R130	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R131	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R132	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R133	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R134	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R135	NO USE	
R136	RD14BB2C514J	RES. CARBON 510K 5% 1/6W
R137	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R138	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R139	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R140	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R141	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R142	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R143	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R144	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R145	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R146	R92-1434-05	RES. SPECIAL POWER 47K 5% 1/2W
R147	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R148	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R149	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R150	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R151	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R152	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R153	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R154	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R155	R92-1434-05	RES. SPECIAL POWER 47K 5% 1/2W
R156	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R157	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R158	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R159	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R160	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R161	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R162	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R163	NO USE	
R164	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R201	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R202	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R203	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R204	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R205	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R206	RD14BB2C623J	RES. CARBON 62K 5% 1/6W
R207	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R208	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R209	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R210	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R211	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R212	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R213	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R214	RN14BK2C1800F	RES. METAL FILM 180 1% 1/6W
R215	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R216	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R217	RN14BK2C3300F	RES. METAL FILM 330 1% 1/6W
R218	RN14BK2C3300F	RES. METAL FILM 330 1% 1/6W
R219	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R220	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R221	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R222	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R223	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R224	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R225	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R226	RN14BK2C9101F	RES. METAL FILM 9.1K 1% 1/6W
R227	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R228	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R229	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
TC1	C05-0471-05	CAP. TRIMMER 30P
TC2	C05-0460-05	CAP. TRIMMER 20P
TC101	C05-0464-05	CAP. TRIMMER 2P
TC102	NO USE	
TC103	C05-0464-05	CAP. TRIMMER 2P
TH2	SDT100	THERMISTOR
VR1	R12-1538-05	RES. SEMI FIXED 1KB
VR2	NO USE	
VR3	R12-3453-05	RES. SEMI FIXED 10KB
VR4	R12-0058-05	RES. SEMI FIXED 470 B
VR101	R12-1538-05	RES. SEMI FIXED 1KB
VR102	R12-0571-05	RES. SEMI FIXED 500 B
VR103	R12-3453-05	RES. SEMI FIXED 10KB
VR201	R12-3543-05	RES. SEMI FIXED 20KB
VR202	R12-3543-05	RES. SEMI FIXED 20KB


PARTS LIST

VOLUME UNIT


X81-2330-02

REF. NO	PARTS NO	NAME & DESCRIPTION
	F01-0859-14	HEAT SINK
	J21-4610-04	BRACKET
	J73-0011-13	PCB (UNMOUNTED)
	N09-0623-04	SCREW, SEMS PAN HD
	R92-0150-05	JUMPING RES. ZERO OHM(10MH)
C6	CE04EW1C101M	CAP. ELECTRO 100 20% 16V
C7	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C8	CK45F2H472K	CAP. CERAMIC 4700P 10% 500V
C9	CQ92M1H103J	CAP. MYLAR 0.01 5% 50V
C10	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C101	C91-0551-05	CAP. POLYESTER 0.22 10% 630V
C102	C91-0575-05	CAP. CERAMIC 1000P 20% 4KV
C103	C91-0575-05	CAP. CERAMIC 1000P 20% 4KV
D1	1SS132	DIODE
D2	1SS132	DIODE
D3	MTZ24JC	DIODE, ZENER 23.72V
J21	E31-5571-05	LEAD WIRE WITH CONNECTOR
L101	L33-0808-05	CHOKE COIL


SCHEMATIC DIAGRAM

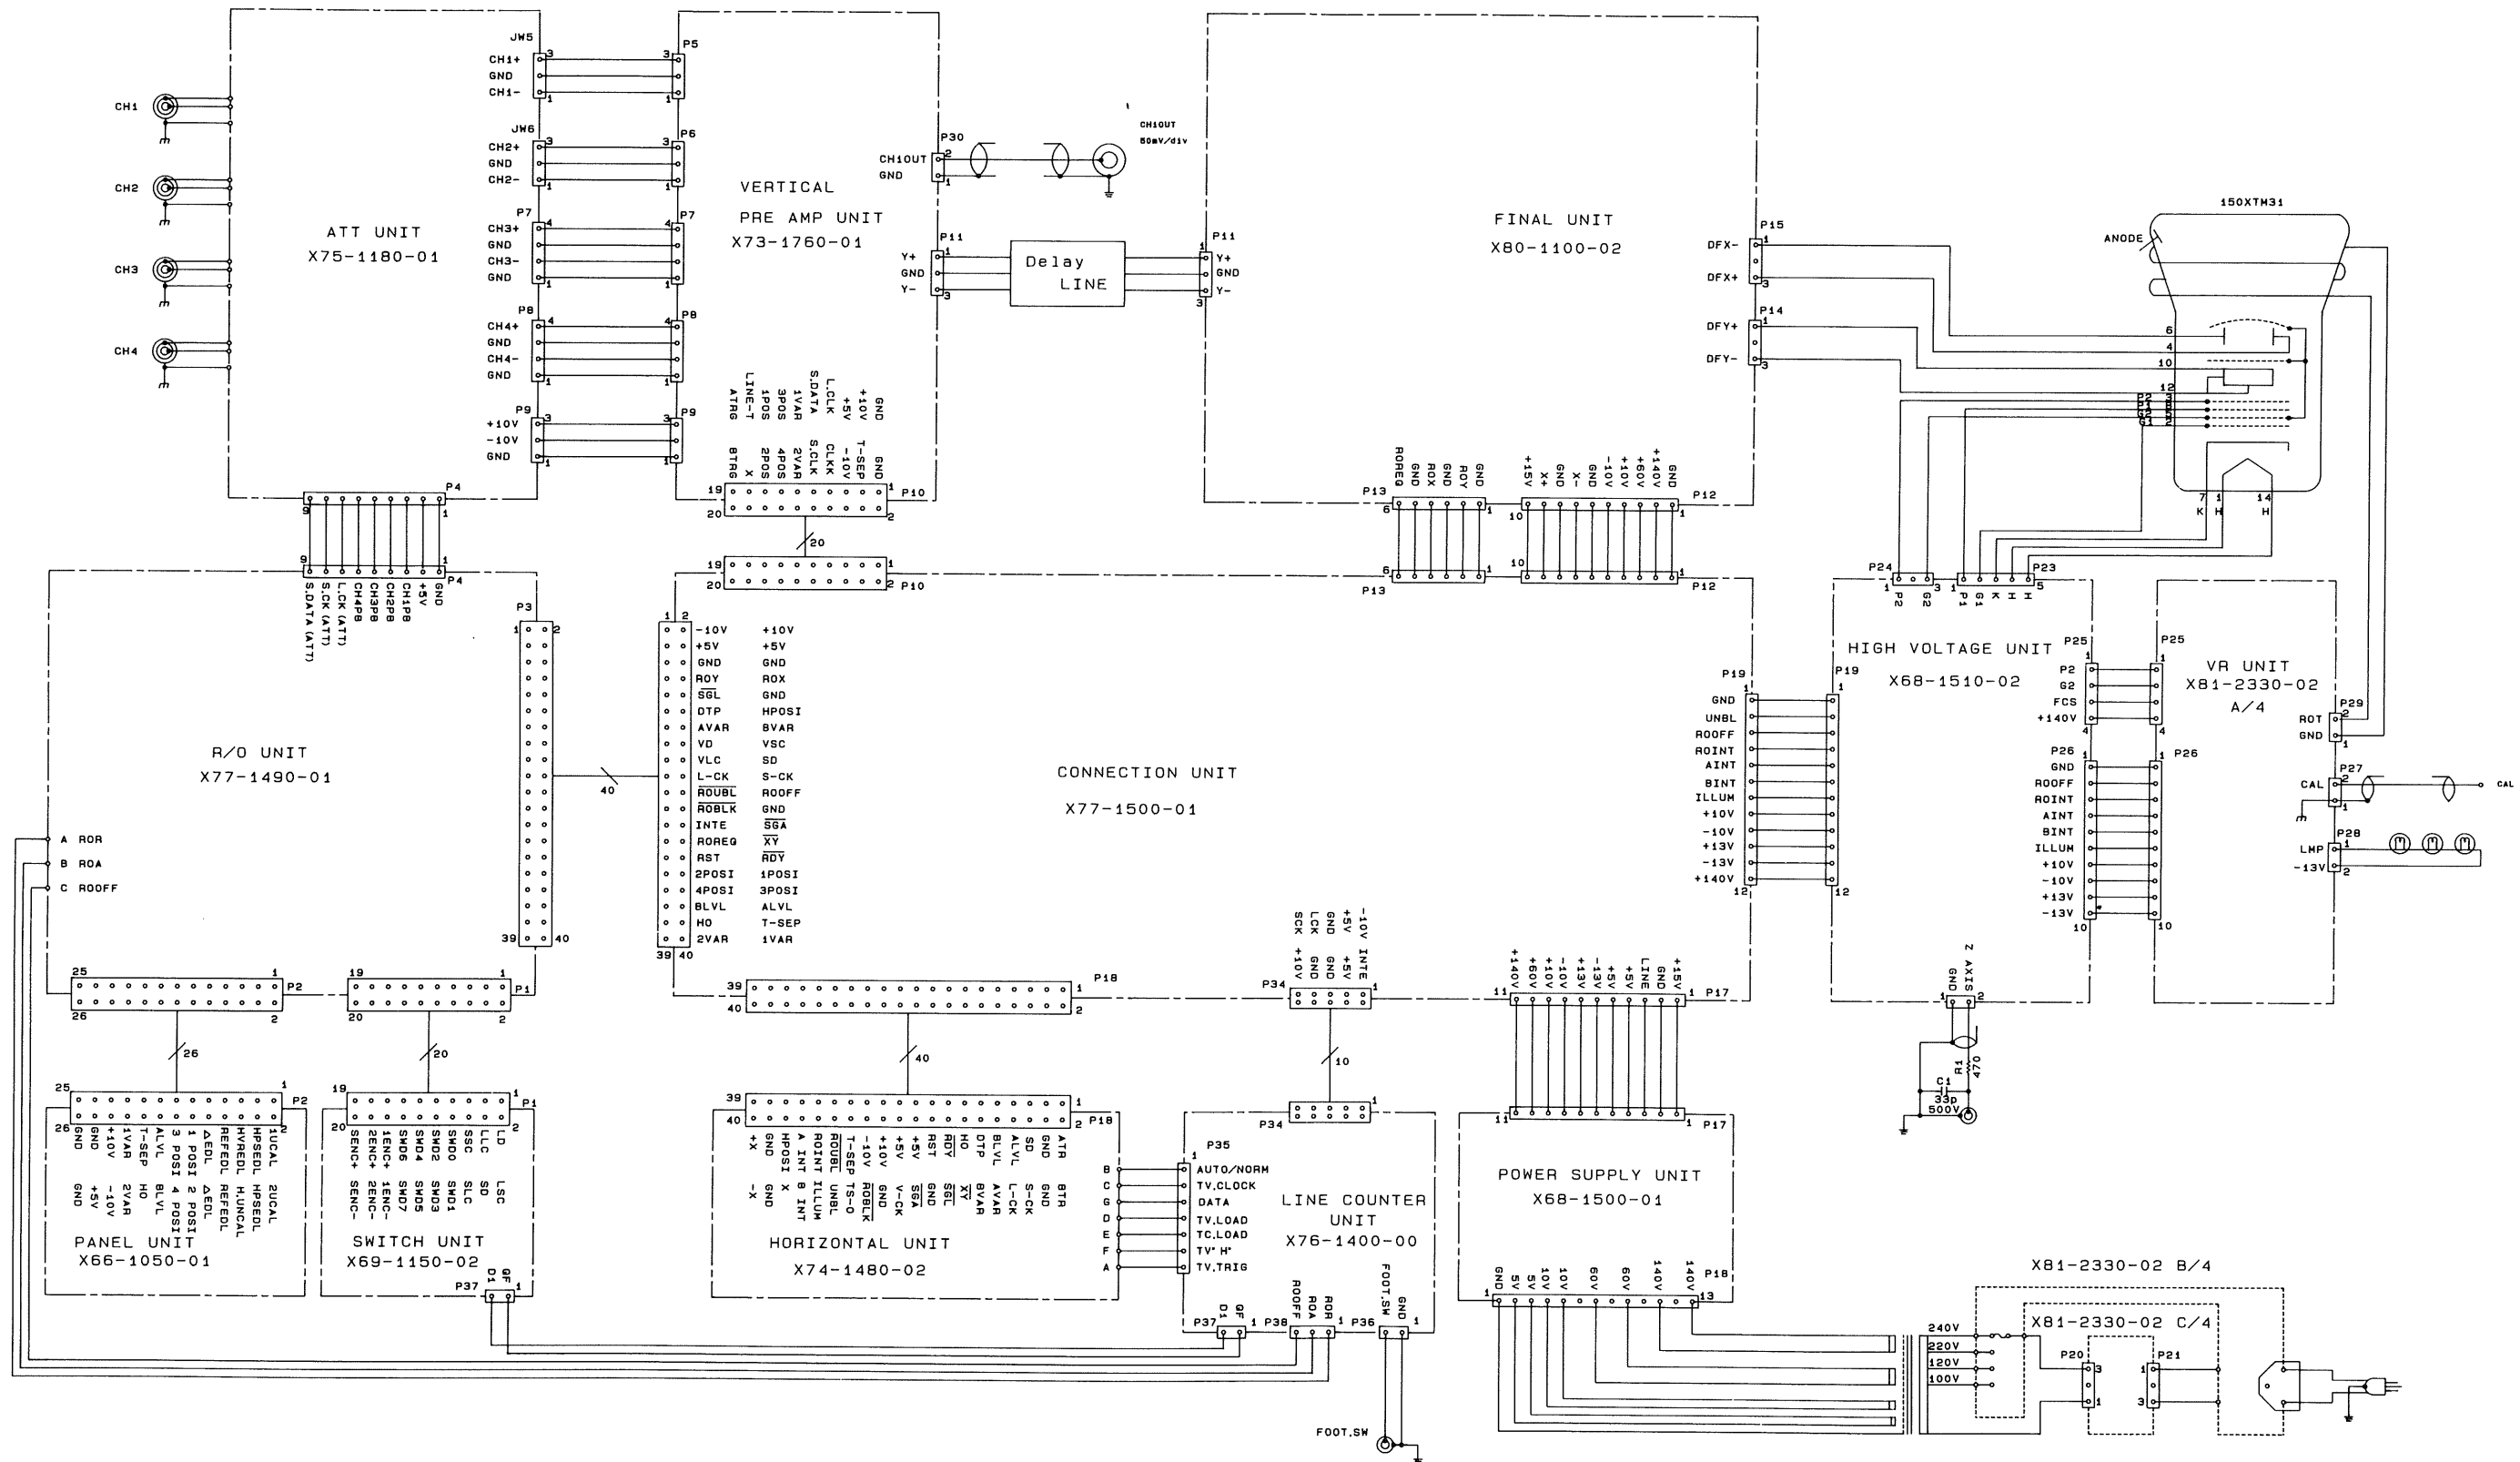

SCHEMATIC DIAGRAM

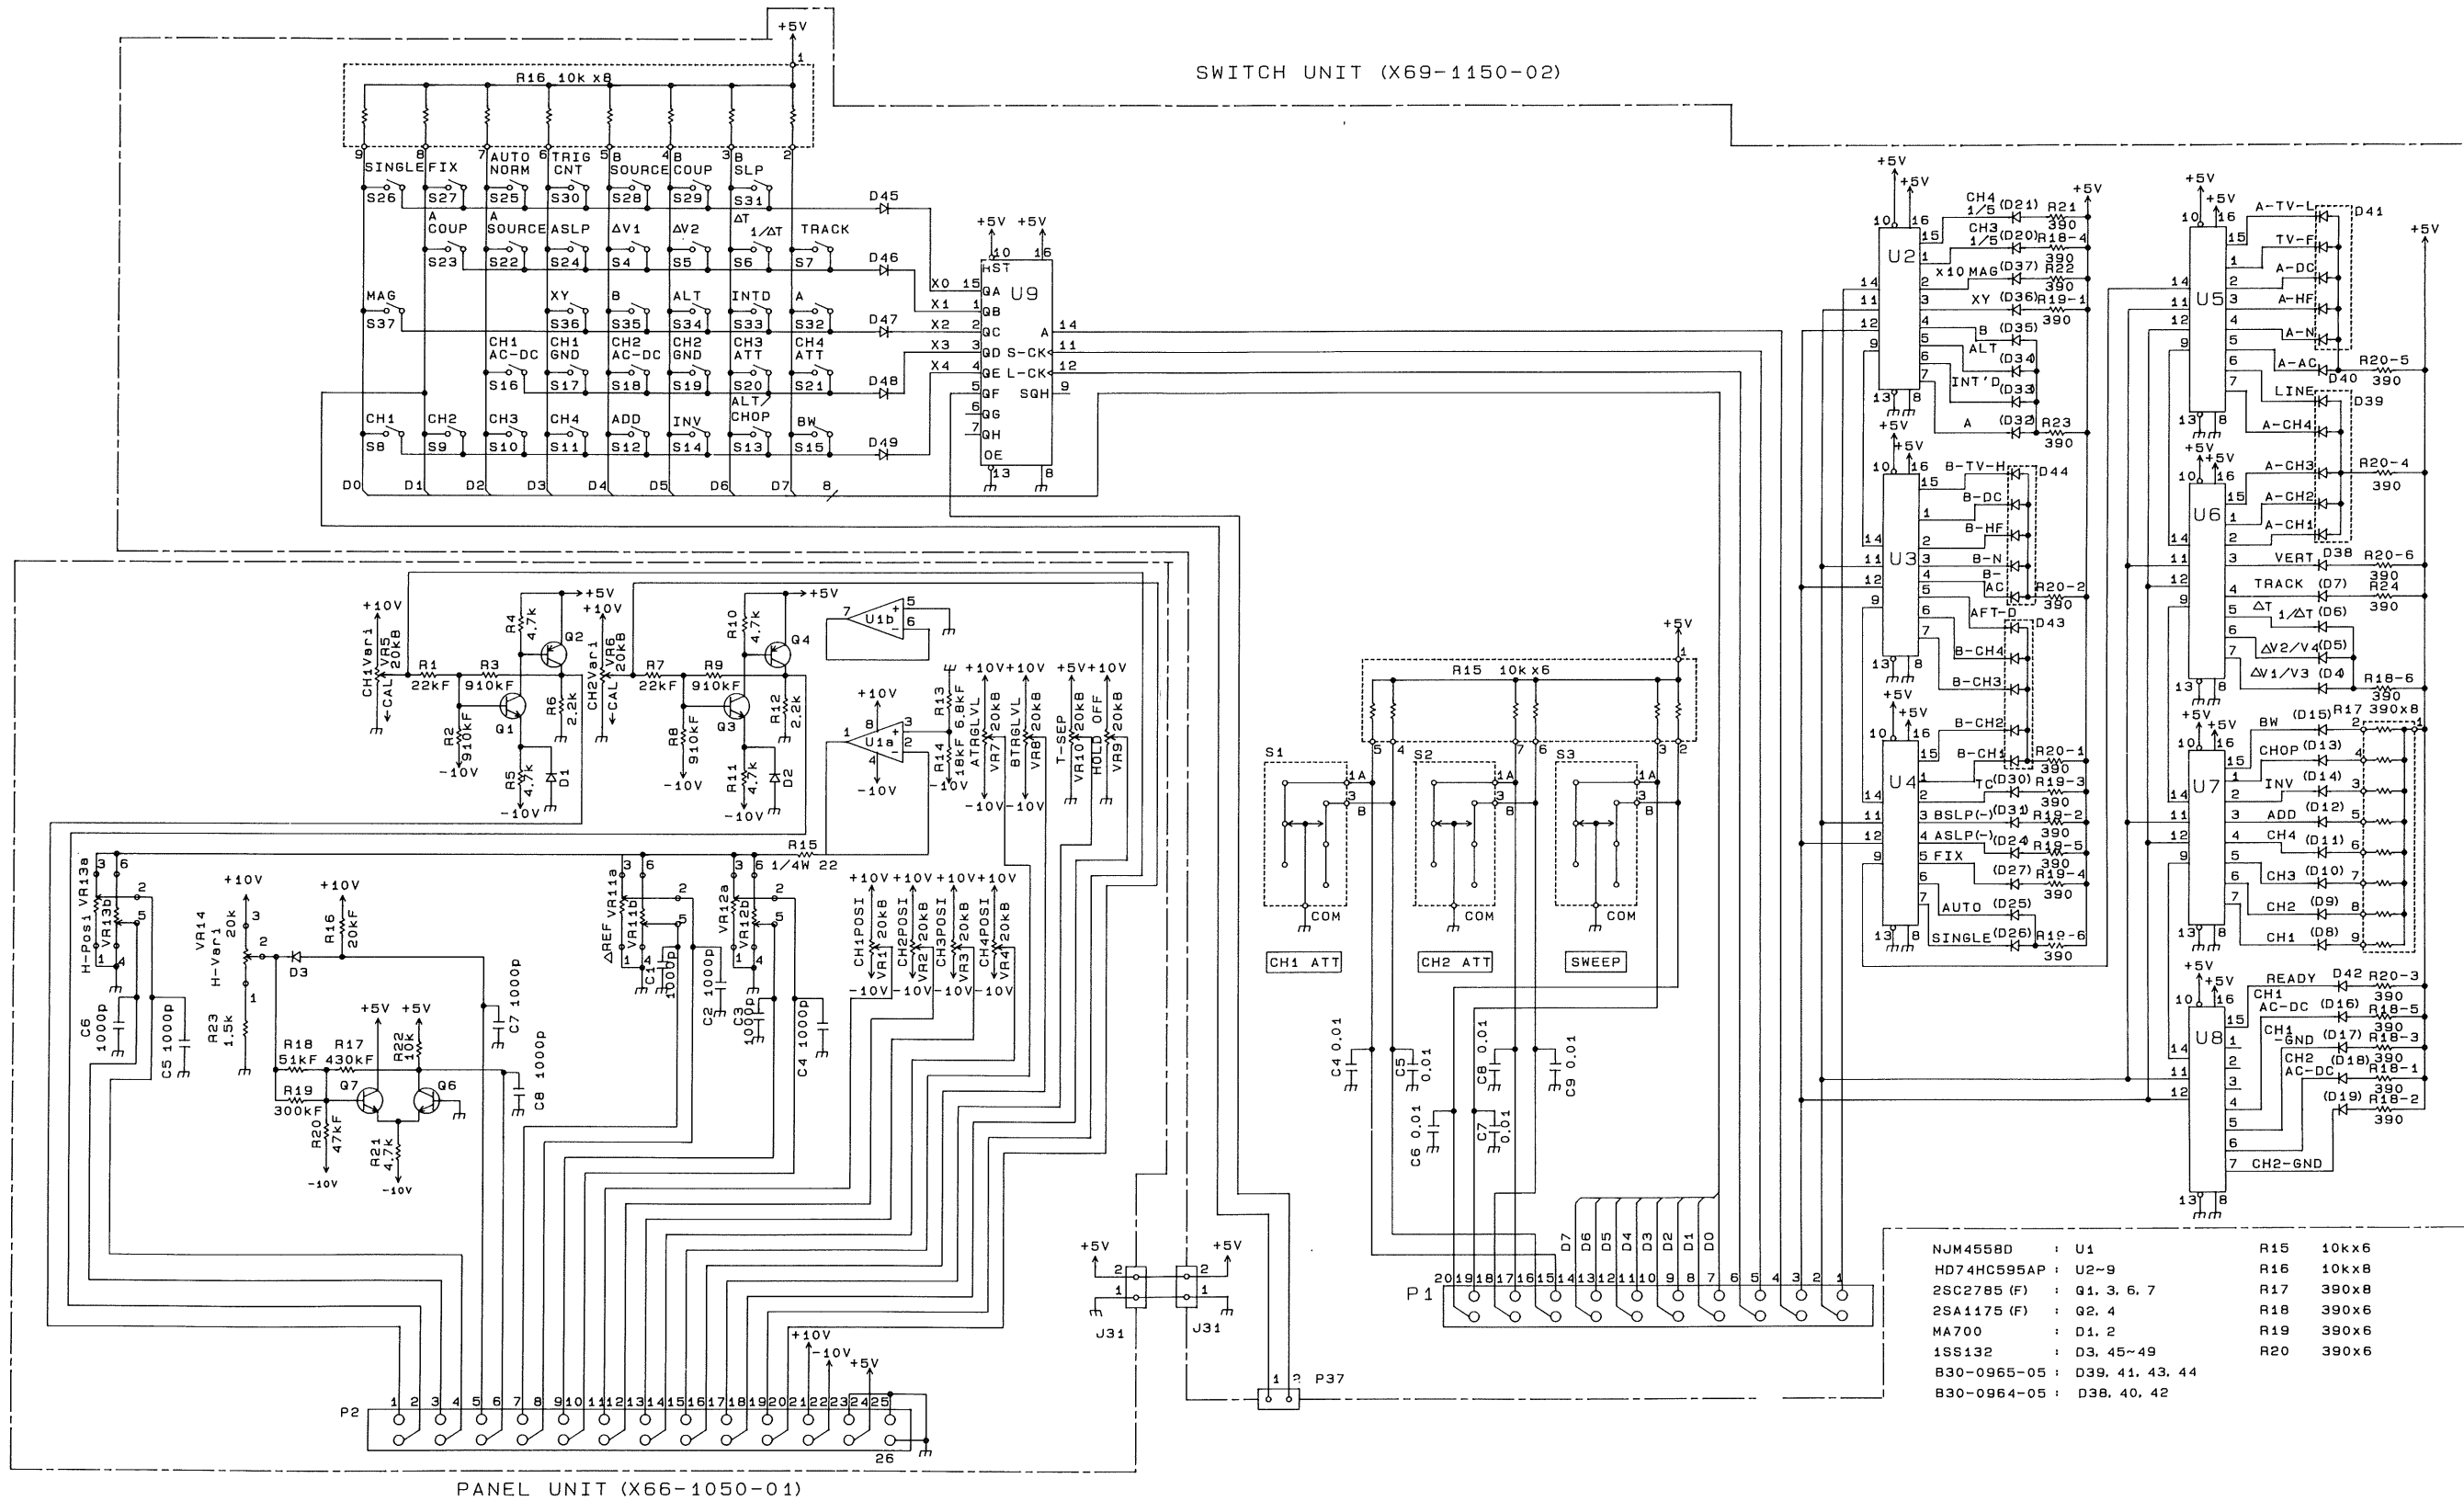

VERTICAL PREAMP UNIT (X73-1760-01)

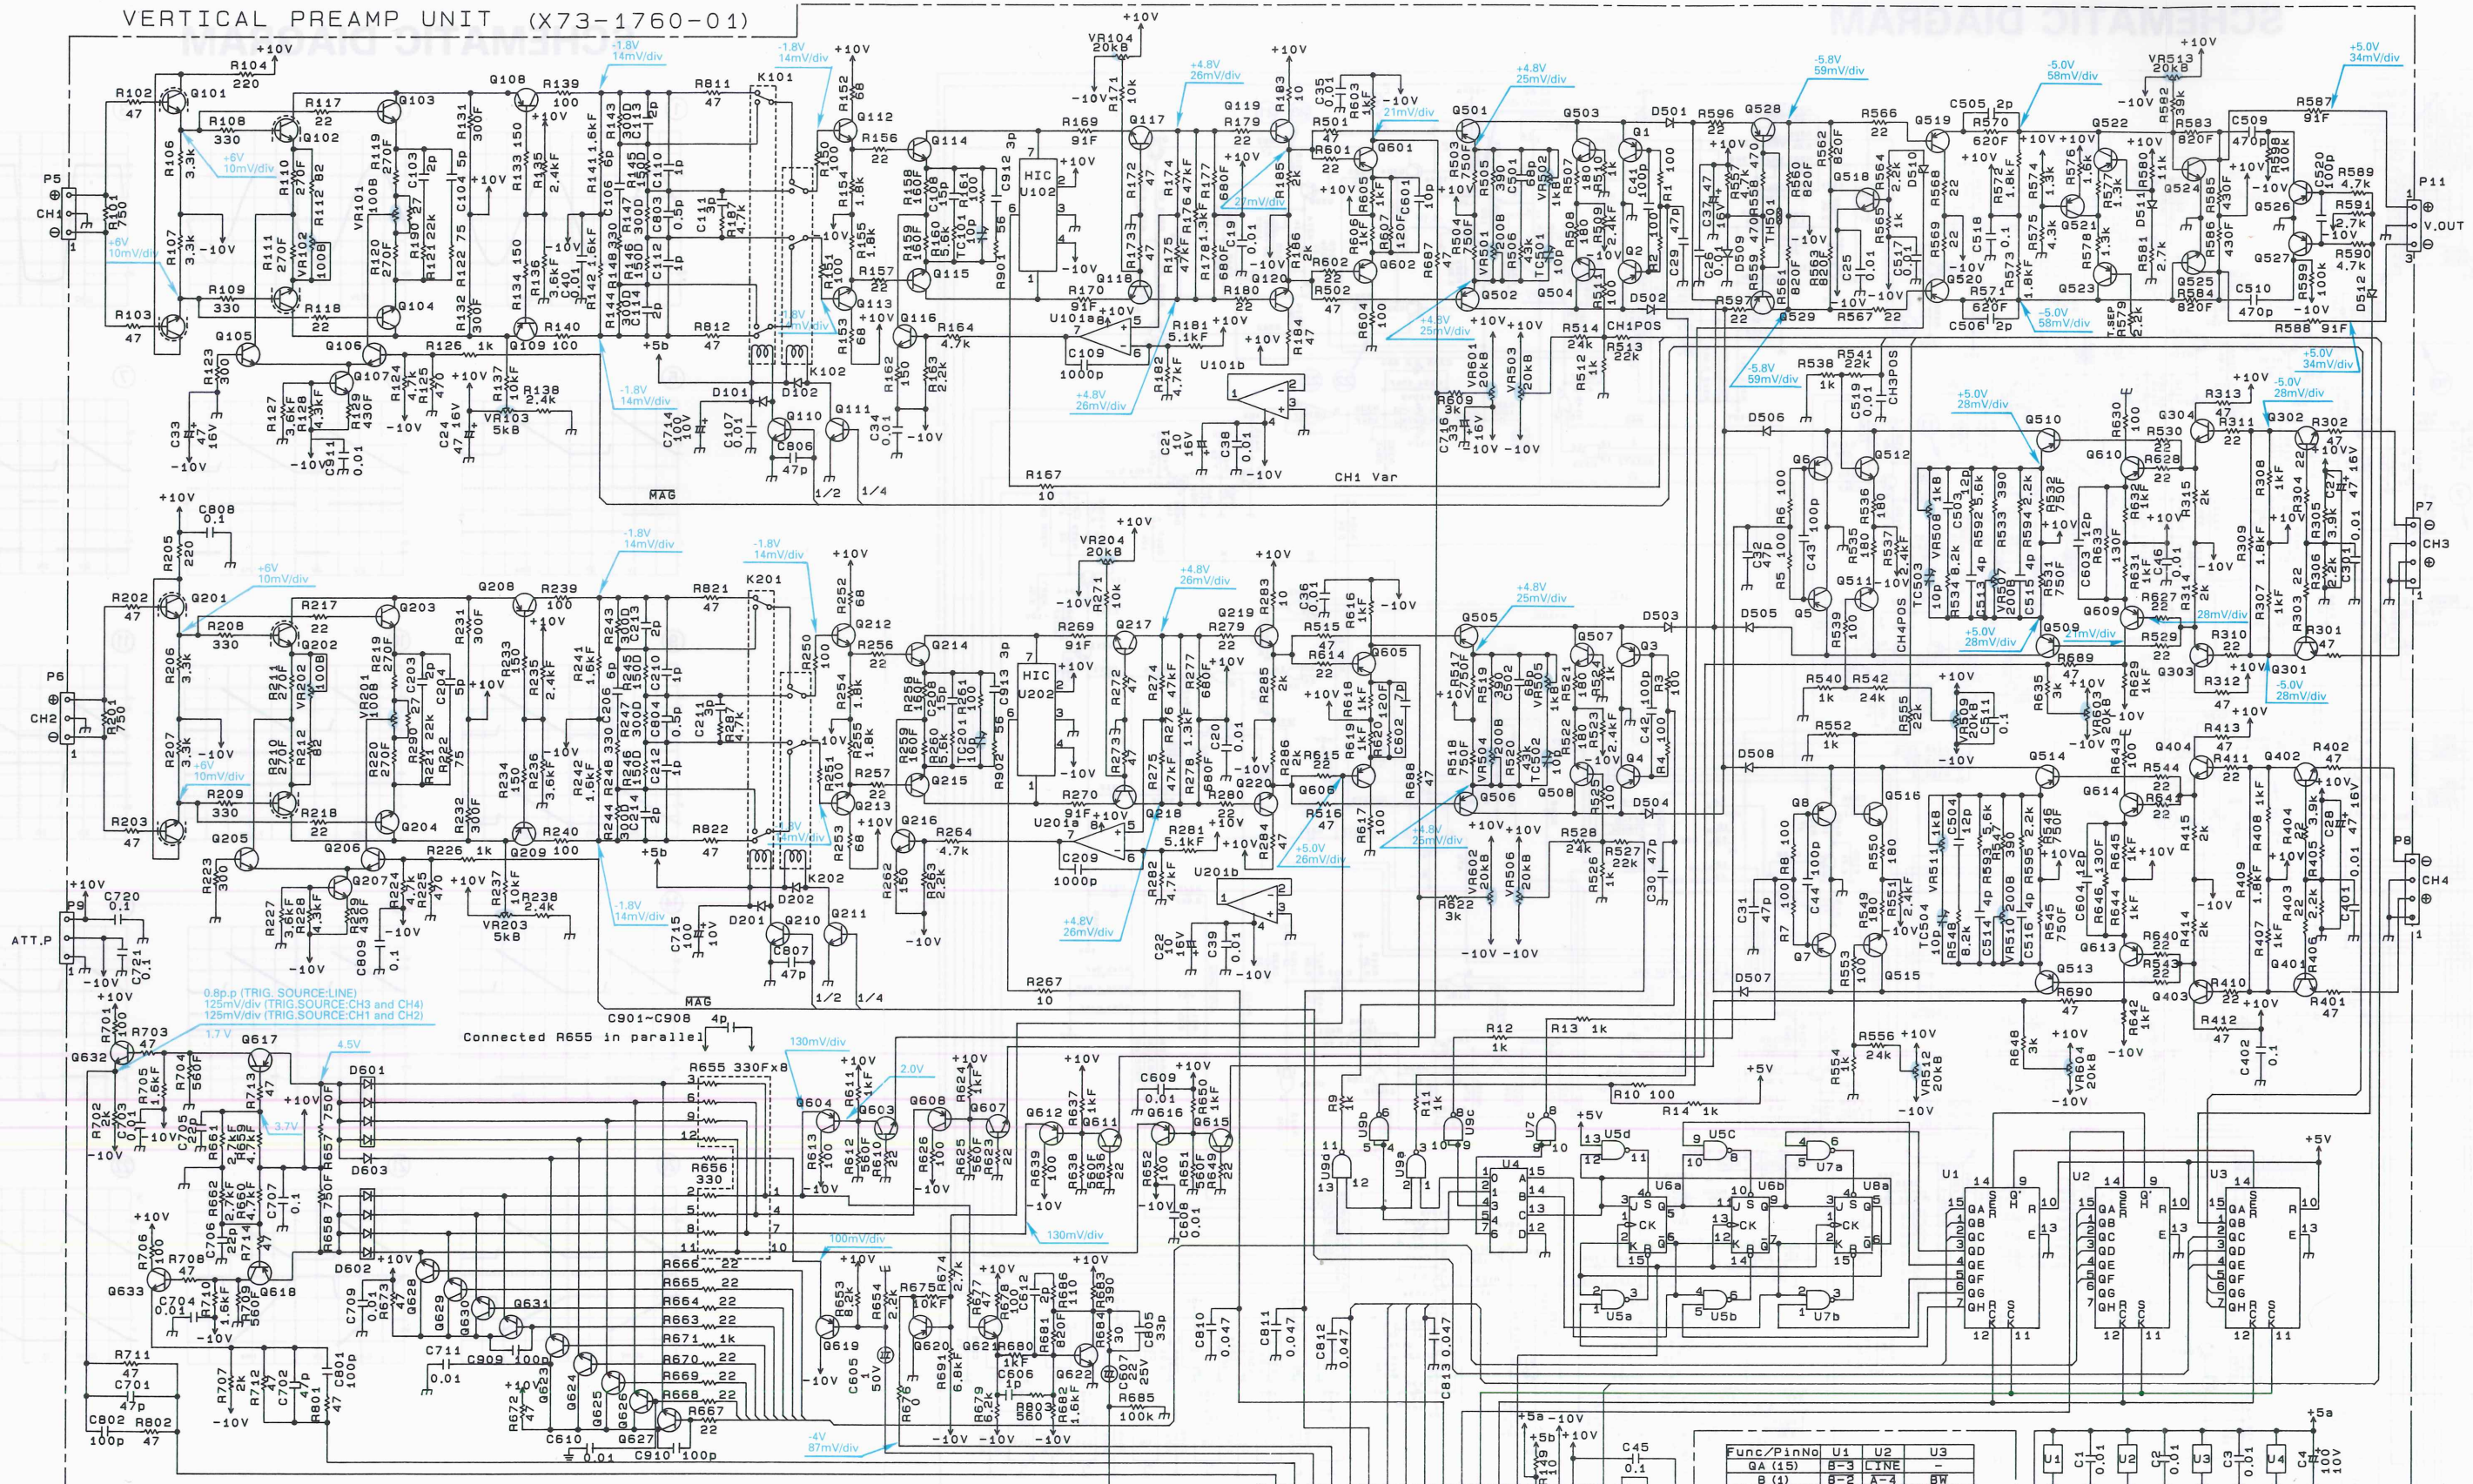


- 2SA1175 (F): Q521, 522, 523, 619, Q620
 2SA1206 : Q501, 502, 505, 506, Q509, 510, 513, 514, Q519, 520, 526, 527, Q601, 602, 604, 605, Q606, 608, 609, 610, Q612, 613, 614, 616
- 2SA1005 (K) : Q1-8
 2SA1161 : Q108, 109, 208, 209, Q528, 529, 617, 618
 2SC3315 (C) : Q105, 106, 107, 205, Q206, 207, 503, 504, Q507, 508, 511, 512, Q515, 516, 624, 625, Q626, 627, 628, 629, Q630, 631
- 2SC2785 (F) : Q116, 216, 623
 2SC3732 (L) : Q518
 2SC3779 (D) : Q103, 104, 112-115, Q117-120, 203, 204, Q212-215, 217-220, Q301-304, 401-404, Q524, 525, 603, 607, Q611, 615, 621, 622, Q632, 633
- 2SC4049 : Q110, 111, 210, 211
 2SC4072 : Q101, 102, 201, 202

Func/PinNo	U1	U2	U3
GA (15)	B-3	TYNE	-
B (1)	B-2	A-4	BW
C (2)	B-1	A-3	CH2 1/4
D (3)	ADDE	A-2	CH2 1-2
E (4)	CH4E	A-1	CH2 MAG
F (5)	CH3E	B-4	CH1 1/4
G (6)	CH2E	B-3	CH1 1/2
H (7)	CH1E	B-2	CH1 MAG


- SN74ALS00AN : U5, 7, 9
 SN74ALS112AN : U6, 8
 HD74LS42P : U4
 HD74HC595P : U1, 2, 3
 NJM4558D : U101, 201
- KMC03 : U102, U202
 1SS132 : D101, 102, 201, 202
 D501-508, 509, 511, D603
 DAP401 : D601, 602
- MTZ10JC : D510
 MTZ5.1JB : D512
 SDT100 : TH501

SCHEMATIC DIAGRAM


①




②




③




④




⑤




⑥




⑦




⑧




⑨




⑩




⑪




⑫




⑬




⑭




⑮




⑯




⑰




⑱




⑲



⑳



SCHEMATIC DIAGRAM

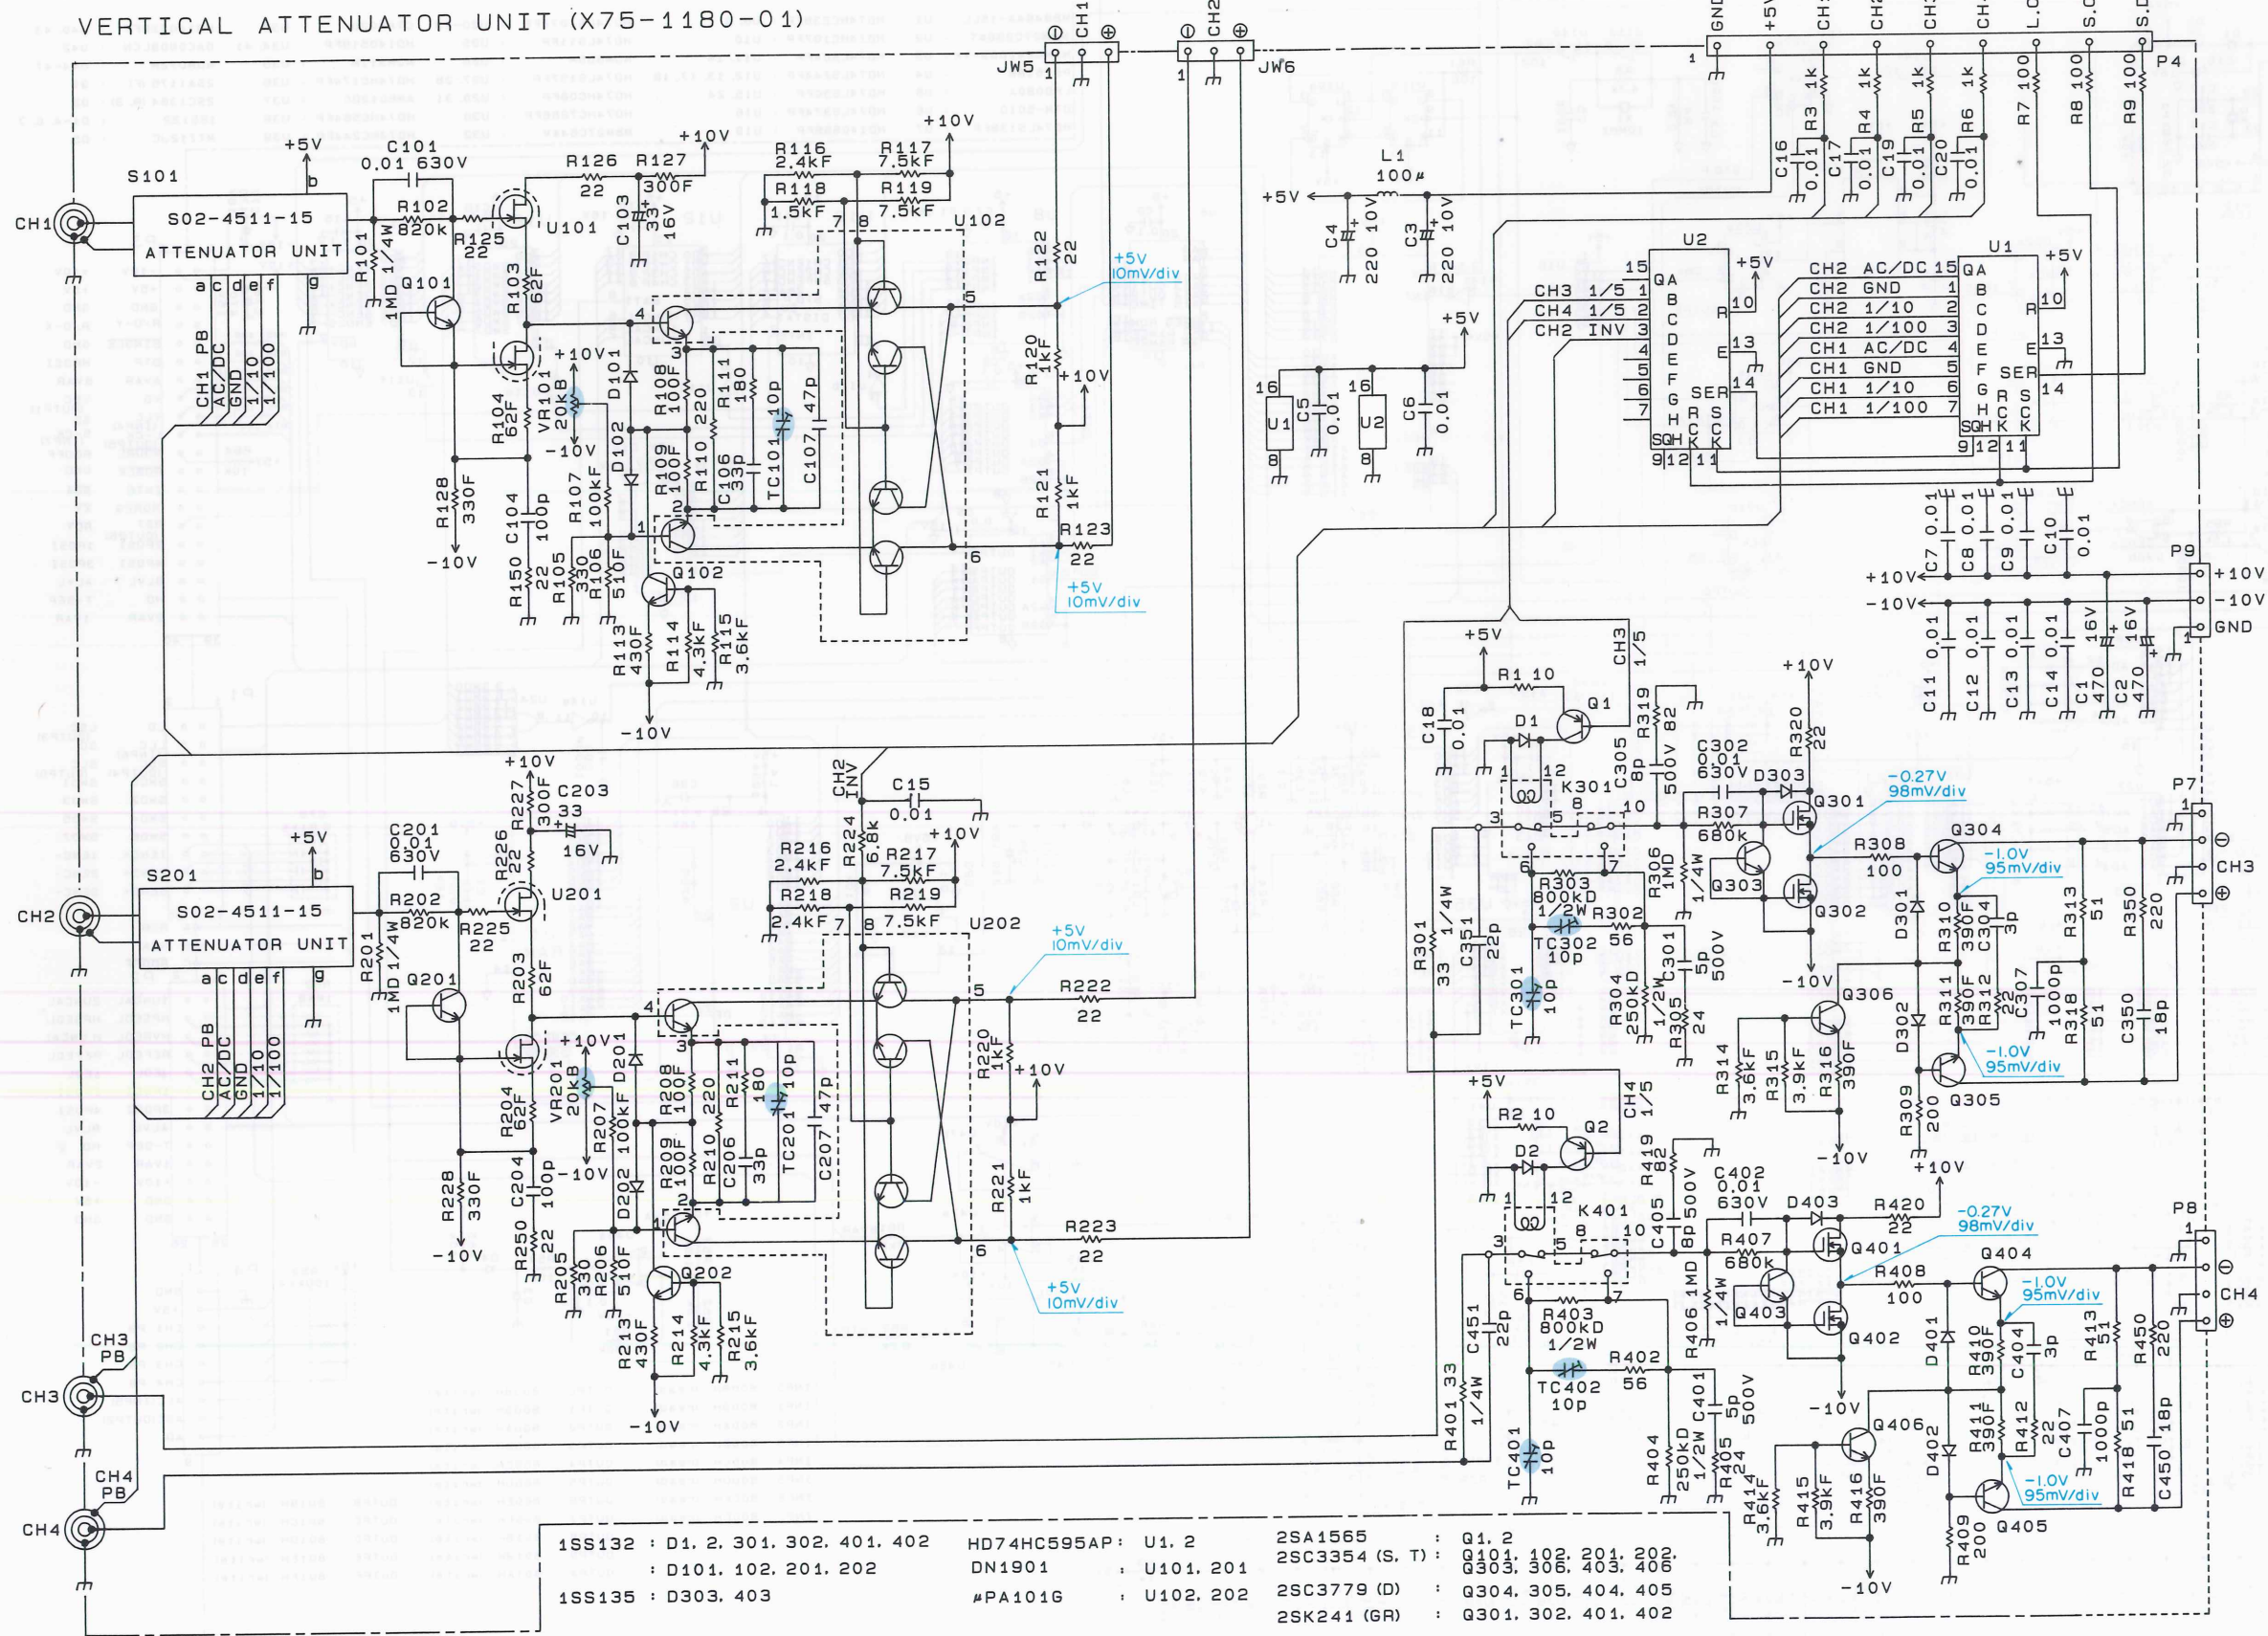


- | | | |
|------------------------------------|---------------------|--------------------------------------|
| 1SS132 : D1. 2. 301. 302. 401. 402 | HD74HC595AP : U1. 2 | 2SA1565 : Q1. 2 |
| : D101. 102. 201. 202 | DN1901 : U101. 201 | 2SC3354 (S. T) : Q101. 102. 201. 202 |
| 1SS135 : D303. 403 | #PA1016 : U102. 202 | 2SC3779 (D) : Q304. 305. 404. 405 |
| | | 2SK241 (GR) : Q301. 302. 401. 402 |


FUNC/PinNo	U1	U2
GA (15)	CH1 AC/DC	-
B (1)	CH2 GND	-
C (2)	CH2 1/10	CH3 1/5
D (3)	CH2 1/100	CH2 INV
E (4)	CH1 AC/DC	-
F (5)	CH1 GND	-
G (6)	CH1 1/10	-
H (7)	CH1 1/100	-

SCHEMATIC DIAGRAM

R/O UNIT (X77-1490-01)

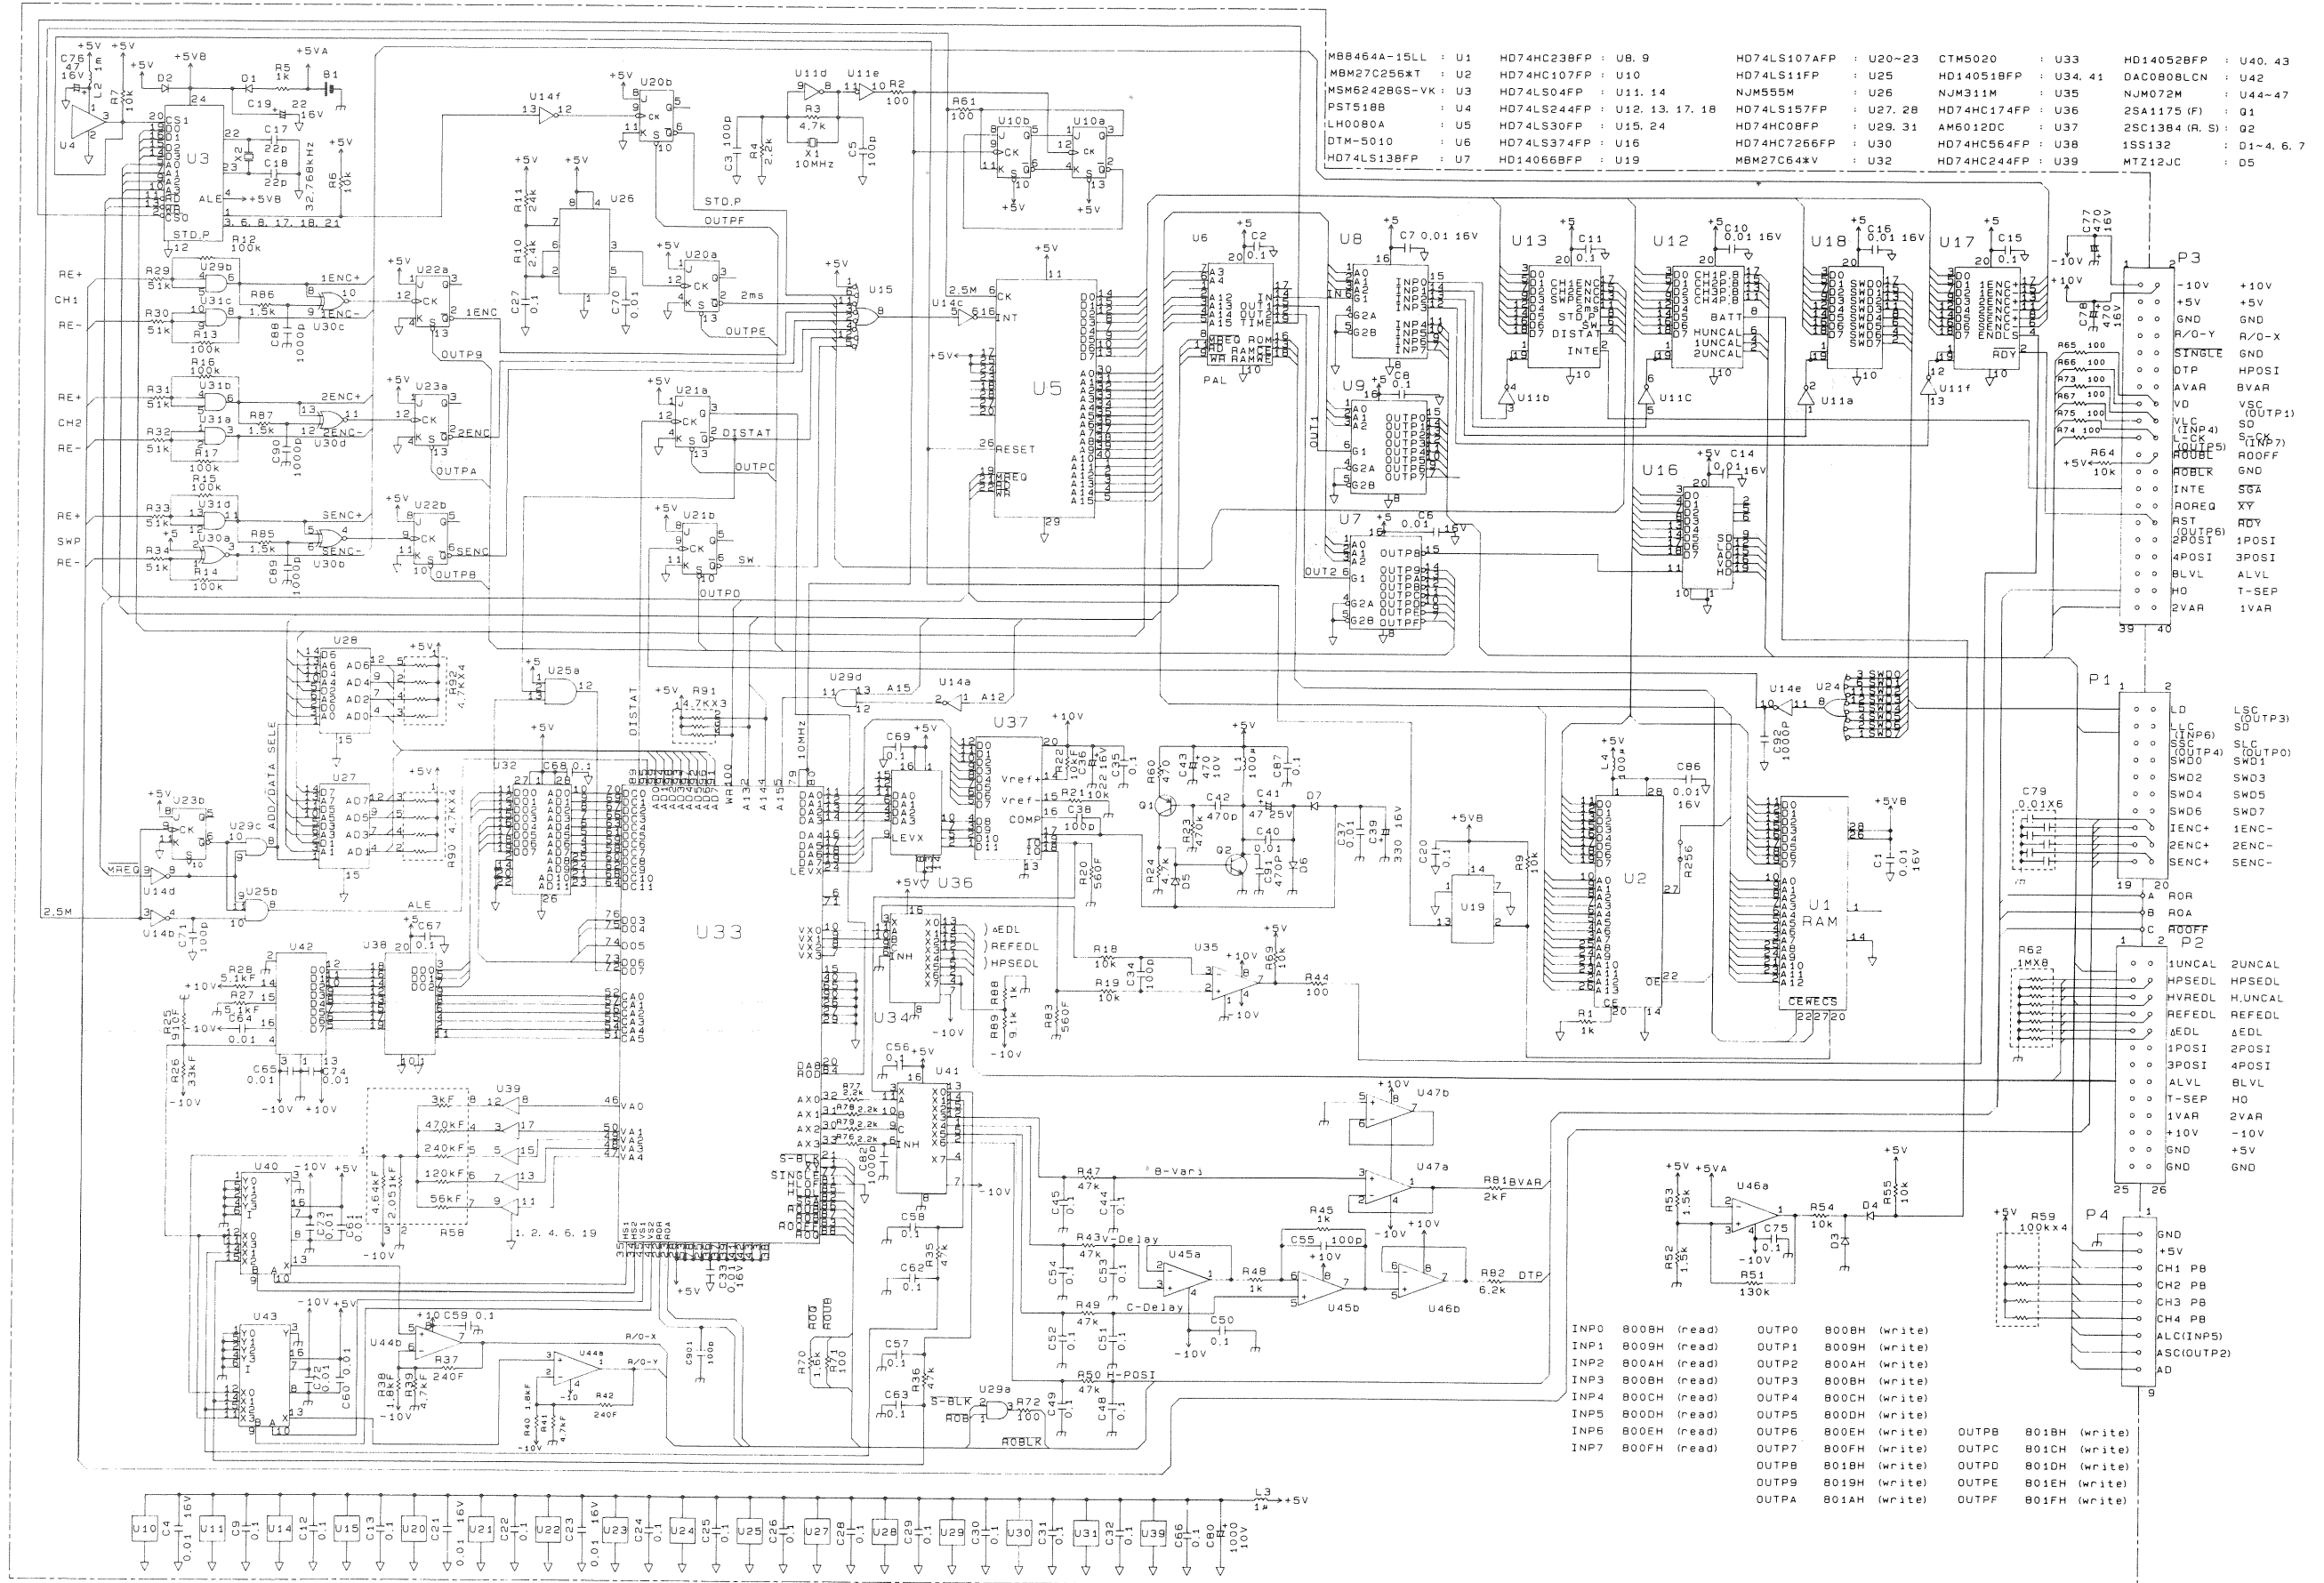

FINAL AMP UNIT (X80-1100-02)

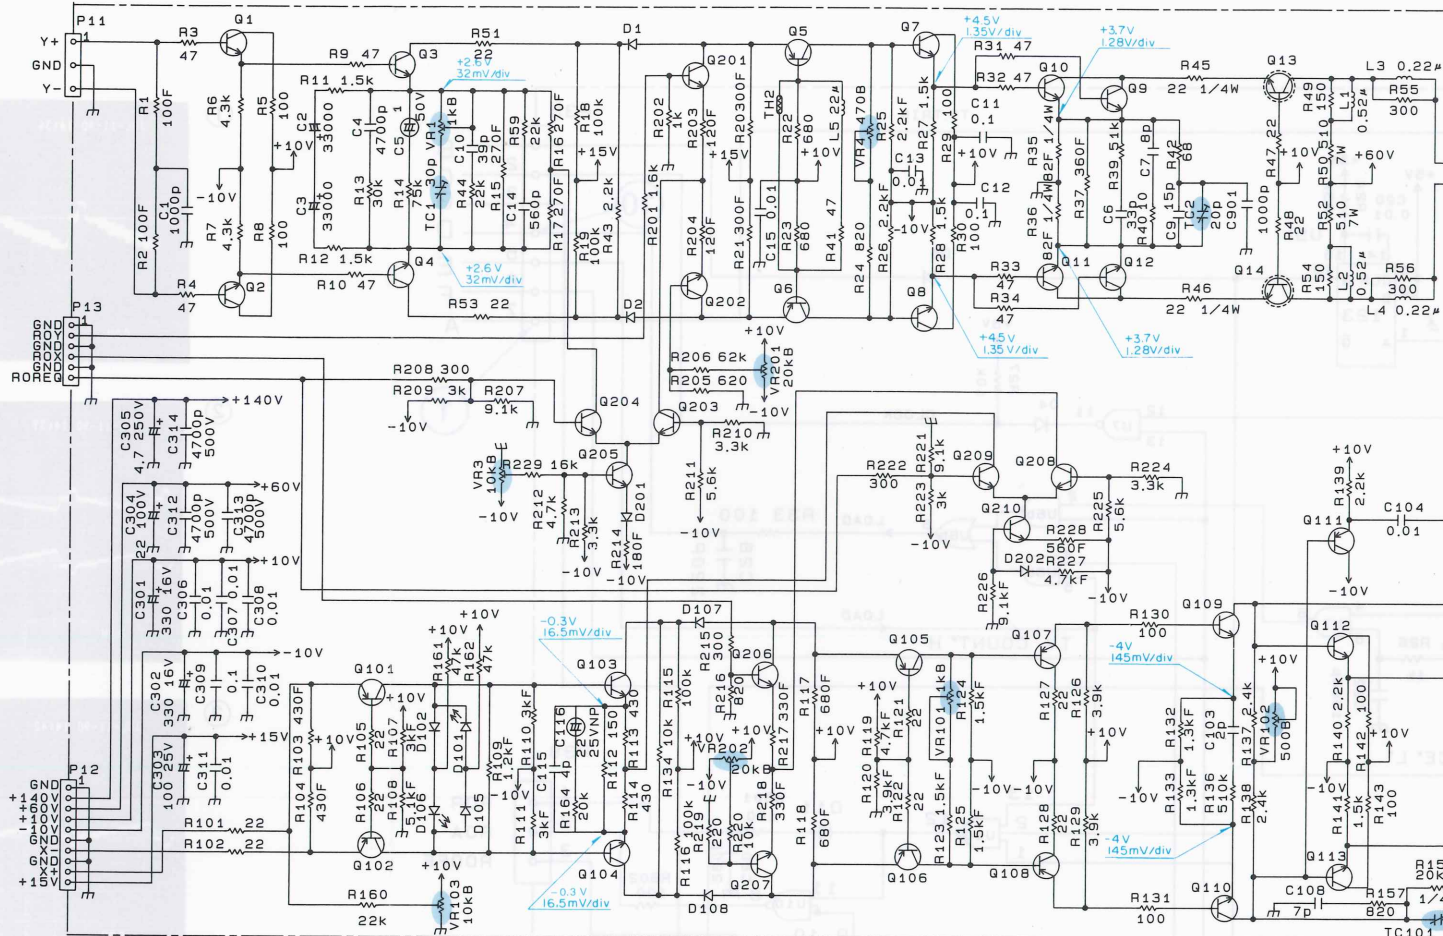


- 2SA1005 (K) : Q101, 102, 105, 106, 107, 108
- 2SA1161 : 05, 6
- 2SA1206 : Q111
- 2SA1406 (E, F) : Q116, 117
- 2SC1164 (G) *S : Q13, 14
- 2SC2785 (F) : Q205, 210
- 2SC3315 (C) : Q103, 104, 201, 202, 206, 207
- 2SC3354 (S, T) : Q109, 110, 112, 113, 203, 204
- 2SC3779 (D) : Q208, 209
- 2SC3600 (E, F) : Q114, 115

- 15S132 : D1, 2, 107, 108, 201, 202
- MA700 : D102, 106
- TLR112 : D101, 106
- SDT100 : TH2

SCHMATIC DIAGRAM


CRT

VR UNIT (XB1-2330-02 A/4)

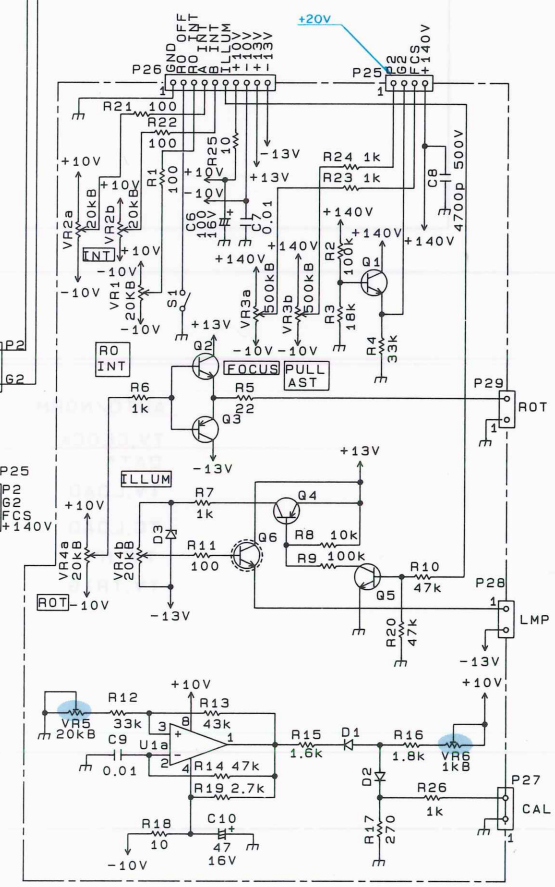


- NJM4558D : U1
- 15S132 : D1, 2
- MT224JC : D3
- 2SA684 (G) : Q3
- 2SA1175 (F) : Q4
- 2SC2910 (S, T) : Q4
- 2SC2911 (S, T) : Q6
- 2SC3315 (C) : Q8
- 15S83 : D6, 7, 10, 13
- 2SA1208 (S, T) : Q3
- 15S132 : D1, 2, 3, 11, 12
- NE-2B : NL1-4
- 2SC1384 (G) : Q2
- 2SC2785 (F) : Q5
- 2SD1666 (S) : Q6

POWER SUPPLY UNIT (X68-1500-01)

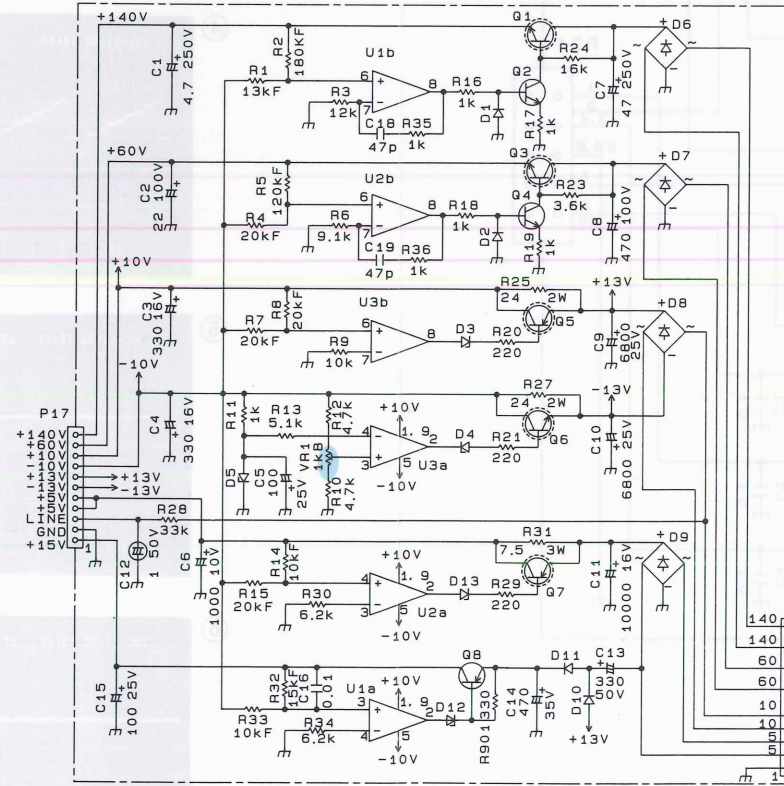

- 15S132 : D1, 2
- MT213JB : D3, 4
- MT25.1JB : D5
- MT27.5JA : D13
- MT220JC : D12
- 15R35-200A : D10, 11
- S1V860 : D5, 7
- S4VB40F : D8, 9
- NJM4556S : U1, 2, 3
- 2SA684 (G) : Q8
- 2SB1133 (S) : Q5, 7
- 2SC2271 (D) : Q2, 4
- 2SD1409 : Q1, 3
- 2SD1666 (S) : Q6


HIGH VOLTAGE UNIT (X68-1510-02)

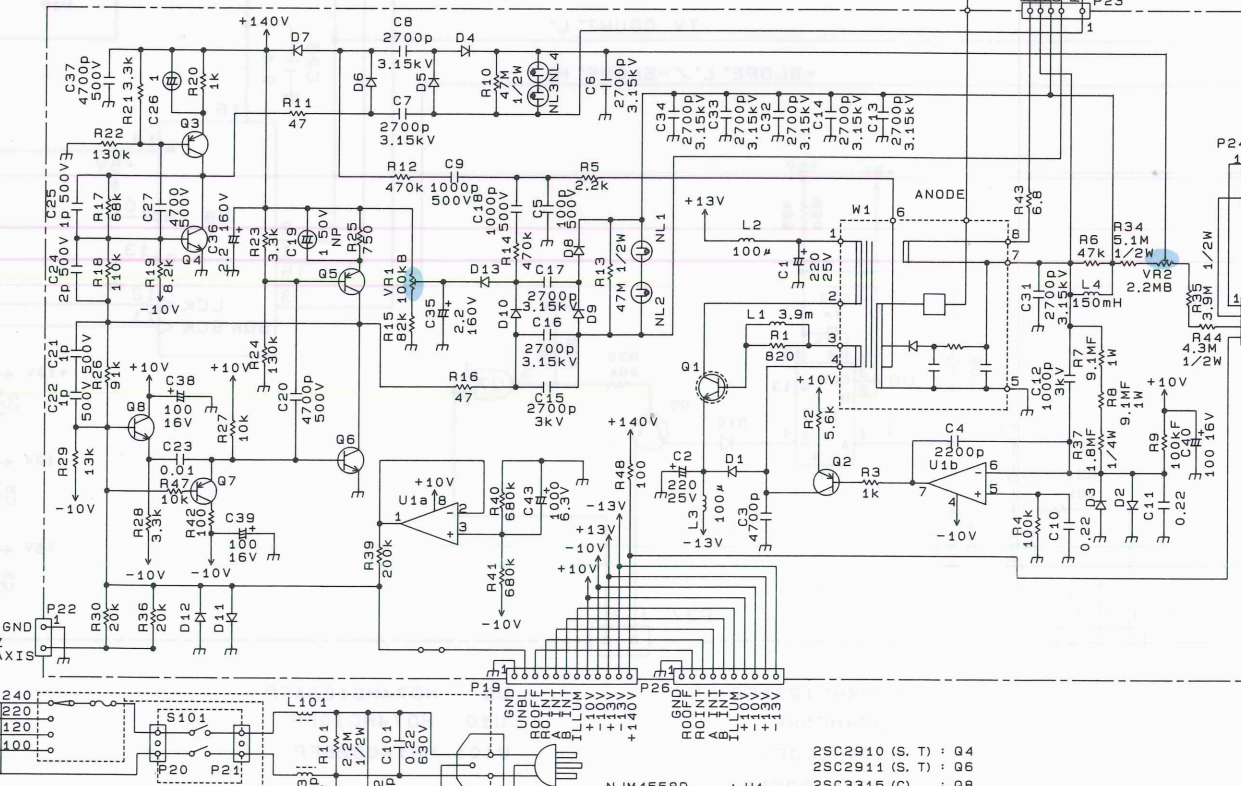

- NJM4558D : U1
- 2SD613 (E) : Q1
- 29A1175 (F) : Q2, Q7
- 2SA1208 (S, T) : Q3
- 2SA1209 (S, T) : Q5
- 2SC2910 (S, T) : Q4
- 2SC2911 (S, T) : Q6
- 2SC3315 (C) : Q8
- 15S83 : D6, 7, 10, 13
- 15S132 : D1, 2, 3, 11, 12
- NE-2B : NL1-4


XB1-2330-02 C/4











XB1-2330-02 B/4

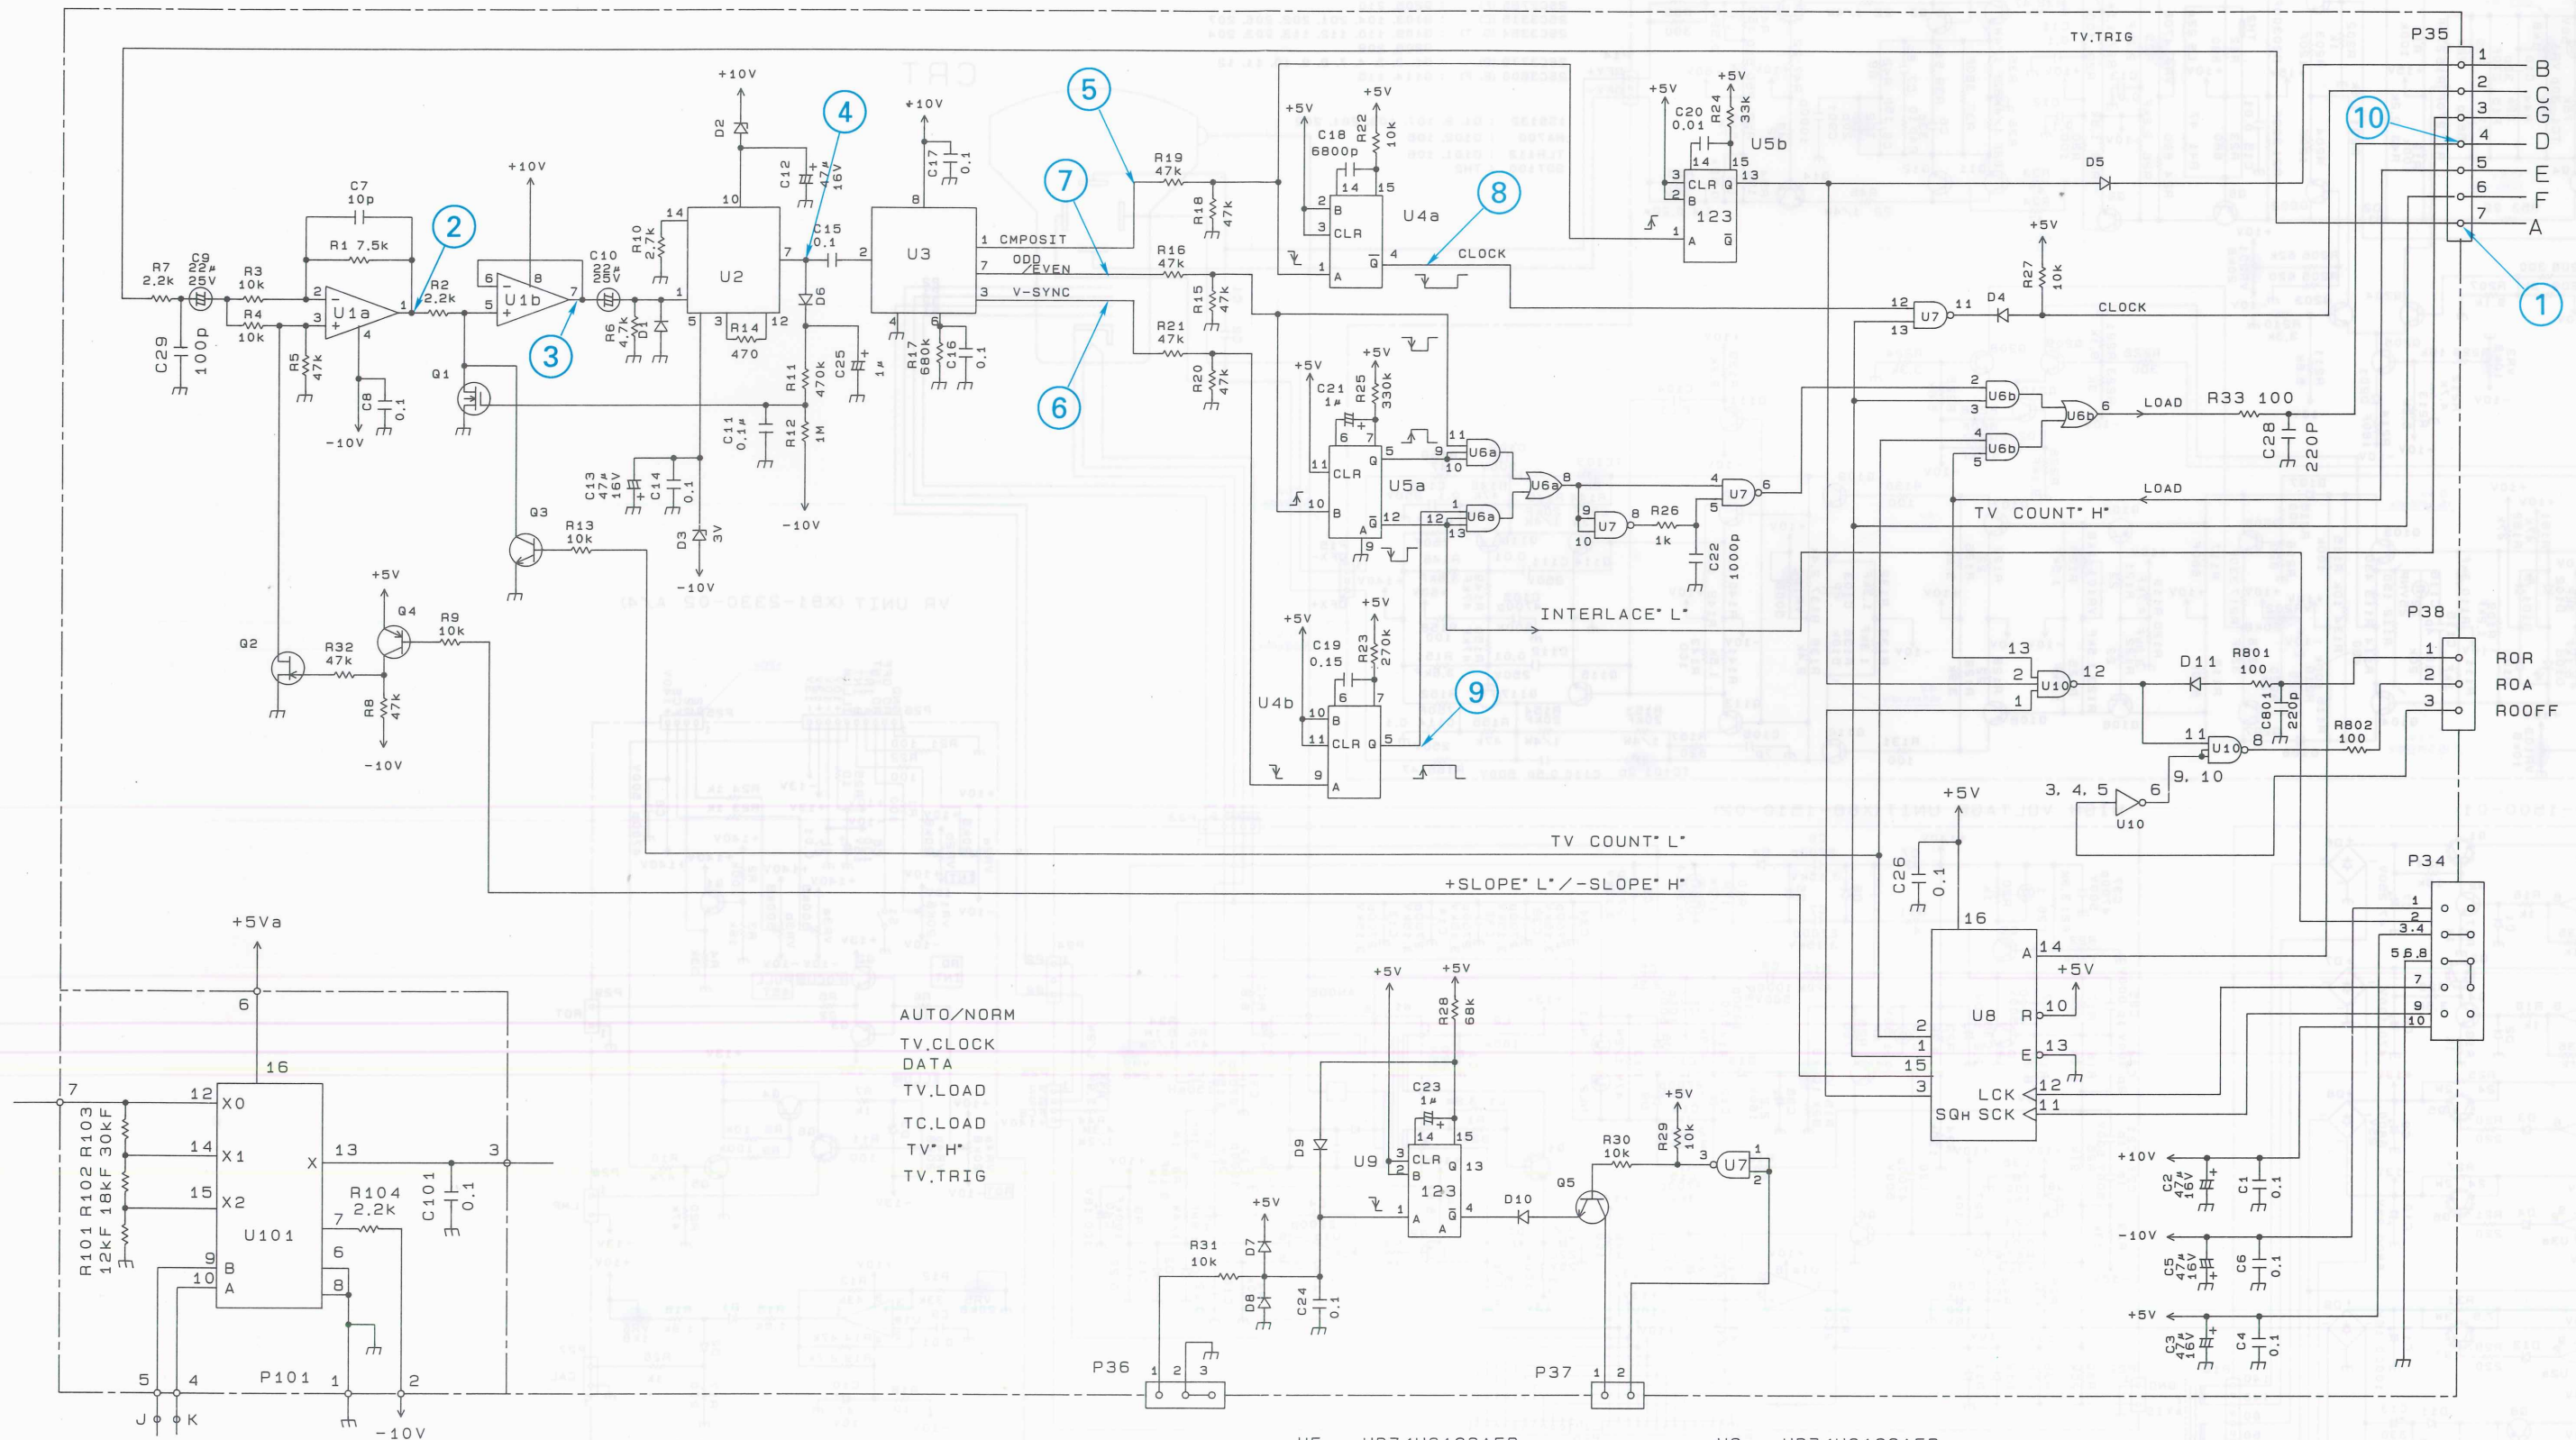

- | | | |
|---------------------|--------------------------|----------------|
| 2SC2785 (F) : Q3. 5 | 1SS132 : D4 5 6 7 8 9 11 | U1 NJM072M |
| 2SA1175 (F) : Q4 | MA700 : D1. 10 | U2 UA733CNS |
| 2SK241 (GR) : Q1 | MTZ3.0JA : D2. 3 | U3 LM1881M |
| 2SK304 (F) : Q2 | | U4 HD74HC221FP |

- | | |
|-----------------|-----------------|
| U5 HD74HC123AFP | U9 HD74HC123AFP |
| U6 HD74HC58F | U10 HD74HC10FP |
| U7 HD74HC00FP | U101 HD14052BFP |
| U8 HD74HC595FP | |

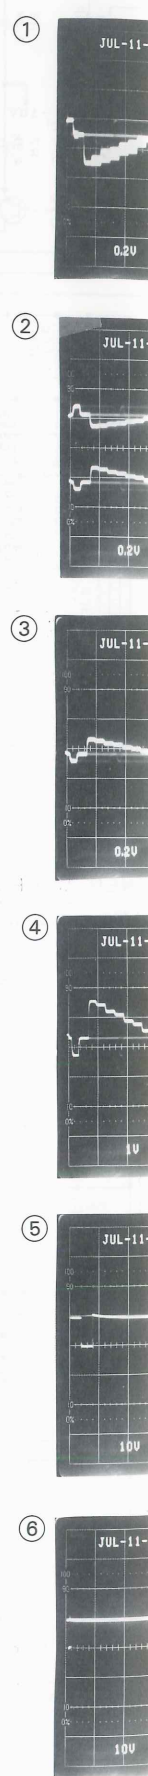

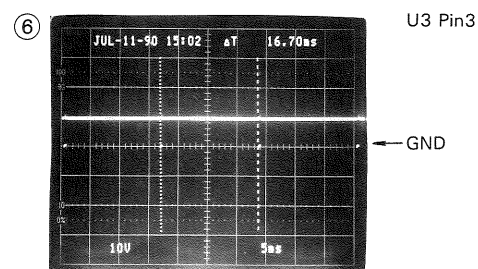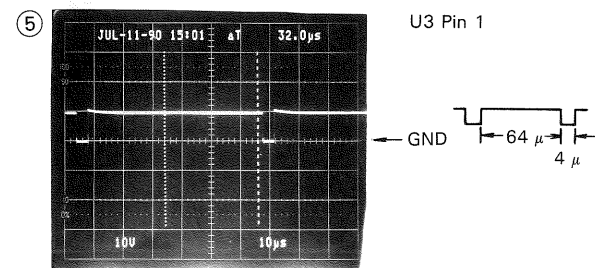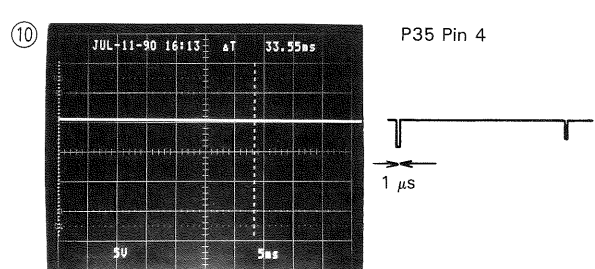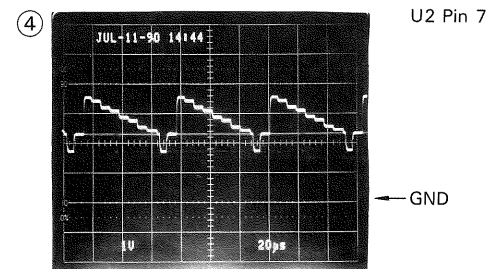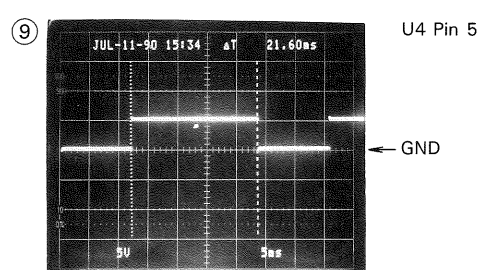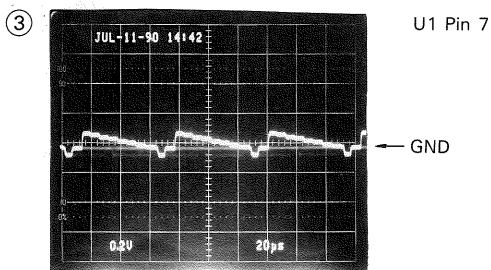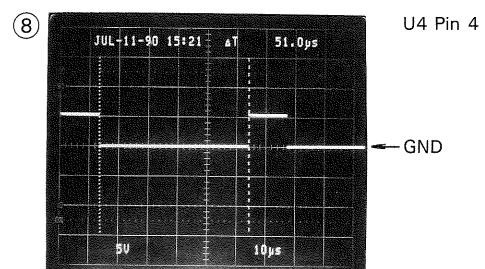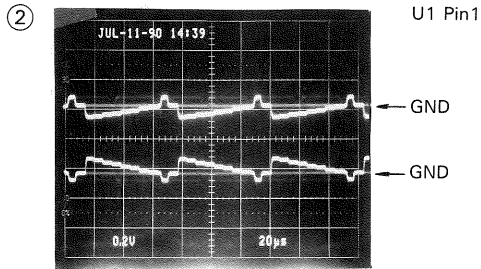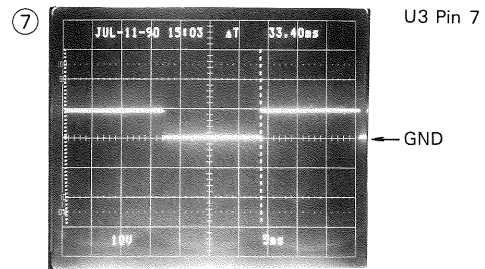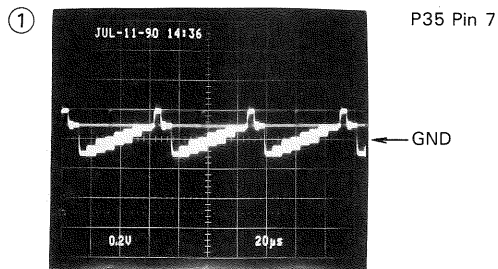


U8		TV COUNT	Ohter
Pin 1		H	L
Pin 2		L	H
		When TV COUNT + A SWEEP is faster than 0.2 ms	Ohter
Pin 3		H	L
		When TV COUNT: SLOPE " + "	SLOPE " - "
Pin 15		L	H

U5		When TV signal is input	When TV signal is not present
Pin 13		H	L
		When INTERLACED signal is input	When PROGRESSIVE signal is input
Pin 5		H	L
Pin 12		L	H

P.C BOARD

PANEL UNIT (X66-1050-01)


Pattern side view

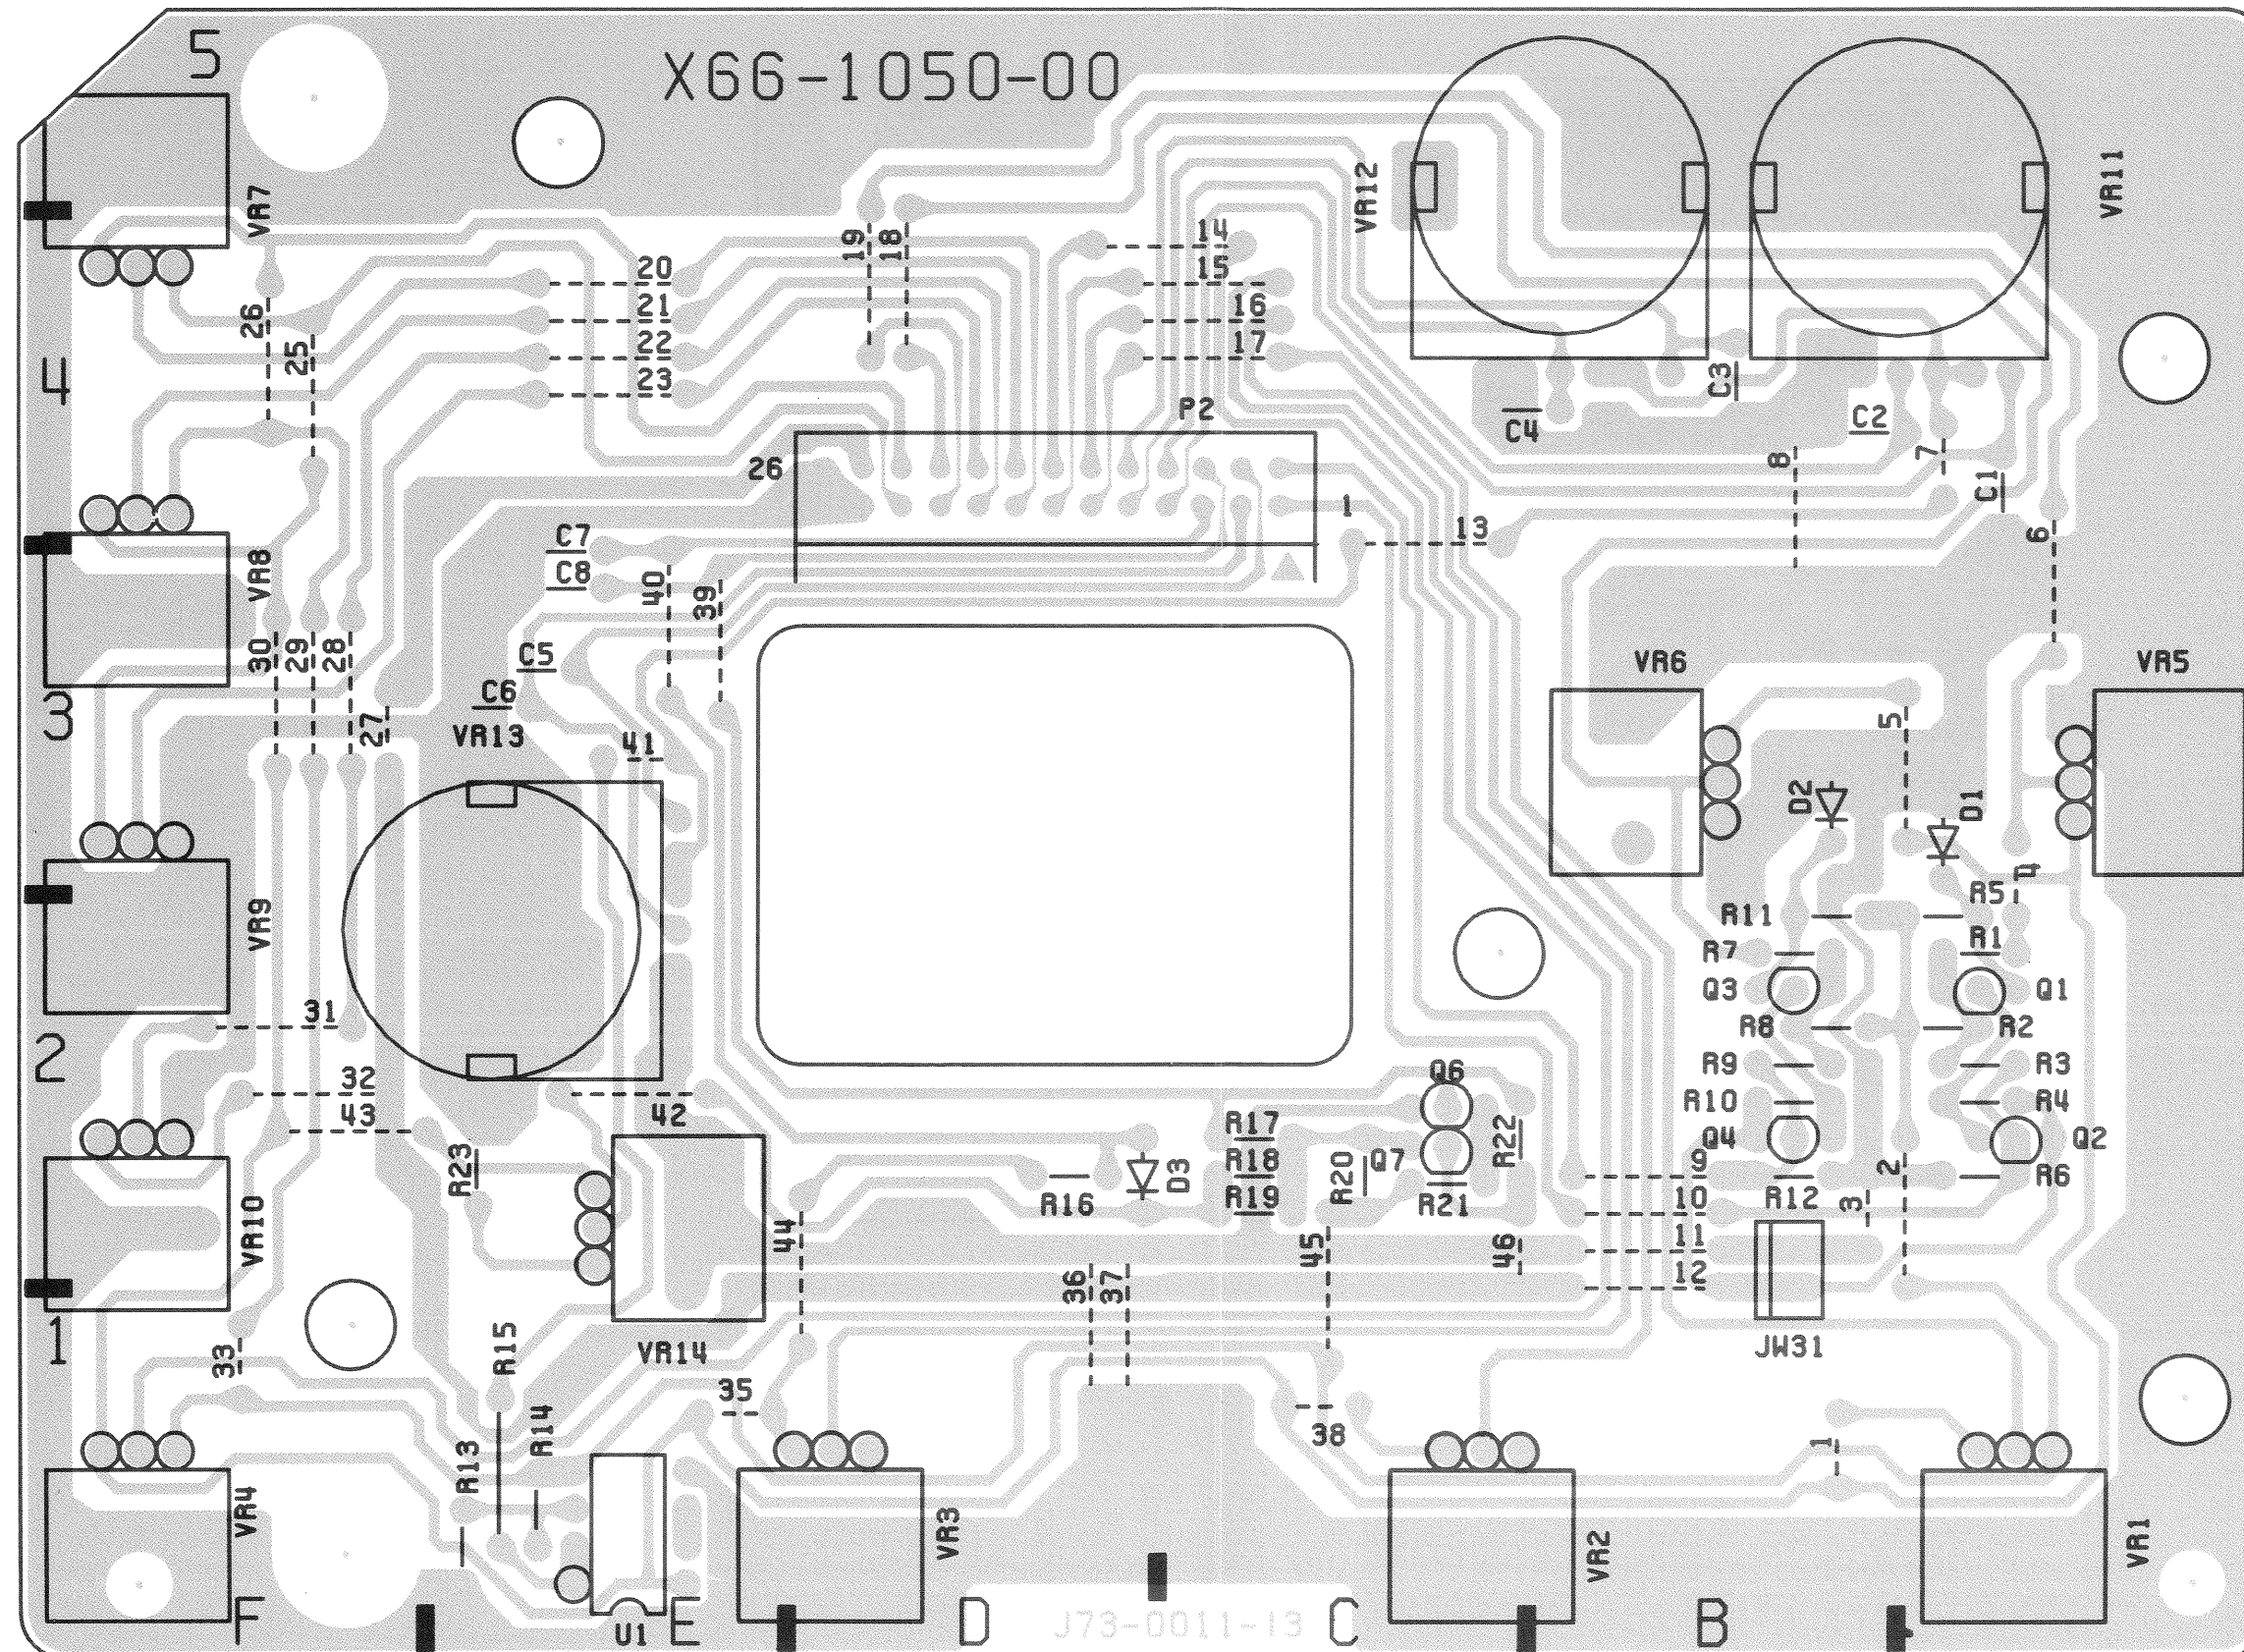

P.C BOARD

POWER SUPPLY UNIT (X68-1500-01)


PANEL UNIT (X68-1080-01)

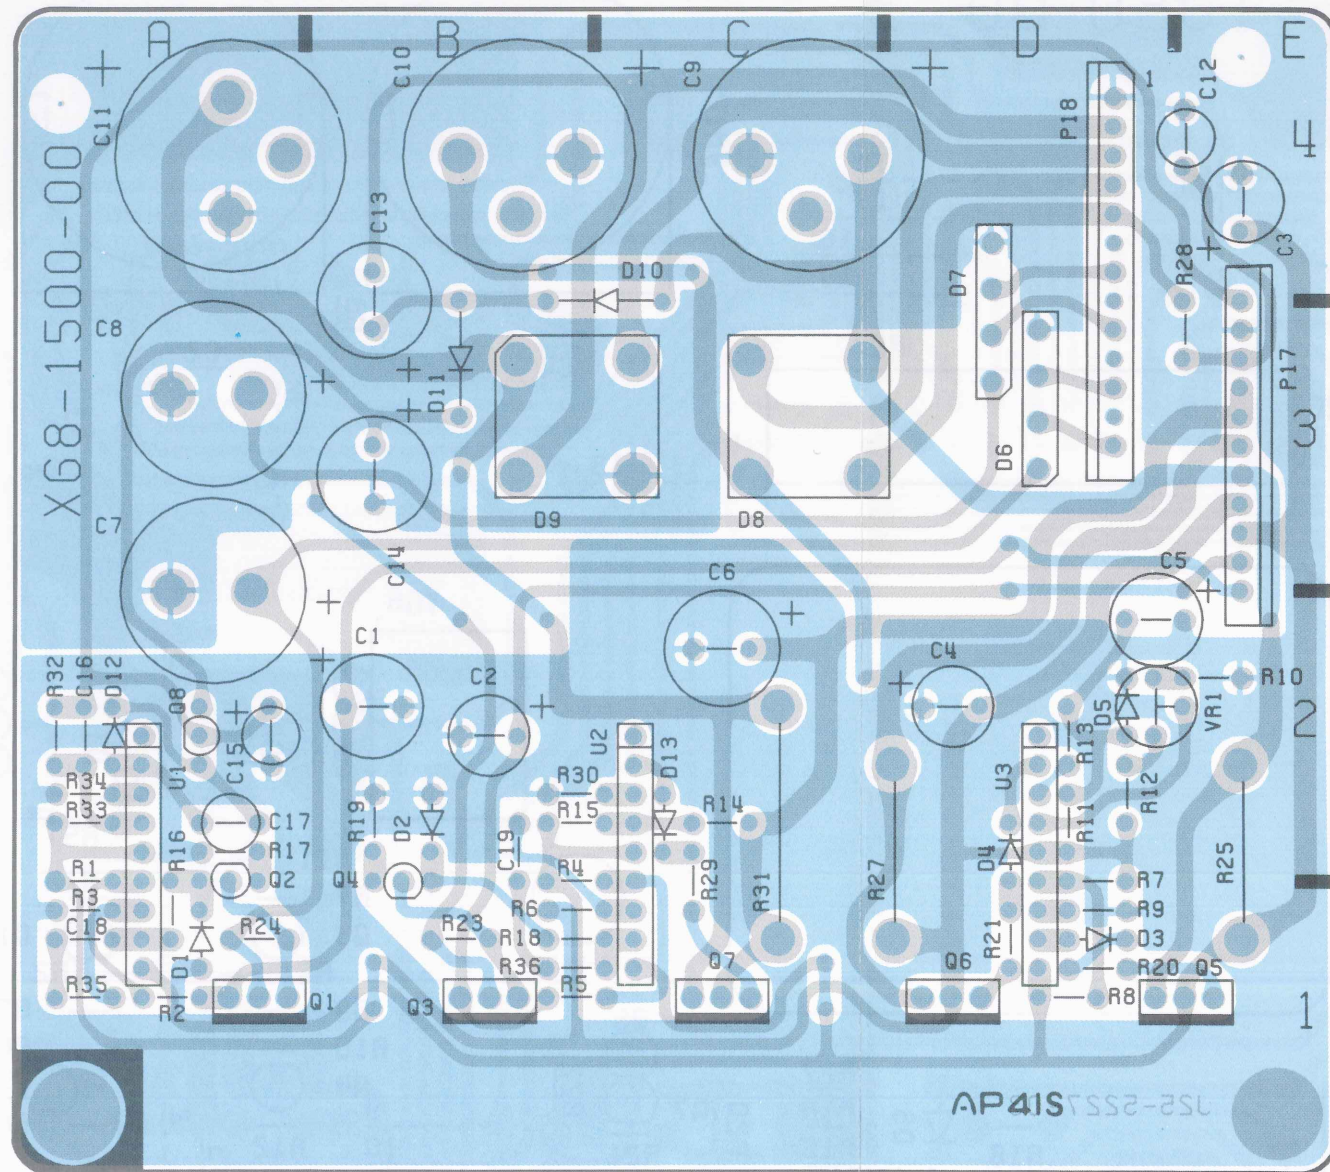

P.C BOARD

HIGH VOLTAGE UNIT (X68-1510-02)


Pattern side view

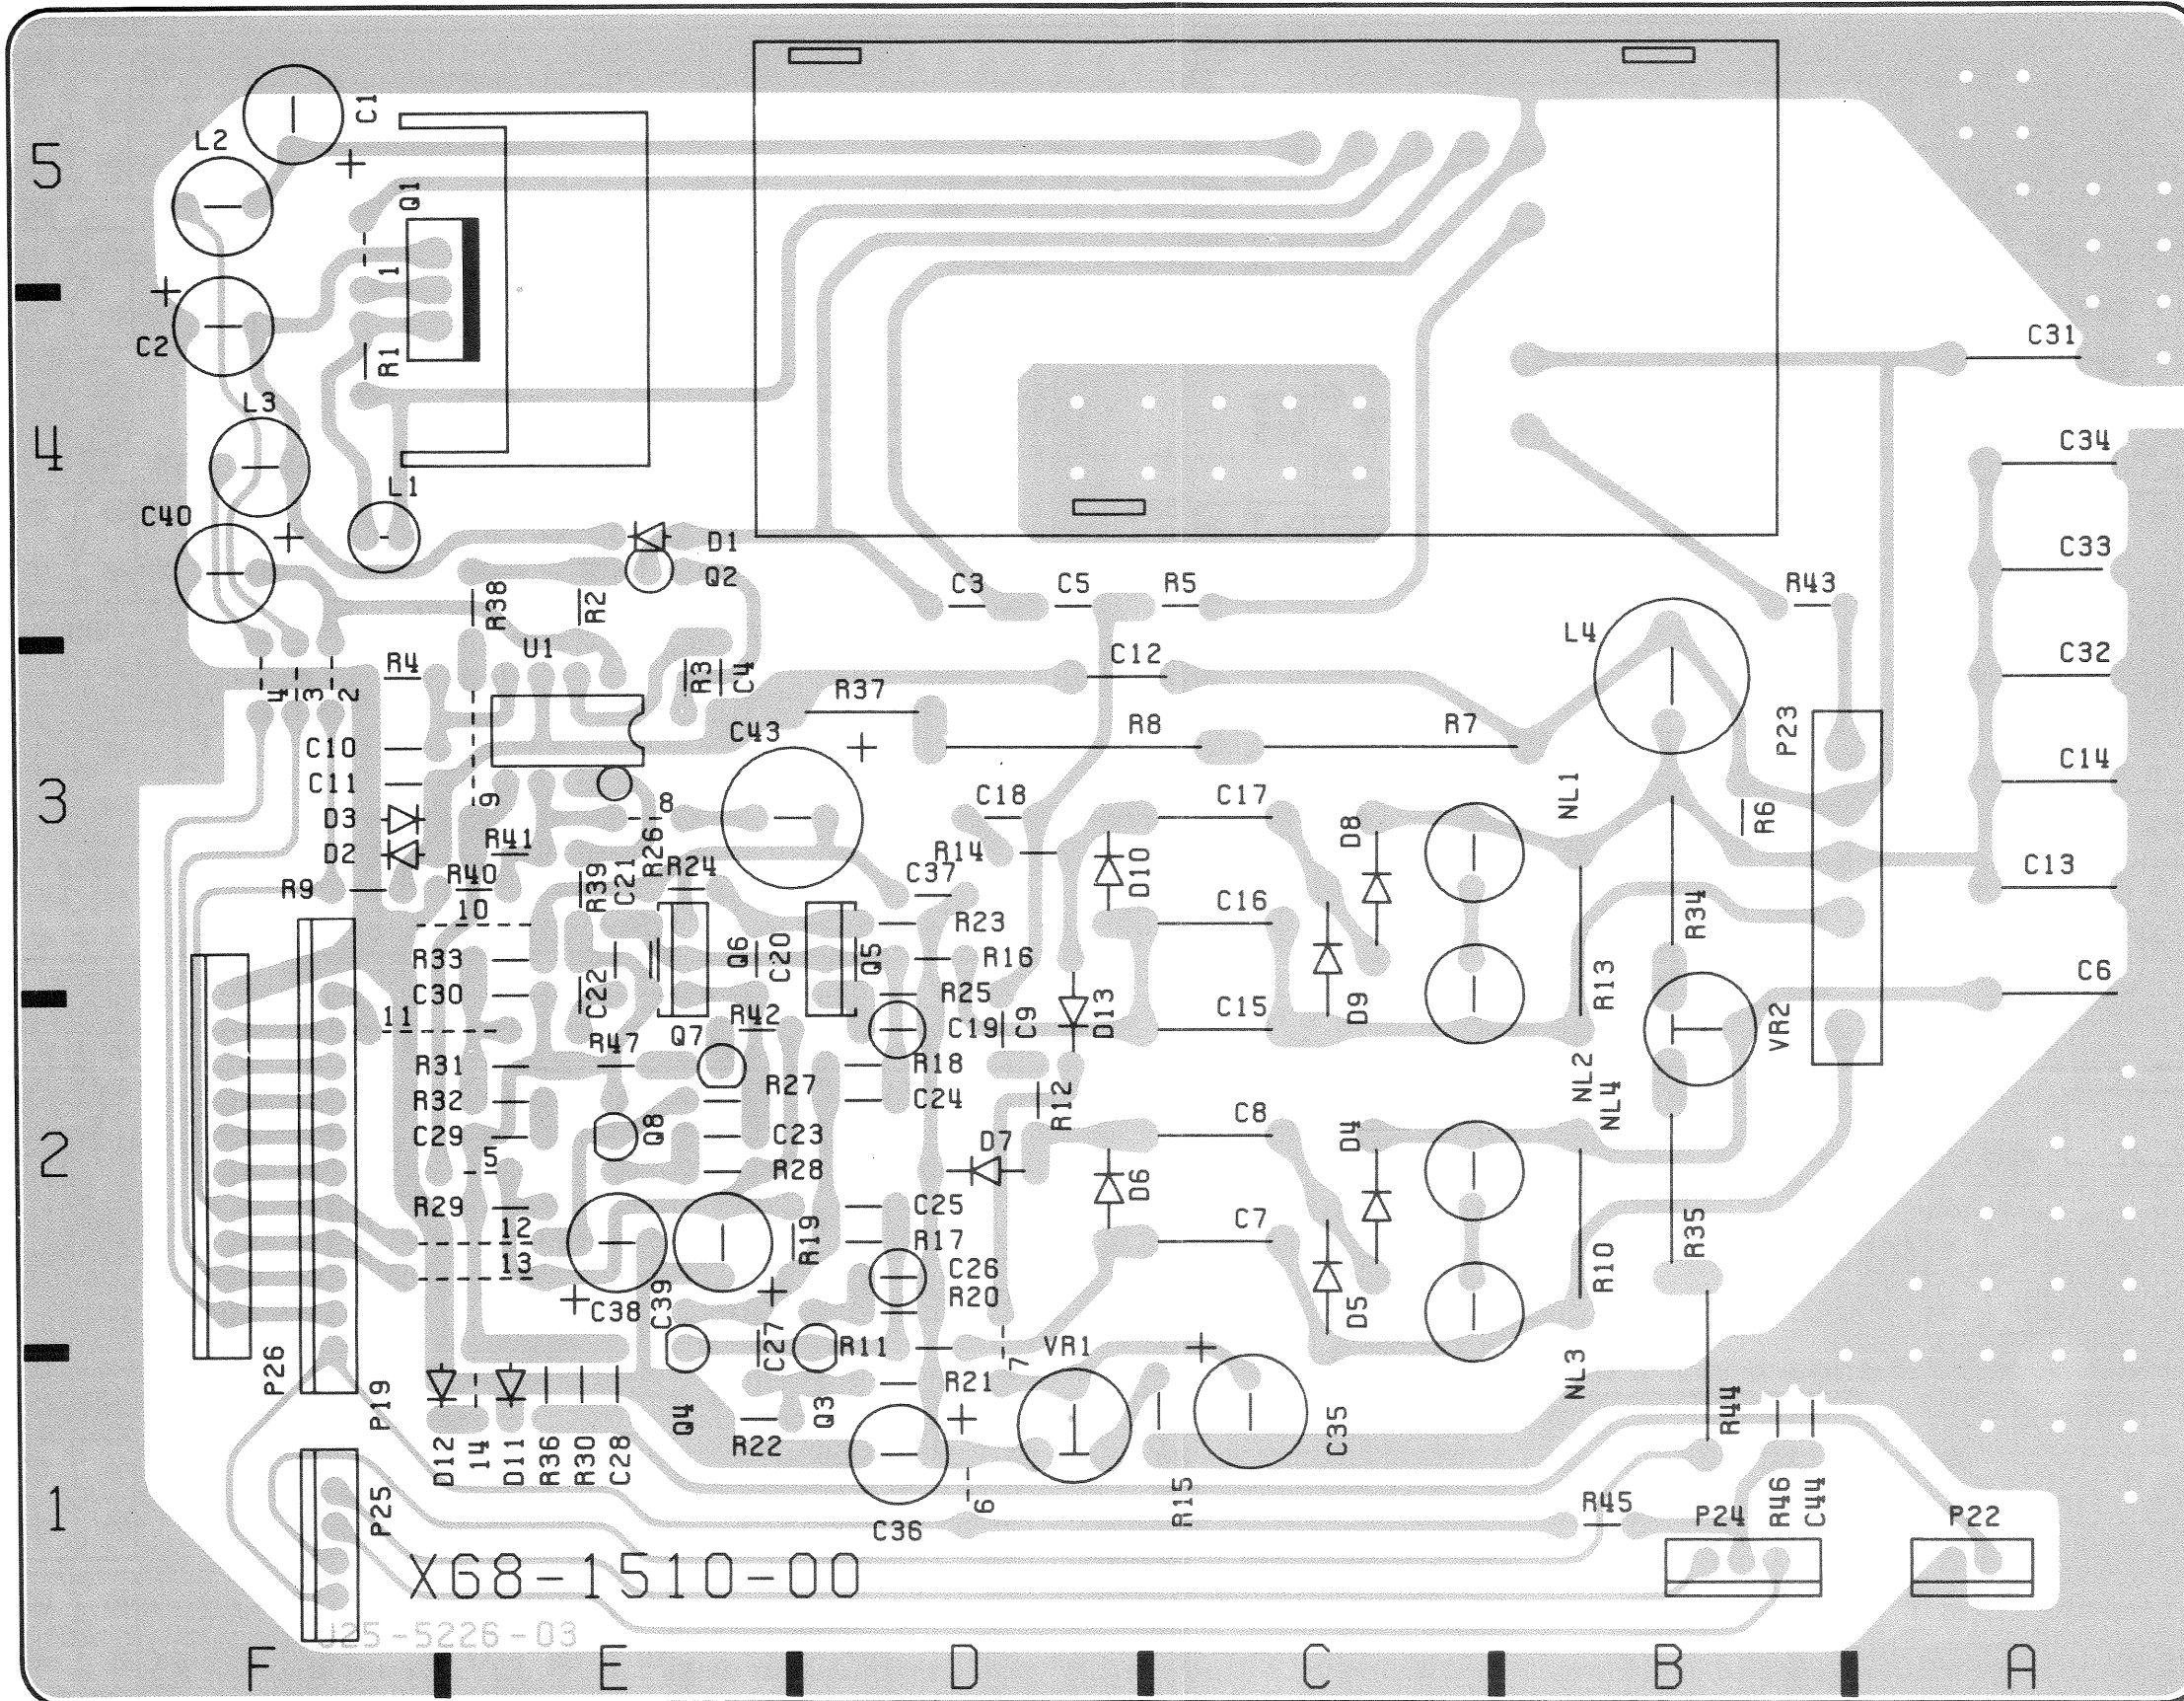

P.C BOARD

SWITCH UNIT (X69-1150-02)


Pattern side view

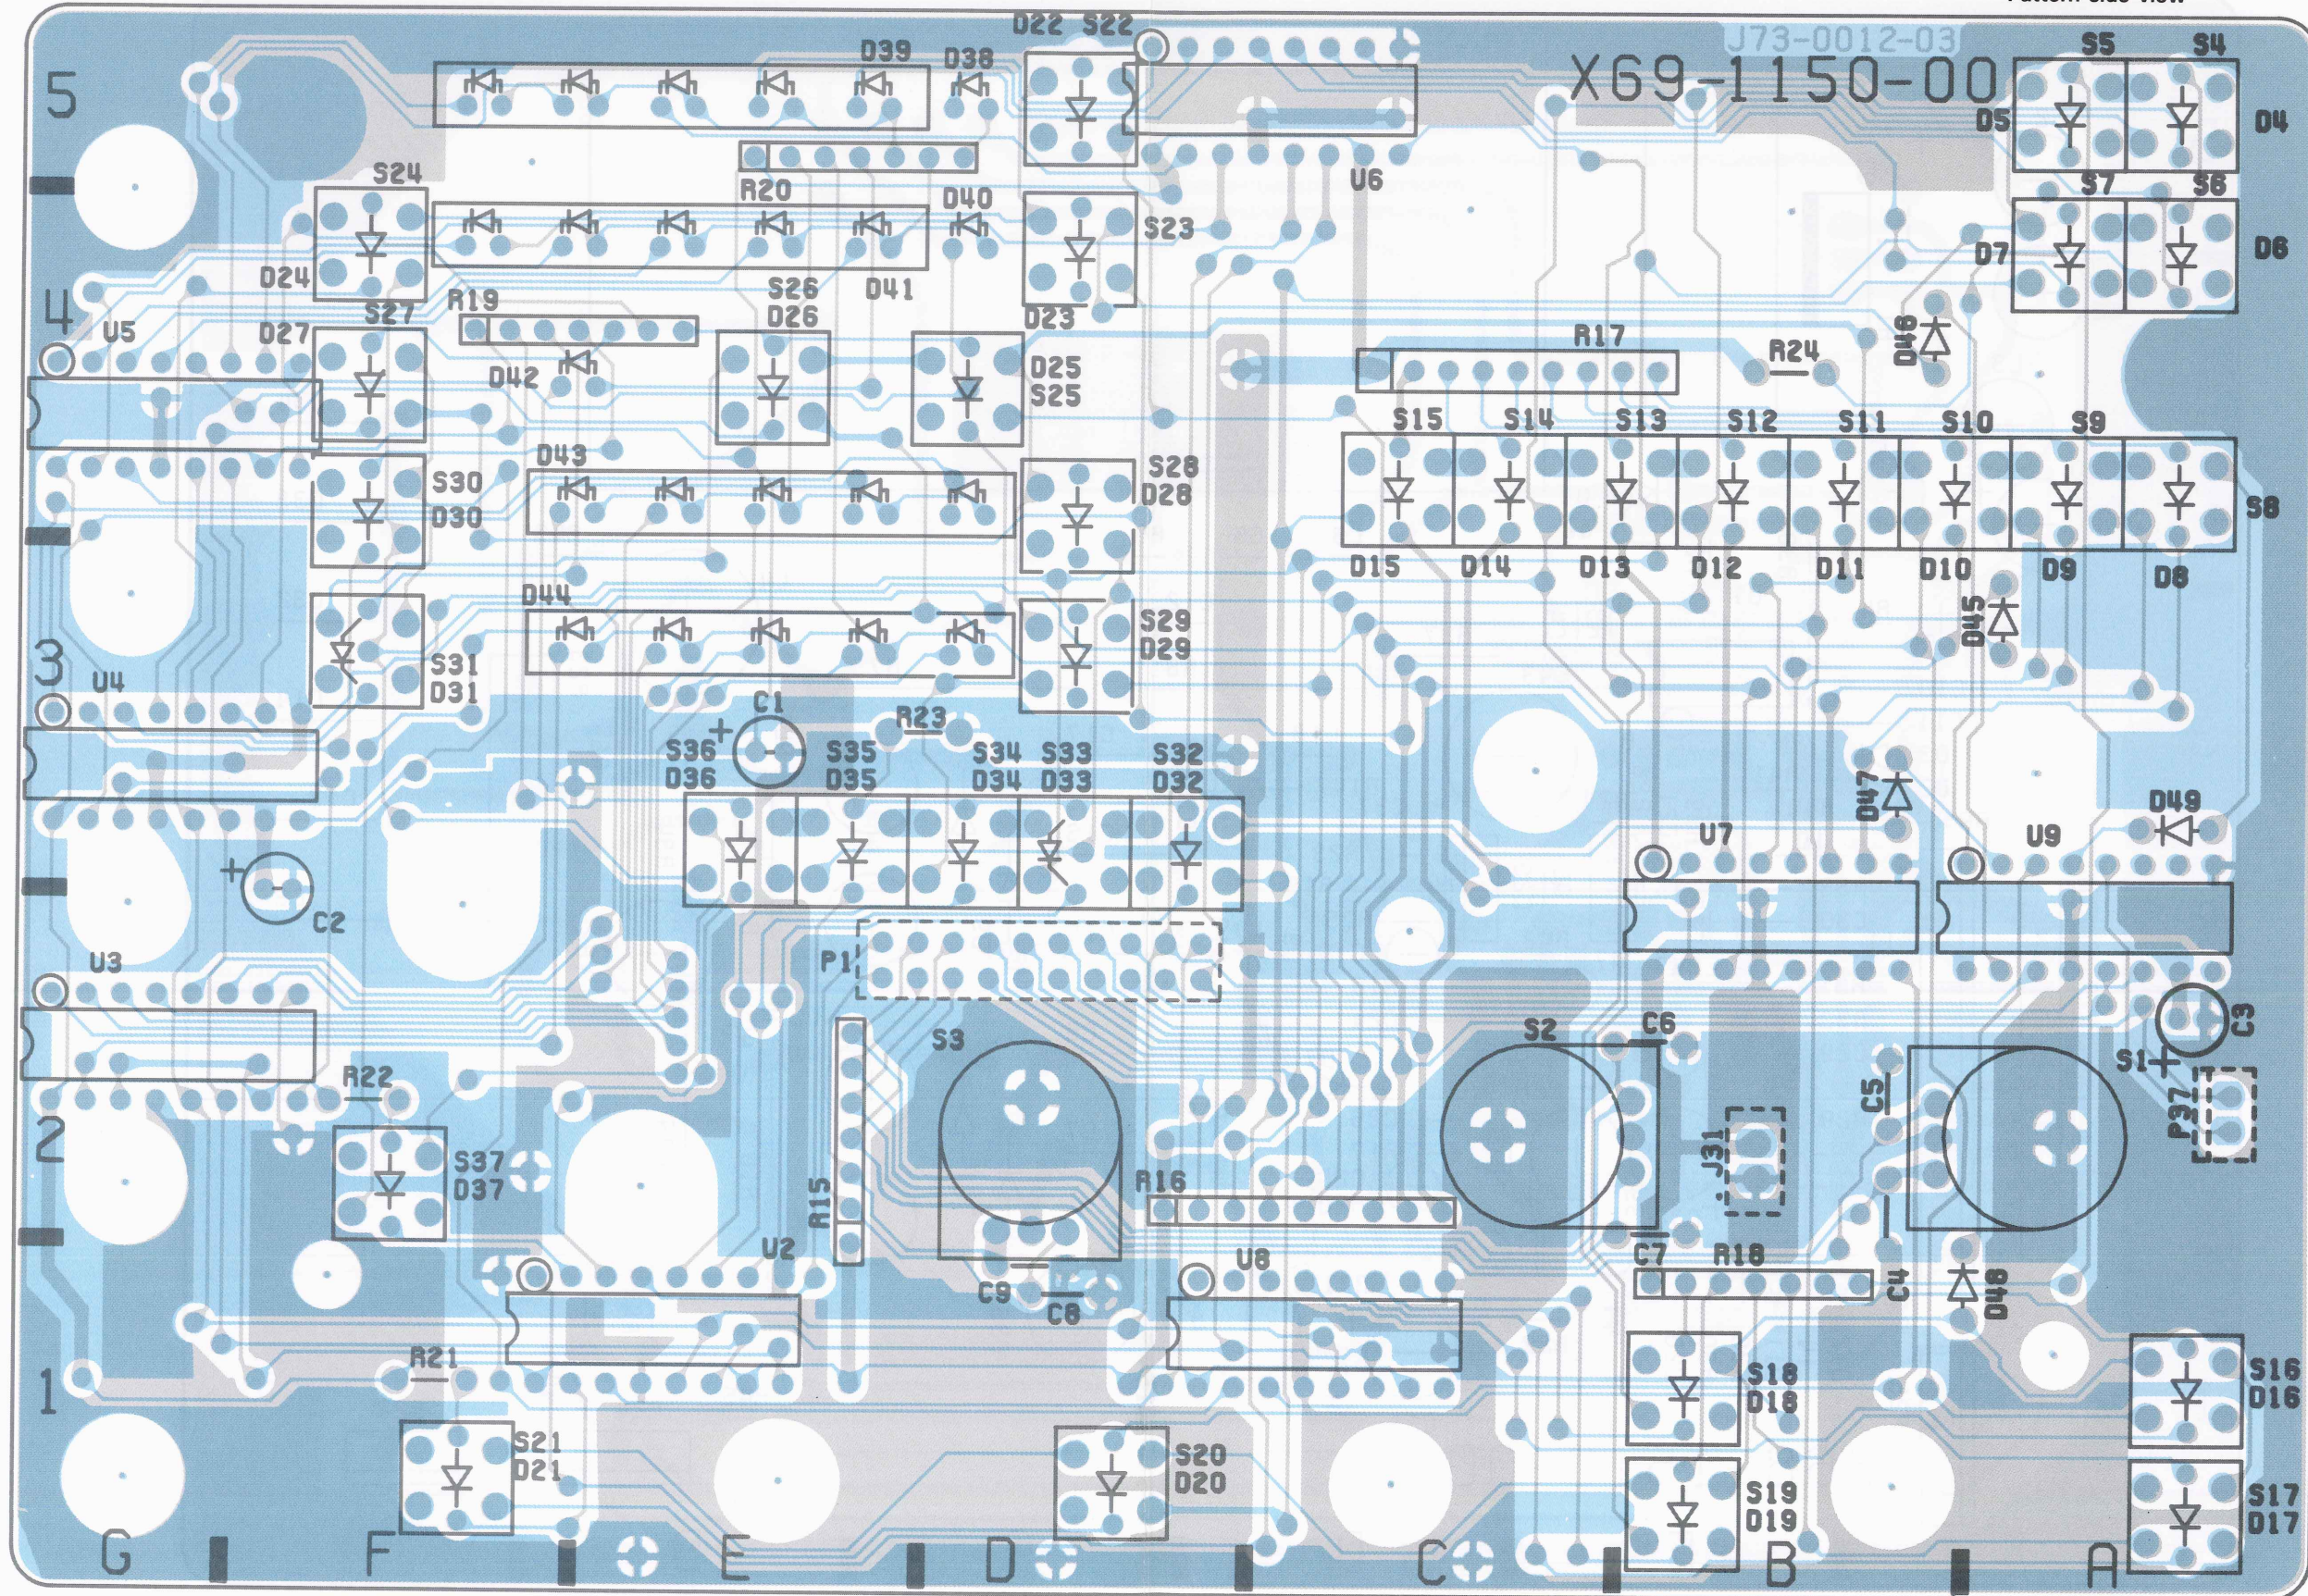

P.C BOARD

VERTICAL PREAMP UNIT (X73-1760-01)


HORIZONTAL UNIT (X73-1484) TIRU JATWOSIRPH

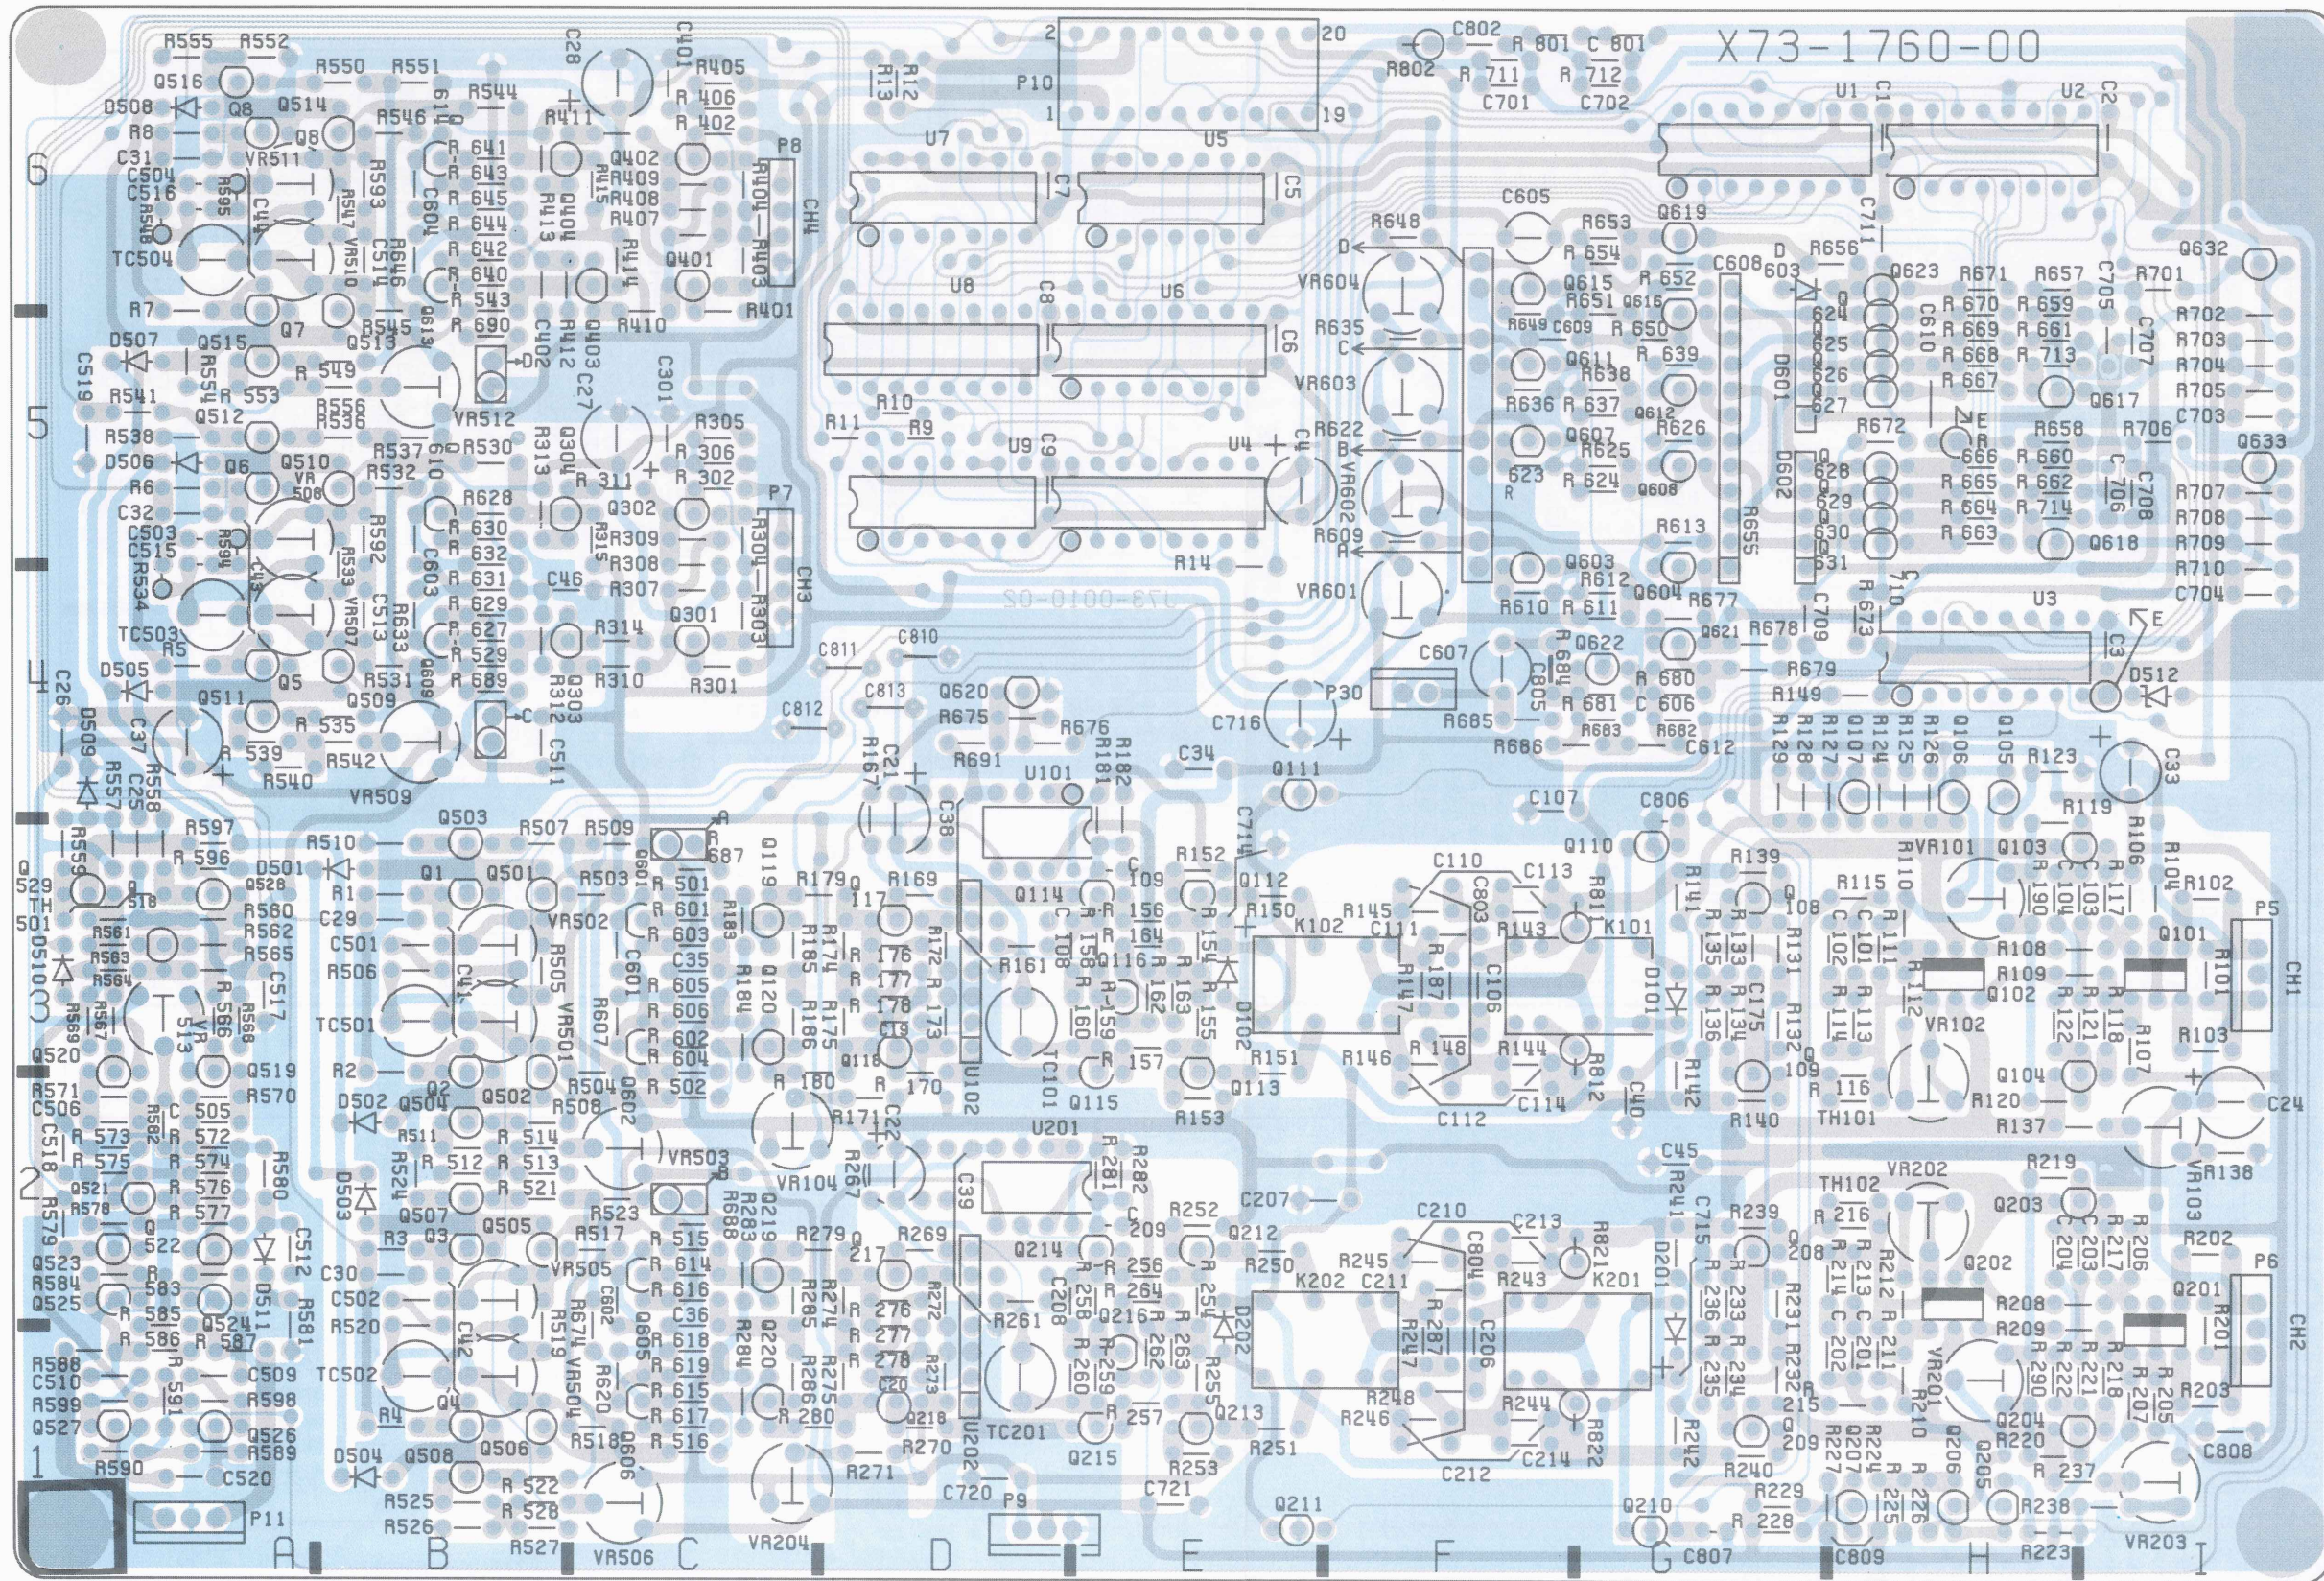

P.C BOARD

HORIZONTAL UNIT (X74-1480-02)


VERTICAL PREAMP UNIT (X73-1780-01)

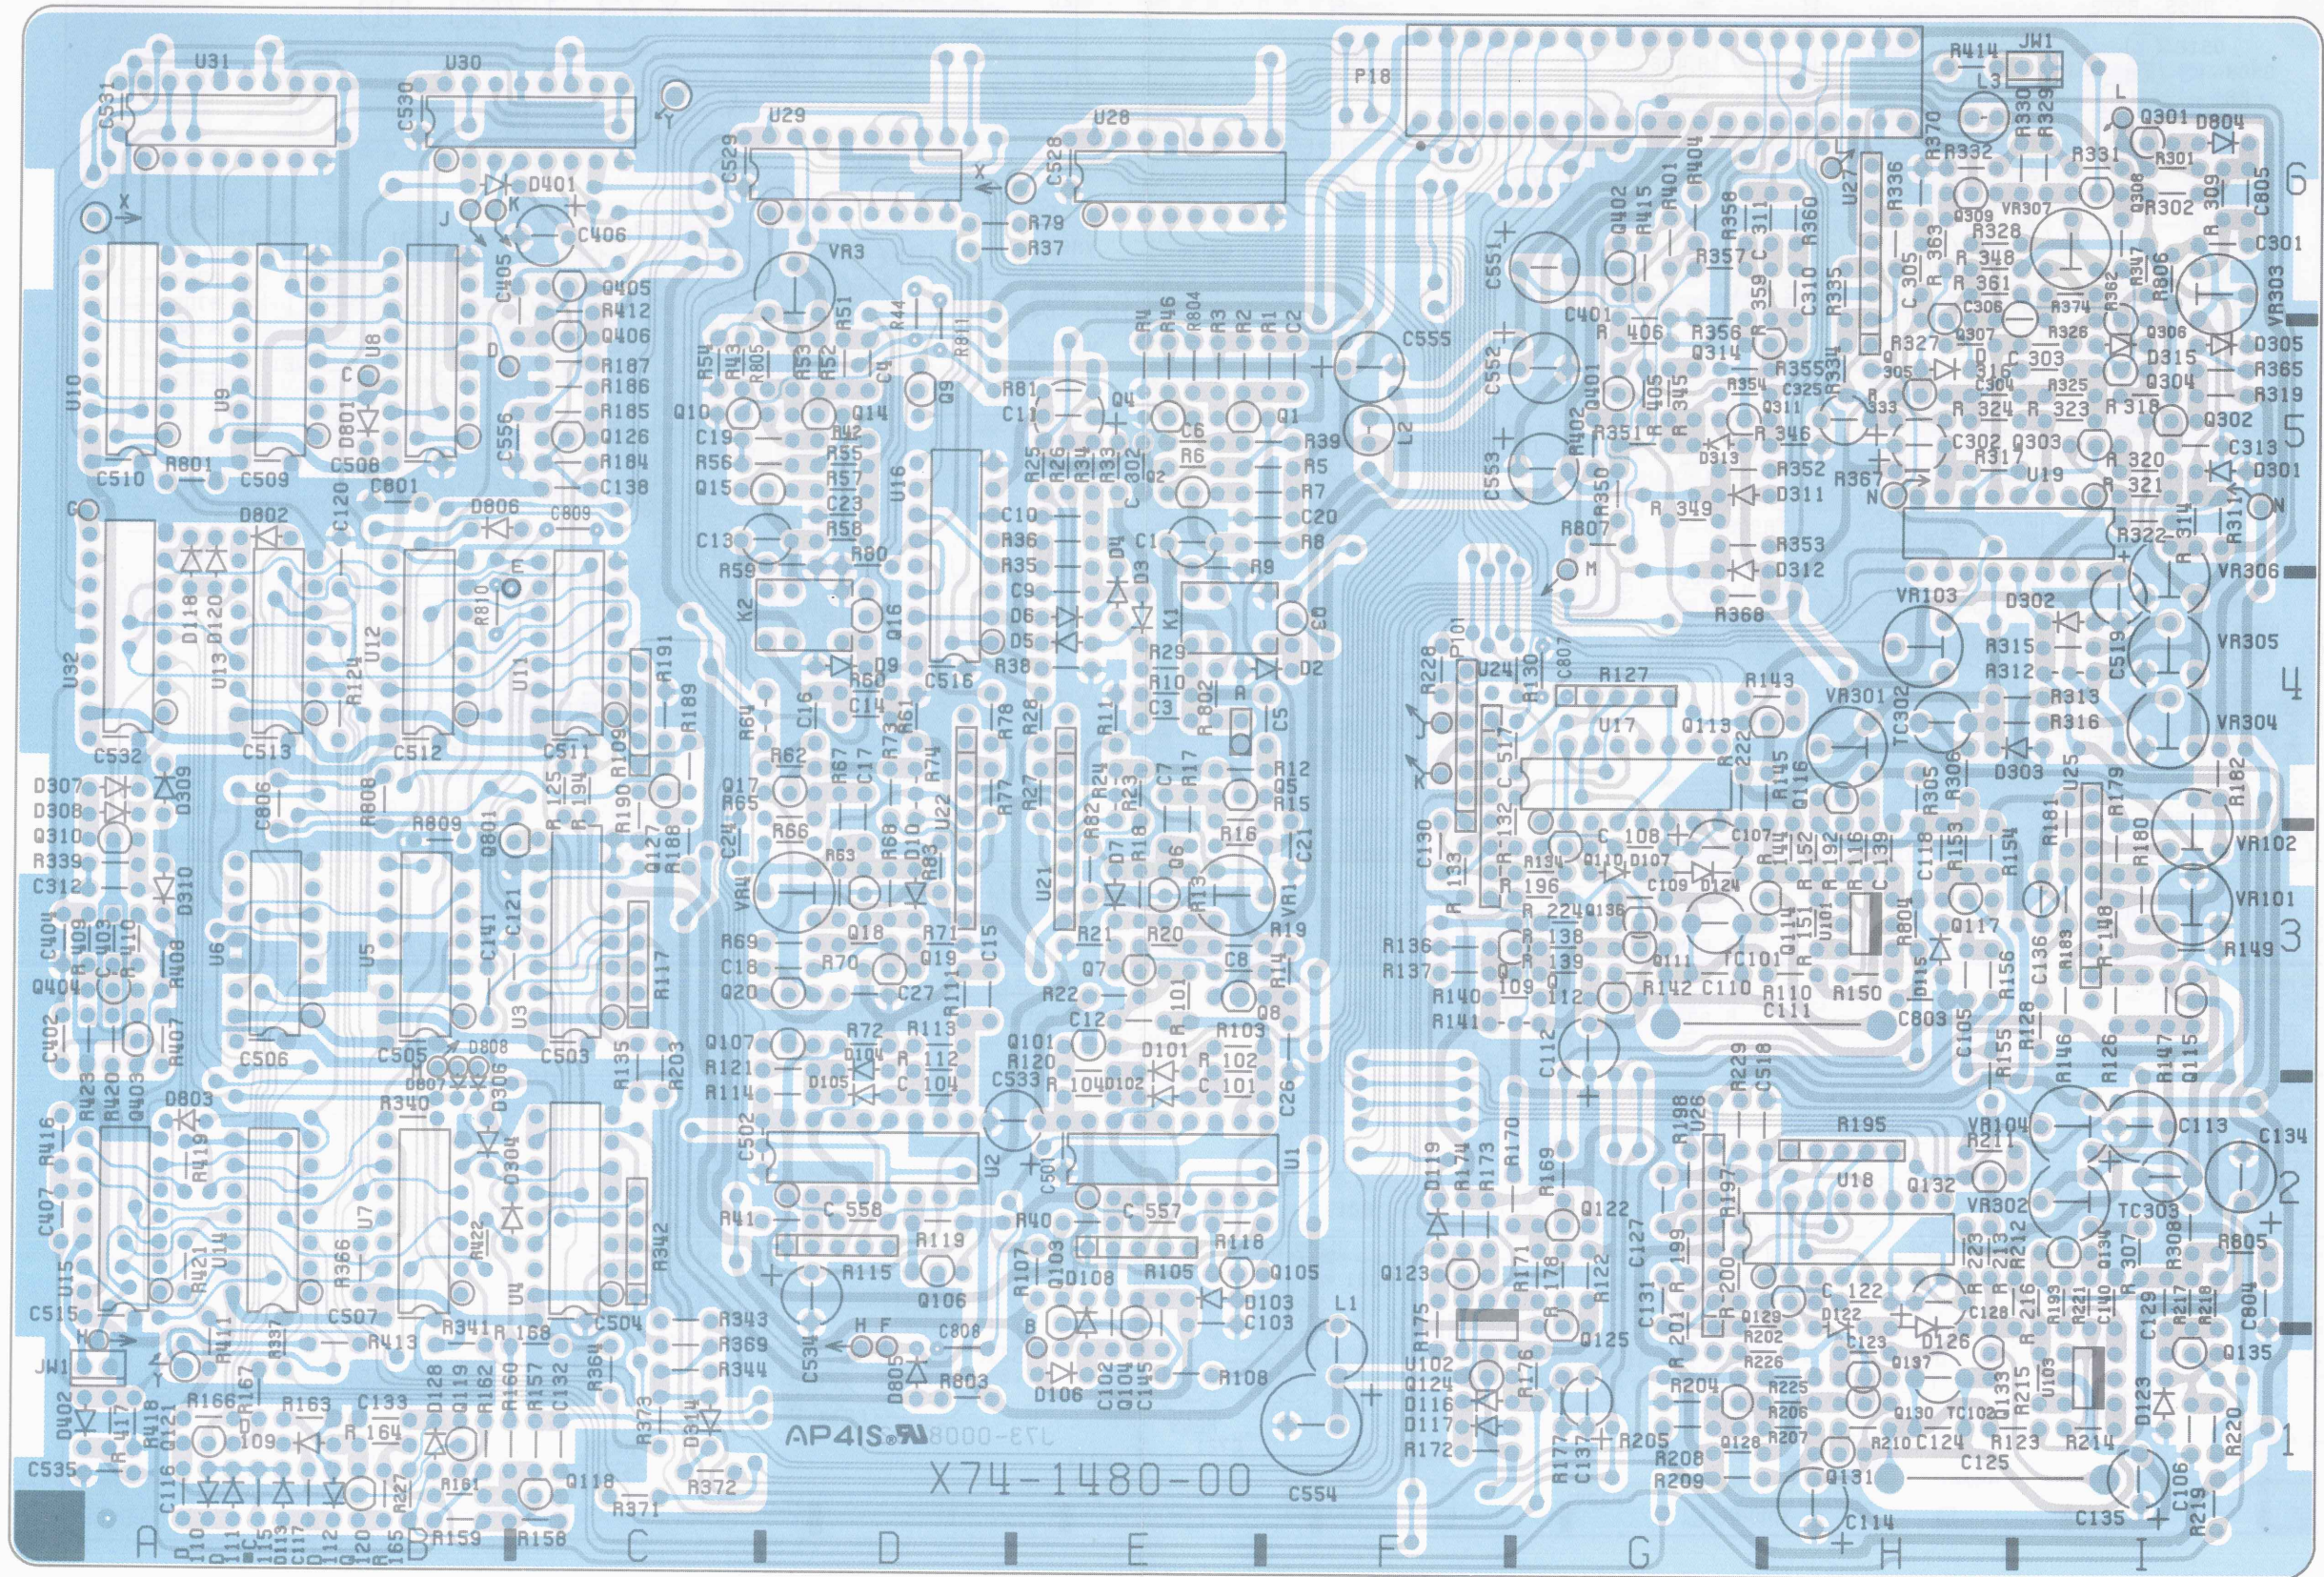

P.C BOARD


A (10-082) (TX) TMU DR

LINE COUNTER UNIT (X76-1400-00)

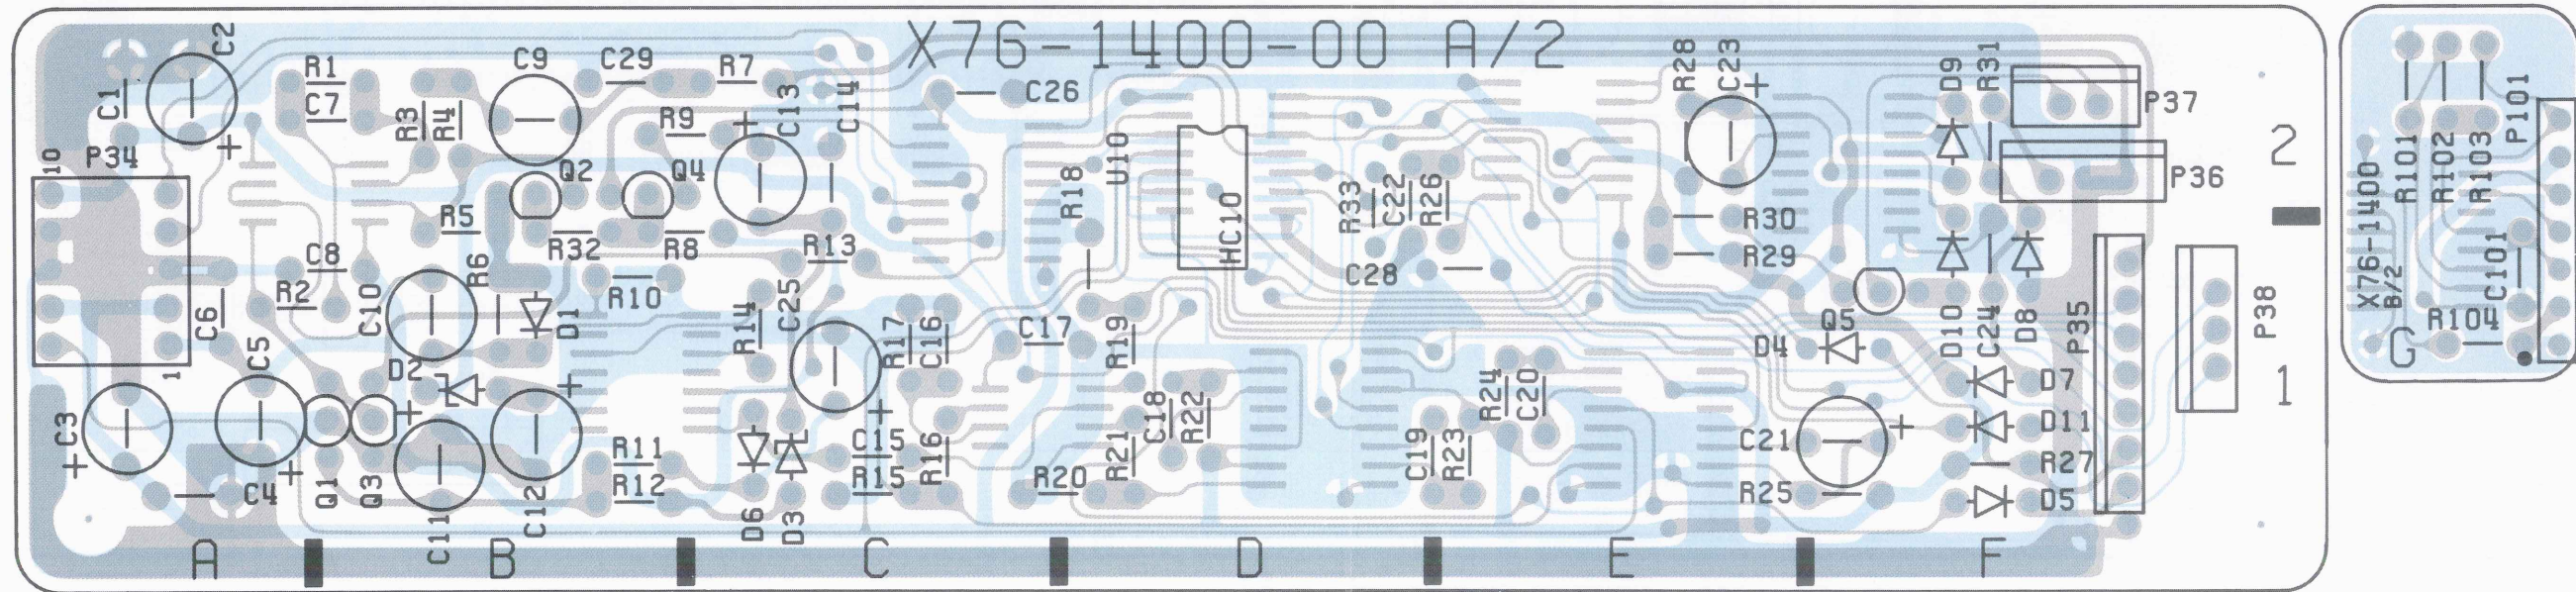

P.C BOARD


R/O UNIT (X77-1490-01) A

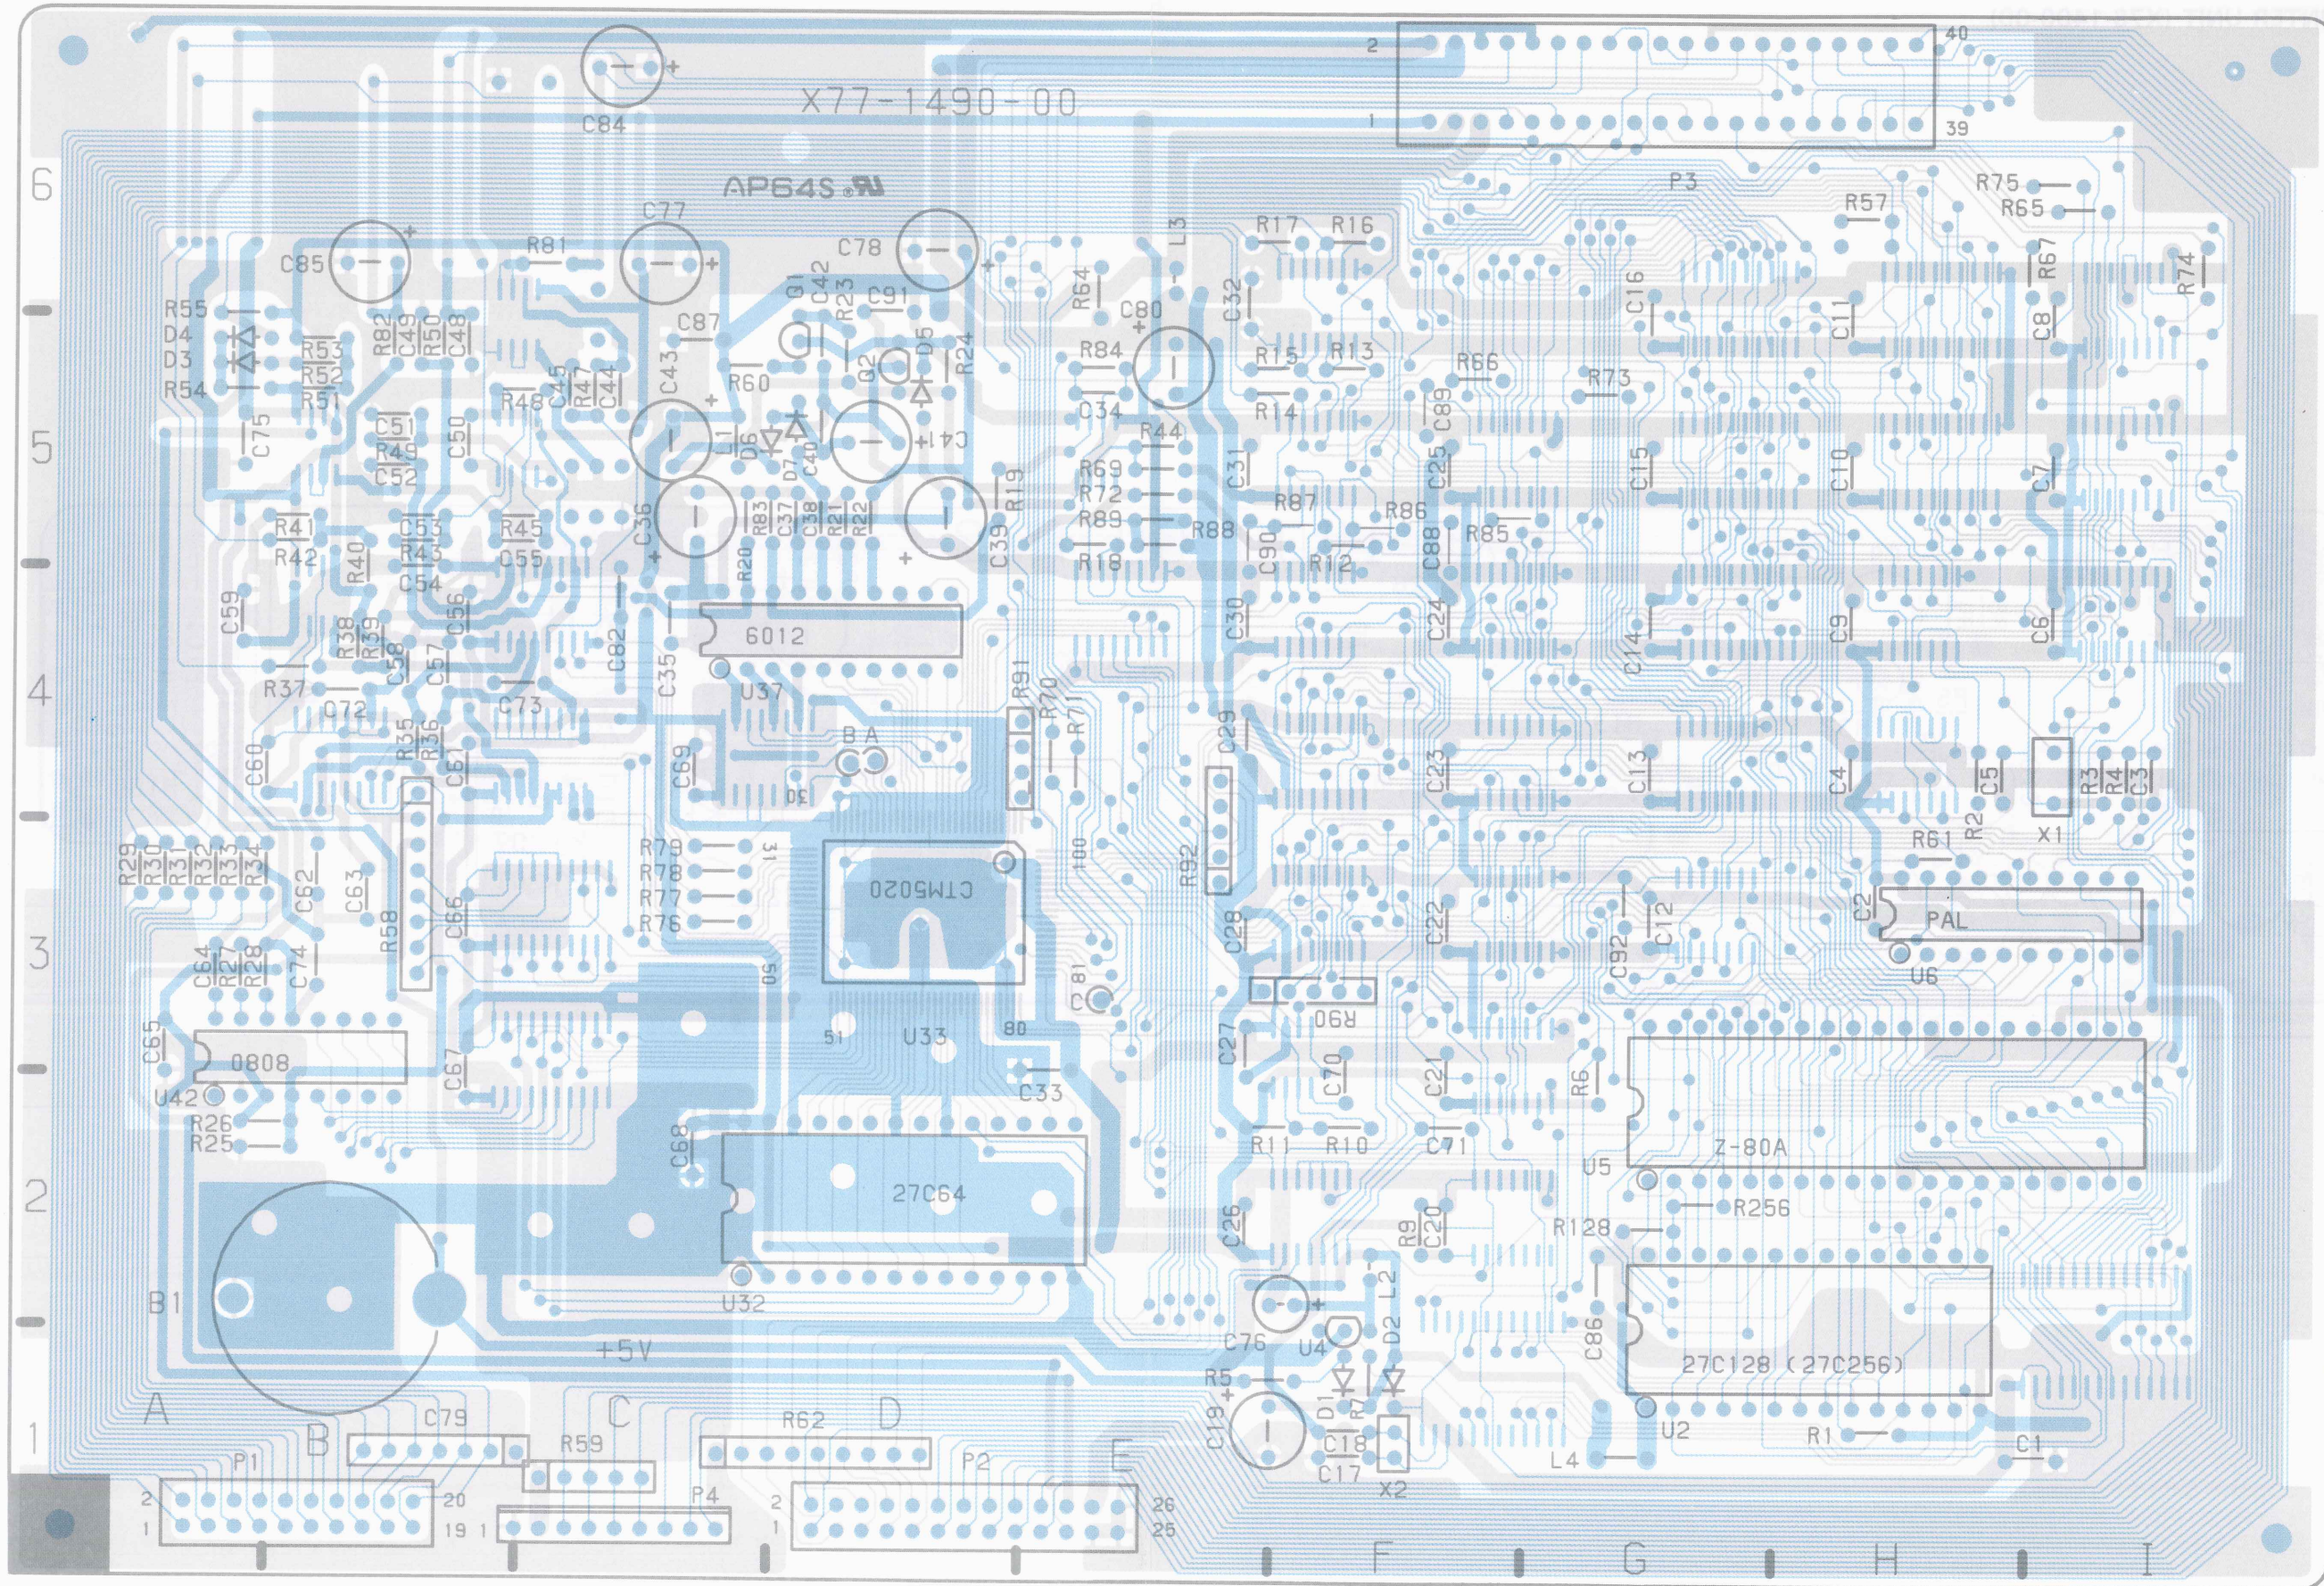

P.C BOARD

CONNECTION UNIT (X77-1500-01)


FINAL UNIT (X80-100-03)

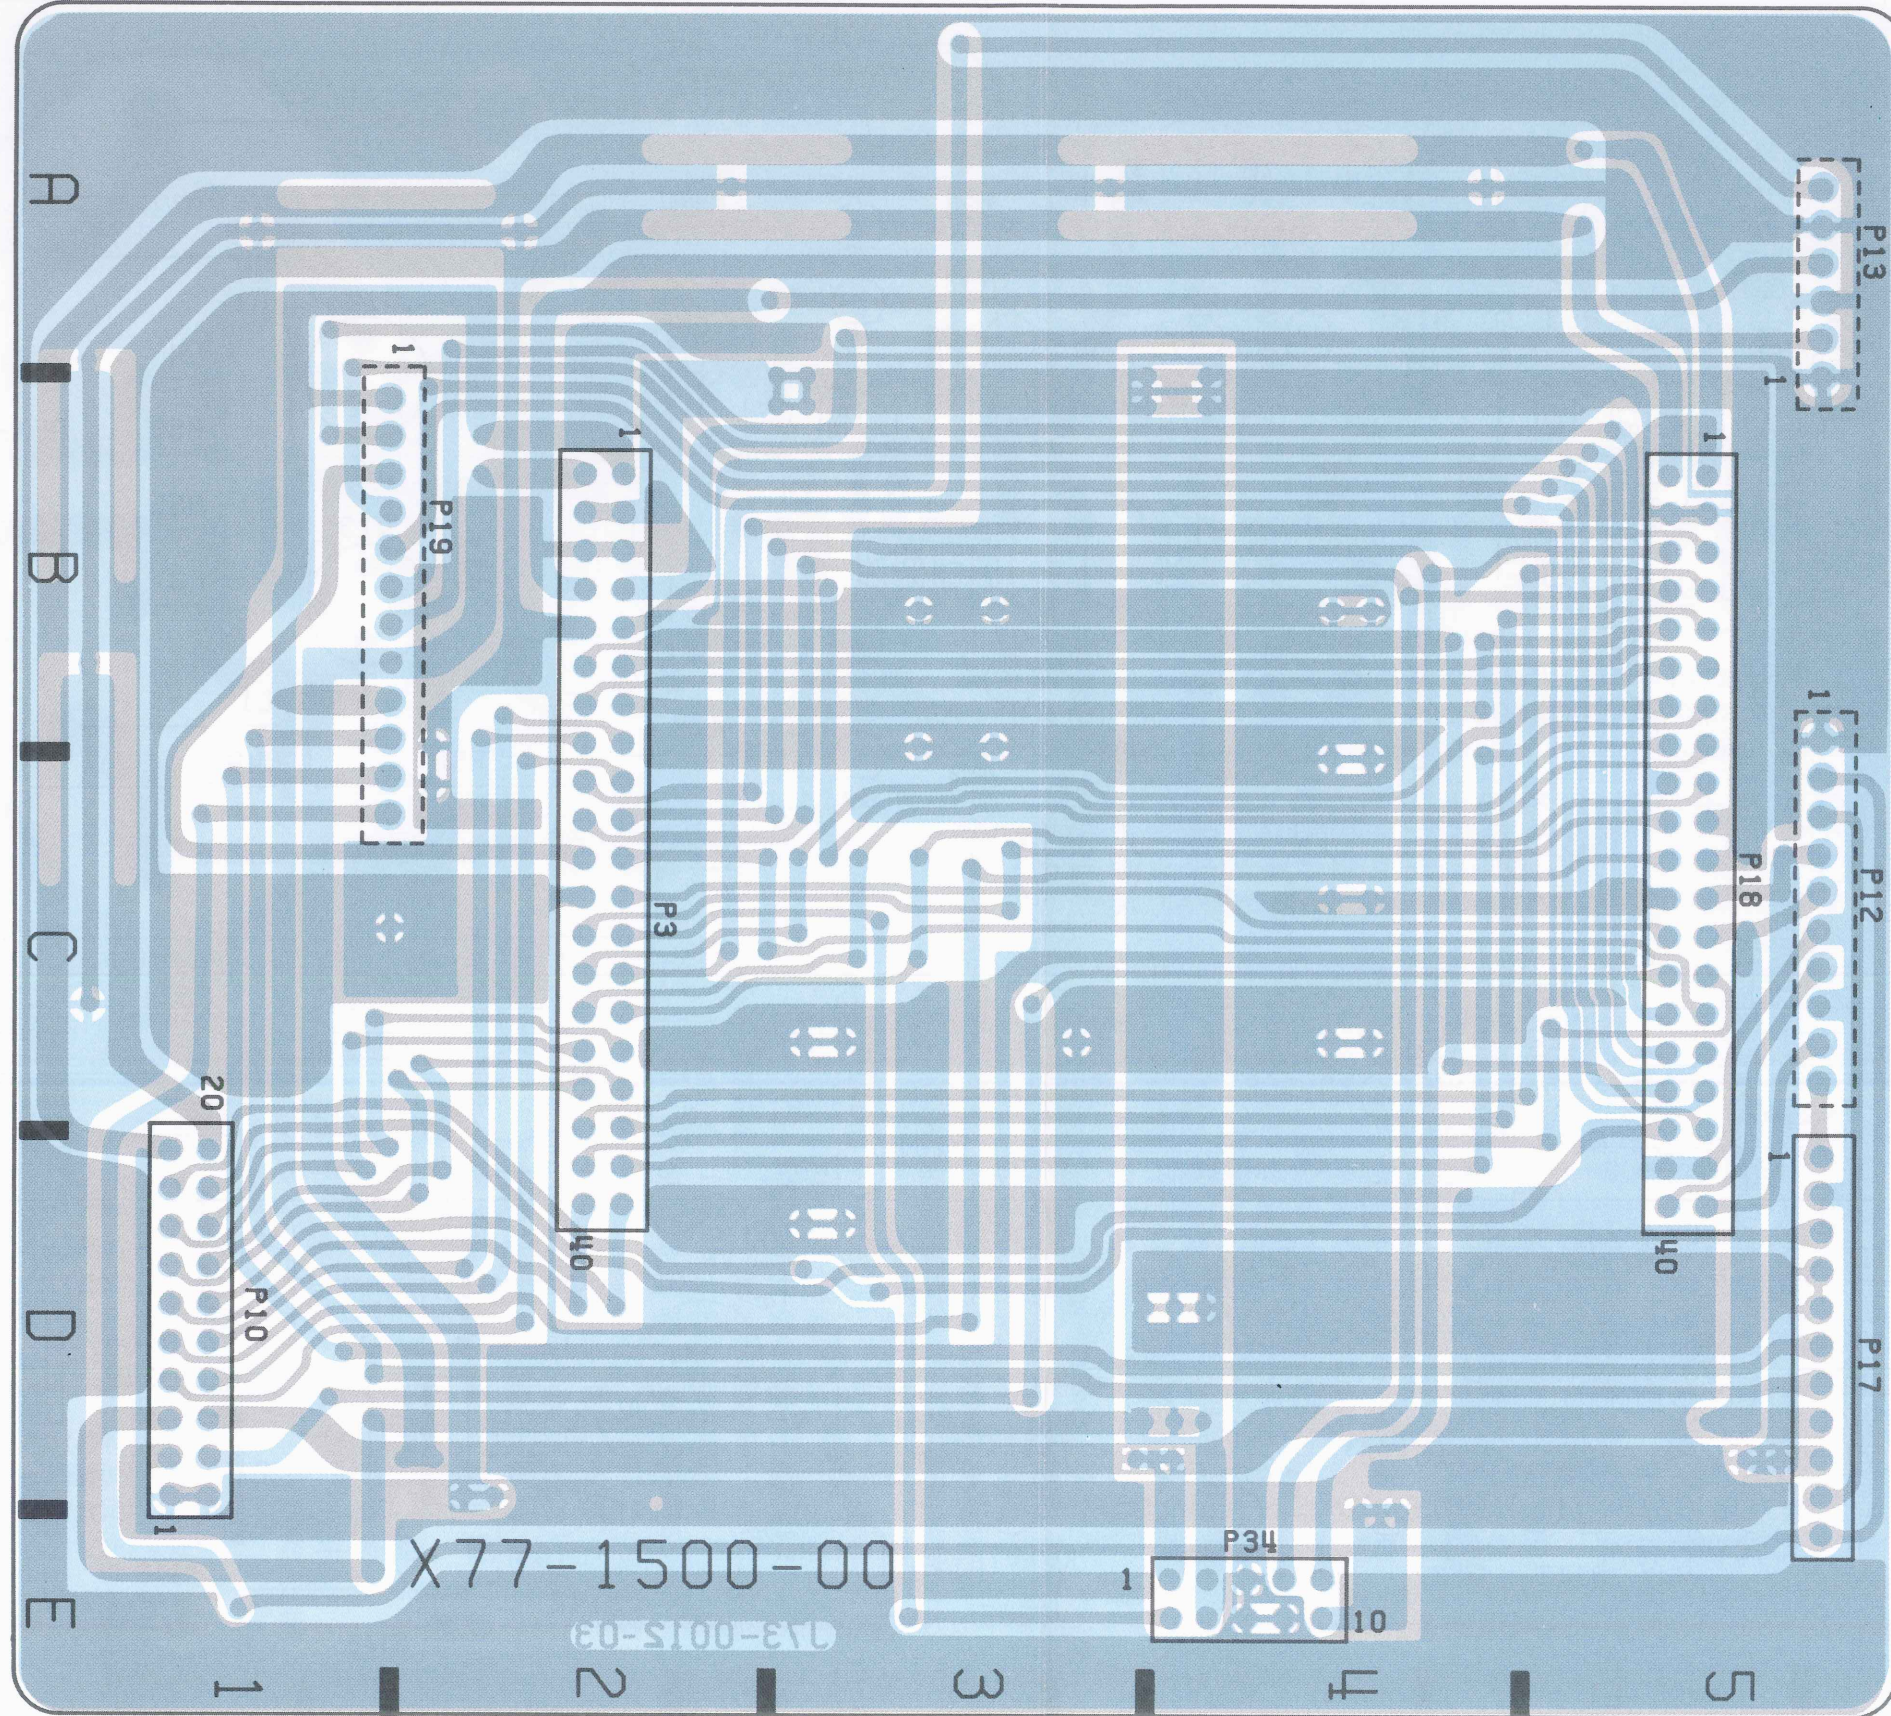

P.C BOARD


FINAL UNIT (X80-1100-02)

CONNECTION UNIT (X73-1800-01)



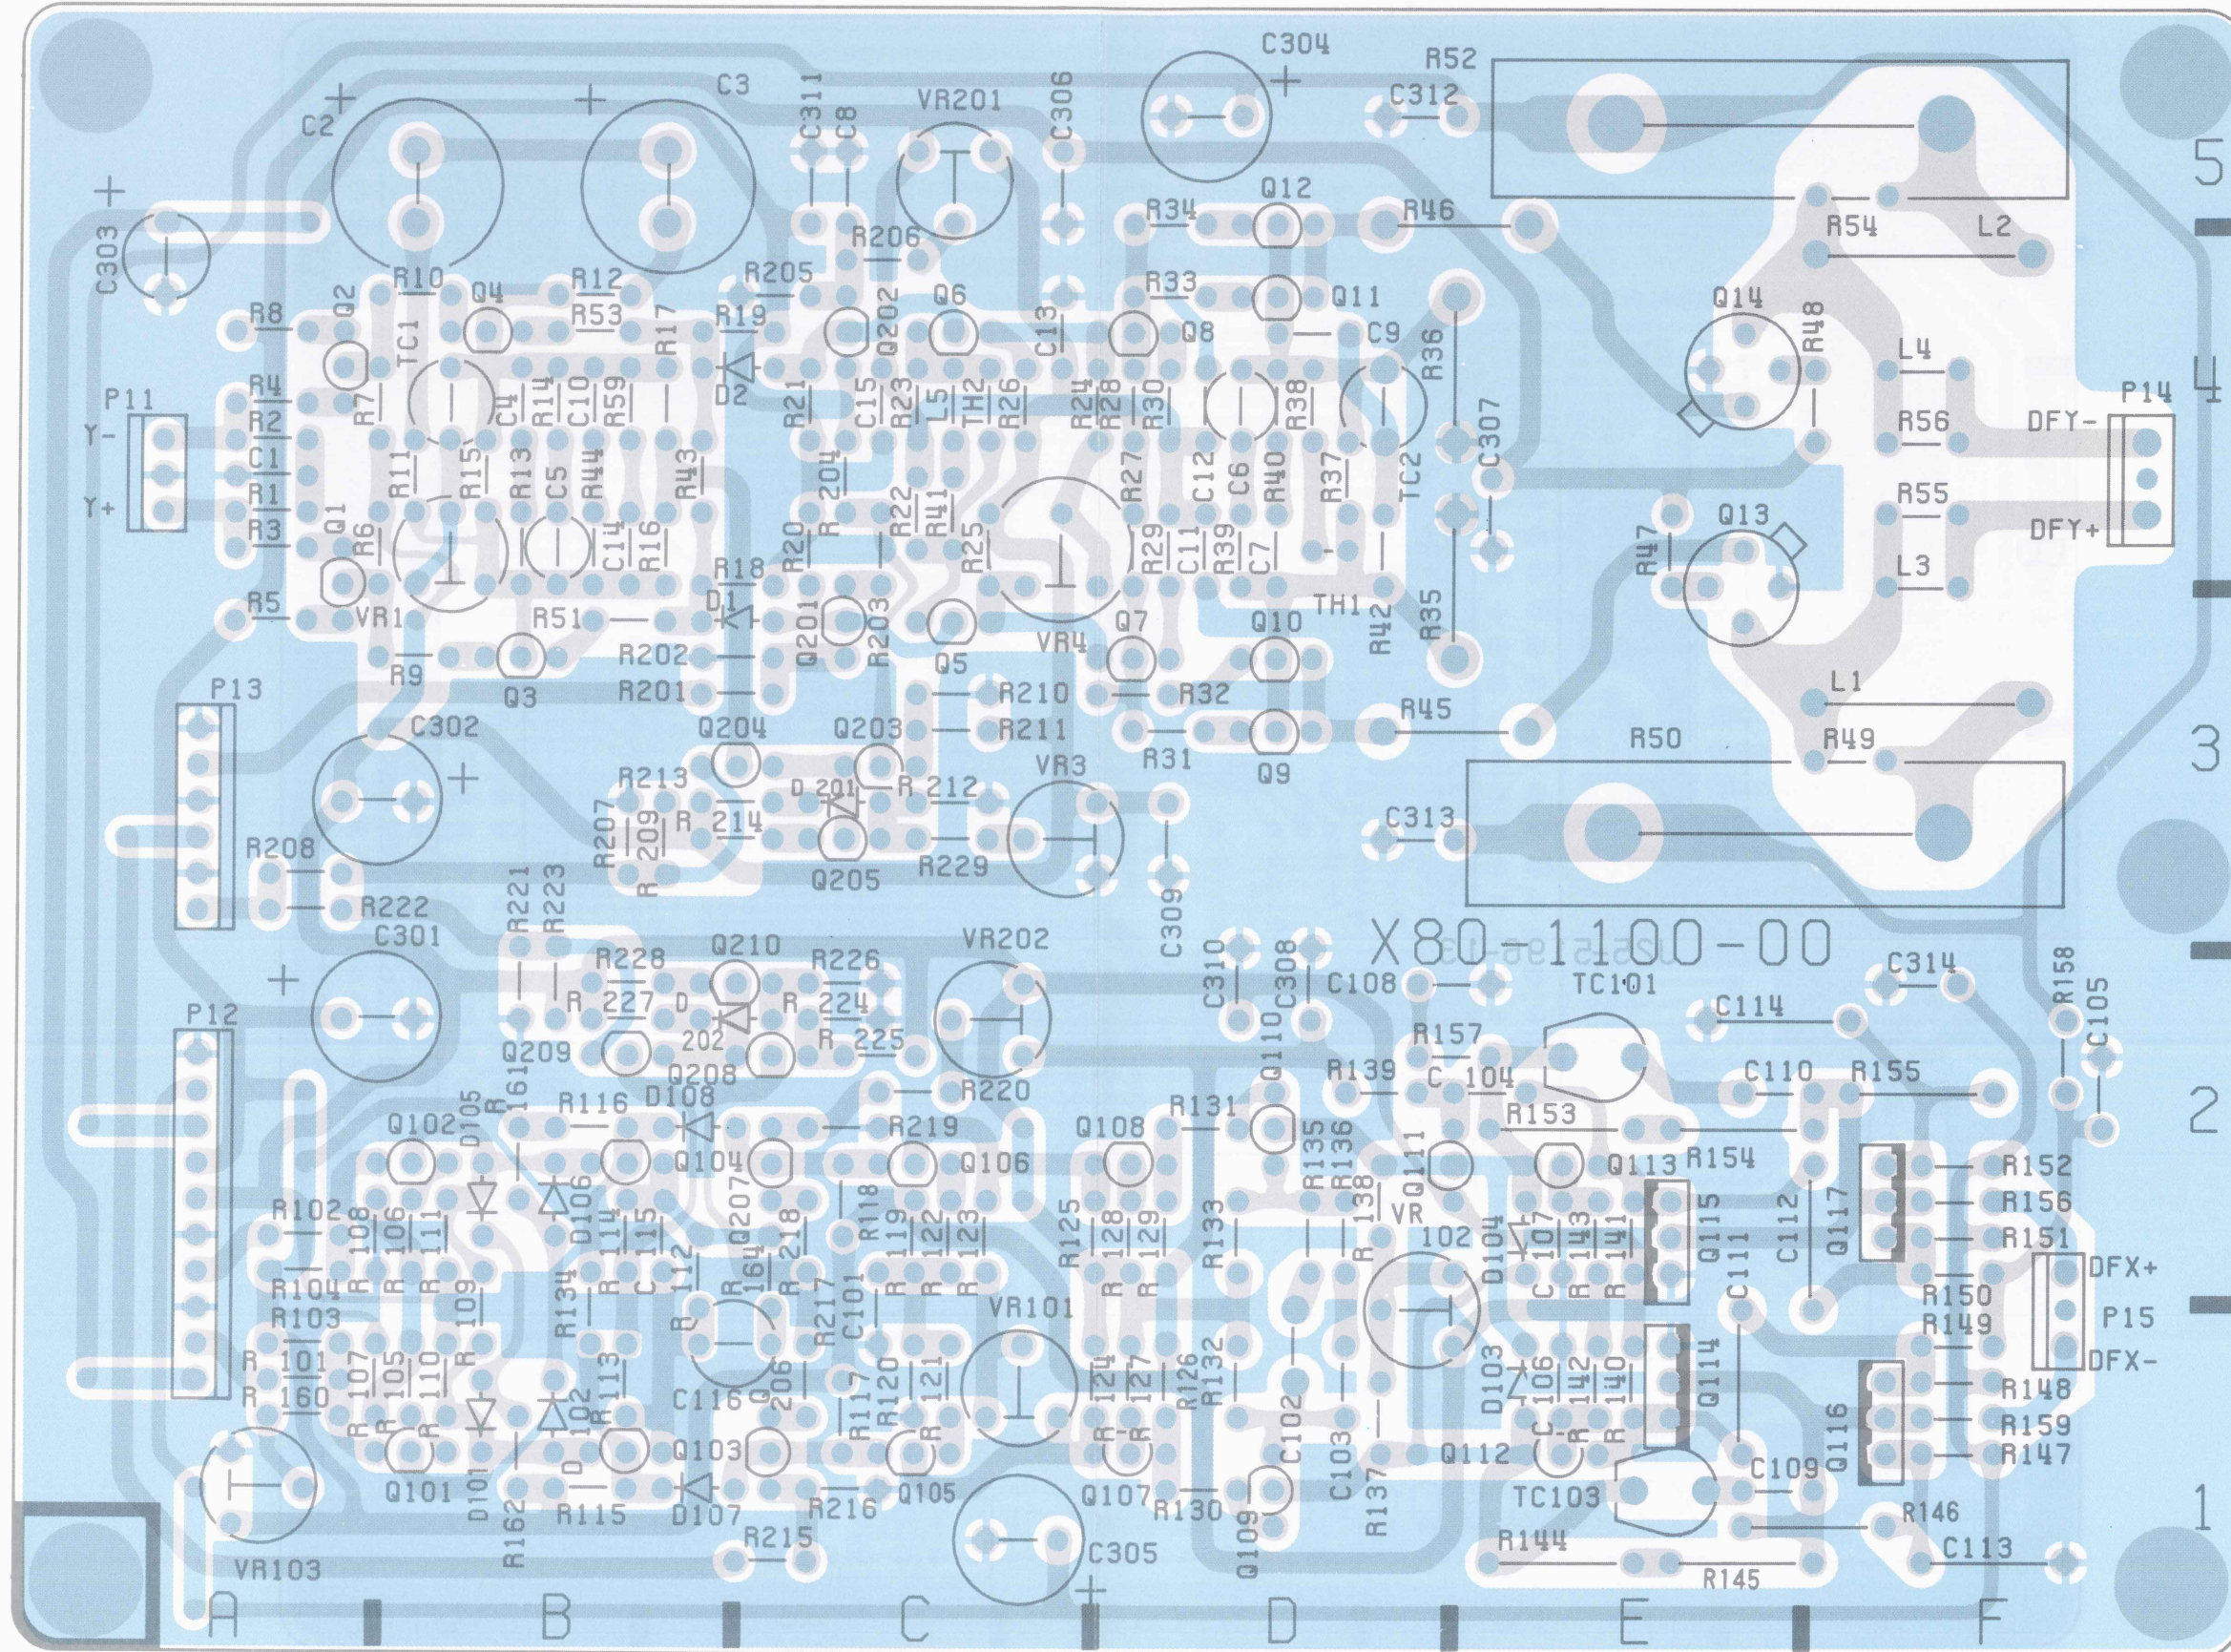


P.C BOARD


VOLUME UNIT (X81-2330-02)

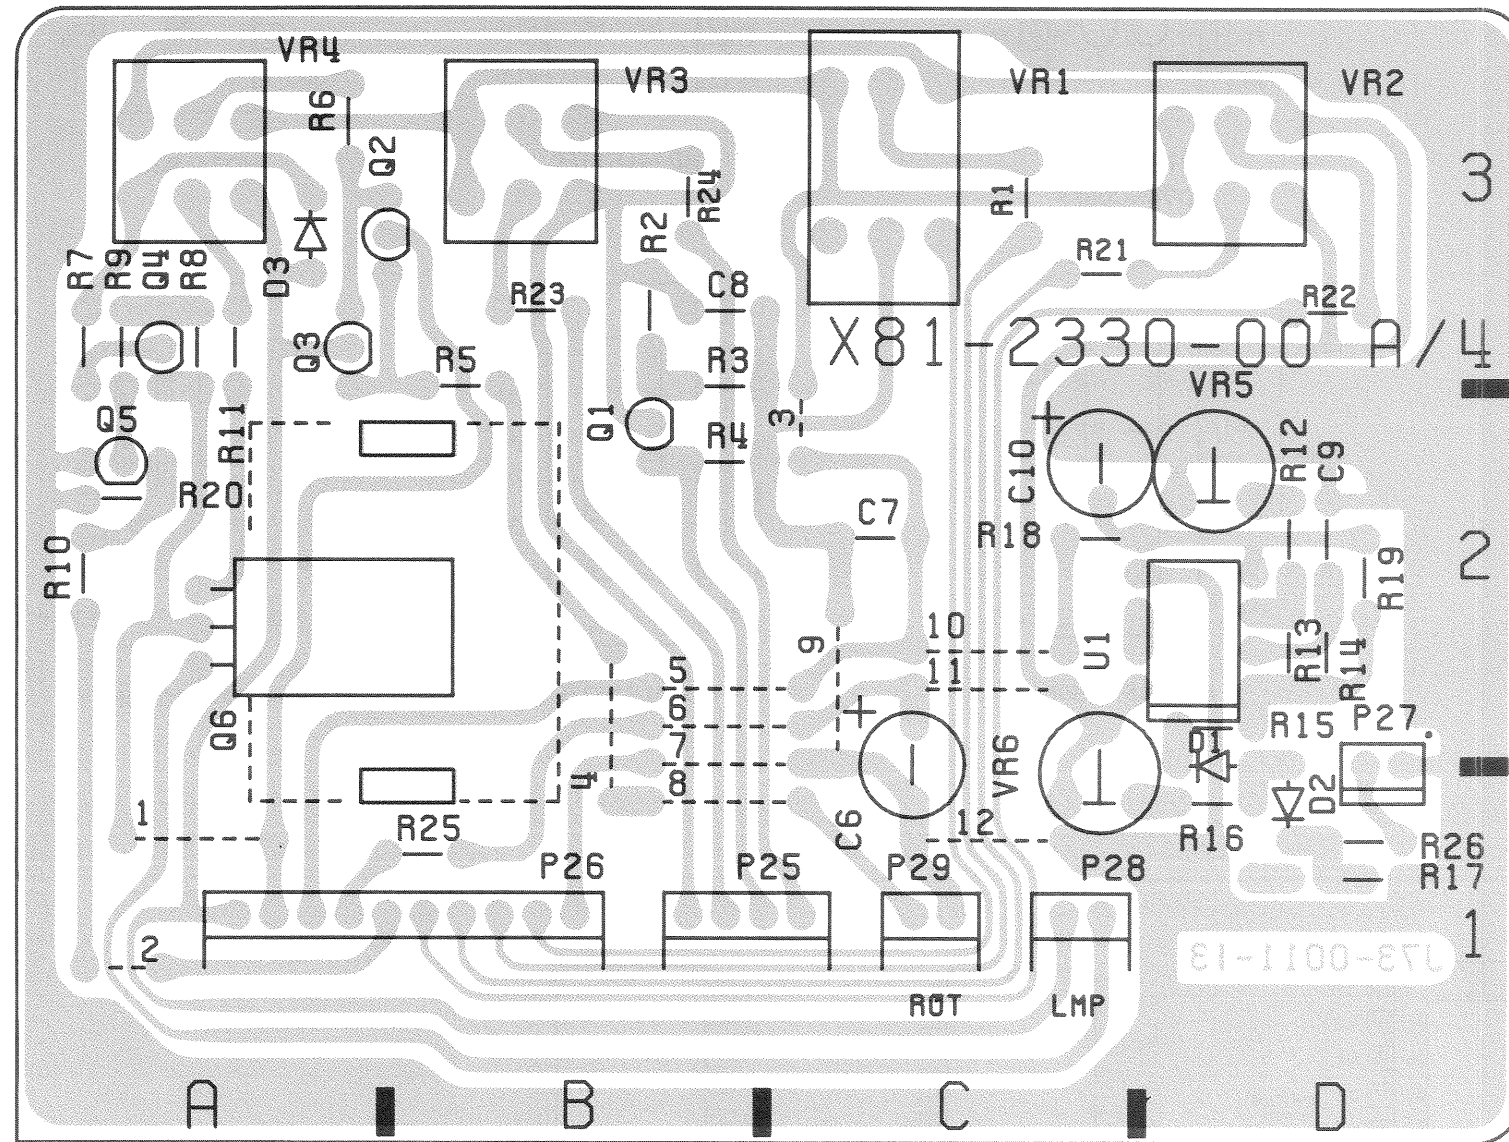


Pattern side view

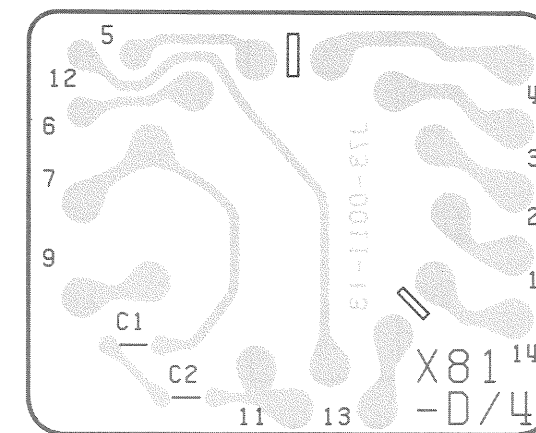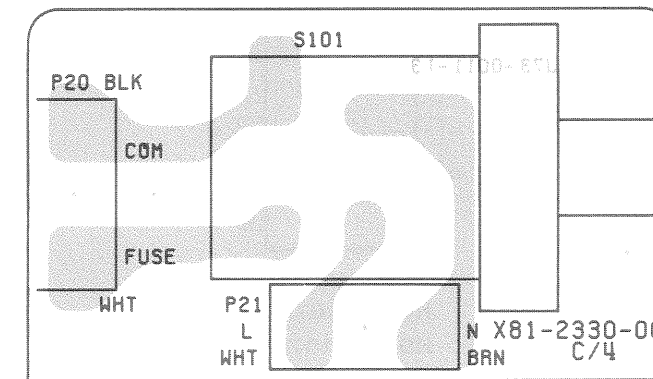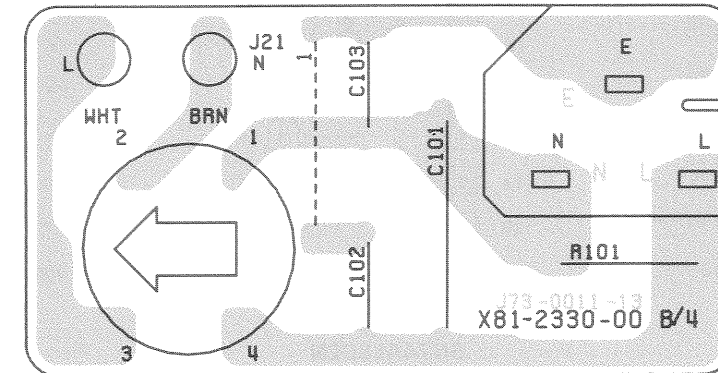


SEMICONDUCTORS

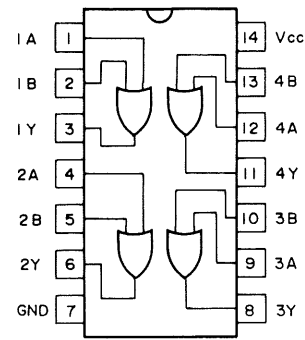


SN74ALS32N

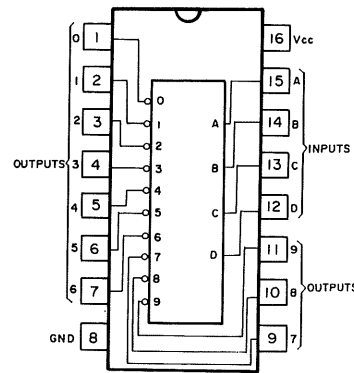


HD74LS42P

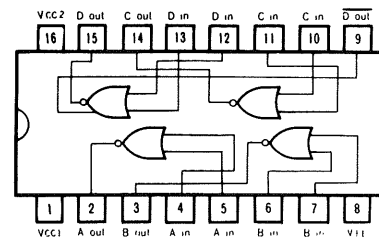


MC10H102L

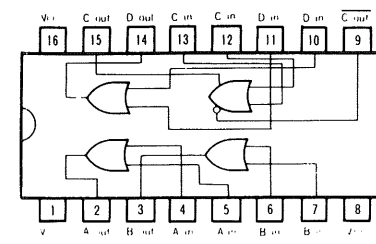


MC10103L

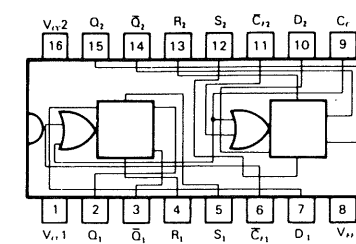


MC10H131L

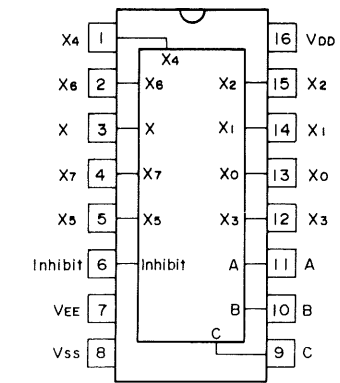


HD14051BFP

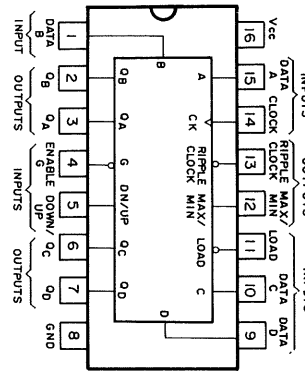


SN74ALS191N

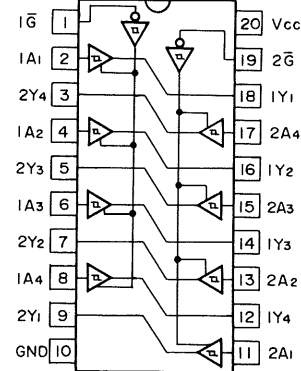


HD74LS244FP

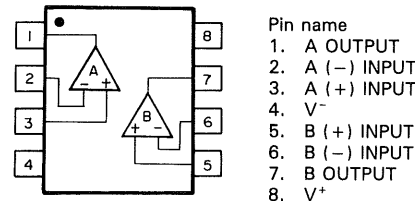


NJM072M

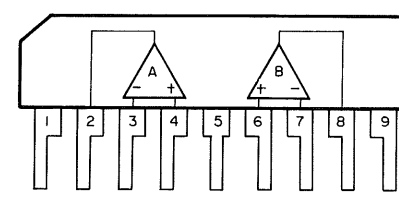


NJM072S

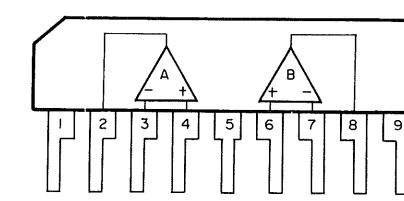


NJM4556S

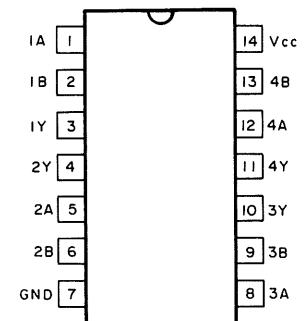


HD74HC7266FP

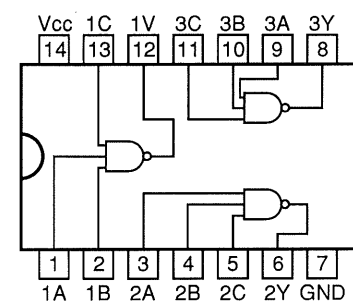


HD74HC10CFP

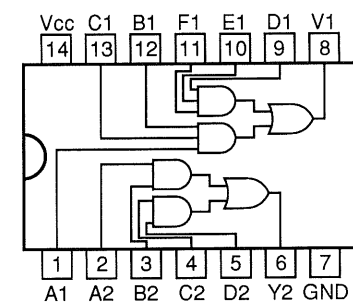


MC74HC58F

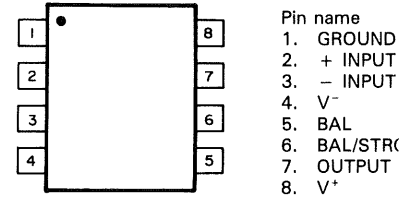


NJM311M

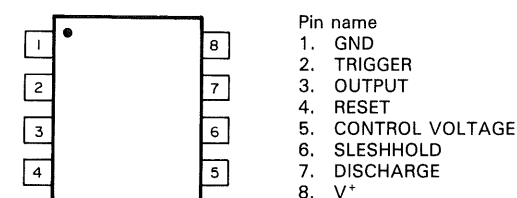


NJM555M

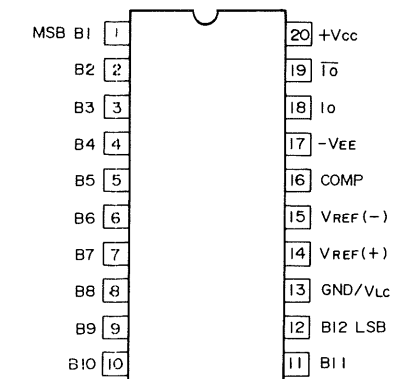

AM6012DC

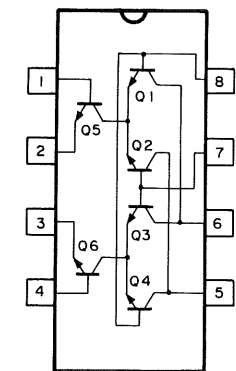

μPA101G

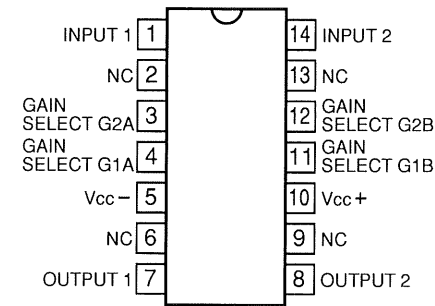


μA733CNS

- Pin name
1. A OUTPUT
 2. A (-) INPUT
 3. A (+) INPUT
 4. V⁻
 5. B (+) INPUT
 6. B (-) INPUT
 7. B OUTPUT
 8. V⁺


- Pin name
1. V⁺
 2. A OUTPUT
 3. A (-) INPUT
 4. A (+) INPUT
 5. V⁻
 6. B (+) INPUT
 7. B (-) INPUT
 8. B OUTPUT
 9. V⁺

- Pin name
1. V⁺
 2. A OUTPUT
 3. A - INPUT
 4. A + INPUT
 5. V⁻
 6. B + INPUT
 7. B - INPUT
 8. B OUTPUT
 9. V⁺


SEMICONDUCTORS

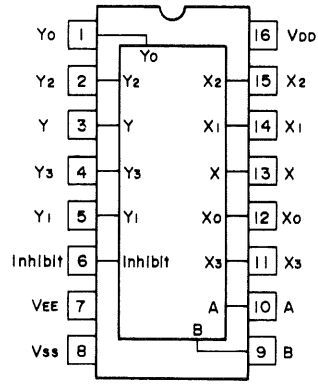


HD14052BFP
MC14052BCP

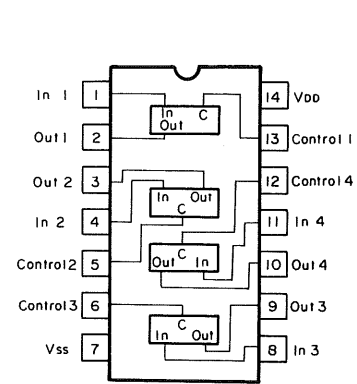


HD14066BFP

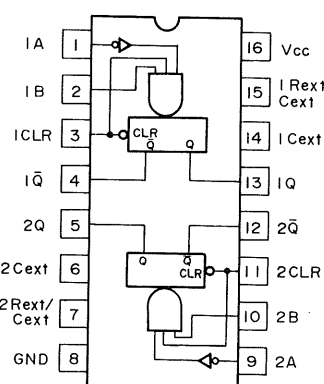


HD74HC123FP

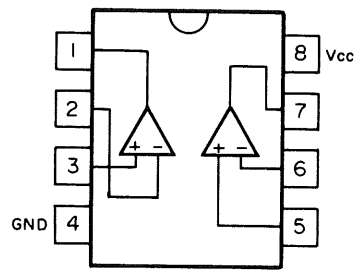


NJM4558D

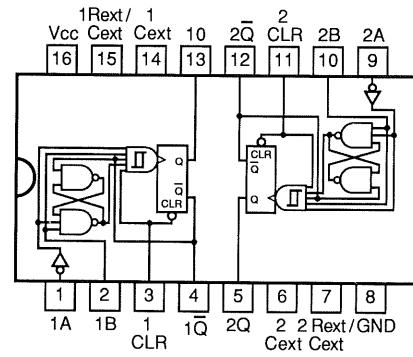


HD74HC221FP

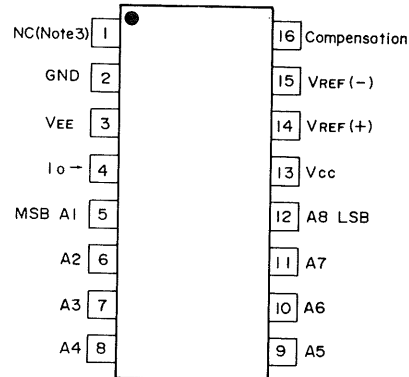


DAC0808LCN

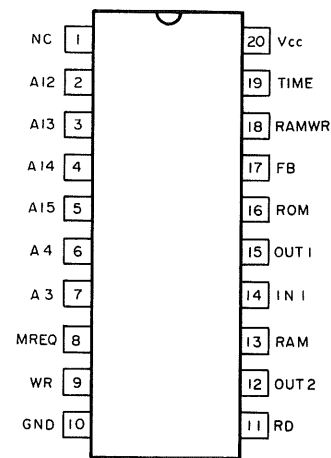


DTM-5010




PST518B

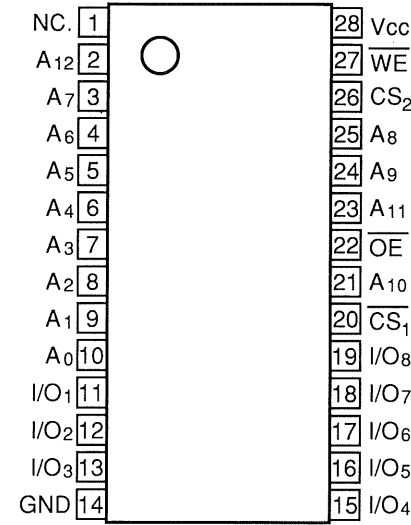


MB8464A-15LL

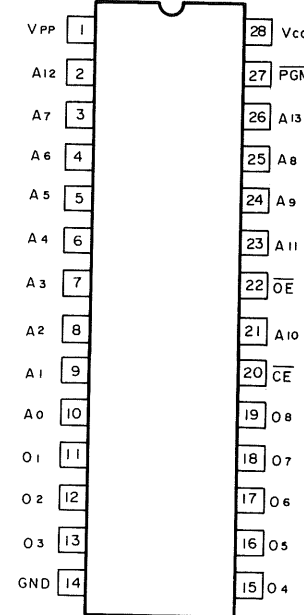


MBM27C256 *T

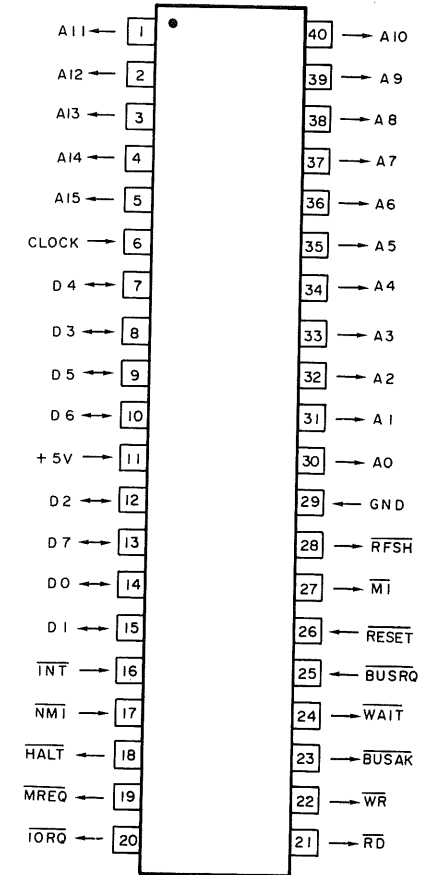

LH0080A

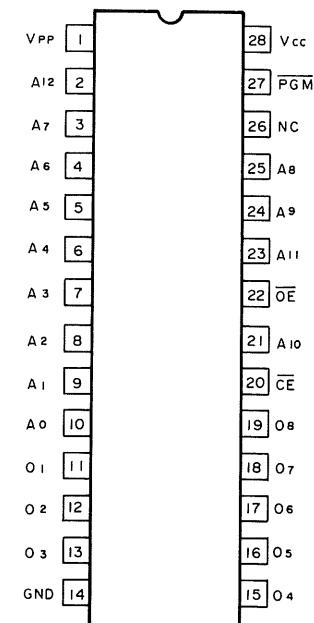


MBM27C64 *V

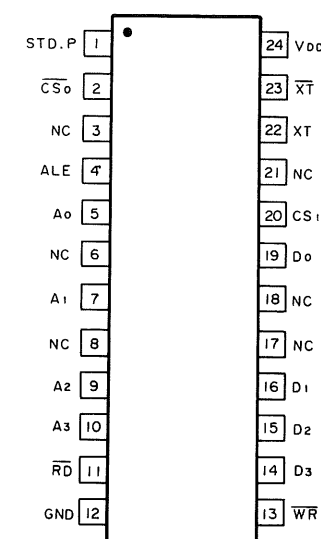


MSM6242BGS-VK

SEMICONDUCTORS

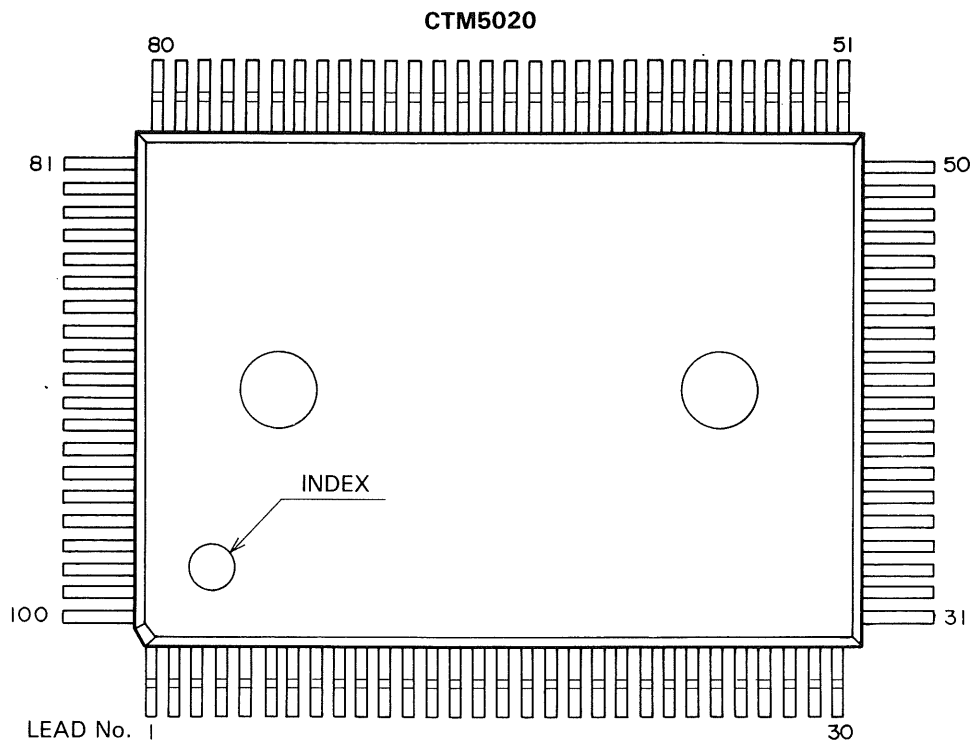


Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name
1	CONT	26	TSD0	51	GETD	76	DD3
2	A13	27	TSD1	52	CA0	77	SING
3	VDD	28	VDD	53	VDD	78	VDD
4	A14	29	TSD2	54	CA4	79	R10M
5	A15	30	AX2	55	CA3	80	10M
6	INT0	31	AX1	56	CA2	81	HLDF
7	VX3	32	AX0	57	CA1	82	SGA
8	VX2	33	AX3	58	CD3	83	ROSP
9	VX1	34	HS2	59	CD2	84	ROD
10	VX0	35	HS1	60	CD4	85	HLDL
11	DA0	36	TDIO	61	CD1	86	ROUB
12	DA1	37	TWE	62	CD5	87	ROB
13	DA2	38	TCK1	63	DC4	88	ROQ
14	DA3	39	TST1	64	CD7	89	ROED
15	VSS	40	VSS	65	VSS	90	VSS
16	DA4	41	TST2	66	DC3	91	D7
17	DA5	42	TADD	67	DC2	92	D5
18	DA6	43	TCK2	68	CD6	93	D3
19	DA7	44	VS2	69	DC1	94	D1
20	DA8	45	VS1	70	DC0	95	ALE
21	DA9	46	VA0	71	CD0	96	D6
22	ROR	47	VA4	72	DD7	97	D4
23	ROA	48	VA3	73	DD6	98	D2
24	LEVX	49	VA2	74	DD5	99	D0
25	TCL	50	VA1	75	DD4	100	WR


SEMICONDUCTORS




2SA684 (Q)
2SA1208 (S, T)
2SC2271 (D)
2SC2910 (S, T)
2SC1384 (R, S)
2SC1384 (Q)
2SA1005 (K)




2SA1209 (S, T)
2SA1406 (E, F)
2SC2911 (S, T)
2SC3600 (E, F)




2SA1161
2SC3779 (D)




2SA1175 (F)
2SC2785 (F)
2SC3732 (L)
2SA1174 (E, F)




2SA1206




2SA1565
2SC4049




2SC4072
2SC3066 (F)




2SB1133 (S)
2SD1666 (S)




2SC3315 (C)
2SC3354 (T, S)



2SK304 (F)

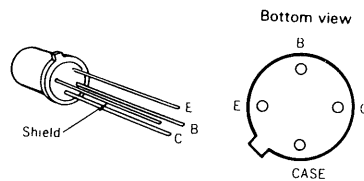


2SC1164 (O) * S




2SD1409


SEMICONDUCTORS




2SD613 (E)




2SK583




2SK241 (GR)




2SK332 (E)

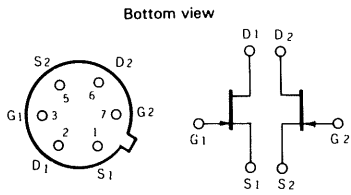


DN1901



S1VB60



S4VB40F

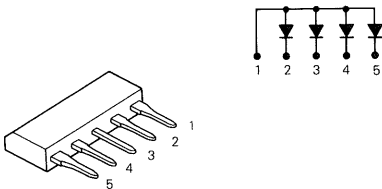

DAP401

A product of
KENWOOD CORPORATION
17-5, 2-chome, Shibuya, Shibuya-ku, Tokyo 150, Japan
