



KENWOOD

PROGRAMMABLE DIGITAL STORAGE OSCILLOSCOPE

# DCS-9100 DCS-9120

## SERVICE MANUAL

KENWOOD CORPORATION

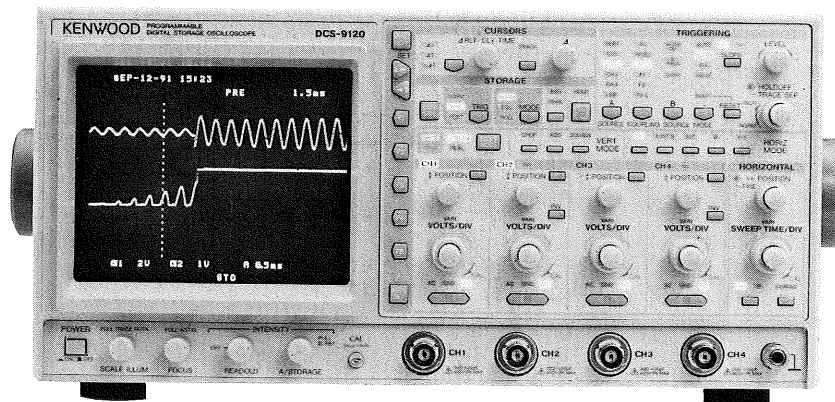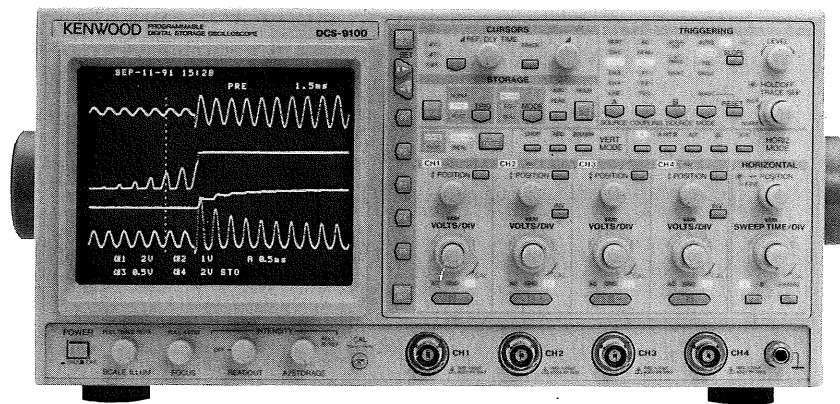

## **WARNING**

The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.

## **CONTENTS**

<b>SPECIFICATIONS .....</b>	<b>3</b>
<b>SAFETY .....</b>	<b>11</b>
<b>CIRCUIT DESCRIPTION .....</b>	<b>12</b>
<b>BLOCK DIAGRAM .....</b>	<b>22</b>
<b>ADJUSTMENT .....</b>	<b>24</b>
<b>TROUBLESHOOTING .....</b>	<b>46</b>
<b>PARTS LIST .....</b>	<b>80</b>
<b>DISASSEMBLY .....</b>	<b>81</b>
<b>PARTS LIST (ELECTRICAL) .....</b>	<b>84</b>
<b>SCHEMATIC DIAGRAM .....</b>	<b>108</b>
<b>P.C. BOARD .....</b>	<b>122</b>
<b>SEMICONDUCTORS .....</b>	<b>132</b>



# SPECIFICATIONS

## 【Real-Time Oscilloscope Section】

CRT	
Type	150mm rectangular with internal graticule
Acceleration voltage	17kV
Display area	8 div. × 10 div. (1 div. = 10mm)
Vertical axis (CH1, CH2, CH3 & CH4)	
Sensitivity	5mV/div. to 5V/div. ±2% (10 to 35°C) 1mV/div., 2mV/div. ±4% (10 to 35°C)
Attenuator	1mV/div. to 5V/div., 1-2-5 steps, 12 ranges, ranges fine-adjustable
Input impedance	1MΩ ± 1%, 23pF ± 3pF
Frequency response DC:	DC to 100MHz, within -3dB (5mV/div. to 5V/div.)
AC:	DC to 20MHz, within -3dB (1mV/div., 2mV/div.) 5Hz to 100MHz, within -3dB (5mV/div. to 5V/div.) 5Hz to 20MHz, within -3dB (1mV/div., 2mV/div.)
Rise time	3.5ns or less (5mV/div. to 5V/div.) 17.5ns or less (1mV/div., 2mV/div.)
Signal delay time	10ns or more (Delay time on CRT screen)
Cross-talk	-40 dB or less (with 1kHz sine wave input)
Operation modes CH1 :	CH1 single-trace and 2- to 4-trace display combined with other channel (s)
CH2 :	CH2 single-trace and 2- to 4-trace display combined with other channel (s)
CH3 :	CH3 single-trace and 2- to 4-trace display combined with other channel (s)
CH4 :	CH4 single-trace and 2- to 4-trace display combined with other channel (s)
ADD :	CH1 + (±CH2) or CH3 + (±CH4) added waveform and 2- to 4-trace display combination with other channel (s)
ALT :	Alternate method signal display
CHOP:	Chop method signal display
Polarity reversal	Applicable to CH2 and CH4.
Bandwidth limiting	Approx. 20MHz -3dB
Chopping frequency	Approx. 500kHz
Inter-channel delay time difference	Between CH1 and CH4: 0.5ns or less
Max. undistorted amplitude	8div. or more (DC to 100MHz)
△Max. input withstand voltage	800Vp-p or 400V (DC+AC peak)

# SPECIFICATIONS

<b>Horizontal axis</b>	
Operation modes	X-Y mode is switched with HORIZONTAL MODE. Y-axis: CH1 to CH4 and ADD X-axis: Selectable with trigger source. (CH1 to CH4)
Sensitivity	Same as vertical axis.
Input impedance	Same as vertical axis.
Frequency response DC	DC to 2MHz, within -3db
AC	5Hz to 2MHz, within -3db
X-Y phase difference	3° or less at 100kHz
△Max. input withstand voltage	Same as vertical axis.
<b>Sweep</b>	
Sweep method A	A sweep
A INT B	Simultaneous intensified B sweep during A sweep
ALT	Alternate A (A INT B) sweep and B sweep
B	B sweep
X-Y	X-Y oscilloscope operation
Sweep time A	20ns/div. to 0.5s/div. ±2% (10 to 35°C), 1-2-5 steps, 23 ranges, ranges fine-adjustable
B	20ns/div. to 50ms/div ±2% (10 to 35°C), 1-2-5 steps, 20 ranges
Sweep magnification	×10±5% (Common to A and B)
Linearity	20ns/div. to 0.5s/div. ±3% (×10MAG: ±5%)
Hold off	A sweep is continuously variable from NORM.
Trace separation	B sweep is continuously variable by approx. ±4 divisions with resp. to A sweep.
Delay method	Continuous delay, trigger delay and trigger count
Delay time	Continuous delay and trigger delay: 0.2 to 10 times as large as A SWEEP TIME/DIV. (Full scale at 5000 counts)
Trigger count	1 to 2000 counts, max. operating frequency: 10MHz
Delay accuracy	± (2% of set value+1% of full scale) + (0 to 100ns)
Delay jitter	20000: 1 or less
<b>Triggering</b>	
A trigger modes	AUTO, NORM, SINGLE & FIX
Trigger sources V MODE	Triggered by input signal of lowest-number channel selected for vertical axis mode.
CH1	Triggered by CH1 vertical axis input signal.
CH2	Triggered by CH2 vertical axis input signal.
CH3	Triggered by CH3 vertical axis input signal.
CH4	Triggered by CH4 vertical axis input signal.
LINE	Triggered by commercial supply frequency.
Trigger coupling	AC, H <sub>REF</sub> DC, TV-F1, TV-F2, TV-LINE
Trigger level	Variable by ±90° with controller.
Polarity	Positive and negative
B trigger source	B starts after delay time B triggered after delay time

# SPECIFICATIONS

Trigger sensitivity	Trigger count
coupling	Frequency range                      Minimum sync amplitude
DC	DC to 50MHz                            1 div.
AC	DC to 100MHz                          1.5 div.
HF <sub>REJ</sub>	20Hz to 50MHz                        1 div.
TV F1	20Hz to 100MHz                       1.5 div.
TV F2	Increased minimum sync amplitude for above 10kHz.
TV LINE	1.0 div.
	1.0 div.
	1.0 div.
	AUTO: Same as above specification for above 50Hz.
	FIX : Same as above specification for above 40Hz.
Jitter	0.5ns or less at 100MHz at 2ns/div. sweep rate (×10MAG on)
Intensity modulation	
Input voltage	Disappears at TTL-level positive voltage (2Vp-p or more).
Input impedance	10kΩ or more
Frequency range	DC to 10MHz
△Max. input withstand voltage	50V (DC+AC peak)
Others	
Program	Program mode (Storing and executing on-panel set values)
Programming range	Switches and controllers on panel, excluding power switch and CRT-related controls (Except for the HOLD switch)
Number of steps	20 steps×5 (groups)
Step setting	With SBT switch on front panel and program step terminals on rear panel
Trace rotation	Trace angle is adjustable with controller.
Calibration voltage	1Vp-p±1% (Positive polarity, 1 kHz±3%, square wave)

## 【Storage Section】

Vertical axes (CH1, CH2, CH3 & CH4) <For the DCS-9120, storage channels are only CH1 and CH2.>	
Vertical resolution	8bits (25 dots/div.)
Dynamic range	±5 div.
Frequency response	DC
	AC
Equivalent sampling	DC
	AC
Rise time	

Effective storage frequency: DC to 40MHz [16MHz] (Sine interpolation)

Effective storage frequency: 5Hz to 40MHz [16MHz] (Sine interpolation)

DC to 100MHz, within -3dB (5mV/div. to 5V/div.)

DC to 20MHz, within -3dB (1mV/div., 2mV/div.)

5 Hz to 100MHz, within -3dB (5mV/div. to 5V/div.)

5 Hz to 20MHz, within -3dB (1mV/div., 2mV/div.)

Effective rise time: 16ns [40ns] or less (Linear interpolation)

# SPECIFICATIONS

Memory capacity (Memory capacity used in each mode)	
NORM sampling	Display memory (for data) 2K words/channel (200 dots/div.) Display memory (for REF) 2K words/channel Acquisition memory 16K words/channel REF memory 16K words/channel
Equivalent sampling	Display memory (for data) 2K words/channel (200 dots/div.) Display memory (for REF) 2K words/channel Acquisition memory 2K words/channel REF memory 2K words/channel
Roll mode	Display memory (for data) 2K words/channel (200 dots/div.) Display memory (for REF) 2K words/channel Acquisition memory 16K words/channel REF memory 16K words/channel
Memory backup	Backed up by battery for approx. 30000 hours (at room temp.) REF memory 16K words/channel
Sweep time and display mode	
NORM sampling	20ns/div. to 500s/div. (Magnification range: 20ns/div. 1ns [2ns]/div.) (Max. sampling speed: 100Ms/s [40Ms/s])
Peak detector	10 $\mu$ s/div to 500s/div
Equivalent sampling	20ns/div to 1 $\mu$ s [2 $\mu$ s]/div
Roll mode	0.2s/div to 500s/div
Storage method	
NORM	Data is updated every time trigger is input.
SINGLE	Saves data after storage.
AVG	Average by adding 2, 4, 8, 16, 32, 64, 128 and 256 times
PEAK	Detects glitch of width up to 50ns.
ROLL	Records and updates data continuously on CRT.
Equivalent sampling	Random
Memory size	2K words/CH, 16K words/CH, 2K words $\times$ 8/channel
Magnification and contraction	
Magnification	Data is magnified by setting SWEEP TIME/DIV faster than current sweep time in hold state. (Magnified up to $\times$ 100 away from the screen center.)
Contraction	Data is contracted by setting SWEEP TIME/DIV slower than current sweep time in hold state. (Contracted down to 1/10, or 8 div on screen, toward the start point on the screen; down to 50 ms in B sweep.)
Interpolation	Linear interpolation, sine interpolation and spline interpolation
Triggering	
Pre-trigger	0 to 80 div. (1-division-step setting, div. display or time display)
Post-trigger	0 to 10 div. (when MEMORY SIZE menu is set to 2k) 0 to 10000 div. (1-division-step setting, div. display or time display)

# SPECIFICATIONS

B trigger	B starts after delay time B triggered after delay time Trigger count: 1 to 2000 counts
X-Y	
NORM Equivalent sampling	DC to 40MHz [16MHz] (Sampling speed is adjustable with SWEEP TIME/DIV.) DC to 100MHz
Others	
Waveform operation GO/NO-GO Judgment error AUTO SET  Operation mode Set value  Operation range	+, -, ×, ÷ (CH1-CH2 and CH3-CH4 operation) Judged in cursor-set condition range. (Output terminal on rear panel) Cursor-set condition range within ±0.5 divisions Automatic range setting in accordance with input waveform. (Auto set operation is possible in the real-time mode) Vertical only, horizontal only, and both vertical and horizontal Vertical (peak value): 2 div (1 to 3 div), 4 div (2 to 4 div) Horizontal (cycle) : 2 div (1 to 3 cycles), 4 div (3 to 7 cycles) 2mVp-p to 40Vp-p, 50Hz to 5MHz (Range where fix triggering is possible)
PEN OUT (Hard copy of CRT screen)	
Y-axis output voltage X-axis output voltage Pen lift Output impedance  Readout speed	0.5V/div ±5% 0.5V/div ±5% TTL-level; Low level during pen down motion X- and Y-axis: Approx. 2kΩ Pen lift : TTL OUT 10ms, 50ms, 100ms & 500ms/word
PLOT OUT (Hard copy of CRT screen)	
Through RS-232C Output  Baud rate Transmission format  Signal	Via RS-232C using HP-GL command, data transfer only, RS-232C/GP-IB selection is allowed (with the DIP switches on the rear panel.) 9600/4800/2400/1200 bps Data length: 7/8 bits, parity setting is possible, stop bits: fixed to 2 bits, hardware hand shake FG (Frame Ground)            Frame ground SD (Send Data)                Send data                        → Plotter RD (Receive Data)            Receive data                   ← Plotter RS (Request to Send)        Request to send                → Plotter CS (Clear to Send)            Clear to send                   ← Plotter DR (Data Set Ready)         Data set ready                   ← Plotter (Request to send from plotter) ER (Data Terminal Ready)    Data terminal ready             → Plotter (Permission to send from plotter) SG (Signal Ground)            Signal ground

# SPECIFICATIONS

<p>Connection</p>          <p>Through GP-IB Output</p>	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; text-align: center;">DCS-9XX0 side</td> <td style="width: 50%; text-align: center;">Plotter side</td> </tr> <tr> <td>1 Shield</td> <td>Shield 1</td> </tr> <tr> <td>2 Blue</td> <td>Red 2 SD</td> </tr> <tr> <td>3 Red</td> <td>Blue 3 RD</td> </tr> <tr> <td>4 Gray</td> <td>Yellow 4 RS</td> </tr> <tr> <td>5 Brown</td> <td>Green 5 CS</td> </tr> <tr> <td>6 Yellow</td> <td>Gray 6 DR</td> </tr> <tr> <td>7 Black</td> <td>Black 7 SG</td> </tr> <tr> <td>8 -</td> <td>- 8</td> </tr> <tr> <td>20 Green</td> <td>Brown 20 ER</td> </tr> </table> <p>Via GP-IB using HP-GL command (applicable to HP-GL plotter made by EPSON), talk-only, RS-232C/GP-IB selection is allowed (with the DIP switches on the rear panel).</p>	DCS-9XX0 side	Plotter side	1 Shield	Shield 1	2 Blue	Red 2 SD	3 Red	Blue 3 RD	4 Gray	Yellow 4 RS	5 Brown	Green 5 CS	6 Yellow	Gray 6 DR	7 Black	Black 7 SG	8 -	- 8	20 Green	Brown 20 ER
DCS-9XX0 side	Plotter side																				
1 Shield	Shield 1																				
2 Blue	Red 2 SD																				
3 Red	Blue 3 RD																				
4 Gray	Yellow 4 RS																				
5 Brown	Green 5 CS																				
6 Yellow	Gray 6 DR																				
7 Black	Black 7 SG																				
8 -	- 8																				
20 Green	Brown 20 ER																				

## 【Readout Section】

Calendar	
<p>Display</p> <p>Clock accuracy</p> <p>Battery life</p> <p>Trigger, time stamp</p>	<p>Year, month, day, o'clock, &amp; minute</p> <p>±2 minutes/month</p> <p>Approx. 30000 hours (at room temp.)</p> <p>Displays time when trigger is input in storage mode (single sweep).</p>
Set value	
<p>Vertical axis</p> <p>Horizontal axis</p> <p>Trigger</p> <p>Storage</p> <p>Others</p>	<p>CH1 to CH4 scale factors (with probe detection), GND, AC/DC, V-UNCAL, ADD, INVERT, BW</p> <p>(A, B) sweep scale factors (magnification conversion), SWEEP VARIABLE UNCAL, X-Y (Channel selected as trigger source is displayed.)</p> <p>Delay time and trigger count</p> <p>Sampling speed in X-Y display mode, waveform operation (+, -, ×, ÷), operation channel specification (CH1 to CH4) &lt;For the DCS-9120, storage channels are only CH1 and CH2&gt;, display scroll, average number setting, trigger point display (pre-trigger, post-trigger), equivalent sampling, roll, REF memory set conditions</p> <p>Auto step display, trigger time stamp display, SRQ, comment display (for 10 screens), automatic waveform parameter measurement</p>
Automatic waveform parameter measurement	
<p>PERIOD</p> <p>FREQUENCY</p> <p>PULSE WIDTH</p> <p>RISE TIME</p> <p>FALL TIME</p> <p>DELAY TIME</p>	<p>Automatic measurement of period of trigger source waveform</p> <p>Automatic measurement of frequency of trigger source waveform</p> <p>Automatic measurement of pulse width of trigger source waveform (Automatic positive/negative selection)</p> <p>Automatic measurement of rise time of trigger source waveform</p> <p>Automatic measurement of fall time of trigger source waveform</p> <p>Automatic measurement of time difference between trigger source waveform and waveform in channel specified on menu</p>

# SPECIFICATIONS

OVER SHOOT	Over-shoot of trigger source waveform is displayed in percentage based on amplitude
UNDER SHOOT	Under-shoot of trigger source waveform is displayed in percentage based on amplitude
PEAK TO PEAK VRMS	Automatic measurement of peak-to-peak voltage of trigger source waveform
TOP LEVEL	Automatic measurement of effective voltage of trigger source waveform
BASE LEVEL	Automatic measurement of top level of trigger source waveform
AMPLITUDE	Automatic measurement of base level of trigger source waveform
POWER	Automatic measurement of amplitude of trigger source waveform
	Automatic measurement of average power from trigger source voltage waveform and current waveform in channel specified on menu
<b>Cursor measurement</b>	
Cursor modes $\Delta V1$	Voltage measurement between $\Delta REF$ and $\Delta$ cursor using CH1 scale factor
$\Delta V2$	Voltage measurement between $\Delta REF$ and $\Delta$ cursor using CH2 scale factor
$\Delta V3$	Voltage measurement between $\Delta REF$ and $\Delta$ cursor using CH3 scale factor
$\Delta V4$	Voltage measurement between $\Delta REF$ and $\Delta$ cursor using CH4 scale factor
$\Delta V12$	Voltage measurement between $\Delta REF$ and $\Delta$ cursor using CH1 or CH2 scale factor (when ADD key is ON state)
$\Delta V34$	Voltage measurement between $\Delta REF$ and $\Delta$ cursor using CH3 or CH4 scale factor (when ADD key is ON state)
$\Delta T$	Time difference measurement between $\Delta REF$ and $\Delta$ cursor using sweep scale factor
$1/\Delta T$	Frequency measurement between $\Delta REF$ and $\Delta$ cursor using sweep scale factor
RATIO	Voltage ratio and time ratio measurement between $\Delta REF$ and $\Delta$ cursor based on 5 divisions on CRT as 100%
PHASE	Phase difference measurement between $\Delta REF$ and $\Delta$ cursor based on 5 divisions on CRT as $360^\circ$
Tracking	$\Delta$ cursor links with $\Delta REF$ cursor operation.
Measurement resolution	10 bits
Measurement error	$\pm 3\%$
Measurement range	
Vertical	$\pm 3.6$ divisions or more from CRT center
Horizontal	$\pm 4.6$ divisions or more from CRT center

## 【Power Supply Section】

Supply voltage	90 to 250VAC (2 ranges), 48 to 440Hz
Power consumption	Max. approx. 130W

## 【Other Specifications】

Dimensions and weight (Values enclosed in parentheses include protrusions.)	
Width	310mm (350)
Height	150mm (163)
Depth	460mm (515)
Weight	Approx. 9kg

# SPECIFICATIONS

Operating temperature and humidity	
Within specification temperature	10 to 35°C
Within specification humidity	85% or less
Operating temp. and humid.	0 to 50°C, 85% or less (No dew condensation)
Accessories	
Probes	PC-31 4 (Compatible with readout function)
Attenuation	1/10
Input impedance	10M $\Omega$ $\pm$ 1%, 14pF $\pm$ 10%
Power cord	1
Instruction manual	1 copy
Replacement fuses	2

## 【Interface】

GP-IB (Compliant with IEEE-488 1978)	
Operation	Waveform input/output, panel data output and control; (TALK/LISTEN) Outputting data on screen to plotter (GP-IB/talk-only/RS-232C selection is allowed.)
Command	69 commands
Data accuracy	
Waveform data	8 bits (Same as storage section.)
Cursor data	10 bits (Same as readout section.)
Analog control data	$\pm$ 0.5 div. (Div. display section) (% display section not specified)
RS-232C EIA Standard (Plot out only; Refer to the description on plot out.)	

■ The specifications are subject to change without notice.



# SAFETY

## SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

### Line voltage

This instrument operates using ac-power input voltages that 100/120/220/240 V at frequencies from 50 Hz to 60 Hz.

### Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

### Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.







Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	5 A, 250 V Slow blow 6x30 mm	None	Cord: E30-1951-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	North Europe 5 A, 250 V Slow blow 6x20 mm Other Europe 5 A, 250 V V Slow blow 6x30 mm	None	Cord: E30-1819-15
	U.K. 240 volt/50 Hz Rated 13 amp	5 A, 250 V Slow blow 6x30 mm	0.8 A Type C	—
	Australian 240 volt/50 Hz Rated 10 amp	5 A, 250 V Slow blow 6x30 mm	None	Cord: E30-1953-05
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	5 A, 250 V Slow blow 6x30 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	5 A, 250 V Slow blow 6x30 mm	None	—

Fig. 1 Power Input Voltage Configuration

# CIRCUIT DESCRIPTION

## Vertical Unit (X73-1900-00)

This unit is composed of 12 circuits described below and has the purpose of providing the Y axis of the oscilloscope.

### 1. 1st ATT

Each of the attenuators of CH1 to CH4 controls the internal relays according to the signal sent from the panel to switch between 1/1, 1/10, 1/100, 1/1000 and AC/DC/GND.

### 2. Head Amplifiers

Each of the HEAD amplifiers of CH1 to CH4 is composed of KMC-04. The first stage is terminated with 1 megohm and converts the impedance of the signal from the attenuator. A 4x amplifier is added to the latter stage.

### 3. 2nd ATT

Each of the 2nd attenuators of CH1 to CH4 operates the two relays (K101 and K102 with CH1) according to the signal sent from the panel to switch between 1/2 and 1/4.

### 4. MAG Amplifiers

Each of the MAG amplifiers of CH1 to CH4 is composed of a relay (K103 with CH1) and opamp (U102 with CH1) and selects whether 5x magnified amplification is applied or not according to the signal sent from the panel. In case 5x amplification is applied (MAG), the signal from the 2nd attenuator is input to the 5x non-inverting amplifier and output to the amplifier of the next stage.

### 5. VARI Amplifiers

Each of the VARI amplifiers of CH1 to CH4 incorporates an inversion circuit and variation circuit so that the variation amount can be determined according to the amplitude of the analog signal from the Read-Out Unit. The amplifiers of CH1 and CH3 do not incorporate the inversion function but they are still provided with the inversion circuits to assure circuit stability. Each amplifier converts the single-ended signal from the MAG amplifier into differential signal and applies 4x amplification.

### 6. POSI Amplifiers

Each of the POSI amplifiers of CH1 to CH4 inputs the position signal from the panel and the signal from the VARI amplifier and outputs a signal to which DC bias is applied according to the position signal amount.

### 7. V-SINGLE Amplifiers

Each of the SINGLE amplifiers of CH1 to CH4 converts differential signal into single-ended signal. As this makes the signal possible to be input to the A/D converter, it is output from the V Unit towards the A/D Unit.

### 8. Channel Switch

Three channel switching amplifiers are provided for the vertical circuitry and three for the horizontal circuitry. Each of the amplifiers inputs two difference signals and output either or the sum of them for use in V-MODE setting and TRIG-SOURCE setting. The channel switches in the vertical circuitry include U501 for switching between CH1 and CH2, U502 for switching between CH3 and CH4 and U503 for switching between the U501 output and U502 output, and they are controlled according to the signal from the panel. The channel switches in the horizontal circuitry include U601 for switching between CH1 and CH2, U602 for switching between CH3 and CH4 and U603 for

switching between the U601 output and U602 output, and they are also controlled according to the signal from the panel.

### 9. Delay Line Drivers

The differential signal output from the channel switch U503 is input to the emitter-followers of Q501 and Q502, the outputs of which have some frequency response correcting resistors and capacitors attached to them. Transistors Q503, Q504 and Q505 form the circuit which varies the vertical signal positioning amount according to the voltage from the Horizontal Unit that indicates the trace separation shifting amount. Q503 is the current source which supplies the collector current to Q504 and Q505. The trace separation amount is input to the base of Q505 to control the currents of the collectors of Q504 and Q505. This changes the base voltages input to Q506 and Q507 therefore the position is varied. Q506 and Q507 are emitted-grounded differential amplifiers and the delay line is driven by the outputs of these transistors. Q508 and Q509 are used as band-wise switches.

### 10. Decoder

The decoder is composed of U506, U507, U508, Q510, Q511, Q512, Q513, Q514 and Q515, and is used to generate the control signal to be input to the channel switches of the vertical circuitry for use as their control signal. The signals input to the decoder circuit are the serial data from the Read-Out Unit and the signal switching timing (VCK) signal from the Horizontal Unit. The decoder circuit makes it possible to output traces of multiple phenomena simultaneously on the oscilloscope's CRT or to output the CH1+CH2 and CH3+CH4 waveforms.

### 11. Latch

The latch circuit is composed of U1, U2, U3, U4, U5, U6 and U7, and is used to convert the serial data from the Read-Out Unit into parallel data and latch it. This makes it possible to control the switching signal of the Vertical Unit using two clock signal lines and one data line.

### 12. H-SINGLE Amplifier

The H-single amplifier is composed of U604, U605, Q601 and Q602, and is used to adjust the X signal. The X-GAIN is adjusted by applying the analog signal from the Read-Out Unit to pin 5 of U605 and supplying its output to the analog switch of Q601 and Q602. The X-OFFSET is adjusted by applying the analog signal from the Read-Out Unit to pin 2 of U605 and supplying its output to the offset adjustment terminal of U604. The input to this circuit is a differential signal, which is converted into a single-ended signal before being output.

## Horizontal Unit (X74-1530-00)

This unit has the purpose of providing the X axis and Z axis of the oscilloscope.

The trigger signal from the V Unit is input to this unit through Q1 and Q2.

The signal is amplified by the trigger amp and converted from analog to digital. The waveform is rectified by U11 and the sweep gate is generated by U34.

When TV signal is input, it is not sent through the trigger amp but sent to the special video amp (U5, U6) for amplification then to

# CIRCUIT DESCRIPTION

U7 for sync separation. The sync signal is input to U34 for generating the sweep gate. This circuit is designed so that, when the sweep gate is turned ON, the sawtooth wave from U18 is output and, when the sawtooth signal attains a certain level, the sweep gate is turned OFF by Q15, Q16 and U21.

The delayed sweep signal which uses U18 as the main sweep signal is output from U19.

The respective blanking signals are input from U13 to U14, mixed with the blanking signal of the storage mode, and the obtained signal is output from Q49 as the unblanking signal to be sent to the High Voltage Unit (X68-1590-00).

Transistors Q26 to Q32 are used to select one of the main sweep signal, delayed sweep signal and the X signal of the X-Y mode. The selected signal is input to U24, mixed with the POSI signal to become differential signals X+ and X-, which are input to the H final amp via P16.

With the random sampling, the time-domain information of the data at the moment it is sampled with random sampling is obtained by sampling-and-holding of sawtooth wave by Q35 to Q38 and U26.

## Final Unit (X80-1140-00)

This unit has the purpose of amplifying the signals from the V and H Units until the levels high enough to drive the CRT.

From the V Unit (X73-1900-00), the V signal is input to Q1 and Q2 via the delay line. At U1, the V signal is mixed with the Y signal of R/O. The mixed signal is amplified by Q9 to Q14 and supplied to the CRT.

From the H Unit (X74-1530), the H signal is input to Q101 and Q102. At U2, the H signal is mixed with the X signal of R/O. The mixed signal is amplified by Q107 to Q118 and supplied to the CRT.

## A/D Unit (X78-1070-00)

This unit has the purpose of sampling analog signals and writing the obtained data in memory.

After A/D conversion by U102 and U202, the level of the signal is converted from ECL to TTL, by U103 and U104 in case of CH1/3 signal or by U203 and U204 in case of CH2/4 signal. The signal is input to U105 (CH1/3) or U205 (CH2/4) for peak detection and the distribution to the 4 memory phase inside it, and recorded in the memory of U106, U107, U108 and U109 (CH1/3) or U206, U207, U208 and U209 (CH2/4). The recorded data is read out by the ADO1 to ADO4 signals and output to the Storage Unit (X77-1660-00) through the data bus connected to the connectors of P56 and P57 (D0 to D7 with CH1/3, D8 to D15 with CH2/4).

The memory write operation is performed at the positive-going timing of LAT4 (pin 10 of P30) when ADRW (pin 15 of P30) is "L", ADRW (pin 16 of P30) is "H" and MEMWE (pin 20 of P56) is "L". For the memory read operation, while ADRW is "H", ADRW is "L" and DMA1,2 (with CH1/2) or DMA3,4 (with CH3/4) is "L", the data in U106 or U206 is read when ADO1 goes "L", data in U107 or U207 is read when ADO2 goes "L", data in U108 or U208 is read when ADO3 goes "L" and data in U109 or U209 is read when ADO4 goes "L".

Clocks with inverted phase are input to pins 20 and 21 of A/D converters U102 and U202. The A/D conversions are performed at their timings and digital data are output from U102 and U202. U1 is the clock receiver which receives clock from the Time Base Unit (X71-1150-00) and generates the clocks input to the A/D converter.

Gate arrays U105 and U205 have the internal configuration as shown in Fig. 2. The timing of LAT1, LAT2, LAT3 and LAT4 is as shown in Fig. 3 so data is recorded in the order of from memory U106 (U206), U107 (U207), U108 (U208) and U109 (U209). The clocks of ADO1, ADO2, ADO3 and ADO4 are as shown in Fig. 4, and they are read out in the same order as they are written. The peak value is detected with the configuration shown in Fig. 1. The data is latched (latch 1) based on the PCLK (pin 2 of P30) with the same frequency as the data output from the A/D converter and compared with the MIN value data which has been latched by latch 2 in comparator 1. As a result, in case the data in latch 2 is smaller than the data in latch 1, comparator 1 outputs the clock and the data in latch 1 is latched by latch 2. As a result, latch 2 stores the MIN value data in it. In the same manner as above, the MAX value data is stored by latch 3 and comparator 2. The data are transferred to latch 4 and latch 5 based on the PWCK with the same frequency as SWEEP TIME, and the data is recalled from selector 1 according to the three modes of MIN, MAX and MIN/MAX alternate detection.

# CIRCUIT DESCRIPTION

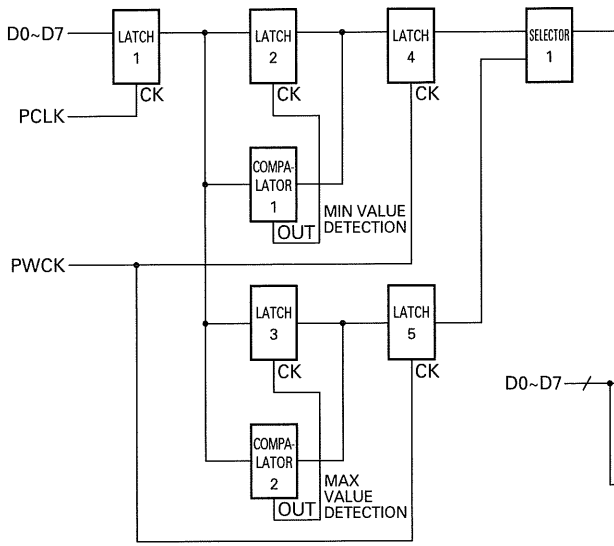


Fig. 1 Block Diagram of Peak Detector Circuit in Gate Array

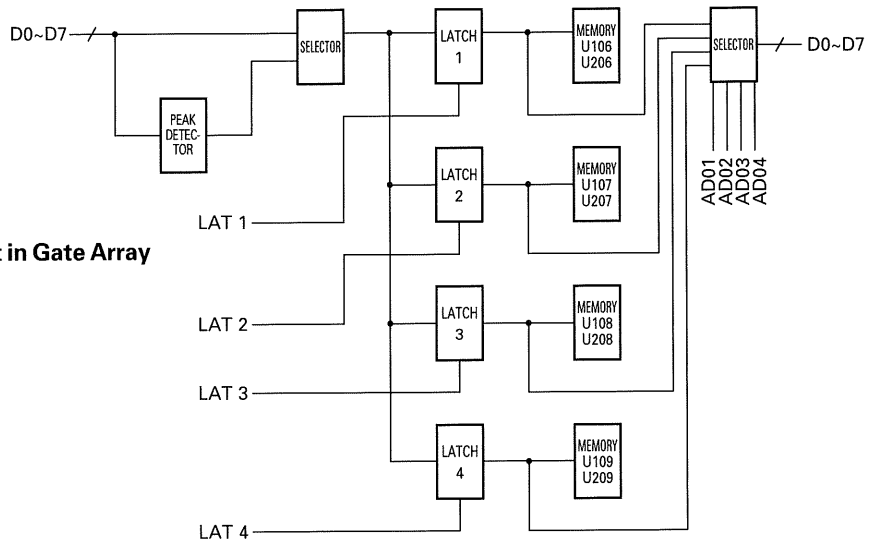


Fig. 2 Internal Block Diagram of Gate Array

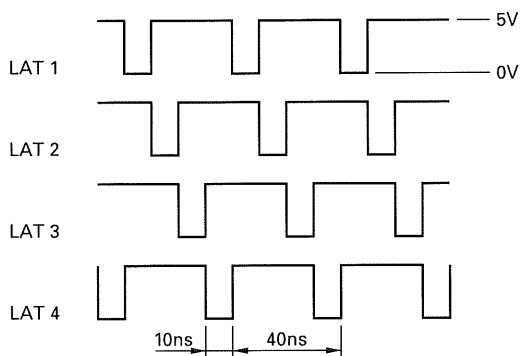


Fig. 3 Clocks LAT1, LAT2, LAT3 and LAT4 When the SWEEP TIME is 2 μs/div. or more

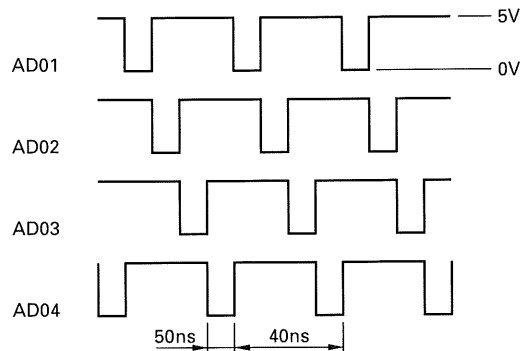


Fig. 4 Clocks ADO1, ADO2, ADO3, ADO4

# CIRCUIT DESCRIPTION

## Time Base Unit (X71-1150-00)

This unit is composed of 18 circuits described below and has the purpose of generating the timing of the A/D converter.

### (1) 200 MHz oscillator

The oscillation by X'tal X1 is amplified by Q6. The oscillation condition is set by trimmer TC2. After impedance conversion by the emitter-follower of Q3, the oscillation signal is input to pin 11 of U3d and set to the ECL level.

### (2) CLK divider circuit

The 200 MHz clock is divided by U1b to 1/2, or 100 MHz. Also, a 1/5 divider circuit is formed by U1a, U2 and U3a to divide 200 MHz into 40 MHz. This 40 MHz is input to U56a for level conversion from ECL to TTL and input to U4, where it is divided into 20 MHz and 10 MHz. The 20 MHz clock is then input to U5a, where 2 MHz and 1 MHz are generated from 4 MHz using U6a. The 2 MHz is divided by U5b into 400 kHz. The 400 kHz is further divided into 200 kHz and 100 kHz by U6b and into 400 kHz down to 0.4 Hz by U7 and U8. The dividing ratio of U7 and U8 is determined by the codes (TBCD0 to TBCD4) sent from the U15 according to the sweep time setting.

### (3) CLK selector circuit

The clock signals generated by the CLK divider circuit are selected by U9. The selection is made according to the sweep time setting. The sweep time codes (TBCD5 to TBCD7) are sent from U15 to U9 and the corresponding clock is output at pin 6 of U9.

### (4) PEAK DET controller circuit

U11, U52b, U10abd and U61d are in charge of control at the time of peak detection. U52b, U10abc and U61d are used to take the timing with G/A in the A/D Unit. U11 is used to select between the AD clock and LATCH clock. U11 is controlled by U17 and pin 2 outputs the AD clock and pin 15 outputs the LATCH clock. At the time of peak detection, 40 MHz is output as the AD clock.

### (5) AD CLK adjustment circuit

DL1 and P1 form the circuit for taking the timing between the A/D data and LATCH clock. With this circuit, the position of P1 is adjusted while monitoring the test pins (J2, J3) of the A/D Unit so that the LATCH clock comes on the center of the A/D data.

### (6) AD CLK buffer

U16abc send the clock signal from the AD CLK adjustment circuit to the A/D Unit together with a clock with inverted phase. These signals are used as the clock signals (ADCK12, ADCK34) of the AD converter.

### (7) LATCH CLK circuit

The LATCH clock output from U11 is converted by U12 and U13 into 4-phase LATCH clock signals, which are output as LAT1 to LAT4. These signals are sent to the A/D Unit for use as the LATCH clocks inside the G/A. Two of these signals (LAT1, LAT3) are also used for various control operations inside the Time Base Unit. The LATCH CLK circuit is controlled by the SGA controller circuit which is described below. However, in the roll mode and during pre-triggering, it outputs 4-phase clock signals regardless of the SGA controller.

### (8) SGA controller circuit

This circuit is composed of U14, U48, U3bc, U49d, U50c and Q1,

and is used to start the LATCH CLK circuit in synchronism with the SGA signal. This circuit operates so that SGA can be accepted when ADR\_W is "H", and the LATCH CLK circuit is activated when Q\_ of U14b goes "H". However, this circuit does not function in roll mode and during pre-triggering.

### (9) Memory Write CLK controller circuit

This circuit is composed of U42, U43a, U44bc and U46d, and is used to generate the Write Enable signal of the ACQ memory (A/D Unit) and the clock for the address counter of the memory from LAT1 and LAT3 sent from the LATCH CLK circuit. The ACQ memory (A/D Unit) Write Enable signal is output from Q of U42a as MEM WE\_. This signal is used by the EQU sampling control circuit and by the ADR/W\_ generator, which is used during rolling, in the pre/post delay counter circuit. These circuits will be described later. The clock signal for the memory address counter is output from pin 11 of U46d.

### (10) Fast memory counter circuit

The counter formed by U18, U19 and U20 sets the address of the ACQ memory (A/D Unit) and is used both in write and read. The write clock is sent from the memory Write CLK controller circuit (pin 11 of U46d) which is described above, and the read clock is sent from the DMA controller circuit (pin 3, U46a). The write end signals for memory sizes of 2K and 16K are generated from this counter except during pre-triggering and in the roll mode. The signal from pin 11 of U51d indicates the end of write of 2K memory and the signal from Q\_ of U43b indicates the end of write of 16K memory. The signal is sent to the R/W controller circuit and write ends when ADR/W\_ goes "H". The end of write during pre-triggering occurs when pin 7 of U33 in the pre/post delay counter circuit goes "H", and the end of write in the roll mode occurs when Q(MEMWE\_) of U42a is input to pin 3 of U52a, Q\_ goes "L" and ADR/W\_ goes "H".

### (11) R/W controller circuit

This circuit is composed of U40, U45cd, U49a, U50ab, U51a and U52a, and is used to inform the Storage CPU of the ACQ memory data transfer by turning the ADR/W\_ signal "H" when the memory count (16K, 2K, or 4 words in roll mode) set for the ACQ memory (A/D Unit) has been written. Upon receipt of this signal, the Storage CPU sends the AEN and DMAAK signals to the DMA controller and the data is transferred. When the data transfer completes, the Storage CPU sends DLYCNTLD\_, which resets the R/W controller circuit and turns ADR/W\_ "L", starting the stand-by for next data write (SGA stand-by). ADR/W\_ is "L" during write or write stand-by of ACQ memory and "H" during DMA transfer and serial transfer (mode change), and it is used as the base of the operation of the Time Base Unit. In case of mode change, ALL RESET occurs, turning ADDCNTLD\_ "L" and resetting all circuits to the initial status.

### (12) DMA controller circuit

This circuit is composed of U37, U38, U39, U45b, U46a, U47ab and U49bc. When ADR/W\_ goes "H", the Storage CPU sends AEN, DMAAK\_ and DMARST\_ to the DMA controller so the waveform data in the ACQ memory is sent to the data memory of the Storage CPU through DMA transfer. At this time, DMAAK is divided into 1/4 by U37 and sent to the fast memory counter

# CIRCUIT DESCRIPTION

for use as the DMA read clock. AEN and DMAAK\_ are processed by U38 and U39 to generate 4-phase memory select signals (ADO1, 2, 3 and 4), which are sent to the G/A of the A/D Unit. DMARST\_ is output at the completion of DMA transfer of CH1 and CH2 or CH3 and CH4 and resets the DMA controller circuit. At the time of read-out, the start address in the ACQ memory is set by HC595 of U23 and U24.

## (13) SGA enable counter circuit

This circuit is composed of U25, U26, U27, U41 and U44d, and functions only during pre-triggering. This counter circuit inhibits the acceptance of SGA until the ACQ memory has been written until the set pre-triggering value. The counter setting is specified by software and set in PRED0 to PRED11 in U28 and U36. The value set for the counter is [Pre-triggering setting value (div.) \* 50]. The operation of the counter starts at the same time as the write in the ACQ memory. When the count attains the set count value, Q\_ of U41a goes "H", the RESET terminal (pin 1) of U41b goes "H" at the same time, and acceptance of SGA is enabled by CK of U41b (pin 11). When SGA is accepted, Q\_ of U41b goes "L", pin 4 (CE terminal) of U29 also goes "L" and the operation of the pre/post delay counter circuit is enabled.

## (14) Pre/post delay counter circuit

This circuit is composed of U29, U30, U31, U32 and U33, and functions during pre-triggering or post-triggering. During pre-triggering, the value set for this counter differs depending on whether the memory size is 2K or 16K. The value set in the 2K mode is  $[511 - N(\text{div.}) * 50]$  while the value set in the 16K mode is  $[4095 - N(\text{div.}) * 50]$ . During pre-triggering, the value set for the counter is decremented down as SGA is input and, when it is counted down to "0", ADR/W\_ goes "H" and the write in the ACQ memory ends. During post-triggering, the value set for the counter is  $[N(\text{div.}) * 50]$  regardless of the memory size. Similarly to the case of pre-triggering, the counter is decremented as SGA is input but, in this case, write in the ACQ memory starts when the counter is counted down to "0". "N" in the expressions above can be set up to 80 div with pre-triggering and up to 10,000 div. with post triggering. The counter is set by DLYD0 to DLYD19 of U34, U35 and U36.

## (15) Pre-triggering address buffer

This buffer is composed of the line driver of U21 and U22, and is used during pre-triggering. Because the trigger point start address is not specified in the ACQ memory in pre-triggering, the trigger point address is calculated from the end address in the ACQ memory (the address where write was ended) using the set value. The end address can be read as follows; when ADR/W\_ goes "H" to request the Storage CPU to transfer the waveform data in the ACQ memory, the Storage CPU sends the LADR signal so the end address is output to the CPU bus.

## (16) Equivalent sampling controller circuit

This circuit is composed of U58d, U59 and U60d, and functions during equivalent sampling. This model is based on random sampling and this circuit generates the hold clock (EQA2) for the random sampling. This clock is generated by dividing MEMWE\_ of the memory write CLK controller circuit described above, using U59. U60 is used to take the timing of equivalent sampling

during pre-triggering. The generated EQA2 signal is sent to the Horizontal Unit for use in sample & hold of sawtooth wave.

## (17) WRITE LED controller circuit

This circuit is composed of U47f, U58ac, U51c, U60a and Q7. This circuit is used to light the WRITE LED on the panel and the signal is sent to the Panel Unit as the WRITE signal. This circuit operates as follows; when SGA is input while the ADR/W\_ signal is "L", Q\_ of U60a goes "L" and pin 3 of U58a goes "L" and Q7 is turned ON, lighting the WRITE LED. If the sweep time was set faster, this interval would become short and the WRITE LED lights hardly. To prevent this, the one-shot circuit of U60a works to turn Q7, that is, the WRITE LED lights for a certain period of time.

## (18) AD REF power (-2 V)

This is the reference voltage generator circuit of AD converter CX1396D and composed of opamp U53a and transistor Q2. The power is supplied to pin 23 of the AD converter in the A/D Unit and determines the dynamic range of the AD converter. The reference voltage is -2 V.

## Storage CPU Unit (X77-1660-0X)

This unit has the purpose of providing the waveforms required by the operating by calculating the stored waveform data.

The CPU (U1) is uPD70335GJ-8 (hereinafter V35+). The clock of the CPU is supplied from 16 MHz in X1 and the internal operation uses 8 MHz. The CPU has a 16-bit bus configuration. At the time power is turned ON, the CPU is reset by MB3771 of U44.

The system ROM is composed of U6 and U7, with U6 used for even channels and U7 for odd channels. It is a 64K byte memory. The system RAM is an 8K byte memory composed of U8 and U9.

U10 to U15 are used as the data memory and each memory chip has a capacity of 32K bytes. U10 and U11 are used for reference memory, U12 and U13 are used for computation memory and U14 and U15 are used for data memory. The reference memory is backed up even when the power is OFF by battery B1. The back-up circuit is composed of U20, D2 and D3. U94 checks the battery when the power is turned ON and, if the battery voltage is below about 2.4 V, pin 45 of V35+ goes "H" and the BATT DOWN indication appears.


The data sent from the ACQ memory by DMA transfer is written in the data memory of U14 and U15. The written data is processed by the computation memory of U12 and U13 in case computation or averaging is selected with the menu. The DMA transfer starts when ADR/W\_ sent from the TBC Unit goes "H". To start the DMA transfer, pin 19 of the same output port outputs the DMAON signal to turn Q (pin 5) of the flip-flop of U88 "H" and this signal is input to pin 17 of the CPU (V35+) to set the DMA status. The signal is input to pin 19 of the CPU bus buffer of U2 and U3 to cut the data bus between the CPU.

The AEN signal, which is the DMA Transfer Enable signal, is output from pin 12 of U53 of the output port, and DMAAK (acknowledge signal) which is the transfer clock is output from pin 6 of U79. This signal is generated in U79 with R/W\_ (pin 59), DMAAKO\_ and MREQ\_ which are output from V35+. DMARST\_

## CIRCUIT DESCRIPTION

which is the DMA transfer refresh and reset signal, is output from pin 2 of U52 of the output port. The DMA transfer occurs simultaneously on 2 channels. First, CH1 or CH2 is selected by DMA12\_ output from pin 11 of U80, then CH3 or CH4 is selected by DMA34\_ output from pin 8 of U80, and DMA transfer is started. The transfer data for odd channels is output at D0 to D7 and that for even channels is output at D8 to D15.

The data transferred from the ACQ memory to the data memory is sent to the display memory after having been processed. The display memory is provided by U21 and U22, each of which is an 8K byte memory. U21 stores the data and reference memory contents for CH1 and CH3 and U22 stores the data and reference memory contents of CH2 and CH4. These memories are read by 2K words per channel and 1 MHz per data so, everything can be read in a period of about 20 ms including the R/O period. The read-out timing is as shown below.

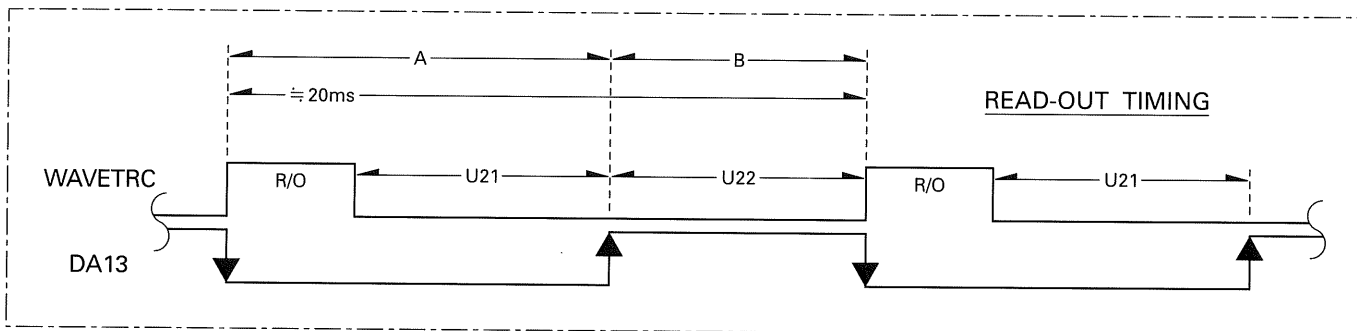

The write timing is set so that data is written in U22 in period A and in U21 in period B. In the X-Y display mode, data is written in the X-display memory of U19 in the R/O period of A. When signal DA13 for starting the write operation is output from pin 13 of the address counter of U38 and input to pins 33 and 40 of V35+, interrupt takes place and data is written in the respective memory. Bus buffer U16 is used with display memory U21, buffer U17 with display memory U22 and buffer U18 with the X-display memory. When writing in the display memory, the buffer to be used is selected using MEM1G of U91, MEM2G of U92 or MEM3G of U93 in the decoder circuit and R/W\_ output from the CPU.

U37 and U38 are the address counter for the display memories. The clock for this counter is counted by 2 MHz sent from the TBC Unit. The display memory address counter formed by U37 and U38 is activated by the WAVETRG signal from the R/O Unit (refer to the read-out timing chart above). The WAVETRG signal is connected to pins 2 and 12 (CL terminals) of U37 and U38 and "H" state of this signal indicates the R/O period in which the counter is cleared (address 0). When the WAVETRG signal goes "L", the counter is activated based on the 2 MHz CLK connected to pin 1 of U37. The read-out address output from this counter is sent to the read/write switching circuit. This switching circuit is composed of U23 to U33, where U23 to U26 are used for switching the U21 (display memory for CH1 and CH3), U27 to U30 are used for switching the U22 (display memory for CH2 and CH3) and U31 to U33 are used for switching U19 (X-display

memory). The read/write switching signals used respectively by them are DA13\_ from pin 18 of U93 with U21, MEM2 from pin 15 of decoder U92 with U22 and the WAVETRG signal sent from the R/O Unit with U19. With each of these signals, "L" selects the read-out address and "H" selects the write address. The data in display memories U21 and U22 are switched by U39 and U40. These memories are switched by DA13 shown in the chart above; the display memory U21 is selected when DA13 is "L" and the display memory U22 when it is "H", and the selected data is sent to the display memory latch (latch for STO-Y). When the memories of all channels have been read out, DA14 of the display counter causes pin 9 of U81 to output the MOJITRG signal; when this signal is sent to the R/O Unit, the R/O CPU outputs characters.

The circuit for selecting the output ports, communications read signal (ROIN), display memories, etc., is the decoder circuit, which is composed of U50, U74, U78, U79, U80, U82, U83, U84, U86, U90, U91 and U92. U90, U91 and U92 are programmable ICs (GAL). (For the decoder, read the description on the separate sheets.)

The data output from the display memories are selected by U39 and U40, input to the display data latch of U57 and latched by the signal which is generated by U89 using the clock (2 MHz) for the read address counter (pin 8). At this time, the address of the read-out address counter is input to the latch for STO-X of U59 and U61 and latched in the same manner as above. The data of the X-display memory is also latched by the latch for X-Y of U60.

# CIRCUIT DESCRIPTION

The data latched by U57 is input to the D/A converter for STO-Y of U68, then the analog data from U68 is input to pin 5 of U72 and output from pin 7 of U72 (opamp) as STO-Y. The data latched by U59 and U61 are input to D/A converter for STO-X of U69. However, in case the display mode is X-Y, pin 6 of U64 goes "L" so the data to be input to U69 are switched over to the data latched in U60. The analog data output from U69 is input to pin 3 of U72 and output from pin 1 of U72 as STO-X. The order of data output channels are as shown in the figure below, and the corresponding blanking is provided by the blanking circuit composed of U93, U43, U41 and U42. (Refer to the diagram below as well as Fig. 5.)

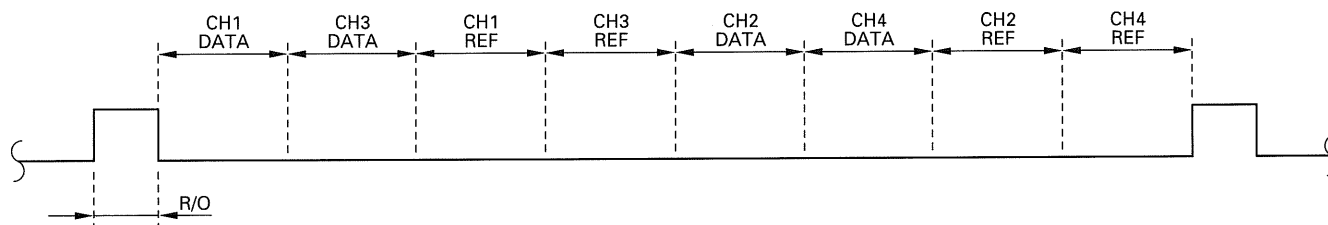


Fig. 5

The blanking circuit provides two kinds of blanking operations, the channel blanking applied when a channel is selected and the GRG blanking applied after reading every single data.

For the channel blanking operation, the CPU sets the condition in the latch of U42 according to the V-MODE setting on the panel and the REF memory setting. The set condition is input to U41 and, using the data set with the display counter signals of DA11 and DA12 input to pins 2 and 14 of U41 as the storage display gate, output from U41 as STB13 (pin 7) for CH1 and CH3 and as STB24 (pin 9) for CH2 and CH4. The Enable signals for CH1/3 and CH2/4 are based on signals DA13 and DA13\_ which are input to pins 1 and 15 of U41. These signals are input to U93 (GAL), processed logically with signals such as WAVETR, DA11 and DA12, and output as STBDAT (pin 13) and STBREF (pin 14). Position select signals DA112 and DA121, which are synchronized with the signals above, are output from pins 16 and 17 of U93 and input respectively to pins 10 and 9 of U66 and U67. At U66, the V position is selected from the V position signals CH1 to CH4, which are input to pins 12, 15, 14 and 11 based on DA13 and DA112 and output the V-POS1 voltage of the selected channel from pin 13 of U66. The output voltage is input to pin 12 of U65, where it is switched between the data memory position and reference memory position based on DA12 and DA121. The reference position voltage uses the trace separation potentiometer, and the voltage is input to pin 13 of U65 as TSEPA. After the position has been selected, the voltage is output from pin 13 as the YOFT signal, input to the amp for STO-Y (pin 6 of U72) and offset is applied there.

When the display channel is switched over, pin 13 of U43 outputs STOBLK to apply blanking for channel switching.

For the GRG blanking, pin 5 of U43 outputs the GRGBLK signal so that blanking is applied after having read every single data. This signal is output in synchronism with the read clock.

The compression blanking is possible when the memory mode

is 16K HOLD. When the compression is 1/10, the length of the trace on the CRT becomes 8 div. so a blanking is applied for the remaining 2 div. The compression blanking circuit is composed of U75, U81, U83 and U85. When the condition as described above occurs, the CMPBLK signal output from pin 12 of U54 of the output port goes "H" to activate the compression blanking circuit. In this operation, when the display counter has counted 1683 counts, pin 5 of U85 goes "H", this signal is input to pin 5 of U93 as the DFF signal and causes blanking.

The analog pen output circuit is composed of U86, latches U62, U63 and U64, D/A converters U70 and U71 and opamp U73. All of the data sets are software-controlled, and data is sent to the latches according to the data read-out rate set by the menu. U62 latches the STO-Y data and U63 and U64 latch the STO-X data. The latched data are sent to the D/A converters, the signal output from U70 (pin 18) is input to pin 3 of U73 and output from its pin 1 as the STPY signal. The signal output from U71 (pin 18) is input to pin 5 of U73 and output from its pin 7 as the STPX signal.

The communications with the R/O Unit occurs when a panel setting is changed, etc. The communications are serial in both directions and the data length is 16 bits. When a command is communicated from the R/O Unit to the Storage CPU, 16 data are transferred to U55 and U56 by ZD (Data) and ZSC (Shift Clock). When these 16 data have been prepared in U55 and U56, ZLC (Latch Clock) comes, making the Storage CPU possible to transmit data towards the data bus. This signal is also input to CK (pin 11) of U85 (F-F), turning Q\_ (pin 8) of U85 "L", which is input to NMI (pin 30) of the CPU to cause priority interrupt processing. At the same time, U85 (pin 9) sends the StorageRDY signal to R/O Unit to inform it that the NMI processing is taking place. When the NMI processing starts, the CPU first reads the data prepared in U55 and U56. The data is read by turning OE (pin 13) of U55 and U56 "L" using ROIN\_ of U50 (pin 10) of the decoder



# CIRCUIT DESCRIPTION

circuit. When the data has been read, the port of pin 27 of V35+ outputs the NMI end signal. When this signal is input to pin 13 of U85 and this flip-flop is reset, the NMI processing completes and the stand-by for the next communication starts.

Inversely, in case of command communication from the Storage CPU to the R/O Unit, serial transfer from output ports YD, YSC and YLC (pins 9, 6 and 5) of U54 to the R/O Unit occurs. YD transfers the data, YSC transfers the shift CLK and YLC transfers the latch CLK in the same way as above.

The output ports mentioned above are composed with U52, U53 and U54. ADDCNTLD\_ and DLYCNTLD\_ which are sent to the TBC Unit are also output from the output ports of U53. The data of these output ports are latched by decoder U50.

Additionally, there are GP-IB I/O ports of U51. These ports are used to exchange data with GP-IB IC uPD7210 in the GP-IB Unit (X79-1120-00) and read the status of the DIP SW on the rear panel. The DIP SW status is sent to A1 to A8 of U51 when GPSW\_ at pin 12 of U52 goes "L". This signal is also sent through U83 and input to pin 19 of U51 to enable it. Then, the GDIR signal at pin 1 of U91 goes "H" to make this IC input ports and the data is read. To exchange data with uPD7210, the GPWS\_ and GPRD\_ signals output from U91 writes data in or read it from uPD7210, and the GDIR signal mentioned above is switched in synchronism with these signals. The Enable signal for this operation is GPSEL\_ at pin 13 of U51. According to it, the GD-IR signal at pin 1 is set to "H" when the IC is input ports and "L" when it is output ports. The set also has the RS-232C interface, which is controlled by signals from V35+. The control signals are RTS0 at pin 66 of V35+, RXD0 at its pin 10, CTS0\_ at its pin 12 and TXD0 at its pin 13.

## R/O Unit (X77-1670-0X)

The R/O Unit uses 8-bit general-purpose CPU Z80B to control the horizontal, vertical, storage and panel operations and output characters on the CRT. The R/O Unit can be divided roughly into the analog voltage controller block, input/output port block, switch input block, encoder input block, clock block, TV counter block and the CRT controller block.

There are four kinds of clocks used as the basis of IC operation timings, that are the main clock, R/O clock, AH clock and jitter clock.

The main clock is generated by the oscillator composed of an inverter (U96) and 6M ceralock (X1) and supplied to the CPU (Z80B) of U1.

The R/O clock is generated by the oscillator composed of an inverter (U96) and 4M ceralock (X2), used as the CRT display master clock and used to generate the ROREQ, ROUBL, ROBLK and DOT count signals.

The AH clock is generated by U28 and used as the free-running clock for analog hold operation.

The jitter clock is generated by U26 and used to vary the character interrupt period during realtime sweeping.

All of the information changes from switches and encoders, that are necessary for the CRT display information, and communications with the clock and Storage Unit are transmitted to the CPU by means of interrupt.

When a panel SW is pressed, one of D0 to D7 of U77 which are connected as the data bus for switch data goes "L" and pin 9 of U80 outputs the triggering pulse to activate the timer of U28. In about 2 ms when the influence of key chattering has disappeared, pin 2 of U75 goes "L" at the same time as the negative going of the time output, informing the CPU of the change in the SW status. When the CPU is interrupted, it selects the line with serial transfer using U61 (SSC, SLC) and U62 (SD), reads column data from U55 and determines the condition of the SW matrix.

The rotary encoder, which is used for switching between volts/div and sweep time, has two outputs (phase A, phase B). The timing of phases A and B is as shown in Fig. 6.

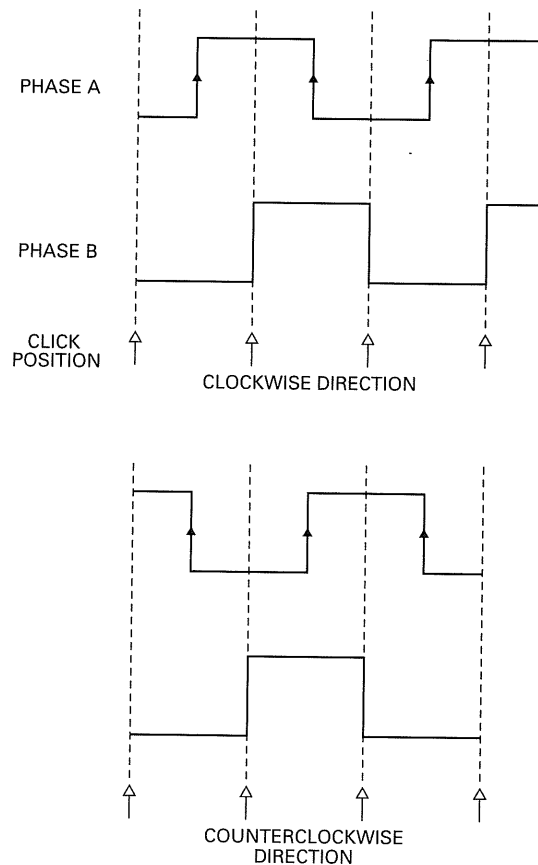


Fig. 6

# CIRCUIT DESCRIPTION

For example, when CH 1 volts/div rotary encoder is used, the outputs of phases A and B are input to the Schmitt circuit of U67 to remove chattering and shape the waveform. When phase A changes, pin 6 of U68 outputs a triggering pulse to turn pin 6 of U73 "L" and thereby inform the CPU of the change in the rotary encoder. The CPU determines the rotation direction from the output from pin 3 of U68. If the direction is clockwise, the output is "H" at the moment it is interrupted. If it is counterclockwise, the output is "L" at the moment it is interrupted.

Even when the power is OFF, U7 is backed up by lithium battery B1 and the 32.768 KHz basic clock generated by X'tal oscillator X3 is also operated. When the power is turned ON, IRQ goes "L" at a certain interval and interrupts the CPU to inform it of the change in time. The CPU updates the calendar on the CRT screen according to it.

The communication from the Storage Unit is handled by U64 and U65 and data is sent 16 bits by 16 bits.

When the latch signal from the Storage Unit is input, Q of U76 goes "L" and the CPU is interrupted.

The analog voltage block can be divided into input section and output section.

The voltages input through VRs are 1VAR to 4VAR, 1POSI to 4POSI (A/B), ^REF (A/B), TRIG LEVEL, EQVREF, SWEEP VAR, T-SEP, H-POS and H-FINE. These VR voltages are connected to U20, U21 and U22, selected by U38 and U39, compared in U25 with the D/A output voltages from U10, U59 and U60, and quantized. D/A converter U10 and comparator U25 form a simulated approximating A/D converter circuit, which converts the VR voltages into 12-bit data. The 12-bit data after conversion are computed and written in their respective addresses in RAM U6. To write data U41 to U43 connect the bus of U6 with the CPU.

The signals for latching the address setting and output data of the analog hold data RAM (U6) and for selecting the output analog switches are generated by the about 25 kHz clock of U28 and counter U50. The data of the specified address is latched as 12-bit data, the lower 8 bits by U44 and the higher 4 bits by U45, and output to D/A converter U11 for D/A conversion. U16 to U19 are analog switches, and the D/A converter signal is output from the IC pin selected by AC1 to AC5. The output has 32 channels, the voltage of each of these channels is held by an opamp and CR and output through a resistor.

U51, U52, U53, U54, U55, U64 and U65 are the input ports. The signals are decoded by U9 and U57 and output from the IC to the data bus. U51 is used to determine the rotation direction at the time of encoder interrupt and is "H" with clockwise rotation. Bits 0 to 3 of U52 are used for probe detection, with "L" indicating a 1:10 probe. Bit 4 of U52 goes "H" when the data sent to the Storage Unit has not been received.

U53 is used to determine the cause of interrupt.

Bit 0 of U54 is used for footswitch detection. It goes "H" when

the footswitch is pressed ON and, even after the footswitch is switched OFF, monostable multivibrator U88 holds the "H" status for more about 20 ms. Bit 1 is used for automatic detection of TV signal and goes "H" when PAL signal is input during TV triggering. Bit 2 is the voltage comparator output and connected to pin 7 of U25. Bit 3 goes "H" when the single sweep is ready. Bit 4 goes "H" when write in analog hold RAM (U6) is inhibited. Bit 5 is also used for automatic detection of TV signal and goes "L" when interlaced signal is input during TV triggering. Bit 6 is the battery monitor terminal going "H" in case of abnormal voltage. Bit 7 goes "H" when the communication is inhibited for the Storage Unit.

U55 reads the column data of the SW.

U64 and U65 converts serial data communicated from the Storage Unit into 16-bit parallel data.

U39, U59, U60, U61, U62 and U63 are the output ports. U39 selects the analog voltage input, U59 and U60 latch the data of the D/A converter (U10), U61 and U62 generates the data, shift clock and latch clock for the serial transfers of the Vertical, Horizontal, Switch, LED and Storage Units, and U62 also generates the buzzer output signal. Bit 0 of U63 causes character interrupt, in realtime with "H" and from storage with "L". Bit 1 clears the waveform display when it goes "L" and bit 2 clears the realtime waveforms by forcing ROBLK to "L". Bits 3 and 4 select the bank of the backup ROM (U4), and bit 5 selects the bank of the program ROM.

U9, U38, U40, U56, U57, U58 and U79 form the decoder circuit and U9 uses PAL. The PAL is provided with a circuit configuration which allows it to decode the input ports, output ports, clock, ROM, RAM and dual-port RAM. U56, U57 and U58 are selected by U9 and generates the decoder output according to the address.

The TV counter is composed of U8 and U66, and is used to count the line in TV operation, select the TV signal and select the buzzer frequency.

U4 is an SRAM. Its capacity of 32K bytes is divided into 4 banks to use 1 bank for storage of system data and 3 banks for storage of program step data. The SRAM is backed up by battery B1 even while the power is OFF; when power is turned OFF, U23 switches it to the back-up mode.

U2 is the program ROM with a capacity of 64K bytes. It is used by dividing the capacity into 32K x 2.

U5 is the dual-port RAM for CRT display. It is divided into the CRT display character area with 32 columns x 16 lines x 1 byte, the cursor area with 32 columns x 4 lines x 1 byte and the system stack area. The display on the CRT screen is performed automatically when a numeral value in ASCII code is input in the corresponding address.

# CIRCUIT DESCRIPTION


The characters are displayed asynchronously with the CPU. RAM U5 outputs data (in ASCII codes) corresponding to the address generated by the character counter formed by U83, U84a and U90a.

Character generator U3 generates the dot position data based on RAM U5 and dot counter U82.

Character generator U3 contains character data with basically 8 x 16-dot configuration, where 3 bits from D0 to D2 are the X-axis data, 4 bit from D3 to D6 are the Y-axis data and the bit of D7 is the character end control bit. The position data output from U3, U83 and U84 is converted into analog signal by D/A converters U12 and U13, sent through the analog switch of U14 and U15 and buffer amp U29a and U29b, and output as the R/O-X and R/O-Y character signals.

The analog switch of U14 and U15 switches between the character signal, cursor signal and storage waveform signal.

The character dot display on the CRT is controlled by the ROUBL signal, ROBLK signal and ROREQ signal which are output from pin 3 of U92, pin 7 of U95 and pin 12 of U95 respectively. The

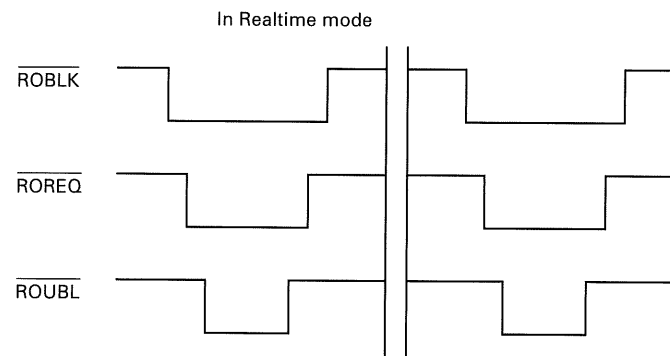


ROBLK signal clears the realtime waveform when it is "L". The ROREQ signal switches between the realtime waveform and read-out data and the read-out data is selected when it is "L". The ROUBL signal displays the dot display of read-out data when it is "L".

These signals vary depending on the display modes and the timings are as shown in Fig. 2. In realtime display mode, the realtime waveform is cleared by the ROBLK signal and character interrupt occurs every 2 to 10  $\mu$ s.

In the storage display mode, the R/O characters and the storage waveforms are displayed alternately. When the R/O characters have been displayed for 2 screens, pin 8 of U48 goes "L", pin 11 of U72 outputs the triggering pulse to activate the timer of U27, and "H" is displayed for about 30  $\mu$ s to leave the time for switching of the analog switch of U14 and U15. After switching by U14 and U15, the WAVETRG

G signal goes "L", the Storage Unit sends the storage waveform signal and the storage waveform display starts. After the storage waveform display, the MOJITRG signal clears the flip-flop of U48 and the R/O character display starts again.

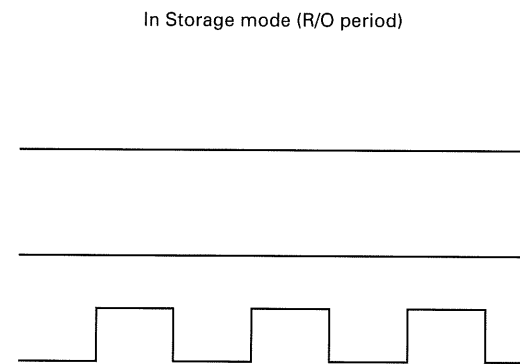

## High Voltage Unit (X68-1590-00)

This unit has the purpose of generating the high voltage for driving the CRT.

The unblanking signal applied from the H Unit is modulated with the 300 Vp-p sine wave which is output from the HV block. For the high voltage generated in the HV Unit, the control for maintaining the voltage constant is applied by Q1, Q2 and U1. The modulated wave obtained from the unblanking signal is demodulated, it is DC regenerated with this high DC voltage so that the demodulated unblanking signal becomes a HV signal. This circuit incorporates an auto focusing circuit formed with Q3 and Q4 so that the focusing is not changed when the INTEN control is adjusted. The voltage for use in acceleration in the subsequent stage is also generated in the HV block.

## GP-IB Unit (X79-1120-00)

This unit incorporates the RS-232C and GP-IB interface circuits which are used when a computer and/or plotter is connected externally to the oscilloscope.

The communications through RS-232C uses buffer U101. The circuit for communications through GP-IB is composed of buffers U102 and U103, GP-IB controller U105 and address setting dip switch S101.


These interfaces are in compliance with the HP-GL and IEEE488 respectively.

## VR Unit (X81-2900-00)


This unit is in charge of the INTEN adjustment, FOCUS ASTIG adjustment, trace rotation adjustment, illumination adjustment and the CAL signal output.

The CAL signal to be output is generated with the 1 kHz, 1 Vp-p square wave generator and U1.

# BLOCK DIAGRAM

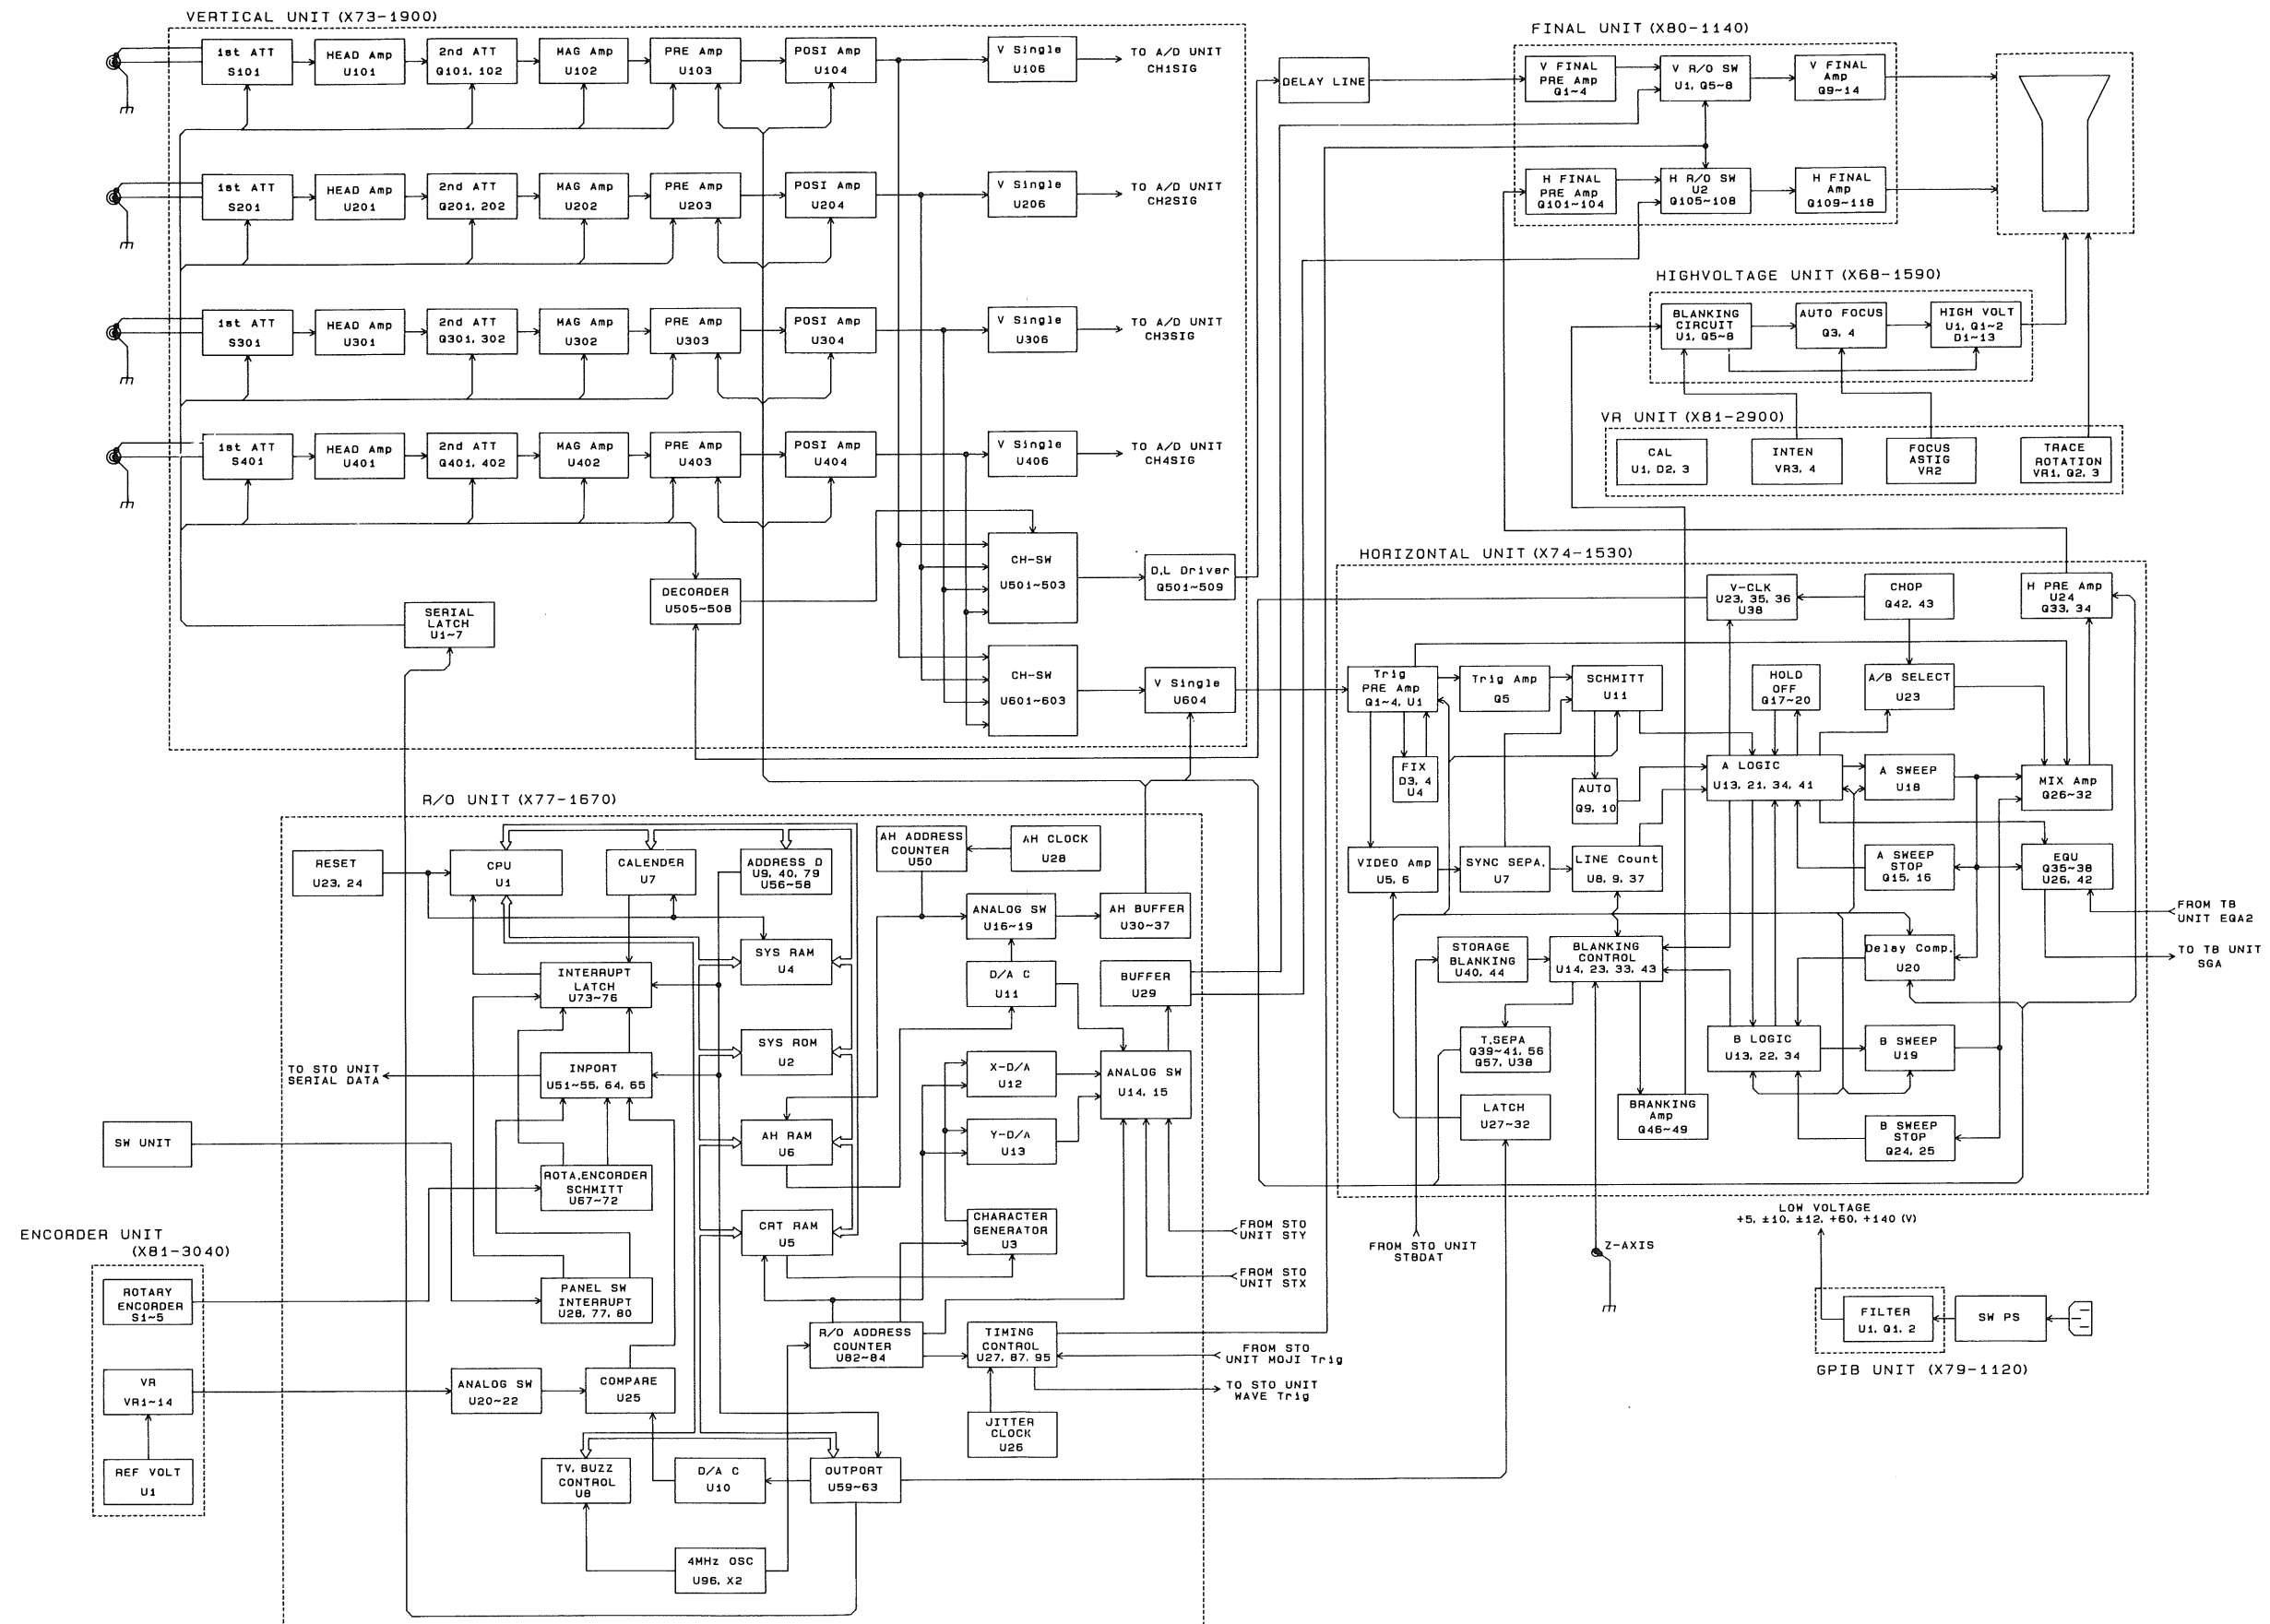


# BLOCK DIAGRAM

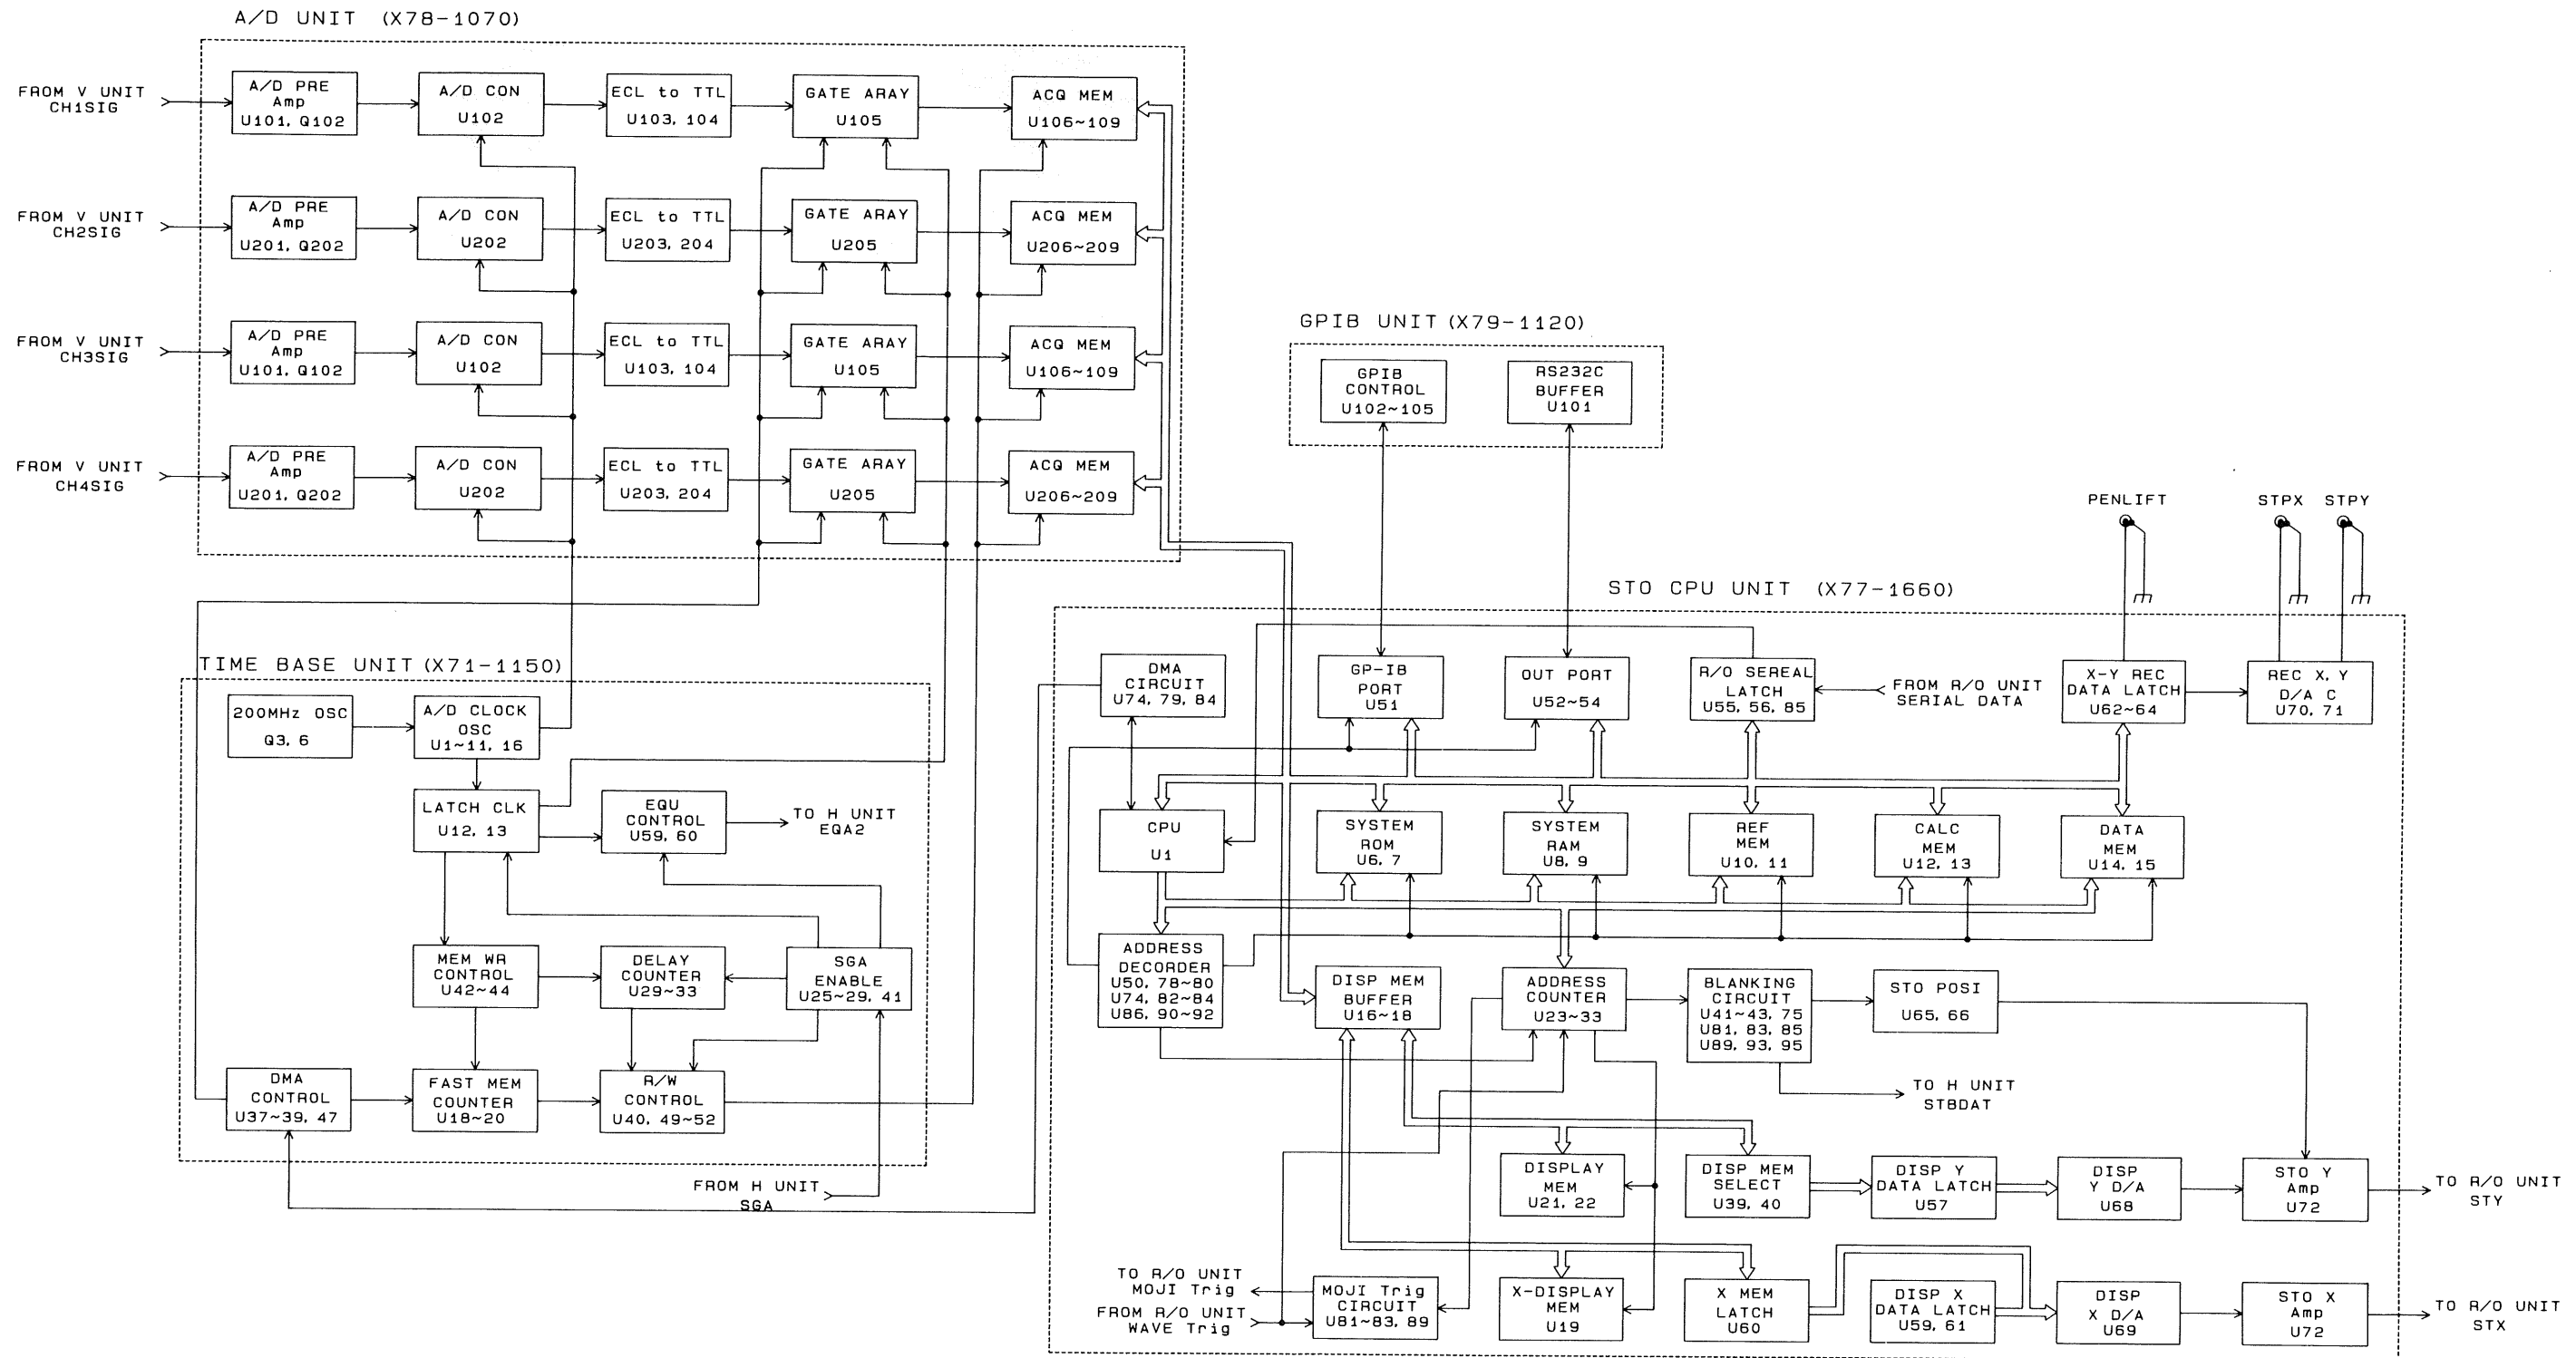

# ADJUSTMENT

## Operation before adjustment (from the power-off state)

- ① Turn the power on pressing **MENU NEXT** and **F5** simultaneously.
- ② Press **MENU NEXT** once.

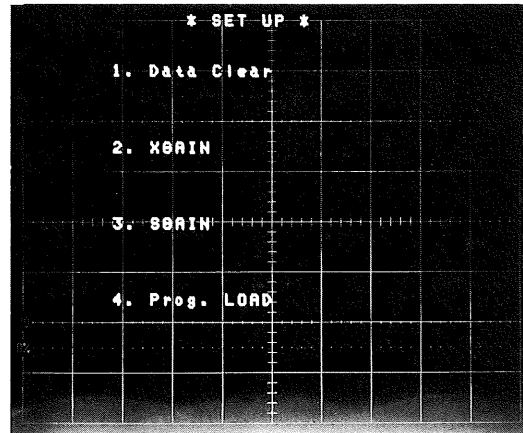

Changes to the DISPLAY mode.

- ③ Press **F1** once. (1. Data Clear)  
At this point, the monitor is kept unchanged.
- ④ Press **MENU NEXT** twice, and the mode changes to normal.

The procedures above are not necessary for the second adjustment and on.


However, when the power has been interrupted before performing adjustment operation again, only ① of the procedures above must be performed.

Now, let's start the adjustment operation.


## PROGRAM MODE

Adjust each center using the following commands:


- ① Turn **MENU NEXT** on.

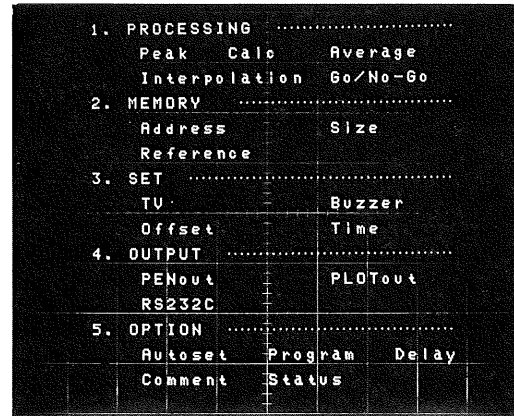


- ② Turn **F5** on. OPTION mode

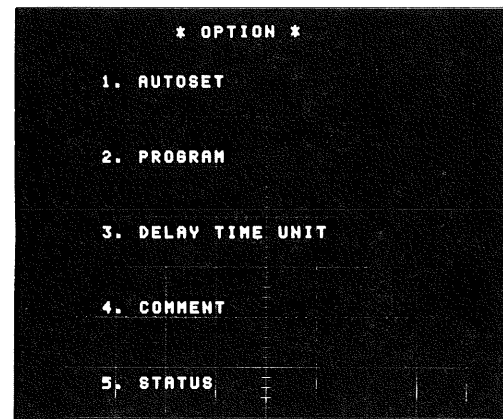

- ③ Turn **F2** on. PROGRAM mode
- ④ Turn **F1** on. RUN mode

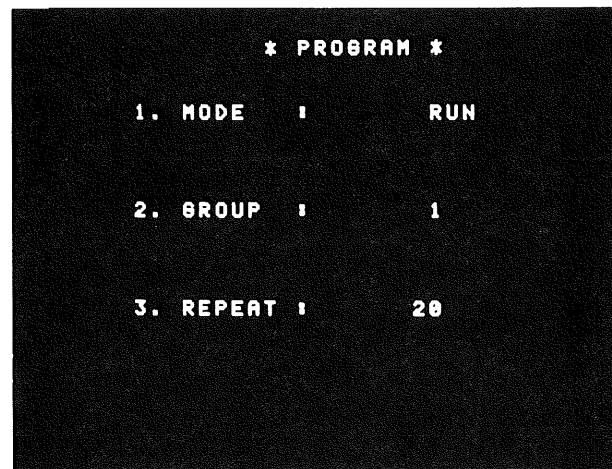

- ⑤ Turn **MENU NEXT** on by pressing it once.

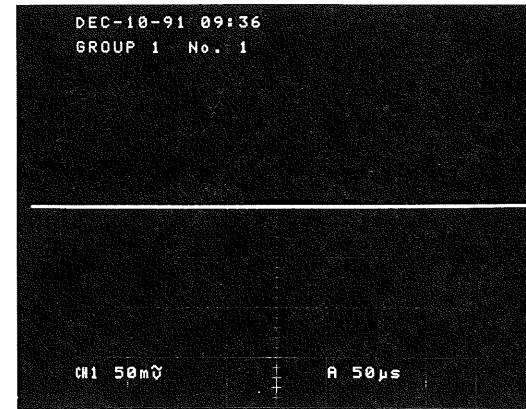

Center adjustment is available in the state of ⑤.

- ⑥ Adjust each adjustment VR following the procedures for each item so that each item is in the center position of its scale.

\* While performing the adjustment operation, make sure not to turn the VRs on the panel related to the corresponding adjustment VR.

Example: While adjusting the V.POSI center, never turn the POSI VRs for the channels CH1 to CH4 on the panel.


\* When any related VR is turned, the center position is canceled and it does not function as an electric center. If this is the case, perform the steps ① to ④ gain and press **F1** three times for cancellation.  
RUN → EDIT → FF → RUN

Then perform the step ⑤.


\* From now on, perform the same procedures also when an error is made in operation.

### After the adjustment operation is completed,

- ⑦ Perform the steps ① to ④ and turn the RUN mode off. Press **F1** twice in the step ④.

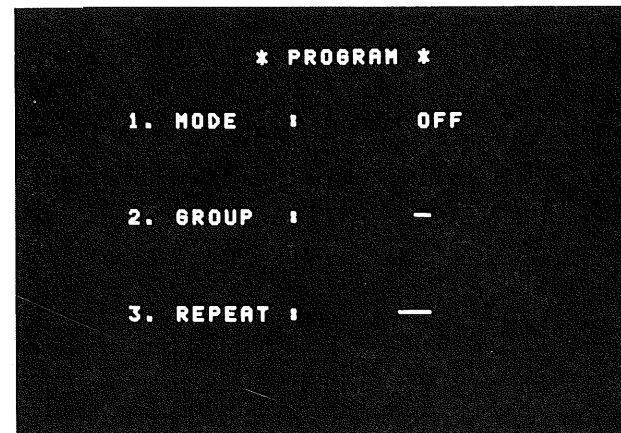

- ⑧ Press **MENU NEXT** three times to change the mode back to normal.

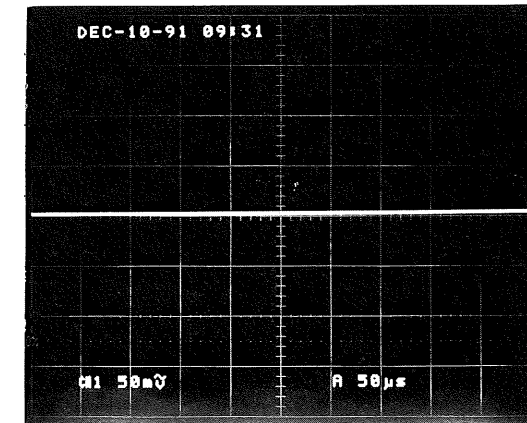

\* Successful when the display has changed as shown in the photo above. However, the range varies depending on each condition.

GROUP 1 No.1 disappears.

To these adjustment procedures, an indication of "PROGRAM mode" is specified in the adjustment.







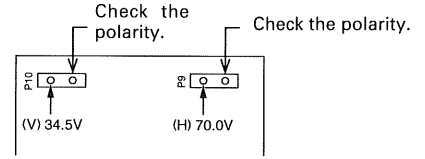
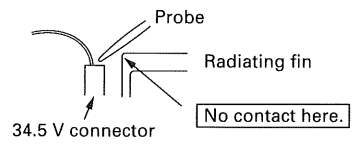
Items to be adjusted in PROGRAM mode:

1. V.POSI center (CH1 to CH4)
2. FIX
3. TRIG level center
4. DC. CUP (CH1)
5. A.SWEEP POSI 1 ms
6. MAG center 1 ms
7. X-POSI
8. STO V.POSI center (CH1 to CH4)

However, the items 2 to 4 are described as normal adjustment procedures.


They also can be adjusted in PROGRAM mode.

# ADJUSTMENT


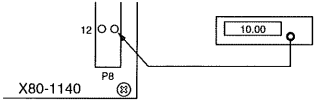
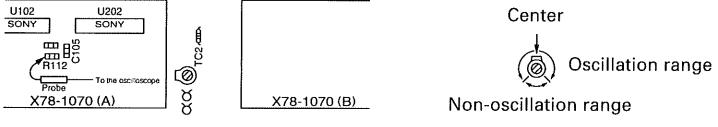
Item	Adjustment	PCB	Procedure
+10.00 V	VR1	X79-1200	<p>Apply the probe to No.12 of P8 of X80-1140 and adjust the voltage so that it falls between 10.00 and 10.05 V.</p> 
100 MHz oscillation (STO mode SWEEP TIME: 0.1 μs Luminescent line center)	TC2	X71-1150	<p>Apply the probe to R112 and adjust to the center of the TC2 oscillation range.</p> 
INTENSITY	VR1	X68-1590	<div style="border: 1px solid black; padding: 5px; width: fit-content;">             CH1, CH2, VOLTS: 20 mV, VARI: min.              20 MHz Bw: ON, [CH2]: ON              SOURCE: CH1, AC-DC: GND           </div> <ol style="list-style-type: none"> <li>Select X-Y for HORIZ mode.</li> <li>Set INTEN VR so that it rotates between .</li> <li>Adjust so that deletion is performed in the position of 9:30. Adjust so that the spot comes to the center of the screen. </li> </ol>
FOCUS Center	VR2	X68-1590	<ol style="list-style-type: none"> <li>In the state of the step '40 MHz oscillation', adjust ASTIG (PULL) to minimize the size of the spot.</li> <li>Set FOCUS VR so that it rotates between , then set it to the mechanical center position.</li> <li>Adjust VR2 so that the spot is minimized. </li> </ol>
V. Output Bias Voltage H. Output Bias Voltage	VR201 (34.5 V) VR102 (70.0 V)	X80-1140	<ol style="list-style-type: none"> <li>In the state of the step 'Intensity' (with the spot in the center of the screen), turn R/O INTEN off. (INTEN is between 12:00 and 1:00 positions.)</li> <li>Adjust each VR so that the voltage is those indicated by (V) and (H) respectively.</li> </ol>  <p>NOTE) Take care that the radiating fin does not come in contact with the probe during voltage adjustment.</p>  <p>(* The value of (H) has been changed from 67.5 to 70.0 V because the voltage is lowered due to time drift while contained in a case.)</p>

# ADJUSTMENT

Step 'R/O Offset' VR Setting (Example) Set the display for CH1. R/O INTEN: ON INTEN: Arbitrary




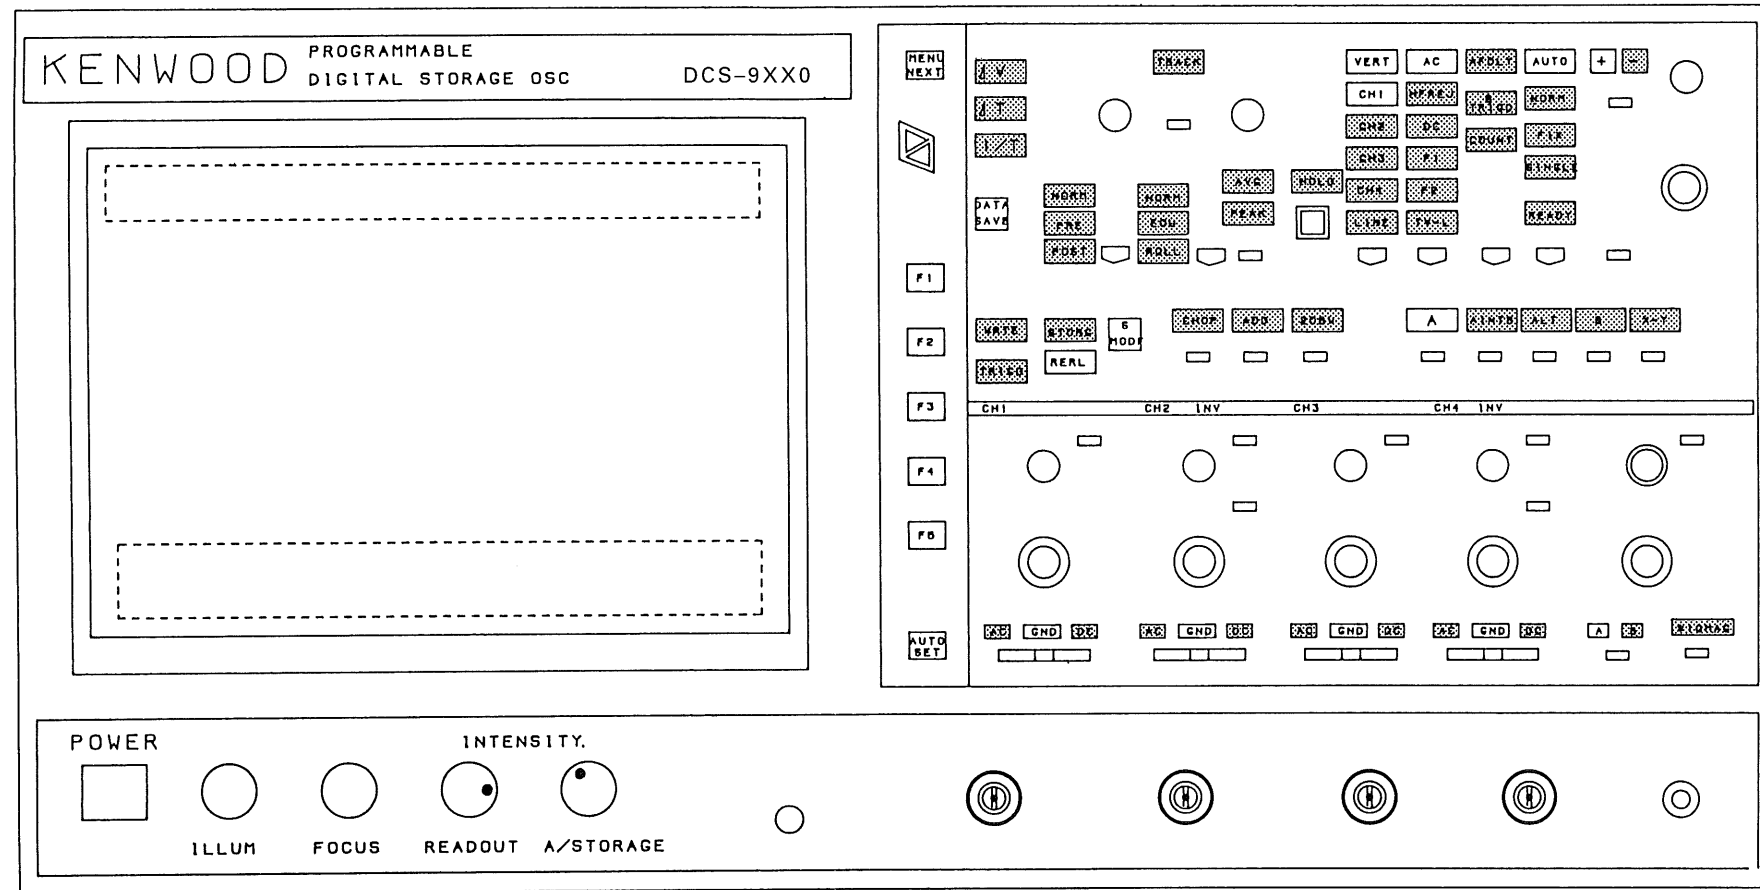


Item		Adjustment	PCB	Procedure
R/O Offset	Y	VR3 (POS) VR4 (Gain)	X80-1140	<p>Set the VRs above.</p> <p>① Turn <math>\Delta V</math> on. <span style="float: right;">Cursor VRs</span></p> <p>② Rotate each cursor VR fully to its maximum side. <span style="float: right;">(○ ○)</span></p> <p>③ Adjust VRs 3 and 4 so that each line cursor corresponds to the maximum position of each VR in the vertical (Y) <math>\updownarrow</math> direction.</p> <p>④ Turn <math>\Delta T</math> on. <span style="float: right;">Cursor VRs</span></p> <p>⑤ Rotate each cursor VR fully to its maximum side. <span style="float: right;">(○ ○)</span></p> <p>⑥ Adjust VRs 103 and 101 so that each line cursor corresponds to the maximum position of each VR in the horizontal (X) <math>\leftrightarrow</math> direction.</p> <p>⑦ Turn <math>\Delta T</math> off by pressing it twice.</p>
	X	VR103 (POS) VR101 (Gain)		
STO X-Gain		VR2	X77-1660	<p>① Turn <b>SCOPE MODE</b> on. (STORAGE action)</p> <p>② Set SWEEP TIME to 1 ms.</p> <p>③ Input a marker signal of 1 ms to CH1.</p> <p>④ Adjust so that the peaks of the marker waveforms are correspondent to each division.</p>











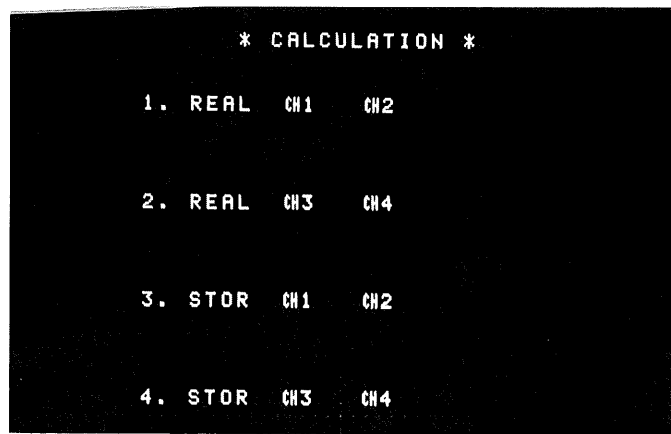
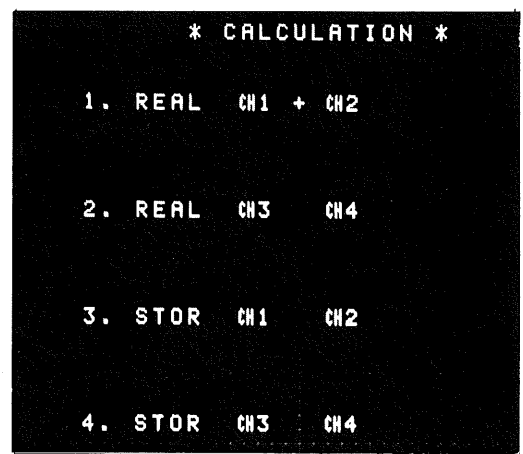
# ADJUSTMENT

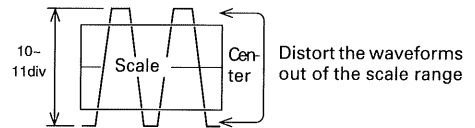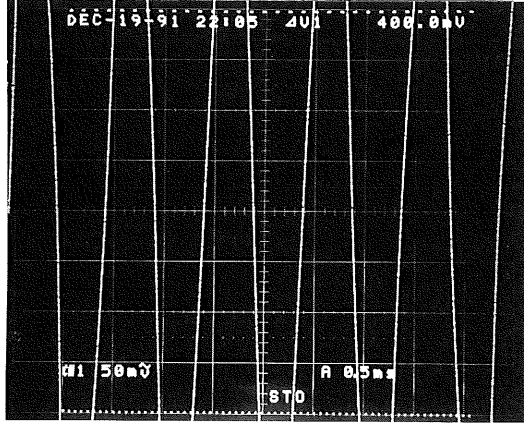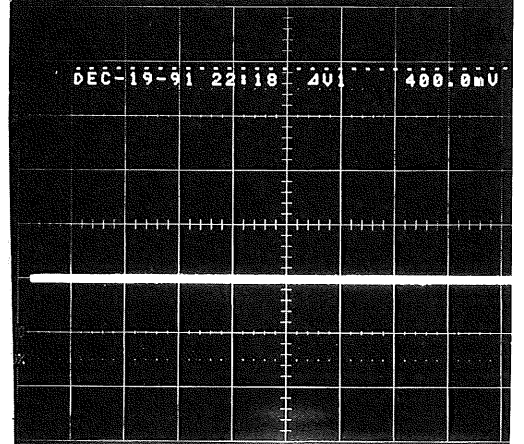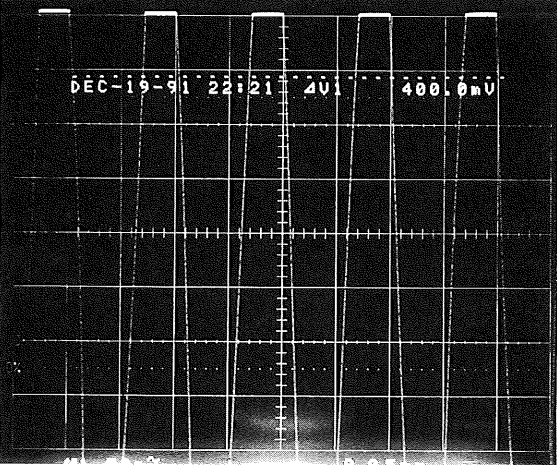Item	Adjustment	PCB	Procedure
<p>STO Y-Gain</p> <p>* Adjustment is performed by a program using pattern waveforms. (The program has already been provided.)</p>	<p>VR1 (Gain) VR3 (POS)</p>	<p>X77-1660</p>	<ol style="list-style-type: none"> <li>① Turn <b>SCOPE MODE</b> on. (STORAG action)</li> <li>② Turn <b>ΔV</b> on. Locate each line cursor to its maximum position.</li> <li>③ Set the AC-VOLTS of CH1 AC-DC to 20 mV and locate the luminescent line in the center scale using <math>\diamond</math> POS.</li> </ol> <ol style="list-style-type: none"> <li>④ Input a sine wave of 1 kHz <math>\sim</math> and adjust so that the amplitude extends over approx. 15 divisions in the vertical direction <math>\updownarrow</math>. (Input excessively so that the waveform extends out of the scale range.)</li> </ol> <div style="text-align: center; margin: 10px 0;">  <p style="font-size: small;">Distort the waveforms out of the scale range</p> </div> <p>* Never rotate <math>\diamond</math> POS! at this point. If rotated, the center position of the luminescent line will move.</p> <ol style="list-style-type: none"> <li>⑤ Adjust VR3 of X80-1140 described in the step No.7 so that line cursor on the scale is 1.1 div apart from the upper limit of the scale.</li> </ol> <ol style="list-style-type: none"> <li>⑥ Adjust VR1 so that the peaks of the waveform are on the upper limit of the scale.</li> </ol>
			
			 <p style="margin-left: 20px;">1.1 div</p> <p style="margin-left: 20px;">No waveform is displayed for good understanding.</p>
			 <p style="margin-left: 20px;">Align.</p>



# ADJUSTMENT

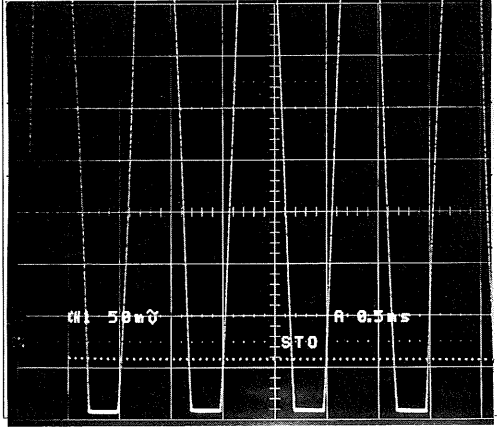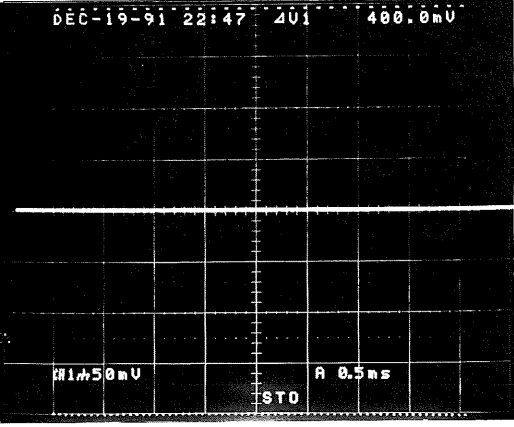Item	Adjustment	PCB	Procedure
STO Y-Gain			<p>⑦ Adjust VR3 so that the waveform is completely symmetrical in the vertical direction.</p>  <p>⑧ Align the line cursor with the division using VR3 of X80-1140. At this point, it is not required to display a waveform on the screen.</p>  <p>⑨ Turn <math>\Delta T</math> off. ⑩ Turn SCOP MODE on and change the mode to REAL.</p> <p style="text-align: right;">Set to 1.1 div using VR3 of X80-1140.</p>
CH1 10kHz Square Wave (REAL) 10kHz 	VR101 TC103	X73-1900	<div style="border: 1px solid black; padding: 2px; width: fit-content;">             VOLTS: 10 mV AC-DC: AC              SWEEP TIME: 20 <math>\mu</math>s           </div> <p>① Input a square wave of 10 kHz <math>\square</math> to CH1 and adjust so that the amplitude extends over 6 divisions. ② Shape the leading edge of the waveform.</p>  <p>Procedure: REAL 10 kHz <math>\rightarrow</math> STO 10 kHz <math>\rightarrow</math> STO 100 kHz As there is a certain relationship between 10 kHz adjustment and 100 kHz adjustment, make sure to check the values several times.</p>
CH2 10 kHz Square Wave	VR201 TC203	X73-1900	Adjust in the same way as for CH1.
CH3 10 kHz Square Wave	VR301 TC303	X73-1900	Adjust in the same way as for CH1.
CH4 10 kHz Square Wave	VR401 TC403	X73-1900	Adjust in the same way as for CH1.
CH1 ATT Balance	VR102 (1 mV to 2 mV) VR104 (2 mV to 5 mV)	X73-1900	<div style="border: 1px solid black; padding: 2px; width: fit-content;">             VOLTS: 2 mV AC-DC: GND              VARI: CAL (Turn 20 MHzB/W on as required.)           </div> <p>① For 1 to 2 mV, perform adjustment when the voltage is 1 mV with 2 mV as reference. ② For 2 to 5 mV, perform adjustment when the voltage is 2 mV with 5 mV as reference.</p>




# ADJUSTMENT

Item	Adjustment	PCB	Procedure
CH1 VARI Balance	VR107	X73-1900	<div style="border: 1px solid black; display: inline-block; padding: 2px;">VOLTS: 10 mV AC-DC: GND</div> Perform adjustment when VARI VR is set to MAX (i.e. CAL) with MIN as reference. <div style="float: right; text-align: center;">  </div>
CH2 ATT Balance	VR202 (1 mV to 2 mV) VR204 (2 mV to 5 mV)	X73-1900	① For 1 to 2 mV, perform adjustment when the voltage is 1 mV with 2 mV as reference. ② For 2 to 5 mV, perform adjustment when the voltage is 2 mV with 5 mV as reference.
CH2 INV Balance ↑ As VARI BAL is also dislocated, adjust it again.	VR206	X73-1900	Adjust so that the luminescent line does not move even when the INV switch is turned on and off.
CH2 VARI Balance	VR207	X73-1900	Perform adjustment when VARI VR is set to MAX (i.e. CAL) with MIN as reference. <div style="float: right; text-align: center;">  </div>
CH3 ATT Balance	VR302 (1 mV to 2 mV) VR304 (2 mV to 5 mV)	X73-1900	Adjust in the same way as for CH1.
CH3 VARI Balance	VR307	X73-1900	Adjust in the same way as for CH1.
CH4 ATT Balance	VR402 (1 mV to 2 mV) VR404 (2 mV to 5 mV)	X73-1900	Adjust in the same way as for CH2.
CH4 INV Balance ↑ As VARI BAL is also dislocated, adjust it again.	VR406	X73-1900	Adjust in the same way as for CH2.
CH4 VARI Balance	VR407	X73-1900	Adjust in the same way as for CH2.
CH1/CH2 ADD Center	VR501	X73-1900	① Press <b>MENU NEXT</b> once. ② Press <b>F1</b> once. ③ Press <b>F2</b> once. <div style="margin-top: 20px;">  </div> ④ Press <b>F1</b> once. 1. REAL CH1 + CH2 ↑ + is inserted. <div style="margin-top: 20px;">  </div> ⑤ Press <b>MENU NEXT</b> three times to return to NORMAL. ⑥ Display the luminescent lines for CH1 and CH2. ⑦ Turn <b>ADD</b> on. There are three luminescent lines now. ⑧ Move these three luminescent lines using CH1, CH2 and POSI so that they overlap one another. ⑨ Adjust so that the luminescent lines are in the scale center. ⑩ Turn <b>ADD</b> off.






# ADJUSTMENT

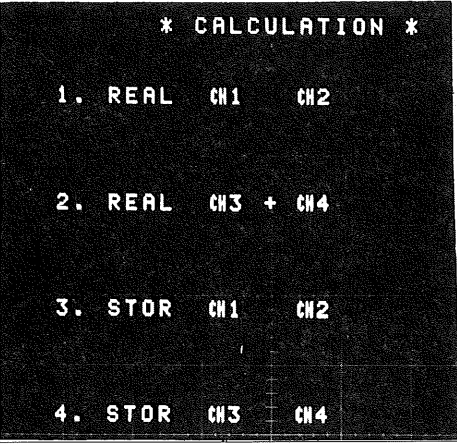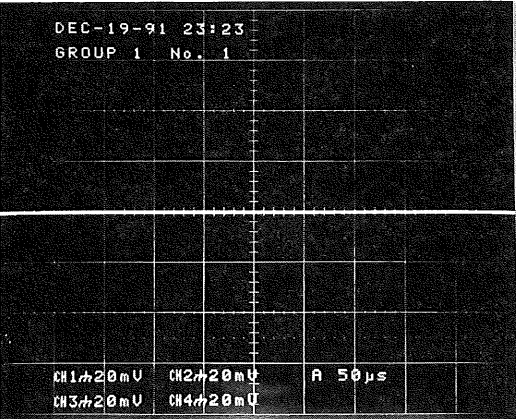Item	Adjustment	PCB	Procedure															
CH3/CH4 ADD Center	VR502	X73-1900	<p>① Press <b>MENU NEXT</b> twice.</p> <p>② Press <b>F1</b> once.</p> <p>③ Press <b>F2</b> once.</p> <p>④ Press <b>F1</b> once. (Delete + for CH1/CH2.)</p> <p>⑤ Press <b>F2</b> once.</p> <p style="margin-left: 20px;">2. REAL CH3 + CH4</p> <p style="margin-left: 40px;">↑</p> <p style="margin-left: 40px;">+ is inserted.</p> <div style="text-align: right; margin-top: 20px;">  </div> <p>⑥ Press <b>MENU NEXT</b> three times to return to NORMAL.</p> <p>⑦ Display the luminescent lines for CH3 and CH4. Turn off <b>CH1</b> and <b>CH2</b> for this step.</p> <p>⑧ Turn <b>ADD</b> on. (If it is already lit on, keep it as it is.) There are three luminescent lines now.</p> <p>⑨ Move these three luminescent lines using CH3, CH4 and POSI so that they overlap one another.</p> <p>⑩ Adjust so that the luminescent lines are in the scale center.</p> <p>⑪ Turn <b>ADD</b> off.</p>															
V.POSI Center ↓ STO V.POSI Center	VR109 (CH1) VR209 (CH2) VR309 (CH3) VR409 (CH4)	X73-1900	<p>① Change the mode to <b>PROGRAM</b>.</p> <p>② Turn on <b>CH1</b>, <b>CH2</b>, <b>CH3</b> and <b>CH4</b>.</p> <p>③ Set VOLTS to 20 mV (CH1 to CH4).</p> <p>④ Set AC-DC to GND (CH1 to CH4).</p> <p>⑤ Adjust so that all the luminescent lines for each channel overlap one another in the scale center.</p> <p>NOTE) Take care not to rotate <math>\diamond</math> POSI before adjustment.</p> <div style="text-align: right; margin-top: 20px;">  </div>															
V.Gain	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td></td> <td>10 mV</td> <td>1 mV</td> </tr> <tr> <td>CH1</td> <td>VR108</td> <td>VR103</td> </tr> <tr> <td>CH2</td> <td>VR208</td> <td>VR203</td> </tr> <tr> <td>CH3</td> <td>VR308</td> <td>VR303</td> </tr> <tr> <td>CH4</td> <td>VR408</td> <td>VR403</td> </tr> </table>		10 mV	1 mV	CH1	VR108	VR103	CH2	VR208	VR203	CH3	VR308	VR303	CH4	VR408	VR403	X73-1900	<p><b>VOLTS: 10 mV, VARI: CAL</b></p> <p>① Input a 50 mV square wave <math>\square</math> of 1 kHz and adjust so that the amplitude extends over 5 divisions.</p> <p>② Change VOLTS to 1 mV. Then input a 5 mV square wave <math>\square</math> and adjust so that the amplitude extends over 5 divisions. Adjust CH1 to CH4 repeating the steps ① and ②.</p>
	10 mV	1 mV																
CH1	VR108	VR103																
CH2	VR208	VR203																
CH3	VR308	VR303																
CH4	VR408	VR403																




# ADJUSTMENT

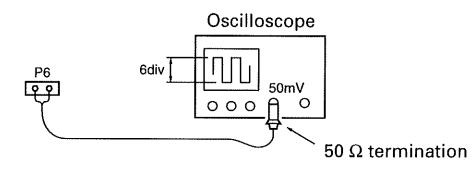Item	Adjustment	PCB	Procedure
VARI Gain	VR1	X73-1900	<div style="border: 1px solid black; padding: 2px; display: inline-block;">VOLTS: 10 mV VARI: CAL</div> <ol style="list-style-type: none"> <li>① Input a 50 mV square wave <math>\square</math> to CH1. Then check to make sure that the amplitude extends over 5 divisions.</li> <li>② Adjust so that the amplitude extends over 1.5 divisions when VARI is set to MIN (○).</li> <li>③ Set VARI to CAL and check to make sure that the amplitude extends over 5 divisions. * If GAIN has been dislocated, adjust it again.</li> <li>④ For CH2 ~ CH4, perform step (11 then check to make sure that the amplitude does not extend over 1.8 divisions or greater when VARI is set to MIN (○).</li> </ol>
CH1 Waveform Shaping	TC105 (0.1 V) TC107 (1 V)	X73-1900	VOLTS 10 mV Ideal waveform ① Adjust so that the waveforms for 0.1 V and 1 V are flat.
CH2 Waveform Shaping	TC205 (0.1 V) TC207 (1 V)	X73-1900	Adjust in the same way as for CH1.
CH3 Waveform Shaping	TC305 (0.1 V) TC307 (1 V)	X73-1900	Adjust in the same way as for CH1.
CH4 Waveform Shaping	TC405 (0.1 V) TC407 (1 V)	X73-1900	Adjust in the same way as for CH1.
CH1 Input Capacity	TC106 (0.1 V) TC108 (1 V)	X73-1900	<ol style="list-style-type: none"> <li>① Measure the capacity when VOLTS is 10 mV.</li> <li>② Adjust so that the capacities for 0.1 V and 1 V are the same as that for 10 mV.</li> </ol>
CH2 Input Capacity	TC206 (0.1 V) TC208 (1 V)	X73-1900	Adjust in the same way as for CH1.
CH3 Input Capacity	TC306 (0.1 V) TC308 (1 V)	X73-1900	Adjust in the same way as for CH1.
CH4 Input Capacity	TC406 (0.1 V) TC408 (1 V)	X73-1900	Adjust in the same way as for CH1.
TRIG AMP 1 kHz Square Wave	VR612 (for all over the range) TC601 (for the high frequency range)	X73-1900	<div style="border: 1px solid black; padding: 2px; display: inline-block;">VOLTS: 10 mV</div> <ol style="list-style-type: none"> <li>① Pull out the P6 connector of X73-1900 and insert a jig.</li> </ol> <div style="text-align: right; margin-top: 10px;">  </div> <ol style="list-style-type: none"> <li>② Input a square wave <math>\square</math> of 1 kHz to CH1 and adjust so that the amplitude extends over 6 divisions on the oscilloscope.</li> <li>③ Adjust so that the waveforms look well-proportioned. (Waveform shaping)</li> </ol>
TRIG AMP 1 MHz Square Wave (F characteristics for 100 MHz) ↑ The amplitude changes through 1 MHz square wave adjustment.	HIC U604 TC1	X73-1900	<ol style="list-style-type: none"> <li>① In the state of the step No.37, input a square wave <math>\square</math> of 50 kHz to CH1 and adjust so that the amplitude extends over 6 divisions on the oscilloscope.</li> <li>② From this state, change the frequency to 100 MHz keeping the SG level, and adjust so that the amplitude extends over 5 divisions on the oscilloscope.</li> <li>③ After adjustment is completed, insert the P6 connector.</li> </ol> <div style="text-align: right; margin-top: 10px;">  </div>
FIX Level	VR2	X74-1530	<div style="border: 1px solid black; padding: 2px; display: inline-block;">* This item also can be adjusted in PROGRAM mode.</div> <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-top: 5px;">VOLTS: 10mV AC-DC: AC SWEEP TIME: 0.2 ms</div> <ol style="list-style-type: none"> <li>① Set TRIG MODE to FIX.</li> <li>② Inter a sine wave <math>\sin</math> of 1 kHz to CH1 and adjust so that the amplitude extends over 6 divisions with 3 divisions symmetrically on the upper and lower sides of the scale center.</li> </ol> <div style="text-align: right; margin-top: 10px;">  <p style="text-align: center; margin-top: 5px;">Locate the starting point in the center position.</p> </div> <ol style="list-style-type: none"> <li>③ If synchronization is available, reduce the amplitude gradually using VOLTS and V.VARI, and adjust ± SLOP for synchronization.</li> <li>④ Reduce the amplitude up to the maximum value of 0.5 divisions and perform the adjustment operation.</li> </ol>

# ADJUSTMENT

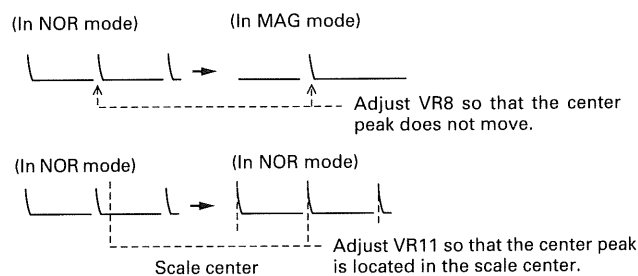Item	Adjustment	PCB	Procedure
TRIG Level Center	VR1	X74-1530	<p>* This item also can be adjusted in PROGRAM mode.</p> <p>VOLTS: 10 mV, AC-DC: AC, TRIG MODE: AUTO TRIG.LEVEL: Mechanical center, SWEEP TIME: 0.2 ms</p> <p>1) Inter a sine wave of 1 kHz to CH1 and adjust so that the amplitude extends over 6 divisions with 3 divisions symmetrically on the upper and lower sides of the scale center.</p> <p>2) Adjust so that the starting point of the waveform is located in the scale center.</p> <p>* When adjustment is performed in PROGRAM mode, never rotate TRIG. LEVEL VR before the operation is completed.</p> <div style="text-align: right;">  </div>
CH1 DC COUPLING	VR601	X73-1900	<p>* This item also can be adjusted in PROGRAM mode.</p> <p>COUPLING should be set to AC in the state of the step 'CH1 Waveform Shaping'</p> <p>① In the state of the step 'CH1 Waveform Shaping', set SLOPE to + and check to make sure that the starting point of the waveform is located in the scale center. (If not, adjust it using TRIG LEVEL.)</p> <p>② Switch COUPLING to DC and adjust the starting point to the scale center. For channels 2 to 4, only a check should be made.</p> <p>* When adjustment is performed in PROGRAM mode, never rotate TRIG.LEVEL VR before the operation is completed.</p>
A.SWEEP TIME 1 ms	VR5	X74-1530	<p>HORIZONTAL MODE: A SWEEP TIME: 1 ms, H. VARI: CAL</p> <p>1) Input a marker signal of 1 ms.</p> <p>2) Adjust so that every division corresponds to each peak of the marker signal one by one. (During this operation, the marker will move in the horizontal direction. Adjust it with H.POSI.)</p> <div style="text-align: right;">  </div>
A.SWEEP POSI	VR11	X74-1530	<p>This item is adjusted in PROGRAM mode.</p> <p>① Turn the mode to PROGRAM.</p> <p>② Set SWEEP TIME to 1 ms and H.VARI to CAL. * Do not rotate H.POSI and FINE on the panel.</p> <p>③ Input a marker signal of 1 ms.</p> <p>④ Adjust so that the first peak of the marker signal (i.e. starting point) comes to the left end of the scale.</p> <div style="text-align: right;">  </div>
MAG Gain	VR12	X74-1530	<p>Continue from the step 'CH4 Waveform Shaping' in PROGRAM mode.</p> <p>⑤ Turn X10 MAG on and adjust so that the interval between two adjacent peaks is 10 divisions.</p> <p>⑥ Turn X10 MAG off.</p>
MAG Center and A.SWEEP POSI	VR8 (MAG Center) VR11 (H.POSI)	X74-1530	<p>Continue from the step 'CH1 Input Capacity' in PROGRAM mode.</p> <p>⑦ Set the marker signal to 5 ms.</p> <p>⑧ Adjust VR8 so that the center peak of the marker signal does not move even when X10 MAG is turned on/off both in NOR and MAG modes. (If the center peak is not displayed on the screen, rotate VR11 slightly, then adjust VR8.)</p> <p>⑨ Turn X10 MAG off and adjust VR11 so that the center peak is located in the scale center.</p> <p>⑩ Set the marker signal to 1 ms and check SWEEP TIME and A.SWEEP POSI of 1 ms again. If the error is not negligible (in other words, when the value is not within 1.5 %), perform readjustment following the steps 'CH3 Waveform Shaping' to 'CH2 Input Capacity'</p> <p>* Turn PROGRAM mode off.</p> <div style="text-align: right;">  </div>
B.SWEEP TIME 1 ms	VR6	X74-1530	<p>Set HORIZONTAL MODE to A and A.SWEEP TIME to 2 ms first. Next, change HORIZONTAL MODE to B, then set B.SWEEP TIME to 1 ms and B TRIG to "D".</p> <p>1) Input a marker signal of 1 ms.</p> <p>2) Adjust so that every division corresponds to each peak of the marker signal one by one. (During this operation, the marker will move in the horizontal direction. Adjust it with H.POSI.)</p> <p>* If the luminescent line B is not displayed, rotate the VR for delay time.</p> <div style="text-align: right;">  </div>

# ADJUSTMENT



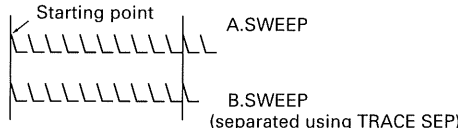
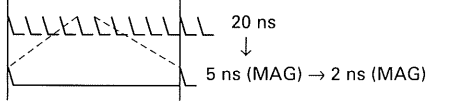
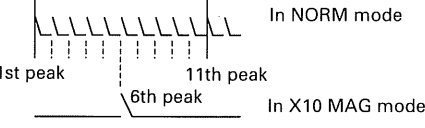
Item	Adjustment	PCB	Procedure												
B.SWEEP POSI	VR9	X74-1530	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Set HORIZONTAL MODE to A and A.SWEEP TIME to 1 ms first. Next, change HORIZONTAL MODE to ALT, then set B.SWEEP TIME to 1 ms and B TRIG to "D".</div> <ol style="list-style-type: none"> <li>1) Input a marker signal of 1 ms.</li> <li>2) Adjust so that the waveform of B.SWEEP overlaps that of A.SWEEP. At this point, the starting points of A. and B.SWEEP waveforms should agree.</li> </ol> 												
A.SWEEP TIME	TC1 (2 μs) TC3 (20 ns)	X74-1530	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">HORIZONTAL MODE: A SWEEP TIME: 2 μs</div> <ol style="list-style-type: none"> <li>1) Input a marker signal of 2 μs.</li> <li>2) Adjust so that every division corresponds to each peak of the marker signal one by one.</li> <li>3) Change SWEEP TIME to 20 ns and perform the same adjustment operation.</li> </ol>												
X10 MAG	TC101 (2 ns) TC103 (5 ns)	X80-1140	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">HORIZONTAL MODE: A SWEEP TIME: 50 ns X10MAG: ON</div> <ol style="list-style-type: none"> <li>1) Input a marker signal of 50 ns.</li> <li>2) Adjust so that the interval between two adjacent peaks is 10 divisions.</li> <li>3) Set SWEEP TIME to 2 ns and perform the same adjustment operation.</li> <li>4) Change SWEEP TIME repeatedly among 20 ns, 5 ns (MAG) and 2 ns (MAG) till the best condition is obtained.</li> </ol> 												
B.SWEEP TIME	TC2 (2 μs) TC4 (20 ns)	X74-1530	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Set HORIZONTAL MODE to A and A.SWEEP TIME to 5 μs first. Next, change HORIZONTAL MODE to B, then set B.SWEEP TIME to 2 μs and B TRIG to "D".</div> <ol style="list-style-type: none"> <li>1) Input a marker signal of 2 μs.</li> <li>2) Adjust so that every division corresponds to each peak of the marker signal one by one.</li> <li>3) Change SWEEP TIME to 20 ns and perform the same adjustment operation.</li> </ol>												
MAG Center 20 ns ↑ Readjust the dislocated gain for 2 ns.	TC5	X74-1530	<ol style="list-style-type: none"> <li>① Set SWEEP TIME to 20 ns and input a marker signal of 20 ns.</li> <li>② Adjust POSI so that every division corresponds to each peak of the marker signal one by one.</li> <li>③ Turn MAG on and adjust so that the 6th peak is located in the scale center.</li> </ol>  <p><b>MAG Center and H.POSI</b> H.POSI is dislocated every time when MAG center (for 1 ms) is readjusted. Never fail to check A. and B.SWEEP POSIs and adjust them again if needed.</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>MAG Center</th> <th>A.SWEEP POSI</th> <th>B.SWEEP POSI</th> </tr> </thead> <tbody> <tr> <td>Readjust VR8</td> <td>Dislocated</td> <td>Dislocated</td> </tr> <tr> <td>Stay as it is</td> <td>Readjust VR11</td> <td>Dislocated</td> </tr> <tr> <td>Stay as it is</td> <td>Stay as it is</td> <td>Make the same as A.SWEEP</td> </tr> </tbody> </table>	MAG Center	A.SWEEP POSI	B.SWEEP POSI	Readjust VR8	Dislocated	Dislocated	Stay as it is	Readjust VR11	Dislocated	Stay as it is	Stay as it is	Make the same as A.SWEEP
MAG Center	A.SWEEP POSI	B.SWEEP POSI													
Readjust VR8	Dislocated	Dislocated													
Stay as it is	Readjust VR11	Dislocated													
Stay as it is	Stay as it is	Make the same as A.SWEEP													

# ADJUSTMENT



Item	Adjustment	PCB	Procedure
D.T.M (DELAY TIME)	VR3 (Start) VR4 (Stop)	X74-1530	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">                     HORIZONTAL MODE: ALT                      AC-DC: GND (for both channels)                      A. SWEEP TIME: 1 ms                      B. SWEEP TIME: 0.2 μs                 </div> <ol style="list-style-type: none"> <li>1) Display 0.200 by rotating DELAY TIME POSI.</li> <li>2) Set B.SWEEP to 0.2 div (Start).</li> <li>3) Display 10.000 by rotating DELAY TIME POSI.</li> <li>4) Set B.SWEEP to 10 div (Stop).</li> </ol> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 10px;"> <div style="text-align: center;"> <p>Adjusting the starting point.</p> </div> <div style="text-align: center;"> <p>Adjusting the stop point.</p> </div> </div>
CH1 X-Gain	VR7	X74-1530	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">                     H. MODE: X-Y, TRIG SOURCE: CH1                      CH2: ON, CH1 VOLTS: 10mV                      However, do not CH1 on.                      CH2 VOLTS: 10 mV                      AC-DC: AC (for both channels)                 </div> <ol style="list-style-type: none"> <li>① Input a 50 mV  square wave to CH1.</li> <li>② Adjust so that the amplitude extends over 5 divisions. * Make sure to perform adjustment in the center position on the screen.</li> </ol> <div style="text-align: right; margin-top: 10px;"> </div>
CH1 X-POSI	VR10	X74-1530	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">                     This item is adjusted in PROGRAM mode.                 </div> <ol style="list-style-type: none"> <li>① Change the mode to PROGRAM.</li> <li>② Turn CH2 on. Then turn CH1 off.</li> <li>③ Set TRIG SOURCE to CH1.</li> <li>④ Set AC-DC to GND.</li> <li>⑤ Check to make sure that the luminescent line is in the scale center. Then set HORIZ MODE to X-Y.</li> <li>⑥ Adjust so that the spot comes to the center of the scale. * Take care not to rotate  POSI before adjustment is completed</li> <li>⑦ Turn the PROGRAM mode off.</li> </ol> <p style="margin-top: 10px;">For channels 2 to 4, check each item.</p> <div style="text-align: right; margin-top: 10px;"> <p style="text-align: center;">Adjust so that the spot comes to the center of the scale.</p> </div>
CH1 Square Wave Characteristics	VR1  Position TC1 (for the whole range) TC2 (for the mid-range) TC39 (for the whole range) TC101 (for the mid-range)	X80-1140  X73-1900	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">                     VOLTS: 5 mV AC-DC: DC                 </div> <ol style="list-style-type: none"> <li>① Input a sweep signal to CH1 and adjust each TC and VR so that the waveform is as shown in the photo. However, TC101 of X73-1900 is omitted.</li> </ol> <div style="text-align: right; margin-top: 10px;"> </div>






# ADJUSTMENT

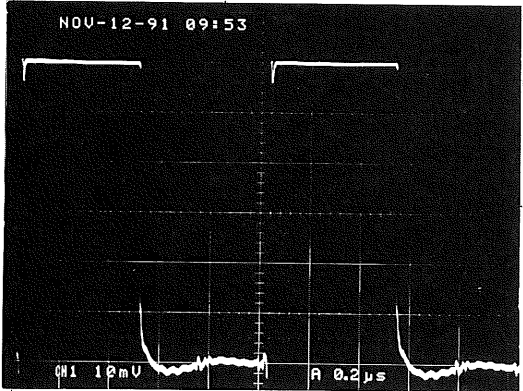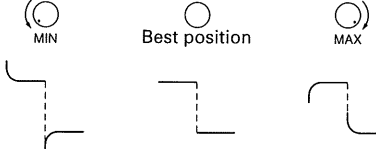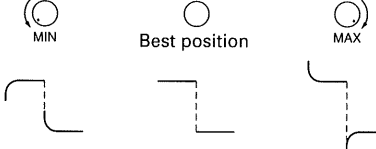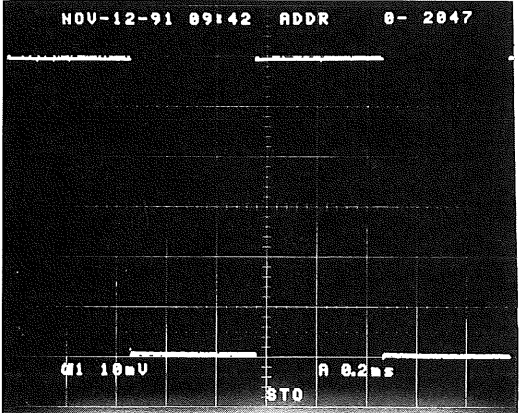Item	Adjustment	PCB	Procedure
CH1 Square Wave Characteristics			<p>② Input a square wave of 1 MHz and adjust so that the amplitude extends over 6 divisions. The waveform is as shown in the photo.</p> <p>③ Shape the overshoot using TC101 of X73-1900 and other TCs/VRs, and adjust TC1 in the final stage so that the overshoot extends over 2 divisions.</p>  
Square Wave Characteristics	TC201 (CH2) TC301 (CH3) TC401 (CH4)	X73-1900	<p>VOLTS: 5 mV, AC-DC: DC</p> <p>① Input a square wave of 1 MHz and adjust so that the amplitude extends over 6 divisions. ② Adjust so that the waveform is the same as that of CH1. Adjust each channel repeating the steps ① and ②.</p>
CH1 STO 10 kHz Square Wave	VR112 TC102	X73-1900	<p>Variable range of VR112 (effective for Gain and OS)</p>  <p>Variable range of TC102 (effective for OS only)</p>  <p>SCOPE MODE: STORAGE VOLTS: 10 mV, AC-DC: DC</p> <p>① Input a square wave <math>\square</math> of 10 kHz and adjust so that the amplitude extends over approx. 5 divisions. ② Adjust so that the leading edge of the waveform is flat.</p> 
CH2 STO 10 kHz Square Wave	VR212 TC202	X73-1900	Adjust in the same way as for CH1.
CH3 STO 10 kHz Square Wave	VR312 TC302	X73-1900	Adjust in the same way as for CH1.
CH4 STO 10 kHz Square Wave	VR412 TC402	X73-1900	Adjust in the same way as for CH1.
STO V.Gain	VR111 (CH1) VR211 (CH2) VR311 (CH3) VR411 (CH4)	X73-1900	<p>SCOPE MODE: STORAGE VOLTS: 10 mV, VARI: CAL, AC-DC: DC</p> <p>① Input a 50 mV square wave <math>\square</math> of 1 kHz and adjust so that the amplitude extends over 5 divisions.</p> <p>Adjust CH1 to CH4 repeating the step ①.</p>





# ADJUSTMENT

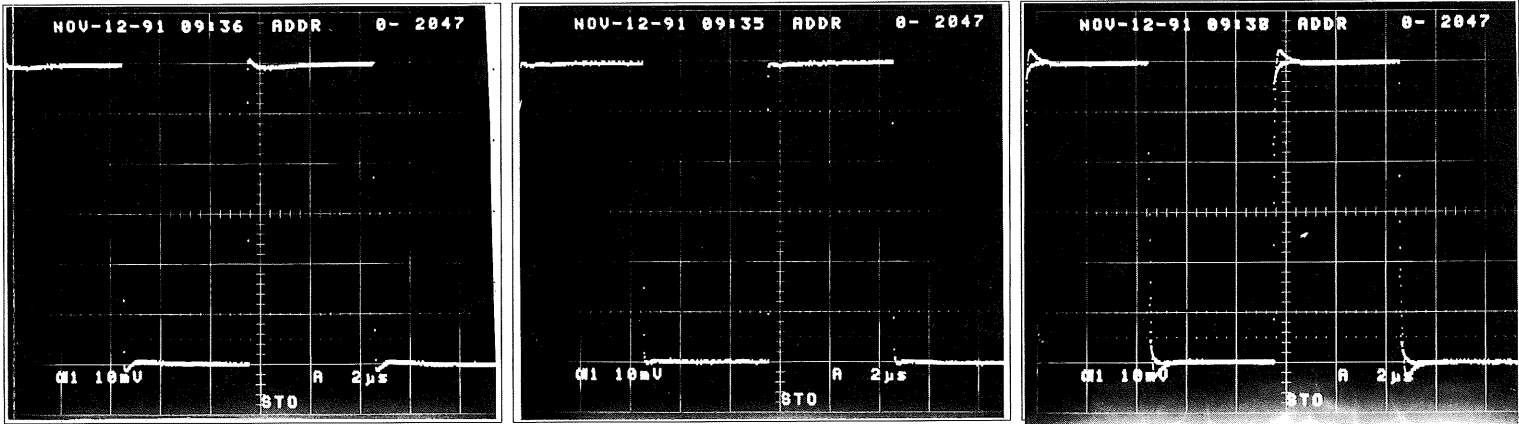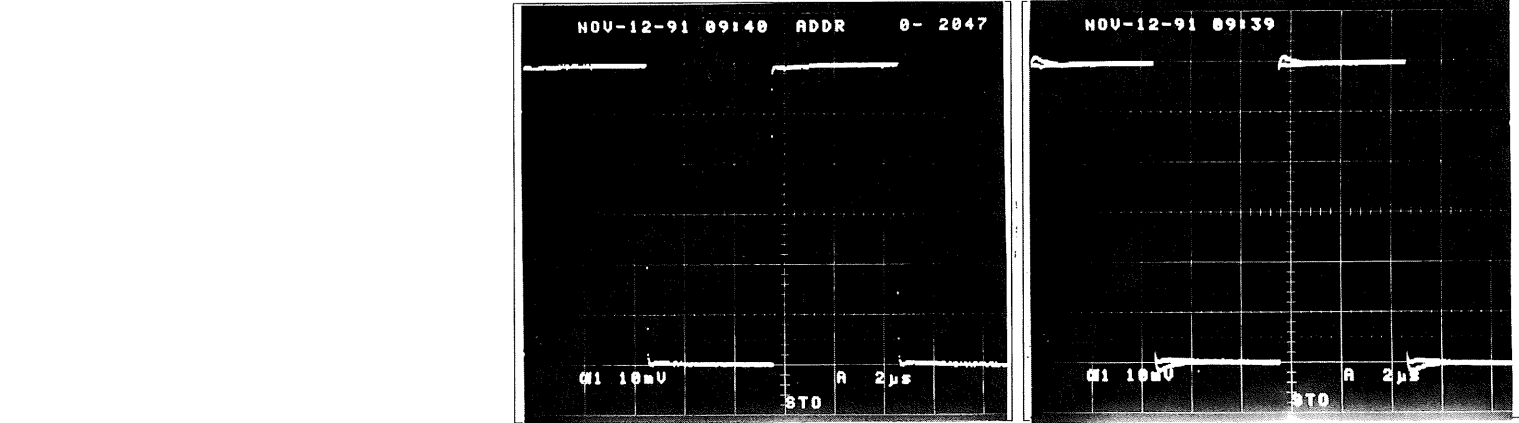Item	Adjustment	PCB	Procedure
STO POSI Center	VR110 (CH1) VR210 (CH2) VR310 (CH3) VR410 (CH4)	X73-1900	<ol style="list-style-type: none"> <li>① Change the mode to <b>PROGRAM</b>.</li> <li>② Turn on <b>CH1</b>, <b>CH2</b>, <b>CH3</b> and <b>CH4</b>.</li> <li>③ Set VOLTS to 20 mV (CH1 to CH4).</li> <li>④ Set AC-DC to GND (CH1 to CH4). (Adjust so that all the luminescent lines for channels 1 to 4 overlap one another in the scale center.)</li> <li>⑤ Turn <b>SCOPE MODE</b> on to change the mode to STORAGE.</li> <li>⑥ Adjust each VR so that all the luminescent lines for channels 1 to 4 are in the scale center. (Adjust so that the positions are the same as those in REAL mode.)</li> </ol> <p>* Take care not to rotate <math>\odot</math> POSI before adjustment is completed.</p> <ol style="list-style-type: none"> <li>⑦ Turn the <b>PROGRAM</b> mode off.</li> </ol>
CH1 STO 100 kHz Square Wave	VR101 TC101	X78-1070	<div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 10px;"> SCOPE MODE: STORAGE  VOLTS: 10 mV, AC-DC: DC </div> <p style="text-align: center;">Variable range of VR101 (effective for GAIN and OS)</p> <div style="display: flex; justify-content: space-around; text-align: center;"> <div style="width: 30%;">(Set to MIN)</div> <div style="width: 30%;">(Best position)</div> <div style="width: 30%;">(Around MAX)</div> </div>  <p style="text-align: center;">Variable range of TC101 (effective for OS only)</p> <div style="display: flex; justify-content: space-around; text-align: center;"> <div style="width: 45%;">(Best position)</div> <div style="width: 45%;">(Variable range)</div> </div>  <ol style="list-style-type: none"> <li>① Input a square wave <math>\square</math> of 100 kHz and adjust so that the amplitude extends over approx. 5 divisions.</li> <li>② Adjust so that the leading edge of the waveform is flat.</li> </ol>
CH2 STO 100 kHz Square Wave	VR201 TC201	X78-1070	Adjust in the same way as for CH1.
CH3 STO 100 kHz Square Wave	VR101 TC101	X78-1070	Adjust in the same way as for CH1.
CH4 STO 100 kHz Square Wave	VR201 TC201	X78-1070	Adjust in the same way as for CH1.

# ADJUSTMENT

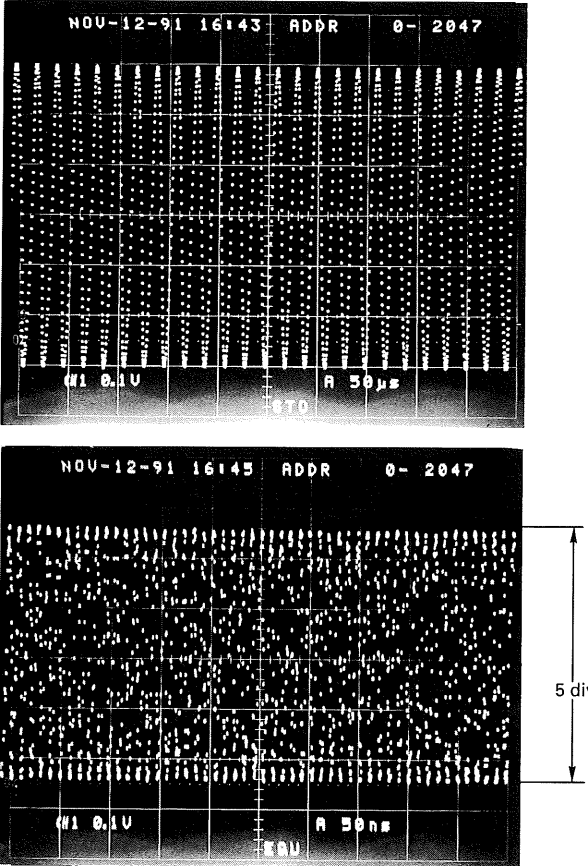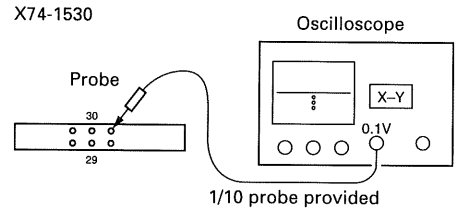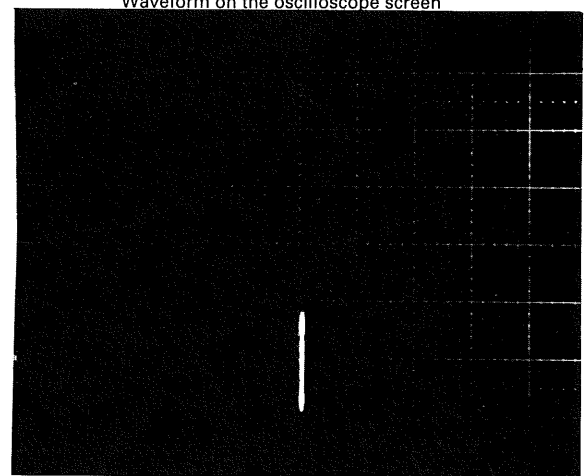
Item	Adjustment	PCB	Procedure
CH1 STO Frequency Characteristics	U106-TC1	X73-1900	<div style="border: 1px solid black; padding: 2px; display: inline-block; margin-bottom: 10px;">                     SCOPE MODE: STORAGE                      VOLTS: 10 mV, AC-DC: DC                 </div> <ol style="list-style-type: none"> <li>① Input a sine wave <math>A_V</math> of 50 kHz to CH1 and adjust so that the amplitude extends over 6 divisions.</li> <li>② Change the frequency to 100 MHz keeping the level of the signal generator (SG).</li> </ol> <div style="text-align: right; margin-top: 20px;">  </div> <ol style="list-style-type: none"> <li>③ Change the STORAGE mode from NOR to EQU.</li> <li>④ Adjust so that the amplitude extends over 5 divisions.</li> </ol>
STO Frequency Characteristics (CH2 to CH4)	U206-TC1 (CH2) U306-TC1 (CH3) U406-TC1 (CH4)	X73-1900	Adjust each channel in the same way as for CH1.
Equivalent Sampling Offset and Gain	VR14 (Offset) VR13 (Gain)	X74-1530	<div style="border: 1px solid black; padding: 2px; display: inline-block; margin-bottom: 10px;">                     SCOPE MODE: STORAGE                      VOLTS: 10 mV, STORAGE MODE: EQU                 </div> <ol style="list-style-type: none"> <li>① Input a sine wave of 16 MHz to CH1 and adjust so that the amplitude extends over 6 divisions.</li> <li>② Set VOLTS of the oscilloscope to 1 V range (i.e. 0.1 V range when the probe is used) and the mode to X-Y operation. Then adjust POS1 so that the spot comes to the scale center.</li> <li>③ Apply the probe to No.32 of P16 of X74-1530.</li> </ol> <div style="text-align: center; margin-top: 20px;">  <p style="font-size: small; margin-top: 5px;">1/10 probe provided</p> </div> <div style="text-align: right; margin-top: 20px;"> <p style="font-size: x-small; margin-bottom: 5px;">Waveform on the oscilloscope screen</p>  </div>

# ADJUSTMENT

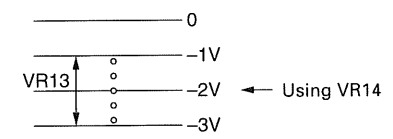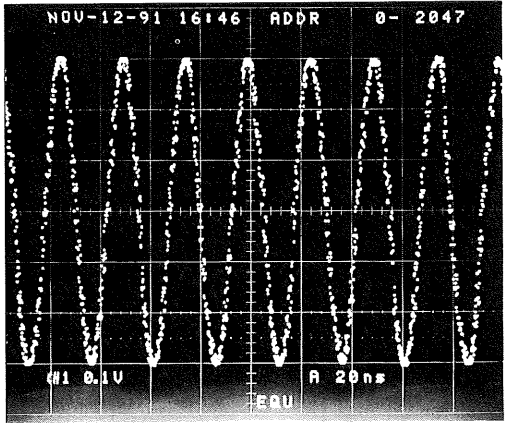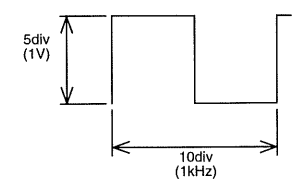Item	Adjustment	PCB	Procedure
Equivalent Sampling Offset and Gain	VR14 (Offset) VR13 (Gain)	X74-1530	<p>④ Adjust VR14 so that the moving center of the spot is -2 V, then adjust VR13 so that whole the movement range is 2 V.</p> <div style="text-align: right; margin-right: 50px;">  </div> <p>In addition, the spot moves frequently in the vertical direction. Make sure to perform the operation correctly.</p> <p>⑤ Check to make sure that there is no great gap found in the waveform of the main body.</p> <div style="text-align: right; margin-right: 50px;">  </div>
CAL Voltage	VR5 (1 kHz) VR6 (1 V)	X81-2900	<p>1) Connect the calibrated oscilloscope and frequency counter with the CAL terminal and adjust as shown in the figure below.</p> <div style="text-align: center; margin: 10px 0;">  </div> <p>* The figure shows the case where the oscilloscope for measurement has been set as follows: VOLTS: 0.2 V SWEEP TIME: 0.1 ms.</p> <div style="text-align: right; margin-right: 50px;">  </div>


# ADJUSTMENT

HIGH VOLTAGE UNIT (X68-1590-00)

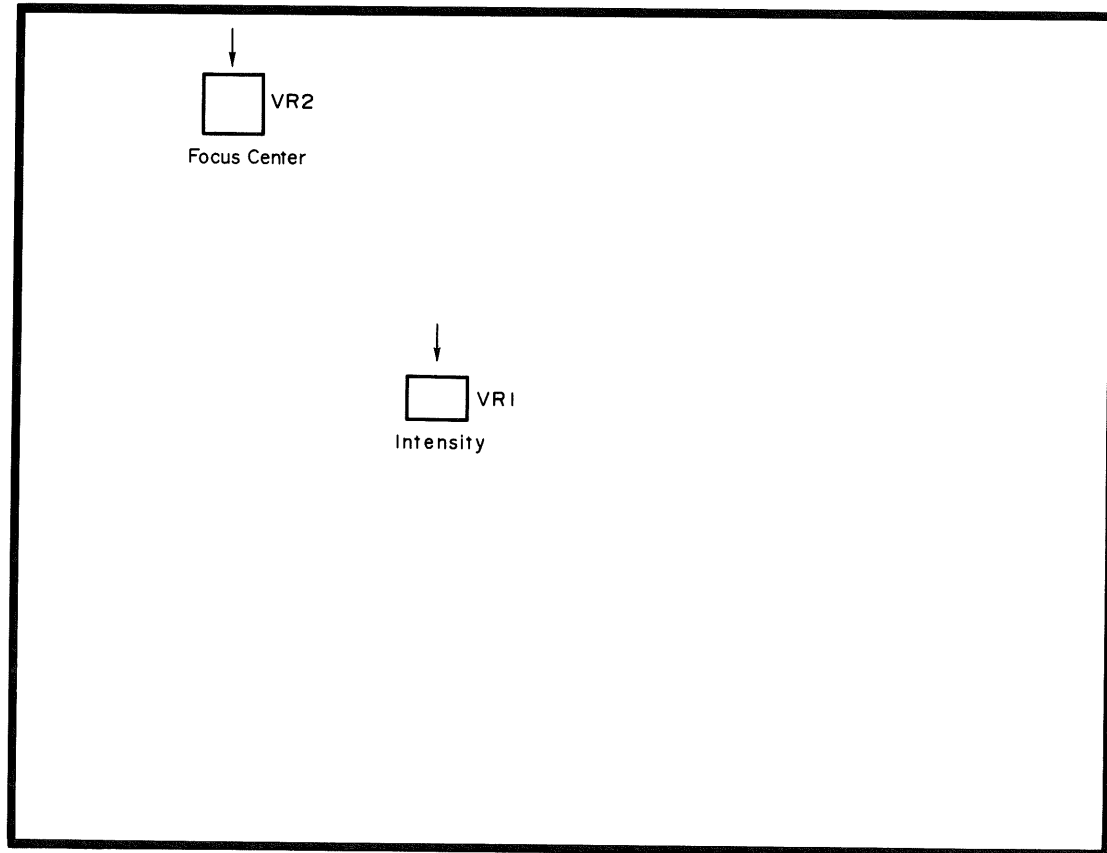


# ADJUSTMENT

VERTICAL UNIT (X73-1900-00)

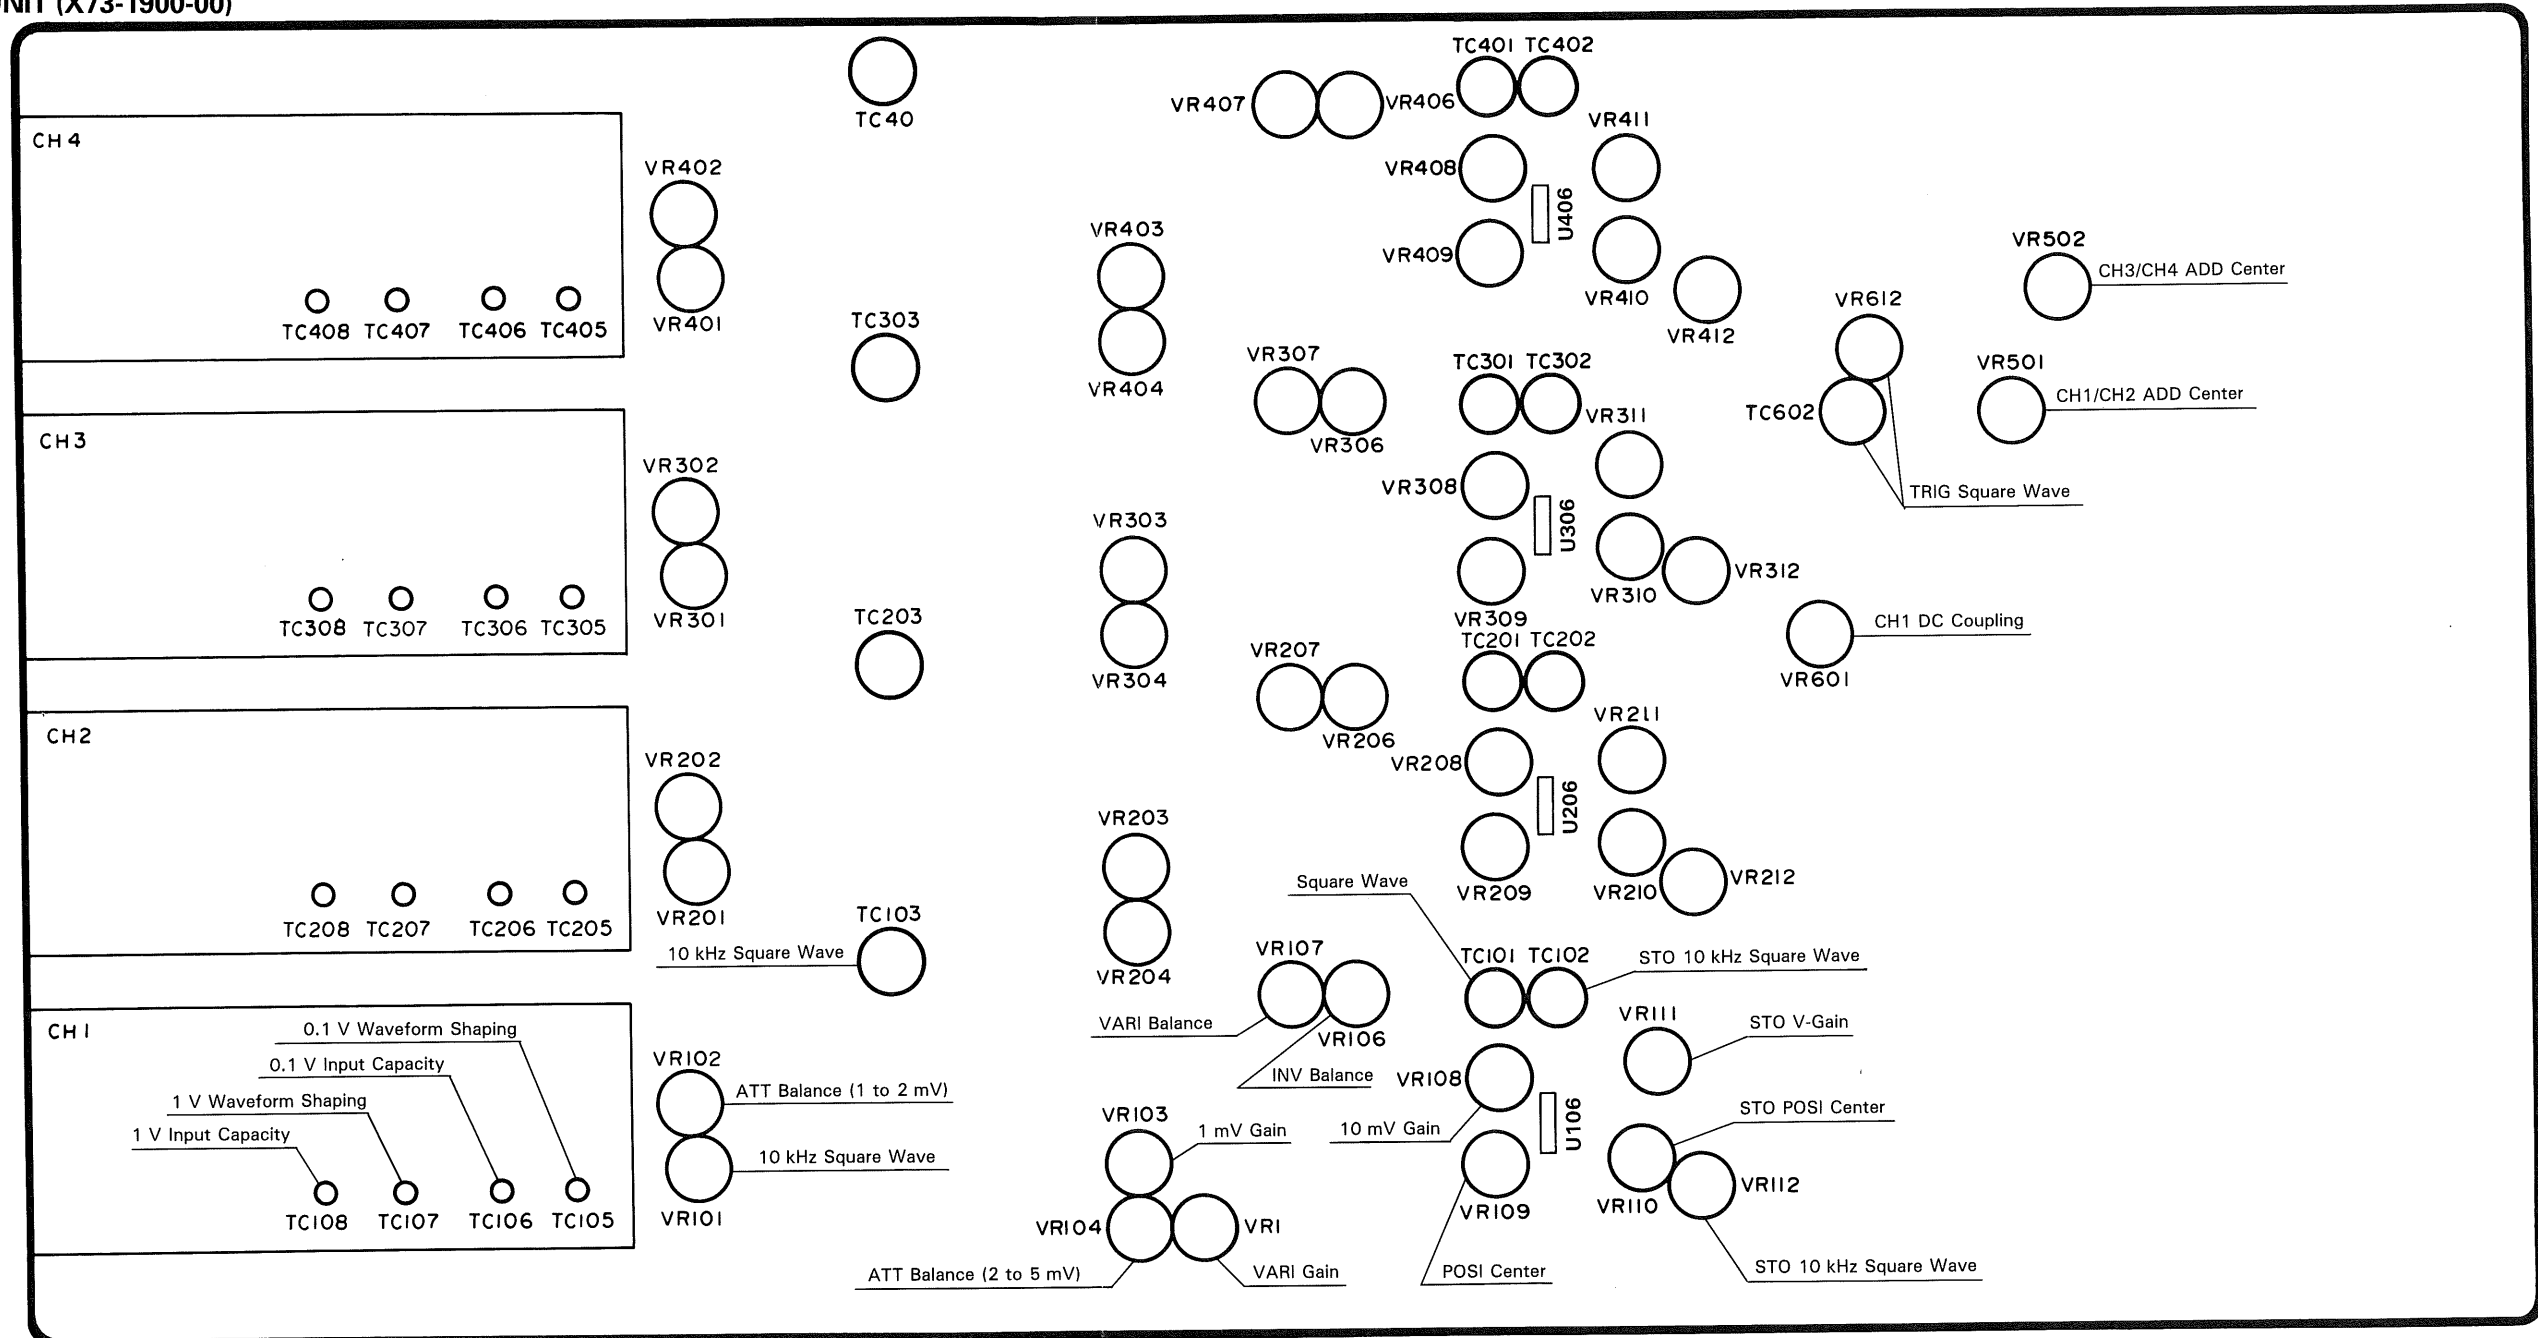


# ADJUSTMENT

## HORIZONTAL UNIT (74-1530-00)

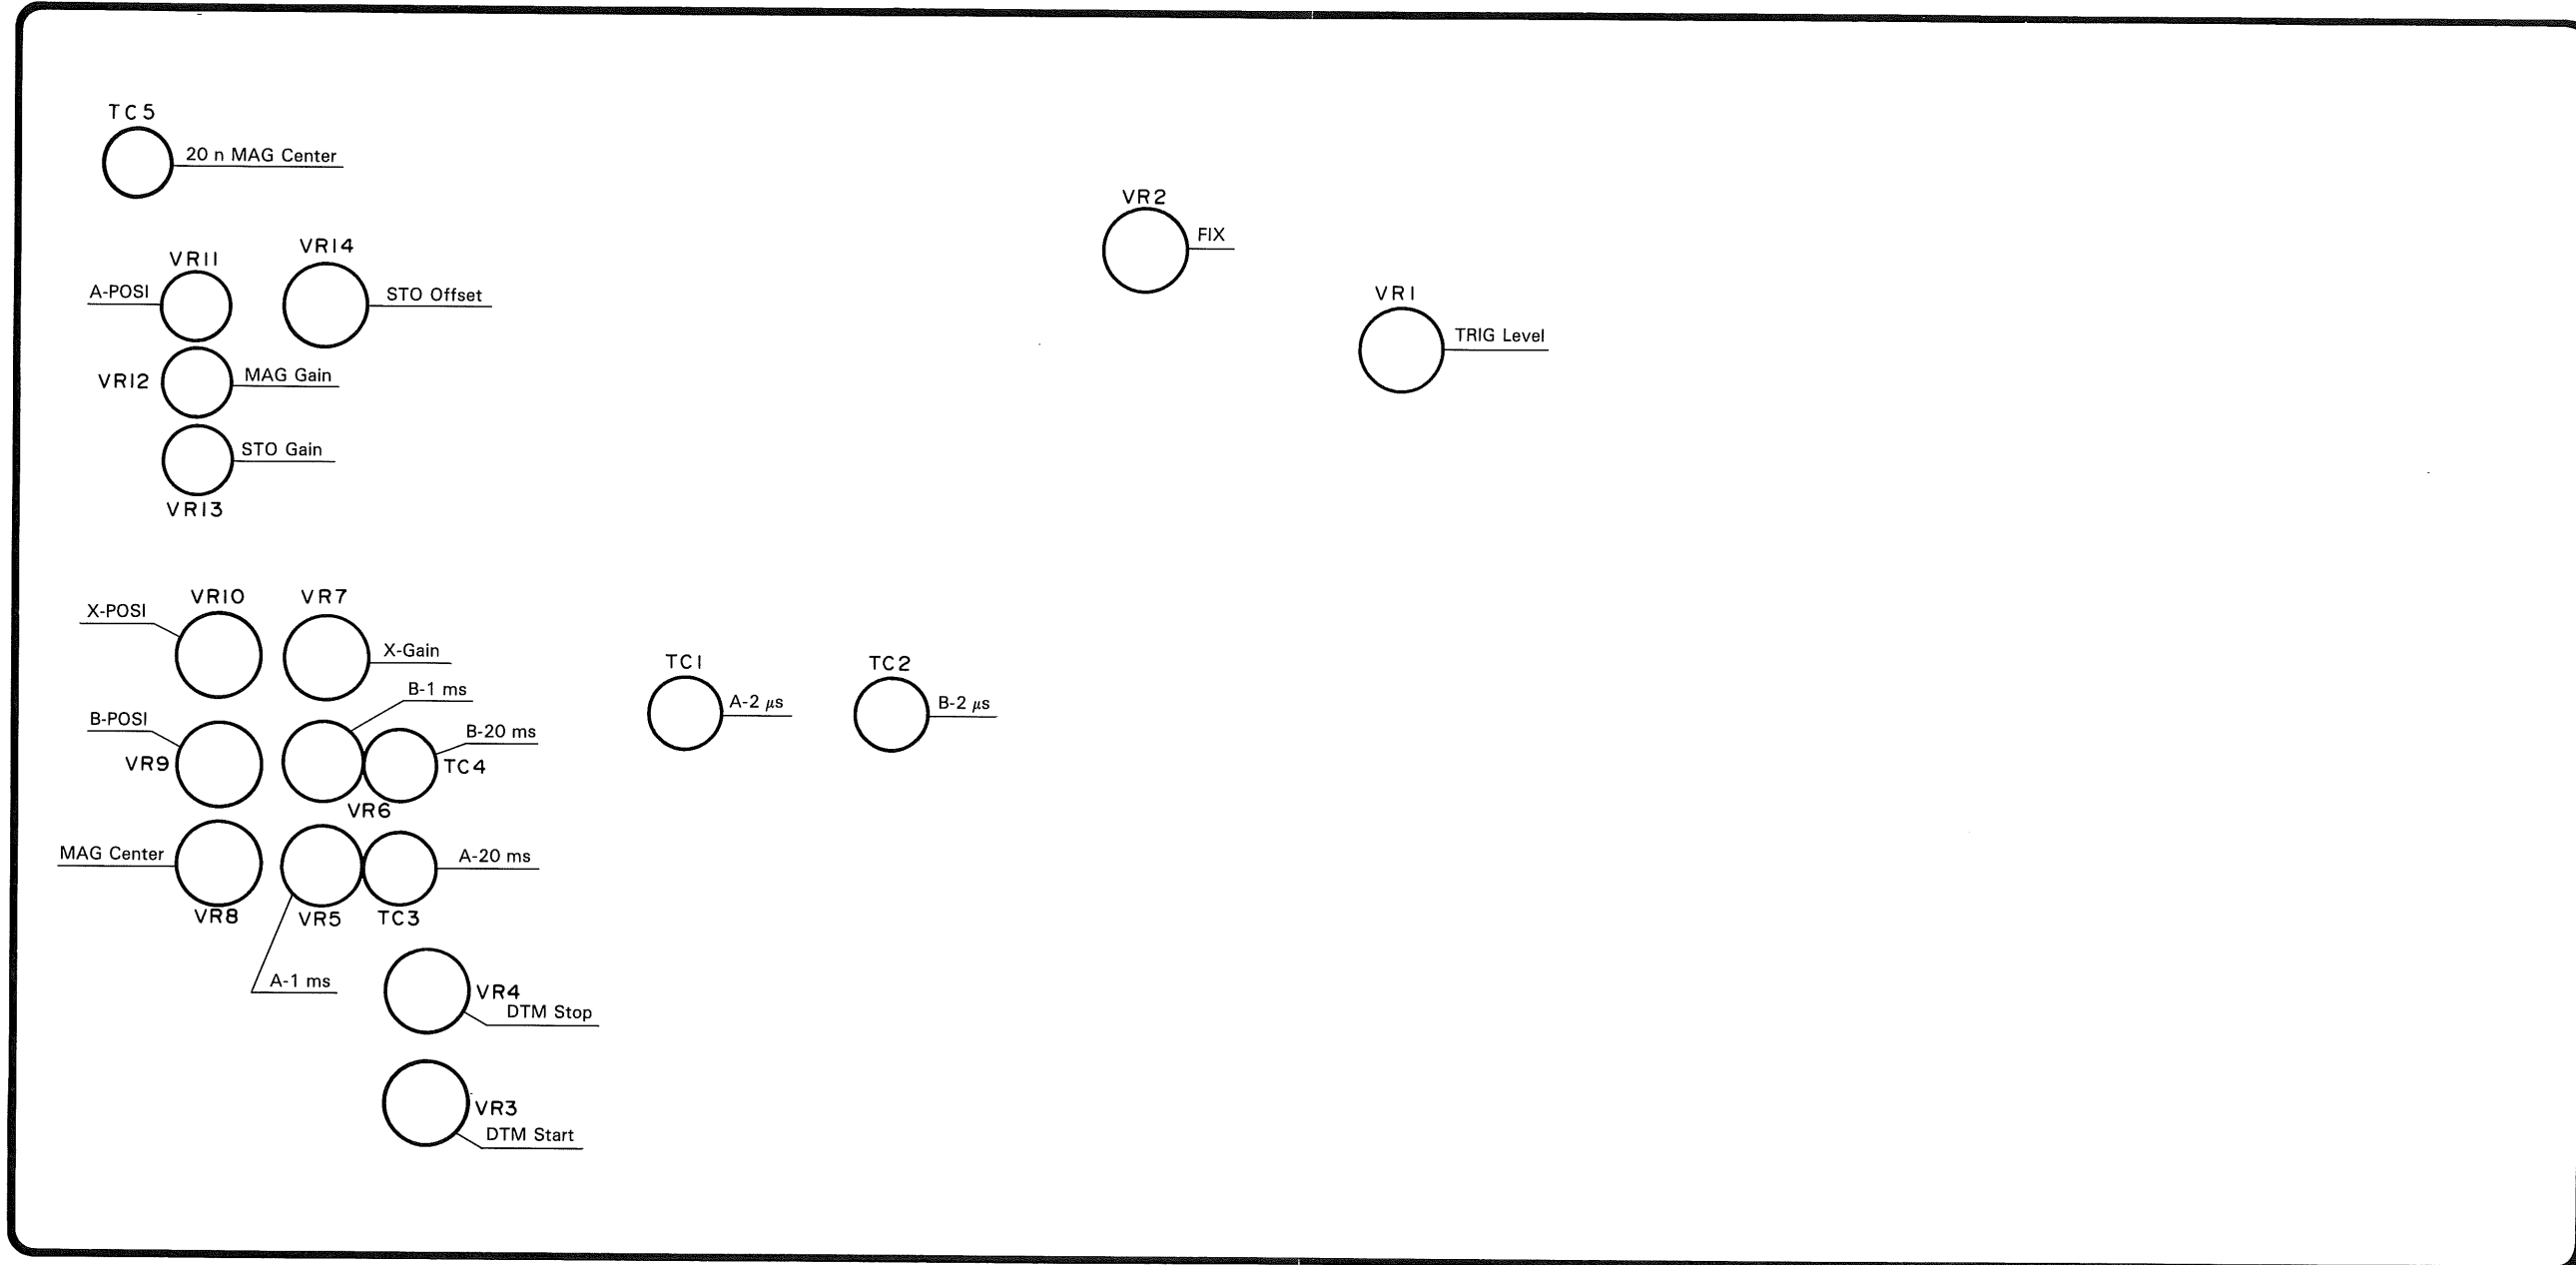

# ADJUSTMENT


STO CPU UNIT (X77-1660-0X)

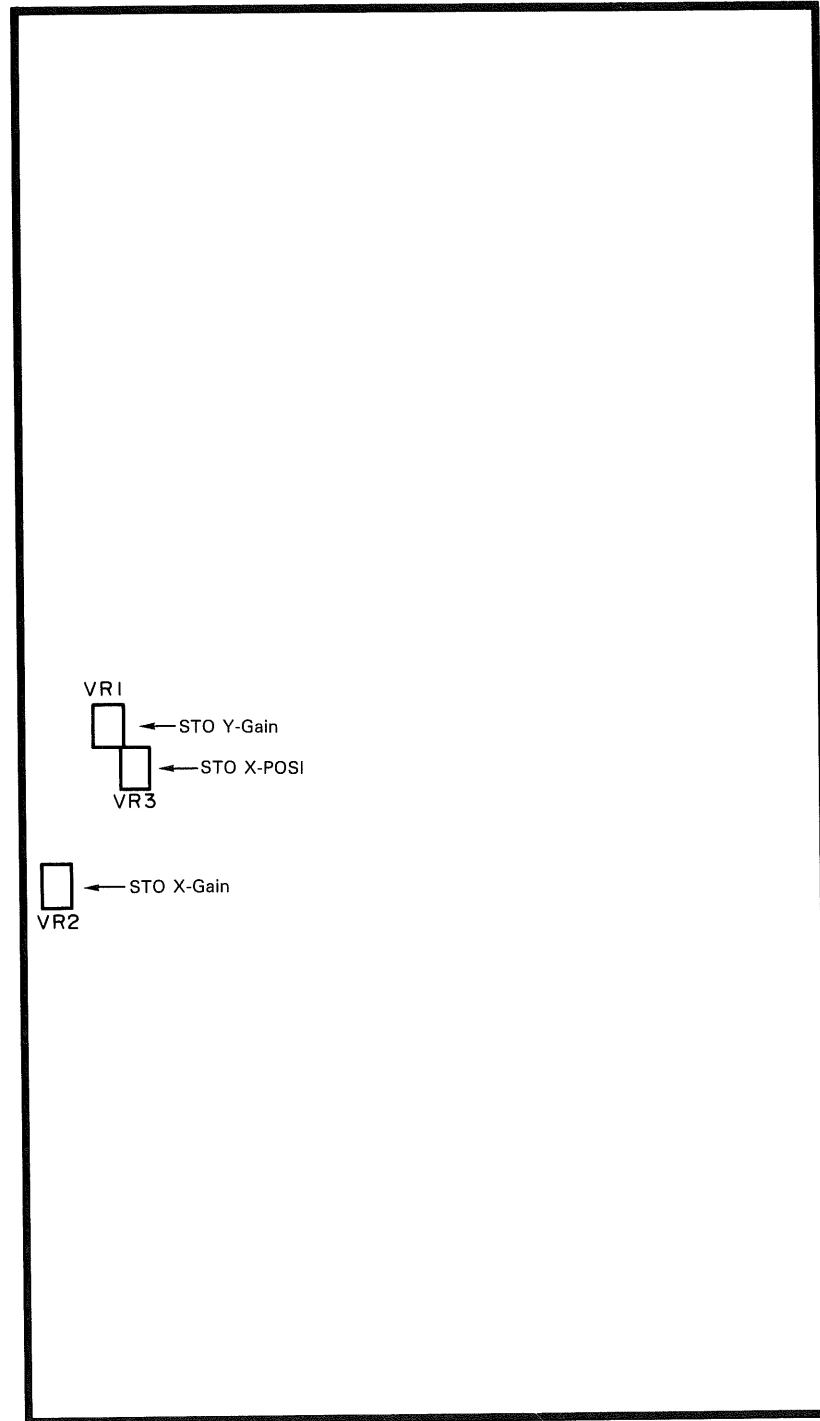


FRONT

# ADJUSTMENT

R/O UNIT (X78-1070-00)




FRONT

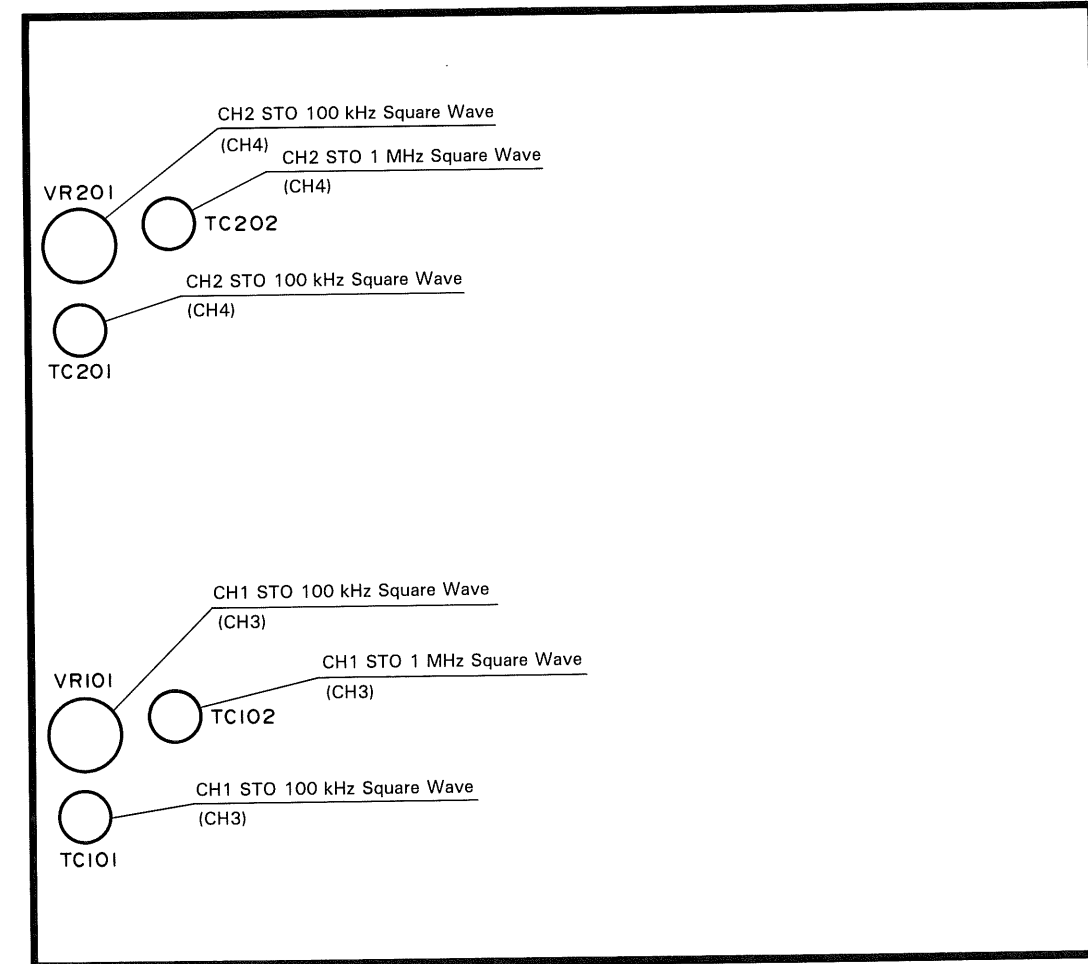




# ADJUSTMENT

GPIB UNIT (X79-1120-00 A/4)

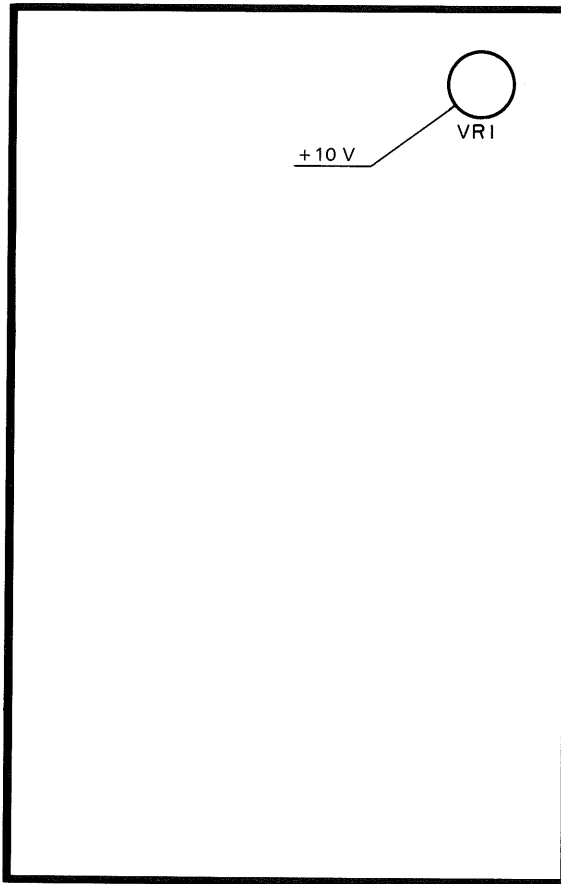


# ADJUSTMENT

FINAL UNIT (X80-1140-00)

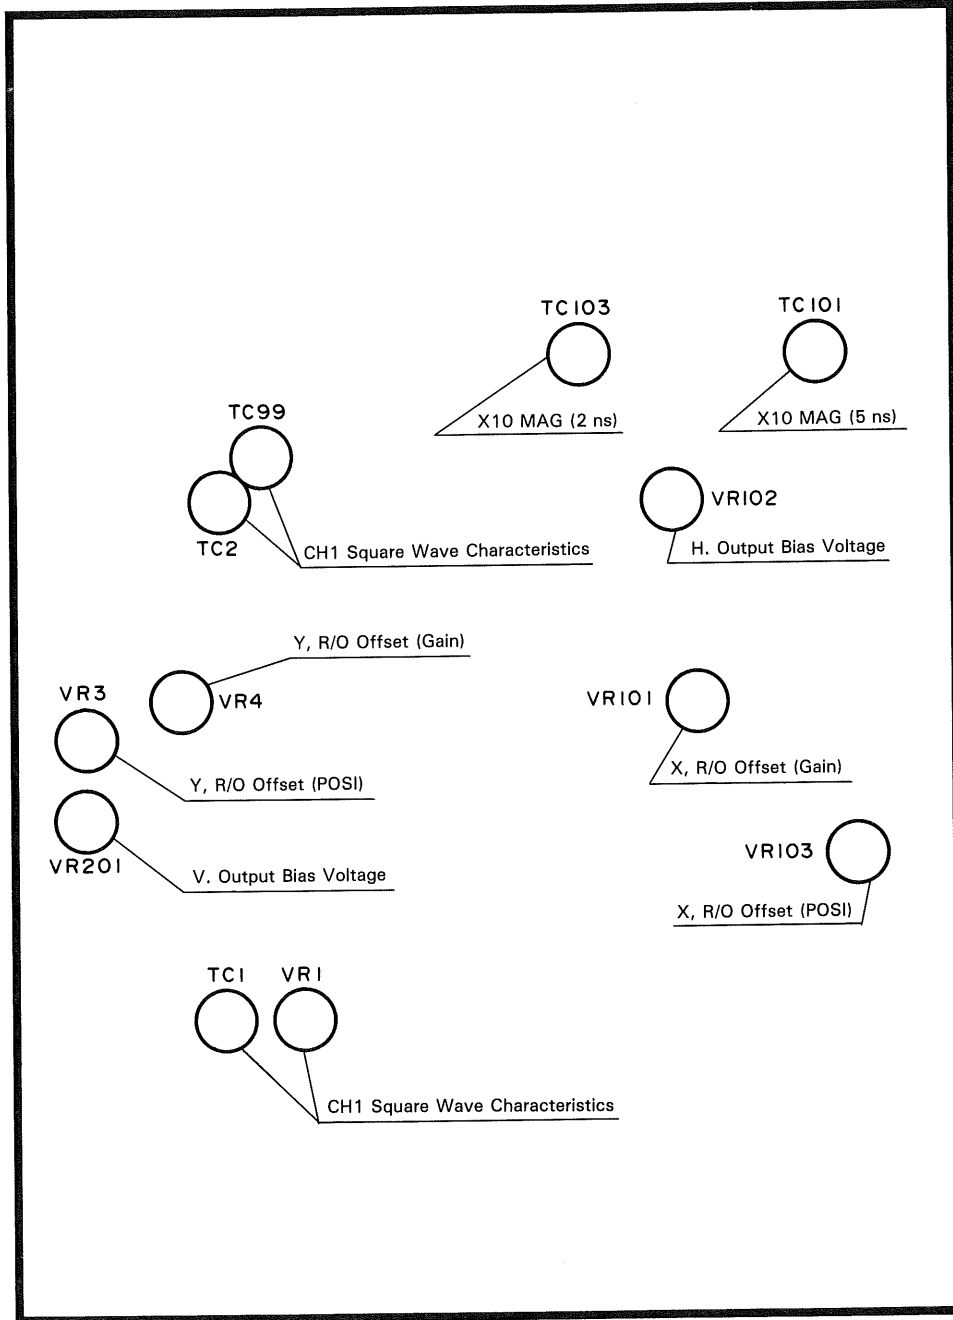

# ADJUSTMENT

VR UNIT (X81-2900-00)

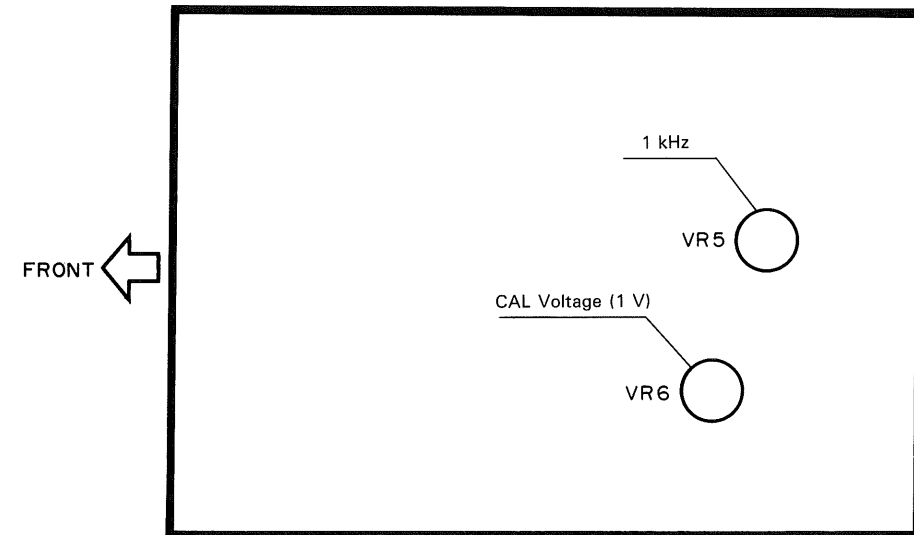

# TROUBLESHOOTING






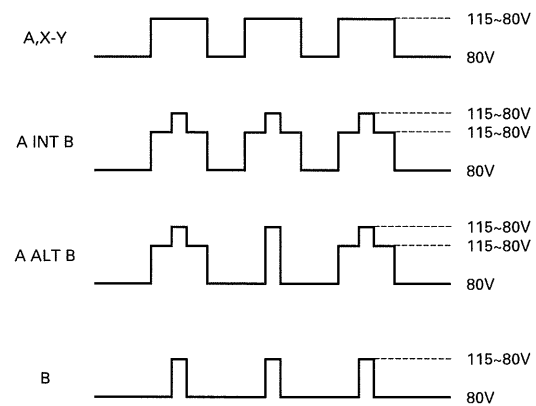


Fig.1 Q6 Collector Signal

# TROUBLESHOOTING

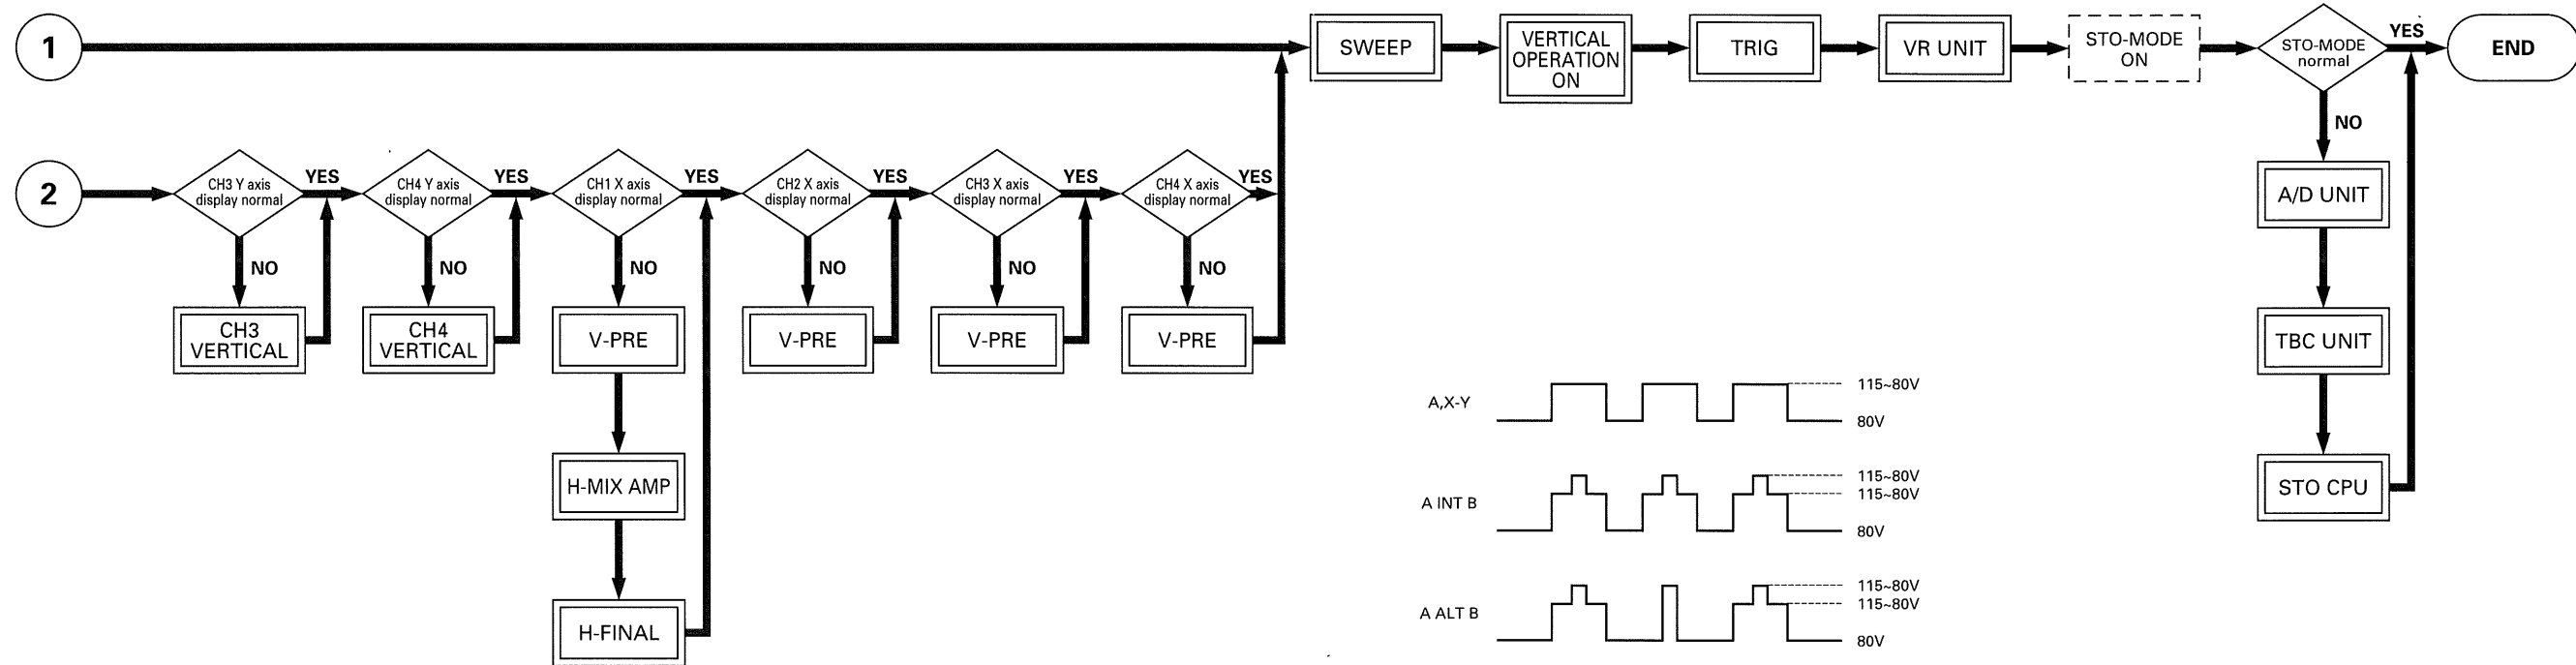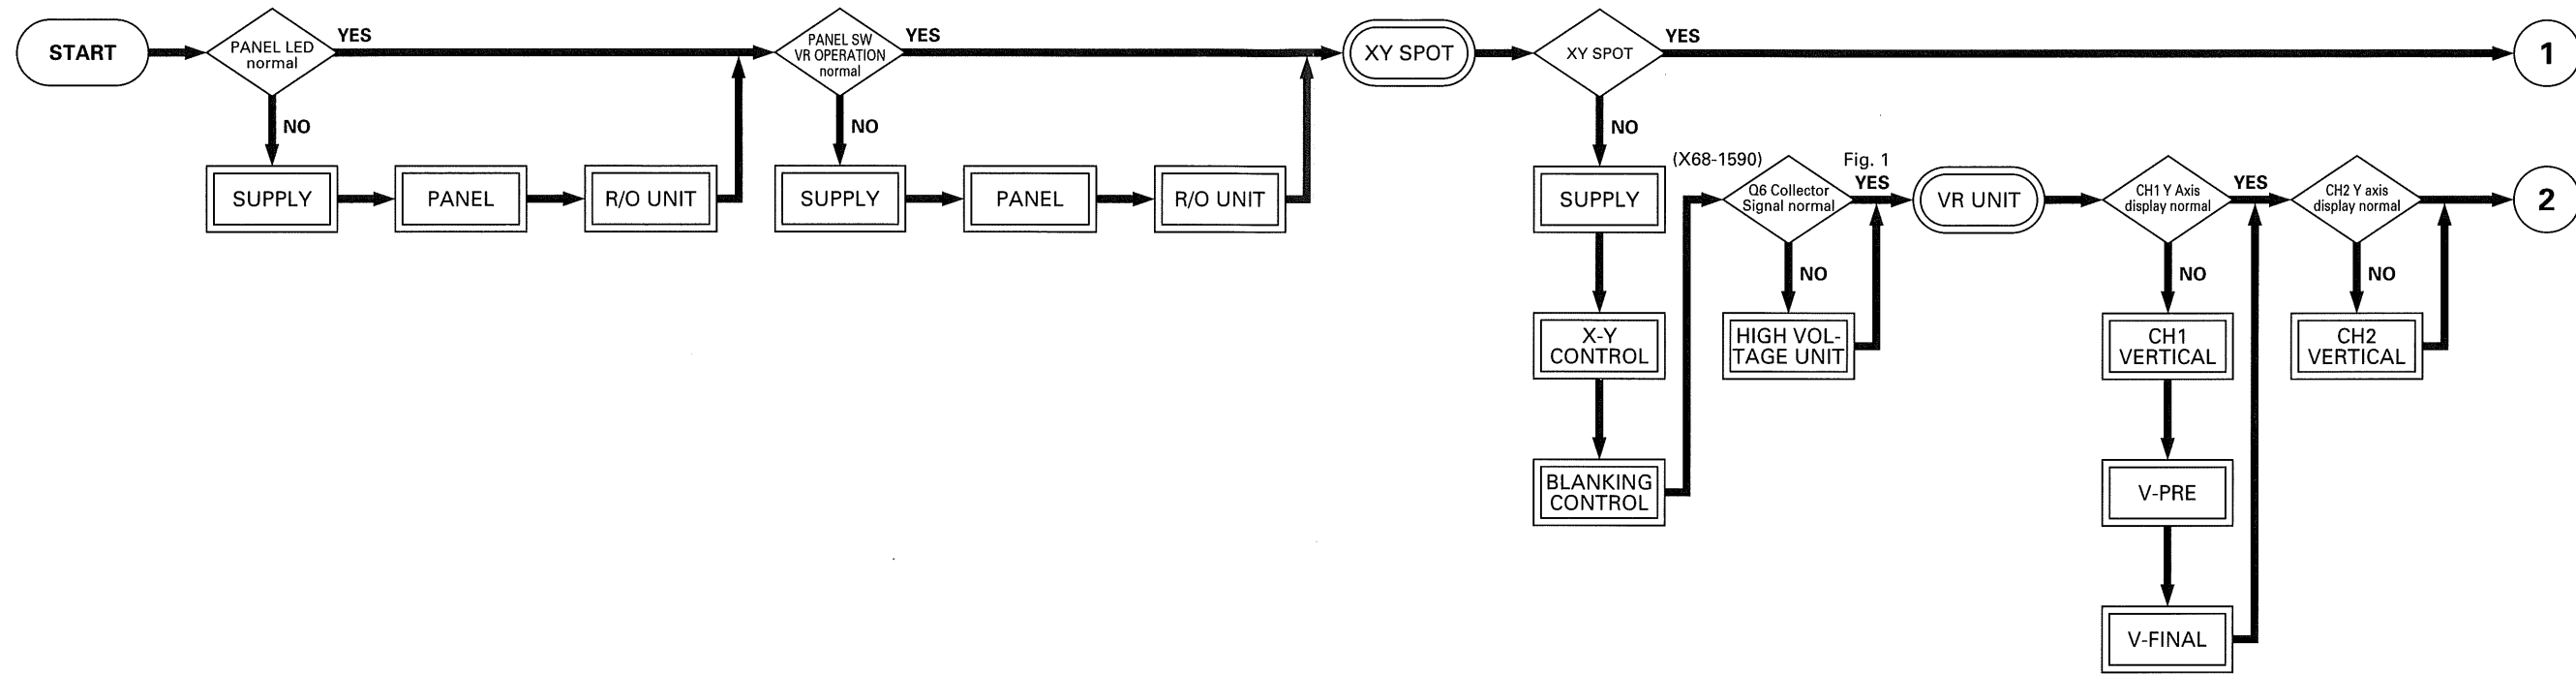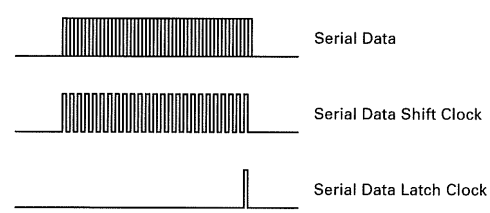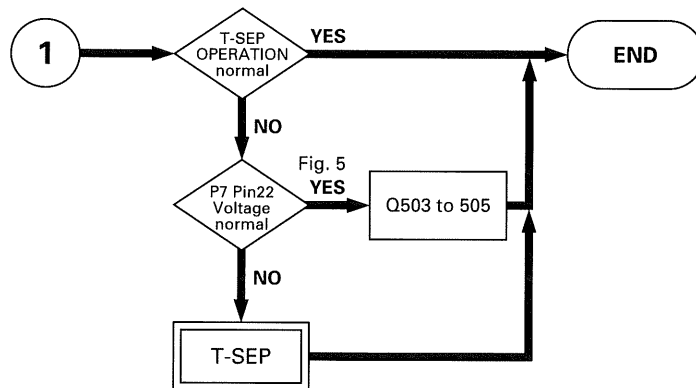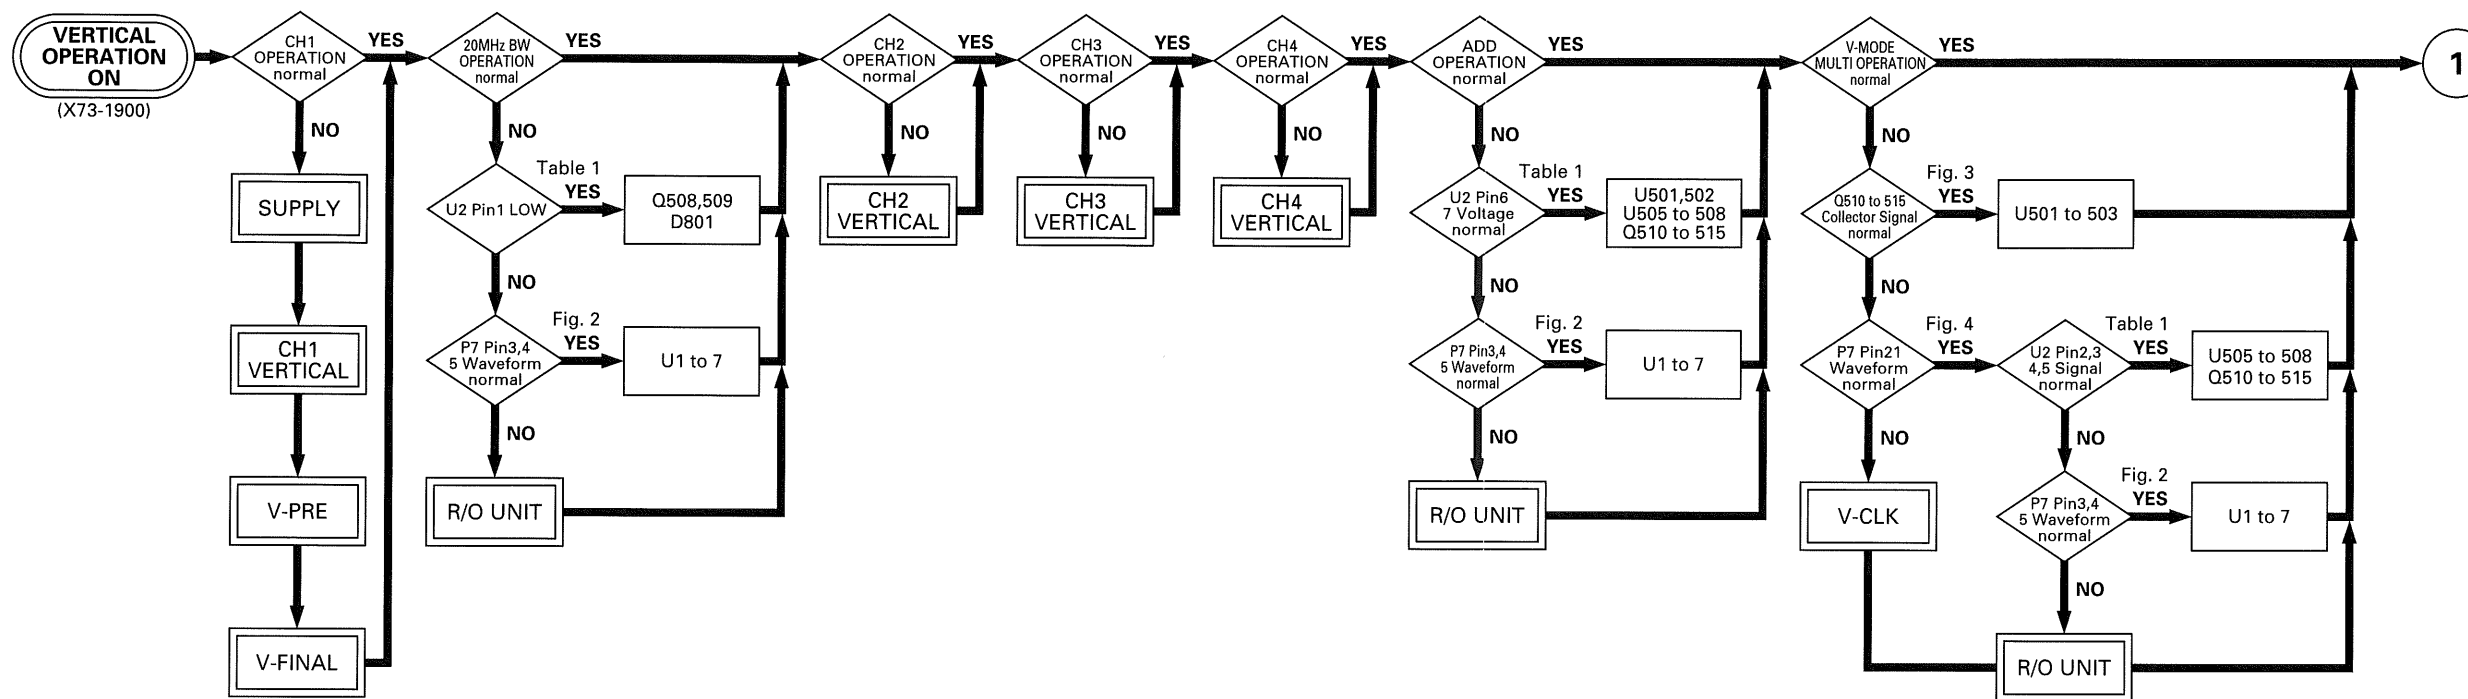

	PANEL SW SCAN	PANEL LED Control	V UNIT Control	H UNIT Control	TBC UNIT Control
Serial Data	P27 Pin 14 SWD	P27 Pin 15 LD	P7 Pin 5 VD	P16 Pin 18 HD	P54 Pin 3 SDAD
Serial Data Shift Clock	P27 Pin 11 SWSC	P27 Pin 16 LSC	P7 Pin 3 VSC	P16 Pin 17 HSC	P54 Pin 2 SCKA
Serial Data Latch Clock	P27 Pin 12 SWLC	P27 Pin 13 LLC	P7 Pin 4 VLC	P16 Pin 19 HLC	P54 Pin 1 LCKA

Fig.2 Transration Time Chart

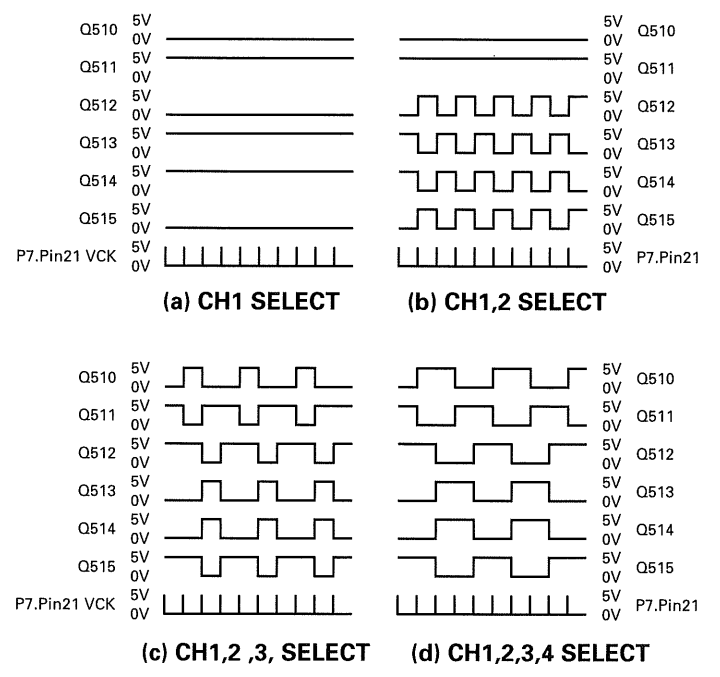


Fig.3 Q510~515 Collector Signal




Fig.4 V-CLK Signal

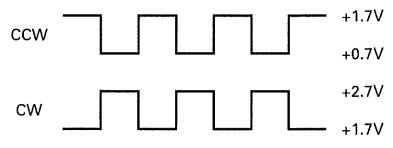


Fig.5 P7 Pin 22 TS-O

# TROUBLESHOOTING

## VERTICAL UNIT (From R/O)

No	Pin	Output Order	Signal Name	Content
U1	15	56	CH1INV	CH1-INV="ON" THEN "H" ELSE "L"
	1	55	CH1NOR	CH1-INV="ON" THEN "L" ELSE "H"
	2	54	CH2INV	CH2-INV="ON" THEN "H" ELSE "L"
	3	53	CH2NOR	CH2-INV="ON" THEN "L" ELSE "H"
	4	52	CH3INV	CH3-INV="ON" THEN "H" ELSE "L"
	5	51	CH3NOR	CH3-INV="ON" THEN "L" ELSE "H"
	6	50	CH4INV	CH4-INV="ON" THEN "H" ELSE "L"
U2	15	48	NULL	"L"
	1	47	BWL	BAND-WIDTH-LIMIT="ON" THEN "L" ELSE "H"
	2	46	CH1E	V-Mode=CH1 Select THEN "L" ELSE "H"
	3	45	CH2E	V-Mode=CH2 Select THEN "L" ELSE "H"
	4	44	CH3E	V-Mode=CH3 Select THEN "L" ELSE "H"
	5	43	CH4E	V-Mode=CH4 Select THEN "L" ELSE "H"
	6	41	ADD1E	V-Mode=CALC AND MENU CH1+CH2 THEN "L" ELSE "H"
U3	15	40	NULL	"L"
	1	39	CH13TE	T-Source="CH1" OR "CH3" THEN "L" ELSE "H"
	2	38	CH34TE	T-Source="CH3" OR "CH4" THEN "L" ELSE "H"
	3	37	CH12TE	T-Source="CH1" OR "CH2" THEN "L" ELSE "H"
	4	36	CH24TE	T-Source="CH2" OR "CH4" THEN "L" ELSE "H"
	5	35	NULL	"L"
	6	34	NULL	"L"
U4	15	32	NULL	"L"
	1	31	CH1DC	CH1-DC = "ON" THEN "H" ELSE "L"
	2	30	CH1GND	CH1-GND = "ON" THEN "L" ELSE "H"
	3	29	CH11/10	CH1-1/10-ATT = "ON" THEN "H" ELSE "L"
	4	28	CH11/100	CH1-1/100-ATT = "ON" THEN "H" ELSE "L"
	5	27	CH11/4	CH1-1/4-ATT = "ON" THEN "H" ELSE "L"
	6	26	CH1MAG	CH1-MAG = "ON" THEN "H" ELSE "L"
U5	15	24	NULL	"L"
	1	23	CH2DC	CH2-DC = "ON" THEN "H" ELSE "L"
	2	22	CH2GND	CH2-GND = "ON" THEN "L" ELSE "H"
	3	21	CH21/10	CH2-1/10-ATT = "ON" THEN "H" ELSE "L"
	4	20	CH21/100	CH2-1/100-ATT = "ON" THEN "H" ELSE "L"
	5	19	CH21/4	CH2-1/4-ATT = "ON" THEN "H" ELSE "L"
	6	18	CH2MAG	CH2-MAG = "ON" THEN "H" ELSE "L"
U6	15	16	NULL	"L"
	1	15	CH3DC	CH3-DC = "ON" THEN "H" ELSE "L"
	2	14	CH3GND	CH3-GND = "ON" THEN "L" ELSE "H"
	3	13	CH31/10	CH3-1/10-ATT = "ON" THEN "H" ELSE "L"
	4	12	CH31/100	CH3-1/100-ATT = "ON" THEN "H" ELSE "L"
	5	11	CH31/4	CH3-1/4-ATT = "ON" THEN "H" ELSE "L"
	6	10	CH3MAG	CH3-MAG = "ON" THEN "H" ELSE "L"
U7	15	8	NULL	"L"
	1	7	CH4DC	CH4-DC = "ON" THEN "H" ELSE "L"
	2	6	CH4GND	CH4-GND = "ON" THEN "L" ELSE "H"
	3	5	CH41/10	CH4-1/10-ATT = "ON" THEN "H" ELSE "L"
	4	4	CH41/100	CH4-1/100-ATT = "ON" THEN "H" ELSE "L"
	5	3	CH41/4	CH4-1/4-ATT = "ON" THEN "H" ELSE "L"
	6	2	CH4MAG	CH4-MAG = "ON" THEN "H" ELSE "L"

Table 1 Serial Transfer




Fig. 6




Fig. 7




Fig. 8




Fig. 9






Fig. 10

- 1 kHz Sine Wave
- 60 mV<sub>P-P</sub> Input
- V<sub>ATT</sub>: 10 mV/div

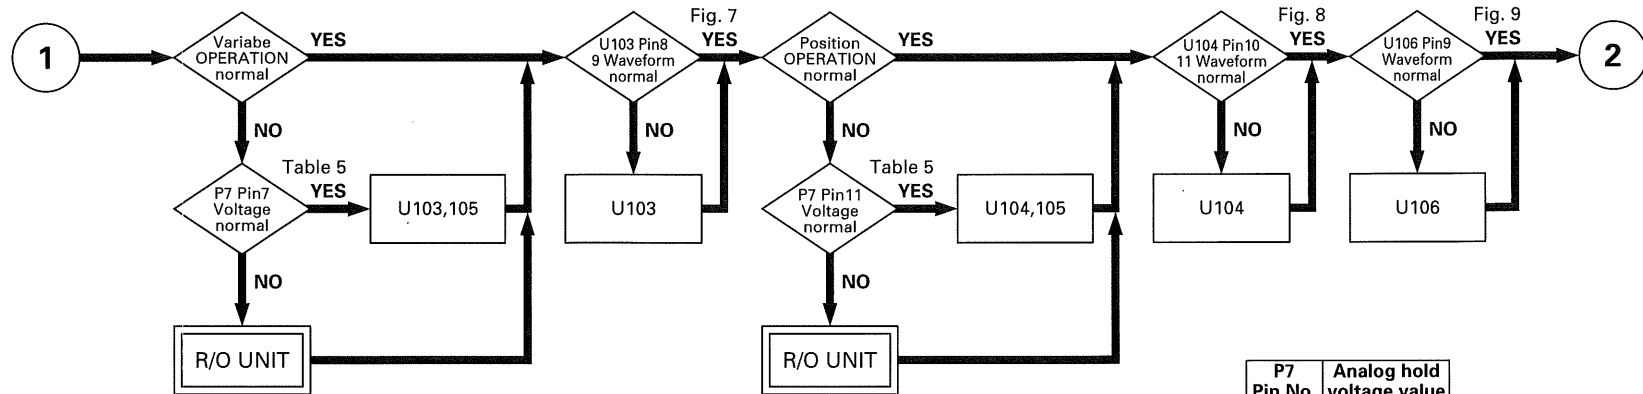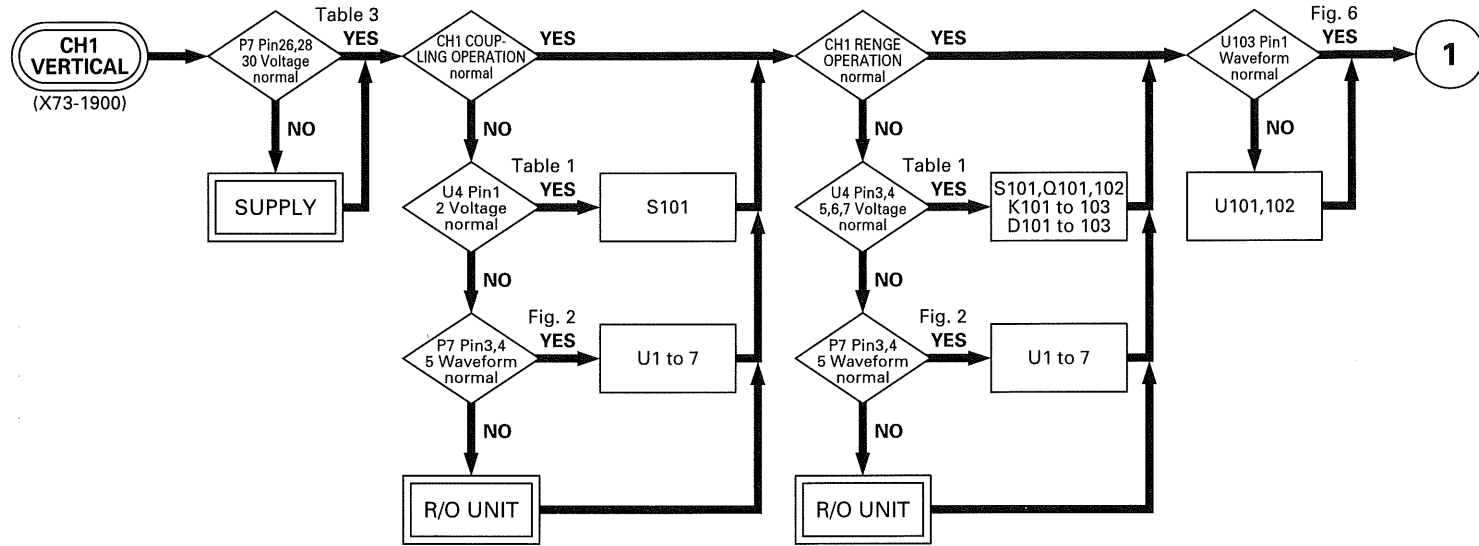

P7 Pin No.	Analog hold voltage value
7	0~-4 V
8	0~-4 V
9	0~-4 V
10	0~-4 V
11	0~-4 V
12	0~-4 V
13	0~-4 V
14	0~-4 V


Table 5 Analog Hold Voltage

P8 Pin No.	Voltage [V]
2	+60
11,12	+10
13,14	-10
26	+140



Table 4 Voltage

P7 Pin No.	Voltage [V]
25,26	+10
27,28	-10
29,30	+5



Table 3 Voltage

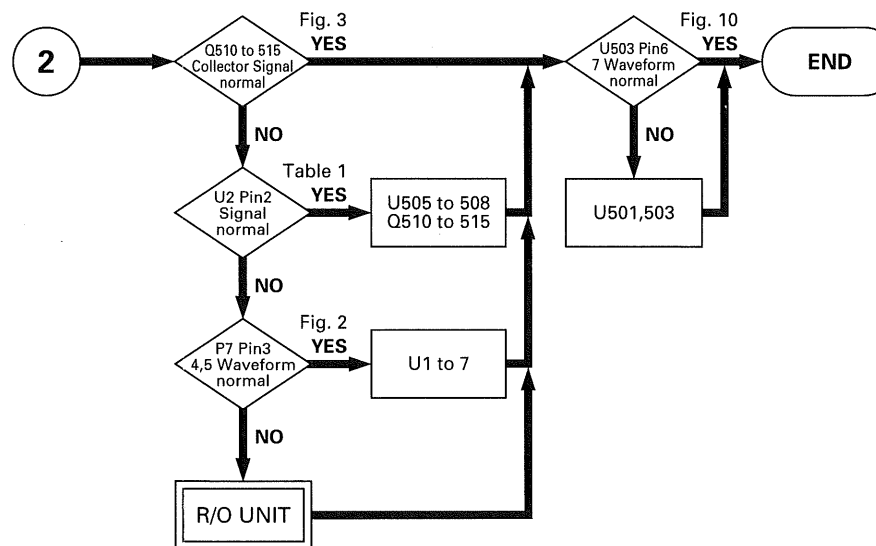

# TROUBLESHOOTING

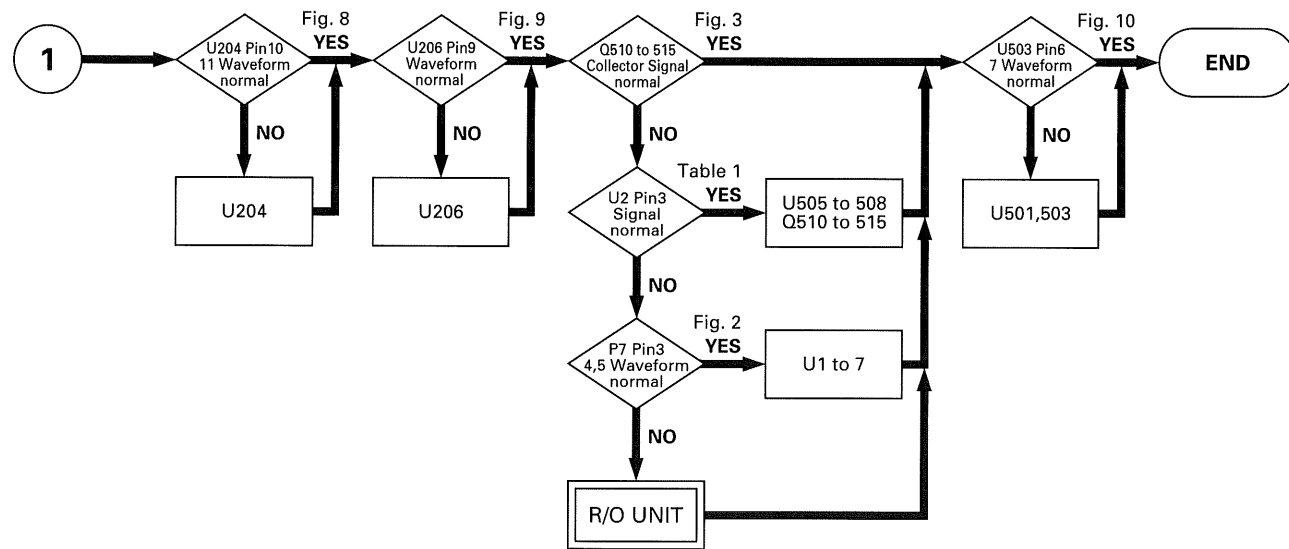
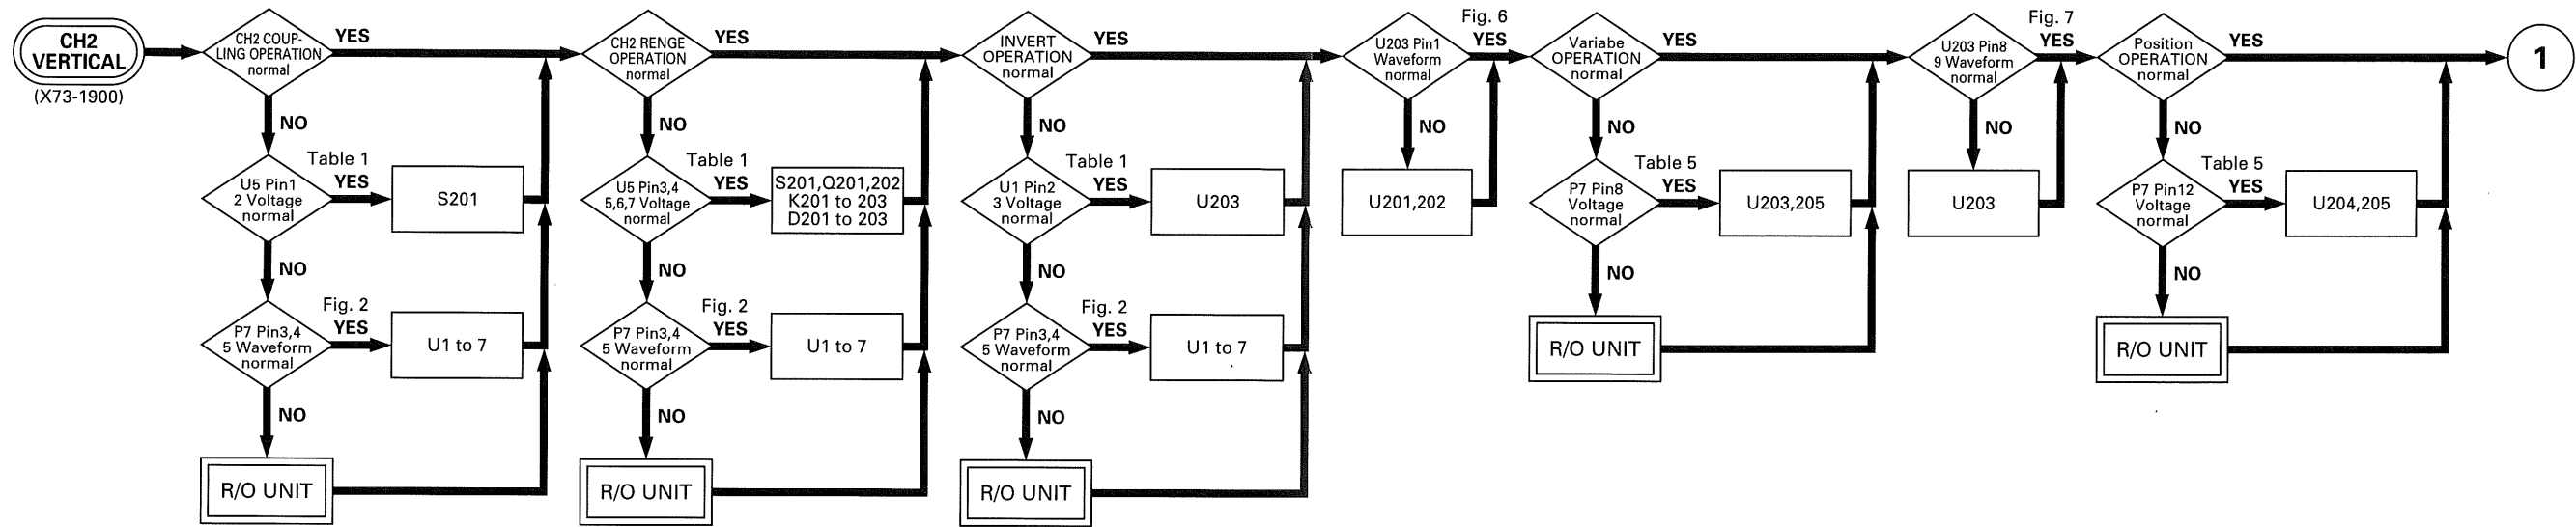


# TROUBLESHOOTING

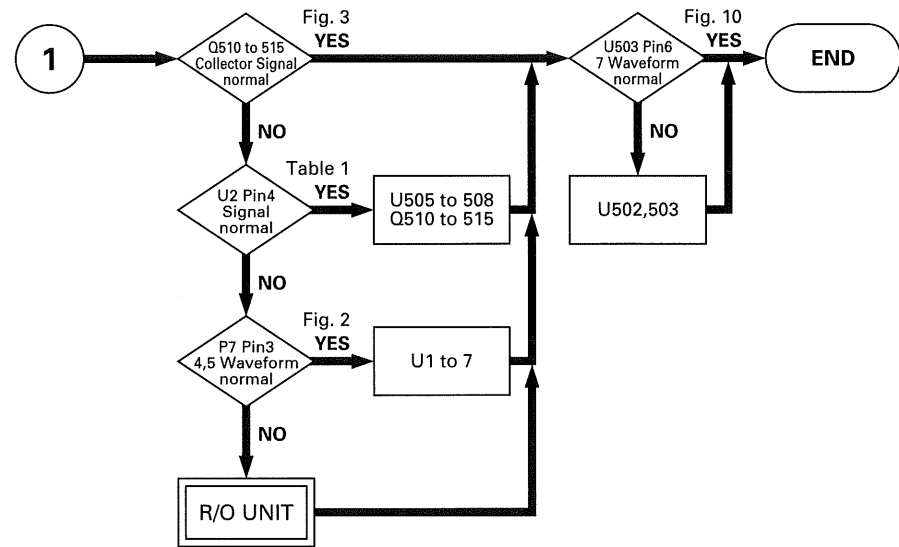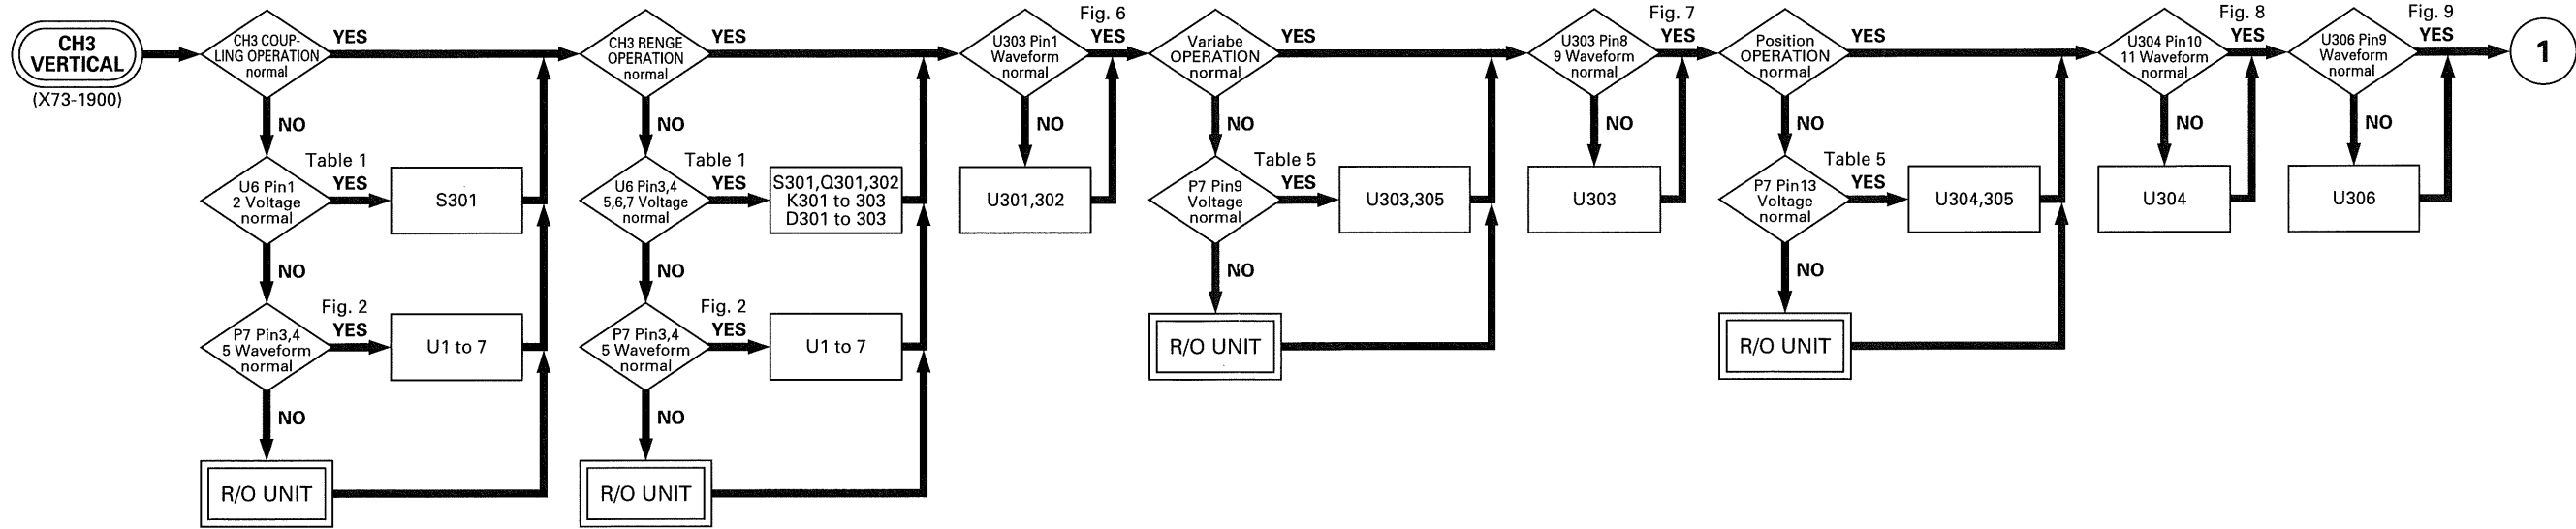



# TROUBLESHOOTING

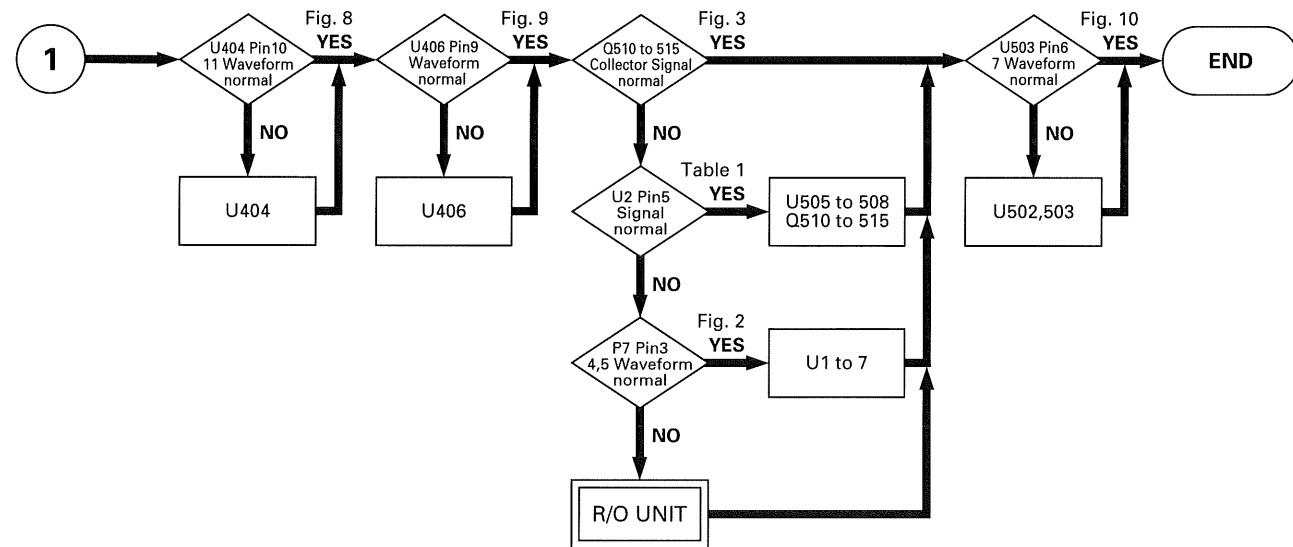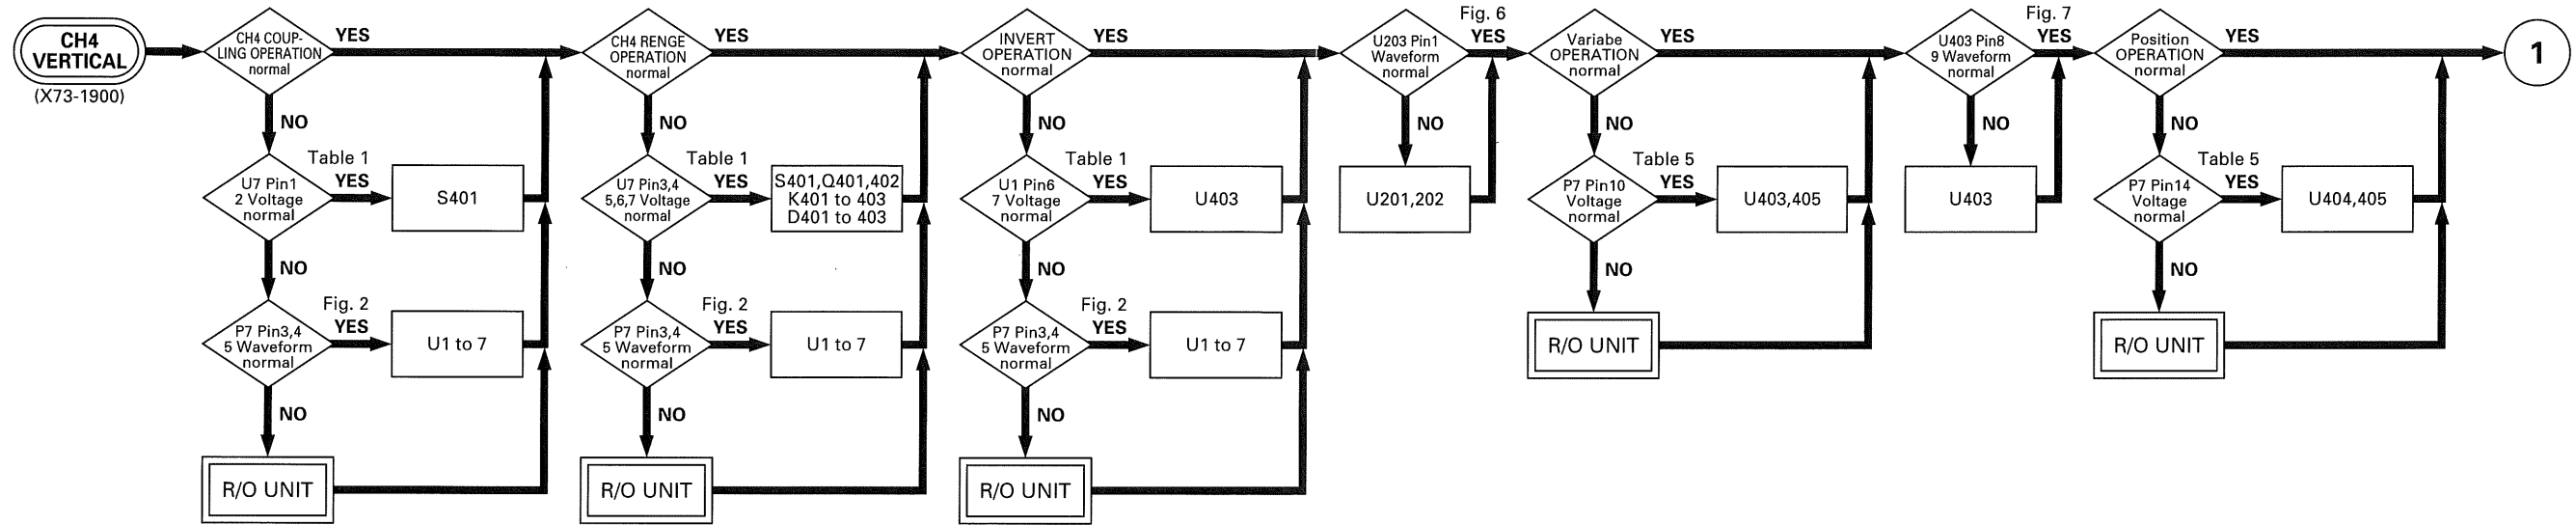

# TROUBLESHOOTING

- 1 kHz Sine Wave
- 60 mV<sub>P-P</sub> Input
- V<sub>ATT</sub>: 10 mV/div


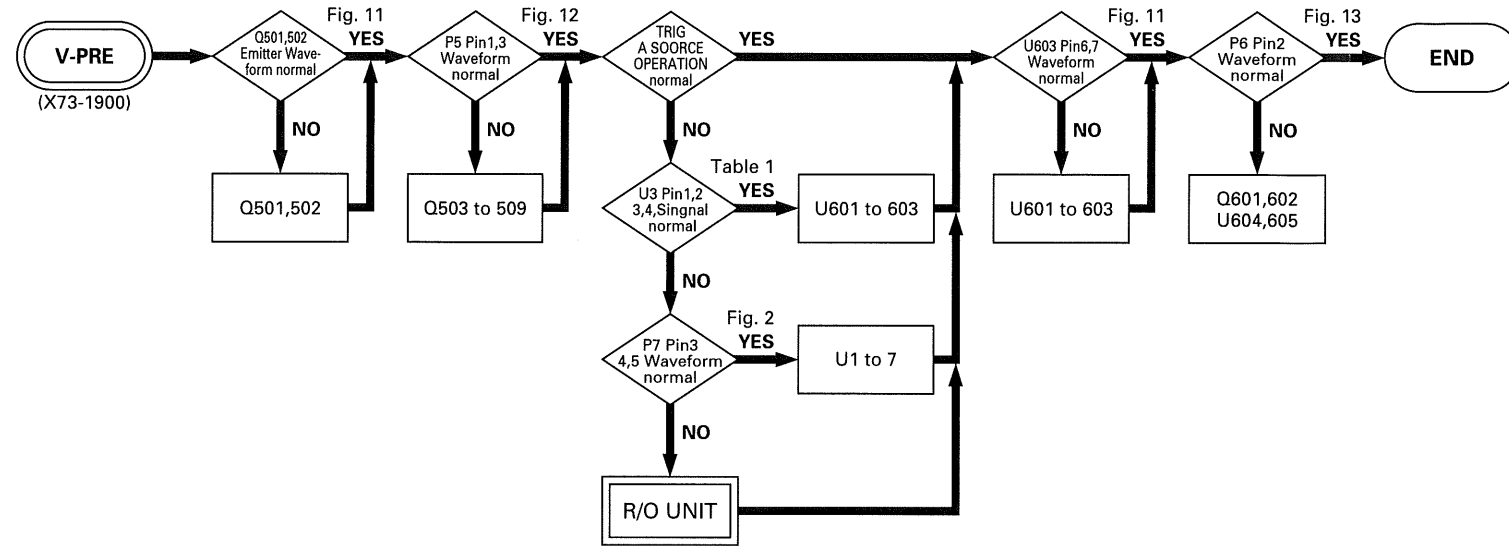


Fig. 11




Fig. 14




Fig. 12




Fig. 15








Fig. 13

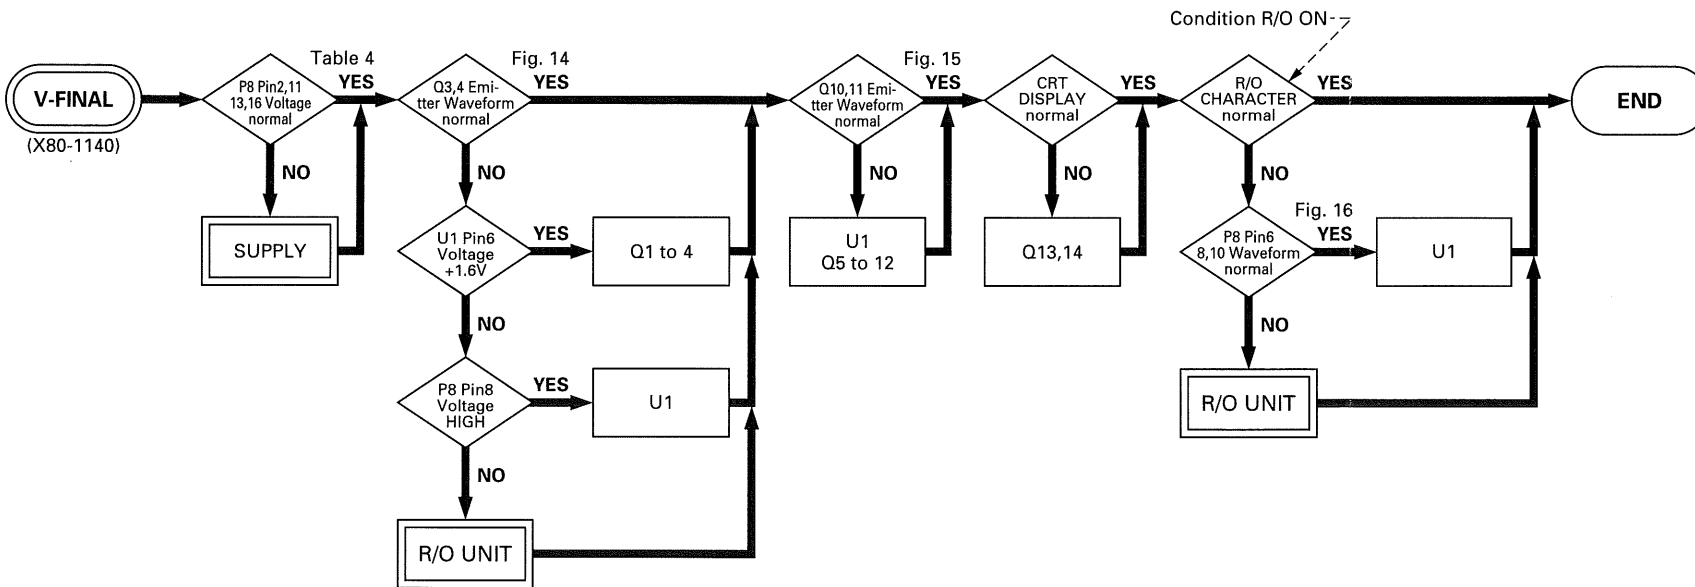

(a) P8 Pin6 R/O Y




(b) P8 Pin8 R/O REQ





(c) P8 Pin10 R/O X

Fig. 16

# TROUBLESHOOTING

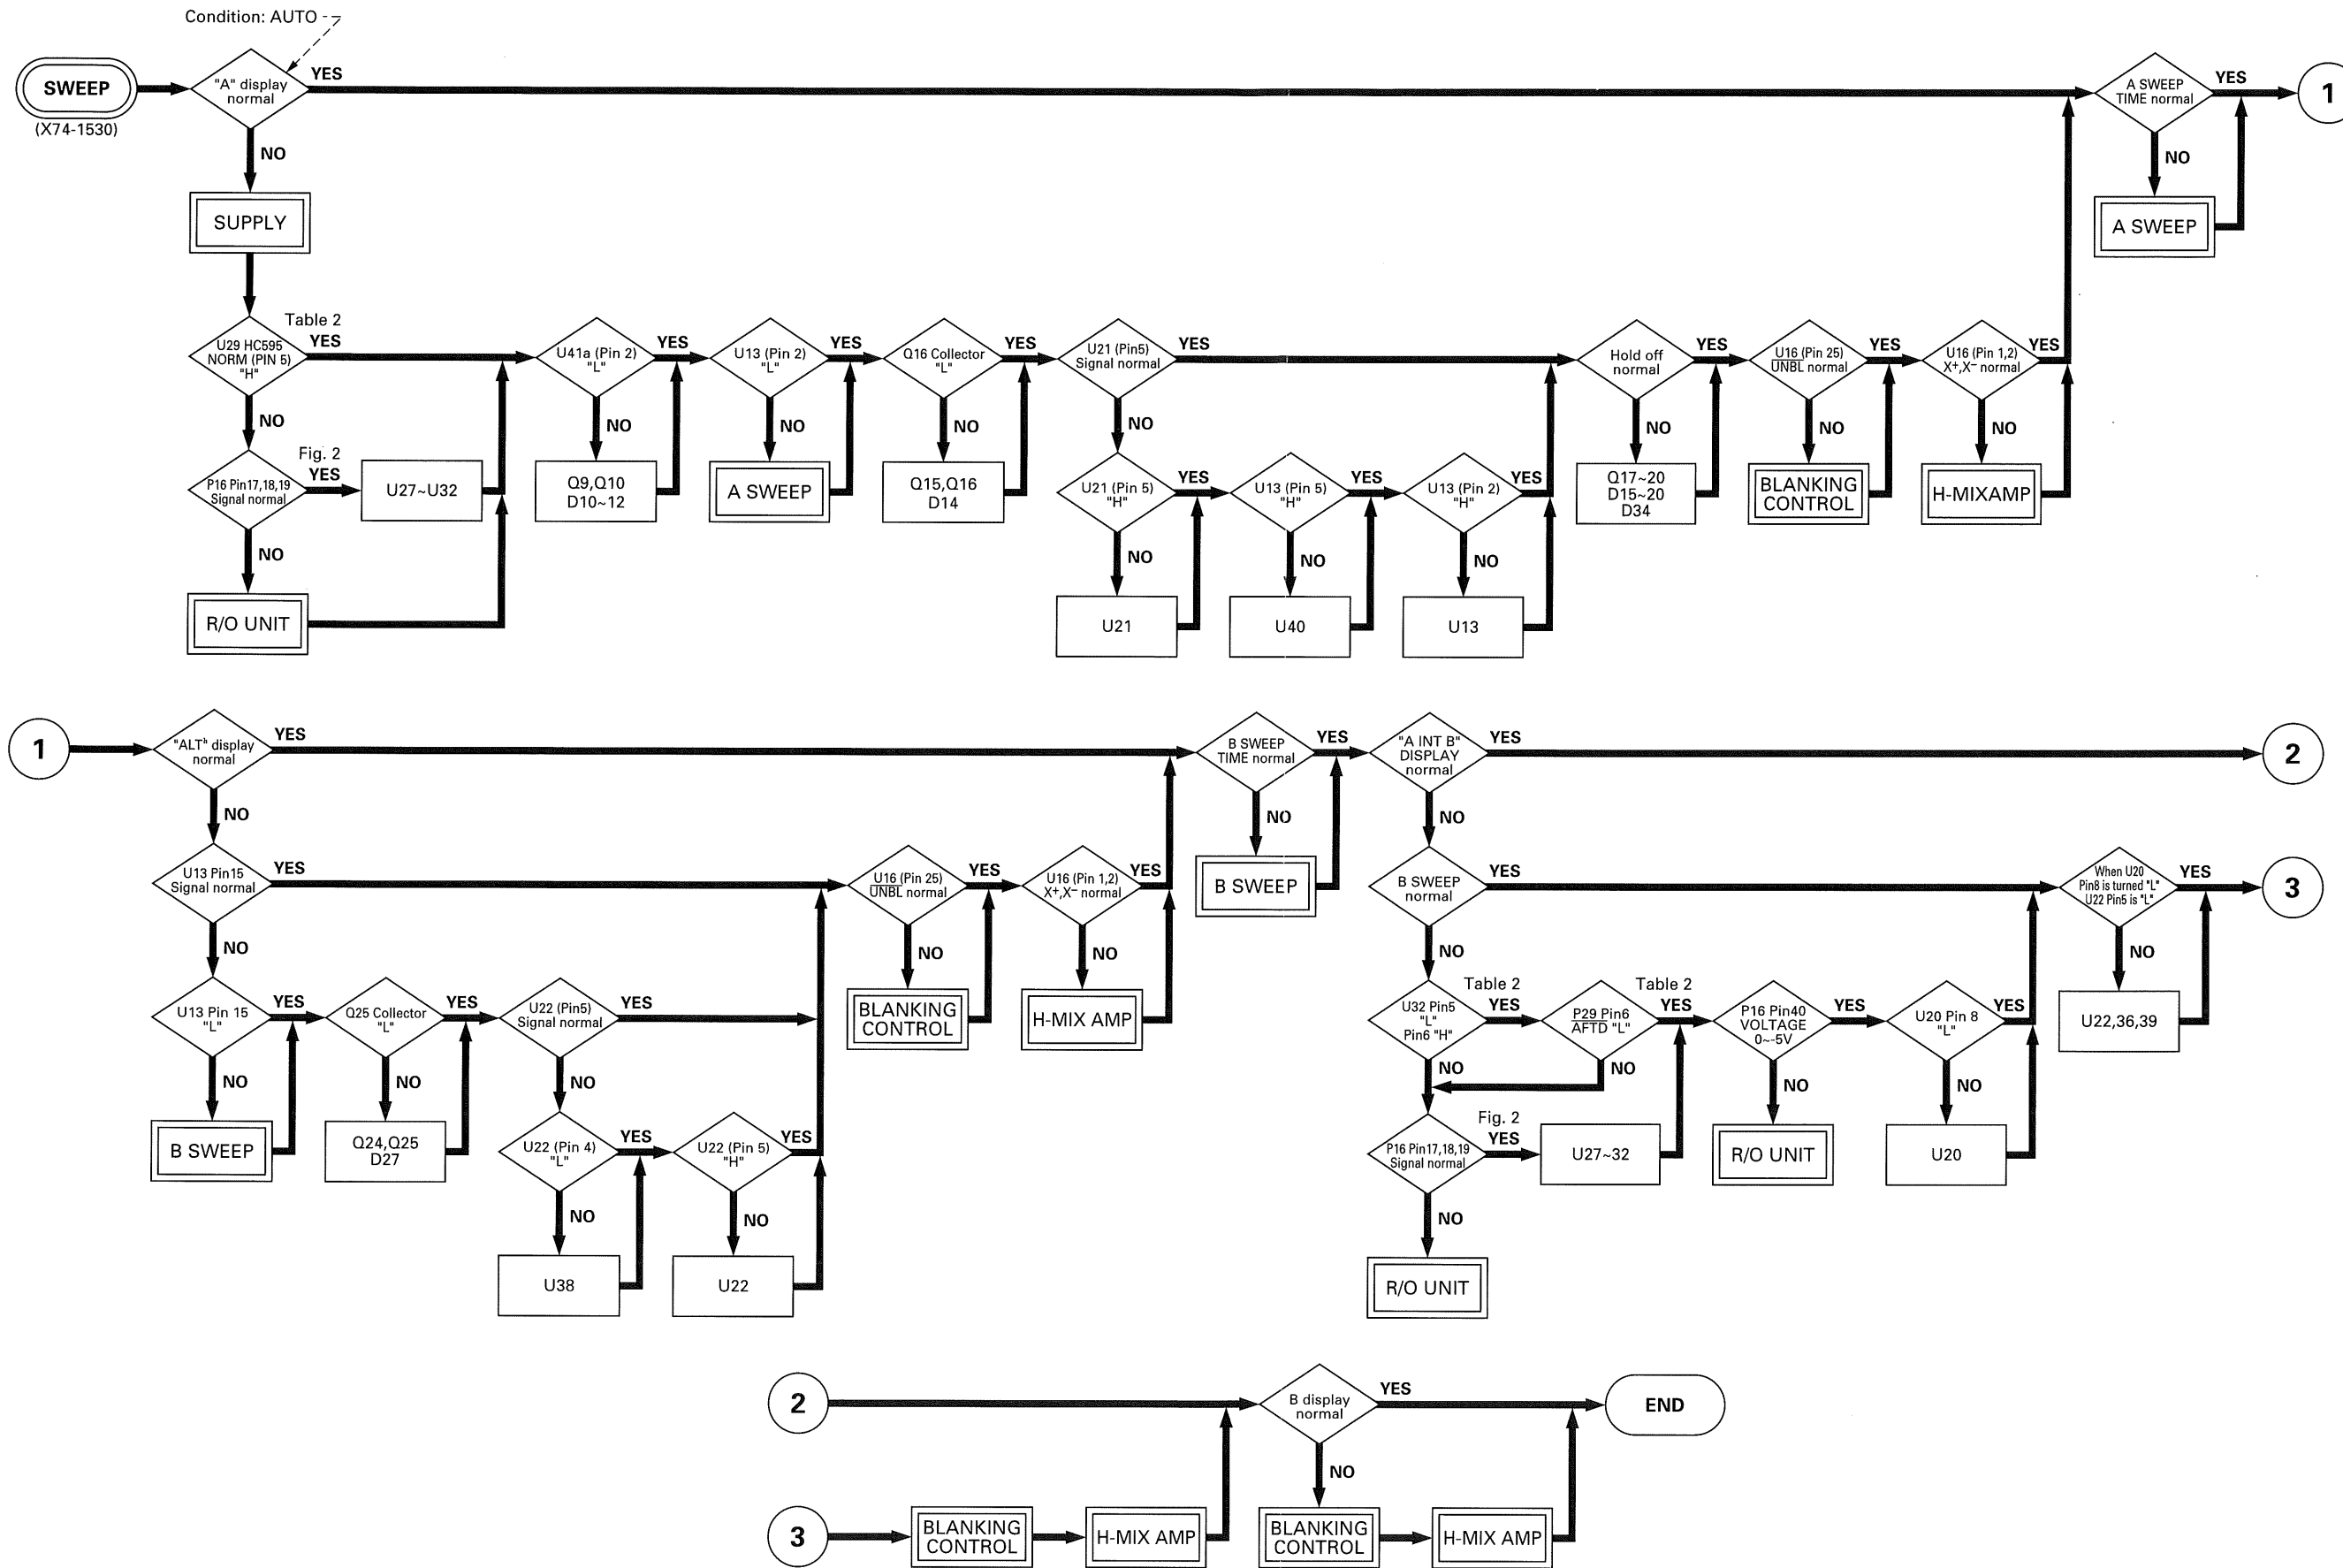

# TROUBLESHOOTING

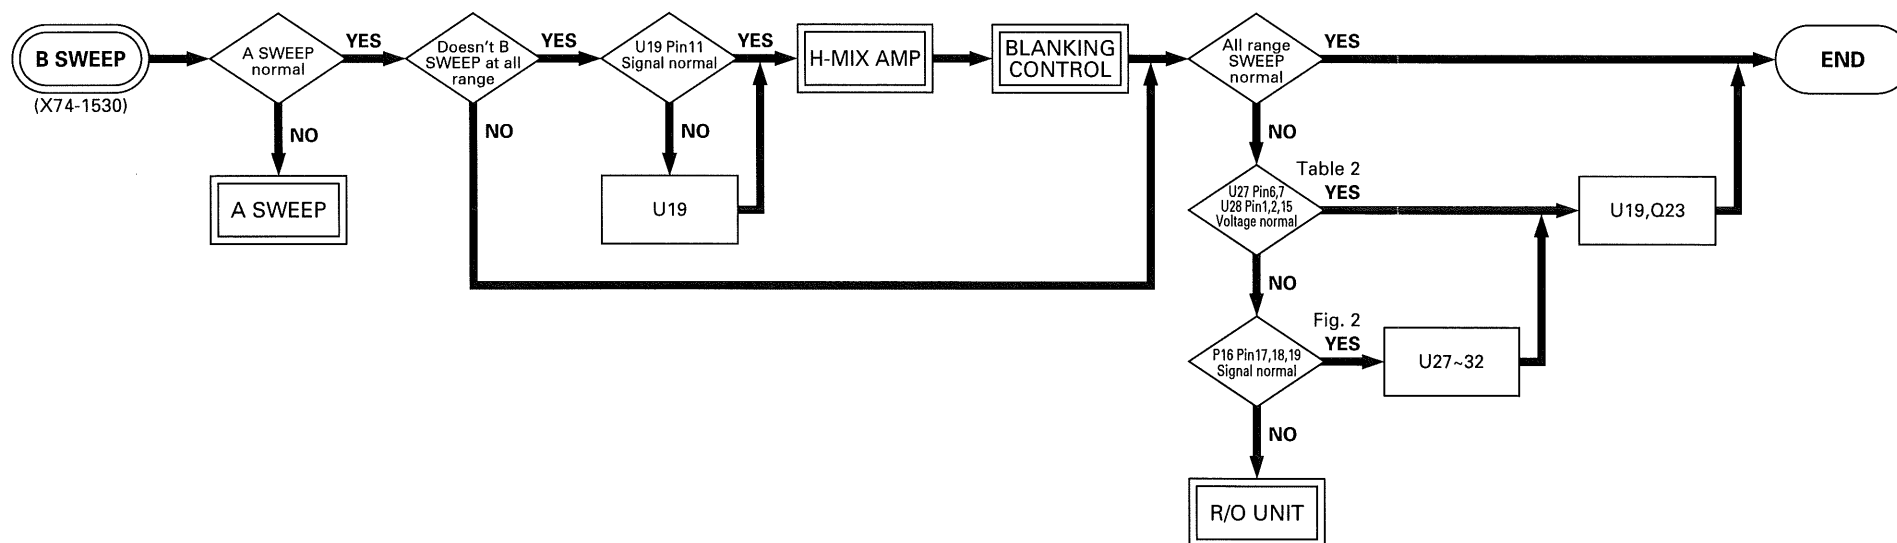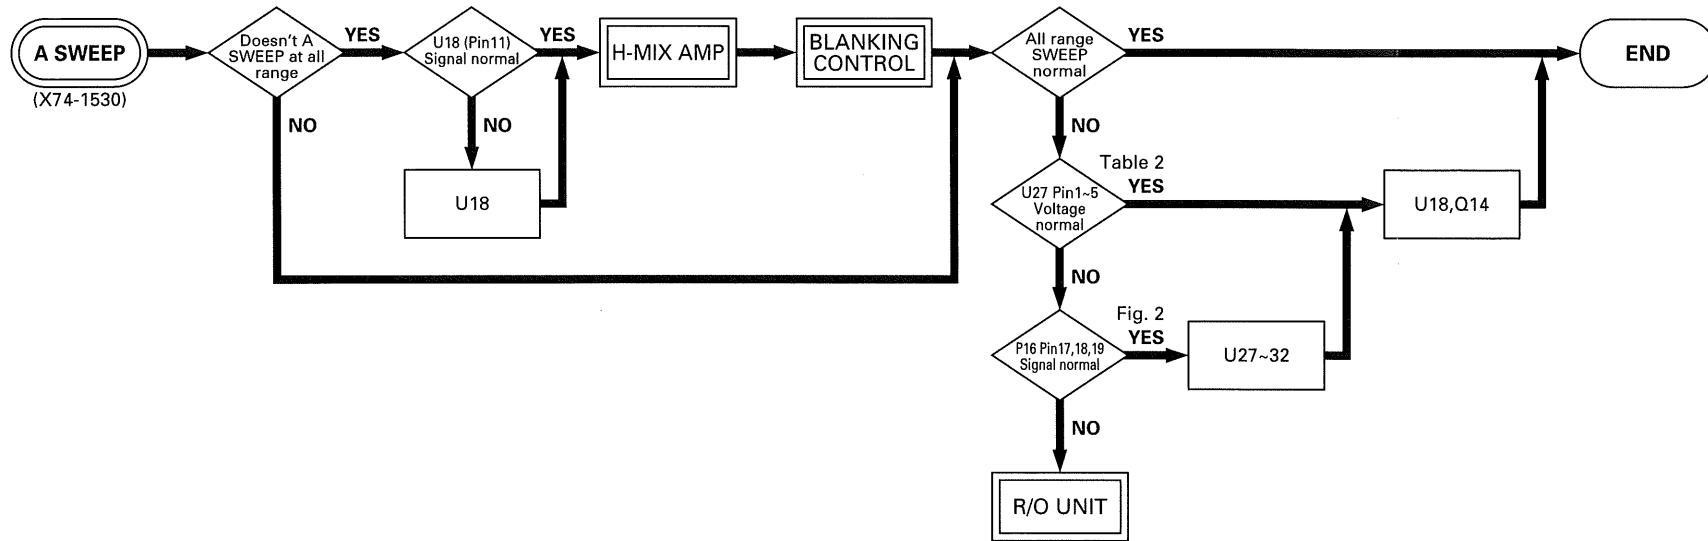




HORIZONTAL UNIT (From R/O)

No	HC595	Output Order	Signal Name	Content
06	QA	48	I XY	H-Mode="XY" THEN "L" ELSE "H"
	QB	47	ASD0	A SWEEP DATA 0
	QC	46	ASD1	A SWEEP DATA 1
	QD	45	ASD2	A SWEEP DATA 2
	QE	44	ASD3	A SWEEP DATA 3
	QF	43	ASDC	A SWEEP DATA C
	QG	42	BSD0	B SWEEP DATA 0
	QH	41	BSD1	B SWEEP DATA 1
05	QA	40	BSD2	B SWEEP DATA 2
	QB	39	BSD3	B SWEEP DATA 3
	QC	38	BSDC	B SWEEP DATA C
	QD	37	I AC	T-Coupl="AC" THEN "L" ELSE "H"
	QE	36	I HFLN	T-Coupl="HFrej" OR A-T-Source="LINE" THEN "L" ELSE "H"
	QF	35	I TSLP	T-Coupl="TV-*" AND SLOPE="-" THEN "L" ELSE "H"
	QG	34	EXT	MODE = "LINE TRIG" THEN "L" ELSE (EXT TRIG) THEN "H"
	QH	33	NULL	"L"
04	QA	32	I FIX	T-Mode="FIX" THEN "L" ELSE "H"
	QB	31	LINE	A-T-Source="LINE" OR "EXT" THEN "H" ELSE "L"
	QC	30	TV	T-Coupl="TV-*" THEN "H" ELSE "L"
	QD	29	SLP+	T-Coupl="AC,HFrej,DC" AND SLOPE="+" THEN "L" ELSE "H"
	QE	28	SLP-	T-Coupl="AC,HFrej,DC" AND SLOPE="-" THEN "L" ELSE "H"
	QF	27	NORM	T-Mode="NORM" OR "SINGLE" THEN "L" ELSE "H"
	QG	26	APTD	B-Trig-Source="AFTER DELAY" THEN "L" ELSE "H"
	QH	25	STO	SCOPE-mode="STORAGE" THEN "H" ELSE "L"
03	QA	24	I TVL	T-Coupl="TV-L" THEN "L" ELSE "H"
	QB	23	XYSGL	H-Mode="XY" AND single-trace THEN "H" ELSE "L"
	QC	22	TCD0	Trig Counter DATA LSB
	QD	21	TCD1	Trig Counter DATA
	QE	20	TCD2	Trig Counter DATA
	QF	19	TCD3	Trig Counter DATA
	QG	18	TCD4	Trig Counter DATA
	QH	17	TCD5	Trig Counter DATA
02	QA	16	TCD6	Trig Counter DATA
	QB	15	TCD7	Trig Counter DATA
	QC	14	TCD8	Trig Counter DATA
	QD	13	TCD9	Trig Counter DATA
	QE	12	TCD10	Trig Counter DATA MSB
	QF	11	TCE	B-T-Source="COUNT" THEN "L" ELSE "H"
	QG	10	SGL	T-Mode="SINGLE" OR Storage-Mode="EQU" THEN "L" ELSE "H"
	QH	9	CHOP	V-Mode="CHOP" THEN "L" ELSE "H"
01	QA	8	TVA	T-Coupl="TV-*" THEN "L" ELSE "H"
	QB	7	TRGD	B-T-Source="TRIG'D" or "COUNT" THEN "L" ELSE "H"
	QC	6	EQU	Storage-Mode="EQU" THEN "L" ELSE "H"
	QD	5	I MAG	H-MAG="ON" THEN "L" ELSE "H"
	QE	4	I A	H-Mode="A" OR "XY" THEN "L" ELSE "H"
	QF	3	I B	H-Mode="B" THEN "L" ELSE "H"
	QG	2	ALT+B	H-Mode="ALT" OR "B" THEN "H" ELSE "L"
	QH	1	ALT	H-Mode="ALT" THEN "H" ELSE "L"

↓ : Indicates the negative logic data.

Table 2 Serial Transfer




# TROUBLESHOOTING

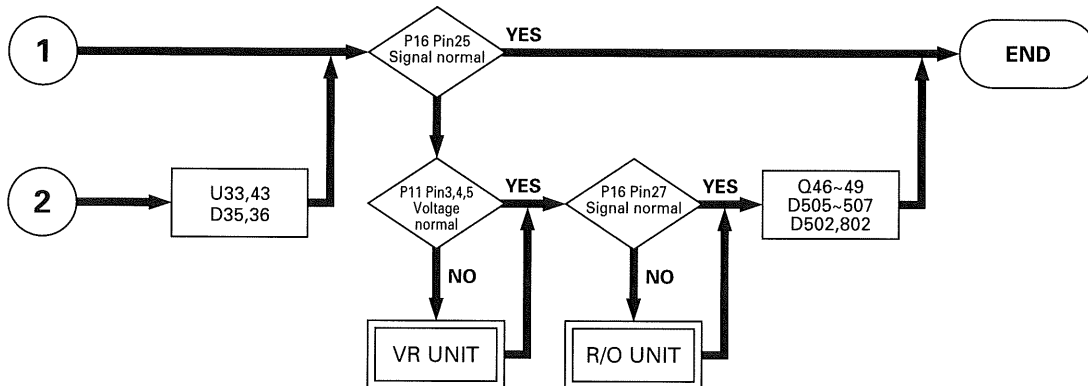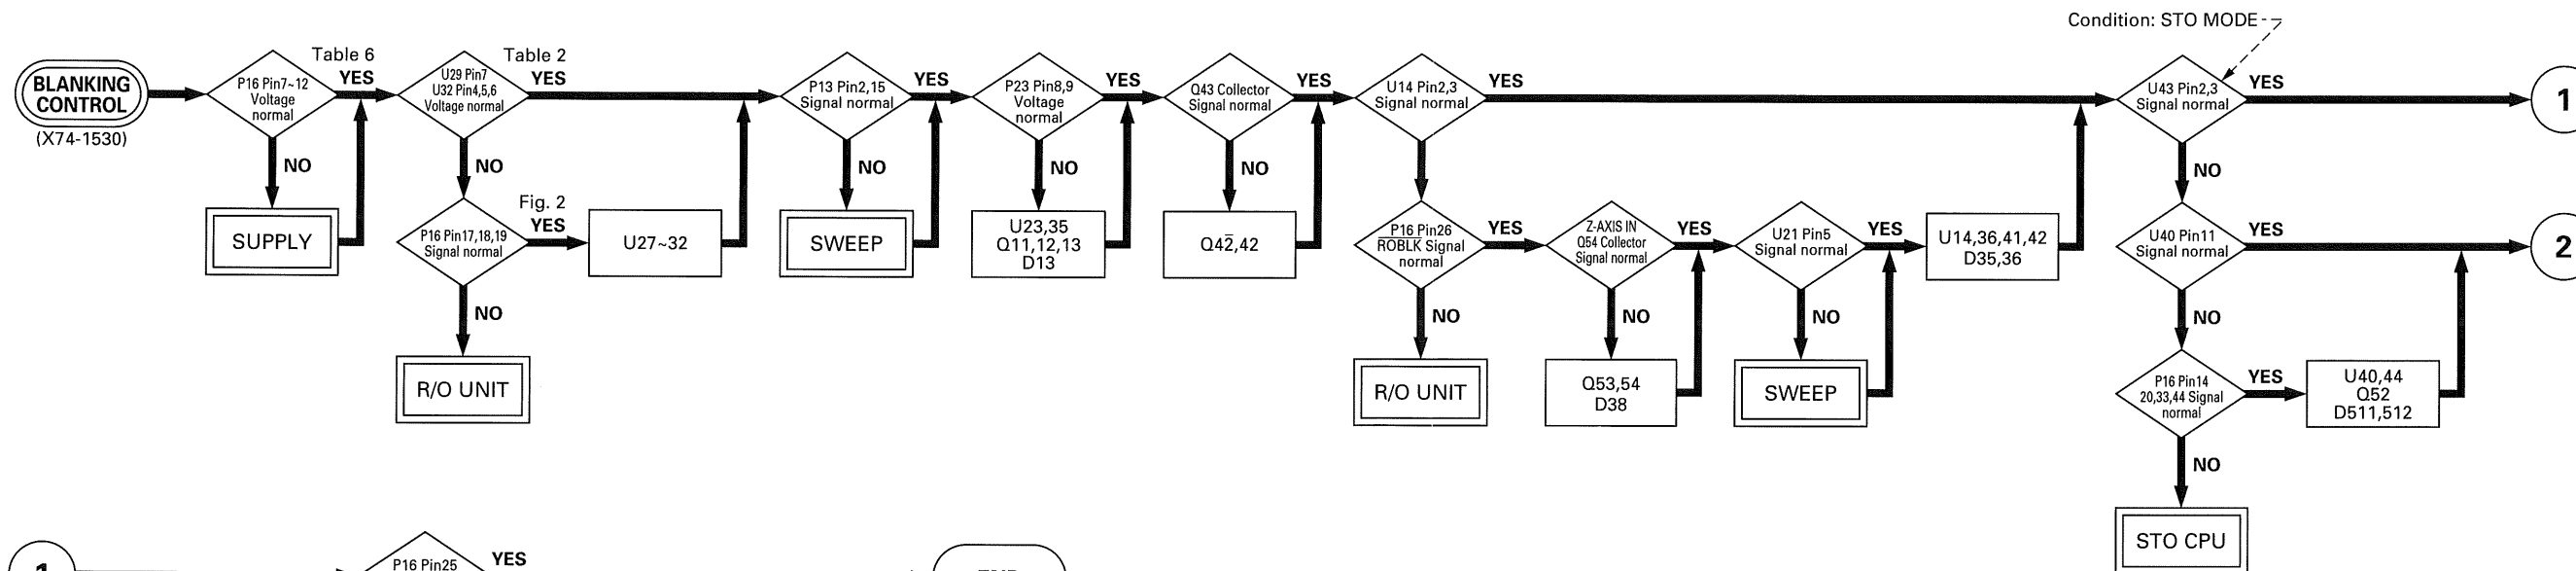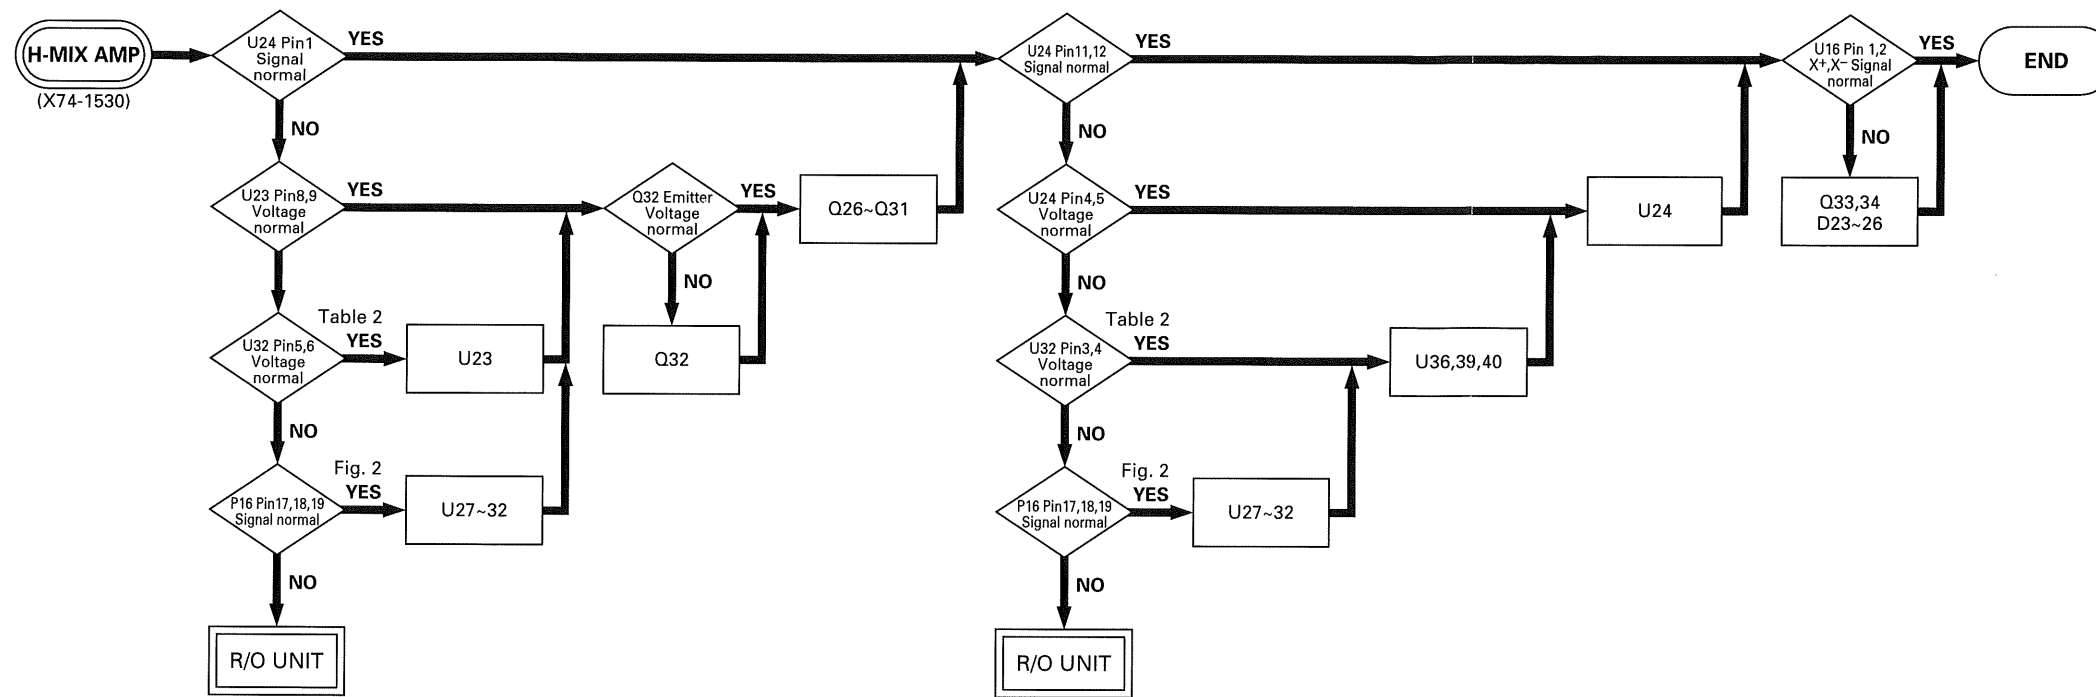




P16 Pin No.	Voltage [V]
7	-10
8	-10
9	+10
10	+10
11	+5
12	+5

Table 6 Voltage




# TROUBLESHOOTING

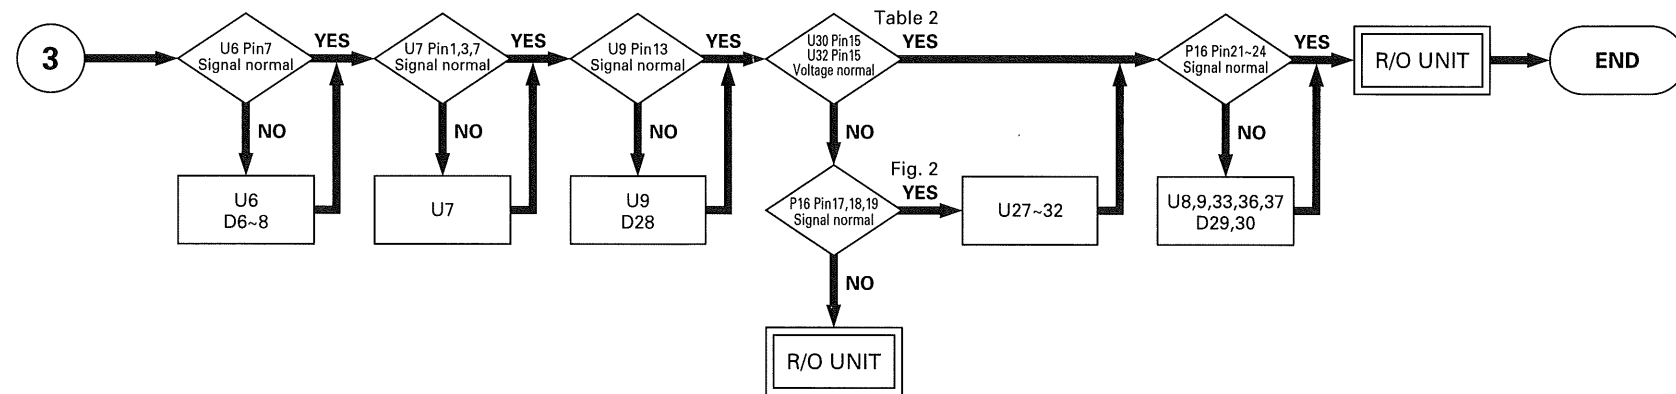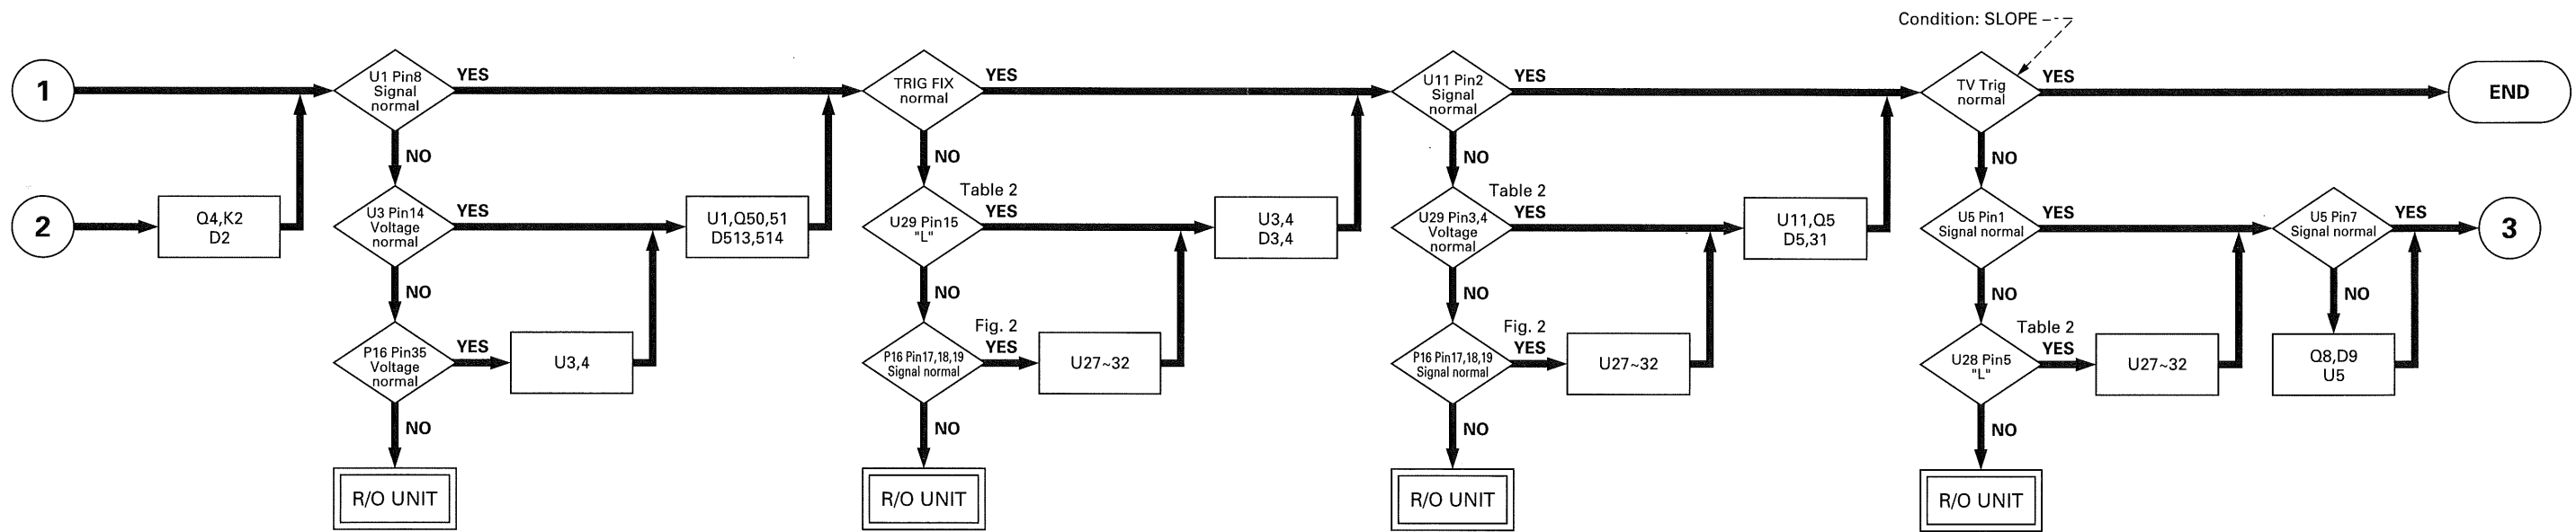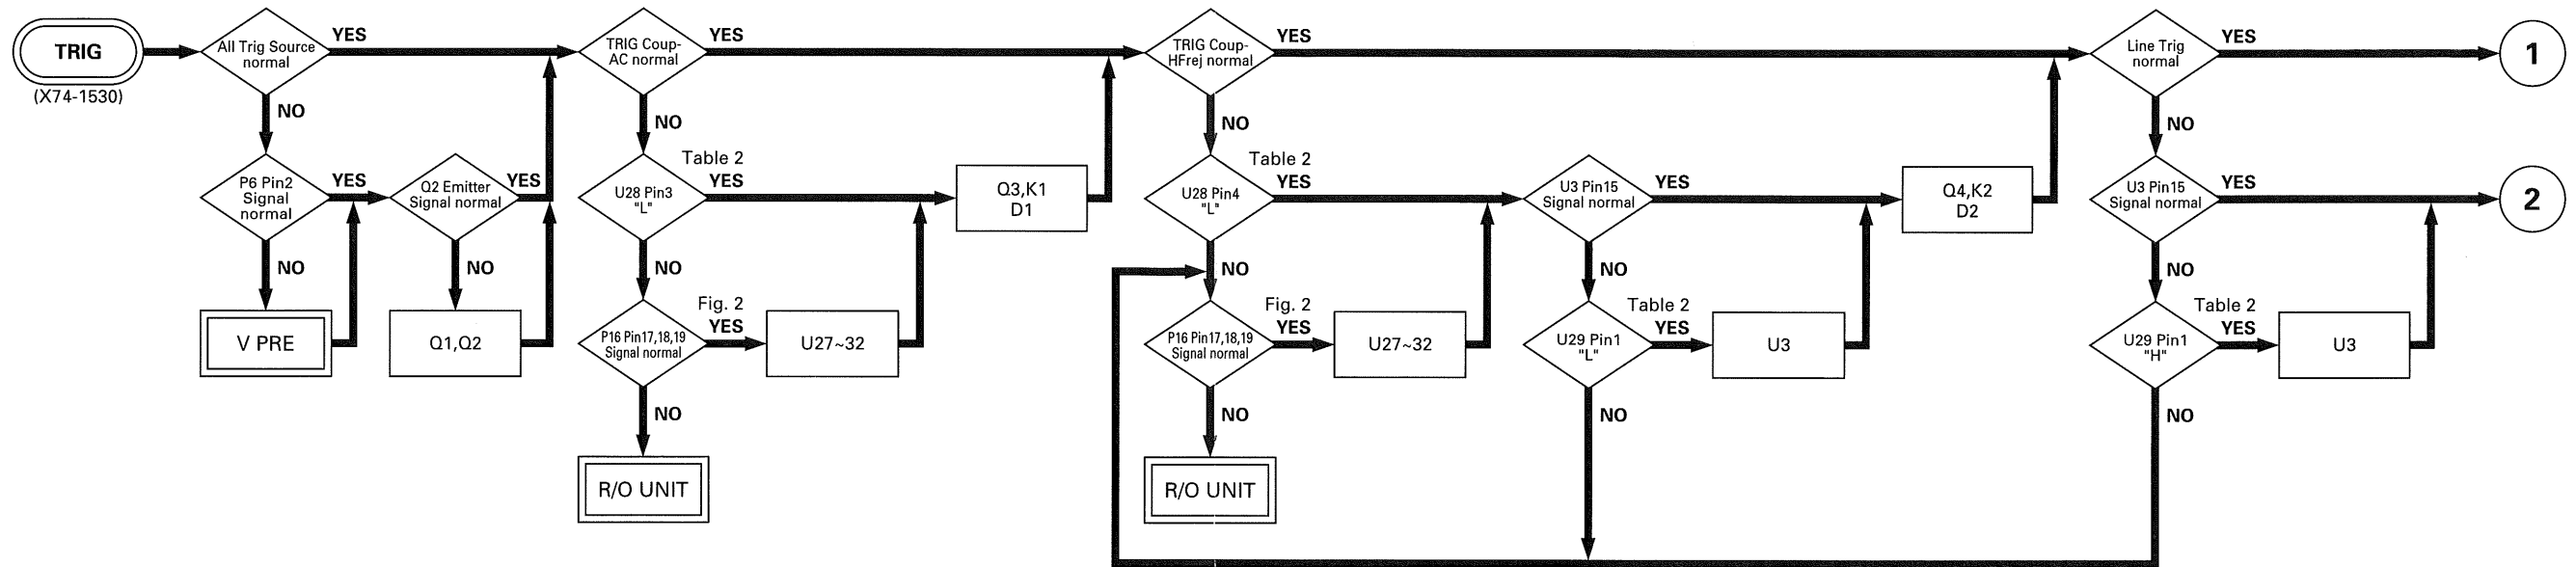

# TROUBLESHOOTING

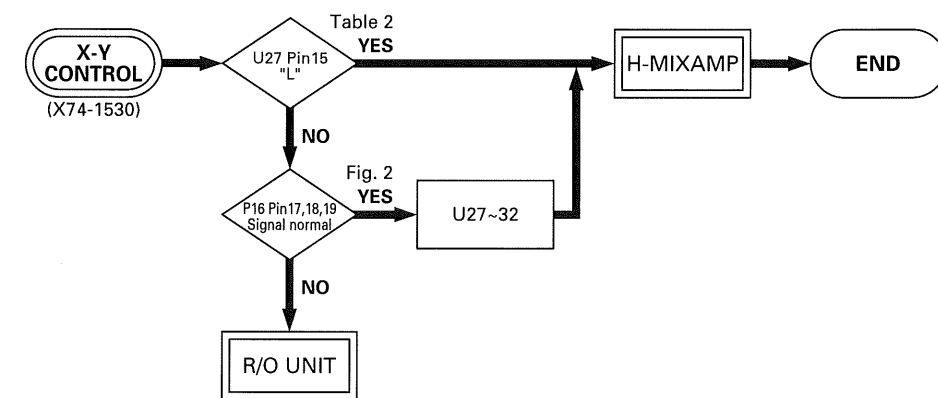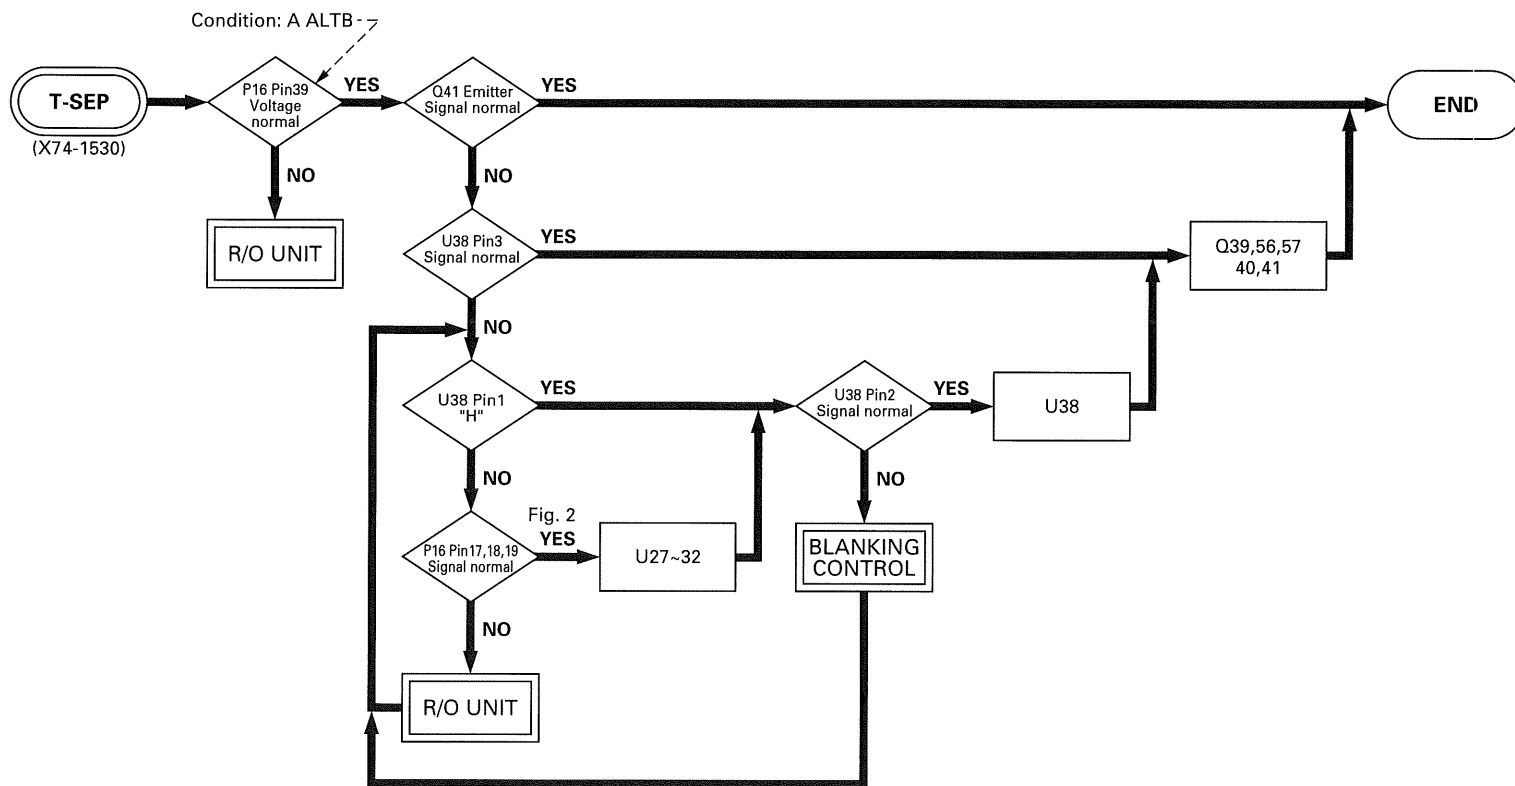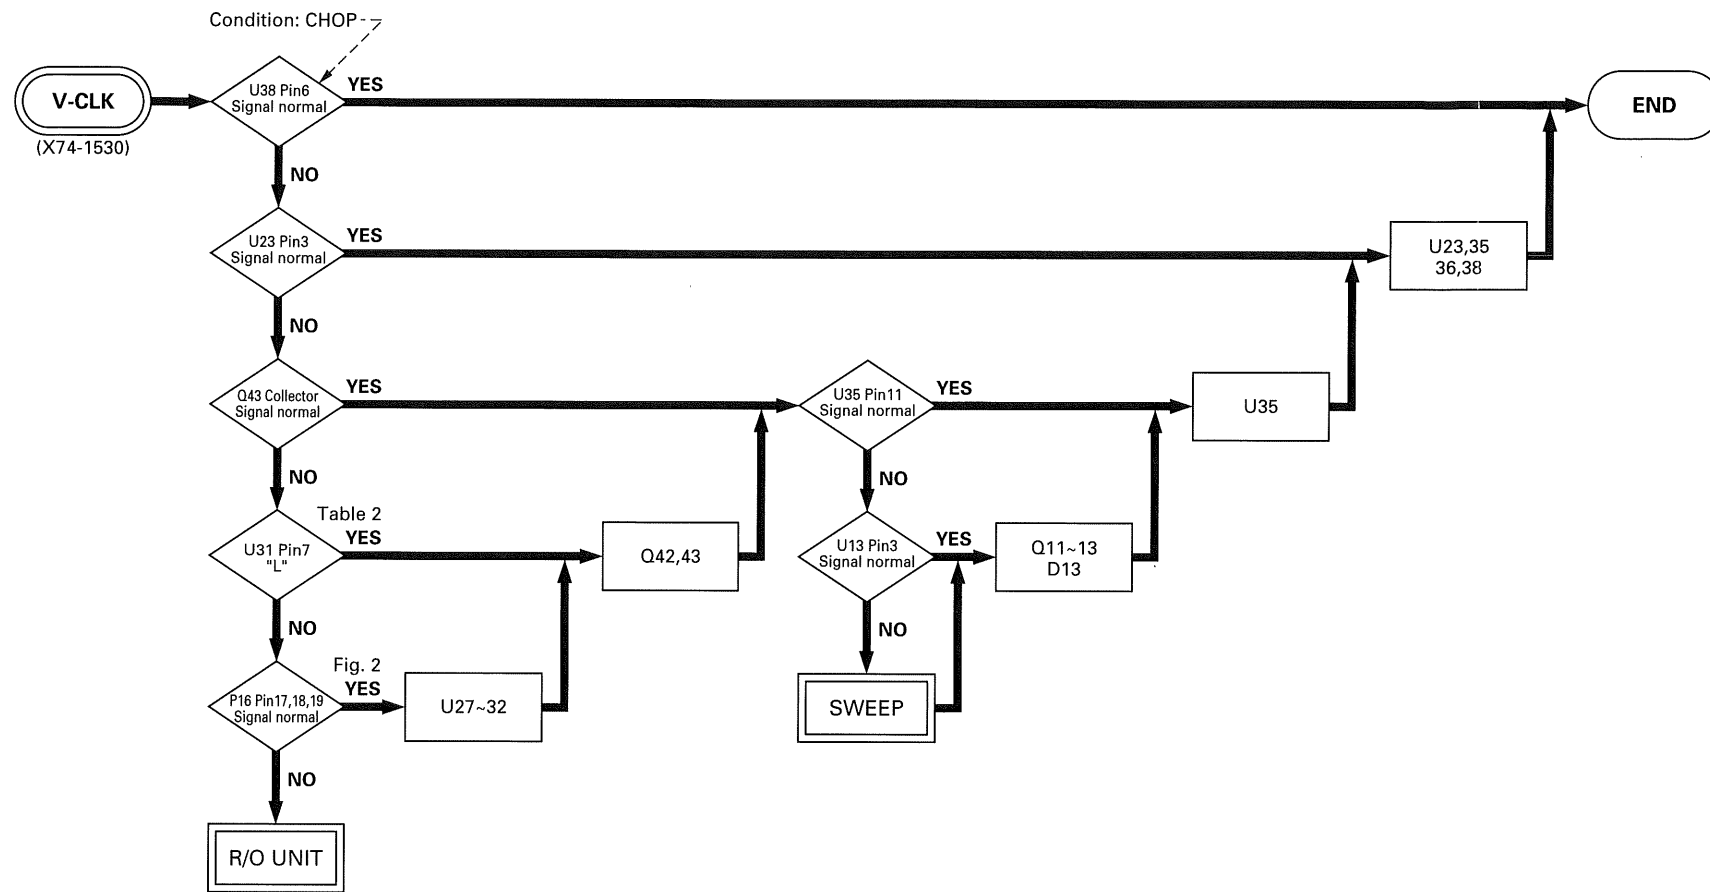


# TROUBLESHOOTING

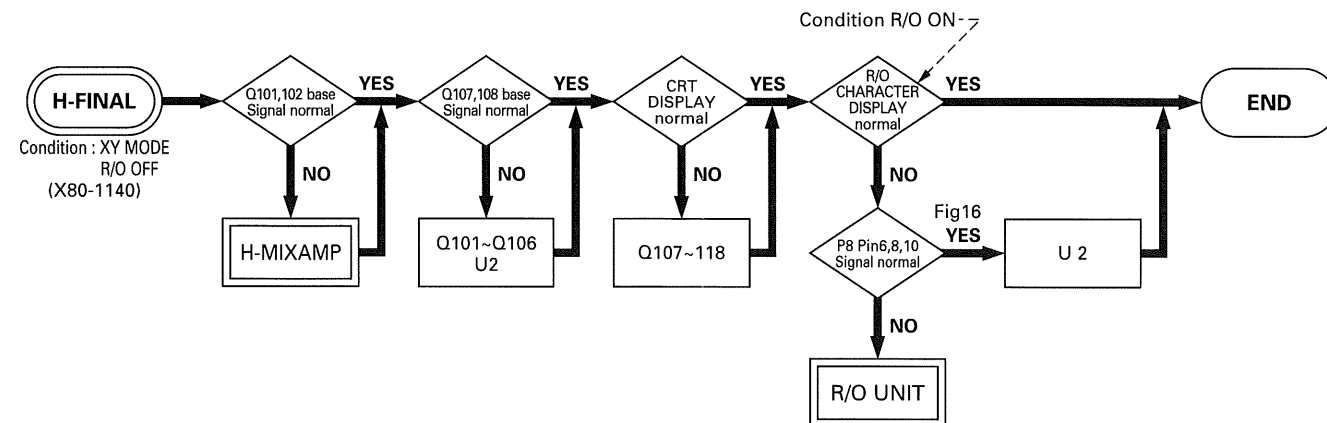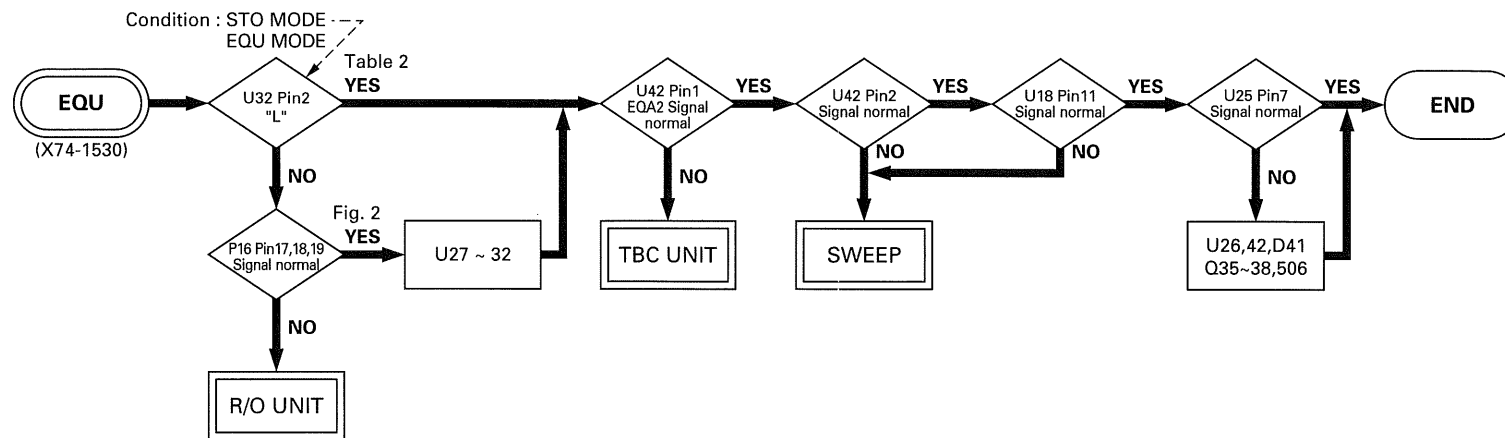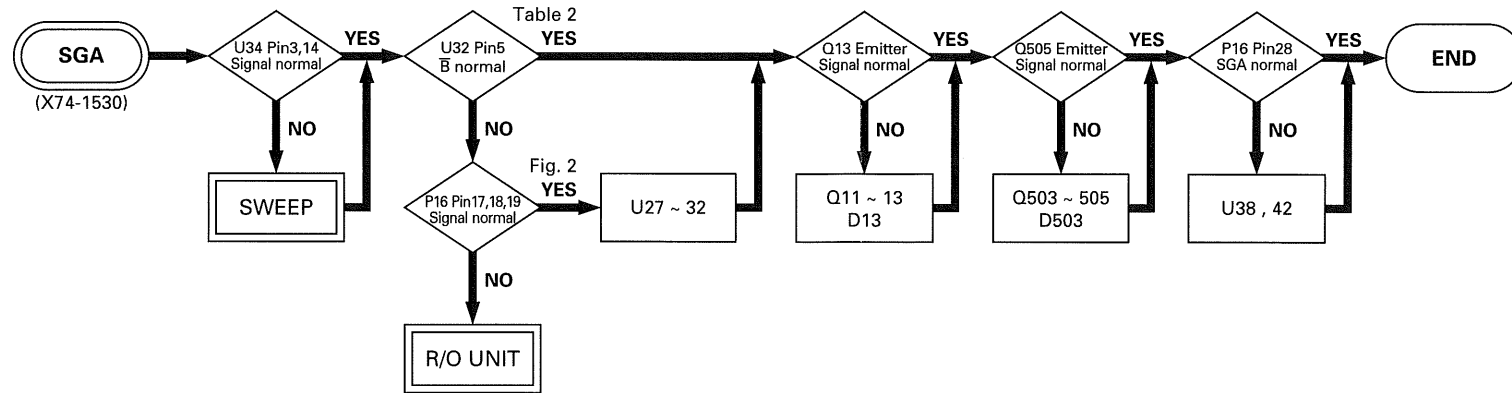



# TROUBLESHOOTING

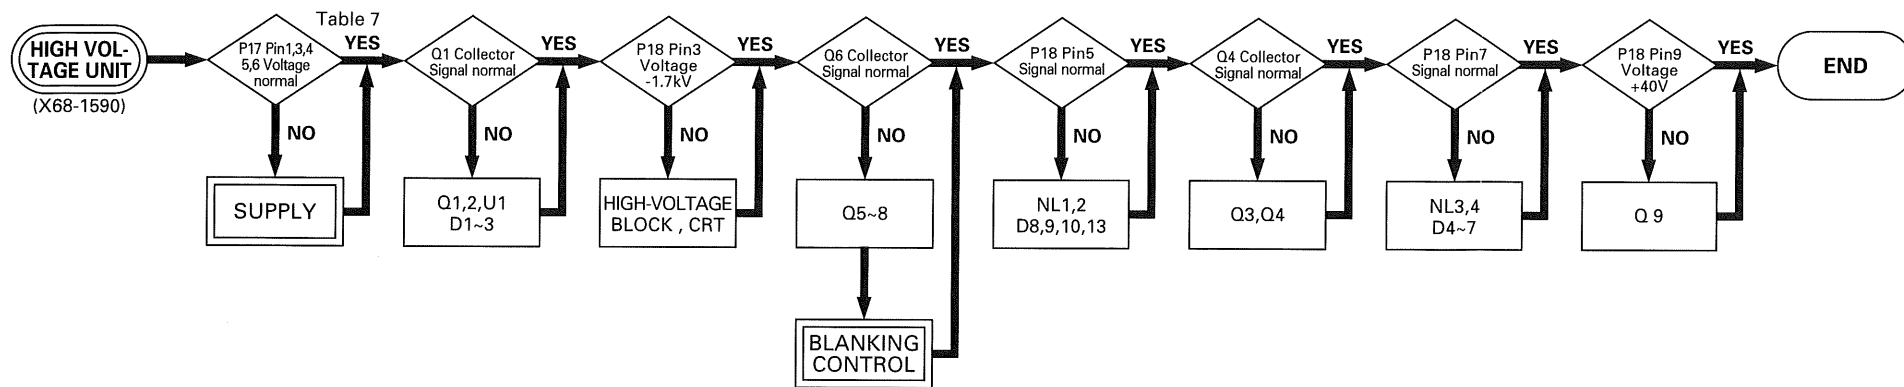


P17 Pin No.	Voltage [V]
1	+140
3	+12
4	-12
5	+10
6	-10

**Table 7 Voltage**

P29 Pin No.	Voltage [V]
24	+5
26	+5

**Table 8 Voltage**

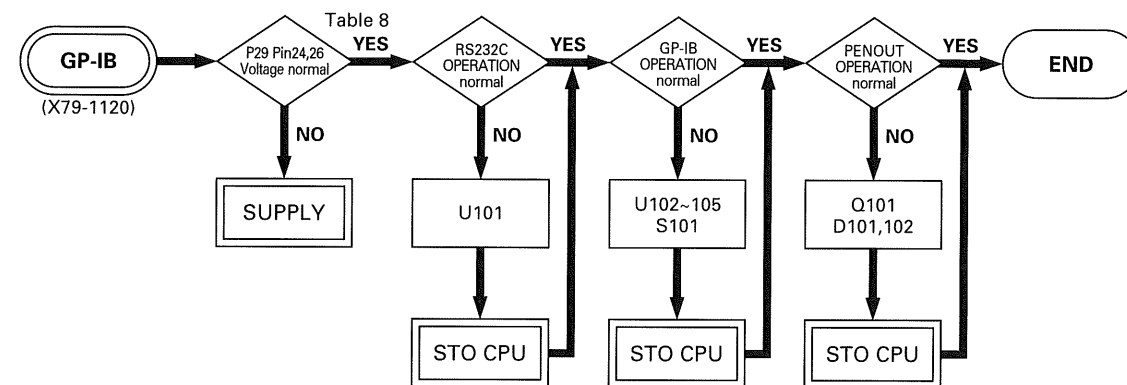

P No.	Pin No.	Voltage [V]
19	2	+12
19	3	+12
19	4	+10
19	5	+10
19	6	+10
19	8	-12
19	9	-12
19	10	-10
19	11	-10
19	12	-10
20	2	-5
20	3	-5
20	4	-5
20	5	-5
20	7	+5
20	8	+5
20	9	+5
20	10	+5
21	4	+60
21	6	+140


**Table 9 Voltage**

P No.	Pin No.	Voltage [V]
24	2	+12
24	3	+12
24	4	+12
24	6	-12
24	7	-12
24	8	-12
24	11	+60
24	13	+140
25	2	-5
25	3	-5
25	4	-5
25	5	-5
25	7	+5
25	8	+5
25	9	+5
25	10	+5


**Table 10 Voltage**

P12 Pin No.	Voltage [V]
4	+140
5	+10
6	-10
7	+12
8	+12

**Table 11 Voltage**

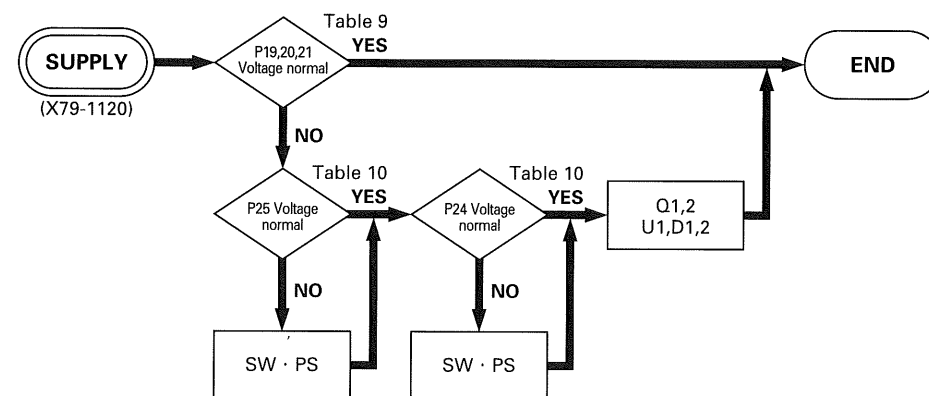

# TROUBLESHOOTING

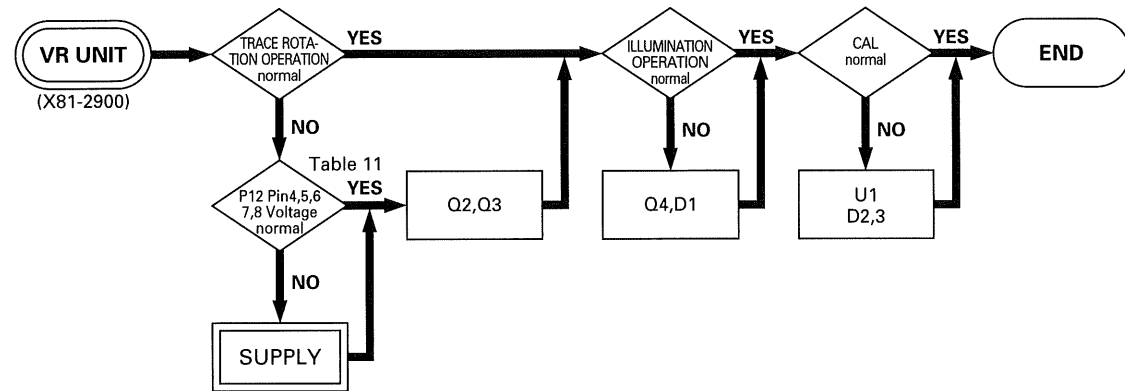


P27 Pin No.	Voltage [V]
17	+5
18	+5



Table 12 Voltage

P28 Pin No.	Voltage [V]
5	+10
6	-10
39	+5



Table 13 Voltage

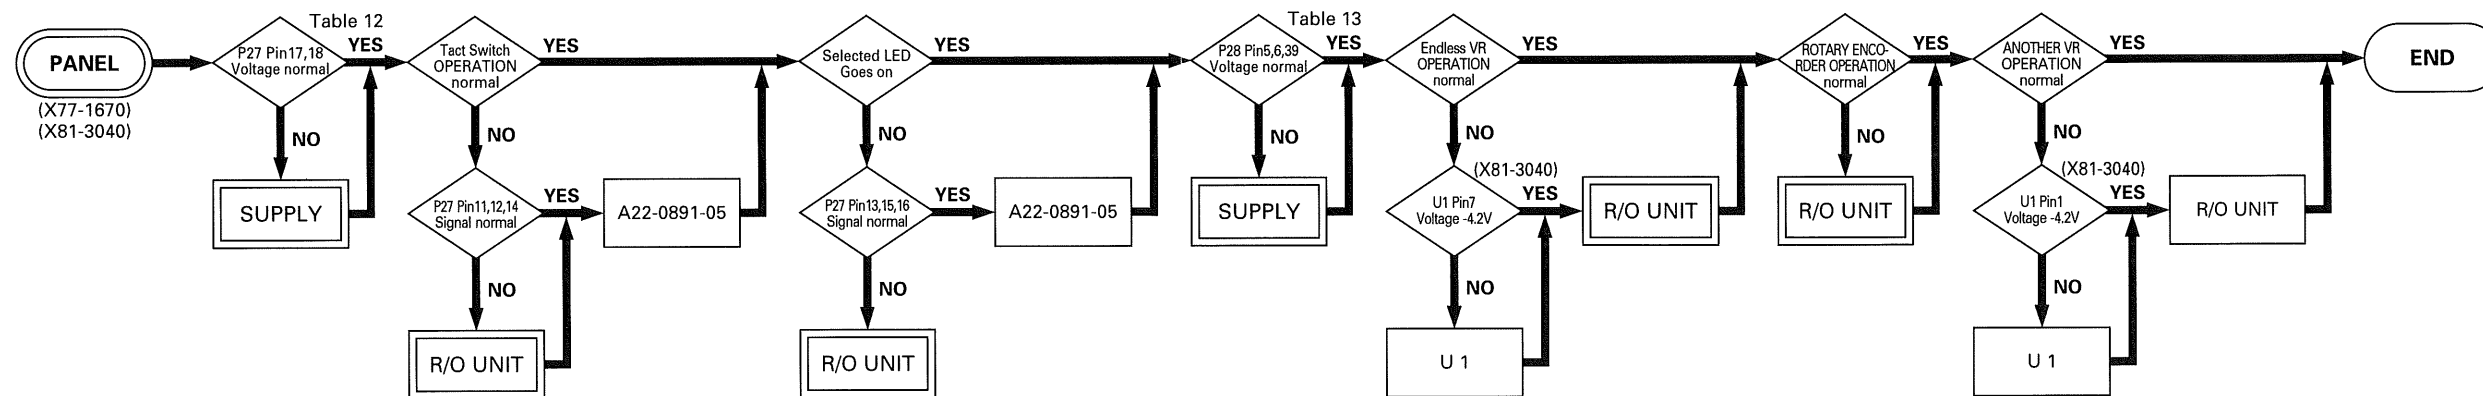

# TROUBLESHOOTING

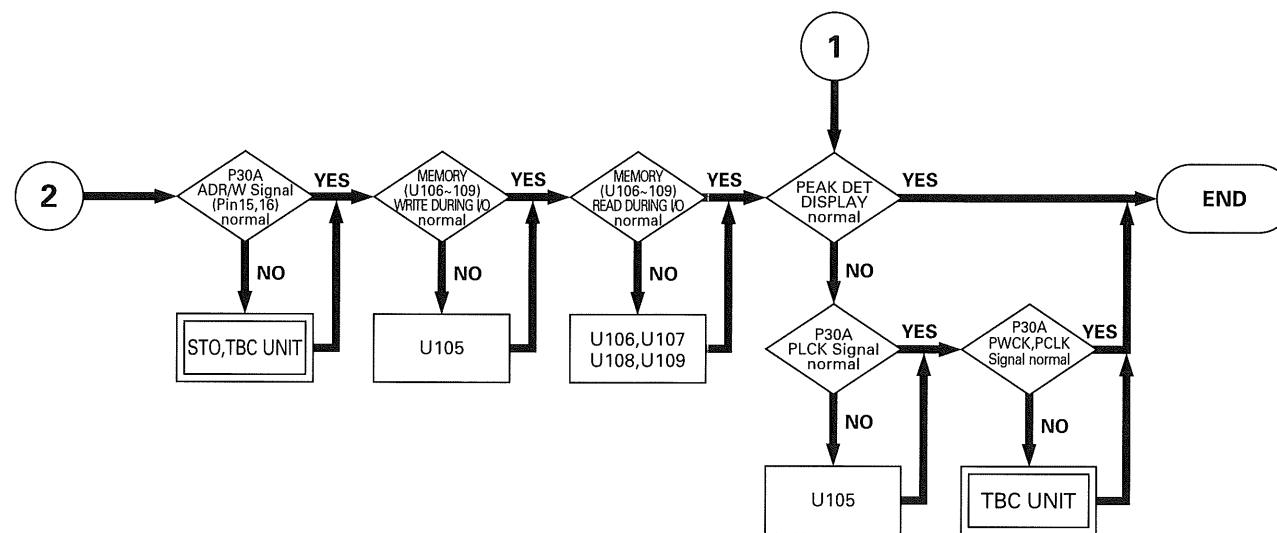
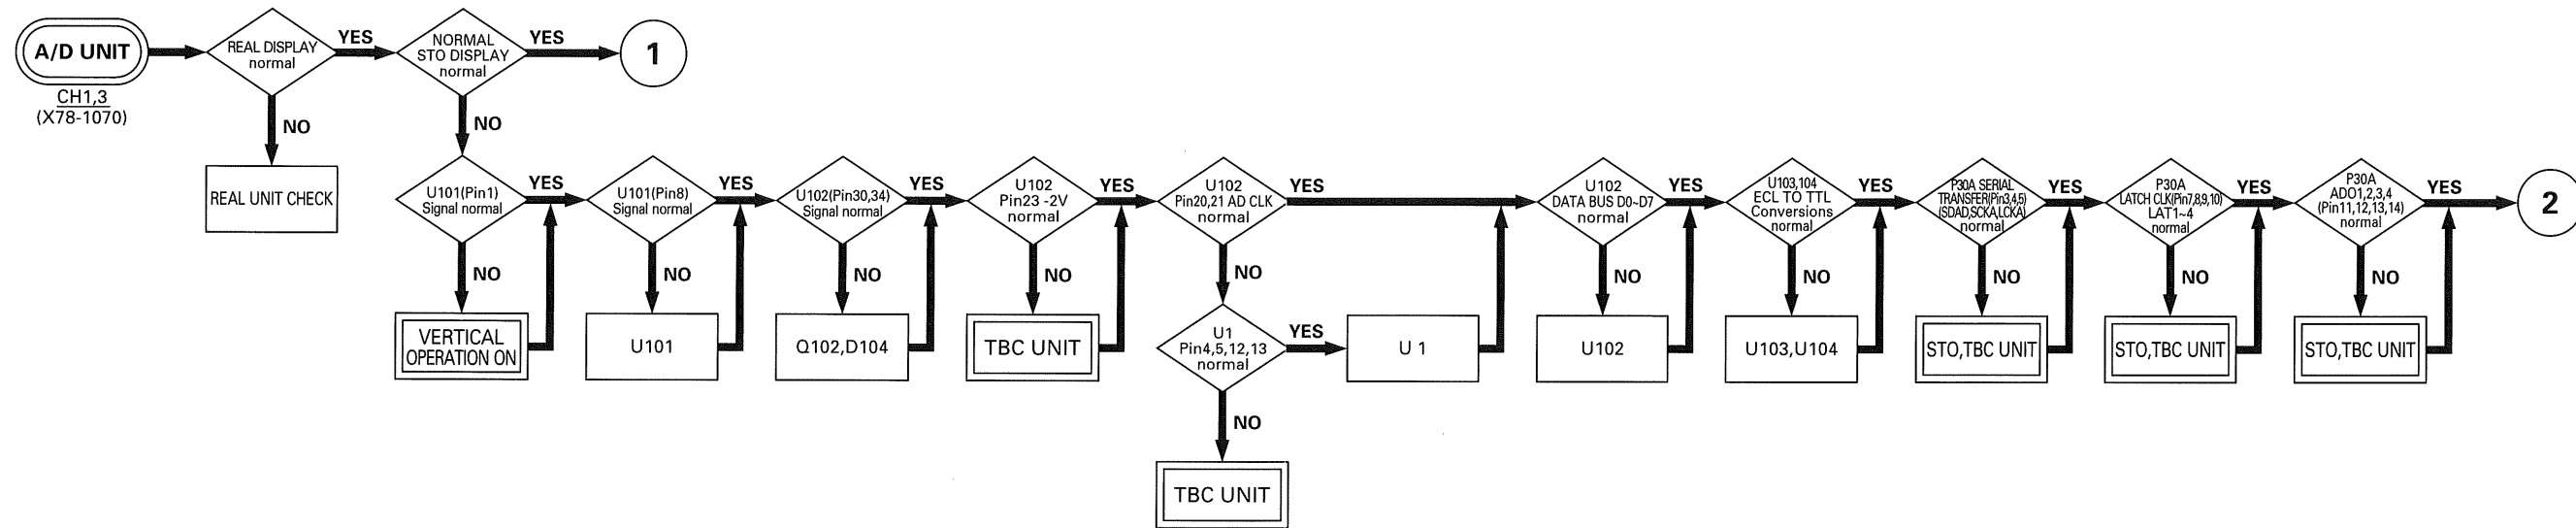


# TROUBLESHOOTING


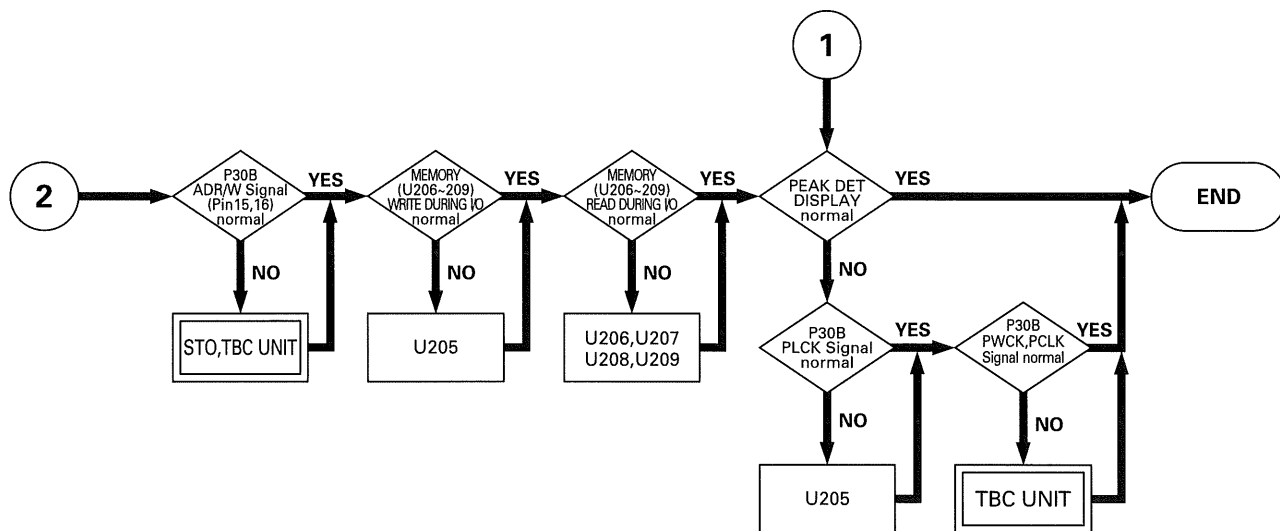
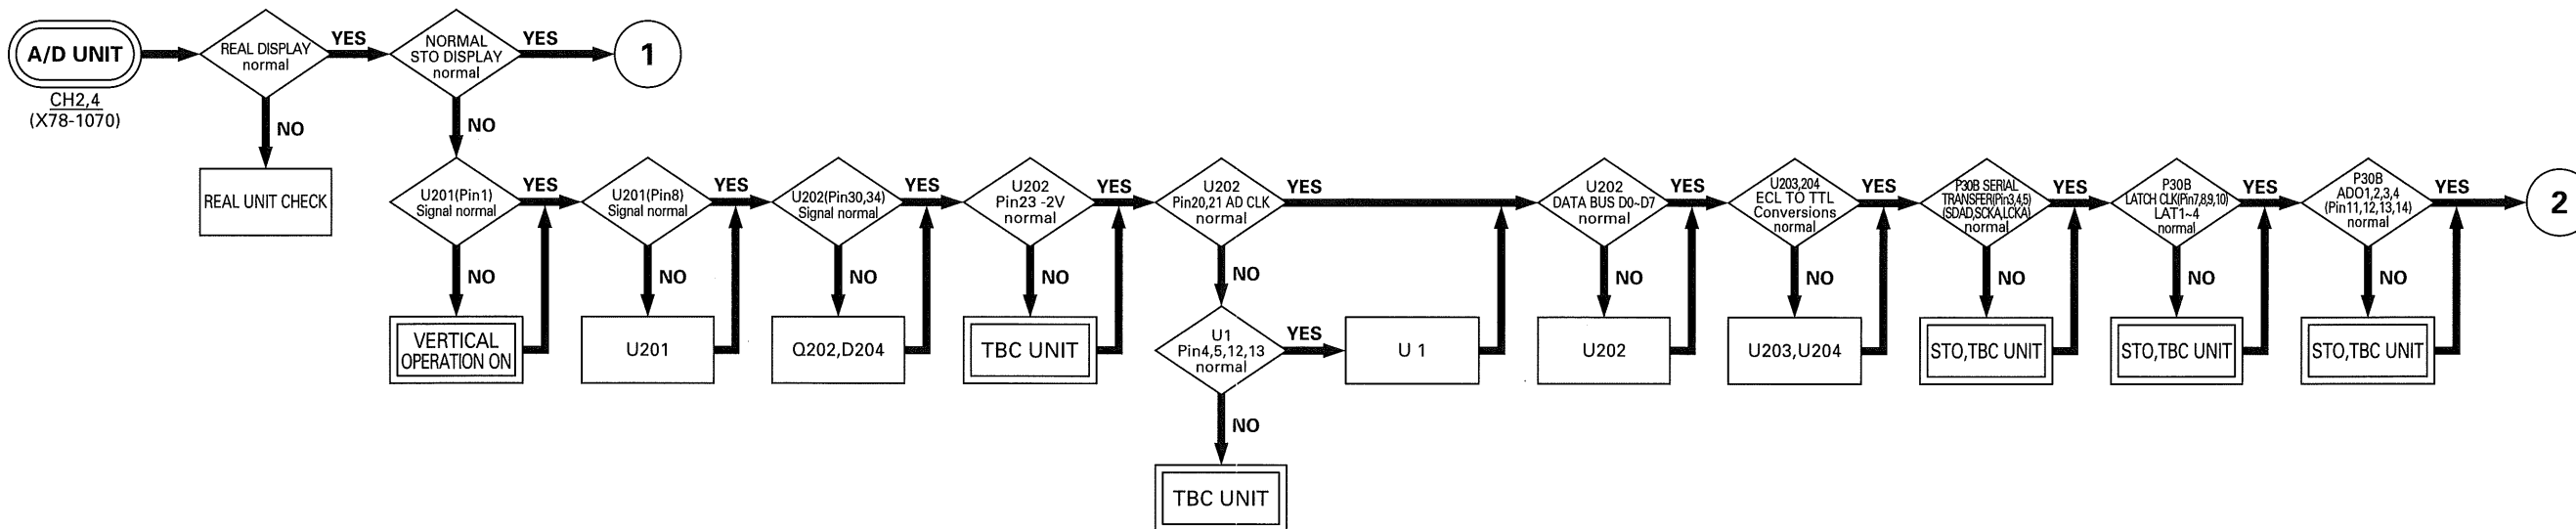


# TROUBLESHOOTING





## TIME BASE UNIT TROUBLESHOOTING

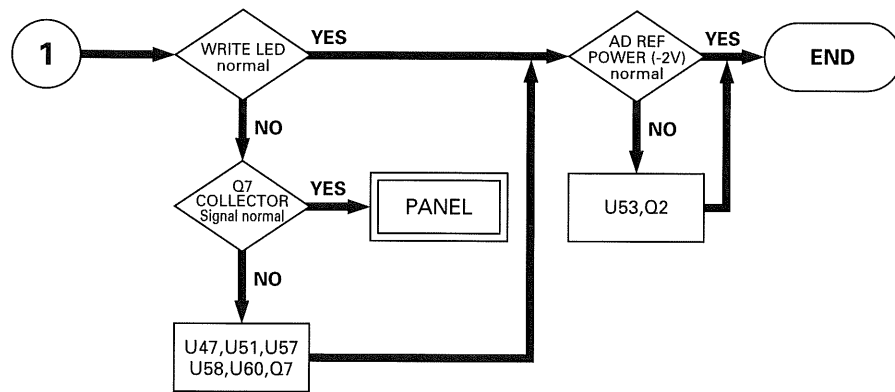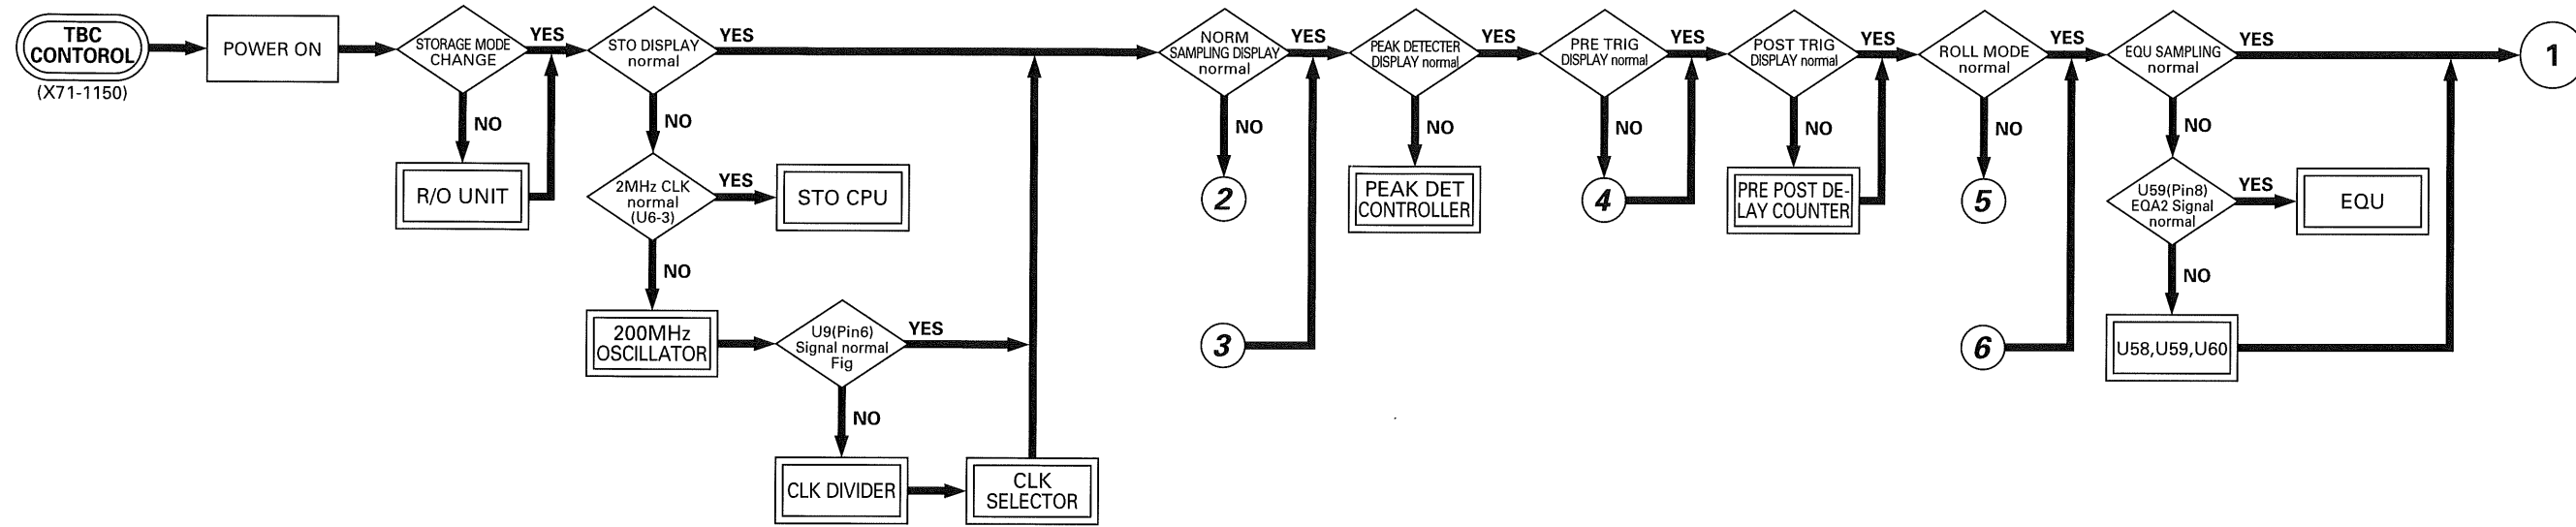

# TROUBLESHOOTING

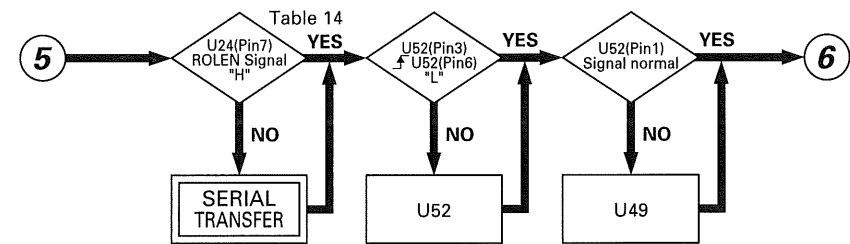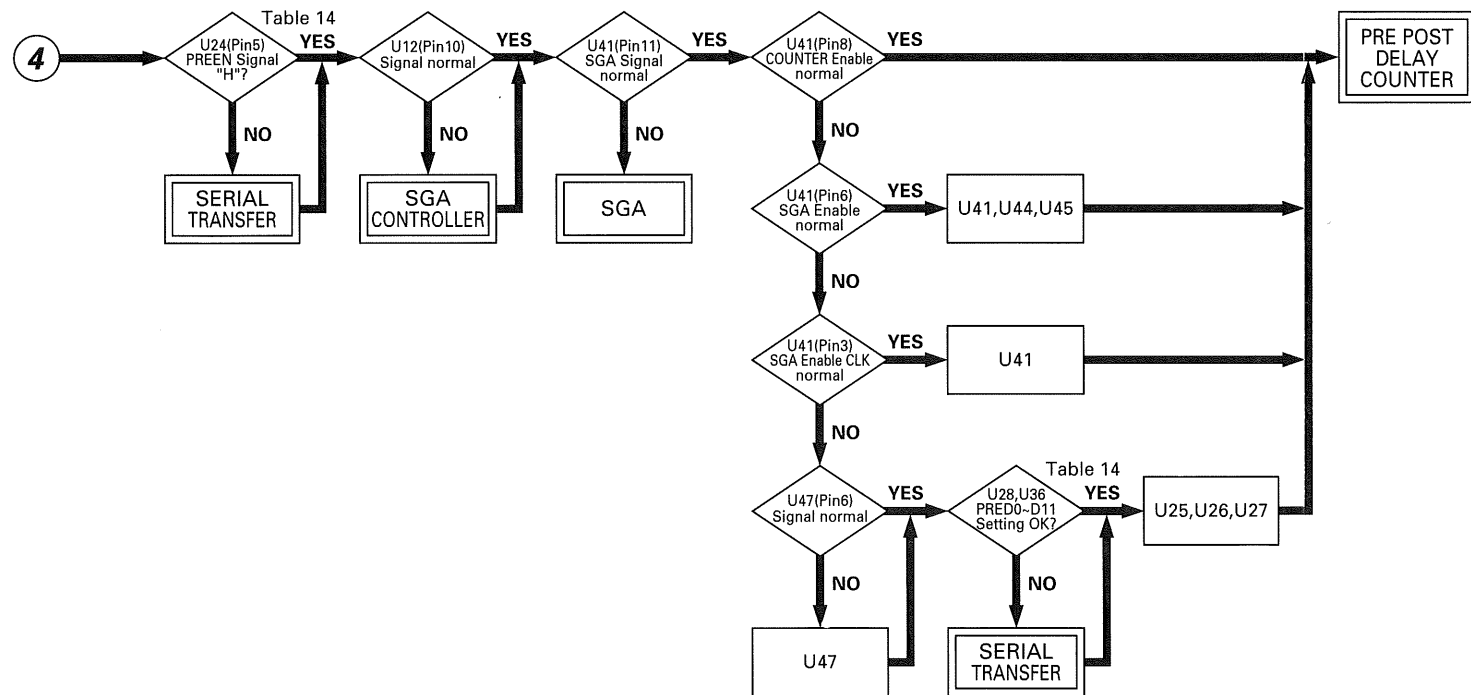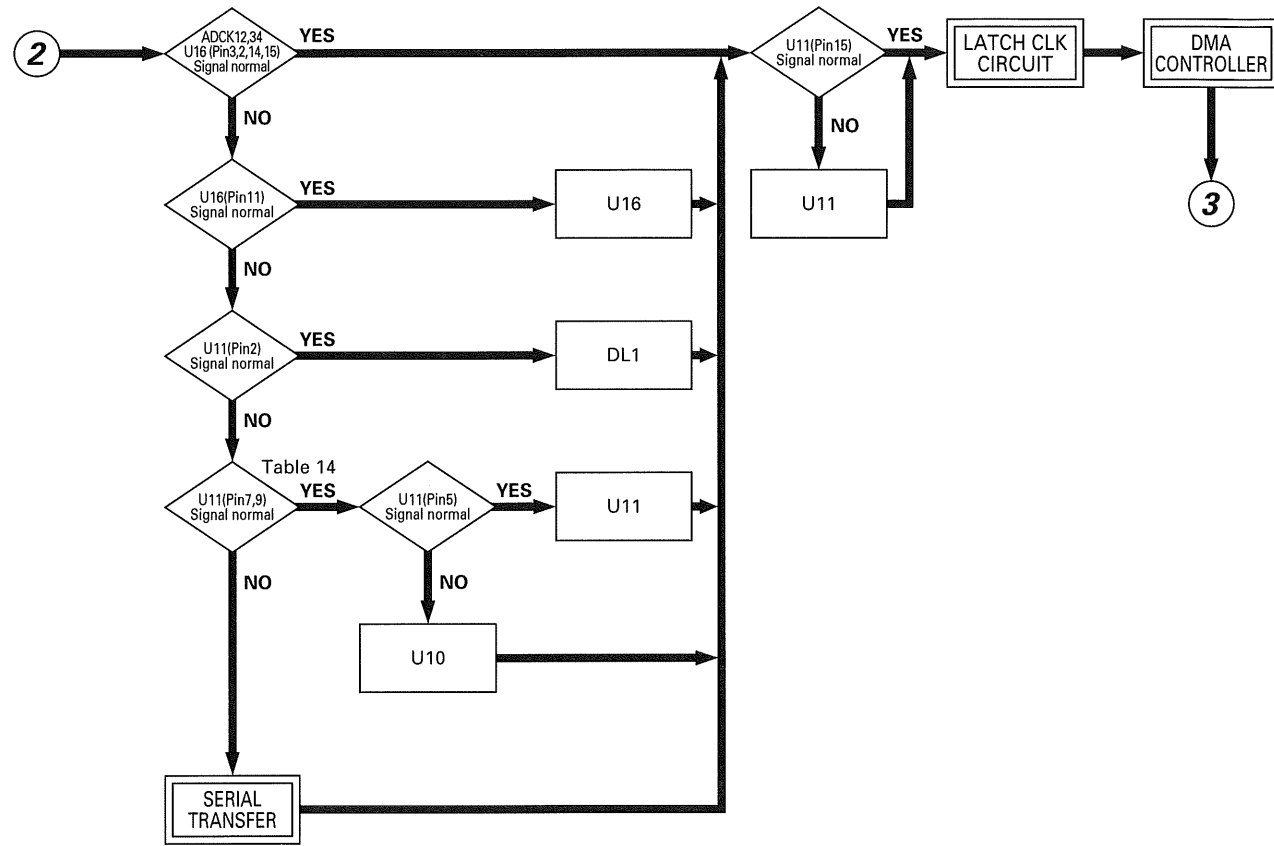

# TROUBLESHOOTING

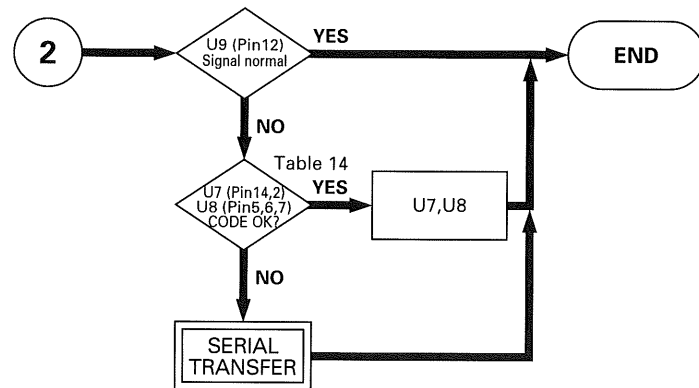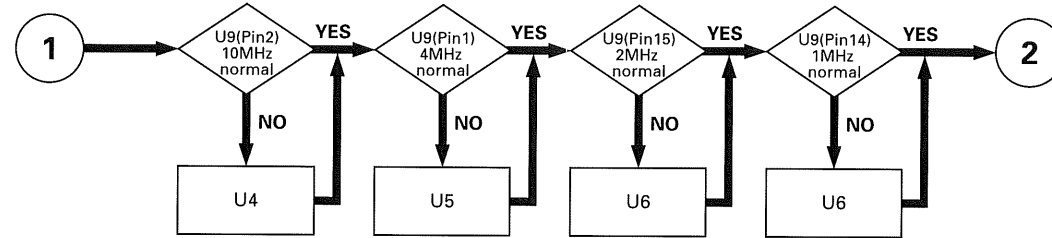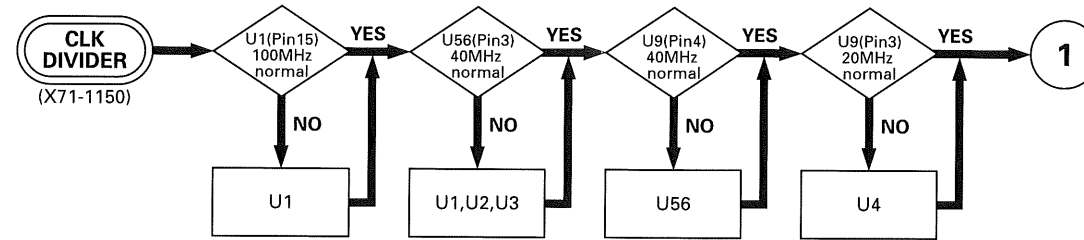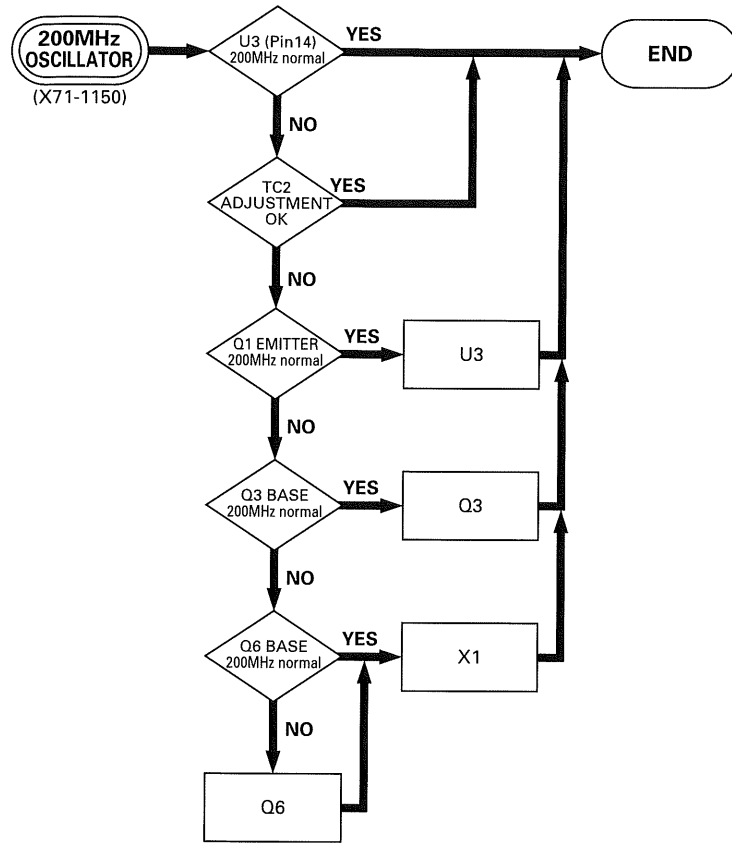

U23	HC595	Output Order	Signal Name	Content
	QA	72	FMD0	FAST MEMORY ADDRESS DATA D0
	QB	71	FMD1	FAST MEMORY ADDRESS DATA D1
	QC	70	FMD2	FAST MEMORY ADDRESS DATA D2
	QD	69	FMD3	FAST MEMORY ADDRESS DATA D3
	QE	68	FMD4	FAST MEMORY ADDRESS DATA D4
	QF	67	FMD5	FAST MEMORY ADDRESS DATA D5
	QG	66	FMD6	FAST MEMORY ADDRESS DATA D6
	QH	65	FMD7	FAST MEMORY ADDRESS DATA D7

U24	HC595	Output Order	Signal Name	Content
	QA	64	FMD8	FAST MEMORY ADDRESS DATA D8
	QB	63	FMD9	FAST MEMORY ADDRESS DATA D9
	QC	62	FMD10	FAST MEMORY ADDRESS DATA D10
	QD	61	FMD11	FAST MEMORY ADDRESS DATA D11
	QE	60	MESEL	2k Mem. for NOR or POST operation. "H" when divided, "L" in other case.
	QF	59	PREEN	"H" during PRE TRIG, "L" in other case.
	QG	58	PSTEN	"H" during POST TRIG, "L" in other case.
	QH	57	ROLEN	"H" during ROLL MODE, "L" in other case.

U28	HC595	Output Order	Signal Name	Content
	QA	56	PRED0	PRE TRIG SGA ENABLE COUNT DATA D0
	QB	55	PRED1	PRE TRIG SGA ENABLE COUNT DATA D1
	QC	54	PRED2	PRE TRIG SGA ENABLE COUNT DATA D2
	QD	53	PRED3	PRE TRIG SGA ENABLE COUNT DATA D3
	QE	52	PRED4	PRE TRIG SGA ENABLE COUNT DATA D4
	QF	51	PRED5	PRE TRIG SGA ENABLE COUNT DATA D5
	QG	50	PRED6	PRE TRIG SGA ENABLE COUNT DATA D6
	QH	49	PRED7	PRE TRIG SGA ENABLE COUNT DATA D7

TIME BASE UNIT				
U34	HC595	Output Order	Signal Name	Content
	QA	48	DLYD0	PRE&POST TRIG DELAY COUNT DATA D0
	QB	47	DLYD1	PRE&POST TRIG DELAY COUNT DATA D1
	QC	46	DLYD2	PRE&POST TRIG DELAY COUNT DATA D2
	QD	45	DLYD3	PRE&POST TRIG DELAY COUNT DATA D3
	QE	44	DLYD4	PRE&POST TRIG DELAY COUNT DATA D4
	QF	43	DLYD5	PRE&POST TRIG DELAY COUNT DATA D5
	QG	42	DLYD6	PRE&POST TRIG DELAY COUNT DATA D6
	QH	41	DLYD7	PRE&POST TRIG DELAY COUNT DATA D7

TIME BASE UNIT				
U35	HC595	Output Order	Signal Name	Content
	QA	40	DLYD8	PRE&POST TRIG DELAY COUNT DATA D8
	QB	39	DLYD9	PRE&POST TRIG DELAY COUNT DATA D9
	QC	38	DLYD10	PRE&POST TRIG DELAY COUNT DATA D10
	QD	37	DLYD11	PRE&POST TRIG DELAY COUNT DATA D11
	QE	36	DLYD12	PRE&POST TRIG DELAY COUNT DATA D12
	QF	35	DLYD13	PRE&POST TRIG DELAY COUNT DATA D13
	QG	34	DLYD14	PRE&POST TRIG DELAY COUNT DATA D14
	QH	33	DLYD15	PRE&POST TRIG DELAY COUNT DATA D15

TIME BASE UNIT				
U36	HC595	Output Order	Signal Name	Content
	QA	32	DLYD16	PRE&POST TRIG DELAY COUNT DATA D16
	QB	31	DLYD17	PRE&POST TRIG DELAY COUNT DATA D17
	QC	30	DLYD18	PRE&POST TRIG DELAY COUNT DATA D18
	QD	29	DLYD19	PRE&POST TRIG DELAY COUNT DATA D19
	QE	28	PRED8	PRE TRIG SGA ENABLE COUNT DATA D8
	QF	27	PRED9	PRE TRIG SGA ENABLE COUNT DATA D9
	QG	26	PRED10	PRE TRIG SGA ENABLE COUNT DATA D10
	QH	25	PRED11	PRE TRIG SGA ENABLE COUNT DATA D11




TIME BASE UNIT				
U17	HC595	Output Order	Signal Name	Content
	QA	24	*	Always "L".
	QB	23	*	Always "L".
	QC	22	*	Always "L".
	QD	21	*	Always "L".
	QE	20	*	Always "L".
	QF	19	*	Always "L".
	QG	18	TBCD9	TIME BASE CODE D9
	QH	17	TBCD8	TIME BASE CODE D8

TIME BASE UNIT				
U15	HC595	Output Order	Signal Name	Content
	QA	16	TBCD7	TIME BASE CODE D7
	QB	15	TBCD6	TIME BASE CODE D6
	QC	14	TBCD5	TIME BASE CODE D5
	QD	13	TBCD4	TIME BASE CODE D4
	QE	12	TBCD3	TIME BASE CODE D3
	QF	11	TBCD2	TIME BASE CODE D2
	QG	10	TBCD1	TIME BASE CODE D1
	QH	9	TBCD0	TIME BASE CODE D0

A/D UNIT				
HC595	Output Order	Signal Name	Content	
	QA	8	*	Always "L".
	QB	7	*	Always "L".
	QC	6	*	Always "L".
	QD	5	*	Always "L".
	QE	4	PKOUT	"H" when PEAK DET is ON, "L" in other case.
	QF	3	PKA	"L" MIN   "L" MAX   "H" MIN   "H" OFF
	QG	2	PKB	"L"/MAX   "H"   "L"   "H"
	QH	1	PKDEN	"L" when PEAK DET is ON, "H" in other case.




Table 1 Serial Transfer

# TROUBLESHOOTING

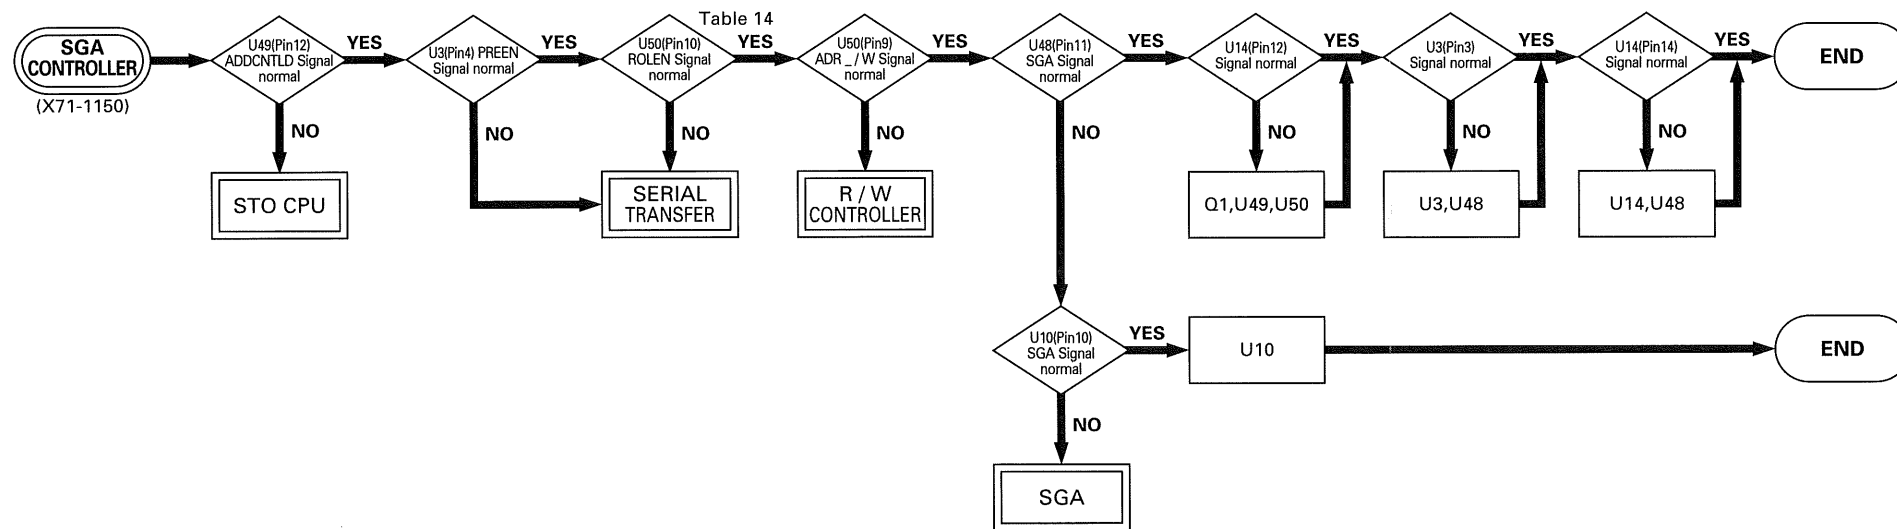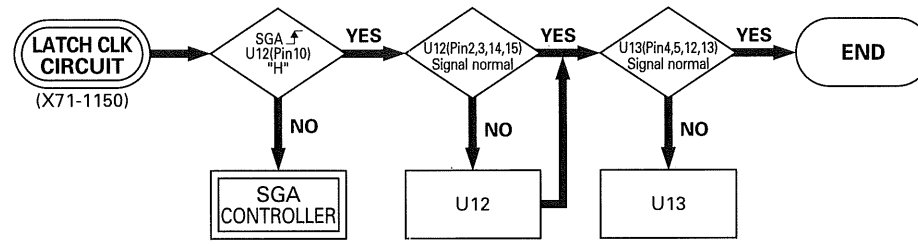
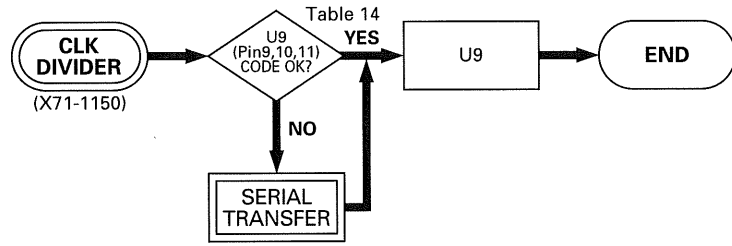







# TROUBLESHOOTING

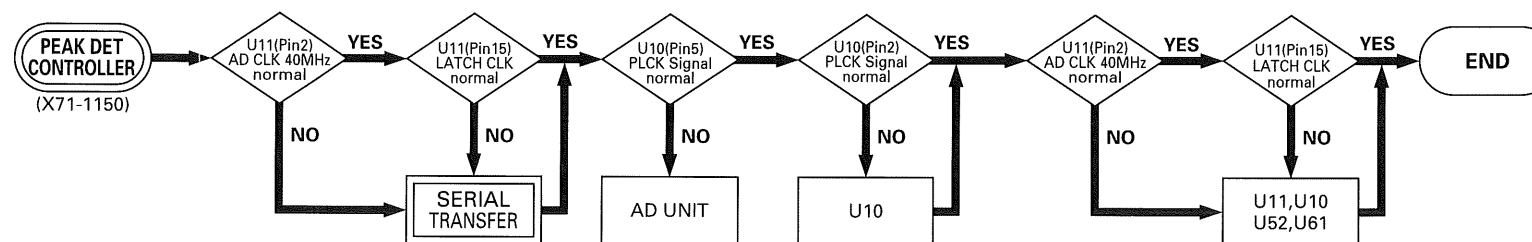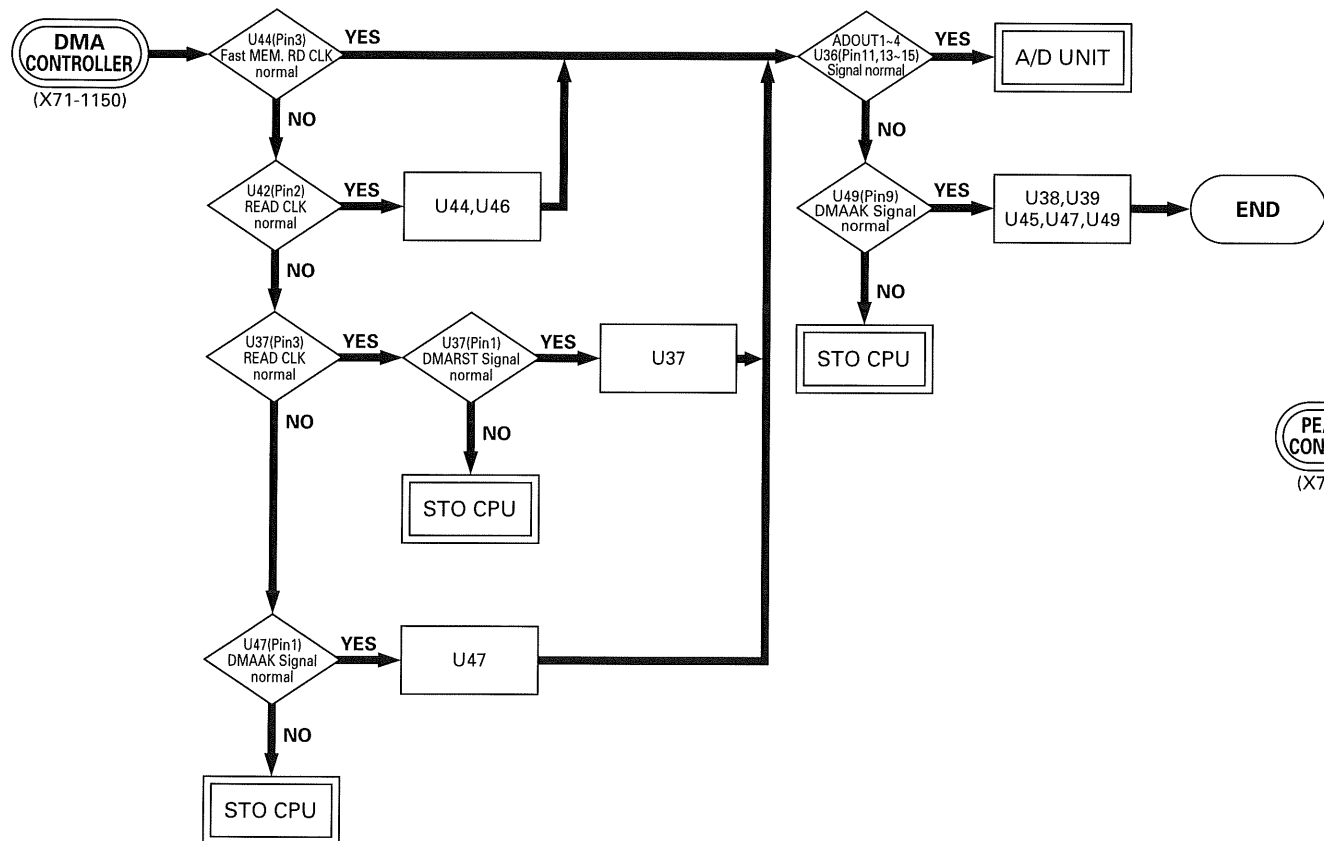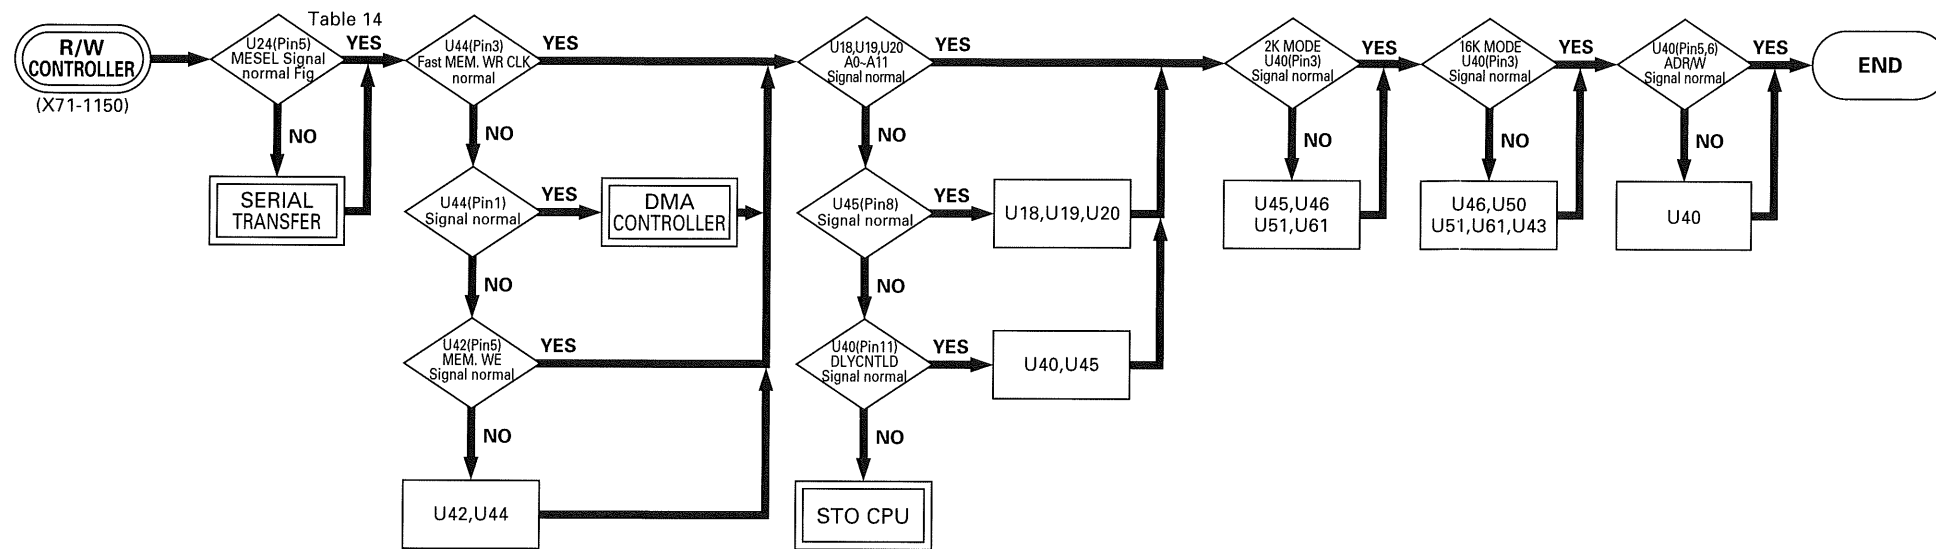




# TROUBLESHOOTING

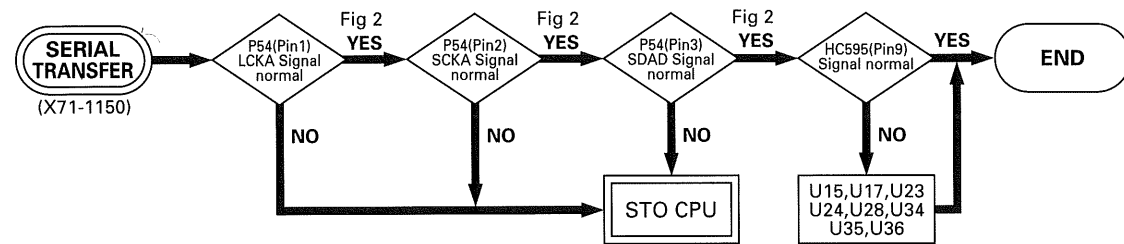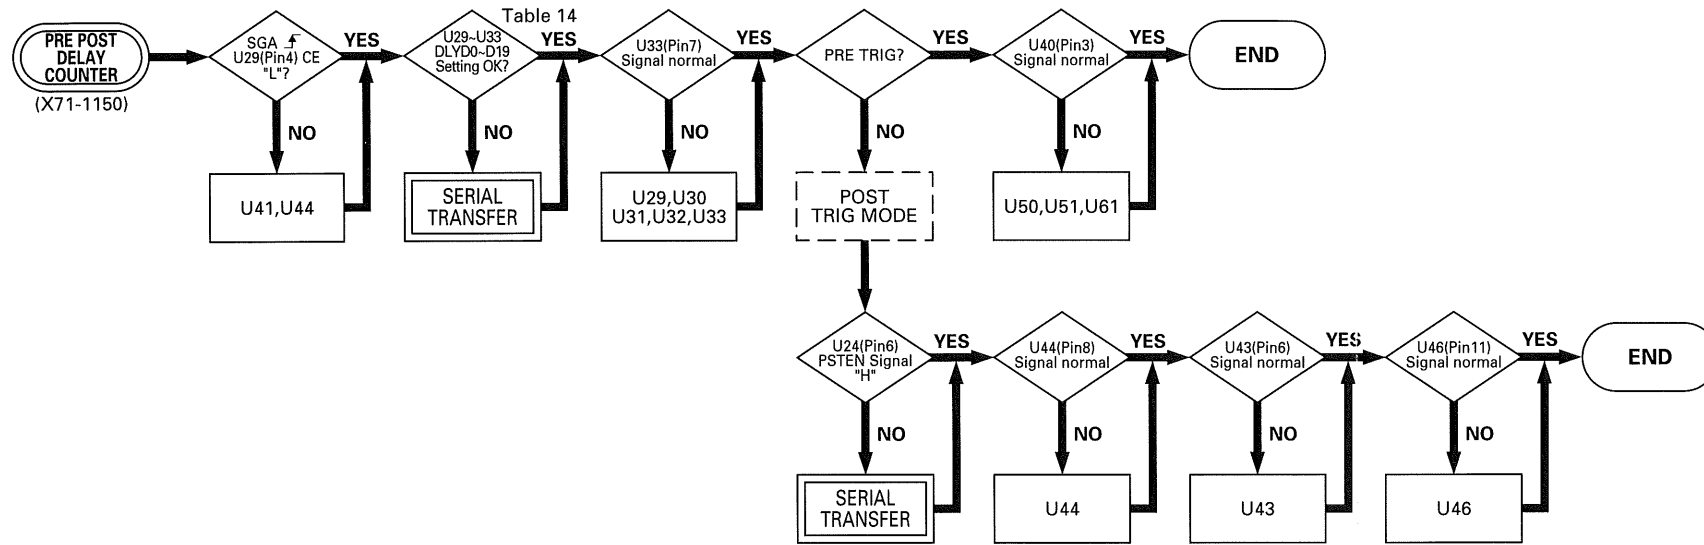





# TROUBLESHOOTING

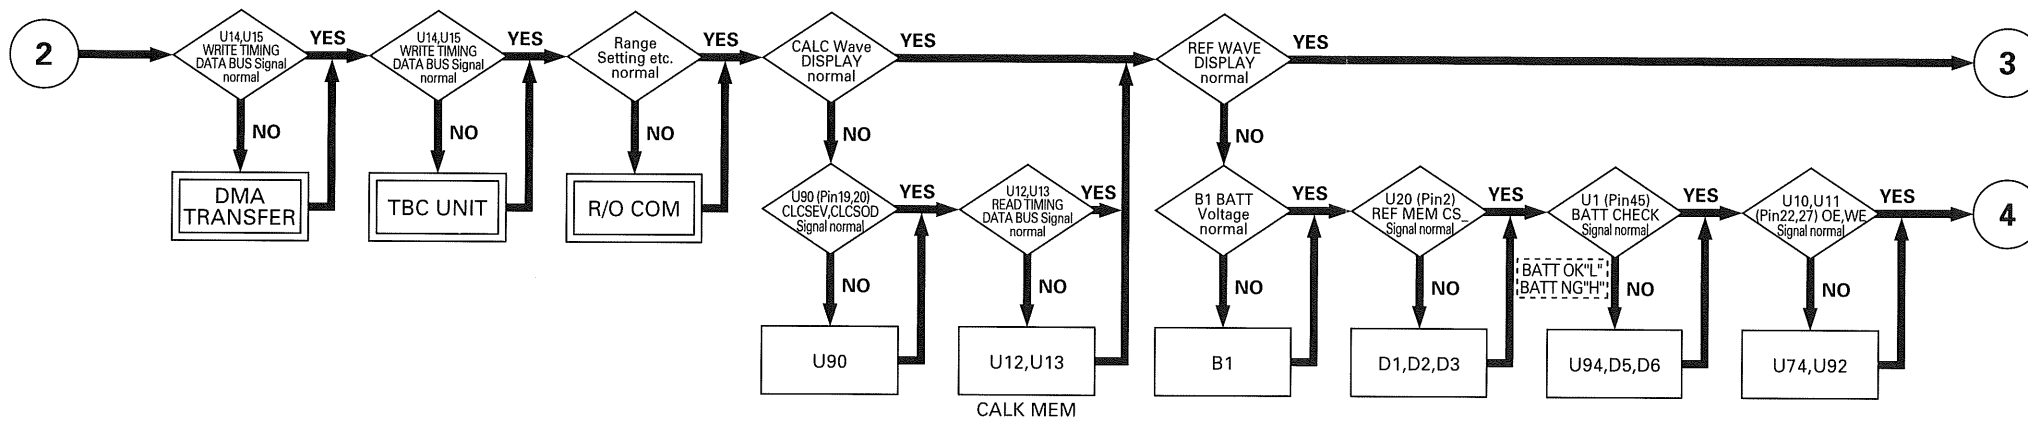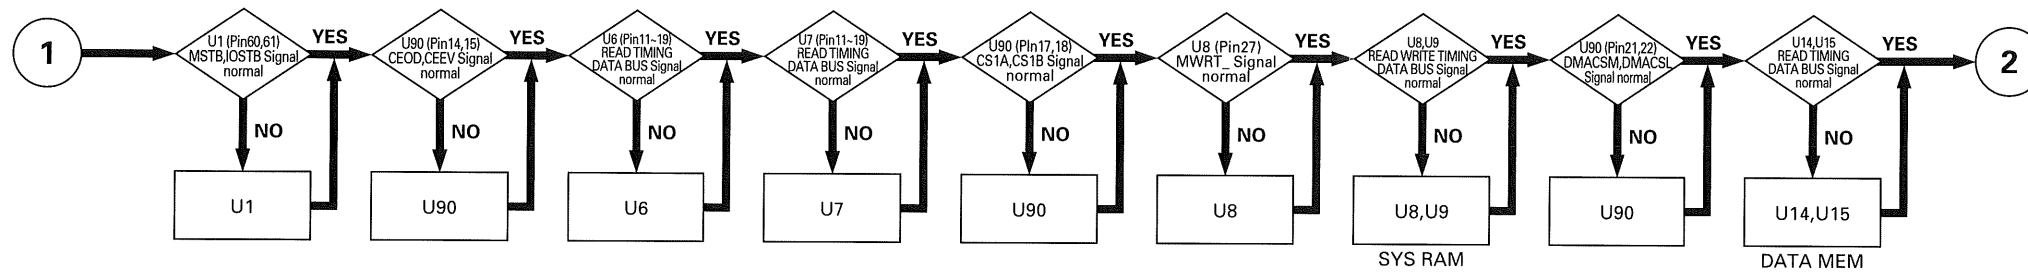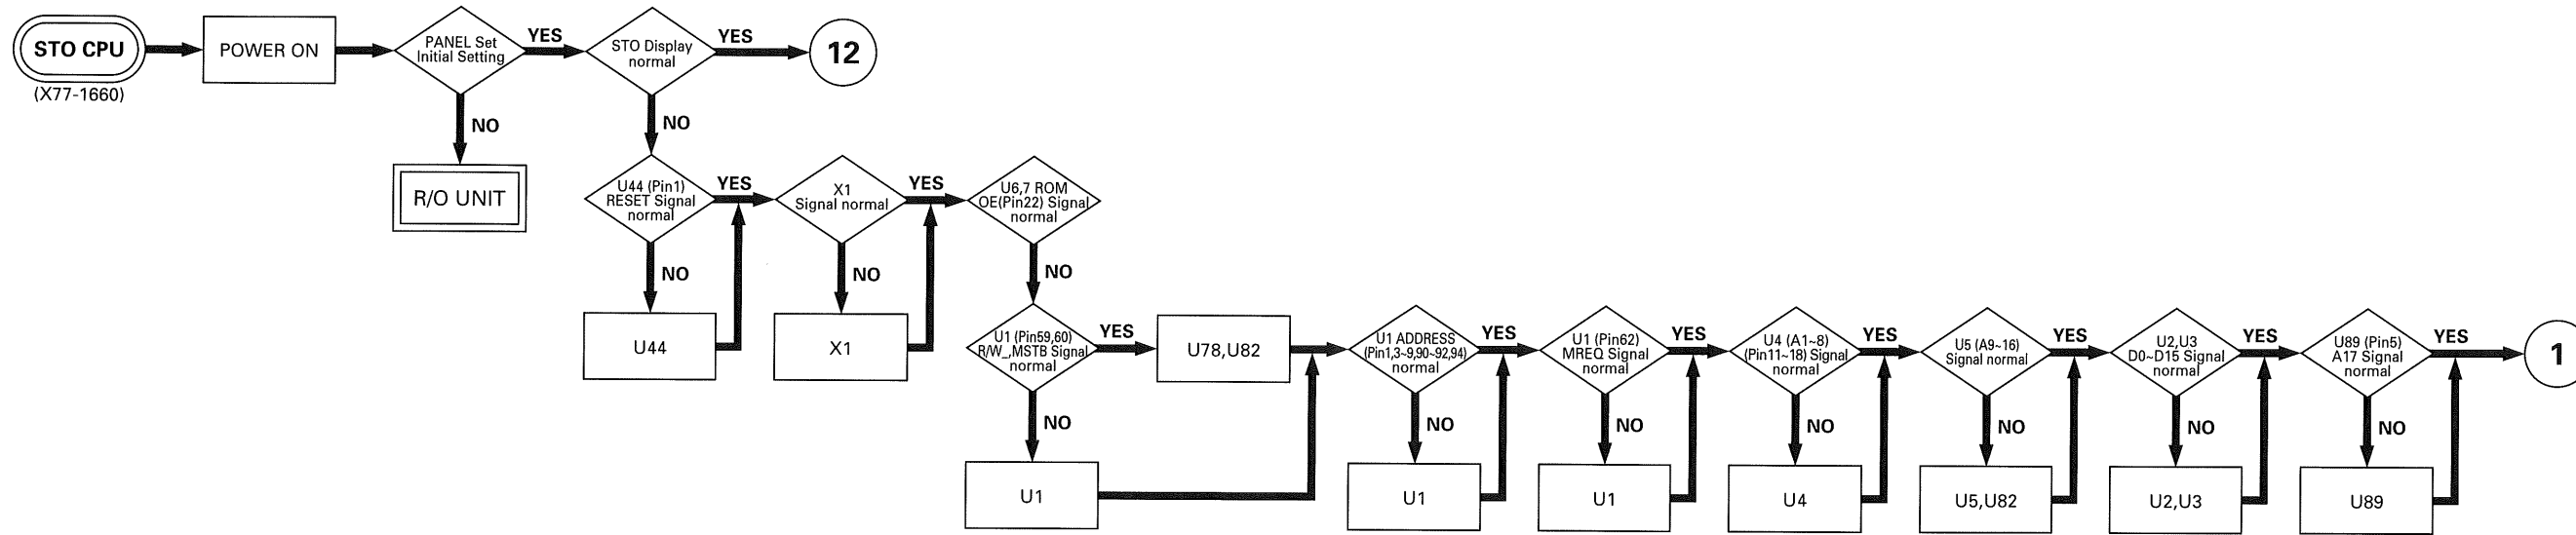




# TROUBLESHOOTING

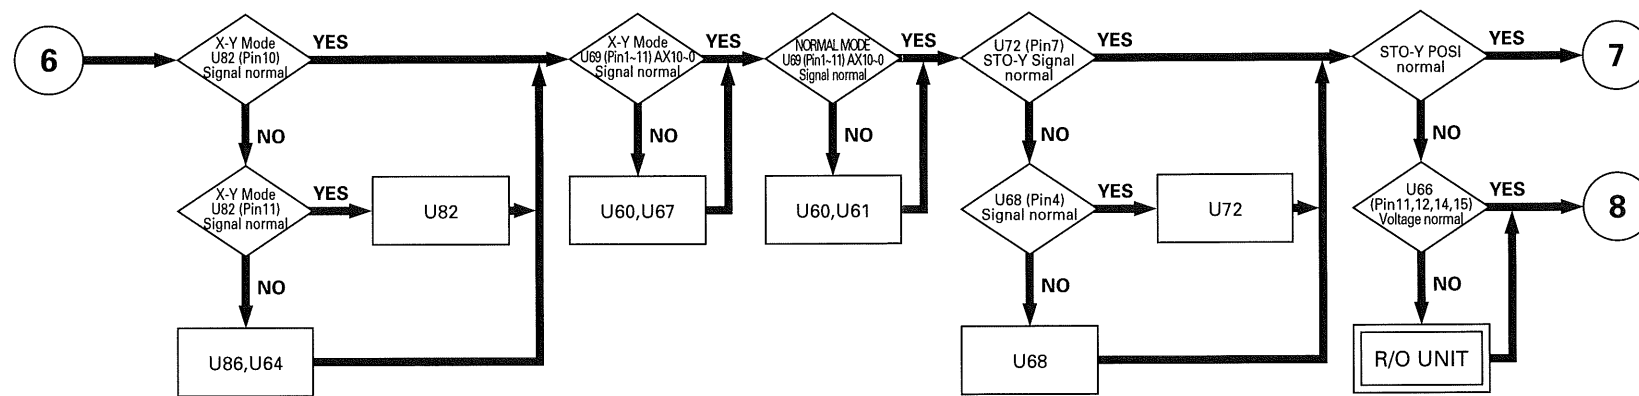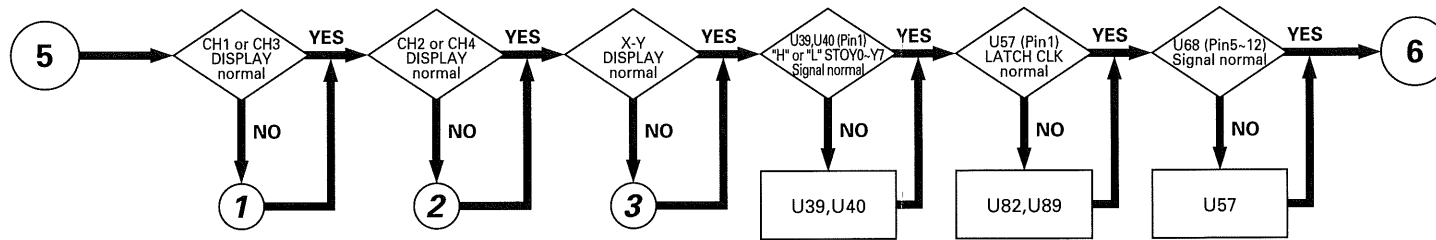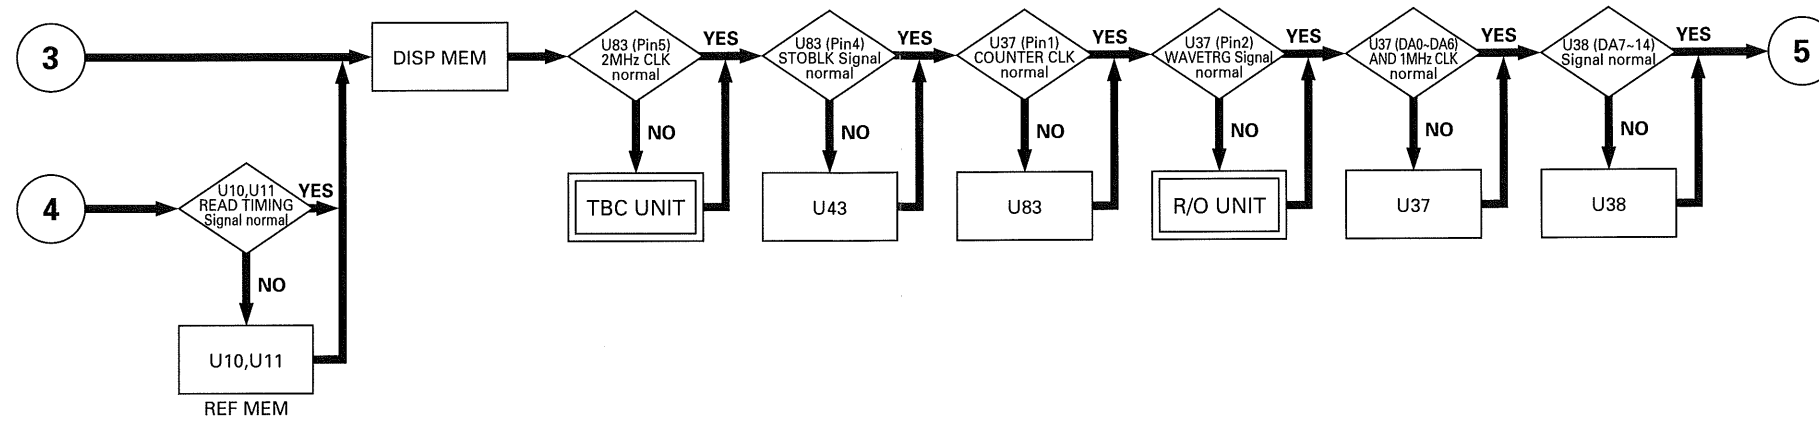



# TROUBLESHOOTING

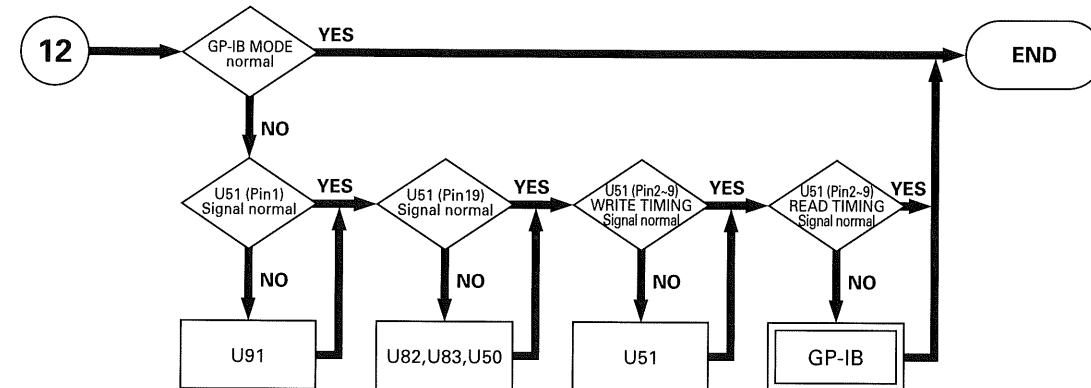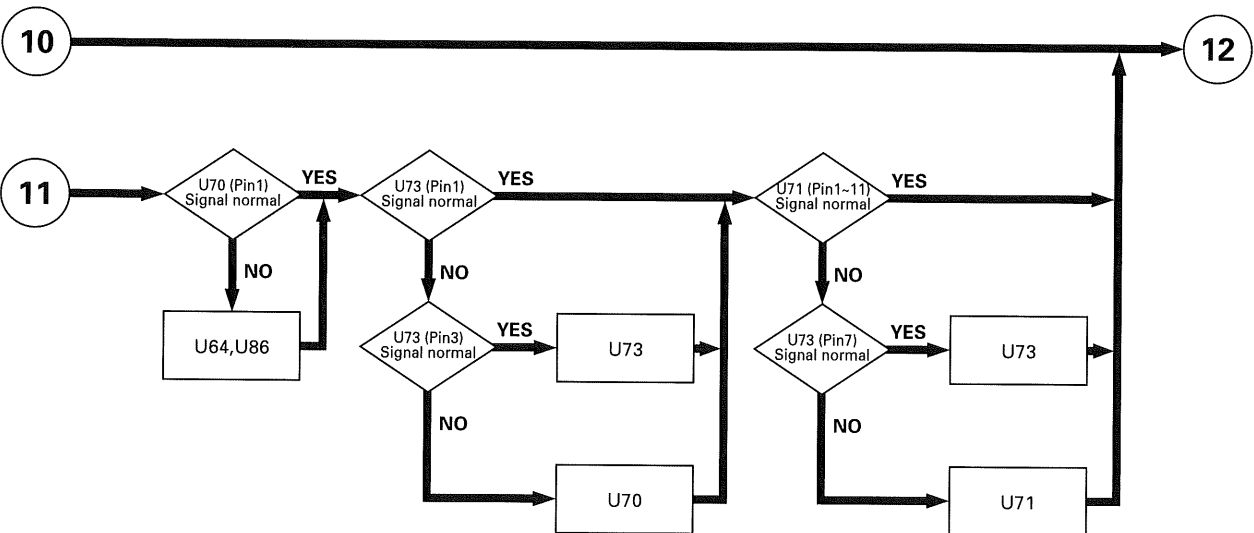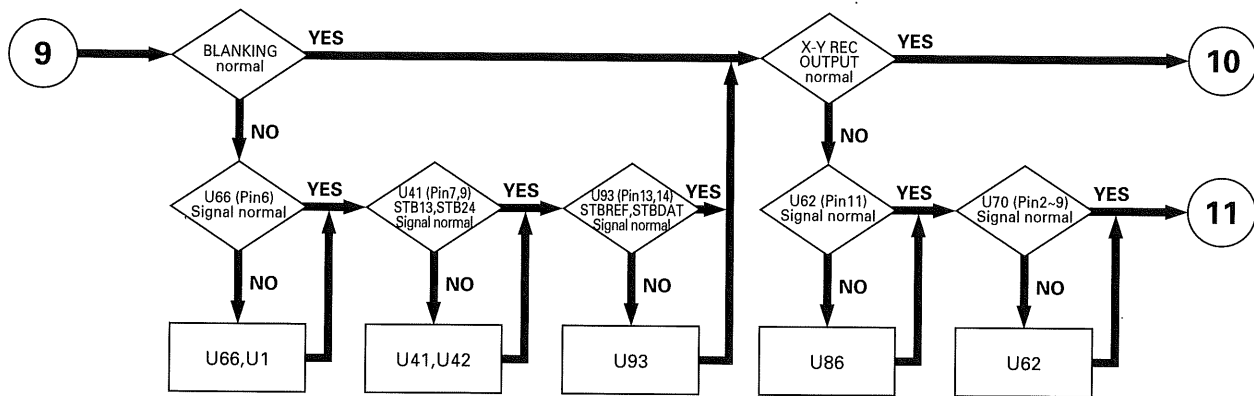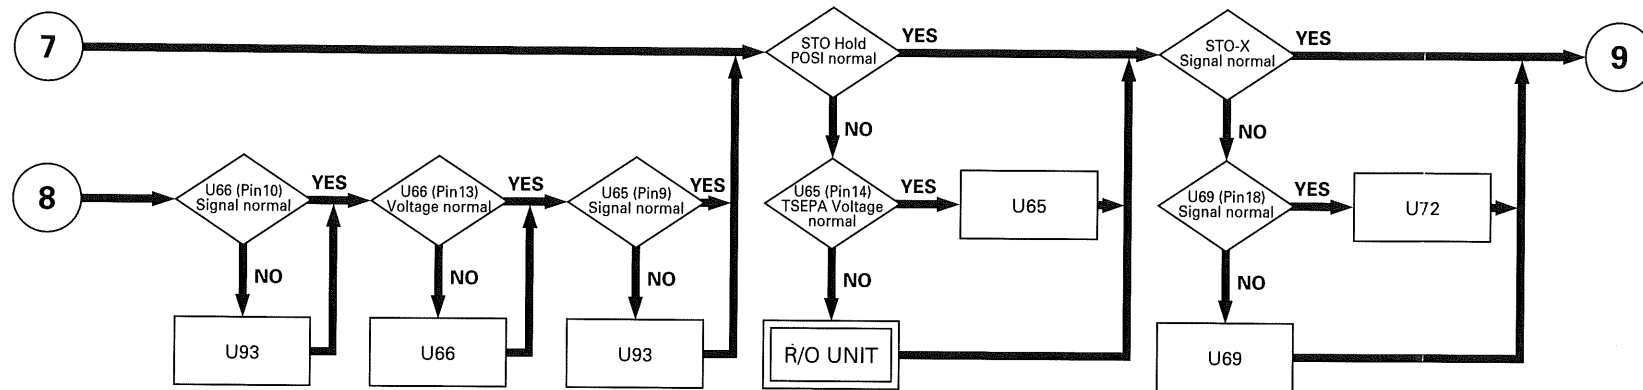



# TROUBLESHOOTING

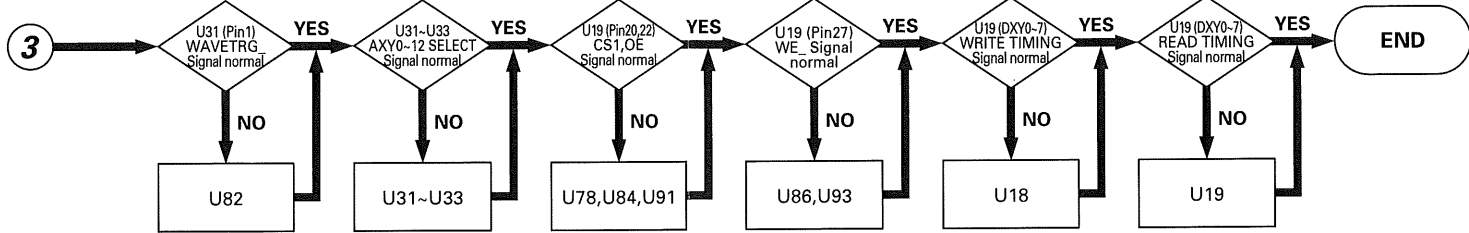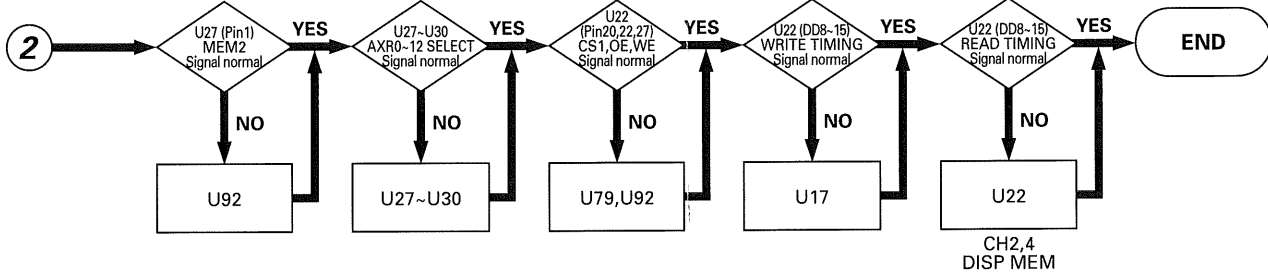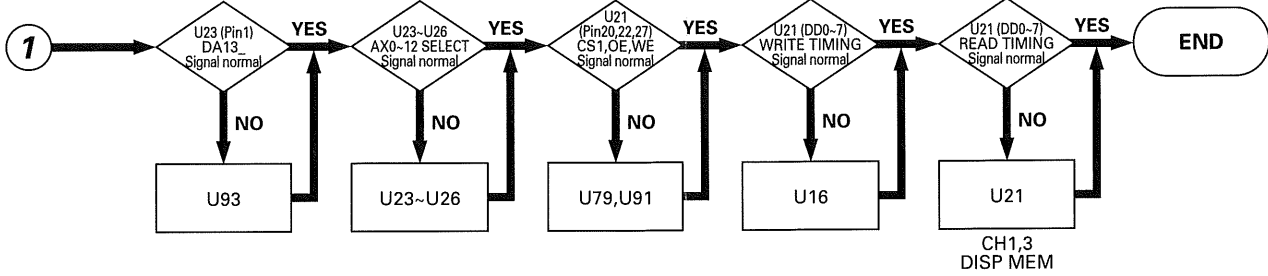

# TROUBLESHOOTING

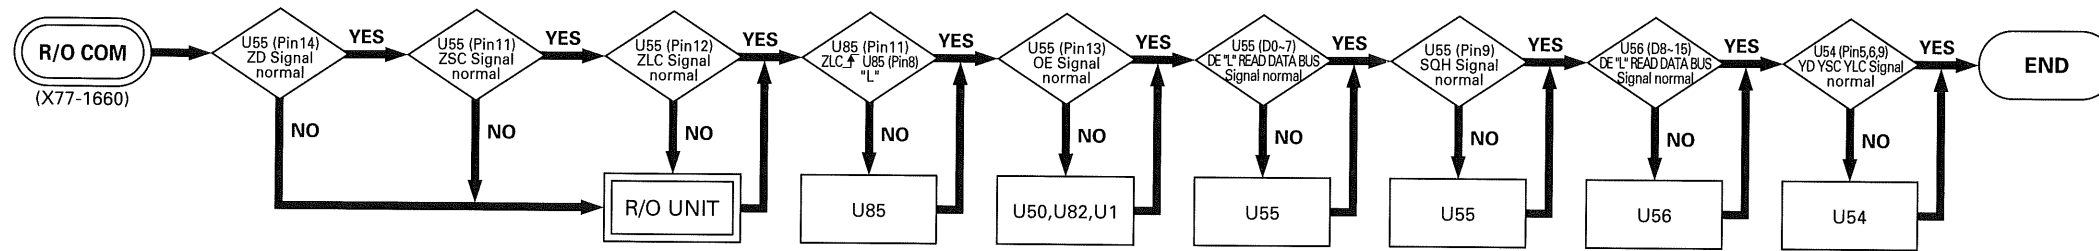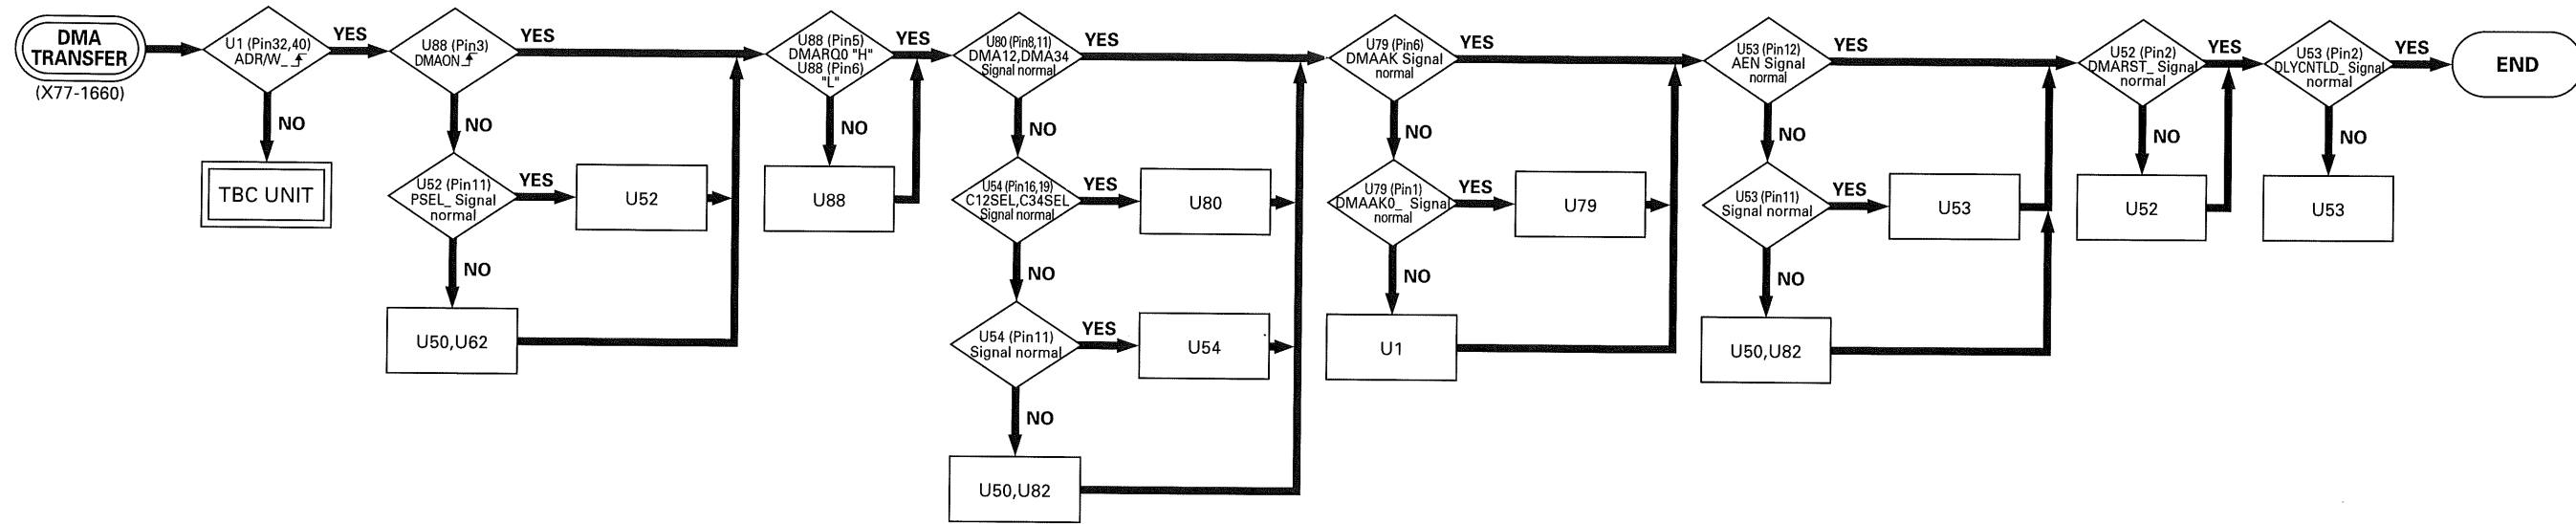

# TROUBLESHOOTING

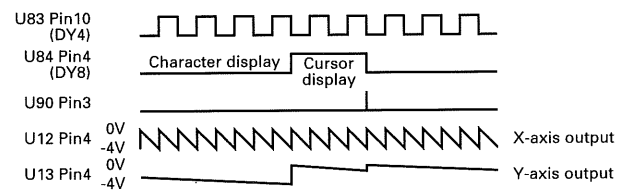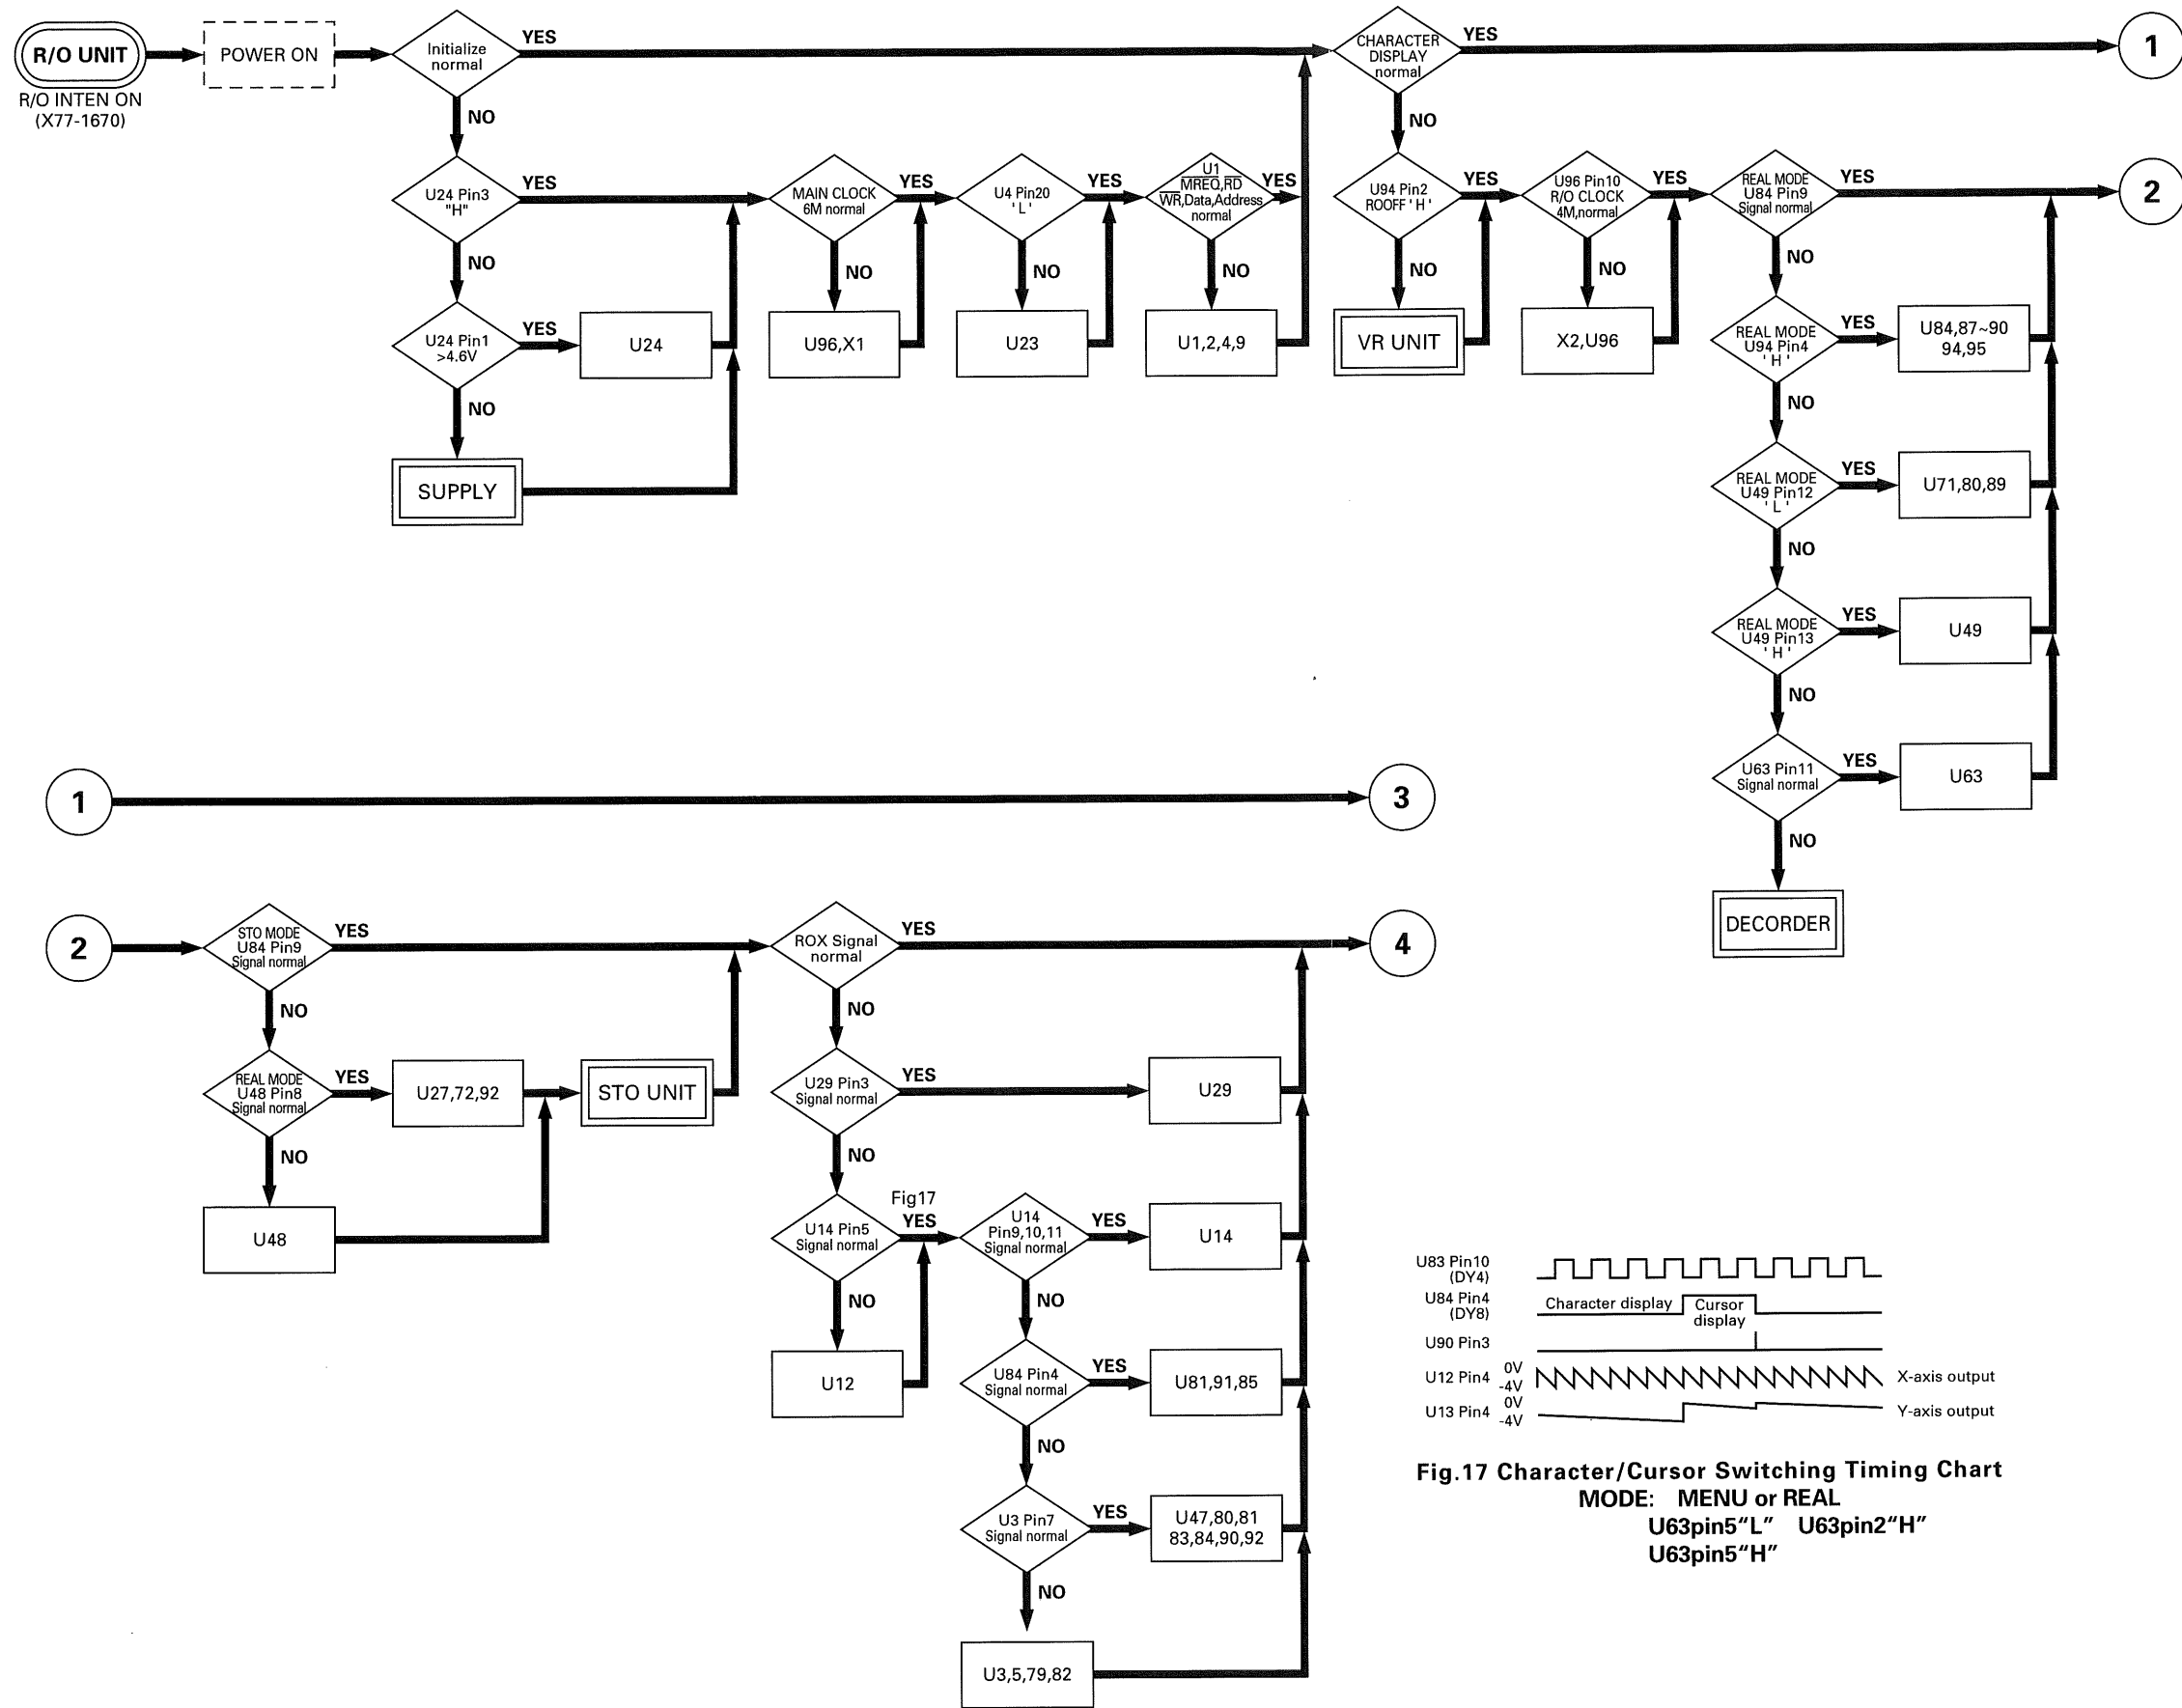

**Fig.17 Character/Cursor Switching Timing Chart**  
**MODE: MENU or REAL**  
**U63pin5"L" U63pin2"H"**  
**U63pin5"H"**



# TROUBLESHOOTING




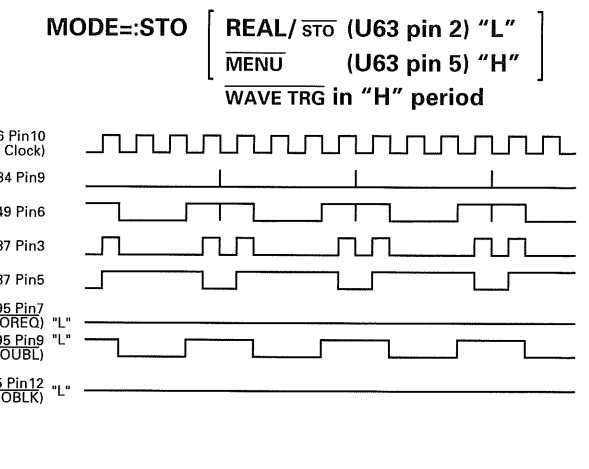




Fig.18

Fig.19




ROUBL, ROREQ and ROBLK Signal Timing Chart

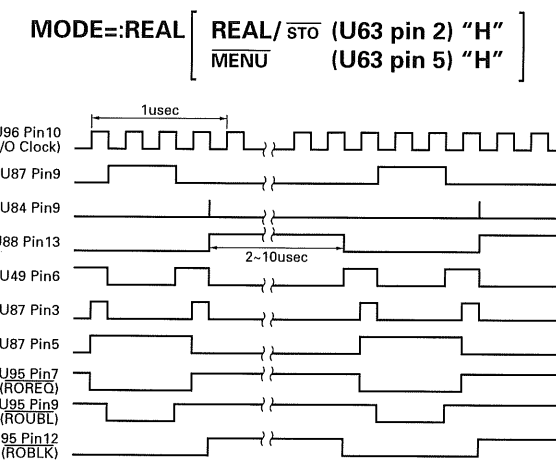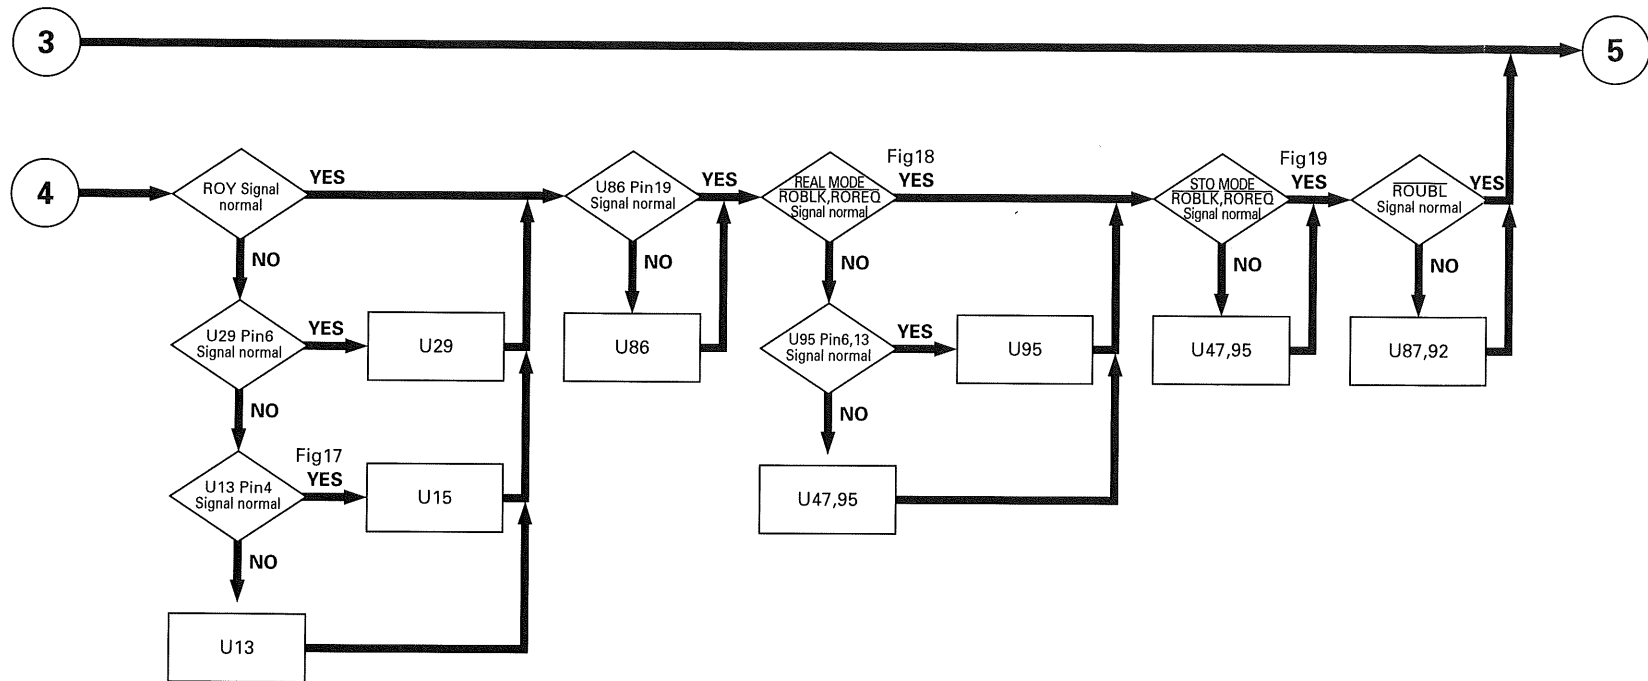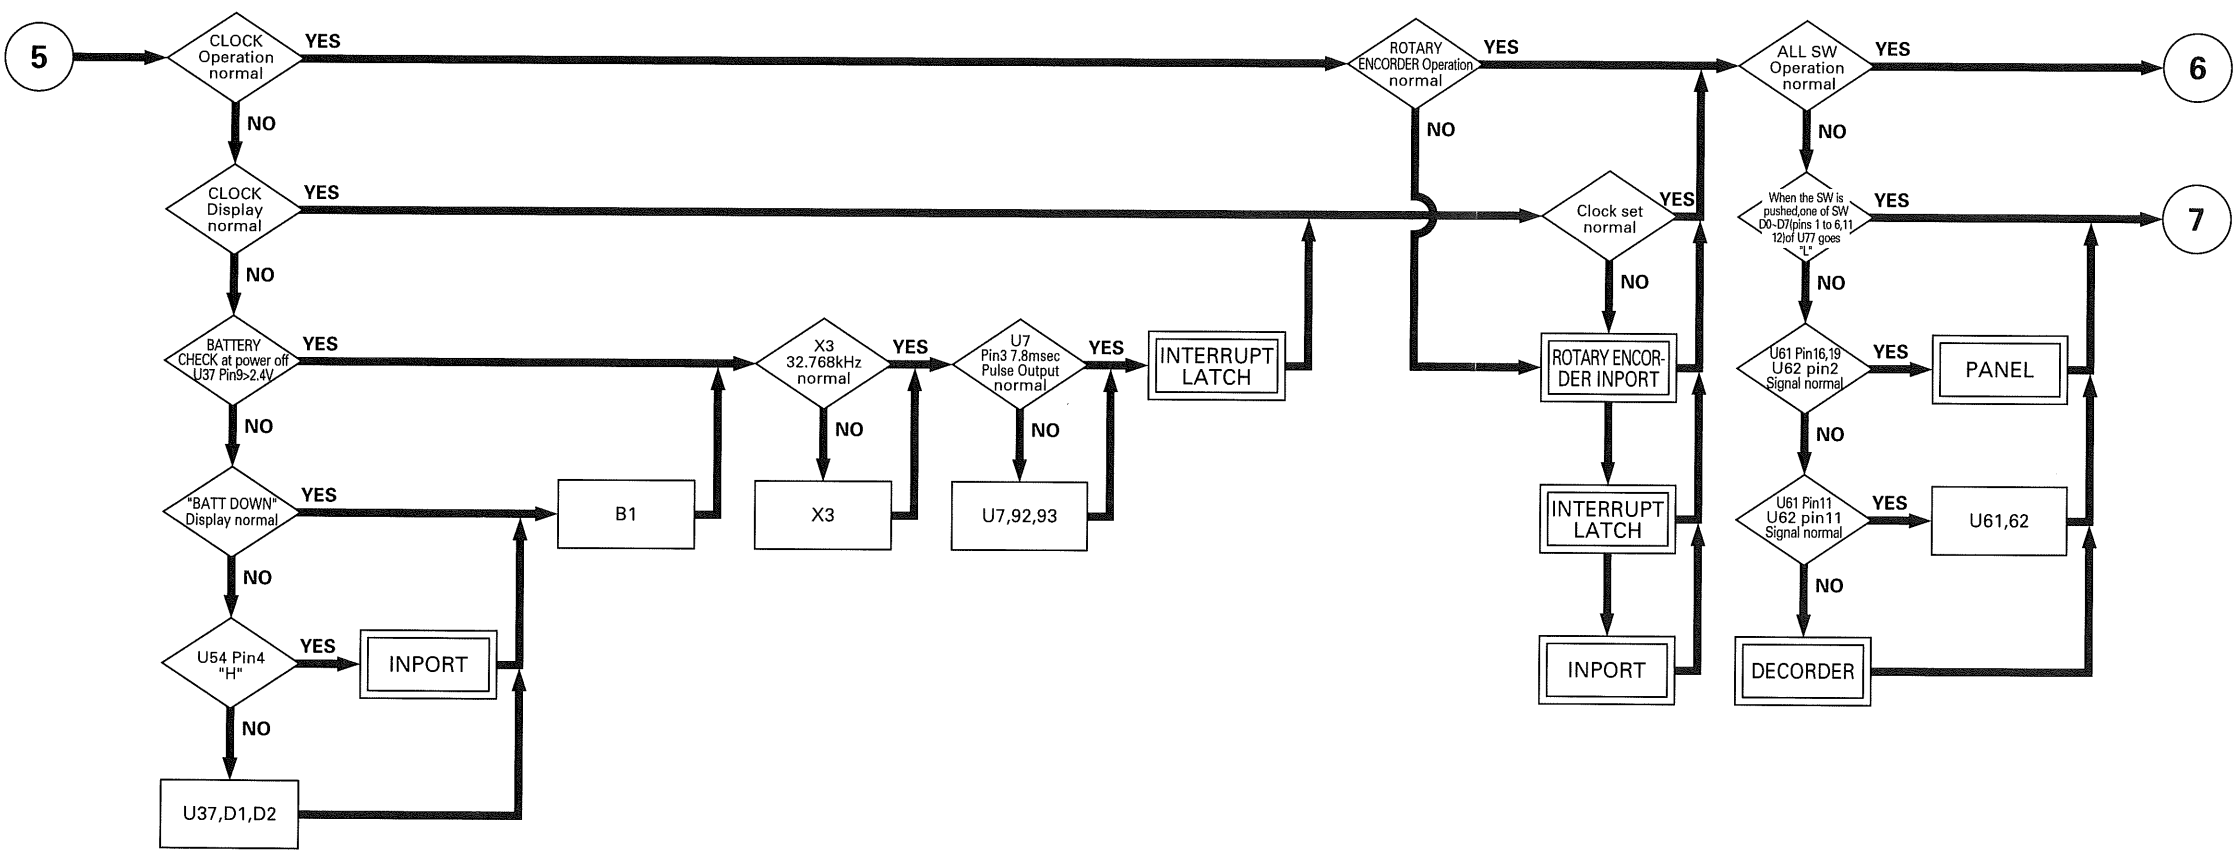

# TROUBLESHOOTING

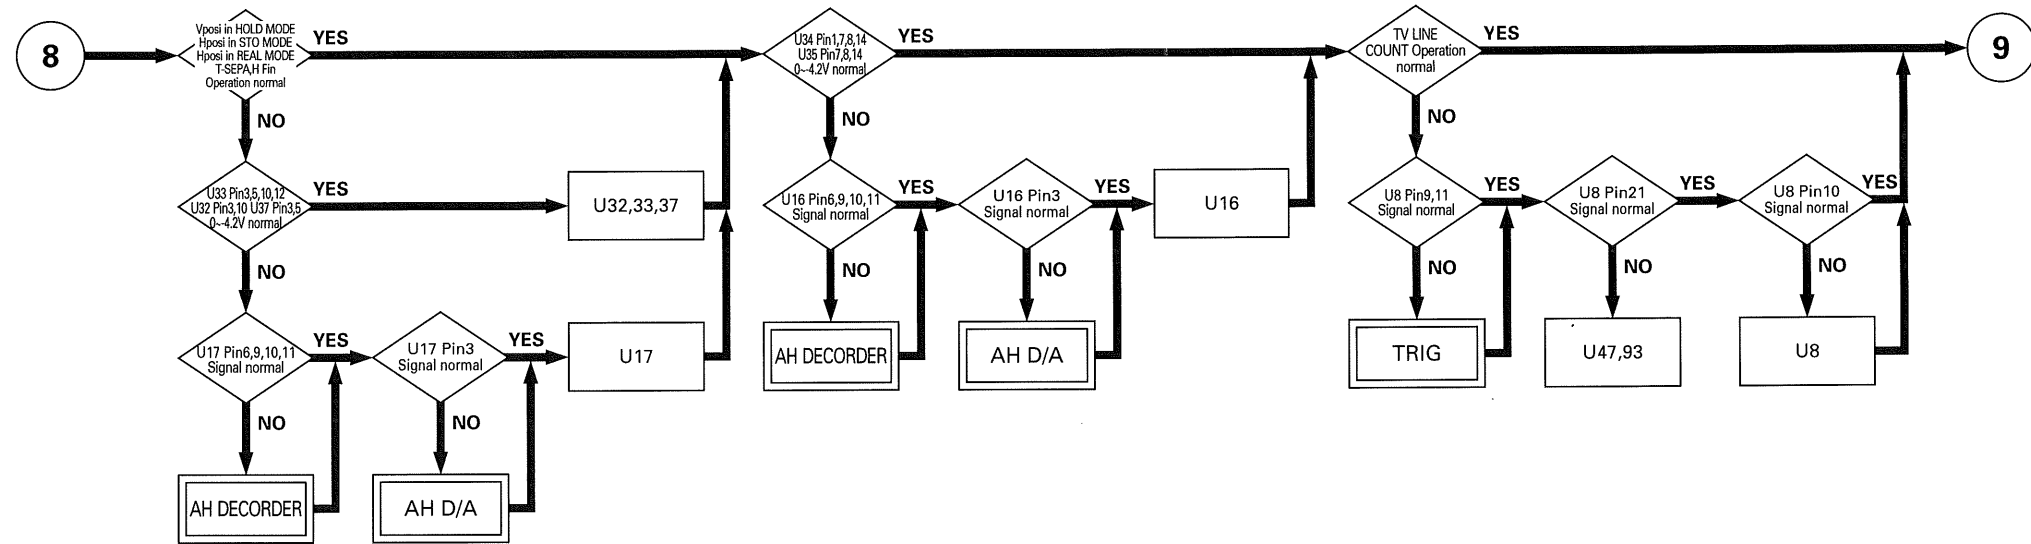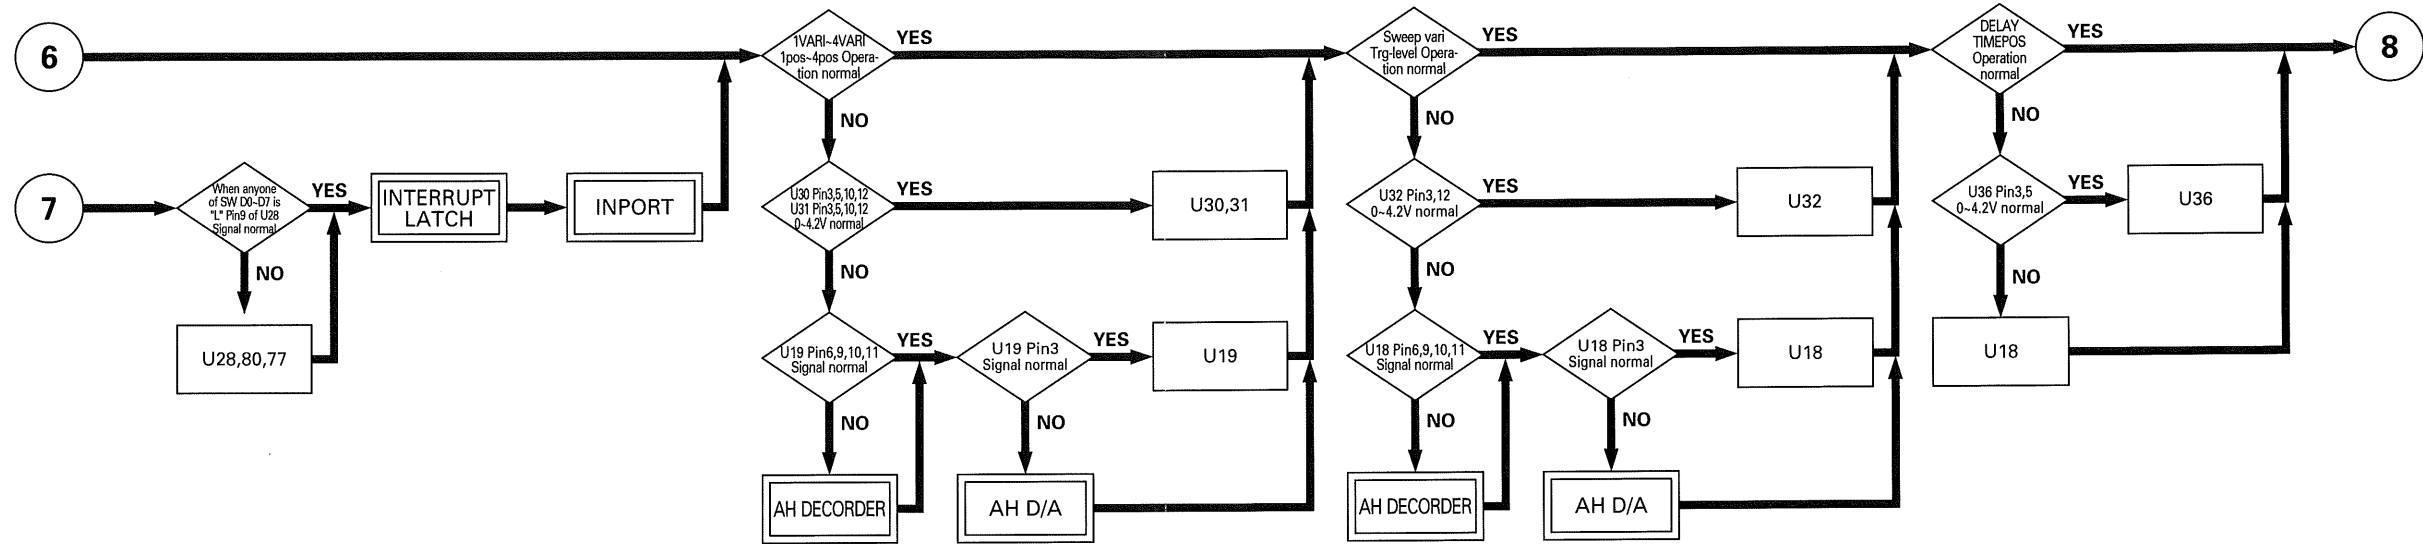

# TROUBLESHOOTING

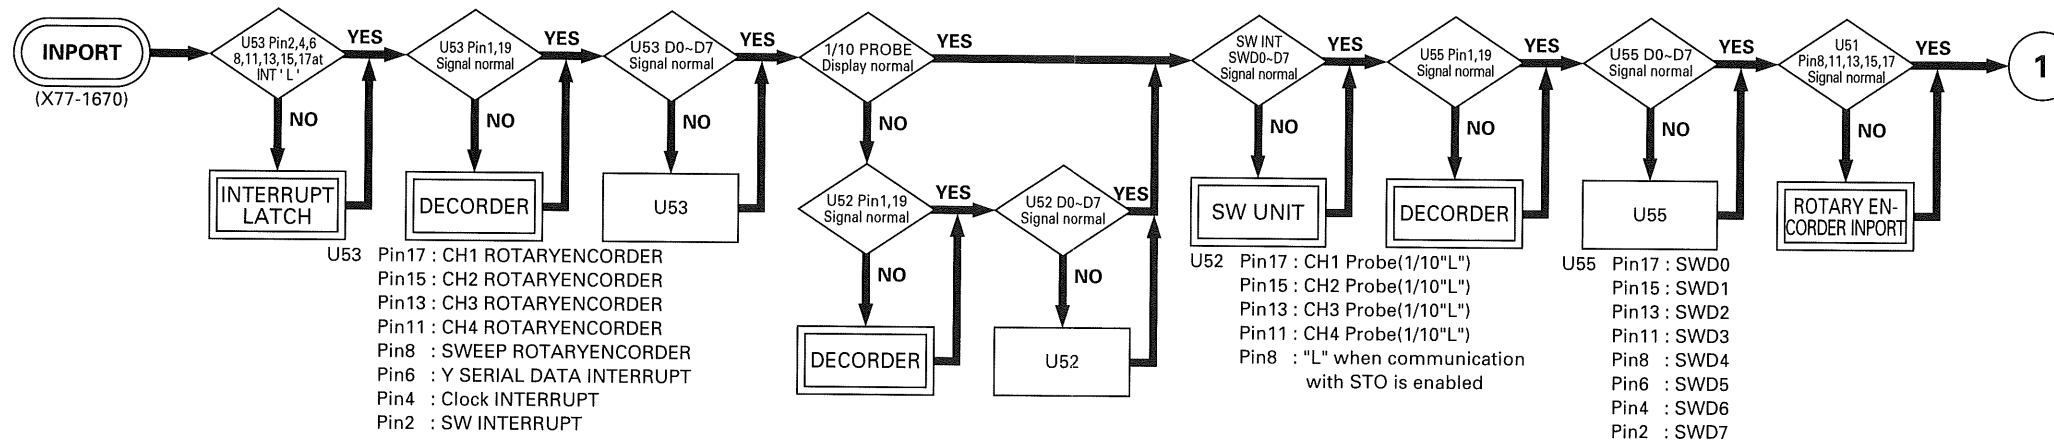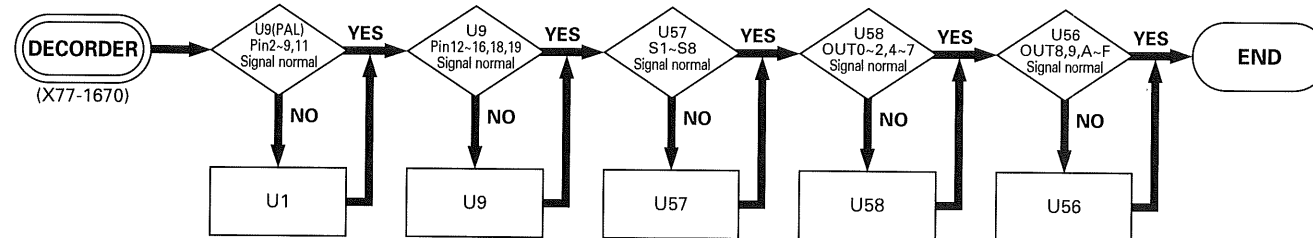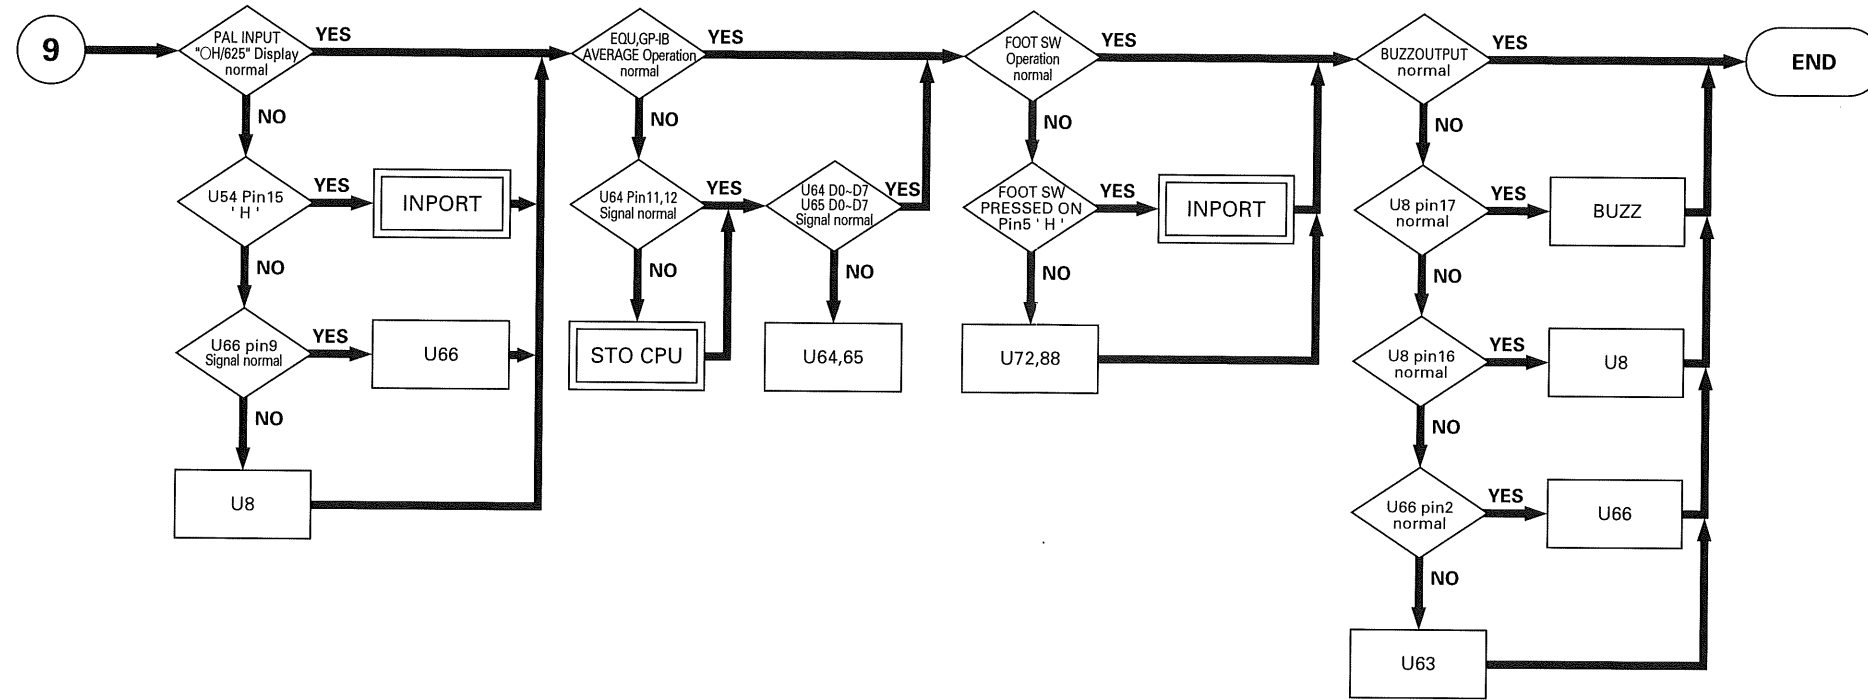

# TROUBLESHOOTING





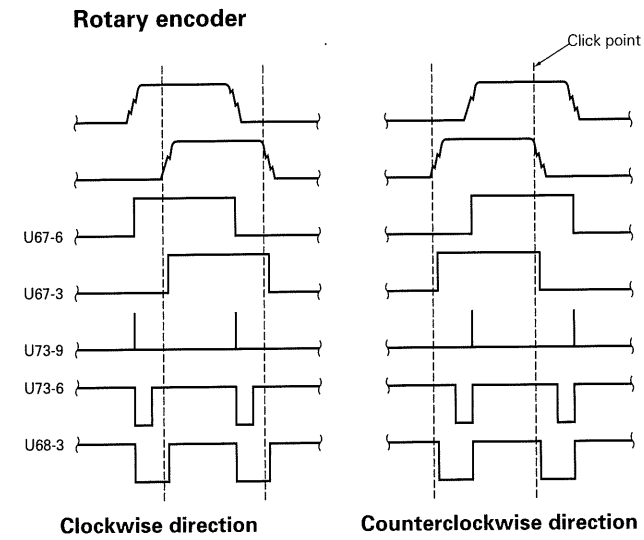


Fig.20

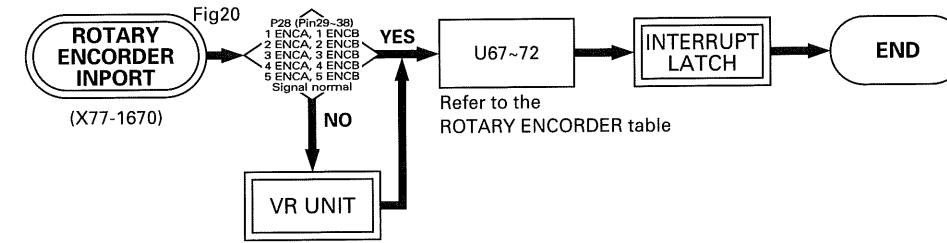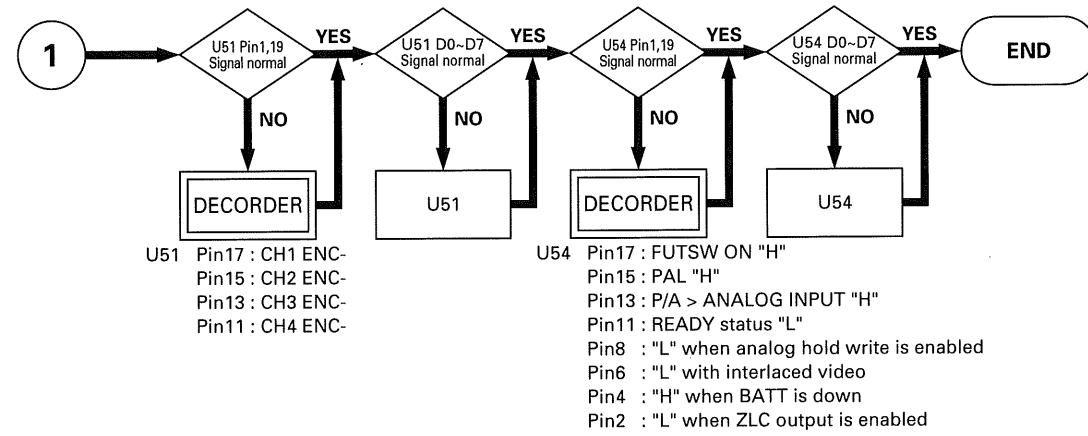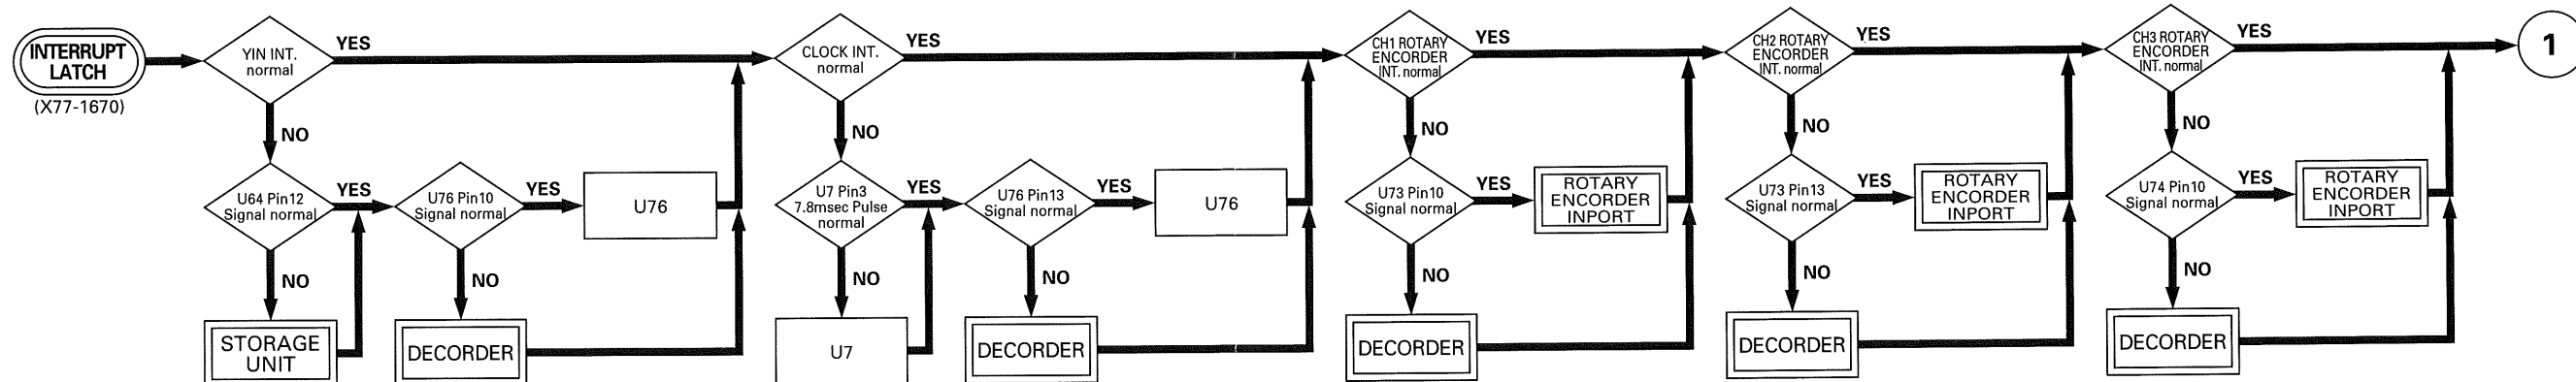

# TROUBLESHOOTING

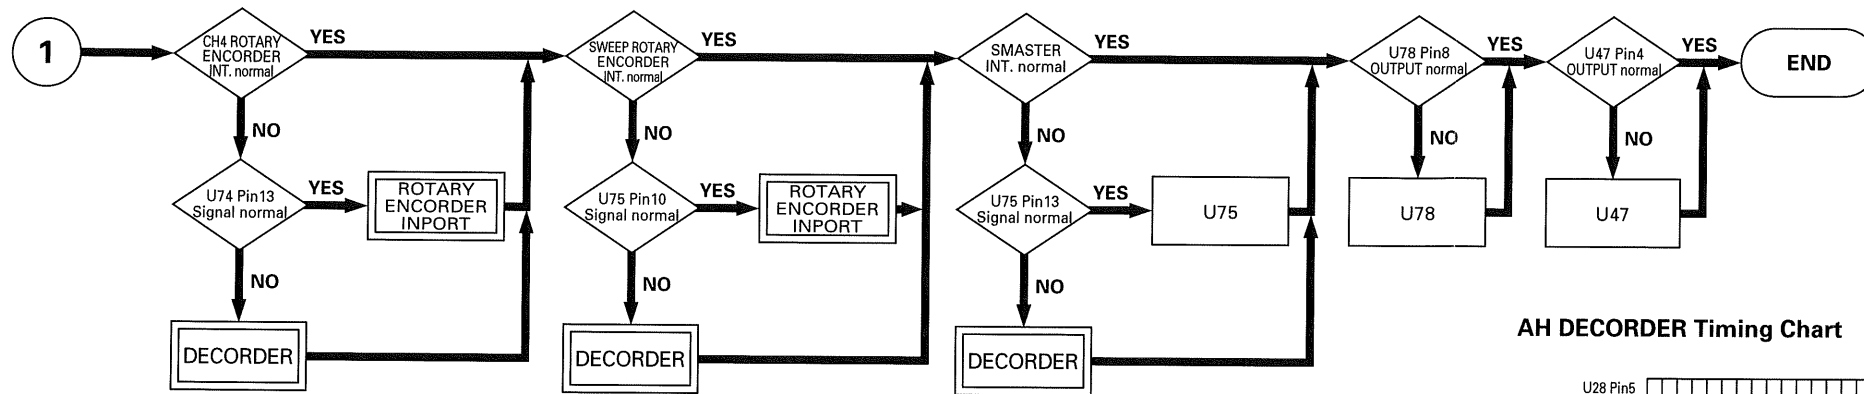

AH DECORDER Timing Chart




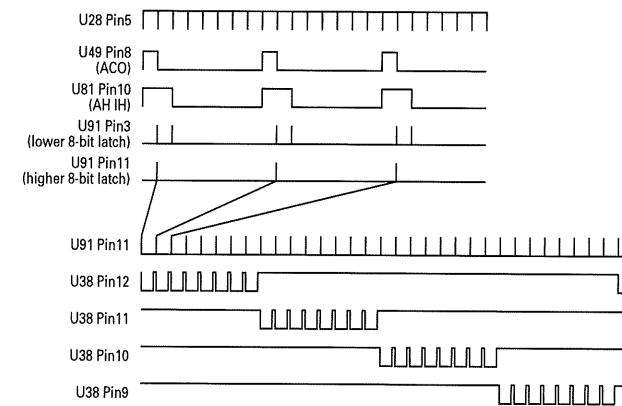



Fig.21

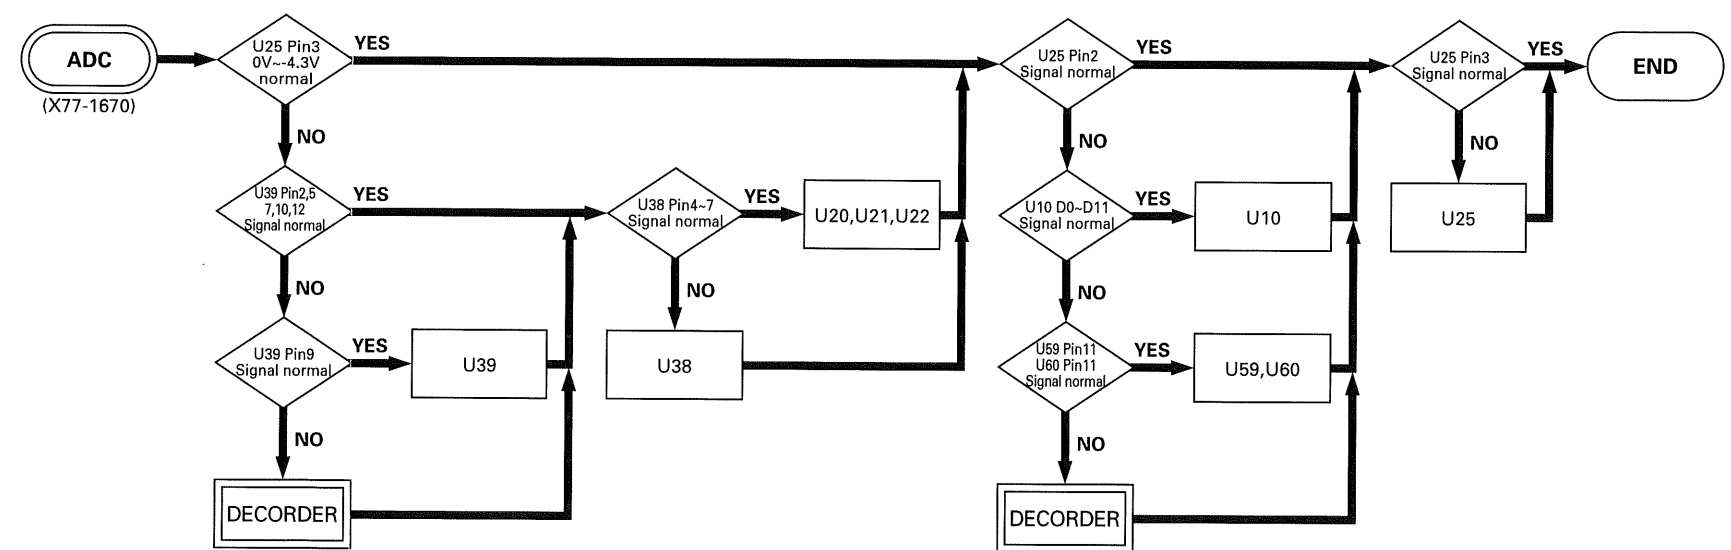

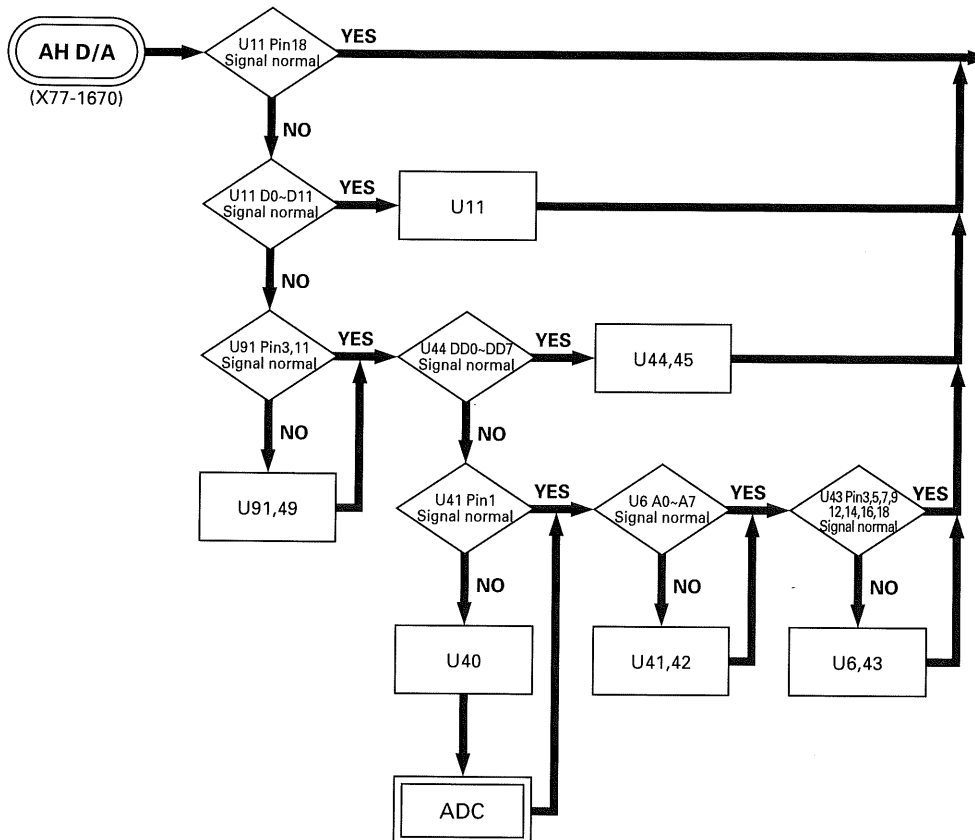

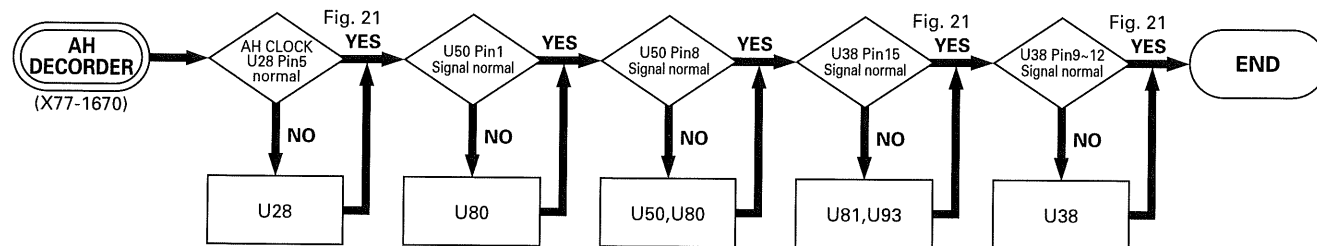


# DISASSEMBLY

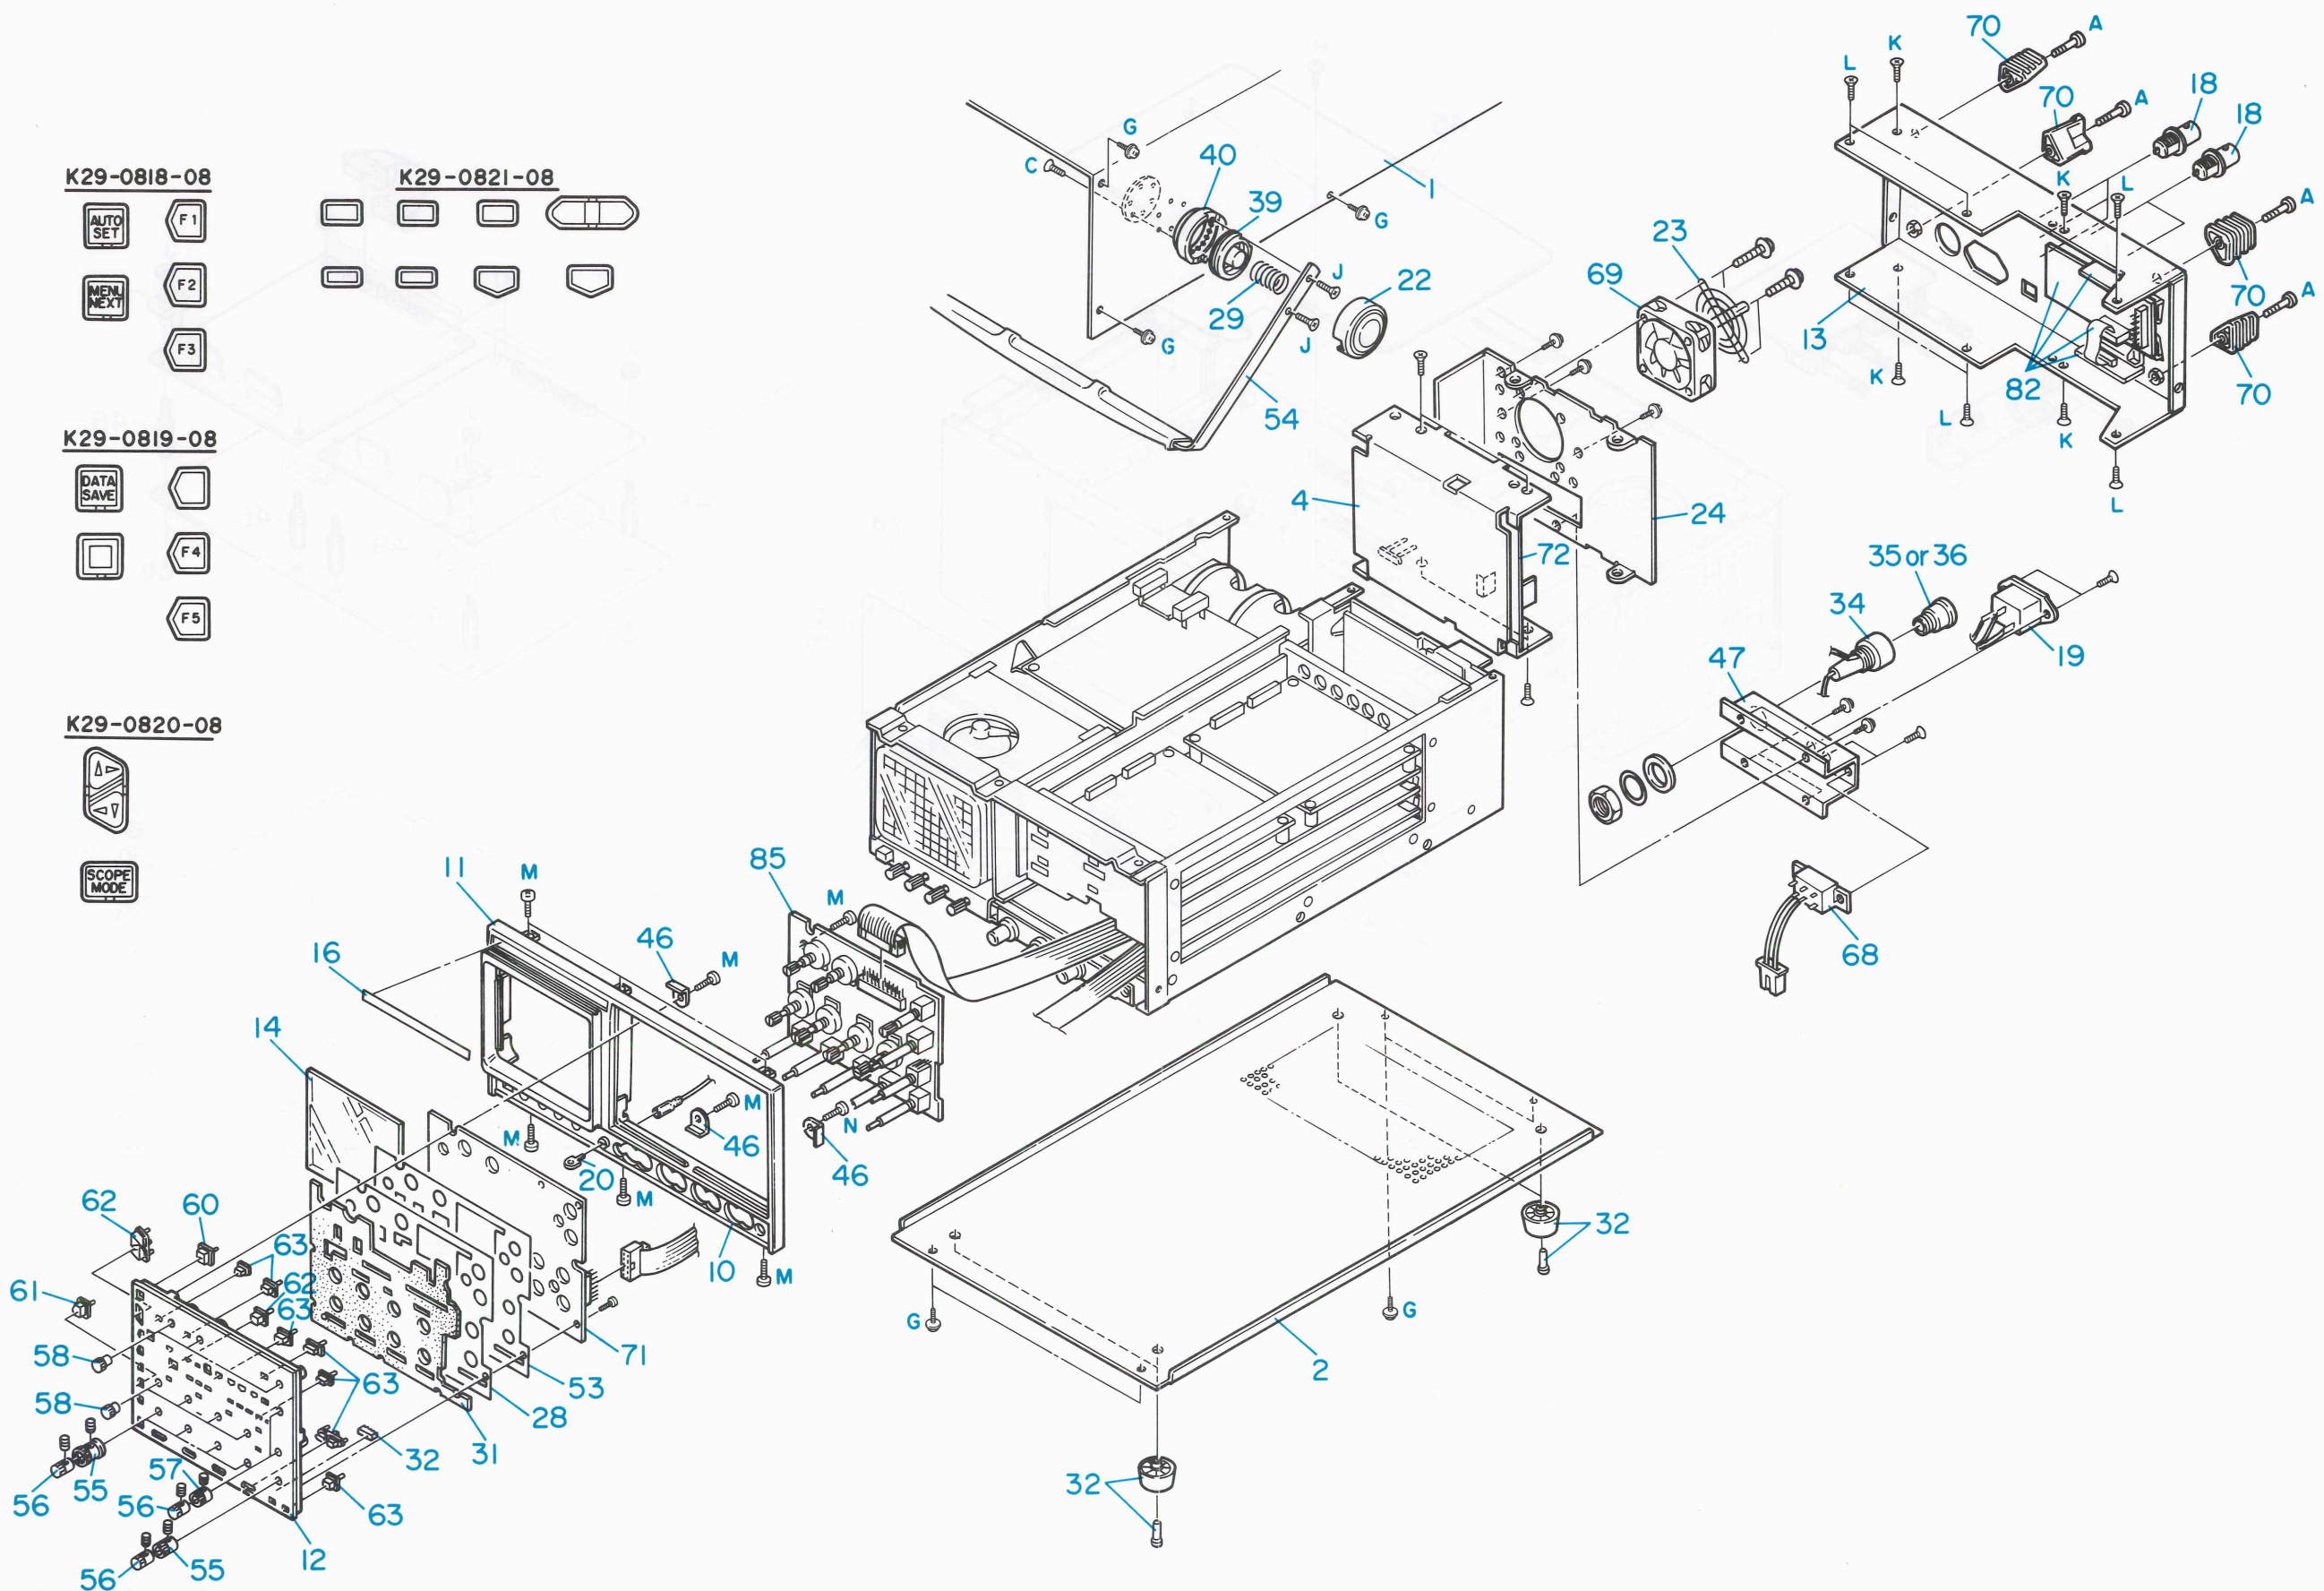

K29-0818-08



K29-0821-08




K29-0819-08



K29-0820-08




# DISASSEMBLY

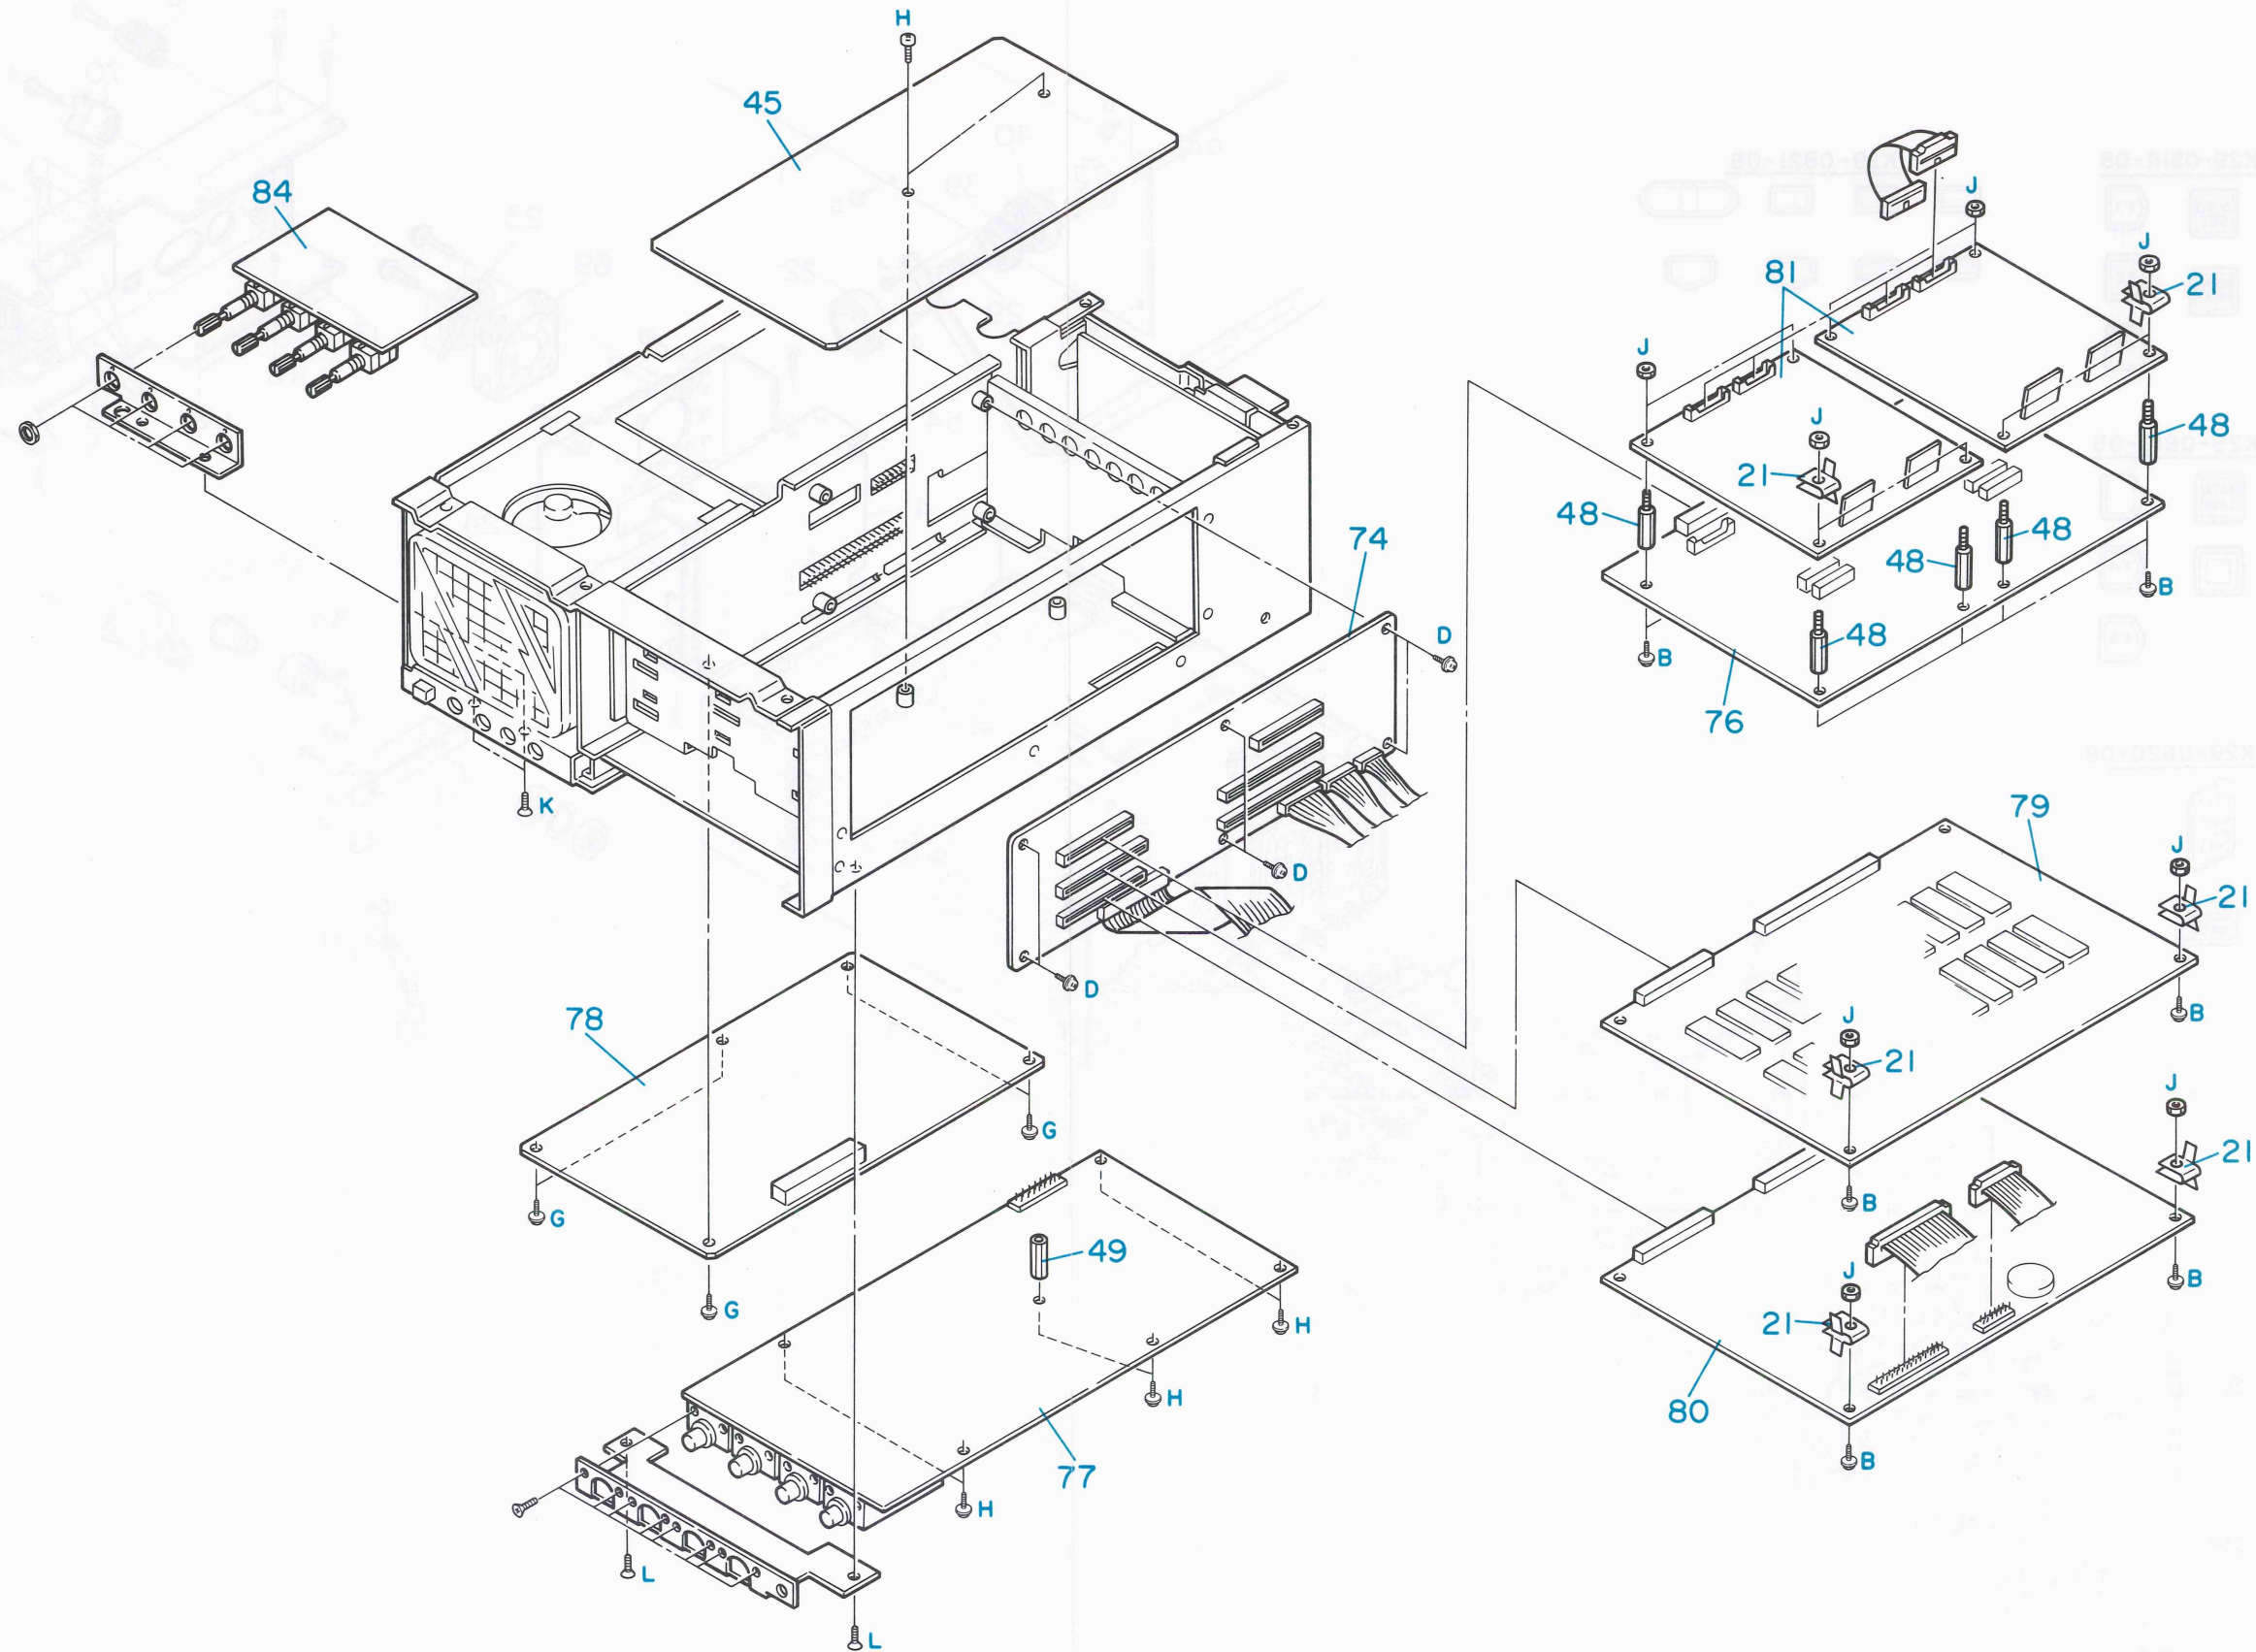



# DISASSEMBLY

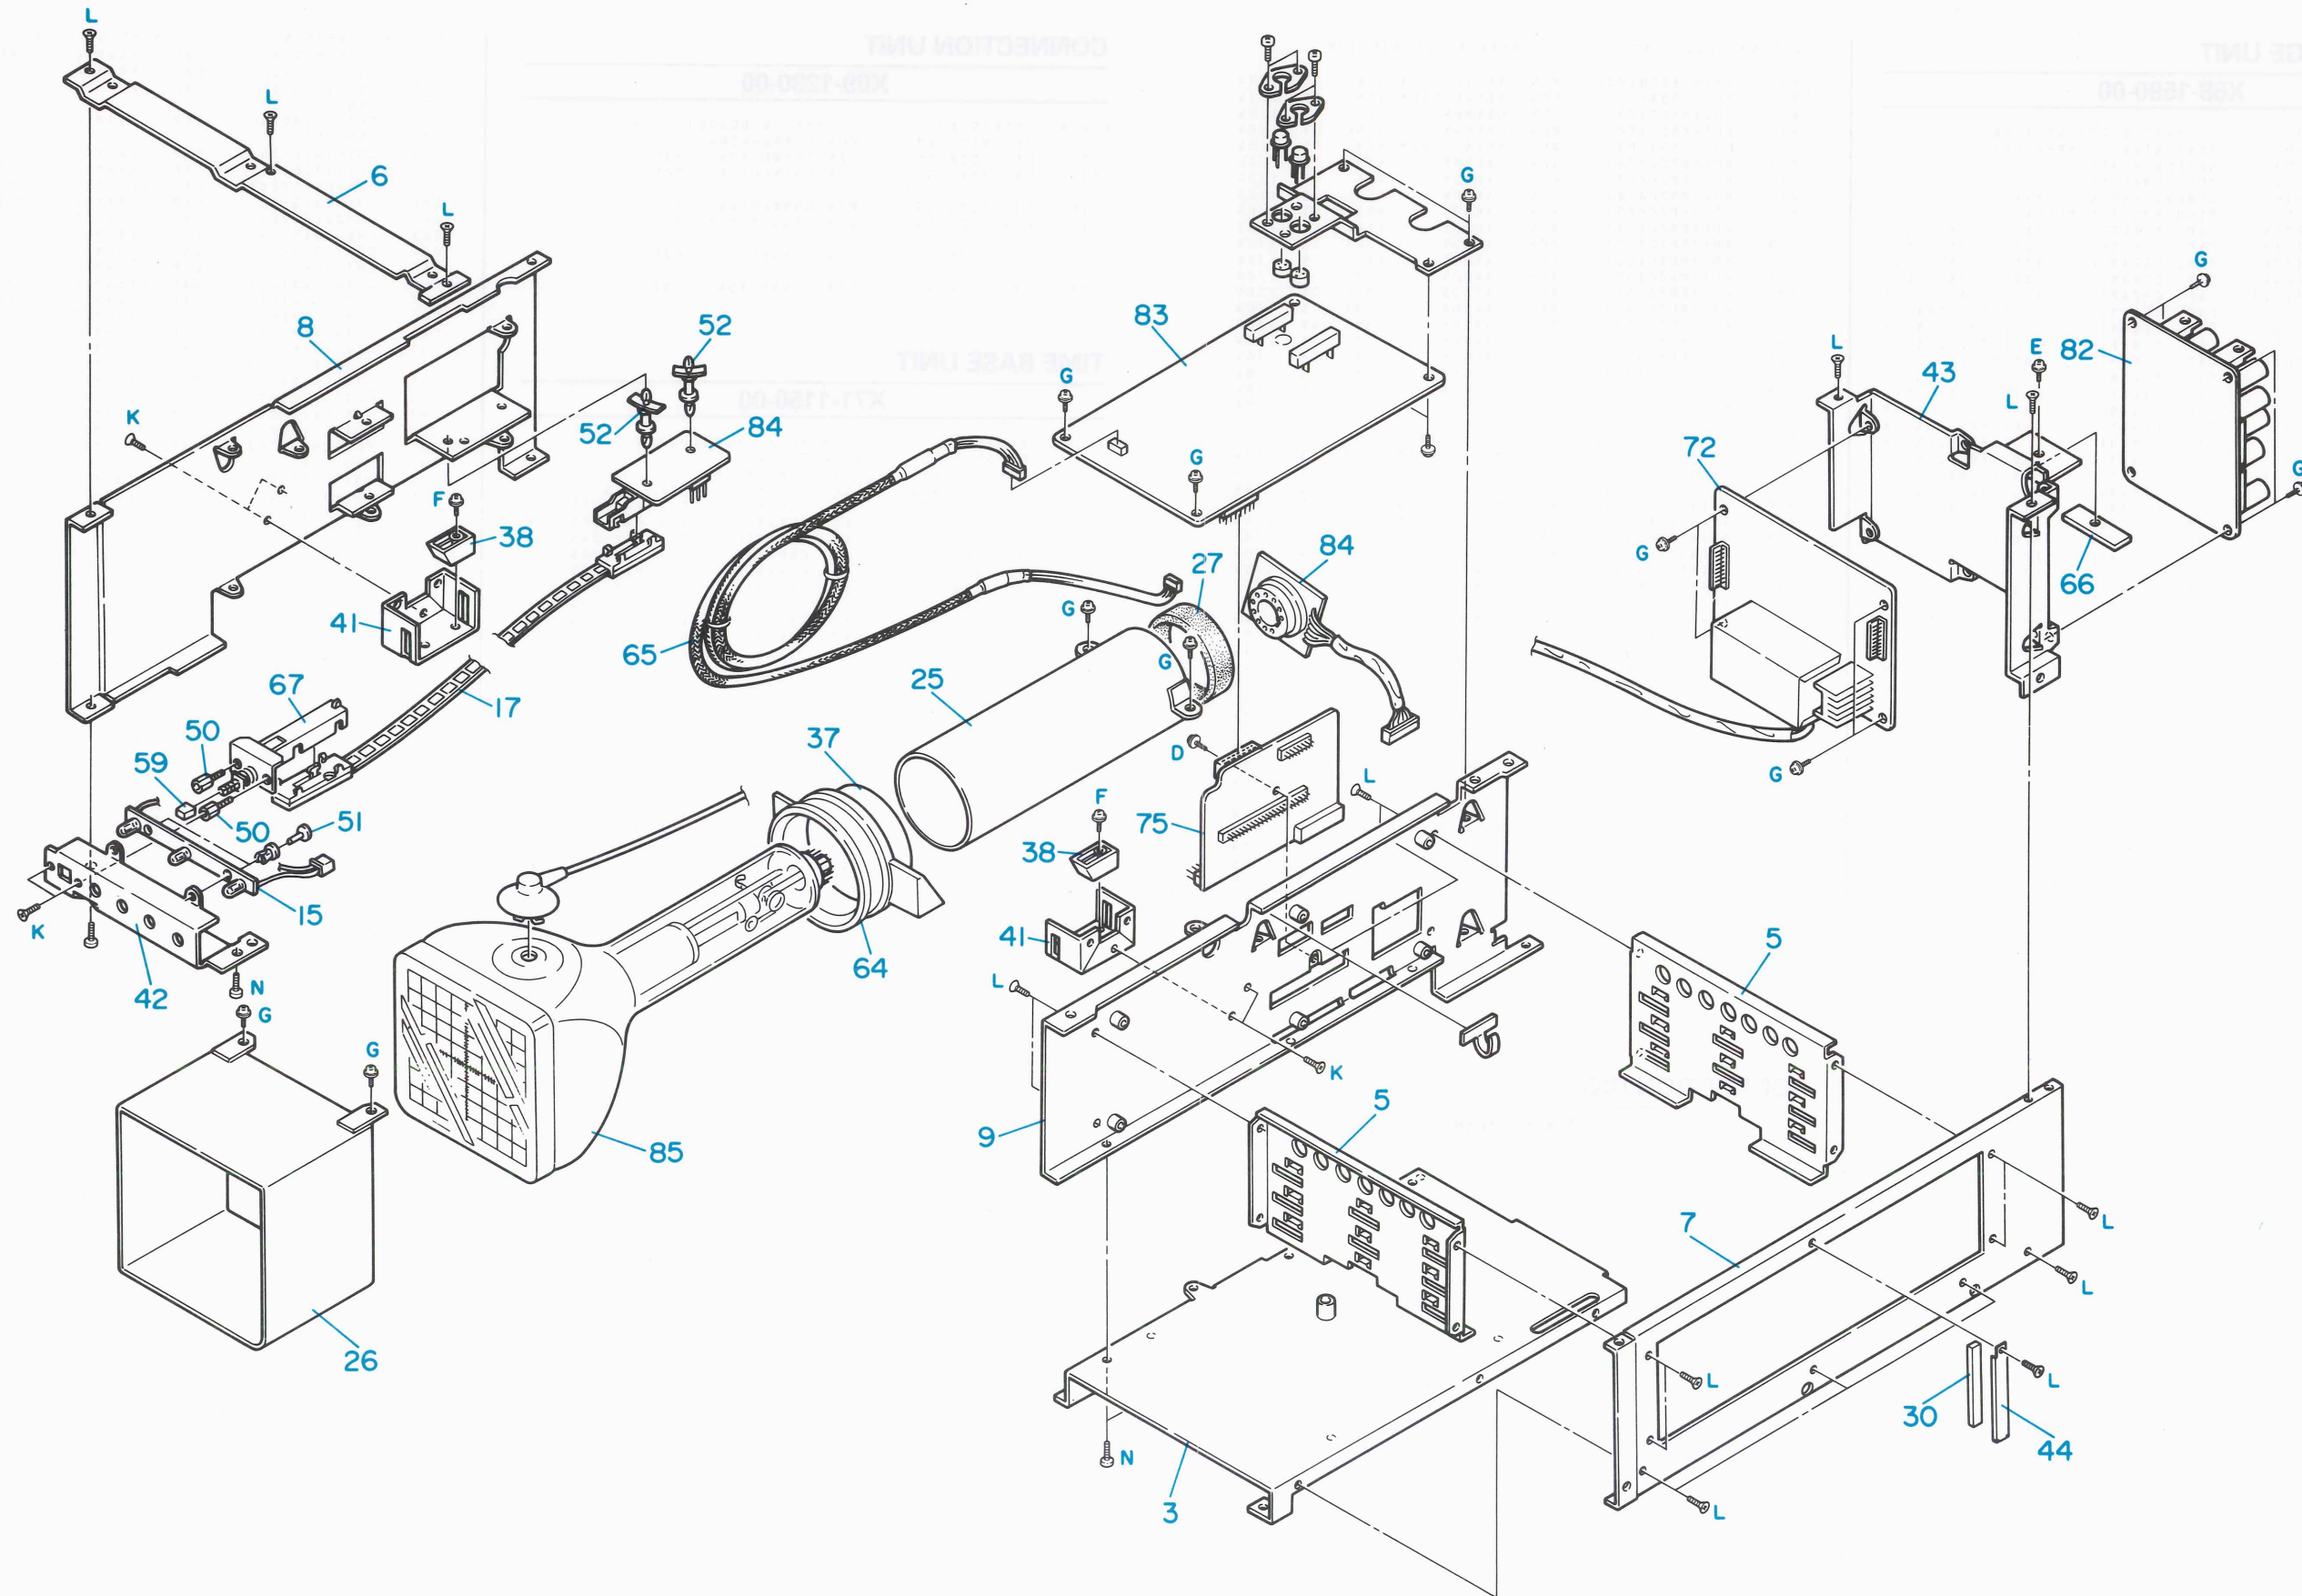

PARTS LIST

HIGH VOLTAGE UNIT

X68-1590-00

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and various specifications like capacitance and voltage. Includes parts like HEAT SINK, SHIELD PLATE, and various capacitors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists diodes (1SS132, 1SS83).

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists ferrite inductors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists neon lamps.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists pin connectors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various transistors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists carbon resistors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists carbon resistors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various resistors and metal film components.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists carbon resistors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists ICs.

CONNECTION UNIT

X69-1210-00

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists PCBs, wire connectors, and pin connectors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists pin connectors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists carbon resistors.

PARTS LIST

CONNECTION UNIT

X69-1230-00

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists PCBs, pin connectors, and wire assemblies.

TIME BASE UNIT

X71-1150-00

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like capacitors, resistors, and diodes.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like capacitors, resistors, and diodes.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like diodes and filters.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like pin connectors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like transistors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like transistors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like carbon resistors.

Table with 4 columns: REF. NO, PARTS NO, NAME & DESCRIPTION, and specifications. Lists various electronic components like carbon resistors.

# PARTS LIST

REF.	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R23	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	R814	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R24	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	R815	RD14BB2C561J	RES. CARBON 560 5% 1/6W
R25	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	TC2	C05-0464-05	CAP. TRIMMER 2P
R26	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	U1	MC10H131L	IC, DUAL D-FILP FLOP
R27	RD14BB2C391J	RES. CARBON 390 5% 1/6W	U2	MC10H016L	IC, BINARY COUNTER
R28	RD14BB2C391J	RES. CARBON 390 5% 1/6W	U3	MC10H104L	IC, GATE FUNCTIONS
R29	R90-1127-05	RES. NETWORK 390	U4	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R30	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	U5	SN74ALS390N	IC, DUAL DECADE COUNTERS
R31	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	U6	SN74ALS393N	IC, 4-STATE BINARY COUNTER
R32	RD14BB2C391J	RES. CARBON 390 5% 1/6W	U7	SN74ALS153N	IC, DUAL 4-1 DATA SELECTOR/MPX
R33	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	U8	SPG8650-0	IC, PROGRAMMABLE DEMULTIPLIER
R34	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W	U9	SN74AS151N	IC, 8-CHANNEL MULTIPLEXER
R35	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W	U10	MC10H124L	IC, QUAD TTL-TO-MECL TRANSIATOR
R36	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	U11	MC10H174L	IC, DUAL 4-TO-1 MULTIPLEXER
R37	RN14BK2C1202F	RES. METAL FILM 12K 1% 1/6W	U12	MC10H141L	IC, 4-BIT SHIFT REGISTER
R43	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U13	MC10H125L	IC, QUAD MECL-TO-TTL TRANSIATOR
R44	RD14BB2C131J	RES. CARBON 130 5% 1/6W	U14	MC10H131L	IC, DUAL D-FILP FLOP
R45	RD14BB2C391J	RES. CARBON 390 5% 1/6W	U15	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R46	RD14BB2C471J	RES. CARBON 470 5% 1/6W	U16	MC10H105L	IC, GATE FUNCTION
R47	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U17	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R48	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U18	SN74AS161N	IC, SYNCHRONOUS DECADE COUNTERS
R49	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U19	SN74AS161N	IC, SYNCHRONOUS DECADE COUNTERS
R50	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U20	SN74AS161N	IC, SYNCHRONOUS DECADE COUNTERS
R51	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U21	SN74ALS541N	IC, OCTAL BUS BUFFER(3-STATE)
R52	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U22	SN74ALS541N	IC, OCTAL BUS BUFFER(3-STATE)
R53	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U23	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R54	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U24	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R55	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U25	74F193PC	IC, UP/DOWN BINARY COUNTER
R56	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U26	74F193PC	IC, UP/DOWN BINARY COUNTER
R57	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U27	74F193PC	IC, UP/DOWN BINARY COUNTER
R58	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U28	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R59	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U29	74F191PC	IC, UP/DOWN BINARY COUNTER
R60	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U30	74F191PC	IC, UP/DOWN BINARY COUNTER
R61	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U31	74F191PC	IC, UP/DOWN BINARY COUNTER
R62	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U32	74F191PC	IC, UP/DOWN BINARY COUNTER
R63	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U33	74F191PC	IC, UP/DOWN BINARY COUNTER
R64	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U34	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R65	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U35	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R66	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U36	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
R67	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U37	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
R68	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U38	SN74ALS96N	IC, 5-BIT SHIFT REGISTERS
R69	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U39	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
R70	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U40	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R71	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U41	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R72	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U42	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R73	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U43	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R74	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U44	SN74AS08N	IC, QUAD 2-INPUT AND GATE
R75	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U45	SN74LS08N	IC, QUAD 2-INPUT AND GATE
R76	NO USE		U46	SN74AS00N	IC, QUAD 2-INPUT NAND GATE
R77	RD14BB2C361J	RES. CARBON 360 5% 1/6W	U47	SN74LS04N	IC, HEX INVERTER
R78	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W	U48	MC10H105L	IC, GATE FUNCTION
R79	RD14BB2C331J	RES. CARBON 330 5% 1/6W	U49	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
R80	RD14BB2C431J	RES. CARBON 430 5% 1/6W	U50	SN74AS32N	IC, QUAD 2-INPUT OR GATE
R81	RD14BB2C391J	RES. CARBON 390 5% 1/6W	U51	SN74AS08N	IC, QUAD 2-INPUT AND GATE
R82	RD14BB2C391J	RES. CARBON 390 5% 1/6W	U52	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R83	RD14BB2C301J	RES. CARBON 300 5% 1/6W	U53	NJM4558D	IC, DUAL OP AMP
R84	RD14BB2C301J	RES. CARBON 300 5% 1/6W	U56	MC10H125L	IC, QUAD MECL-TO-TTL TRANSIATOR
R85	RD14BB2C301J	RES. CARBON 300 5% 1/6W	U57	TC74HC123AP	IC, DUAL MONOSTABLE MULTIVIB.
R86	RD14BB2C301J	RES. CARBON 300 5% 1/6W	U58	SN74AS32N	IC, QUAD 2-INPUT OR GATE
R87	RD14BB2C511J	RES. CARBON 510 5% 1/6W	U59	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R88	RD14BB2C511J	RES. CARBON 510 5% 1/6W	U60	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
R89	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	U61	SN74AS00N	IC, QUAD 2-INPUT NAND GATE
R90	NO USE		X1	L77-1072-15	CRYSTAL RESONATOR (10MHZ)
R91	RD14BB2C391J	RES. CARBON 390 5% 1/6W			
R94	RD14BB2C431J	RES. CARBON 430 5% 1/6W			
R97	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R98	RD14BB2C431J	RES. CARBON 430 5% 1/6W			
R99	RD14BB2C431J	RES. CARBON 430 5% 1/6W			
R100	RD14BB2C751J	RES. CARBON 750 5% 1/6W			
R101	RD14BB2C271J	RES. CARBON 270 5% 1/6W			
R102	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R103	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R104	RD14BB2C100J	RES. CARBON 10 5% 1/6W			
R105	RD14BB2C360J	RES. CARBON 36 5% 1/6W			
R106	RD14BB2C471J	RES. CARBON 470 5% 1/6W			
R107	RD14BB2C431J	RES. CARBON 430 5% 1/6W			
R108	RD14BB2C751J	RES. CARBON 750 5% 1/6W			
R109	RD14BB2C100J	RES. CARBON 10 5% 1/6W			
R110	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R111	RD14BB2C100J	RES. CARBON 10 5% 1/6W			
R112	RD14BB2C100J	RES. CARBON 10 5% 1/6W			
R113	RD14BB2C100J	RES. CARBON 10 5% 1/6W			
R114	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R115	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R116	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R117	RD14BB2C391J	RES. CARBON 390 5% 1/6W			
R118	R90-1145-05	RES. NETWORK 10X4			
R119	R90-1145-05	RES. NETWORK 10X4			
R120	R90-1145-05	RES. NETWORK 10X4			
R125	R90-0653-05	RES. NETWORK 8X10K			
R126	R90-0653-05	RES. NETWORK 8X10K			



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
K201	S76-0613-05	RELAY
K202	S76-0613-05	RELAY
K203	S76-0612-05	RELAY
K301	S76-0613-05	RELAY
K302	S76-0613-05	RELAY
K303	S76-0612-05	RELAY
K401	S76-0613-05	RELAY
K402	S76-0613-05	RELAY
K403	S76-0612-05	RELAY
L1	L79-0551-05	FILTER
L2	L79-0551-05	FILTER
L3	L79-0551-05	FILTER
L4	L79-0553-05	FILTER
L5	L79-0553-05	FILTER
L6	L79-0553-05	FILTER
L7	L79-0553-05	FILTER
L8	L79-0553-05	FILTER
L9	L79-0553-05	FILTER
L10	L79-0553-05	FILTER
L11	L79-0553-05	FILTER
L12	L79-0553-05	FILTER
L101	L40-6882-70	FERRI INDUCTOR 0.68UH 20%
L201	L40-6882-70	FERRI INDUCTOR 0.68UH 20%
L301	L40-6882-70	FERRI INDUCTOR 0.68UH 20%
L401	L40-6882-70	FERRI INDUCTOR 0.68UH 20%
P1	E40-3237-05	PIN CONNECTOR 2P
P2	E40-3237-05	PIN CONNECTOR 2P
P3	E40-3237-05	PIN CONNECTOR 2P
P4	E40-3237-05	PIN CONNECTOR 2P
P5	E40-3238-05	PIN CONNECTOR 3P
P6	E40-3237-05	PIN CONNECTOR 2P
P7	E40-7230-05	PIN CONNECTOR 34P
Q101	2SC4049	TR. SI, NPN
Q102	2SC4049	TR. SI, NPN
Q201	2SC4049	TR. SI, NPN
Q202	2SC4049	TR. SI, NPN
Q301	2SC4049	TR. SI, NPN
Q302	2SC4049	TR. SI, NPN
Q401	2SC4049	TR. SI, NPN
Q402	2SC4049	TR. SI, NPN
Q501	2SC3779(D)	TR. SI, NPN
Q502	2SC3779(D)	TR. SI, NPN
Q503	2SA1175(F)	TR. SI, PNP
Q504	2SA1005(K)	TR. SI, PNP
Q505	2SA1005(K)	TR. SI, PNP
Q506	2SC3779(D)	TR. SI, NPN
Q507	2SC3779(D)	TR. SI, NPN
Q508	2SA1206(K)	TR. SI, PNP
Q509	2SA1206(K)	TR. SI, PNP
Q510	2SA1459	TR. SI, PNP
Q511	2SA1459	TR. SI, PNP
Q512	2SA1459	TR. SI, PNP
Q513	2SA1459	TR. SI, PNP
Q514	2SA1459	TR. SI, PNP
Q515	2SA1459	TR. SI, PNP
Q601	2SK583-KEN	FET, N-CHANNEL
Q602	2SK583-KEN	FET, N-CHANNEL
R101	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R102	RD14BB2C511J	RES. CARBON 510 5% 1/6W
R103	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
R104	RN14BK2C1500D	RES. METAL FILM 150 0.5% 1/6W
R105	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W
R106	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W
R107	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R108	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R109	RD14BB2C620J	RES. CARBON 62 5% 1/6W
R110	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R111	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R112	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R113	RD14BB2C161J	RES. CARBON 160 5% 1/6W
R114	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R115	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R116	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R117	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R118	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R119	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R120	RD14BB2C562J	RES. CARBON 5.6K 3% 1/6W
R121	RD14BB2C153J	RES. CARBON 15K 3% 1/6W
R122	RD14BB2C123J	RES. CARBON 12K 3% 1/6W
R123	RD14BB2C103J	RES. CARBON 10K 3% 1/6W
R124	RD14BB2C562J	RES. CARBON 5.6K 3% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
R125	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R126	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R127	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R128	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R129	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R130	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R131	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R132	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R133	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R134	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R135	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R136	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
R137	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R138	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R139	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R140	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R141	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R142	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R143	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R144	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R145	RD14BB2C161J	RES. CARBON 160 5% 1/6W
R146	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R147	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R148	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R149	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R197	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R198	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R199	RD14BB2C2R2J	RES. CARBON 2.2 5% 1/6W
R200	NO USE	
R201	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R202	RD14BB2C511J	RES. CARBON 510 5% 1/6W
R203	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
R204	RN14BK2C1500D	RES. METAL FILM 150 0.5% 1/6W
R205	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W
R206	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W
R207	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R208	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R209	RD14BB2C620J	RES. CARBON 62 5% 1/6W
R210	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R211	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R212	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R213	RD14BB2C161J	RES. CARBON 160 5% 1/6W
R214	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R215	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R216	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R217	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R218	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R219	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R220	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R221	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R222	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R223	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R224	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R225	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R226	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R227	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R228	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R229	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R230	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R231	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R232	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R233	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R234	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R235	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R236	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
R237	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R238	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R239	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R240	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R241	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R242	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R243	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R244	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R245	RD14BB2C161J	RES. CARBON 160 5% 1/6W
R246	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R247	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R248	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R249	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R297	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R298	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R299	RD14BB2C2R2J	RES. CARBON 2.2 5% 1/6W
R300	NO USE	
R301	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R302	RD14BB2C511J	RES. CARBON 510 5% 1/6W
R303	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
R304	RN14BK2C1500D	RES. METAL FILM 150 0.5% 1/6W
R305	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W
R306	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W
R307	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R308	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R309	RD14BB2C620J	RES. CARBON 62 5% 1/6W
R310	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R311	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R312	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R313	RD14BB2C161J	RES. CARBON 160 5% 1/6W



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R314	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R509	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R315	RD14BB2C474J	RES. CARBON 470K 5% 1/6W	R510	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R316	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R511	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R317	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	R512	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R318	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R513	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R319	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R514	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R320	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R515	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R321	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	R516	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R322	RD14BB2C123J	RES. CARBON 12K 5% 1/6W	R517	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R323	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R518	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R324	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R519	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R325	RD14BB2C123J	RES. CARBON 12K 5% 1/6W	R520	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R326	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R521	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R327	RD14BB2C303J	RES. CARBON 30K 5% 1/6W	R522	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R328	RD14BB2C203J	RES. CARBON 20K 5% 1/6W	R523	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R329	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R524	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R330	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R525	RD14BB2C911J	RES. CARBON 910 5% 1/6W
R331	RD14BB2C333J	RES. CARBON 33K 5% 1/6W	R526	RD14BB2C911J	RES. CARBON 910 5% 1/6W
R332	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R527	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R333	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R528	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R334	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R529	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R335	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R530	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R336	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W	R531	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R337	RD14BB2C390J	RES. CARBON 39 5% 1/6W	R532	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W
R338	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W	R533	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W
R339	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R534	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R340	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W	R535	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R341	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	R536	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R342	RD14BB2C243J	RES. CARBON 24K 5% 1/6W	R537	NO USE	
R343	RD14BB2C393J	RES. CARBON 39K 5% 1/6W	R538	RN14BK2C68R0F	RES. METAL FILM 68.0 1% 1/6W
R344	RD14BB2C221J	RES. CARBON 220 5% 1/6W	R539	RN14BK2C68R0F	RES. METAL FILM 68.0 1% 1/6W
R345	RD14BB2C161J	RES. CARBON 160 5% 1/6W	R540	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R346	RD14BB2C221J	RES. CARBON 220 5% 1/6W	R541	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R347	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R542	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R348	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R543	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R349	RD14BB2C163J	RES. CARBON 16K 5% 1/6W	R544	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R397	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R545	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R398	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R546	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R399	RD14BB2C2R2J	RES. CARBON 2.2 5% 1/6W	R547	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R400	NO USE		R548	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R401	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R549	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R402	RD14BB2C511J	RES. CARBON 510 5% 1/6W	R550	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R403	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W	R551	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R404	RN14BK2C1500D	RES. METAL FILM 150 0.5% 1/6W	R552	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R405	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W	R553	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R406	RN14BK2C75R0D	RES. METAL FILM 75.0 0.5% 1/6W	R554	NO USE	
R407	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R555	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R408	RD14BB2C390J	RES. CARBON 39 5% 1/6W	R601	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R409	RD14BB2C620J	RES. CARBON 62 5% 1/6W	R602	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R410	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R603	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R411	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R604	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R412	RD14BB2C221J	RES. CARBON 220 5% 1/6W	R605	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R413	RD14BB2C161J	RES. CARBON 160 5% 1/6W	R606	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R414	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R607	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R415	RD14BB2C474J	RES. CARBON 470K 5% 1/6W	R608	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R416	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R609	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R417	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	R610	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R418	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R611	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R419	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R612	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R420	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R613	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R421	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	R614	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R422	RD14BB2C123J	RES. CARBON 12K 5% 1/6W	R615	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R423	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R616	RD14BB2C750J	RES. CARBON 75 5% 1/6W
R424	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R617	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R425	RD14BB2C123J	RES. CARBON 12K 5% 1/6W	R624	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R426	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R625	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R427	RD14BB2C303J	RES. CARBON 30K 5% 1/6W	R626	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R428	RD14BB2C203J	RES. CARBON 20K 5% 1/6W	R627	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R429	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R628	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R430	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R629	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R431	RD14BB2C333J	RES. CARBON 33K 5% 1/6W	R630	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R432	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R631	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R433	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R632	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R434	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R633	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R435	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R634	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R436	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W	R635	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R437	RD14BB2C390J	RES. CARBON 39 5% 1/6W	R636	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R438	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W	R637	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R439	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R638	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R440	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W	R639	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R441	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	R640	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R442	RD14BB2C243J	RES. CARBON 24K 5% 1/6W	R641	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R443	RD14BB2C393J	RES. CARBON 39K 5% 1/6W	R642	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R444	RD14BB2C221J	RES. CARBON 220 5% 1/6W	R643	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R445	RD14BB2C161J	RES. CARBON 160 5% 1/6W	R801	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R446	RD14BB2C221J	RES. CARBON 220 5% 1/6W	R802	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R447	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R803	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R448	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R804	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R449	RD14BB2C163J	RES. CARBON 16K 5% 1/6W	R805	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R497	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R806	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R498	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R807	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R499	RD14BB2C2R2J	RES. CARBON 2.2 5% 1/6W	R808	RD14BB2C751J	RES. CARBON 750 5% 1/6W
			R809	RD14BB2C331J	RES. CARBON 330 5% 1/6W
			R810	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R811	R92-1189-05	RES. LT3000 470 5% 1/6W	U401	KNC04	IC, LINEAR
R812	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	U402	LM6364N	IC, OP AMP
R813	R92-1189-05	RES. LT3000 470 5% 1/6W	U403	KNC05	IC, LINEAR
R816	RD14BB2C751J	RES. CARBON 750 5% 1/6W	U404	KNC06	IC, LINEAR
R817	RN14BK2E4300F	RES. METAL FILM 430 1% 1/4W	U405	NJN4558D	IC, DUAL OP AMP
R818	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U406	KNC08	IC, LINEAR
R819	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U501	KNC11	IC, LINEAR
R820	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U502	KNC11	IC, LINEAR
R821	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U503	KNC11	IC, LINEAR
R822	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U504	NO USE	
R823	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U505	SN74ALS112AN	IC, DUAL J-K F.F. (WITH PR&CLR)
R824	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	U506	SN74ALS112AN	IC, DUAL J-K F.F. (WITH PR&CLR)
R825	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	U507	SN74ALS00AN	IC, QUAD 2 INPUT NAND GATE
R826	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	U508	SN74ALS00AN	IC, QUAD 2 INPUT NAND GATE
R827	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	U601	KNC07	IC, LINEAR
R828	RD14BB2C684J	RES. CARBON 680K 5% 1/6W	U602	KNC07	IC, LINEAR
R829	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W	U603	KNC07	IC, LINEAR
R830	RD14BB2C331J	RES. CARBON 330 5% 1/6W	U604	KNC08	IC, LINEAR
R831	RD14BB2C331J	RES. CARBON 330 5% 1/6W	U605	NJN4558D	IC, DUAL OP AMP
R832	RD14BB2C331J	RES. CARBON 330 5% 1/6W	VR1	R12-3543-05	RES. SEMI FIXED 20KB
R833	RD14BB2C331J	RES. CARBON 330 5% 1/6W	VR101	R12-0571-05	RES. SEMI FIXED 500 B
R834	RD14BB2C331J	RES. CARBON 330 5% 1/6W	VR102	R12-5526-05	RES. SEMI FIXED 100KB
R835	RD14BB2C331J	RES. CARBON 330 5% 1/6W	VR103	R12-2520-05	RES. SEMI FIXED 5KB
R836	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	VR104	R12-5526-05	RES. SEMI FIXED 100KB
R837	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	VR105	NO USE	
R838	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	VR106	R12-5526-05	RES. SEMI FIXED 100KB
R839	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	VR107	R12-5526-05	RES. SEMI FIXED 100KB
R840	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	VR108	R12-1539-05	RES. SEMI FIXED 2KB
R841	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	VR109	R12-5526-05	RES. SEMI FIXED 100KB
R842	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	VR110	R12-5526-05	RES. SEMI FIXED 100KB
R843	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	VR111	R12-0569-05	RES. SEMI FIXED 100 B
R844	RD14BB2C181J	RES. CARBON 180 5% 1/6W	VR112	R12-3453-05	RES. SEMI FIXED 10KB
R845	RD14BB2C181J	RES. CARBON 180 5% 1/6W	VR201	R12-0571-05	RES. SEMI FIXED 500 B
R846	RD14BB2C181J	RES. CARBON 180 5% 1/6W	VR202	R12-5526-05	RES. SEMI FIXED 100KB
R847	RD14BB2C181J	RES. CARBON 180 5% 1/6W	VR203	R12-2520-05	RES. SEMI FIXED 5KB
R852	RN14BK2C22R0F	RES. METAL FILM 22.0 1% 1/6W	VR204	R12-5526-05	RES. SEMI FIXED 100KB
R853	RN14BK2C22R0F	RES. METAL FILM 22.0 1% 1/6W	VR205	NO USE	
R854	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR206	R12-5526-05	RES. SEMI FIXED 100KB
R855	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR207	R12-5526-05	RES. SEMI FIXED 100KB
S101	W02-2137-05	ATTENUATOR UNIT	VR208	R12-1539-05	RES. SEMI FIXED 2KB
S201	W02-2137-05	ATTENUATOR UNIT	VR209	R12-5526-05	RES. SEMI FIXED 100KB
S301	W02-2137-05	ATTENUATOR UNIT	VR210	R12-5526-05	RES. SEMI FIXED 100KB
S401	W02-2137-05	ATTENUATOR UNIT	VR211	R12-0569-05	RES. SEMI FIXED 100 B
TC101	C05-0470-05	CAP. TRIMMER 20P	VR212	R12-3453-05	RES. SEMI FIXED 10KB
TC102	C05-0473-05	CAP. CERAMIC 120P	VR301	R12-0571-05	RES. SEMI FIXED 500 B
TC103	C05-0472-05	CAP. TRIMMER 6PF TO 50PF	VR302	R12-5526-05	RES. SEMI FIXED 100KB
TC201	C05-0470-05	CAP. TRIMMER 20P	VR303	R12-2520-05	RES. SEMI FIXED 5KB
TC202	C05-0473-05	CAP. CERAMIC 120P	VR304	R12-5526-05	RES. SEMI FIXED 100KB
TC203	C05-0472-05	CAP. TRIMMER 6PF TO 50PF	VR305	NO USE	
TC301	C05-0470-05	CAP. TRIMMER 20P	VR306	R12-5526-05	RES. SEMI FIXED 100KB
TC302	C05-0473-05	CAP. CERAMIC 120P	VR307	R12-5526-05	RES. SEMI FIXED 100KB
TC303	C05-0472-05	CAP. TRIMMER 6PF TO 50PF	VR308	R12-1539-05	RES. SEMI FIXED 2KB
TC401	C05-0470-05	CAP. TRIMMER 20P	VR309	R12-5526-05	RES. SEMI FIXED 100KB
TC402	C05-0473-05	CAP. CERAMIC 120P	VR310	R12-5526-05	RES. SEMI FIXED 100KB
TC403	C05-0472-05	CAP. TRIMMER 6PF TO 50PF	VR311	R12-0569-05	RES. SEMI FIXED 100 B
TC602	C05-0473-05	CAP. CERAMIC 120P	VR312	R12-3453-05	RES. SEMI FIXED 10KB
U1	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH	VR401	R12-0571-05	RES. SEMI FIXED 500 B
U2	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH	VR402	R12-5526-05	RES. SEMI FIXED 100KB
U3	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH	VR403	R12-2520-05	RES. SEMI FIXED 5KB
U4	HD74HC595FP	IC, 8-BIT SHIFT REGISTER/LATCH	VR404	R12-5526-05	RES. SEMI FIXED 100KB
U5	HD74HC595FP	IC, 8-BIT SHIFT REGISTER/LATCH	VR405	NO USE	
U6	HD74HC595FP	IC, 8-BIT SHIFT REGISTER/LATCH	VR406	R12-5526-05	RES. SEMI FIXED 100KB
U7	HD74HC595FP	IC, 8-BIT SHIFT REGISTER/LATCH	VR407	R12-5526-05	RES. SEMI FIXED 100KB
U101	KNC04	IC, LINEAR	VR408	R12-1539-05	RES. SEMI FIXED 2KB
U102	LM6364N	IC, OP AMP	VR409	R12-5526-05	RES. SEMI FIXED 100KB
U103	KNC05	IC, LINEAR	VR410	R12-5526-05	RES. SEMI FIXED 100KB
U104	KNC06	IC, LINEAR	VR411	R12-0569-05	RES. SEMI FIXED 100 B
U105	NJN4558D	IC, DUAL OP AMP	VR412	R12-3453-05	RES. SEMI FIXED 10KB
U106	KNC08	IC, LINEAR	VR501	R12-3543-05	RES. SEMI FIXED 20KB
U201	KNC04	IC, LINEAR	VR502	R12-3543-05	RES. SEMI FIXED 20KB
U202	LM6364N	IC, OP AMP	VR601	R12-5526-05	RES. SEMI FIXED 100KB
U203	KNC05	IC, LINEAR	VR612	R12-3453-05	RES. SEMI FIXED 10KB
U204	KNC06	IC, LINEAR			
U205	NJN4558D	IC, DUAL OP AMP			
U206	KNC08	IC, LINEAR			
U301	KNC04	IC, LINEAR			
U302	LM6364N	IC, OP AMP			
U303	KNC05	IC, LINEAR			
U304	KNC06	IC, LINEAR			
U305	NJN4558D	IC, DUAL OP AMP			
U306	KNC08	IC, LINEAR			





# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
D508	1SS132	DIODE	R4	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
D509	1SS132	DIODE	R5	RD14BB2C220J	RES. CARBON 22 5% 1/6W
D510	NO USE		R6	RD14BB2C220J	RES. CARBON 22 5% 1/6W
D511	1SS132	DIODE	R7	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
D512	1SS132	DIODE	R8	RD14BB2C220J	RES. CARBON 22 5% 1/6W
D513	1SS132	DIODE	R9	RD14BB2C221J	RES. CARBON 220 5% 1/6W
D514	1SS132	DIODE	R10	RD14BB2C221J	RES. CARBON 220 5% 1/6W
D802	NA700	DIODE	R11	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
J3	R92-1061-05	JUMPING RES. ZERO OHM (5MM)	R12	RD14BB2C220J	RES. CARBON 22 5% 1/6W
K1	S51-1527-05	RELAY	R13	RD14BB2C101J	RES. CARBON 100 5% 1/6W
K2	S51-1527-05	RELAY	R14	RD14BB2C220J	RES. CARBON 22 5% 1/6W
L1	L79-0551-05	FILTER	R17	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
L2	L79-0551-05	FILTER	R18	RD14BB2C391J	RES. CARBON 390 5% 1/6W
L3	L79-0551-05	FILTER	R19	RD14BB2C181J	RES. CARBON 180 5% 1/6W
L4	L40-2212-70	FERRI INDUCTOR 220UH 20%	R20	RD14BB2C751J	RES. CARBON 750 5% 1/6W
L5	NO USE		R21	R90-0659-05	RES. NETWORK 4X510
P6	E40-3237-05	PIN CONNECTOR 2P	R22	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
P11	E40-3240-05	PIN CONNECTOR 5P	R23	RD14BB2C101J	RES. CARBON 100 5% 1/6W
P12	E40-3243-05	PIN CONNECTOR 8P	R24	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
P16	E40-7209-05	PIN CONNECTOR 50P	R25	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q1	2SA1206(K)	TR. SI, PNP	R26	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
Q2	2SC3354(S)	TR. SI, NPN	R27	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
Q3	2SA1565	TR. SI, PNP	R28	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q4	2SA1565	TR. SI, PNP	R29	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
Q5	2SC3779(D)	TR. SI, NPN	R30	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
Q6	2SA1175(F)	TR. SI, PNP	R31	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q7	2SK304(F)	FET, N-CHANNEL	R32	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
Q8	2SK241(GR)	FET, N-CHANNEL	R33	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
Q9	2SA1206(K)	TR. SI, PNP	R34	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q10	2SC2785(F)	TR. SI, NPN	R35	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q11	2SA1206(K)	TR. SI, PNP	R36	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q12	2SC3315(C)	TR. SI, NPN	R37	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q13	2SC3315(C)	TR. SI, NPN	R38	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q14	2SC2785(F)	TR. SI, NPN	R39	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q15	2SC3315(C)	TR. SI, NPN	R40	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q16	2SC3315(C)	TR. SI, NPN	R41	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q17	2SC2785(F)	TR. SI, NPN	R42	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q18	2SA1175(F)	TR. SI, PNP	R43	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
Q19	2SC2785(F)	TR. SI, NPN	R44	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
Q20	2SC3732(L)	TR. SI, NPN	R45	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
Q21	2SA1206(K)	TR. SI, PNP	R46	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
Q22	2SC3315(C)	TR. SI, NPN	R47	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q23	2SC2785(F)	TR. SI, NPN	R48	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q24	2SC3315(C)	TR. SI, NPN	R49	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
Q25	2SC3315(C)	TR. SI, NPN	R50	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q26	2SC3315(C)	TR. SI, NPN	R51	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q27	2SC3315(C)	TR. SI, NPN	R52	RD14BB2C471J	RES. CARBON 470 5% 1/6W
Q28	2SC3315(C)	TR. SI, NPN	R53	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
Q29	2SC3315(C)	TR. SI, NPN	R54	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q30	2SC3315(C)	TR. SI, NPN	R55	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
Q31	2SC3315(C)	TR. SI, NPN	R56	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q32	2SA1005(K)	TR. SI, PNP	R57	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q33	2SC3315(C)	TR. SI, NPN	R58	NO USE	
Q34	2SC3315(C)	TR. SI, NPN	R59	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
Q35	2SA1005(K)	TR. SI, PNP	R60	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
Q36	2SC3315(C)	TR. SI, NPN	R61	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
Q37	2SK583-KEN	FET, N-CHANNEL	R62	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
Q38	2SK583-KEN	FET, N-CHANNEL	R63	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q39	2SK583-KEN	FET, N-CHANNEL	R64	RD14BB2C334J	RES. CARBON 330K 5% 1/6W
Q40	2SA1175(F)	TR. SI, PNP	R65	RD14BB2C274J	RES. CARBON 270K 5% 1/6W
Q41	2SC2785(F)	TR. SI, NPN	R66	NO USE	
Q42	2SA1005(K)	TR. SI, PNP	R67	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q43	2SA1005(K)	TR. SI, PNP	R68	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q46	2SC2785(F)	TR. SI, NPN	R69	RD14BB2C331J	RES. CARBON 330 5% 1/6W
Q47	2SC2785(F)	TR. SI, NPN	R70	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q48	2SA1005(K)	TR. SI, PNP	R71	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q49	2SC3354(S)	TR. SI, NPN	R72	NO USE	
Q50	2SK241(GR)	FET, N-CHANNEL	R73	RD14BB2C681J	RES. CARBON 680 5% 1/6W
Q51	2SK241(GR)	FET, N-CHANNEL	R74	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q52	2SA1565	TR. SI, PNP	R75	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q53	2SC3732(L)	TR. SI, NPN	R76	R90-0660-05	RES. NETWORK 4X1K
Q54	2SA1005(K)	TR. SI, PNP	R77	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q55	2SA1565	TR. SI, PNP	R78	RD14BB2C151J	RES. CARBON 150 5% 1/6W
Q56	2SC2785(F)	TR. SI, NPN	R79	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q57	2SK583-KEN	FET, N-CHANNEL	R80	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q60	2SA1565	TR. SI, PNP	R81	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
Q503	2SA1206(K)	TR. SI, PNP	R82	RD14BB2C391J	RES. CARBON 390 5% 1/6W
Q504	2SC3315(C)	TR. SI, NPN	R83	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q505	2SC3315(C)	TR. SI, NPN	R84	RD14BB2C471J	RES. CARBON 470 5% 1/6W
Q506	2SA1459(L)	TR. SI, PNP	R85	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q507	2SC4049	TR. SI, NPN	R86	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q802	2SC2785(F)	TR. SI, NPN	R87	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R1	RD14BB2C201J	RES. CARBON 200 5% 1/6W	R88	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R2	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R89	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R3	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R90	RD14BB2C1002F	RES. METAL FILM 10K 1% 1/6W
			R91	RD14BB2C1202F	RES. METAL FILM 12K 1% 1/6W
			R92	RD14BB2C101J	RES. CARBON 100 5% 1/6W
			R93	RD14BB2C1202F	RES. METAL FILM 12K 1% 1/6W
			R94	RD14BB2C1202F	RES. METAL FILM 12K 1% 1/6W
			R95	RD14BB2C1502F	RES. METAL FILM 15K 1% 1/6W
			R96	RD14BB2C3601F	RES. METAL FILM 3.6K 1% 1/6W
			R97	RD14BB2C101J	RES. CARBON 100 5% 1/6W
			R98	RD14BB2C471J	RES. CARBON 470 5% 1/6W
			R99	RD14BB2C2401F	RES. METAL FILM 2.4K 1% 1/6W
			R100	RD14BB2C3002F	RES. METAL FILM 30K 1% 1/6W
			R101	RD14BB2C103J	RES. CARBON 10K 5% 1/6W

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R102	RD14BB2C102J	RES. CARBON 1K 5%	R210	RD14BB2C221J	RES. CARBON 220 5%
R103	RD14BB2C472J	RES. CARBON 4.7K 5%	R211	RD14BB2C221J	RES. CARBON 220 5%
R104	RD14BB2C333J	RES. CARBON 33K 5%	R212	RD14BB2C101J	RES. CARBON 100 5%
R105	RD14BB2C752J	RES. CARBON 7.5K 5%	R213	RD14BB2C101J	RES. CARBON 100 5%
R106	RN14BK2C6201F	RES. METAL FILM 6.2K 1%	R214	RD14BB2C101J	RES. CARBON 100 5%
R107	RN14BK2C1102F	RES. METAL FILM 11K 1%	R215	RD14BB2C101J	RES. CARBON 100 5%
R108	RD14BB2C153J	RES. CARBON 15K 5%	R216	RD14BB2C101J	RES. CARBON 100 5%
R109	RN14BK2C6801F	RES. METAL FILM 6.8K 1%	R217	RD14BB2C101J	RES. CARBON 100 5%
R110	RD14BB2C102J	RES. CARBON 1K 5%	R218	RD14BB2C822J	RES. CARBON 8.2K 5%
R111	RD14BB2C223J	RES. CARBON 22K 5%	R219	RD14BB2C681J	RES. CARBON 680 5%
R112	RN14BK2C1301F	RES. METAL FILM 1.3K 1%	R220	RD14BB2C681J	RES. CARBON 680 5%
R113	RD14BB2C103J	RES. CARBON 10K 5%	R221	RD14BB2C822J	RES. CARBON 8.2K 5%
R114	RD14BB2C103J	RES. CARBON 10K 5%	R222	RD14BB2C752J	RES. CARBON 7.5K 5%
R115	RD14BB2C682J	RES. CARBON 6.8K 5%	R223	RD14BB2C332J	RES. CARBON 3.3K 5%
R116	RD14BB2C222J	RES. CARBON 2.2K 5%	R224	RD14BB2C302J	RES. CARBON 3K 5%
R117	RD14BB2C100J	RES. CARBON 10 5%	R225	RD14BB2C102J	RES. CARBON 1K 5%
R118	RD14BB2C471J	RES. CARBON 470 5%	R226	RD14BB2C621J	RES. CARBON 620 5%
R119	RN14BK2C2401F	RES. METAL FILM 2.4K 1%	R227	RD14BB2C472J	RES. CARBON 4.7K 5%
R120	RN14BK2C3002F	RES. METAL FILM 30K 1%	R228	RD14BB2C472J	RES. CARBON 4.7K 5%
R121	RD14BB2C103J	RES. CARBON 10K 5%	R229	RD14BB2C473J	RES. CARBON 47K 5%
R122	RD14BB2C102J	RES. CARBON 1K 5%	R230	RD14BB2C473J	RES. CARBON 47K 5%
R123	RD14BB2C472J	RES. CARBON 4.7K 5%	R231	RD14BB2C102J	RES. CARBON 1K 5%
R124	RD14BB2C101J	RES. CARBON 100 5%	R232	RD14BB2C332J	RES. CARBON 3.3K 5%
R125	RD14BB2C102J	RES. CARBON 1K 5%	R233	RD14BB2C332J	RES. CARBON 3.3K 5%
R126	RD14BB2C682J	RES. CARBON 6.8K 5%	R234	RD14BB2C101J	RES. CARBON 100 5%
R127	RD14BB2C101J	RES. CARBON 100 5%	R235	RD14BB2C101J	RES. CARBON 100 5%
R128	RD14BB2C622J	RES. CARBON 6.2K 5%	R240	RD14BB2C101J	RES. CARBON 100 5%
R129	RD14BB2C391J	RES. CARBON 390 5%	R241	RD14BB2C222J	RES. CARBON 2.2K 5%
R130	RD14BB2C102J	RES. CARBON 1K 5%	R242	RD14BB2C101J	RES. CARBON 100 5%
R131	RD14BB2C103J	RES. CARBON 10K 5%	R243	RD14BB2C101J	RES. CARBON 100 5%
R132	RD14BB2C302J	RES. CARBON 3K 5%	R244	RD14BB2C101J	RES. CARBON 100 5%
R133	RD14BB2C751J	RES. CARBON 750 5%	R245	RD14BB2C222J	RES. CARBON 2.2K 5%
R134	RD14BB2C102J	RES. CARBON 1K 5%	R246	RN14BK2C3902F	RES. METAL FILM 39K 1%
R137	RD14BB2C181J	RES. CARBON 180 5%	R247	RN14BK2C3902F	RES. METAL FILM 39K 1%
R138	RD14BB2C152J	RES. CARBON 1.5K 5%	R248	RD14BB2C682J	RES. CARBON 6.8K 5%
R139	RD14BB2C332J	RES. CARBON 3.3K 5%	R249	RD14BB2C122J	RES. CARBON 1.2K 5%
R140	RD14BB2C153J	RES. CARBON 15K 5%	R250	NO USE	
R141	RD14BB2C104J	RES. CARBON 100K 5%	R251	RD14BB2C183J	RES. CARBON 18K 5%
R142	RD14BB2C113J	RES. CARBON 11K 5%	R252	RD14BB2C473J	RES. CARBON 47K 5%
R143	RD14BB2C101J	RES. CARBON 100 5%	R253	RD14BB2C102J	RES. CARBON 1K 5%
R144	RN14BK2C2201F	RES. METAL FILM 2.2K 1%	R260	RD14BB2C512J	RES. CARBON 5.1K 5%
R145	RN14BK2C2203F	RES. METAL FILM 220K 1%	R261	RD14BB2C362J	RES. CARBON 3.6K 5%
R150	R90-0660-05	RES. NETWORK 4X1K	R262	RD14BB2C183J	RES. CARBON 18K 5%
R154	RD14BB2C331J	RES. CARBON 330 5%	R263	RD14BB2C101J	RES. CARBON 100 5%
R155	RD14BB2C471J	RES. CARBON 470 5%	R264	RD14BB2C152J	RES. CARBON 1.5K 5%
R156	RD14BB2C471J	RES. CARBON 470 5%	R265	RD14BB2C152J	RES. CARBON 1.5K 5%
R157	RD14BB2C102J	RES. CARBON 1K 5%	R266	RD14BB2C102J	RES. CARBON 1K 5%
R158	RD14BB2C470J	RES. CARBON 47 5%	R267	RD14BB2C102J	RES. CARBON 1K 5%
R159	RD14BB2C471J	RES. CARBON 470 5%	R268	RD14BB2C472J	RES. CARBON 4.7K 5%
R160	RD14BB2C471J	RES. CARBON 470 5%	R269	RD14BB2C102J	RES. CARBON 1K 5%
R161	RD14BB2C202J	RES. CARBON 2K 5%	R270	RD14BB2C681J	RES. CARBON 680 5%
R162	RD14BB2C332J	RES. CARBON 3.3K 5%	R271	RD14BB2C103J	RES. CARBON 10K 5%
R165	RD14BB2C243J	RES. CARBON 24K 5%	R503	RD14BB2C101J	RES. CARBON 100 5%
R166	RD14BB2C822J	RES. CARBON 8.2K 5%	R504	RD14BB2C101J	RES. CARBON 100 5%
R167	RD14BB2C822J	RES. CARBON 8.2K 5%	R505	RD14BB2C622J	RES. CARBON 6.2K 5%
R168	RD14BB2C473J	RES. CARBON 47K 5%	R506	RD14BB2C102J	RES. CARBON 1K 5%
R169	RD14BB2C102J	RES. CARBON 1K 5%	R507	RD14BB2C102J	RES. CARBON 1K 5%
R170	RN14BK2C2001F	RES. METAL FILM 2K 1%	R508	RD14BB2C471J	RES. CARBON 470 5%
R171	RN14BK2C4701F	RES. METAL FILM 4.7K 1%	R509	NO USE	
R172	RD14BB2C202J	RES. CARBON 2K 5%	R510	RD14BB2C512J	RES. CARBON 5.1K 5%
R173	RD14BB2C202J	RES. CARBON 2K 5%	R511	RD14BB2C302J	RES. CARBON 3K 5%
R174	RD14BB2C101J	RES. CARBON 100 5%	R512	RD14BB2C123J	RES. CARBON 12K 5%
R175	RD14BB2C332J	RES. CARBON 3.3K 5%	R513	RD14BB2C222J	RES. CARBON 2.2K 5%
R176	RD14BB2C242J	RES. CARBON 2.4K 5%	R600	RD14BB2C102J	RES. CARBON 1K 5%
R177	RD14BB2C101J	RES. CARBON 100 5%	R601	RD14BB2C471J	RES. CARBON 470 5%
R178	NO USE		R602	RD14BB2C182J	RES. CARBON 1.8K 5%
R179	RD14BB2C221J	RES. CARBON 220 5%	R603	R92-1480-05	RES. LT3000 1.6K 5%
R180	RD14BB2C273J	RES. CARBON 27K 5%	R801	RD14BB2C334J	RES. CARBON 330K 5%
R181	RD14BB2C103J	RES. CARBON 10K 5%	R802	RD14BB2C472J	RES. CARBON 4.7K 5%
R182	RD14BB2C102J	RES. CARBON 1K 5%	R803	RD14BB2C680J	RES. CARBON 68 5%
R183	RD14BB2C102J	RES. CARBON 1K 5%	R804	RD14BB2C680J	RES. CARBON 68 5%
R184	RD14BB2C471J	RES. CARBON 470 5%	R805	RD14BB2C221J	RES. CARBON 220 5%
R185	RD14BB2C102J	RES. CARBON 1K 5%	R806	RD14BB2C512J	RES. CARBON 5.1K 5%
R186	RD14BB2C302J	RES. CARBON 3K 5%	R807	RD14BB2C123J	RES. CARBON 12K 5%
R187	RD14BB2C471J	RES. CARBON 470 5%	R808	R92-1480-05	RES. LT3000 1.6K 5%
R188	RD14BB2C103J	RES. CARBON 10K 5%	R809	RD14BB2C152J	RES. CARBON 1.5K 5%
R189	RD14BB2C102J	RES. CARBON 1K 5%	R810	RD14BB2C152J	RES. CARBON 1.5K 5%
R190	RD14BB2C682J	RES. CARBON 6.8K 5%	R811	NO USE	
R191	RD14BB2C362J	RES. CARBON 3.6K 5%	R812	RD14BB2C154J	RES. CARBON 150K 5%
R192	RD14BB2C102J	RES. CARBON 1K 5%	R813	RD14BB2C102J	RES. CARBON 1K 5%
R193	RD14BB2C102J	RES. CARBON 1K 5%	R816	RD14BB2C222J	RES. CARBON 2.2K 5%
R194	R90-1124-05	RES. NETWORK 5X10K	R817	RD14BB2C102J	RES. CARBON 1K 5%
R199	RD14BB2C102J	RES. CARBON 1K 5%	R818	RD14BB2C202J	RES. CARBON 2K 5%
R200	RD14BB2C332J	RES. CARBON 3.3K 5%	R819	RD14BB2C101J	RES. CARBON 100 5%
R201	RD14BB2C332J	RES. CARBON 3.3K 5%	R820	RD14BB2C331J	RES. CARBON 330 5%
R202	RD14BB2C561J	RES. CARBON 560 5%	R821	RD14BB2C101J	RES. CARBON 100 5%
R203	RD14BB2C392J	RES. CARBON 3.9K 5%	R822	RD14BB2C362J	RES. CARBON 3.6K 5%
R204	RD14BB2C392J	RES. CARBON 3.9K 5%	R823	RD14BB2C363J	RES. CARBON 36K 5%
R205	RD14BB2C432J	RES. CARBON 4.3K 5%	R824	RD14BB2C105J	RES. CARBON 1M 5%
R206	RD14BB2C473J	RES. CARBON 47K 5%	R825	RD14BB2C154J	RES. CARBON 150K 5%
R207	RD14BB2C473J	RES. CARBON 47K 5%	R826	RD14BB2C470J	RES. CARBON 47 5%
R208	RD14BB2C473J	RES. CARBON 47K 5%			
R209	NO USE				

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R827	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R828	RD14BB2C334J	RES. CARBON 330K 5% 1/6W
R829	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R830	RD14BB2C222J	RES. CARBON 22K 5% 1/6W
R894	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R895	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R896	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R999	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
TC1	C05-0471-05	CAP. TRIMMER 30P
TC2	C05-0471-05	CAP. TRIMMER 30P
TC3	C05-0469-05	CAP. TRIMMER 10P
TC4	C05-0469-05	CAP. TRIMMER 10P
TC5	C05-0473-05	CAP. CERAMIC 120P
U1	KHC09	IC, LINEAR
U2	NO USE	
U3	MC74HC4053N	IC, TRIPLE 2CH ANALOG NPX/DE-NP
U4	NJN072BL	IC, JFET INPUT OP AMP
U5	NJN072BL	IC, JFET INPUT OP AMP
U6	UA733CN	IC, DIFFERENTIAL VIDEO AMP
U7	LM1881N	IC, VIDEO SYNC SEPARATOR
U8	SN74LS221N	IC, DUAL MONOSTABLE MULTI
U9	SN74LS123N	IC, DUAL MONOSTABLE MULTIVIB
U10	NO USE	
U11	MC10H102L	IC, GATE FUNCTION
U12	NO USE	
U13	MC10H131L	IC, DUAL D-FILP FLOP
U14	MC10103L	IC, QUAD 2-INPUT OR GATE
U15	SN74ALS191N	IC, SYNC. U/D 4-BIT BINARY COUN
U16	SN74ALS191N	IC, SYNC. U/D 4-BIT BINARY COUN
U17	SN74ALS191N	IC, SYNC. U/D 4-BIT BINARY COUN
U18	KND03	IC, LINEAR
U19	KND03.	IC, LINEAR
U20	KNT01	IC, LINEAR
U21	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U22	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U23	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U24	KNC10	IC, LINEAR
U25	NJM4558D	IC, DUAL OP AMP
U26	NJN072BL	IC, JFET INPUT OP AMP
U27	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U28	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U29	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U30	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U31	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U32	HD74HC595AP	IC, 8-BIT SHIFT REGISTER/LATCH
U33	SN74ALS00AN	IC, QUAD 2 INPUT NAND GATE
U34	SN74ALS02N	IC, QUAD 2 INPUT NOR
U35	SN74ALS02N	IC, QUAD 2 INPUT NOR
U36	SN74ALS04BN	IC, HEX INVERTERS
U37	SN74ALS153N	IC, DUAL 4-1 DATA SELECTOR/MPX
U38	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U39	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U40	SN74ALS32N	IC, QUAD 2 INPUT OR
U41	SN74ALS32N	IC, QUAD 2 INPUT OR
U42	SN74ALS32N	IC, QUAD 2 INPUT OR
U43	MC10H104L	IC, GATE FUNCTIONS
U44	NJN074D	IC, QUAD JFET INPUT OP AMP
VR1	R12-3543-05	RES. SEMI FIXED 20KB
VR2	R12-3543-05	RES. SEMI FIXED 20KB
VR3	R12-3543-05	RES. SEMI FIXED 20KB
VR4	R12-2520-05	RES. SEMI FIXED 5KB
VR5	R12-2520-05	RES. SEMI FIXED 5KB
VR6	R12-2520-05	RES. SEMI FIXED 5KB
VR7	R12-1538-05	RES. SEMI FIXED 1KB
VR8	R12-3543-05	RES. SEMI FIXED 20KB
VR9	R12-3543-05	RES. SEMI FIXED 20KB
VR10	R12-3543-05	RES. SEMI FIXED 20KB
VR11	R12-3543-05	RES. SEMI FIXED 20KB
VR12	R12-2520-05	RES. SEMI FIXED 5KB
VR13	R12-0571-05	RES. SEMI FIXED 500 B
VR14	R12-3543-05	RES. SEMI FIXED 20KB

## DCS-9100 STO CPU UNIT

### X77-1660-01

REF. NO	PARTS NO	NAME & DESCRIPTION
	E02-0143-05	IC SOCKET 28P
	F15-0744-05	BLIND PLATE
	J73-0020-22	PCB (UNMOUNTED)
B1	W09-0408-05	BATTERY, CR2354-1HF
C1	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C2	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C3	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C4	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C5	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C6	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C7	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C8	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C9	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C10	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C11	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C12	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C13	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C14	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C15	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C16	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C17	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C18	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C19	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C20	NO USE	
C21	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C22	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C23	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C24	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C25	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C26	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C27	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C28	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C29	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C30	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C31	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C32	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C33	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C37	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C38	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C39	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C40	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C41	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C42	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C43	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C44	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C45	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C46	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C47	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C50	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C51	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C52	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C53	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C54	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C55	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C56	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C57	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C58	NO USE	
C59	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C60	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C61	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C62	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C63	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C64	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C65	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C66	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C67	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C68	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C69	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C70	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C71	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C72	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C73	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C74	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C75	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C78	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C79	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C80	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C81	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C82	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C83	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C84	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C85	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C86	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C87	NO USE	
C88	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C89	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C90	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C91	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C92	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R139	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R140	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R141	NO USE	
R142	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R143	R90-1147-05	RES. NETWORK
R144	R90-1147-05	RES. NETWORK
R145	R90-1146-05	RES. NETWORK
R146	R90-1146-05	RES. NETWORK
R147	R90-1146-05	RES. NETWORK
R148	R90-1146-05	RES. NETWORK
R149	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R150	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R151	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R152	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
U91	CTNG021	IC, GATE ARRAY
U92	CTNG031	IC, GATE ARRAY
U93	CTNG041	IC, GATE ARRAY
U94	NJN072BL	IC, JFET INPUT OP AMP
U95	SN74ALS32N	IC, QUAD 2 INPUT OR

VR1	R12-1548-05	RES. SEMI FIXED 2KB
VR2	R12-1548-05	RES. SEMI FIXED 2KB
VR3	R12-3552-05	RES. SEMI FIXED 20KB
X1	L78-0117-05	CERAMIC OSCILLATOR

## DCS-9120 STO CPU UNIT

### X77-1660-03

REF. NO	PARTS NO	NAME & DESCRIPTION
U1	UPD70335GJ-85BG	IC, 16-BIT CPU
U2	SN74LS245N	IC, OCTAL BUS TRANSCEIVER (3-S)
U3	SN74LS245N	IC, OCTAL BUS TRANSCEIVER (3-S)
U4	SN74ALS541N	IC, OCTAL 3-S BUFFER/LINE DRIVE
U5	SN74ALS374AN	IC, OCTAL D-F.F.
U6	T93-0809-14	PROGRAMMED ROM
U7	T93-0810-14	PROGRAMMED ROM
U8	LC3664ASL-10	IC, CMOS 64K SRAM
U9	LC3664ASL-10	IC, CMOS 64K SRAM
U10	MB84256-10LL-SK	IC, S-RAM
U11	MB84256-10LL-SK	IC, S-RAM
U12	MB84256-10LL-SK	IC, S-RAM
U13	MB84256-10LL-SK	IC, S-RAM
U14	MB84256-10LL-SK	IC, S-RAM
U15	MB84256-10LL-SK	IC, S-RAM
U16	SN74ALS245AN	IC, OCTAL BUS BUFFER
U17	SN74ALS245AN	IC, OCTAL BUS BUFFER
U18	SN74ALS245AN	IC, OCTAL BUS BUFFER
U19	LC3664ASL-10	IC, CMOS 64K SRAM
U20	MC14066BCP	IC, QUAD ANALOG SW/QUAD MPX
U21	LC3664ASL-10	IC, CMOS 64K SRAM
U22	LC3664ASL-10	IC, CMOS 64K SRAM
U23	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U24	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U25	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U26	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U27	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U28	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U29	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U30	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U31	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U32	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U33	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX

REF. NO	PARTS NO	NAME & DESCRIPTION
B1	E02-0143-05	IC SOCKET 28P
	F15-0744-05	BLIND PLATE
	J73-0020-22	PCB (UNMOUNTED)
	W09-0408-05	BATTERY CR2354-1HF

U37	SN74ALS393N	IC, 4-STATE BINARY COUNTER
U38	SN74ALS393N	IC, 4-STATE BINARY COUNTER
U39	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U40	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U41	SN74ALS352N	IC, DUAL 4-1 DATA SELECT./MPX
U42	SN74ALS374AN	IC, OCTAL D-F.F.
U43	SN74ALS123N	IC, DUAL MONOSTABLE MULTIVIB.
U44	MB3771	IC, RESET

C1	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C2	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C3	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C4	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C5	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C6	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C7	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C8	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C9	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C10	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C11	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C12	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C13	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C14	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C15	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C16	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C17	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C18	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C19	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C20	NO USE	
C21	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C22	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C23	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C24	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C25	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C26	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C27	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C28	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C29	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C30	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C31	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C32	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C33	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V

U50	SN74ALS138N	IC, 3-8 DECODER/DE-MPX
U51	SN74ALS245AN	IC, OCTAL BUS BUFFER
U52	SN74ALS374AN	IC, OCTAL D-F.F.
U53	SN74ALS374AN	IC, OCTAL D-F.F.
U54	SN74ALS374AN	IC, OCTAL D-F.F.
U55	SN74ALS595N	IC, 8-BIT SHIFT REGISTERS/LATCH
U56	SN74ALS595N	IC, 8-BIT SHIFT REGISTERS/LATCH
U57	SN74ALS534AN	IC, OCTAL D-F.F. (3-S)
U58	NO USE	
U59	SN74ALS374AN	IC, OCTAL D-F.F.
U60	SN74ALS374AN	IC, OCTAL D-F.F.
U61	SN74ALS374AN	IC, OCTAL D-F.F.
U62	SN74ALS374AN	IC, OCTAL D-F.F.
U63	SN74ALS374AN	IC, OCTAL D-F.F.
U64	SN74ALS374AN	IC, OCTAL D-F.F.
U65	MC14052BCP	IC, DUAL 4-CH ANALOG MPX/DE-MPX
U66	MC14052BCP	IC, DUAL 4-CH ANALOG MPX/DE-MPX
U67	SN74ALS365AN	IC, HEX BUS DRIVERS
U68	DAC0808LCN	IC, 8-BIT D/A CONVERTER
U69	HA17012PD	IC, 12-BIT D/A CONVERTER
U70	HA17012PD	IC, 12-BIT D/A CONVERTER
U71	HA17012PD	IC, 12-BIT D/A CONVERTER
U72	LX6218N	IC, FAST SETTLING DUAL OP-AMP
U73	NJN072BD	IC, JFET INPUT OP AMP
U74	SN74ALS32N	IC, QUAD 2 INPUT OR
U75	SN74ALS30AN	IC, 8-INPUT POSITIVE-NAND GATE

C37	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C38	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C39	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C40	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C41	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C42	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C43	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C44	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C45	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C46	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C47	C91-1361-05	CAP. NYLAR 0.01 10% 100V

U78	SN74ALS32N	IC, QUAD 2 INPUT OR
U79	SN74ALS32N	IC, QUAD 2 INPUT OR
U80	SN74ALS32N	IC, QUAD 2 INPUT OR
U81	SN74ALS31N	IC, DELAY ELEMENTS
U82	SN74ALS04BN	IC, HEX INVERTERS
U83	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U84	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U85	SN74AS74N	IC, DUAL D-F.F. (WITH PR&CLR)
U86	SN74ALS32N	IC, QUAD 2 INPUT OR
U87	NO USE	
U88	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U89	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U90	CTNG6011	IC, GATE ARRAY

C50	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C51	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C52	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C53	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C54	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C55	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C56	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C57	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C58	NO USE	
C59	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C60	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C61	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C62	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C63	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C64	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C65	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C66	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C67	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C68	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C69	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C70	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C71	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C72	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C73	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C74	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C75	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R117	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R118	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R119	NO USE	
R120	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R121	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R122	RD14BB2C134J	RES. CARBON 130K 5% 1/6W
R123	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R124	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R125	R90-0286-05	RES. NETWORK 4X4.7K
R126	RD14BB2C683J	RES. CARBON 68K 5% 1/6W
R127	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R136	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R137	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
R138	NO USE	
R139	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R140	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R141	NO USE	
R142	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R143	R90-1147-05	RES. NETWORK
R144	R90-1147-05	RES. NETWORK
R145	R90-1146-05	RES. NETWORK
R146	R90-1146-05	RES. NETWORK
R147	R90-1146-05	RES. NETWORK
R148	R90-1146-05	RES. NETWORK
R149	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R150	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R151	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R152	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W

U1	UPD70335GJ-85BG	IC,16-BIT CPU
U2	SN74ALS245N	IC,OCTAL BUS TRANSCEIVER(3-S)
U3	SN74LS245N	IC,OCTAL BUS TRANSCEIVER(3-S)
U4	SN74ALS541N	IC,OCTAL 3-S BUFFER/LINE DRIVE
U5	SN74ALS374AN	IC,OCTAL D-F.F.
U6	T93-0809-14	PROGRAMMED ROM
U7	T93-0810-14	PROGRAMMED ROM
U8	LC3664ASL-10	IC,CMOS 64K SRAM
U9	LC3664ASL-10	IC,CMOS 64K SRAM
U10	MB84256-10LL-SK	IC,S-RAM
U11	MB84256-10LL-SK	IC,S-RAM
U12	MB84256-10LL-SK	IC,S-RAM
U13	MB84256-10LL-SK	IC,S-RAM
U14	MB84256-10LL-SK	IC,S-RAM
U15	MB84256-10LL-SK	IC,S-RAM
U16	SN74ALS245AN	IC,OCTAL BUS BUFFER
U17	SN74ALS245AN	IC,OCTAL BUS BUFFER
U18	SN74ALS245AN	IC,OCTAL BUS BUFFER
U19	LC3664ASL-10	IC,CMOS 64K SRAM
U20	NC14066BCP	IC,QUAD ANALOG SW/QUAD MPX
U21	LC3664ASL-10	IC,CMOS 64K SRAM
U22	LC3664ASL-10	IC,CMOS 64K SRAM
U23	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U24	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U25	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U26	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U27	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U28	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U29	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U30	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U31	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U32	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U33	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX

U37	SN74LS393N	IC,4-STATE BINARY COUNTER
U38	SN74LS393N	IC,4-STATE BINARY COUNTER
U39	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U40	SN74ALS157AN	IC,QUAD 2-1 DATA SELECT./MPX
U41	SN74ALS352N	IC,DUAL 4-1 DATA SELECT./MPX
U42	SN74ALS374AN	IC,OCTAL D-F.F.
U43	SN74LS123N	IC,DUAL MONOSTABLE MULTIVIB.
U44	MB3771	IC,RESET

U50	SN74ALS138N	IC,3-8 DECODER/DE-MPX
U51	SN74ALS245AN	IC,OCTAL BUS BUFFER
U52	SN74ALS374AN	IC,OCTAL D-F.F.
U53	SN74ALS374AN	IC,OCTAL D-F.F.
U54	SN74ALS374AN	IC,OCTAL D-F.F.
U55	SN74LS595N	IC,8-BIT SHIFT REGISTERS/LATCH
U56	SN74LS595N	IC,8-BIT SHIFT REGISTERS/LATCH
U57	SN74ALS534AN	IC,OCTAL D-F.F.(3-S)
U58	NO USE	
U59	SN74ALS374AN	IC,OCTAL D-F.F.
U60	SN74ALS374AN	IC,OCTAL D-F.F.
U61	SN74ALS374AN	IC,OCTAL D-F.F.
U62	SN74ALS374AN	IC,OCTAL D-F.F.
U63	SN74ALS374AN	IC,OCTAL D-F.F.
U64	SN74ALS374AN	IC,OCTAL D-F.F.
U65	NC14052BCP	IC,DUAL 4-CH ANALOG MPX/DE-MPX
U66	NC14052BCP	IC,DUAL 4-CH ANALOG MPX/DE-MPX
U67	SN74LS365AN	IC,HEX BUS DRIVERS
U68	DAC0808LCN	IC,8-BIT D/A CONVERTER
U69	HA17012PD	IC,12-BIT D/A CONVERTER
U70	HA17012PD	IC,12-BIT D/A CONVERTER
U71	HA17012PD	IC,12-BIT D/A CONVERTER
U72	LM6218N	IC,FAST SETTLING DUAL OP-AMP

REF. NO	PARTS NO	NAME & DESCRIPTION
U73	NJN072BD	IC,JFET INPUT OP AMP
U74	SN74ALS32N	IC,QUAD 2 INPUT OR
U75	SN74ALS30AN	IC,8-INPUT POSITIVE-NAND GATE
U78	SN74ALS32N	IC,QUAD 2 INPUT OR
U79	SN74ALS32N	IC,QUAD 2 INPUT OR
U80	SN74ALS32N	IC,QUAD 2 INPUT OR
U81	SN74ALS31N	IC,DELAY ELEMENTS
U82	SN74ALS04BN	IC,HEX INVERTERS
U83	SN74ALS08N	IC,QUAD 2 INPUT AND GATE
U84	SN74ALS08N	IC,QUAD 2 INPUT AND GATE
U85	SN74AS74N	IC,DUAL D-F.F.(WITH PR&CLR)
U86	SN74ALS32N	IC,QUAD 2 INPUT OR
U87	NO USE	
U88	SN74ALS74AN	IC,DUAL D-F.F.(WITH PR&CLR)
U89	SN74ALS74AN	IC,DUAL D-F.F.(WITH PR&CLR)
U90	CTN6011	IC,GATE ARRAY
U91	CTN6021	IC,GATE ARRAY
U92	CTN6031	IC,GATE ARRAY
U93	CTN6041	IC,GATE ARRAY
U94	NJN072BL	IC,JFET INPUT OP AMP
U95	SN74ALS32N	IC,QUAD 2 INPUT OR

VR1	R12-1548-05	RES. SEMI FIXED 2KB
VR2	R12-1548-05	RES. SEMI FIXED 2KB
VR3	R12-3552-05	RES. SEMI FIXED 20KB

X1	L78-0117-05	CERAMIC OSCILLATOR
----	-------------	--------------------

## DCS-910 R/O UNIT

### X77-1670-01

REF. NO	PARTS NO	NAME & DESCRIPTION
	F02-0143-05	IC SOCKET 28P
	F15-0744-05	BLIND PLATE
	J73-0028-12	PCB (UNMOUNTED)
B1	W09-0408-05	BATTERY,CR2354-1HF
C1	CE04EWIC221H	CAP. ELECTRO 220 20% 16V
C2	CE04EWIC221H	CAP. ELECTRO 220 20% 16V
C3	CE04EWIC221H	CAP. ELECTRO 220 20% 16V
C4	CE04EWIC221H	CAP. ELECTRO 220 20% 16V
C5	CE04EWH010H	CAP. ELECTRO 1 20% 50V
C6	CE04EWH010H	CAP. ELECTRO 1 20% 50V
C7	CE04EWIC220H	CAP. ELECTRO 22 20% 16V
C8	CE04EWIC220H	CAP. ELECTRO 22 20% 16V
C9	CE04EWIC220H	CAP. ELECTRO 22 20% 16V
C10	CE04EWIC470H	CAP. ELECTRO 47 20% 16V
C11	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C12	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C13	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C14	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C15	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C16	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C17	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C18	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C19	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C20	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C21	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C22	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C23	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C24	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C25	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C26	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C27	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C28	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C29	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C30	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C31	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C32	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C33	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C34	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C35	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C36	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C37	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C38	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C39	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C40	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C41	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C42	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C43	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C44	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C45	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C46	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C47	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C48	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C49	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C50	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C51	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C52	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C53	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C54	C91-1357-05	CAP. METALIZED 0.1 10% 100V

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
C55	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C153	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C56	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C154	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C57	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C155	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C58	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C156	CC45SL1H221J	CAP. CERAMIC 220P 5% 50V
C59	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C157	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C60	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C158	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C61	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C159	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C62	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C160	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C63	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C161	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C64	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C162	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C65	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C163	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C66	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C164	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C67	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C165	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C68	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C166	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C69	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C167	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C70	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C168	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C71	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C169	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C72	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C170	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C73	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C171	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C74	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C172	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C75	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C173	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C76	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C174	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C77	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C175	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C78	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C176	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C79	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C177	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C80	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C178	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C81	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C179	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C82	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C180	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C83	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C181	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C84	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	C182	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C85	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C183	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C86	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C184	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C87	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C185	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C88	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C186	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C89	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C187	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C90	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C188	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C91	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C189	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C92	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C190	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C93	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C191	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C94	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C192	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C95	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C193	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C96	C91-1357-05	CAP. METALIZED 0.1 10% 100V	C194	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C97	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C195	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C98	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C196	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C99	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C197	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C100	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C198	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C101	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C199	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C102	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C200	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C103	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C201	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C104	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C202	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C105	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C203	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C106	C91-1361-05	CAP. NYLAR 0.01 10% 100V	C204	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C107	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	C205	CR04EW1H010M	CAP. ELECTRO 1 20% 50V
C108	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C206	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C109	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C207	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C110	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C208	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C111	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C209	CF92V1H273J	CAP. POLYESTER 0.027 5% 50V
C112	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C210	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C113	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C211	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C114	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C212	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C115	C91-1361-05	CAP. NYLAR 0.01 10% 100V	C213	CC45CH1H270J	CAP. CERAMIC 27P 5% 50V
C116	C092M1H153J	CAP. NYLAR 0.015 5% 50V	C801	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C117	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	C802	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C118	C91-1362-05	CAP. NETWORK 10X0.01 20% 50V	C803	C092M1H473K	CAP. NYLAR 0.047 10% 50V
C119	CC45CH1H560J	CAP. CERAMIC 56P 5% 50V	C804	CC45SL1H331J	CAP. CERAMIC 330P 5% 50V
C120	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V	C805	CC45SL1H471J	CAP. CERAMIC 470P 5% 50V
C121	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V	C901	CC45CH1H470J	CAP. CERAMIC 47P 5% 50V
C122	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V	D1	1SS132	DIODE
C123	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V	D2	1SS132	DIODE
C124	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V	D3	1SS132	DIODE
C125	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	D4	1SS132	DIODE
C126	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	D5	1SS132	DIODE
C127	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	D6	1SS132	DIODE
C128	CC45CH1H150J	CAP. CERAMIC 15P 5% 50V	J1	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
C129	CC45CH1H150J	CAP. CERAMIC 15P 5% 50V	J2	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
C130	C91-1361-05	CAP. NYLAR 0.01 10% 100V	JP3	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
C131	C91-1361-05	CAP. NYLAR 0.01 10% 100V	JP6	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
C132	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	L1	L40-1021-03	FERRI INDUCTOR 1NH 10%
C133	C91-1361-05	CAP. NYLAR 0.01 10% 100V	L2	L79-0551-05	FILTER
C134	C91-1361-05	CAP. NYLAR 0.01 10% 100V	L3	L79-0551-05	FILTER
C135	C91-1361-05	CAP. NYLAR 0.01 10% 100V	L4	L79-0551-05	FILTER
C136	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	L5	L79-0551-05	FILTER
C137	C91-1361-05	CAP. NYLAR 0.01 10% 100V	L6	L40-1021-03	FERRI INDUCTOR 1NH 10%
C138	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	P27	E40-7398-05	PIN CONNECTOR 20P
C139	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	P28	E40-7397-05	PIN CONNECTOR 40P
C140	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V	P52	E40-7035-05	PIN CONNECTOR 40P
C141	CC45CH1H560J	CAP. CERAMIC 56P 5% 50V	P53	E40-7226-05	PIN CONNECTOR 64P
C142	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C143	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C144	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C145	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C146	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C147	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C148	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C149	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V			
C150	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V			
C151	CF92V1H273J	CAP. POLYESTER 0.027 5% 50V			
C152	C91-1361-05	CAP. NYLAR 0.01 10% 100V			



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R1	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R98	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R2	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R99	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R3	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R100	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R4	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R101	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R5	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R102	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R6	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R103	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R7	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R104	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R8	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R105	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R9	RD14BB2C134J	RES. CARBON 130K 5% 1/6W	R106	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R10	R90-1125-05	RES. NETWORK 12X1N	R107	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R11	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R108	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R12	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R109	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R13	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R110	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R14	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R111	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R15	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R112	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R16	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R113	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R17	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R114	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R18	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R115	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R19	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R116	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R117	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R21	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R118	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R22	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R119	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R23	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R120	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R24	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R121	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R25	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R122	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R26	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R123	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R27	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R124	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R28	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R125	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R29	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R126	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R30	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R127	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R31	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R128	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R32	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R129	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R33	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R130	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R34	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R131	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W
R35	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R132	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W
R36	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R133	RN14BK2C1202F	RES. METAL FILM 12K 1% 1/6W
R37	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R134	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R38	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R135	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R39	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R136	RN14BK2C3302F	RES. METAL FILM 33K 1% 1/6W
R40	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R137	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R41	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R138	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R42	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R139	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R43	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R140	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R44	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R141	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R45	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R142	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R46	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R143	RD14BB2C683J	RES. CARBON 68K 5% 1/6W
R47	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R144	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R48	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R145	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R49	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R146	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R50	RD14BB2C914J	RES. CARBON 910K 5% 1/6W	R147	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R51	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R148	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R52	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R149	RD14BB2C204J	RES. CARBON 200K 5% 1/6W
R53	RD14BB2C123J	RES. CARBON 12K 5% 1/6W	R150	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R54	RD14BB2C334J	RES. CARBON 330K 5% 1/6W	R151	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R55	RD14BB2C334J	RES. CARBON 330K 5% 1/6W	R152	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R56	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	R153	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R57	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	R154	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R58	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R155	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R59	RN14BK2C8201F	RES. METAL FILM 8.2K 1% 1/6W	R156	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R60	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	R157	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R61	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	R158	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R62	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R159	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R63	RN14BK2C8201F	RES. METAL FILM 8.2K 1% 1/6W	R160	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R64	RD14BB2C2202F	RES. METAL FILM 22K 1% 1/6W	R161	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R65	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R162	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R66	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R163	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R67	RN14BK2C2202F	RES. METAL FILM 22K 1% 1/6W	R164	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R68	RD14BB2C243J	RES. CARBON 24K 5% 1/6W	R165	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R69	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R166	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R70	RD14BB2C105J	RES. CARBON 1M 5% 1/6W	R167	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R71	RD14BB2C105J	RES. CARBON 1M 5% 1/6W	R168	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R72	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R169	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R73	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R170	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R74	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R171	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R75	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R172	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R76	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R173	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R77	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R174	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R78	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R175	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R79	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R176	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R80	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R177	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R81	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R178	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R82	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R181	RD14BB2C154J	RES. CARBON 150K 5% 1/6W
R83	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R801	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R84	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R802	RD14BB2C274J	RES. CARBON 270K 5% 1/6W
R85	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R803	NO USE	
R86	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R804	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R87	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R901	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R88	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R902	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R89	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R903	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R90	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	U1	LH0080BF	IC, Z80B CPU
R91	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	U2	T93-0808-14	PROGRAMMED ROM
R92	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	U3	T93-0784-14	PROGRAMMED ROM
R93	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	U4	M884256-10LL-SK	IC, S-RAM
R94	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	U5	M88422-12LP-G	IC, S-RAM
R95	RD14BB2C473J	RES. CARBON 47K 5% 1/6W			
R96	RD14BB2C473J	RES. CARBON 47K 5% 1/6W			
R97	RD14BB2C473J	RES. CARBON 47K 5% 1/6W			

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
U6	IC3517BS-15	IC, 2048X8 STATIC RAM
U7	HD64610P	IC, CALENDER CLOCK
U8	UPD8253C-2	IC, PROGRAMMABLE INTERVAL TIMER
U9	DTH-5010	IC, GATE ARRAY
G10	HA17012PB	IC, 12-BIT D/A CONVERTER
U11	HA17012PB	IC, 12-BIT D/A CONVERTER
U12	DAC0808LCN	IC, 8-BIT D/A CONVERTER
U13	DAC0808LCN	IC, 8-BIT D/A CONVERTER
U14	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U15	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U16	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U17	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U18	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U19	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U20	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U21	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U22	NC14051BCP	IC, 8-CH ANALOG MPX/DE-MPX
U23	NC14066BCP	IC, QUAD ANALOG SW/QUAD MPX
U24	PST518B	IC, RESET
U25	LN311N	IC, VOLTAGE COMPARATOR
U26	HA17555PS	IC, TIMER
U27	HA17555PS	IC, TIMER
U28	NJM556D	IC, DUAL TIMER
U29	LM6218N	IC, FAST SETTLING DUAL OP-AMP
U30	NJM074D	IC, QUAD JFET INPUT OP AMP
U31	NJM074D	IC, QUAD JFET INPUT OP AMP
U32	NJM074D	IC, QUAD JFET INPUT OP AMP
U33	NJM074D	IC, QUAD JFET INPUT OP AMP
U34	NJM074D	IC, QUAD JFET INPUT OP AMP
U35	NJM074D	IC, QUAD JFET INPUT OP AMP
U36	NJM074D	IC, QUAD JFET INPUT OP AMP
U37	NJM074D	IC, QUAD JFET INPUT OP AMP
U38	SN74ALS139N	IC, DUAL 2-4 DECODER/DE-MPX
U39	SN74ALS174N	IC, HEX D-FFS WITH CLEAR
U40	SN74ALS138N	IC, 3-8 DECODER/DE-MPX
U41	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U42	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U43	SN74ALS244BN	IC, OCTAL BUS BUFFER
U44	SN74ALS374AN	IC, OCTAL D-F.F.
U45	SN74ALS174N	IC, HEX D-FFS WITH CLEAR
U46	NO USE	
U47	SN74ALS04BN	IC, HEX INVERTERS
U48	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U49	SN74ALS27N	IC, TRIPPLE 3-INPUT NOR GATE
U50	SN74LS393N	IC, 4-STATE BINARY COUNTER
U51	SN74ALS244BN	IC, OCTAL BUS BUFFER
U52	SN74ALS244BN	IC, OCTAL BUS BUFFER
U53	SN74ALS244BN	IC, OCTAL BUS BUFFER
U54	SN74ALS244BN	IC, OCTAL BUS BUFFER
U55	SN74ALS244BN	IC, OCTAL BUS BUFFER
U56	SN74ALS138N	IC, 3-8 DECODER/DE-MPX
U57	SN74ALS138N	IC, 3-8 DECODER/DE-MPX
U58	SN74ALS138N	IC, 3-8 DECODER/DE-MPX
U59	SN74ALS374AN	IC, OCTAL D-F.F.
U60	SN74ALS374AN	IC, OCTAL D-F.F.
U61	SN74ALS374AN	IC, OCTAL D-F.F.
U62	SN74ALS374AN	IC, OCTAL D-F.F.
U63	SN74ALS374AN	IC, OCTAL D-F.F.
U64	SN74LS595N	IC, 8-BIT SHIFT REGISTERS/LATCH
U65	SN74LS595N	IC, 8-BIT SHIFT REGISTERS/LATCH
U66	SN74LS123N	IC, DUAL MONOSTABLE MULTIVIB.
U67	TC74HC08AP	IC, QUAD 2-INPUT AND GATE
U68	TC74HC86AP	IC, QUAD EXCLUSIVE OR GATE
U69	TC74HC08AP	IC, QUAD 2-INPUT AND GATE
U70	TC74HC86AP	IC, QUAD EXCLUSIVE OR GATE
U71	TC74HC08AP	IC, QUAD 2-INPUT AND GATE
U72	TC74HC86AP	IC, QUAD EXCLUSIVE OR GATE
U73	SN74LS107AN	IC, DUAL J-K F.F. WITH CLEAR
U74	SN74LS107AN	IC, DUAL J-K F.F. WITH CLEAR
U75	SN74LS107AN	IC, DUAL J-K F.F. WITH CLEAR
U76	SN74LS107AN	IC, DUAL J-K F.F. WITH CLEAR
U77	SN74ALS30AN	IC, 8-INPUT POSITIVE-NAND GATE
U78	SN74ALS30AN	IC, 8-INPUT POSITIVE-NAND GATE
U79	SN74ALS138N	IC, 3-8 DECODER/DE-MPX
U80	SN74LS31N	IC, DELAY ELEMENTS
U81	SN74ALS04BN	IC, HEX INVERTERS
U82	SN74LS393N	IC, 4-STATE BINARY COUNTER
U83	SN74LS393N	IC, 4-STATE BINARY COUNTER
U84	SN74LS393N	IC, 4-STATE BINARY COUNTER
U85	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U86	SN74ALS688N	IC, 8-BIT MAGNITUDE COMPARATORS
U87	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U88	SN74LS123N	IC, DUAL MONOSTABLE MULTIVIB.
U89	SN74ALS04BN	IC, HEX INVERTERS
U90	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U91	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U92	SN74ALS32N	IC, QUAD 2 INPUT OR
U93	SN74ALS32N	IC, QUAD 2 INPUT OR
U94	SN74ALS00AN	IC, QUAD 2 INPUT NAND GATE
U95	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./MPX
U96	TC74HC04AP	IC, HEX INVERTER
X1	L78-0119-05	CERAMIC OSCILLATOR
X2	L78-0118-05	CERAMIC OSCILLATOR
X3	L77-1229-05	CRYSTAL RESONATOR

## DCS-9120 R/O UNIT

### X77-1670-03

		IC SOCKET	28P
	E02-0143-05	BLIND PLATE	
	F15-0744-05	PCB (UNMOUNTED)	
	J73-0028-12	BATTERY, CR2354-1HF	
B1	W09-0408-05		
C1	CE04EWIC221N	CAP. ELECTRO	220 20% 16V
C2	CE04EWIC221N	CAP. ELECTRO	220 20% 16V
C3	CE04EWIC221N	CAP. ELECTRO	220 20% 16V
C4	CE04EWIC221N	CAP. ELECTRO	220 20% 16V
C5	CE04EW1H010N	CAP. ELECTRO	1 20% 50V
C6	CE04EW1H010N	CAP. ELECTRO	1 20% 50V
C7	CE04EW1C220N	CAP. ELECTRO	22 20% 16V
C8	CE04EW1C220N	CAP. ELECTRO	22 20% 16V
C9	CE04EW1C220N	CAP. ELECTRO	22 20% 16V
C10	CE04EW1C470N	CAP. ELECTRO	47 20% 16V
C11	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C12	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C13	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C14	CC45CH1H101J	CAP. CERAMIC	100P 5% 50V
C15	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C16	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C17	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C18	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C19	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C20	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C21	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C22	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C23	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C24	C91-1361-05	CAP. NYLAR	0.01 10% 100V
C25	CC45CH1H101J	CAP. CERAMIC	100P 5% 50V
C26	C91-1361-05	CAP. NYLAR	0.01 10% 100V
C27	C91-1361-05	CAP. NYLAR	0.01 10% 100V
C28	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C29	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C30	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C31	C91-1315-05	CAP. CERAMIC	0.1 80/-20% 50V
C32	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C33	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C34	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C35	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C36	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C37	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C38	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C39	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C40	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C41	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C42	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C43	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C44	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C45	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C46	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C47	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C48	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C49	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C50	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C51	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C52	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C53	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C54	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C55	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C56	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C57	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C58	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C59	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C60	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C61	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C62	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C63	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C64	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C65	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C66	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C67	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C68	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C69	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C70	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C71	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C72	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C73	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C74	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C75	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C76	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C77	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C78	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C79	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C80	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C81	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C82	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C83	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C84	CC45CH1H101J	CAP. CERAMIC	100P 5% 50V
C85	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C86	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C87	C91-1357-05	CAP. METALIZED	0.1 10% 100V
C88	C91-1357-05	CAP. METALIZED	0.1 10% 100V

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
C89	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C90	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C91	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C92	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C93	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C94	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C95	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C96	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C97	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C98	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C99	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C100	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C101	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C102	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C103	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C104	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C105	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C106	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C107	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C108	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C109	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C110	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C111	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C112	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C113	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C114	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C115	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C116	CQ92M1H153J	CAP. NYLAR 0.015 5% 50V
C117	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C118	C91-1362-05	CAP. NETWORK 10X0.01 20% 50V
C119	CC45CH1H560J	CAP. CERAMIC 56P 5% 50V
C120	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C121	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C122	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C123	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C124	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C125	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C126	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C127	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C128	CC45CH1H150J	CAP. CERAMIC 15P 5% 50V
C129	CC45CH1H150J	CAP. CERAMIC 15P 5% 50V
C130	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C131	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C132	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C133	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C134	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C135	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C136	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C137	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C138	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C139	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C140	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C141	CC45CH1H560J	CAP. CERAMIC 56P 5% 50V
C142	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C143	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C144	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C145	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C146	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C147	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C148	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C149	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C150	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C151	CF92V1H273J	CAP. POLYESTER 0.027 5% 50V
C152	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C153	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C154	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C155	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C156	CC45SL1H221J	CAP. CERAMIC 220P 5% 50V
C157	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C158	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C159	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C160	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C161	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C162	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C163	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C164	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C165	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C166	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C167	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C168	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C189	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C190	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C191	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C192	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C193	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C194	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C195	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C196	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C197	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C198	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C199	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C200	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C201	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C202	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C203	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C204	C91-1361-05	CAP. NYLAR 0.01 10% 100V

REF. NO	PARTS NO	NAME & DESCRIPTION
C205	GE04EW1H010M	CAP. ELECTRO 1 20% 50V
C206	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C207	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C208	C91-1315-05	CAP. CERAMIC 0.1 80/-20% 50V
C209	CF92V1H273J	CAP. POLYESTER 0.027 5% 50V
C210	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C211	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C212	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C213	CC45CH1H270J	CAP. CERAMIC 27P 5% 50V
C801	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C802	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C803	CQ92M1H473K	CAP. NYLAR 0.047 10% 50V
C804	CC45SL1H331J	CAP. CERAMIC 330P 5% 50V
C805	CC45SL1H471J	CAP. CERAMIC 470P 5% 50V
C901	CC45CH1H470J	CAP. CERAMIC 47P 5% 50V
D1	1SS132	DIODE
D2	1SS132	DIODE
D3	1SS132	DIODE
D4	1SS132	DIODE
D5	1SS132	DIODE
D6	1SS132	DIODE
J1	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
J2	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
J3	NO USE	
JP4	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
JP5	NO USE	
JP6	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
L1	L40-1021-03	FERRI INDUCTOR 1MH 10%
L2	L79-0551-05	FILTER
L3	L79-0551-05	FILTER
L4	L79-0551-05	FILTER
L5	L79-0551-05	FILTER
L6	L40-1021-03	FERRI INDUCTOR 1MH 10%
P27	E40-7398-05	PIN CONNECTOR 20P
P28	E40-7397-05	PIN CONNECTOR 40P
P52	E40-7035-05	PIN CONNECTOR 40P
P53	E40-7226-05	PIN CONNECTOR 64P
R1	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R2	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R3	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R4	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R5	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R6	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R7	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R8	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R9	RD14BB2C134J	RES. CARBON 130K 5% 1/6W
R10	R80-1125-05	RES. NETWORK 12XIM
R11	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R12	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R13	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R14	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R15	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R16	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R17	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R18	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R19	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R22	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R23	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R24	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R25	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R26	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R27	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R28	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R29	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R30	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R31	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R32	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R33	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R34	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R35	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R36	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R37	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R38	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R39	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R40	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R41	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R42	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R43	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R44	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R45	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R46	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R47	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R48	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R49	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R50	RD14BB2C914J	RES. CARBON 910K 5% 1/6W
R51	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R52	RD14BB2C220J	RES. CARBON 22 5% 1/6W



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
U58	SN74ALS138N	IC, 3-8 DECODER/DE-NPX
U59	SN74ALS374AN	IC, OCTAL D-F.F.
U60	SN74ALS374AN	IC, OCTAL D-F.F.
U61	SN74ALS374AN	IC, OCTAL D-F.F.
U62	SN74ALS374AN	IC, OCTAL D-F.F.
U63	SN74ALS374AN	IC, OCTAL D-F.F.
U64	SN74ALS595N	IC, 8-BIT SHIFT REGISTERS/LATCH
U65	SN74ALS595N	IC, 8-BIT SHIFT REGISTERS/LATCH
U66	SN74ALS123N	IC, DUAL MONOSTABLE MULTIVIB.
U67	TC74HC08AP	IC, QUAD 2-INPUT AND GATE
U68	TC74HC86AP	IC, QUAD EXCLUSIVE OR GATE
U69	TC74HC08AP	IC, QUAD 2-INPUT AND GATE
U70	TC74HC86AP	IC, QUAD EXCLUSIVE OR GATE
U71	TC74HC08AP	IC, QUAD 2-INPUT AND GATE
U72	TC74HC86AP	IC, QUAD EXCLUSIVE OR GATE
U73	SN74ALS107AN	IC, DUAL J-K F.F. WITH CLEAR
U74	SN74ALS107AN	IC, DUAL J-K F.F. WITH CLEAR
U75	SN74ALS107AN	IC, DUAL J-K F.F. WITH CLEAR
U76	SN74ALS107AN	IC, DUAL J-K F.F. WITH CLEAR
U77	SN74ALS30AN	IC, 8-INPUT POSITIVE-NAND GATE
U78	SN74ALS30AN	IC, 8-INPUT POSITIVE-NAND GATE
U79	SN74ALS138N	IC, 3-8 DECODER/DE-NPX
U80	SN74ALS31N	IC, DELAY ELEMENTS
U81	SN74ALS04BN	IC, HEX INVERTERS
U82	SN74ALS393N	IC, 4-STATE BINARY COUNTER
U83	SN74ALS393N	IC, 4-STATE BINARY COUNTER
U84	SN74ALS393N	IC, 4-STATE BINARY COUNTER
U85	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./NPX
U86	SN74ALS688N	IC, 8-BIT MAGNITUDE COMPARATORS
U87	SN74ALS74AN	IC, DUAL D-F.F. (WITH PR&CLR)
U88	SN74ALS123N	IC, DUAL MONOSTABLE MULTIVIB.
U89	SN74ALS04BN	IC, HEX INVERTERS
U90	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U91	SN74ALS08N	IC, QUAD 2 INPUT AND GATE
U92	SN74ALS32N	IC, QUAD 2 INPUT OR
U93	SN74ALS32N	IC, QUAD 2 INPUT OR
U94	SN74ALS00AN	IC, QUAD 2 INPUT NAND GATE
U95	SN74ALS157AN	IC, QUAD 2-1 DATA SELECT./NPX
U96	TC74HC04AP	IC, HEX INVERTER
X1	L78-0119-05	CERAMIC OSCILLATOR
X2	L78-0118-05	CERAMIC OSCILLATOR
X3	L77-1229-05	CRYSTAL RESONATOR

REF. NO	PARTS NO	NAME & DESCRIPTION
C229	CC73FCH1H151J	CAP. CERAMIC 150P 5% 50V
C501	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C502	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C503	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C504	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C505	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C506	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C507	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C508	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C509	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C510	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C511	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C512	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C513	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C514	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C515	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C516	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C517	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C518	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C519	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C520	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C521	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C522	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C523	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C801	CC45CH1H010C	CAP. CERAMIC 1P 0.25P 50V
C802	CC45CH1H020C	CAP. CERAMIC 2P 0.25P 50V
C803	CC45CH1H010C	CAP. CERAMIC 1P 0.25P 50V
C804	CC45CH1H020C	CAP. CERAMIC 2P 0.25P 50V
C805	CC45SL1H561J	CAP. CERAMIC 560P 5% 50V
C912	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C922	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C927	CC73FCH1H121J	CAP. CERAMIC 120P 5% 50V
C928	CC73FCH1H121J	CAP. CERAMIC 120P 5% 50V
C933	CC73FCH1H681J	CAP. CERAMIC 680P 5% 50V
C934	CC73FCH1H681J	CAP. CERAMIC 680P 5% 50V
D101	MA704	DIODE
D102	MA704	DIODE
D103	NO USE	
D104	ISS187	DIODE
D201	MA704	DIODE
D202	MA704	DIODE
D203	NO USE	
D204	ISS187	DIODE

## A/D UNIT

### X78-1070-00

REF. NO	PARTS NO	NAME & DESCRIPTION
J73	0025-12	PCB (UNMOUNTED)
C101	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C102	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C103	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C104	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C105	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C106	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C107	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C108	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C109	CK73FB1H102K	CAP. CERAMIC 1000P 10% 50V
C110	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C111	NO USE	
C112	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C113	NO USE	
C114	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C115	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C118	CK73FB1H102K	CAP. CERAMIC 1000P 10% 50V
C121	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C122	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C129	CC73FCH1H151J	CAP. CERAMIC 150P 5% 50V
C201	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C202	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C203	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C204	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C205	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C206	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C207	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C208	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C209	CK73FB1H102K	CAP. CERAMIC 1000P 10% 50V
C210	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C211	NO USE	
C212	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C213	NO USE	
C214	CC73FCH1H101J	CAP. CERAMIC 100P 5% 50V
C215	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C218	CK73FB1H102K	CAP. CERAMIC 1000P 10% 50V
C221	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V
C222	CK73FF1H104Z	CAP. CERAMIC 0.1 20/-20% 50V

J1	E23-0563-05	TEST PIN
J2	E23-0563-05	TEST PIN
J3	E23-0563-05	TEST PIN
J4	E23-0563-05	TEST PIN
J5	NO USE	
J6	E23-0563-05	TEST PIN
J7	E23-0563-05	TEST PIN
J8	E23-0563-05	TEST PIN
J9	E23-0563-05	TEST PIN
J10	E23-0563-05	TEST PIN
J11	E23-0563-05	TEST PIN
J12	E23-0563-05	TEST PIN
J13	E23-0563-05	TEST PIN
L101	L79-0553-05	FILTER
L102	L79-0553-05	FILTER
L105	L79-0553-05	FILTER
L106	L79-0553-05	FILTER
L201	L79-0553-05	FILTER
L202	L79-0553-05	FILTER
L205	L79-0553-05	FILTER
L206	L79-0553-05	FILTER
L301	L79-0553-05	FILTER
L302	L79-0553-05	FILTER
L303	L79-0553-05	FILTER
P1	E40-3237-05	PIN CONNECTOR 2P
P2	E40-3237-05	PIN CONNECTOR 2P
P30	E40-7237-05	PIN CONNECTOR 20P
P31	E40-7237-05	PIN CONNECTOR 20P
P56	E40-7238-05	PIN CONNECTOR 20P
P57	E40-7238-05	PIN CONNECTOR 20P
Q102	2SA1462(Y34)	TR. SI, PNP
Q202	2SA1462(Y34)	TR. SI, PNP

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R101	RK73EB2B101J	RES. METALGLACE 100 5% 1/8W
R102	RK73EB2B100J	RES. METALGLACE 10 5% 1/8W
R103	RK73EB2B100J	RES. METALGLACE 10 5% 1/8W
R104	RK73EB2B364J	RES. METALGLACE 360K 5% 1/8W
R105	RK73EB2B510J	RES. METALGLACE 51 5% 1/8W
R106	RK73EB2B331J	RES. METALGLACE 330 5% 1/8W
R107	RK73EB2B331J	RES. METALGLACE 330 5% 1/8W
R108	R90-1128-05	RES. NETWORK 4X620
R109	R90-1128-05	RES. NETWORK 4X620
R110	RK73EB2B391J	RES. METALGLACE 390 5% 1/8W
R111	RK73EB2B391J	RES. METALGLACE 390 5% 1/8W
R112	RK73EB2B101J	RES. METALGLACE 100 5% 1/8W
R113	RK73EB2B101J	RES. METALGLACE 100 5% 1/8W
R114	RK73EB2B121J	RES. METALGLACE 120 5% 1/8W
R118	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R119	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R120	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R121	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R122	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R123	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R124	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R125	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R126	RK73EB2B751J	RES. METALGLACE 750 5% 1/8W
R127	RK73EB2B332J	RES. METALGLACE 3.3K 5% 1/8W
R128	RK73EB2B681J	RES. METALGLACE 680 5% 1/8W
R201	RK73EB2B101J	RES. METALGLACE 100 5% 1/8W
R202	RK73EB2B100J	RES. METALGLACE 10 5% 1/8W
R203	RK73EB2B100J	RES. METALGLACE 10 5% 1/8W
R204	RK73EB2B364J	RES. METALGLACE 360K 5% 1/8W
R205	RK73EB2B510J	RES. METALGLACE 51 5% 1/8W
R206	RK73EB2B331J	RES. METALGLACE 330 5% 1/8W
R207	RK73EB2B331J	RES. METALGLACE 330 5% 1/8W
R208	R90-1128-05	RES. NETWORK 4X620
R209	R90-1128-05	RES. NETWORK 4X620
R210	RK73EB2B391J	RES. METALGLACE 390 5% 1/8W
R211	RK73EB2B391J	RES. METALGLACE 390 5% 1/8W
R212	RK73EB2B101J	RES. METALGLACE 100 5% 1/8W
R213	RK73EB2B101J	RES. METALGLACE 100 5% 1/8W
R214	RK73EB2B121J	RES. METALGLACE 120 5% 1/8W
R218	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R219	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R220	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R221	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R222	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R223	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R224	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R225	RK73EB2B220J	RES. METALGLACE 22 5% 1/8W
R226	RK73EB2B751J	RES. METALGLACE 750 5% 1/8W
R227	RK73EB2B332J	RES. METALGLACE 3.3K 5% 1/8W
R228	RK73EB2B681J	RES. METALGLACE 680 5% 1/8W
R921	RK73EB2B150J	RES. METALGLACE 15 5% 1/8W
R922	RK73EB2B150J	RES. METALGLACE 15 5% 1/8W
TC101	C05-0473-05	CAP. CERAMIC 120P
TC102	C05-0473-05	CAP. CERAMIC 120P
TC201	C05-0473-05	CAP. CERAMIC 120P
TC202	C05-0473-05	CAP. CERAMIC 120P
U1	MC10H116M	IC, TRIPLE LINE RECEIVER
U101	KNC09	IC, LINEAR
U102	CXA1396D	IC, A/D CONVERTER
U103	MC10H125M	IC, QUAD TTL TO NECL TRANSIATOR
U104	MC10H125M	IC, QUAD TTL TO NECL TRANSIATOR
U105	DTM6010	IC, GATE ARRAY
U106	CXK5863M-25	IC, S-RAM
U107	CXK5863M-25	IC, S-RAM
U108	CXK5863M-25	IC, S-RAM
U109	CXK5863M-25	IC, S-RAM
U201	KNC09	IC, LINEAR
U202	CXA1396D	IC, A/D CONVERTER
U203	MC10H125M	IC, QUAD TTL TO NECL TRANSIATOR
U204	MC10H125M	IC, QUAD TTL TO NECL TRANSIATOR
U205	DTM6010	IC, GATE ARRAY
U206	CXK5863M-25	IC, S-RAM
U207	CXK5863M-25	IC, S-RAM
U208	CXK5863M-25	IC, S-RAM
U209	CXK5863M-25	IC, S-RAM
VR101	R12-1529-05	RES. SEMI FIXED 20
VR201	R12-1529-05	RES. SEMI FIXED 20

## GP-IB UNIT

### X79-1120-00

REF. NO	PARTS NO	NAME & DESCRIPTION
BZ101	J73-0027-12	PCB (UNMOUNTED)
	T99-0805-05	BUZZER
C1	C90-3060-05	CAP. ELECTRO 2200 20% 10V
C2	C90-3060-05	CAP. ELECTRO 2200 20% 10V
C3	C90-3060-05	CAP. ELECTRO 2200 20% 10V
C4	C90-3060-05	CAP. ELECTRO 2200 20% 10V
C5	C90-3059-05	CAP. ELECTRO 1000 20% 25V
C6	C90-3059-05	CAP. ELECTRO 1000 20% 25V
C7	C90-3059-05	CAP. ELECTRO 1000 20% 25V
C8	C90-3059-05	CAP. ELECTRO 1000 20% 25V
C9	C90-3059-05	CAP. ELECTRO 1000 20% 25V
C10	C90-3059-05	CAP. ELECTRO 1000 20% 25V
C11	C90-3061-05	CAP. ELECTRO 68 1% 100V
C12	C90-3061-05	CAP. ELECTRO 68 1% 100V
C13	CE04W2E100M	CAP. ELECTRO 10 20% 250V
C14	CE04W2E100M	CAP. ELECTRO 10 20% 250V
C15	CE04EW1E101M	CAP. ELECTRO 100 20% 25V
C101	CE04EW1C220M	CAP. ELECTRO 22 20% 16V
C102	CE04EW1C100M	CAP. ELECTRO 10 20% 16V
C103	CE04EW1C220M	CAP. ELECTRO 22 20% 16V
C104	CE04EW1C220M	CAP. ELECTRO 22 20% 16V
C105	CE04EW1C100M	CAP. ELECTRO 10 20% 16V
C106	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C107	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C108	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C109	C91-1357-05	CAP. METALIZED 0.1 10% 100V
C110	C91-1357-05	CAP. METALIZED 0.1 10% 100V
D1	NTZ10JC	DIODE, ZENER 9.95V
D2	NTZ10JC	DIODE, ZENER 9.95V
D3	NTZ5.1JB	DIODE, ZENER 5.07V
D101	1SS132	DIODE
D102	1SS132	DIODE
J101	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
JW101	E38-0469-05	WIRE ASS'Y
JW102	E38-0470-05	WIRE ASS'Y
L1	L33-0813-05	CHOKE COIL 10UH
L2	L33-0813-05	CHOKE COIL 10UH
L3	L33-0813-05	CHOKE COIL 10UH
L4	L33-0813-05	CHOKE COIL 10UH
L5	L33-0814-05	CHOKE COIL 22UH
L6	L33-0814-05	CHOKE COIL 22UH
L7	L33-0815-05	CHOKE COIL 470UH
L8	L33-0815-05	CHOKE COIL 470UH
P19	E40-5070-05	PIN CONNECTOR 13P
P20	E40-5068-05	PIN CONNECTOR 11P
P21	E40-3241-05	PIN CONNECTOR 6P
P22	NO USE	
P23	E40-3237-05	PIN CONNECTOR 2P
P24	E40-5070-05	PIN CONNECTOR 13P
P25	E40-5068-05	PIN CONNECTOR 11P
P29	E40-7230-05	PIN CONNECTOR 34P
P101	E40-3240-05	PIN CONNECTOR 5P
P102	E40-7036-05	PIN CONNECTOR 20P
P103	E40-3240-05	PIN CONNECTOR 5P
P104	E40-7231-05	PIN CONNECTOR 2P
P105	E58-0613-05	PIN CONNECTOR 24P
Q1	2SB1133(R)	TR. SI, PNP
Q2	2SD1666(R)	TR. SI, NPN
Q101	2SC2785(F)	TR. SI, NPN
R1	RD14KB3F120J	RES. CARBON 12 5% 3W
R2	RD14KB3F120J	RES. CARBON 12 5% 3W
R3	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R4	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R5	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R6	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R7	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R8	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R9	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R10	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R101	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R102	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R103	R90-1126-05	RES. NETWORK 8X1M
R104	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R105	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R106	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R107	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R108	RD14BB2C101J	RES. CARBON 100 5% 1/6W
S101	S62-0608-05	DIP SWITCH

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
U1	NJN4556L	IC, DUAL HIGH CURRENT OP AMP
U101	MAX232EPE	IC, RS-232C DRIVERS/RECEIVERS
U102	SN75160BN	IC, OCTAL GP-1B TRANSCEIVER
U103	SN75161BN	IC, OCTAL GP-1B TRANSCEIVER
U104	TC74HC245AP	IC, OCTAL BUS TRANSCEIVER
U105	UPD7210C	IC, GP-1B CONTROLLER
VR1	R12-1551-05	RES. SEMI FIXED 1KB

## FINAL UNIT

### X80-1140-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	F01-0891-03	HEAT SINK
	F02-0502-04	HEAT SINK
	J30-0605-05	SPACER
	J73-0023-13	PCB (UNMOUNTED)
	L92-0110-05	FERRITE BEADS
	N09-0623-04	SCREW, SEMS PAN HD X3X8
	N89-3008-41	SCREW, BINDING TAPITFE 3X8
	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
C1	C91-1357-05	CAP. NYLAR 0.1 10% 100V
C2	C91-1275-05	CAP. ELECTRO 33000 5.5V
C3	C91-1275-05	CAP. ELECTRO 33000 5.5V
C4	CK45FB1H472K	CAP. CERAMIC 4700P 10% 50V
C5	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C6	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C9	CC45FCH1H270J	CAP. CERAMIC 27P 5% 50V
C10	CC45FCH1H270J	CAP. CERAMIC 27P 5% 50V
C11	C91-1357-05	CAP. NYLAR 0.1 10% 100V
C12	NO USE	
C13	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C14	CC45FSL1H391J	CAP. CERAMIC 390P 5% 50V
C15	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C98	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C103	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
C104	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C105	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C108	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C109	CC45FCH2H010C	CAP. CERAMIC 1P 0.25P 500V
C110	CC45FCH2H0R5C	CAP. CERAMIC 0.5P 0.25P 500V
C111	C91-1359-05	CAP. METALIZED 0.01 10% 250V
C112	C91-1359-05	CAP. METALIZED 0.01 10% 250V
C113	C91-1360-05	CAP. METALIZED 0.1 10% 250V
C114	C91-1360-05	CAP. METALIZED 0.1 10% 250V
C115	CC45FCH1H040C	CAP. CERAMIC 4P 0.25P 50V
C116	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C120	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C121	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C122	C91-1357-05	CAP. NYLAR 0.1 10% 100V
C301	CE04EW1C331M	CAP. ELECTRO 330 20% 16V
C302	CE04EW1C331M	CAP. ELECTRO 330 20% 16V
C303	NO USE	
C304	CE04EW2A220M	CAP. ELECTRO 22 20% 100V
C305	CE04WE2E4R7M	CAP. ELECTRO 4.7 20% 250V
C306	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C307	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C308	NO USE	
C309	C91-1357-05	CAP. NYLAR 0.1 10% 100V
C310	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C311	NO USE	
C312	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C313	NO USE	
C314	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C315	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C801	CC45FSL1H391J	CAP. CERAMIC 390P 5% 50V
C802	CE04EW0J331M	CAP. ELECTRO 330 20% 6.3V
C803	CE04EW0J331M	CAP. ELECTRO 330 20% 6.3V
C806	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C807	C91-1357-05	CAP. NYLAR 0.1 10% 100V
C808	CE04EW1C100M	CAP. ELECTRO 10 20% 16V
C809	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
C810	CE04HW0J102M	CAP. ELECTRO 1000 20% 6.3V
C811	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C812	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C813	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
L1	L33-0806-05	CHOKE COIL (0.52UH)
L2	L33-0806-05	CHOKE COIL (0.52UH)
L3	L33-0806-05	CHOKE COIL (0.52UH)
L4	L33-0806-05	CHOKE COIL (0.52UH)
L5	L40-2201-70	FERRI INDUCTOR 22UH 10%

REF. NO	PARTS NO	NAME & DESCRIPTION
P5	E40-3238-05	PIN CONNECTOR 3P
P8	E40-7037-05	PIN CONNECTOR 26P
P9	E40-3238-05	PIN CONNECTOR 3P
P10	E40-3238-05	PIN CONNECTOR 3P
Q1	2SC3779(D)	TR. SI, NPN
Q2	2SC3779(D)	TR. SI, NPN
Q3	2SC3779(D)	TR. SI, NPN
Q4	2SC3779(D)	TR. SI, NPN
Q5	2SA1161	TR. SI, PNP
Q6	2SA1161	TR. SI, PNP
Q7	2SA1161	TR. SI, PNP
Q8	2SA1161	TR. SI, PNP
Q9	2SC3779(D)	TR. SI, NPN
Q10	2SC3779(D)	TR. SI, NPN
Q11	2SC3779(D)	TR. SI, NPN
Q12	2SC3779(D)	TR. SI, NPN
Q13	2SC1164(O)*S	TR. SI, NPN
Q14	2SC1164(O)*S	TR. SI, NPN
Q101	2SC3315(C)	TR. SI, NPN
Q102	2SC3315(C)	TR. SI, NPN
Q103	2SC3315(C)	TR. SI, NPN
Q104	2SC3315(C)	TR. SI, NPN
Q105	2SA1005(K)	TR. SI, PNP
Q106	2SA1005(K)	TR. SI, PNP
Q107	2SA1005(K)	TR. SI, PNP
Q108	2SA1005(K)	TR. SI, PNP
Q109	2SC3354(S,T)	TR. SI, NPN
Q110	2SC3354(S,T)	TR. SI, NPN
Q111	2SA1206(K)	TR. SI, PNP
Q112	2SC3354(S,T)	TR. SI, NPN
Q113	2SC3354(S,T)	TR. SI, NPN
Q114	2SC3600(E,F)	TR. SI, NPN
Q115	2SC3600(E,F)	TR. SI, NPN
Q116	2SA1406(E,F)	TR. SI, PNP
Q117	2SA1406(E,F)	TR. SI, PNP
Q118	2SA1206(K)	TR. SI, PNP
R1	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R2	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W
R3	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R4	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R5	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R6	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R7	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R8	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R9	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R10	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R11	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R12	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R13	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R14	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R15	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R16	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R17	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R20	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R21	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R22	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R23	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R24	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R25	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R26	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R27	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R28	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R29	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R30	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R31	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R32	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R33	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R34	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R35	RN14BK2E68R0F	RES. METAL FILM 68.0 1% 1/4W
R36	RN14BK2E68R0F	RES. METAL FILM 68.0 1% 1/4W
R37	RN14BK2C1500F	RES. METAL FILM 150 1% 1/6W
R38	NO USE	
R39	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R40	NO USE	
R41	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R42	RD14BB2C121J	RES. CARBON 120 5% 1/6W
R43	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R44	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R45	RD14BB2E150J	RES. CARBON 15 5% 1/4W
R46	RD14BB2E150J	RES. CARBON 15 5% 1/4W
R47	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R48	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R49	NO USE	
R50	R92-1420-05	RES. METAL FILM 510 5% 7W
R51	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R52	R92-1420-05	RES. METAL FILM 510 5% 7W
R53	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R54	NO USE	
R55	RD14BB2C361J	RES. CARBON 360 5% 1/6W
R56	RD14BB2C361J	RES. CARBON 360 5% 1/6W

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R59	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R80	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R81	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R82	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R83	R92-1480-05	RES. LT3000 1.6K 5% 1/6W
R84	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R85	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R101	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R102	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R103	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R104	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R105	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R106	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R107	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R108	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R112	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R113	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R114	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R117	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R118	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R119	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
R120	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
R121	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R122	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R123	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R124	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R125	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
R126	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R127	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R128	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R129	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R130	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R131	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R132	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R133	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R134	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R135	NO USE	
R136	RD14BB2C394J	RES. CARBON 390K 5% 1/6W
R137	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R138	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R139	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R140	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R141	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R142	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R143	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R144	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R145	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R146	R92-1434-05	RES. SPECIAL POWER 47K 5% 1/2W
R147	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R148	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R149	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R150	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R151	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R152	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R153	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R154	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R155	R92-1434-05	RES. SPECIAL POWER 47K 5% 1/2W
R156	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R157	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R158	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R159	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R164	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R180	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R181	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R182	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R183	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R201	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R202	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R203	NO USE	
R204	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R801	RD14BB2C133J	RES. CARBON 13K 5% 1/6W
R802	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R803	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R804	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R805	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R806	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R807	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R810	RD14BB2C224J	RES. CARBON 220K 5% 1/6W
R811	RD14BB2C823J	RES. CARBON 82K 5% 1/6W
R812	R92-1481-05	RES. LT3000 130 5% 1/6W
R813	R92-1162-05	RES. LT3000 560 5% 1/6W
R814	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R815	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R816	RD14BB2C120J	RES. CARBON 12 5% 1/6W
R817	RN14BK2C1101F	RES. METAL FILM 1.1K 1% 1/6W
R818	RD14BB2C185J	RES. CARBON 1.8K 5% 1/6W
R819	NO USE	

REF. NO	PARTS NO	NAME & DESCRIPTION
R820	R92-1190-05	RES. LT3000 510 5% 1/6W
R821	R92-1190-05	RES. LT3000 510 5% 1/6W
TC1	C05-0471-05	CAP. TRIMMER 30P
TC2	C05-0470-05	CAP. TRIMMER 20P
TC99	C05-0470-05	CAP. TRIMMER 20P
TC100	NO USE	
TC101	C05-0464-05	CAP. TRIMMER 2P
TC102	NO USE	
TC103	C05-0464-05	CAP. TRIMMER 2P
TH2	112-102-2	THERMISTOR
U1	KMG01	IC. LINEAR
U2	KMG01	IC. LINEAR
VR1	R12-0571-05	RES. SEMI FIXED 500 B
VR2	NO USE	
VR3	R12-3453-05	RES. SEMI FIXED 10KB
VR4	R12-0058-05	RES. SEMI FIXED 470 B
VR101	R12-1538-05	RES. SEMI FIXED 1KB
VR102	R12-0571-05	RES. SEMI FIXED 500 B
VR103	R12-3543-05	RES. SEMI FIXED 20KB
VR201	R12-3543-05	RES. SEMI FIXED 20KB

## VR UNIT

### X81-2900-00

REF. NO	PARTS NO	NAME & DESCRIPTION
F01-0103-05		CRT SOCKET
F01-0859-14		HEAT SINK
J13-0041-05		FUSE HOLDER
J21-4610-04		BRACKET FOR P.C.B.
J61-0521-05		SUPPORT
J73-0016-03		PCB (UNMOUNTED)
N09-0623-14		SCREW, SENS PAN HD M3X8
R92-0150-05		JUMPING RES. ZERO OHM (10MM)
R92-1061-05		JUMPING RES. ZERO OHM (5MM)
C1	CE04EW1C471M	CAP. ELECTRO 470 20% 16V
C2	C91-1361-05	CAP. MYLAR 0.01 10% 100V
C3	CK45B2H472K	CAP. CERAMIC 4700P 10% 500V
C4	C91-1361-05	CAP. MYLAR 0.01 10% 100V
C5	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C901	C91-2537-05	CAP. CERAMIC 3300 20% 400V
C902	C91-2537-05	CAP. CERAMIC 3300 20% 400V
D1	HTZ24JC	DIODE, ZENER 23.72V
D2	1SS132	DIODE
D3	1SS132	DIODE
F1	F53-0039-05	THERMAL FUSE 70°C
JW9	E38-0473-15	WIRE ASS'Y; CRT TO FINAL
JW10	E38-0473-15	WIRE ASS'Y; CRT TO FINAL
JW18	E38-0471-05	WIRE ASS'Y; CRT TO HIGH V
JW19	NO USE	
JW20	E31-0564-15	WIRE ASS'Y; AC IN TO GND
P11	E40-3240-05	PIN CONNECTOR 5P
P12	E40-3243-05	PIN CONNECTOR 8P
P13	E40-3237-05	PIN CONNECTOR 2P
P14	E40-3237-05	PIN CONNECTOR 2P
P15	E38-0046-04	WIRE ASS'Y; CAL
P22A	E40-0328-05	PIN CONNECTOR 3P
P22B	E40-0330-05	PIN CONNECTOR 3P
Q2	2SC1384(Q)	TR. SI, NPN
Q3	2SA684(Q)	TR. SI, PNP
Q4	2SD1666(S)	TR. SI, NPN
R1	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R2	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R3	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R-1	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R5	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R6	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R7	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R8	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R9	NO USE	
R10	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R11	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R12	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R13	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R14	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R15	RD14BB2C433J	RES. CARBON 43K 5% 1/6W



# PARTS LIST


REF. NO	PARTS NO	NAME & DESCRIPTION
R16	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R17	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R18	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R19	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R20	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R21	RD14BB2C271J	RES. CARBON 270 5% 1/6W
R22	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
S1	S59-2505-05	POWER SWITCH
U1	NJM4558D	IC,DUAL OP AMP
VR1	R10-3505-05	V. R. (A/B INT,ROT+ILLUM)20KB X2
VR2	R10-7501-05	V. R. (FOCUS/ASTIG)500KB/500KB
VR3	R05-3515-05	V. R. WITH SW(READOUT INT) 20KB
VR4	R10-3505-05	V. R. (A/B INT,ROT+ILLUM)20KB X2
VR5	R12-3543-05	RES. SEMI FIXED 20KB
VR6	R12-1538-05	RES. SEMI FIXED 1KB

## ENCODER UNIT


### X81-3040-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	J73-0024-12	PCB (UNMOUNTED)
C1	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C2	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C3	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C4	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C5	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C6	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C7	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C8	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C9	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C10	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C11	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C12	C91-1361-05	CAP. NYLAR 0.01 10% 100V
C13	CE04EW1A101H	CAP. ELECTRO 100 20% 10V
C14	C91-1357-05	CAP. NYLAR 0.1 10% 100V
C15	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C16	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C17	C91-1357-05	CAP. NYLAR 0.1 10% 100V
C18	C91-1357-05	CAP. NYLAR 0.1 10% 100V
P28	E40-7236-05	PIN CONNECTOR 40P
R1	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R2	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R3	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R4	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R5	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R6	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R7	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R8	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R9	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R10	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R11	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R12	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R13	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R14	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R15	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R16	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
S1	W02-0498-05	ENCORDER SWITCH
S2	W02-0498-05	ENCORDER SWITCH
S3	W02-0498-05	ENCORDER SWITCH
S4	W02-0498-05	ENCORDER SWITCH
S5	W02-0498-05	ENCORDER SWITCH
U1	NJM072BD	IC,JFET INPUT OP AMP
VR6	R23-3505-05	V. R. 2X20K B
VR7	R05-3525-15	V. R. 20K B
VR8	R23-3505-05	V. R. 2X20K B
VR9	R10-3504-15	ENDLESS VOLUME 2X10K B
VR10	R10-3504-15	ENDLESS VOLUME 2X10K B
VR11	R10-3504-15	ENDLESS VOLUME 2X10K B
VR12	R10-3504-15	ENDLESS VOLUME 2X10K B
VR13	R10-3504-15	ENDLESS VOLUME 2X10K B
VR14	R10-3504-15	ENDLESS VOLUME 2X10K B

# SCHEMATIC DIAGRAM

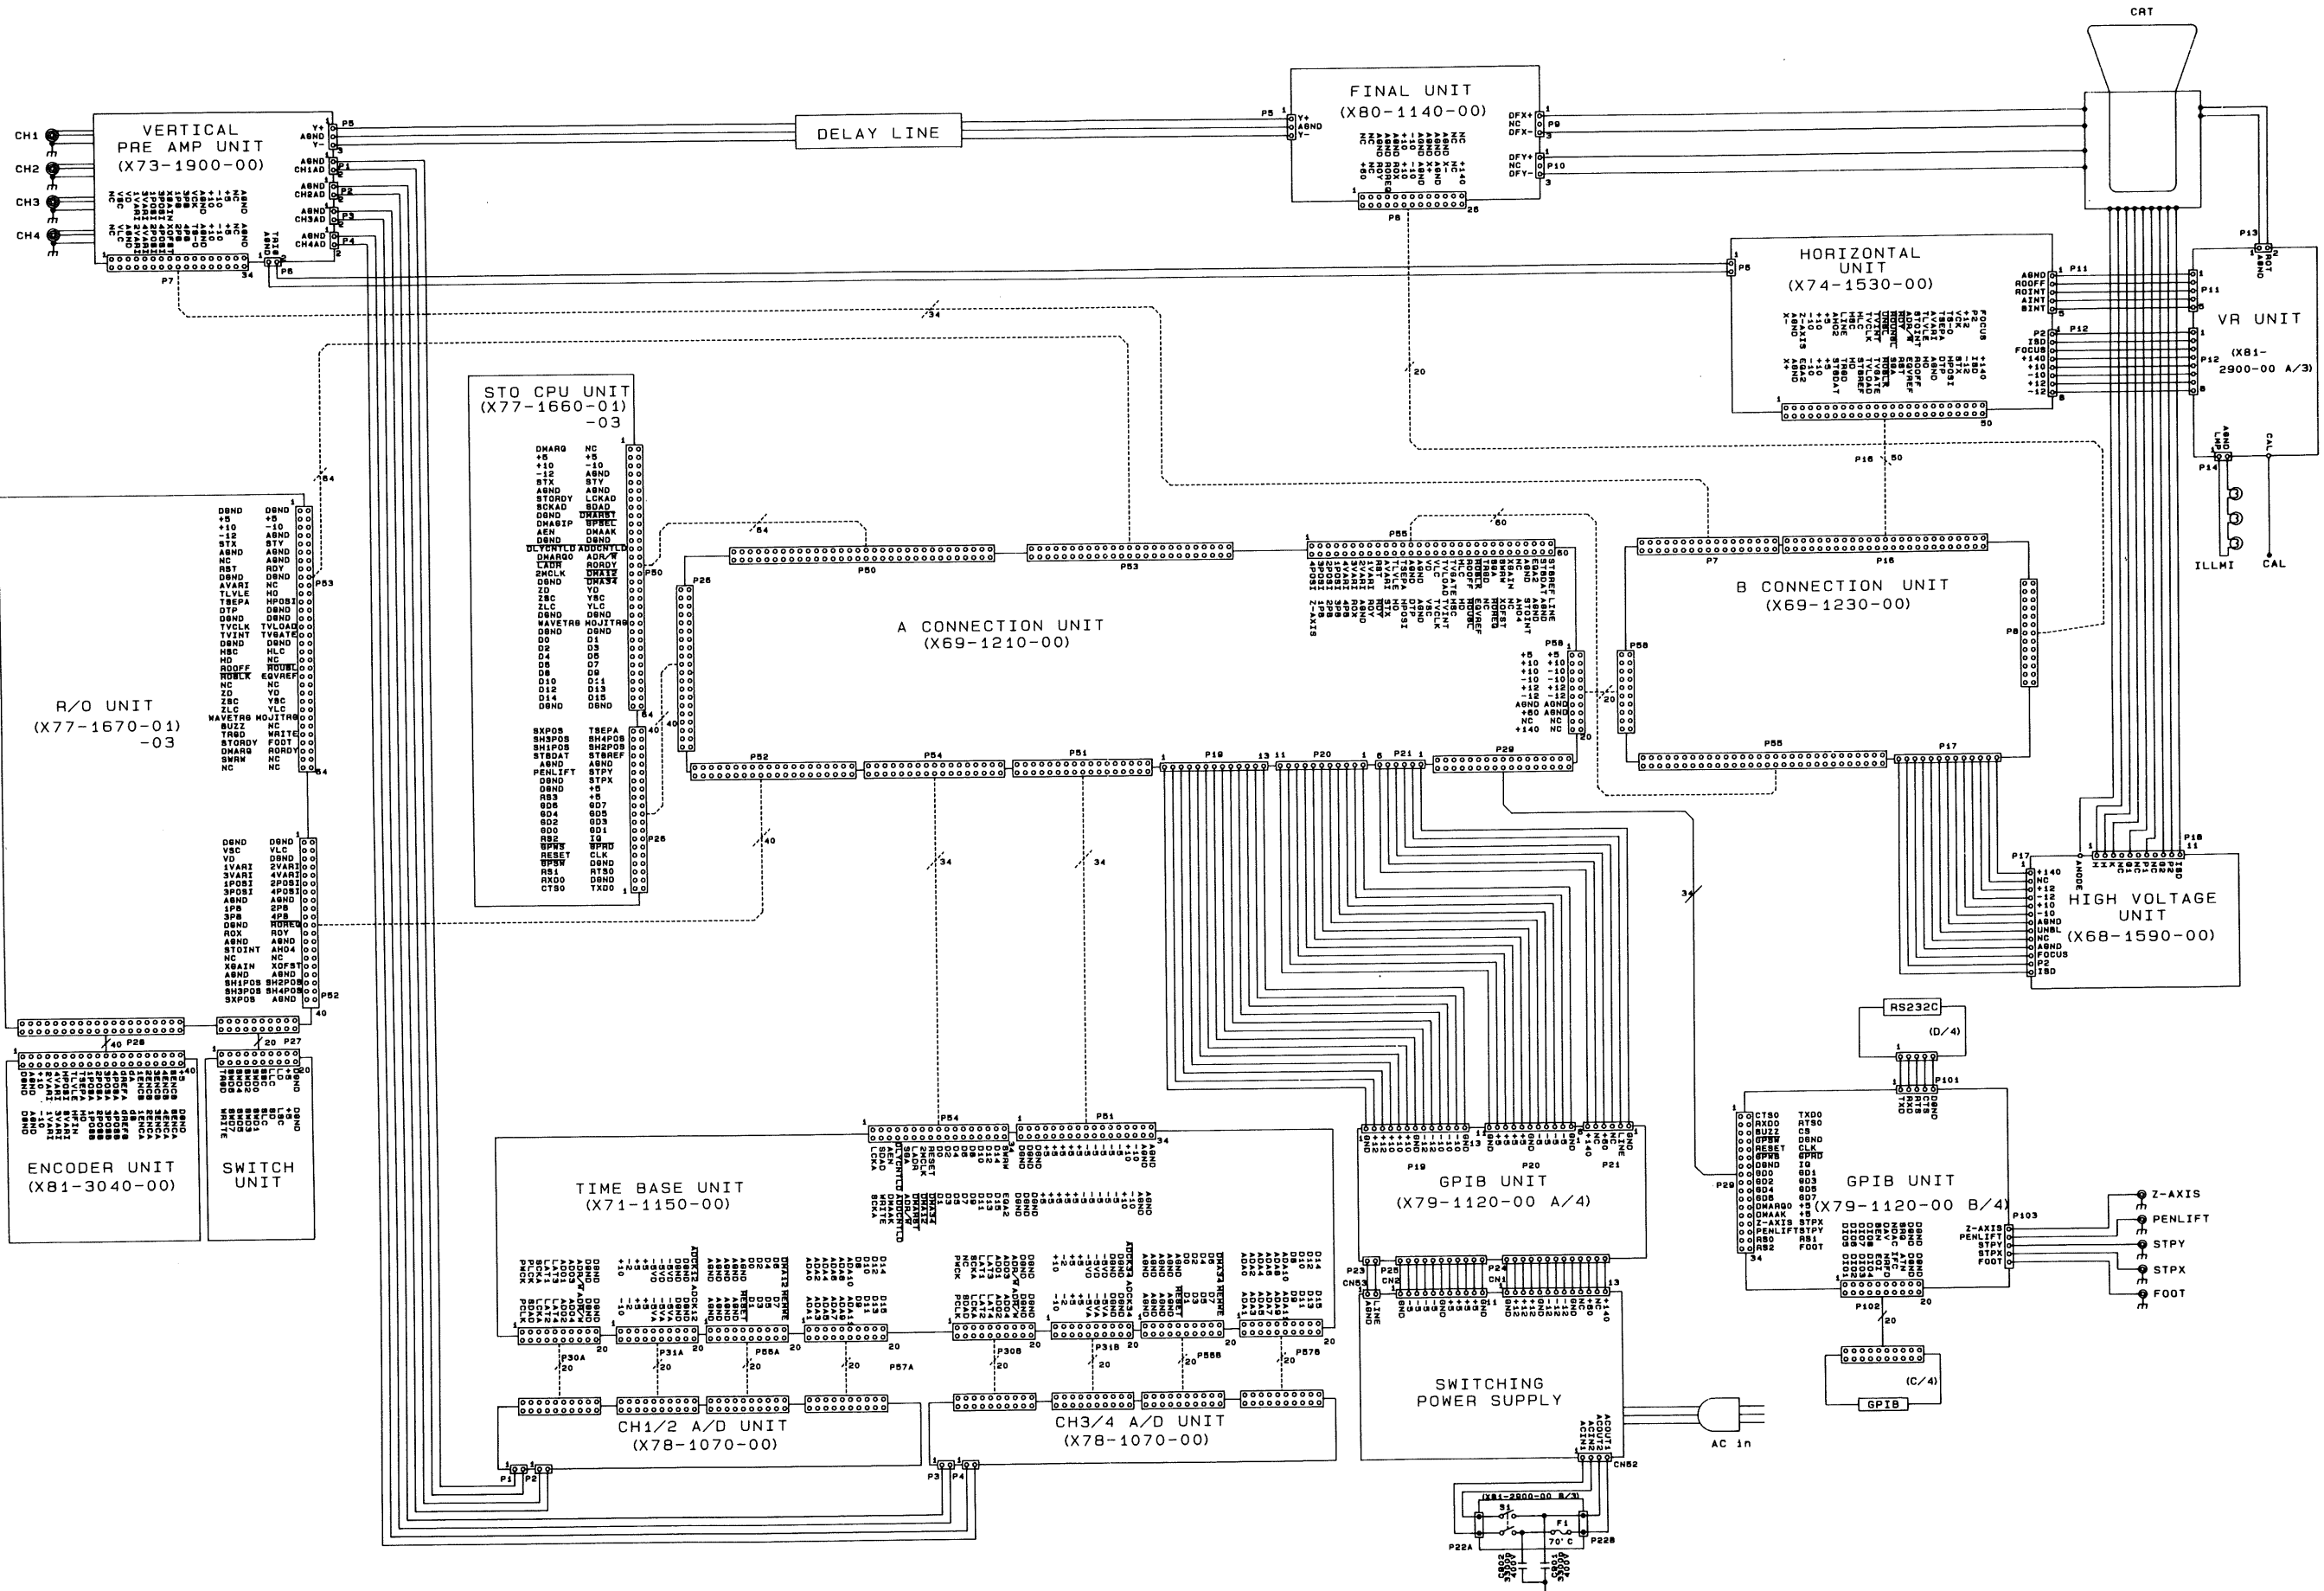

SCHEMATIC DIAGRAM  
HIGH VOLTAGE UNIT (X68-1590-00)

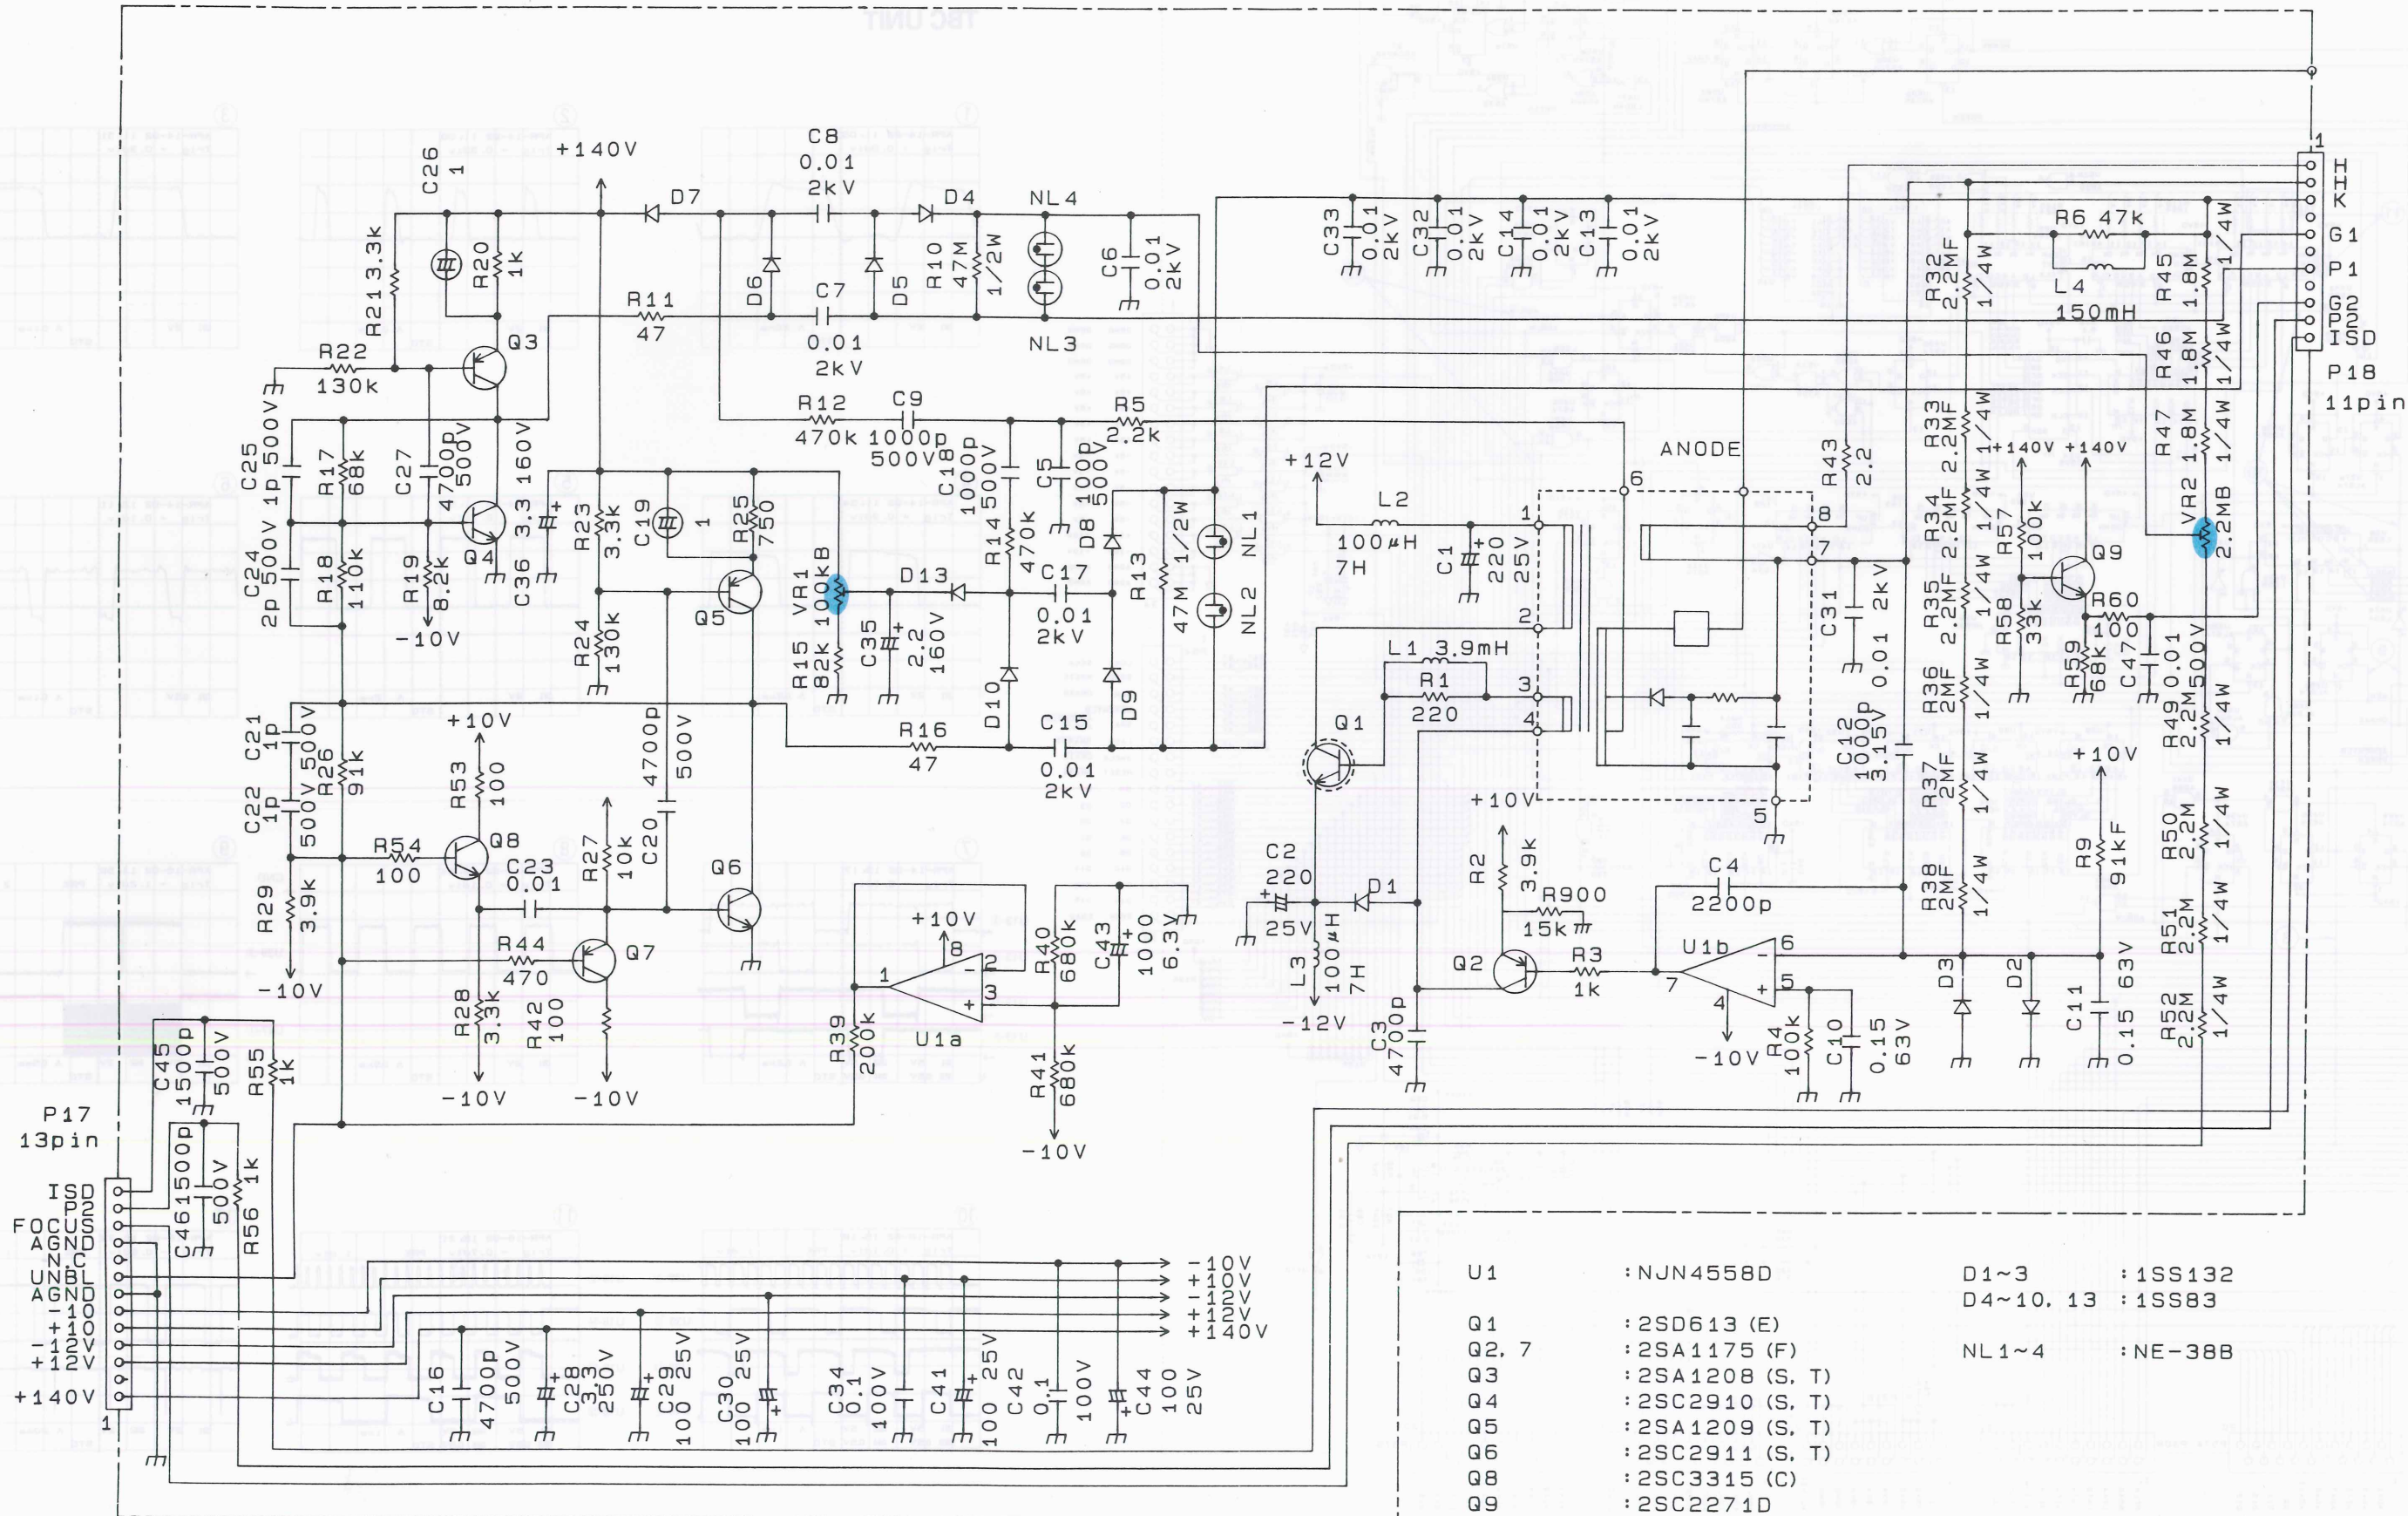


- |        |                  |             |          |
|--------|------------------|-------------|----------|
| U 1    | : NJN4558D       | D1 ~ 3      | : 1SS132 |
| Q 1    | : 2SD613 (E)     | D4 ~ 10, 13 | : 1SS83  |
| Q 2, 7 | : 2SA1175 (F)    | NL 1 ~ 4    | : NE-38B |
| Q 3    | : 2SA1208 (S, T) |             |          |
| Q 4    | : 2SC2910 (S, T) |             |          |
| Q 5    | : 2SA1209 (S, T) |             |          |
| Q 6    | : 2SC2911 (S, T) |             |          |
| Q 8    | : 2SC3315 (C)    |             |          |
| Q 9    | : 2SC2271D       |             |          |



TIME BASE UNIT (X71-1150-00)














U1. 14	:MC10H131L	U15. 17, 23, 24, 28, 34-36	U50. 58	:SN74AS32N
U2	:MC10H161L	U16. 48	U53	:NJM4558D
U3	:MC10H194L	U18-20	U57	:TIC74HC123AP
U4. 40-43, 52, 59, 60	:SN74AS161N	U21. 22	Q1	:2SA1459 (K)
U5	:SN74ALS74AN	U25-27	Q2	:2SA1209 (S, T)
U6	:SN74LS390N	U29-33	Q3	:2SC3779 (D)
U7	:SN74LS153N	U37, 39	Q6	:2SA1161
U8	:SP68650-0	U38	Q7	:2SC4049
U9	:SN74AS151N	U44, 51	D1, 901, 902	:1SS132
U10	:MC10H124L	U45	D2, 3	:MA700
U11	:SN74LS04N	U46, 61		
U12	:MC10H174L	U47		
U13. 56	:MC10H125L	U49		

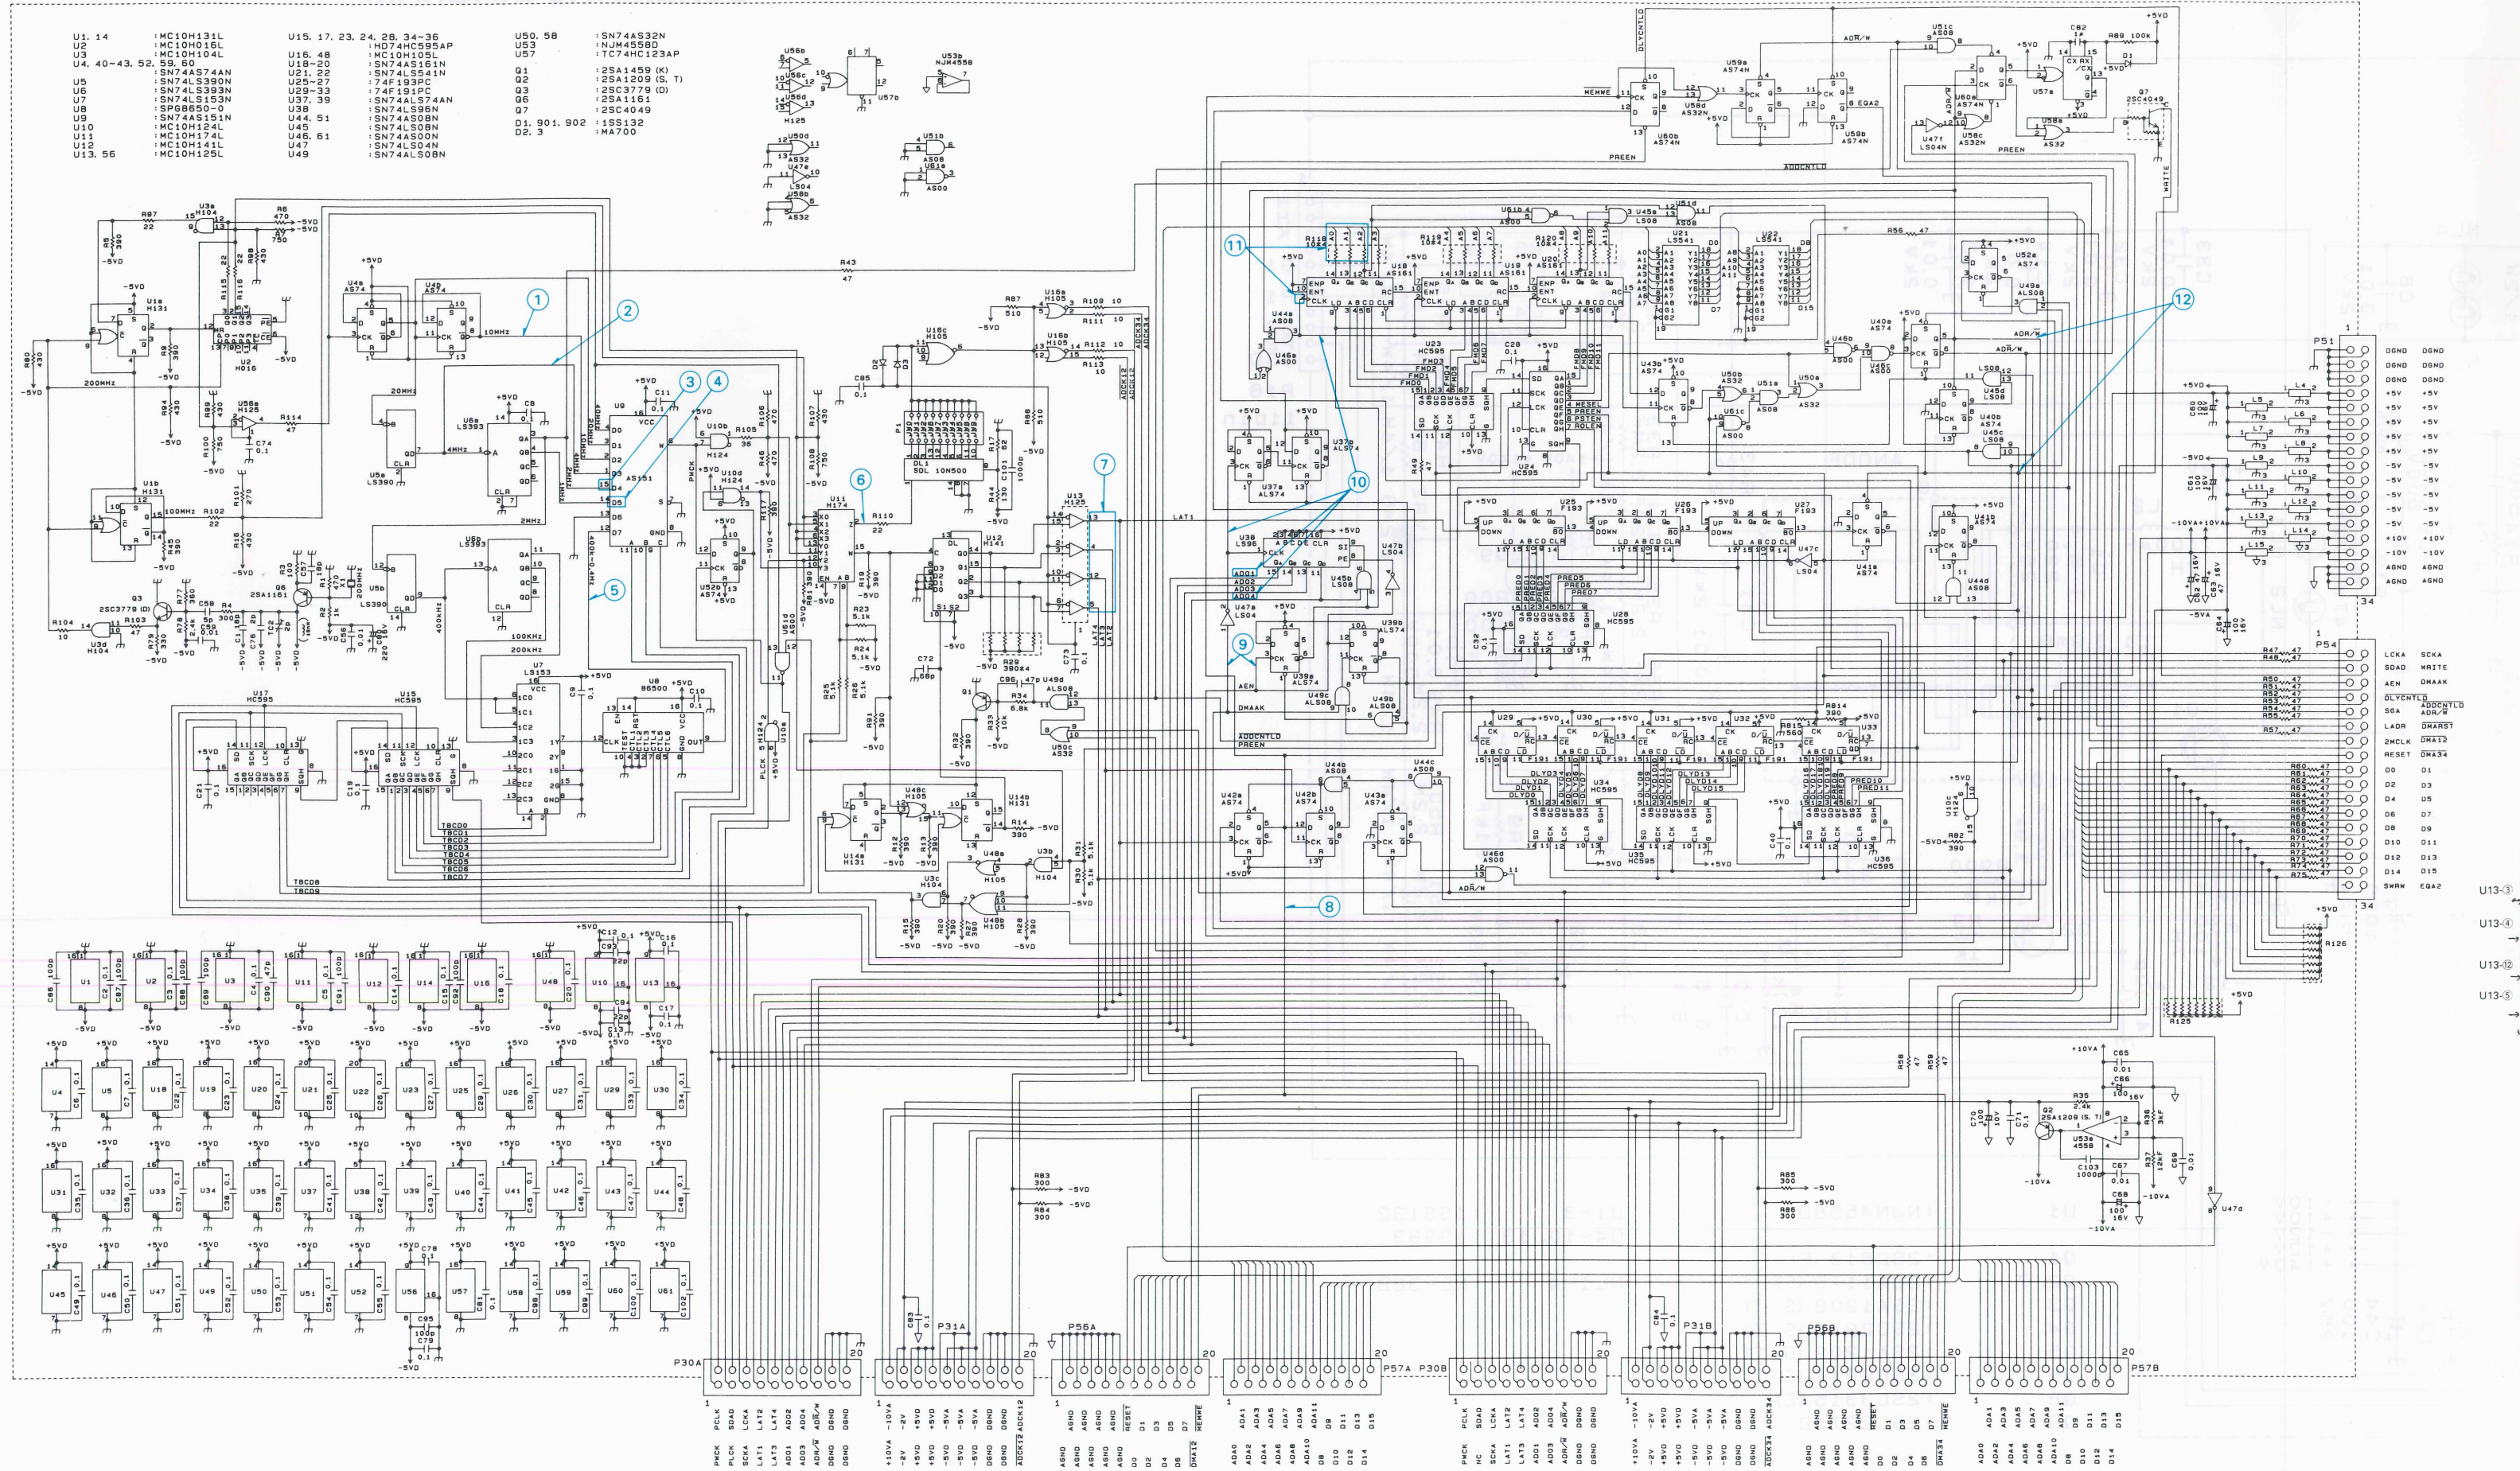



# SCHEMATIC DIAGRAM


## TBC UNIT

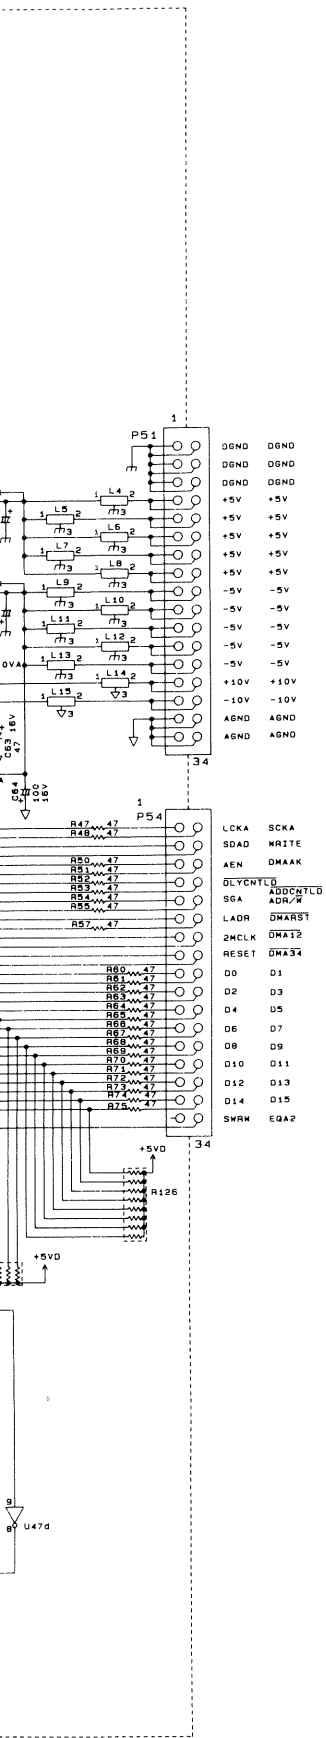



VERTICAL UNIT (X73-1900-00)


SCHEMATIC DIAGRAM

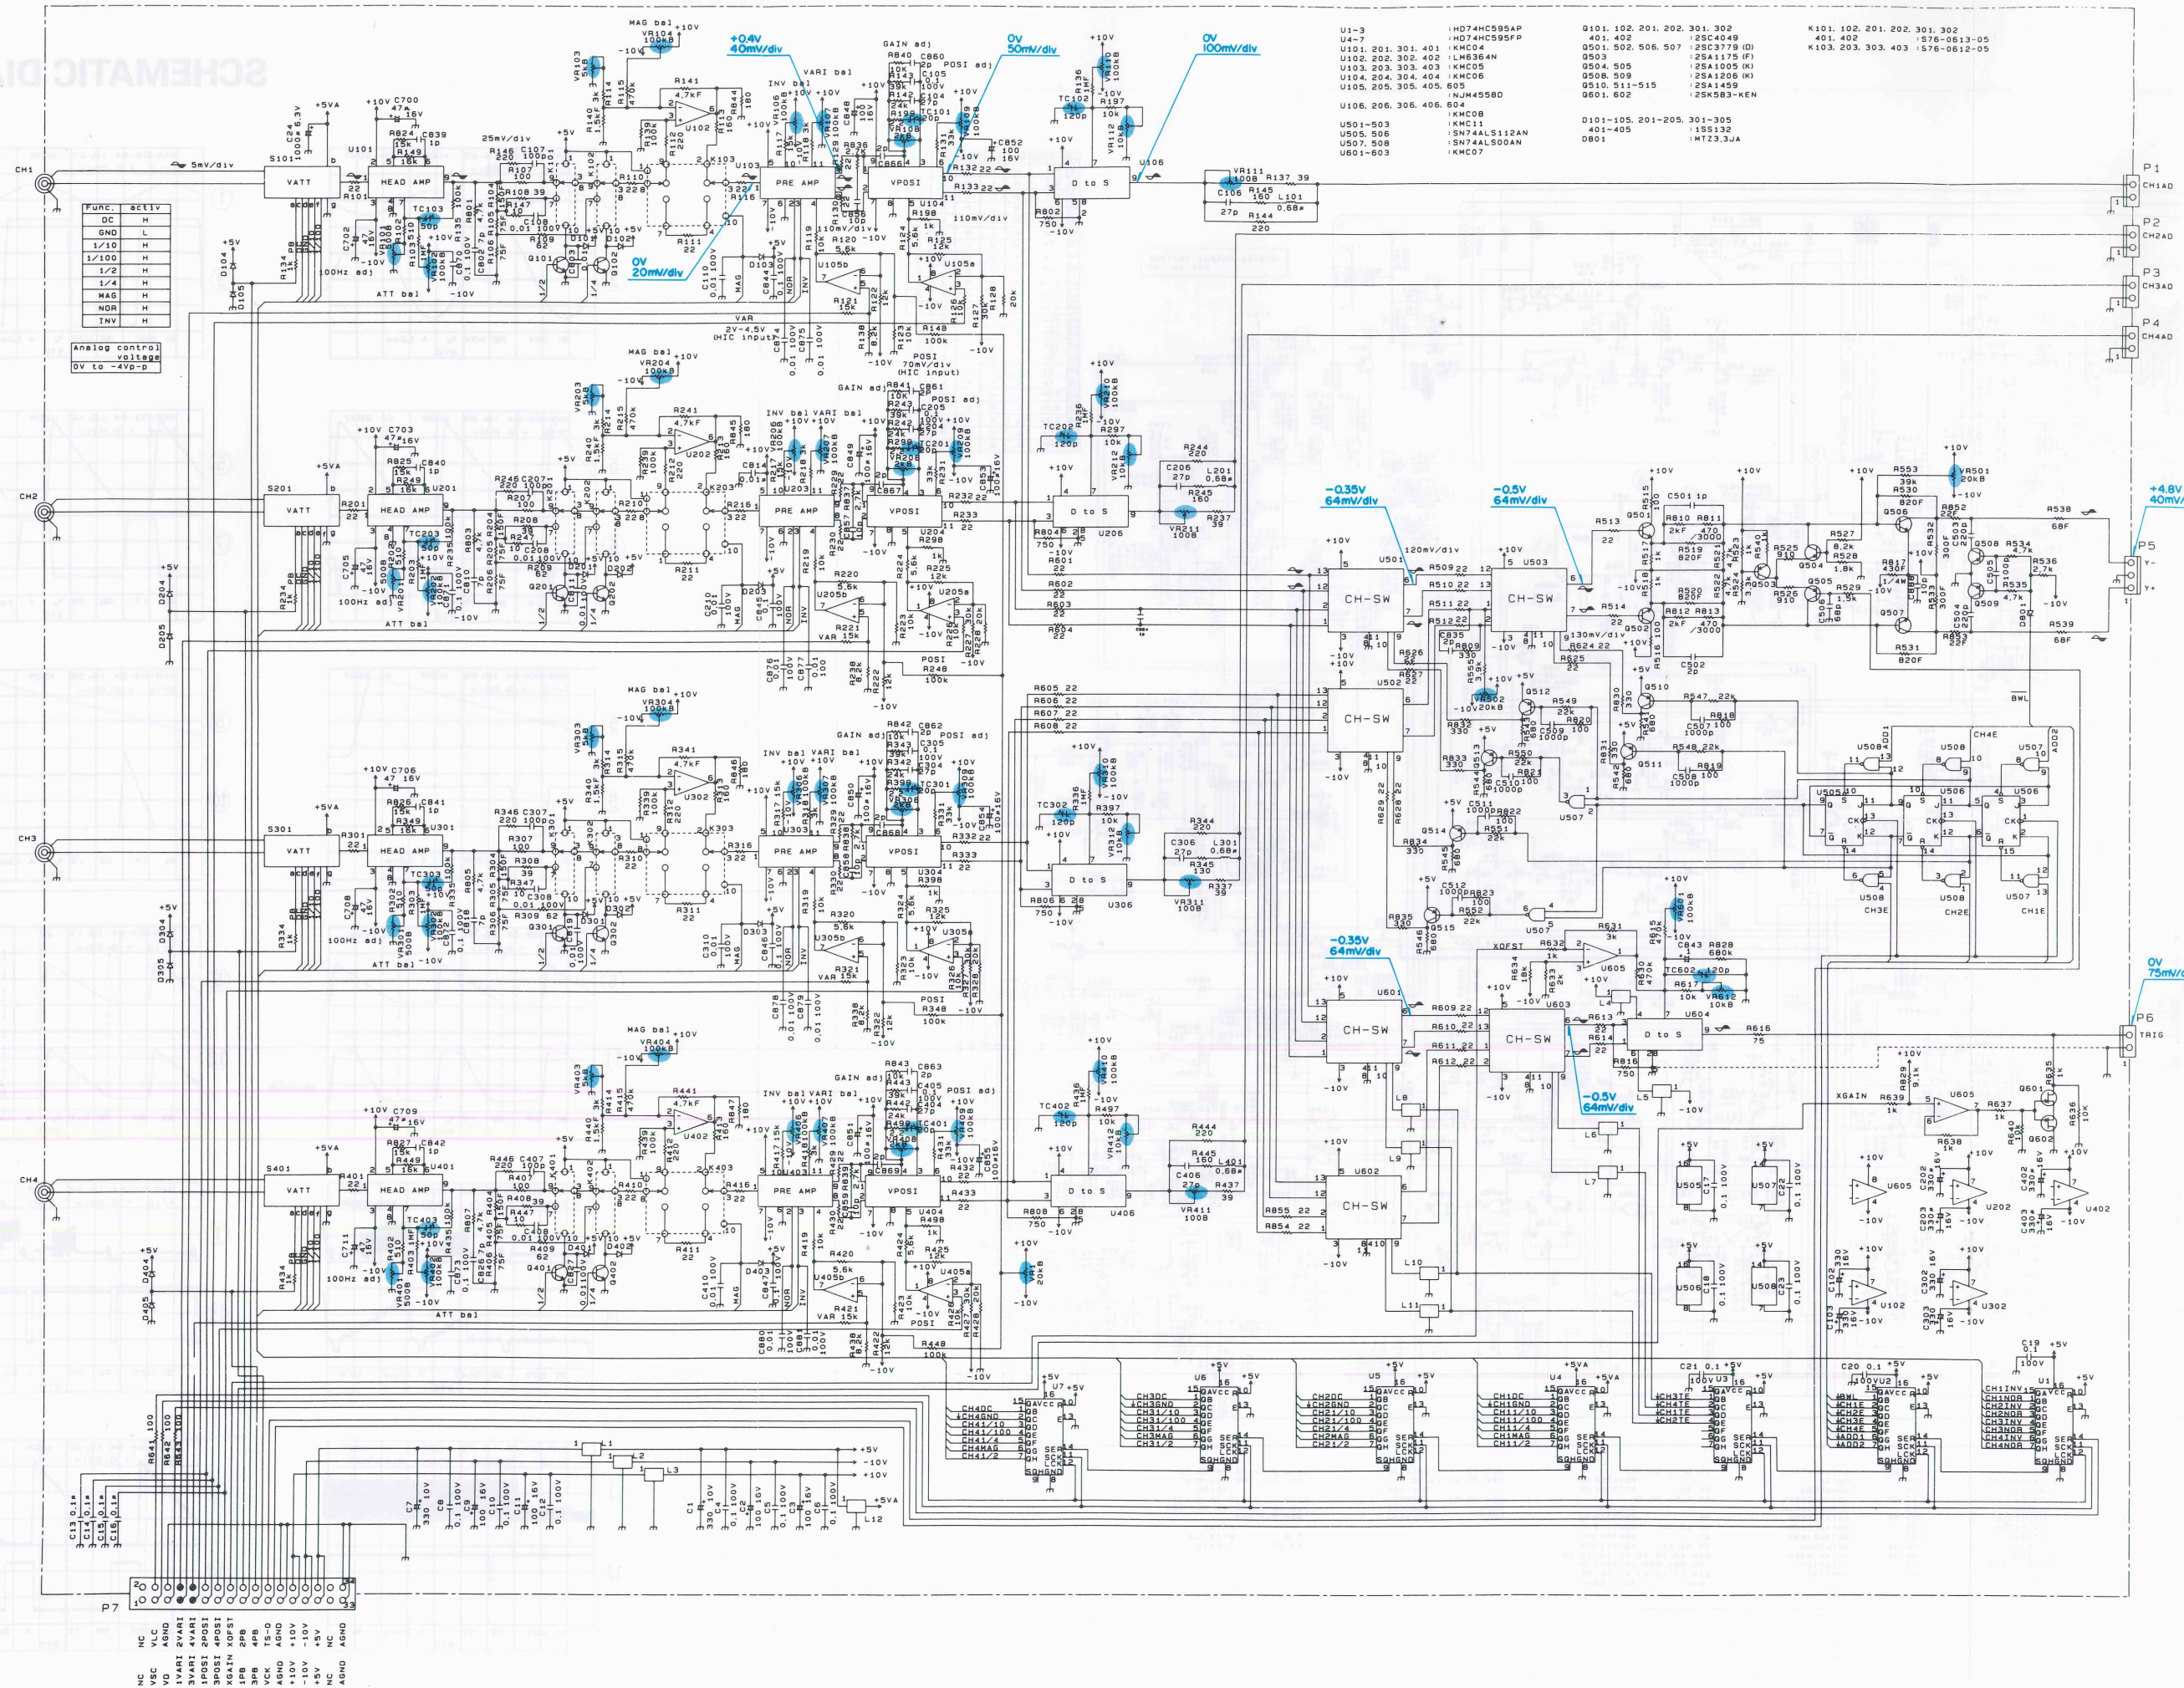



01. 102. 201. 202. 301. 302  
01. 402 : 576-0813-05  
03. 303. 403 : 576-0612-05



# SCHEMATIC DIAGRAM

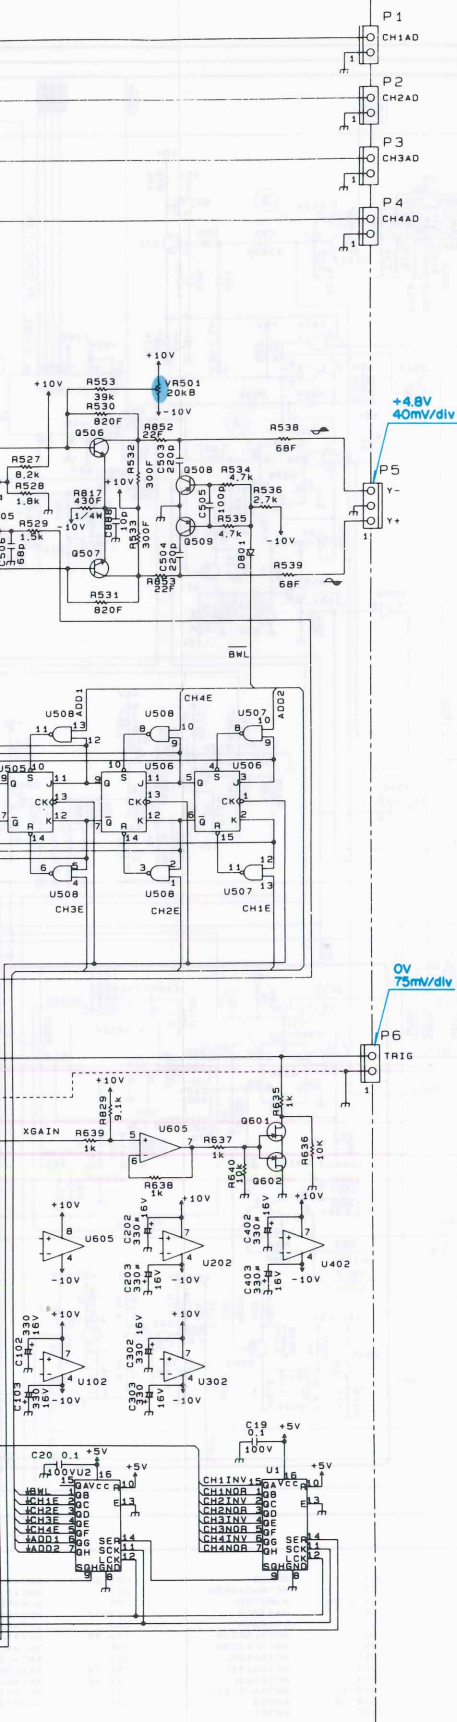

+4.8V  
40mV/div



















0V  
75mV/div



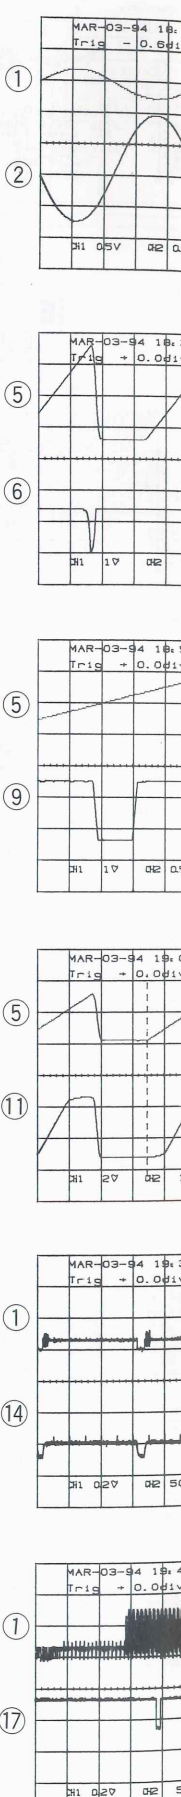
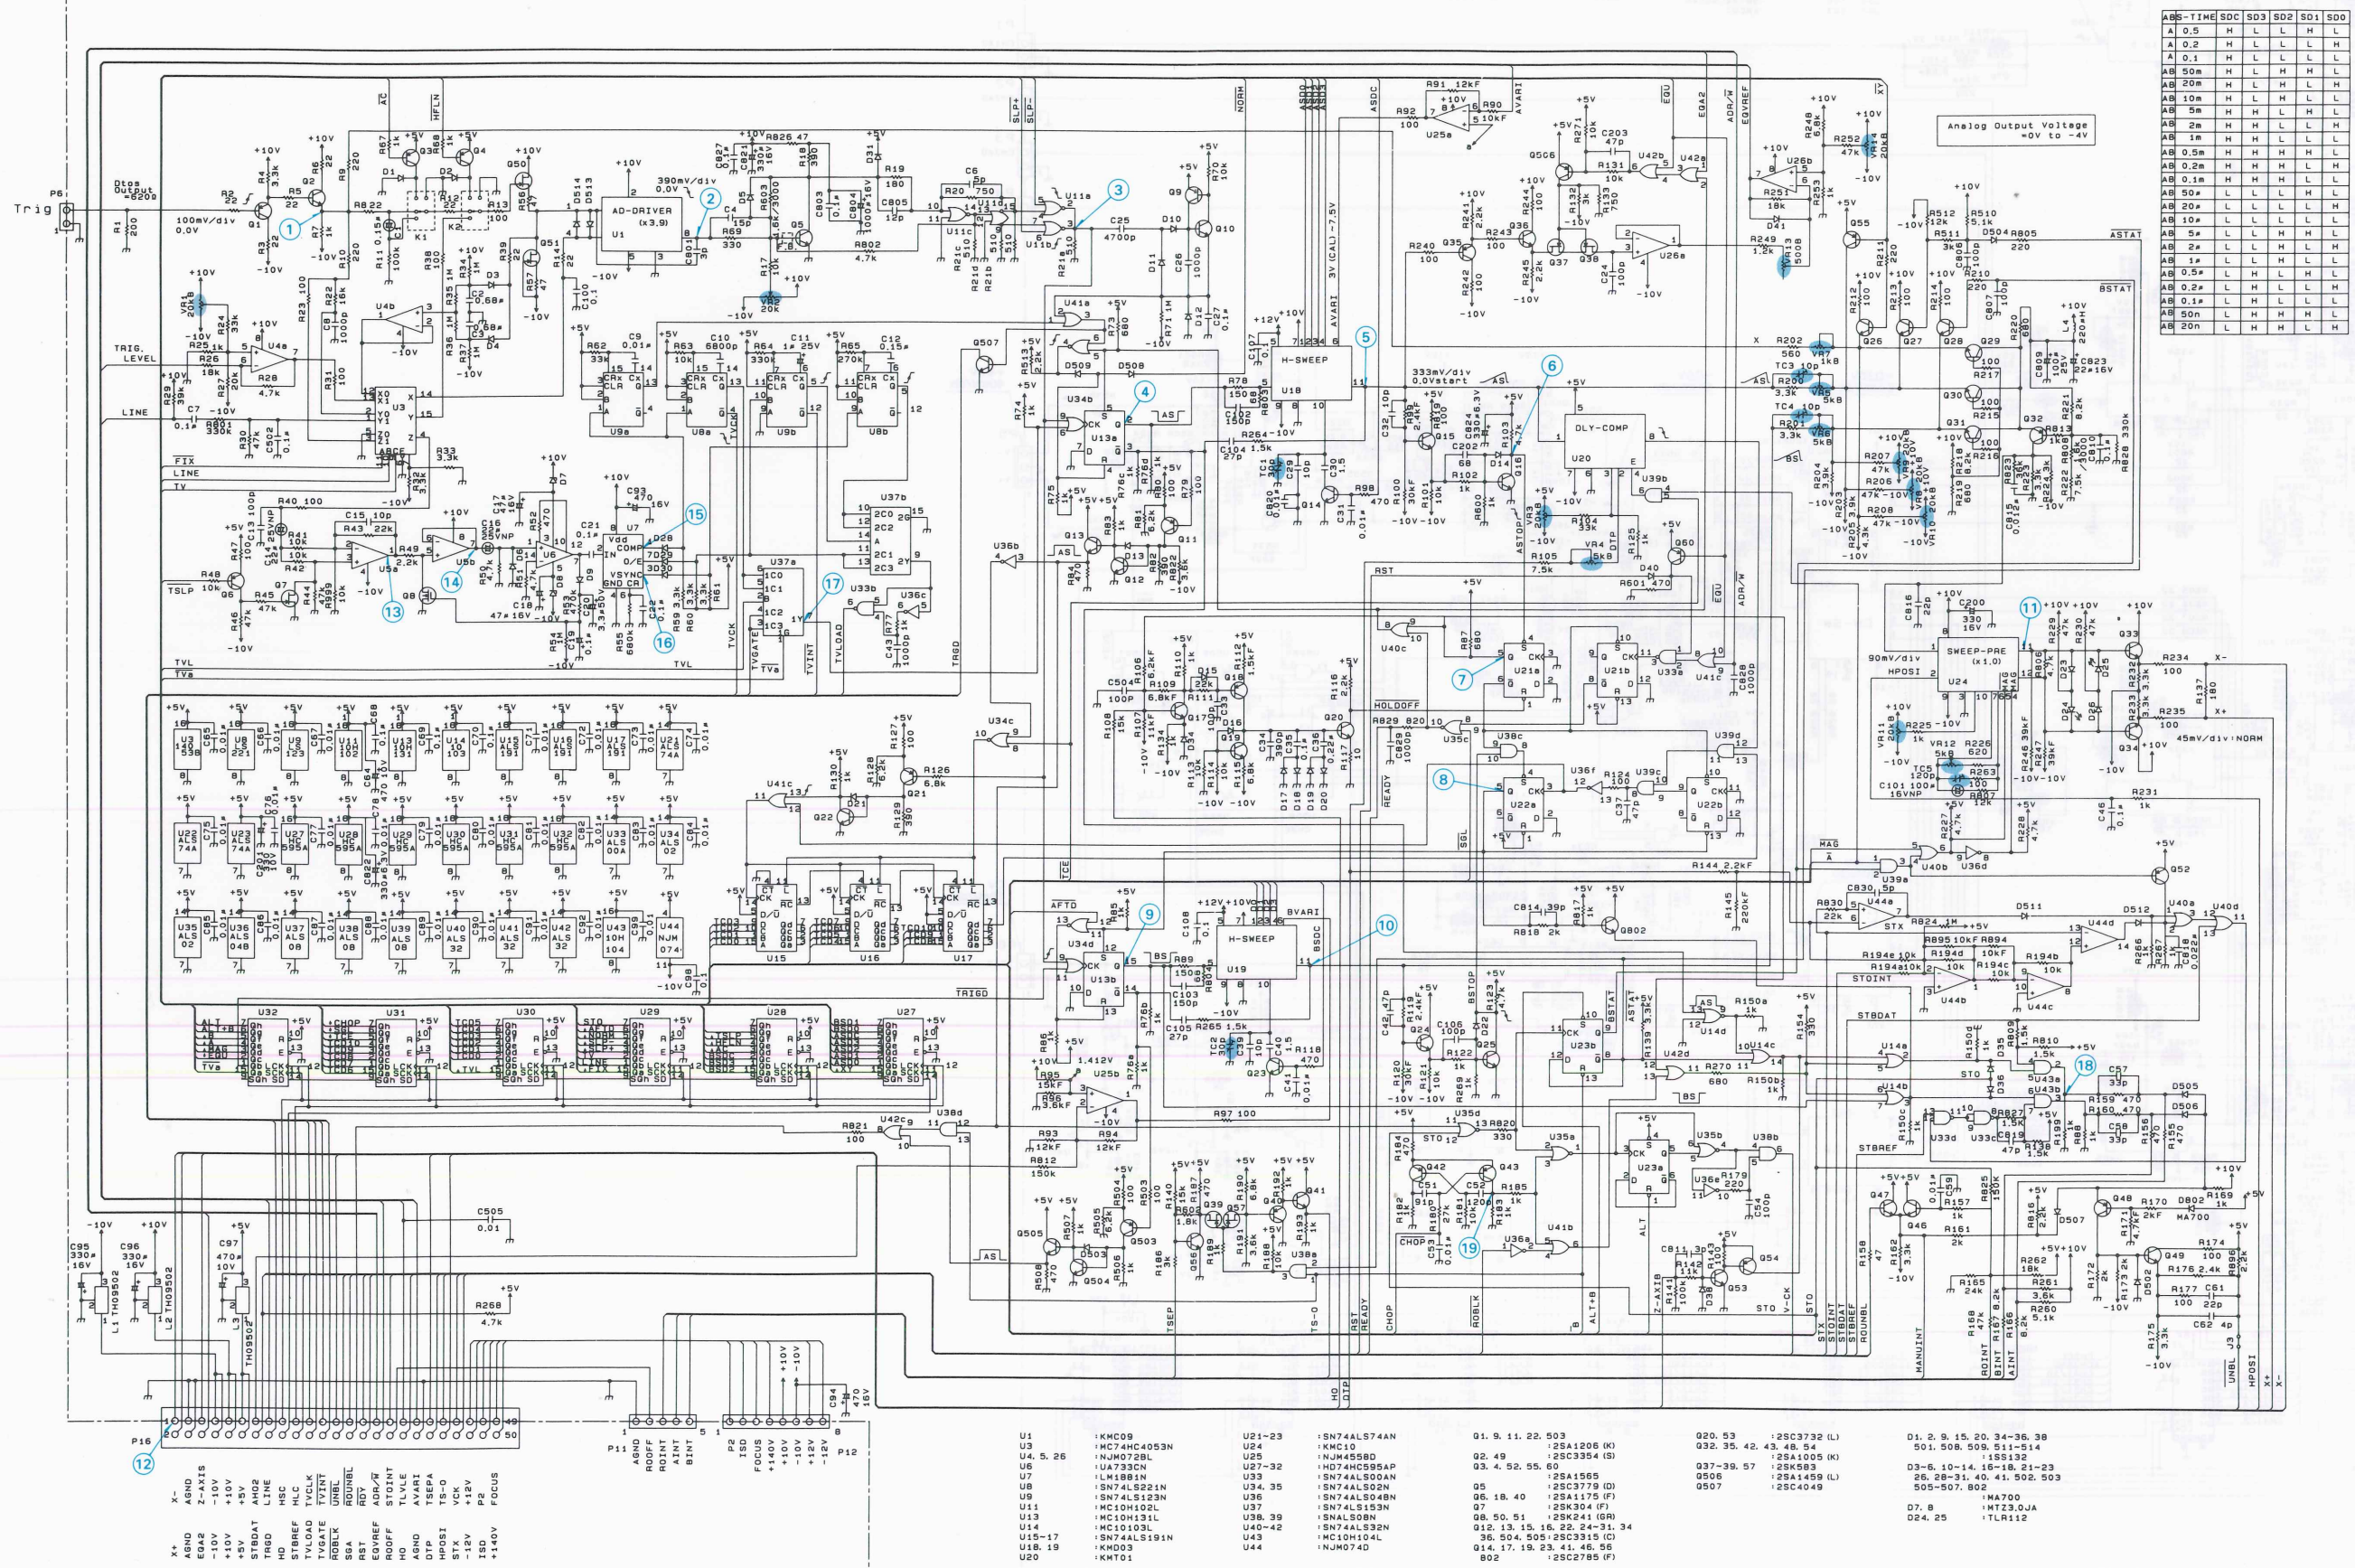




# SCHEMATIC DIAGRAM

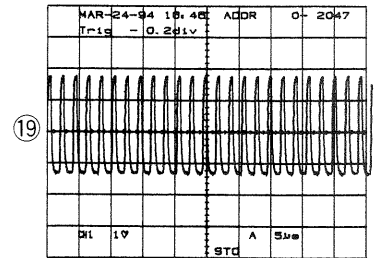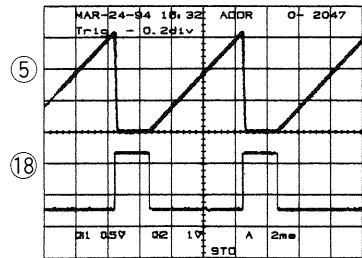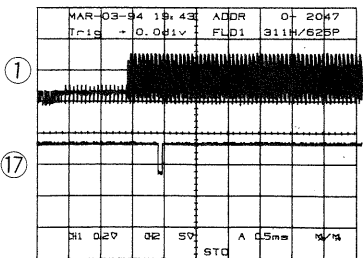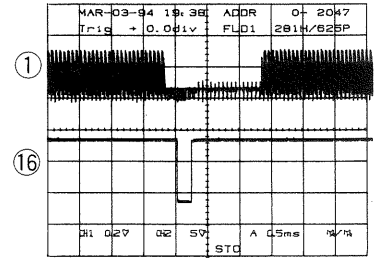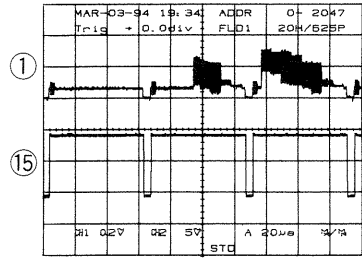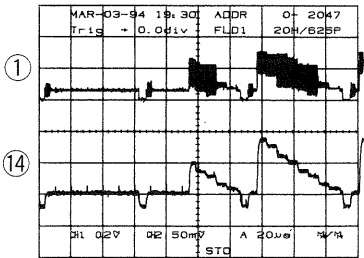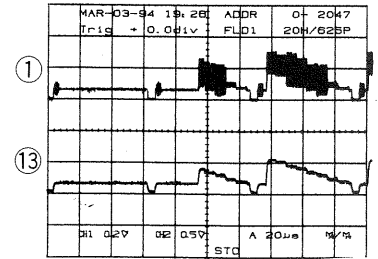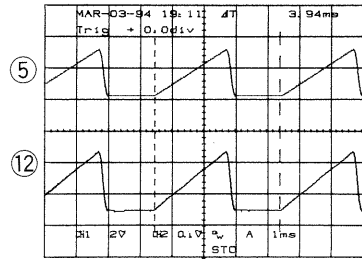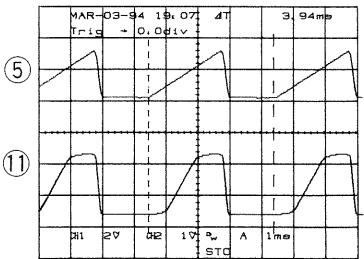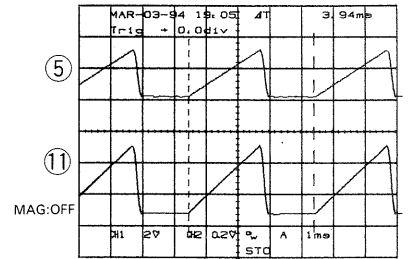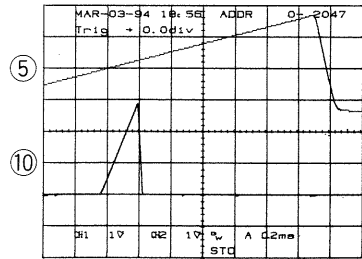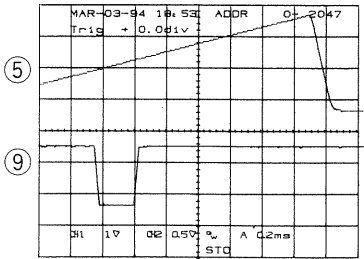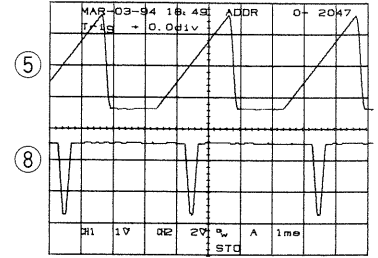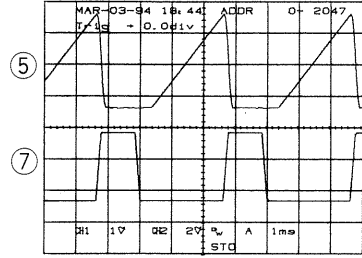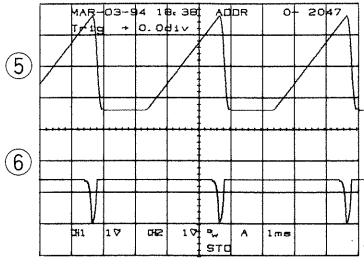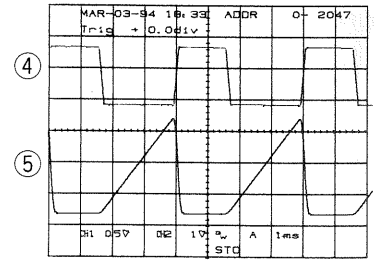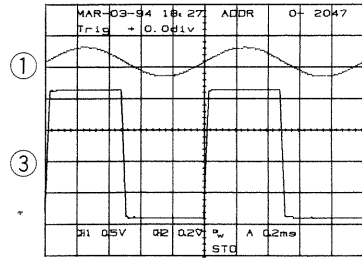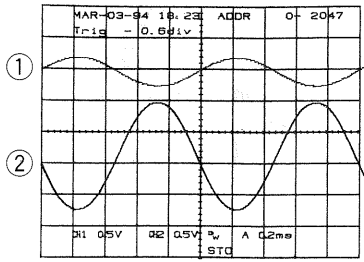




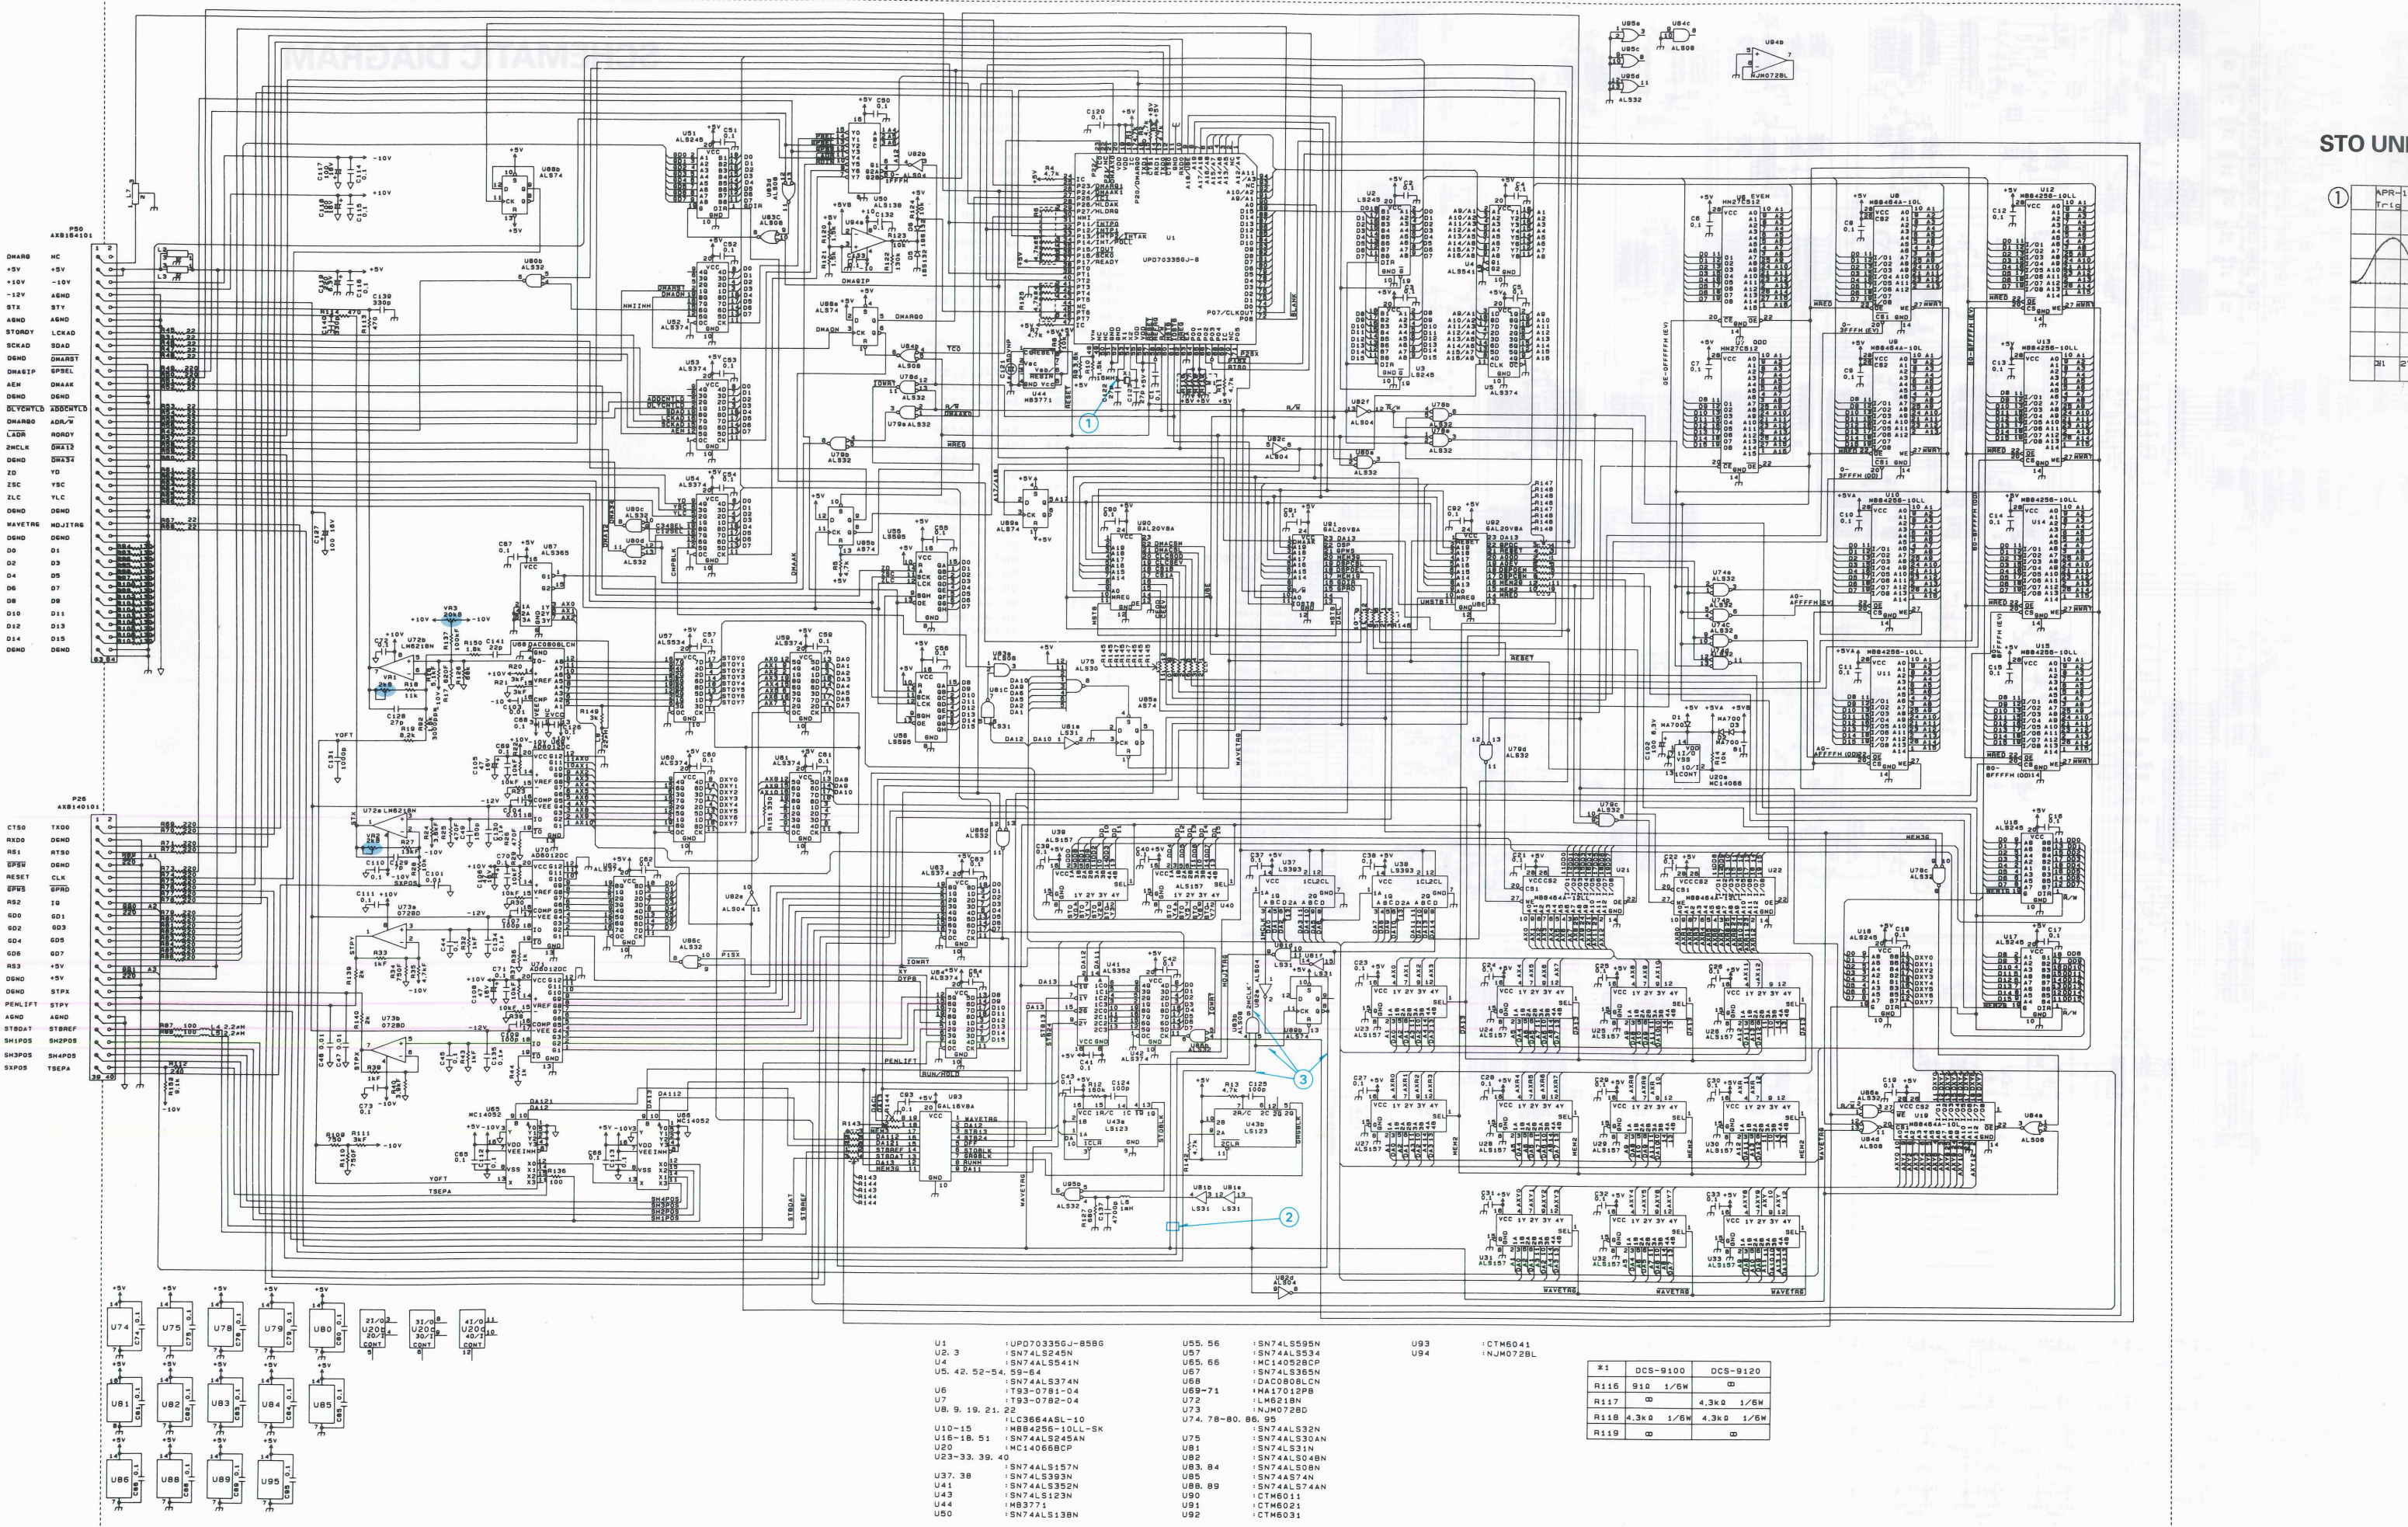

X1	DCS-9100	DCS-9120
R116	910 1/6W	
R117		4.3k 1/6W
R118	4.3k 1/6W	4.3k 1/6W
R119		

- U1 : UPD70336GJ-B566
- U2, 3 : SN74ALS245N
- U4 : SN74ALS541N
- U5, 42, 52-54, 59-64 : SN74ALS374N
- U6 : T93-0781-04
- U7 : T93-0782-04
- U8, 9, 19, 21, 22 : LC3664ASL-10
- U10-15 : M884256-10LL-SK
- U16-18, 51 : SN74ALS245AN
- U20 : MC14066BCP
- U23-33, 39, 40 : SN74ALS157N
- U37, 38 : SN74ALS393N
- U41 : SN74ALS392N
- U43 : SN74LS123N
- U44 : MB3771
- U50 : SN74ALS138N
- U55, 56 : SN74LS595N
- U57 : SN74ALS534
- U65, 66 : MC14052BCP
- U67 : SN74ALS365N
- U68 : DAC0808LCN
- U69-71 : MA17012PB
- U72 : LM6218N
- U73 : NJM0728D
- U74, 78-80, 86, 95 : SN74ALS32N
- U75 : SN74ALS30AN
- U81 : SN74ALS31N
- U82 : SN74ALS04BN
- U83, 84 : SN74ALS08N
- U85 : SN74ALS393N
- U86, 89 : SN74ALS74AN
- U90 : CTM6011
- U91 : CTM6021
- U92 : CTM6031




- U93 : CTM6041
- U94 : NJM0728L






# SCHEMATIC DIAGRAM

## STO UNIT

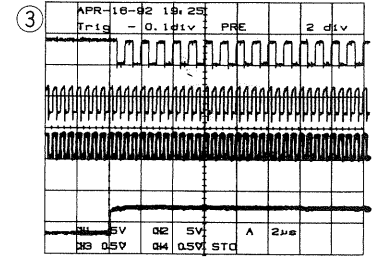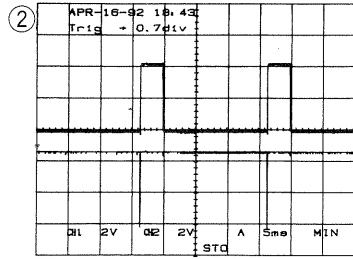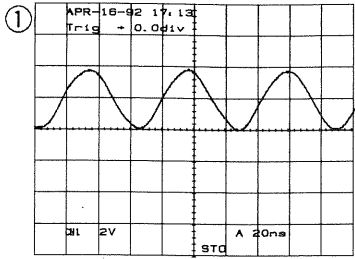

R/O UNIT (X77-1670-0X)

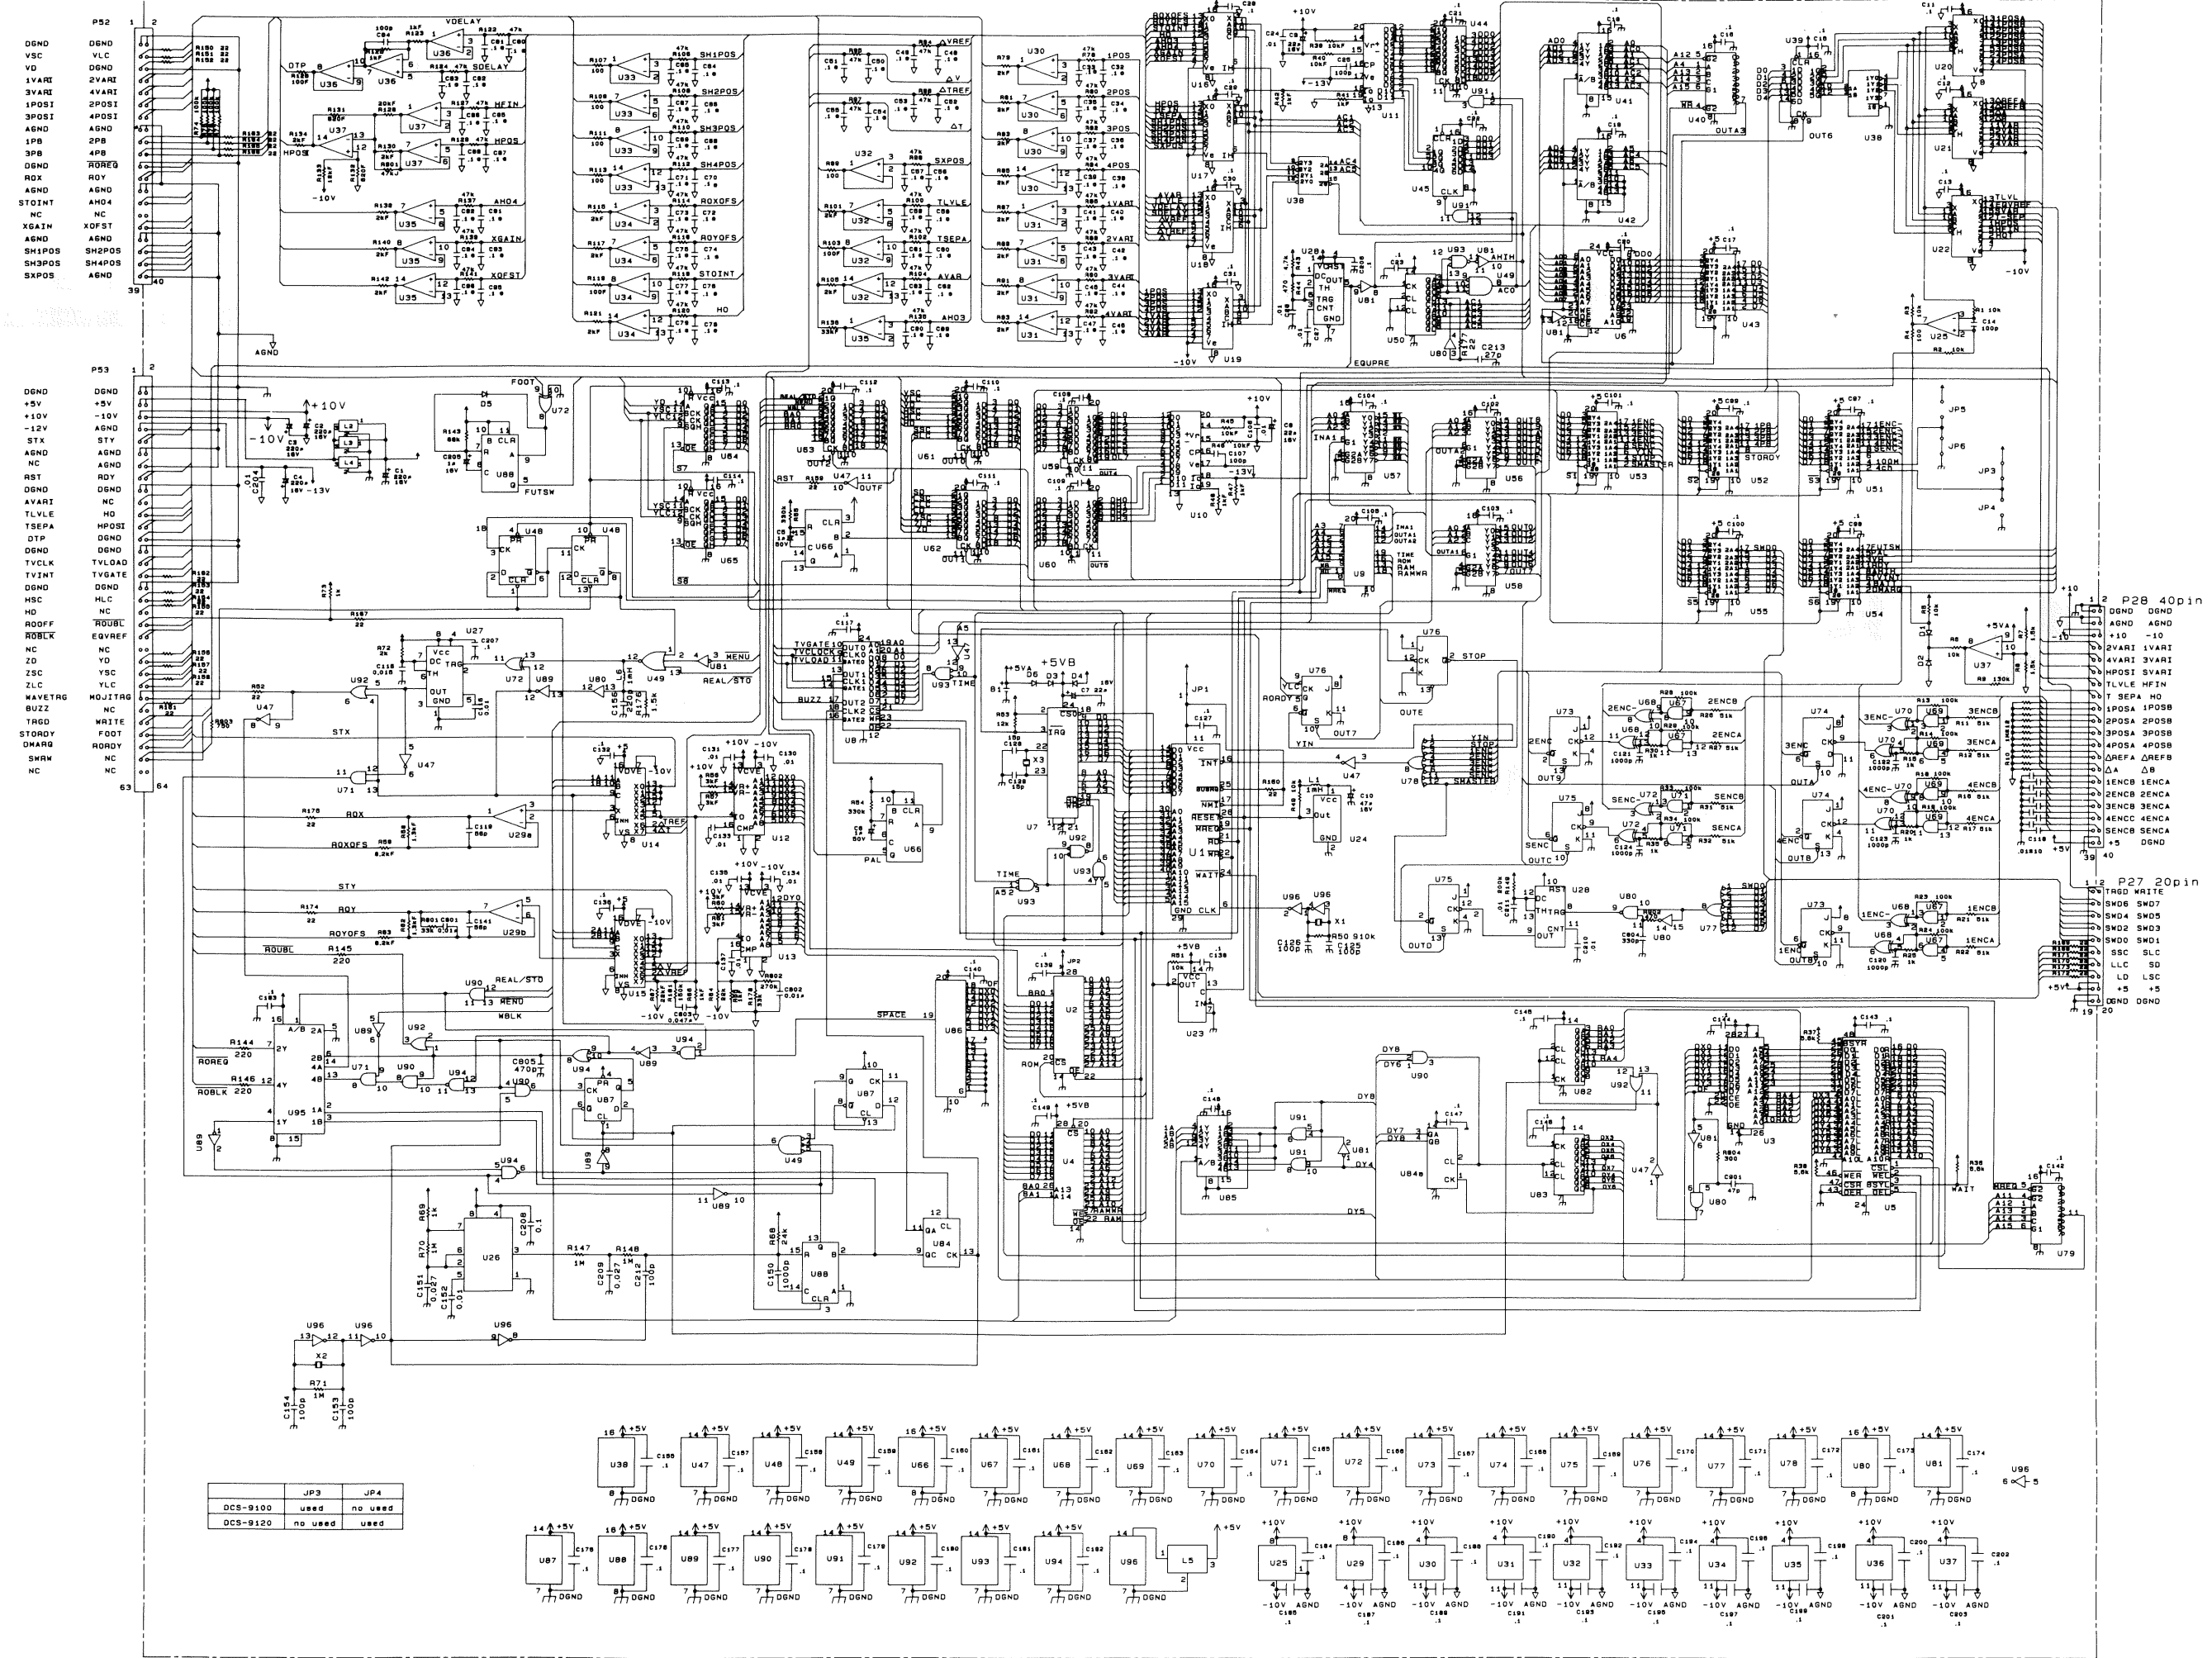

- U1 : LH0080F
- U2 : T93-0783-04
- U3 : T93-0784-04
- U4 : MB84256-10LL-SK
- U5 : MB8422-12LP-G
- U6 : LC35178S-15
- U7 : HD64610P
- U8 : UP08253C-2
- U9 : DTM-5010
- U10, 11 : HA17012PB
- U12, 13 : DAC0808LCN
- U14-22 : MC14051BCP
- U23 : MC14066BCP
- U24 : PST518B
- U25 : LM311N
- U26, 27 : HA17555PS
- U28 : NJM556D
- U29 : LM6218N
- U30-37 : NJM074D
- U38 : SN74ALS139N
- U39, 45 : SN74ALS174N
- U40, 56-58, 79 : SN74ALS138N
- U41, 42, 85, 95 : SN74ALS157N
- U43, 51-55 : SN74ALS244BN
- U44, 59-63 : SN74ALS374N
- U47, 81, 89 : SN74ALS04BN
- U49 : SN74LS27AN
- U50, 82-84 : SN74LS393N
- U64, 65 : SN74LS595N
- U66, 88 : SN74LS123N
- U67, 69, 71 : TC74HC08AP
- U68, 70, 72 : TC74HC06AP
- U73-76 : SN74LS1077AN
- U77, 78 : SN74ALS300AN
- U80 : SN74LS31N
- U86 : SN74ALS688N
- U87, 48 : SN74ALS744N
- U90, 91 : SN74ALS08N
- U92, 93 : SN74ALS32N
- U94 : SN74ALS00AN
- U96 : TC74HCU04AP

- D1-6 : 1S5132
- B1 : W09-0408-05

DCS-9100	JP3	JP4
DCS-9120	used	no used
	no used	used


# SCHEMATIC DIAGRAM

U1 : LH00808F  
U2 : T93-0783-04  
U3 : T93-0784-04  
U4 : M884256-10LL-SK  
U5 : M88422-12LP-G  
U6 : LC35178S-15  
U7 : HD64610P  
U8 : UPD8253C-2  
U9 : DTM-5010  
U10, 11 : HA17012PB  
U12, 13 : DAC0808LCN  
U14-22 : MC140518CP  
U23 : MC140668CP  
U24 : PST5188  
U25 : LM311N  
U26, 27 : HA17555PS  
U28 : NJM556D  
U29 : LM6218N  
U30-37 : NJM074D  
U38 : SN74ALS139N  
U39, 45 : SN74ALS174N  
U40, 56-58, 79 : SN74ALS138N  
U41, 42, 85, 95 : SN74ALS157N  
U43, 51-55 : SN74ALS244BN  
U44, 59-63 : SN74ALS374N  
U47, 81, 89 : SN74ALS04BN  
U49 : SN74LS27AN  
U50, 82-84 : SN74LS393N  
U64, 65 : SN74LS595N  
U66, 88 : SN74LS123N  
U67, 69, 71 : TC74HC08AP  
U68, 70, 72 : TC74HC86AP  
U73-76 : SN74LS107AN  
U77, 78 : SN74ALS30AN  
U80 : SN74LS31N  
U86 : SN74ALS688N  
U87, 48 : SN74ALS74AN  
U90, 91 : SN74ALS08N  
U92, 93 : SN74ALS32N  
U94 : SN74ALS00AN  
U96 : TC74HCU04AP

D1-6 : 1SS132

B1 : W09-0408-05


SCHEMATIC DIAGRAM

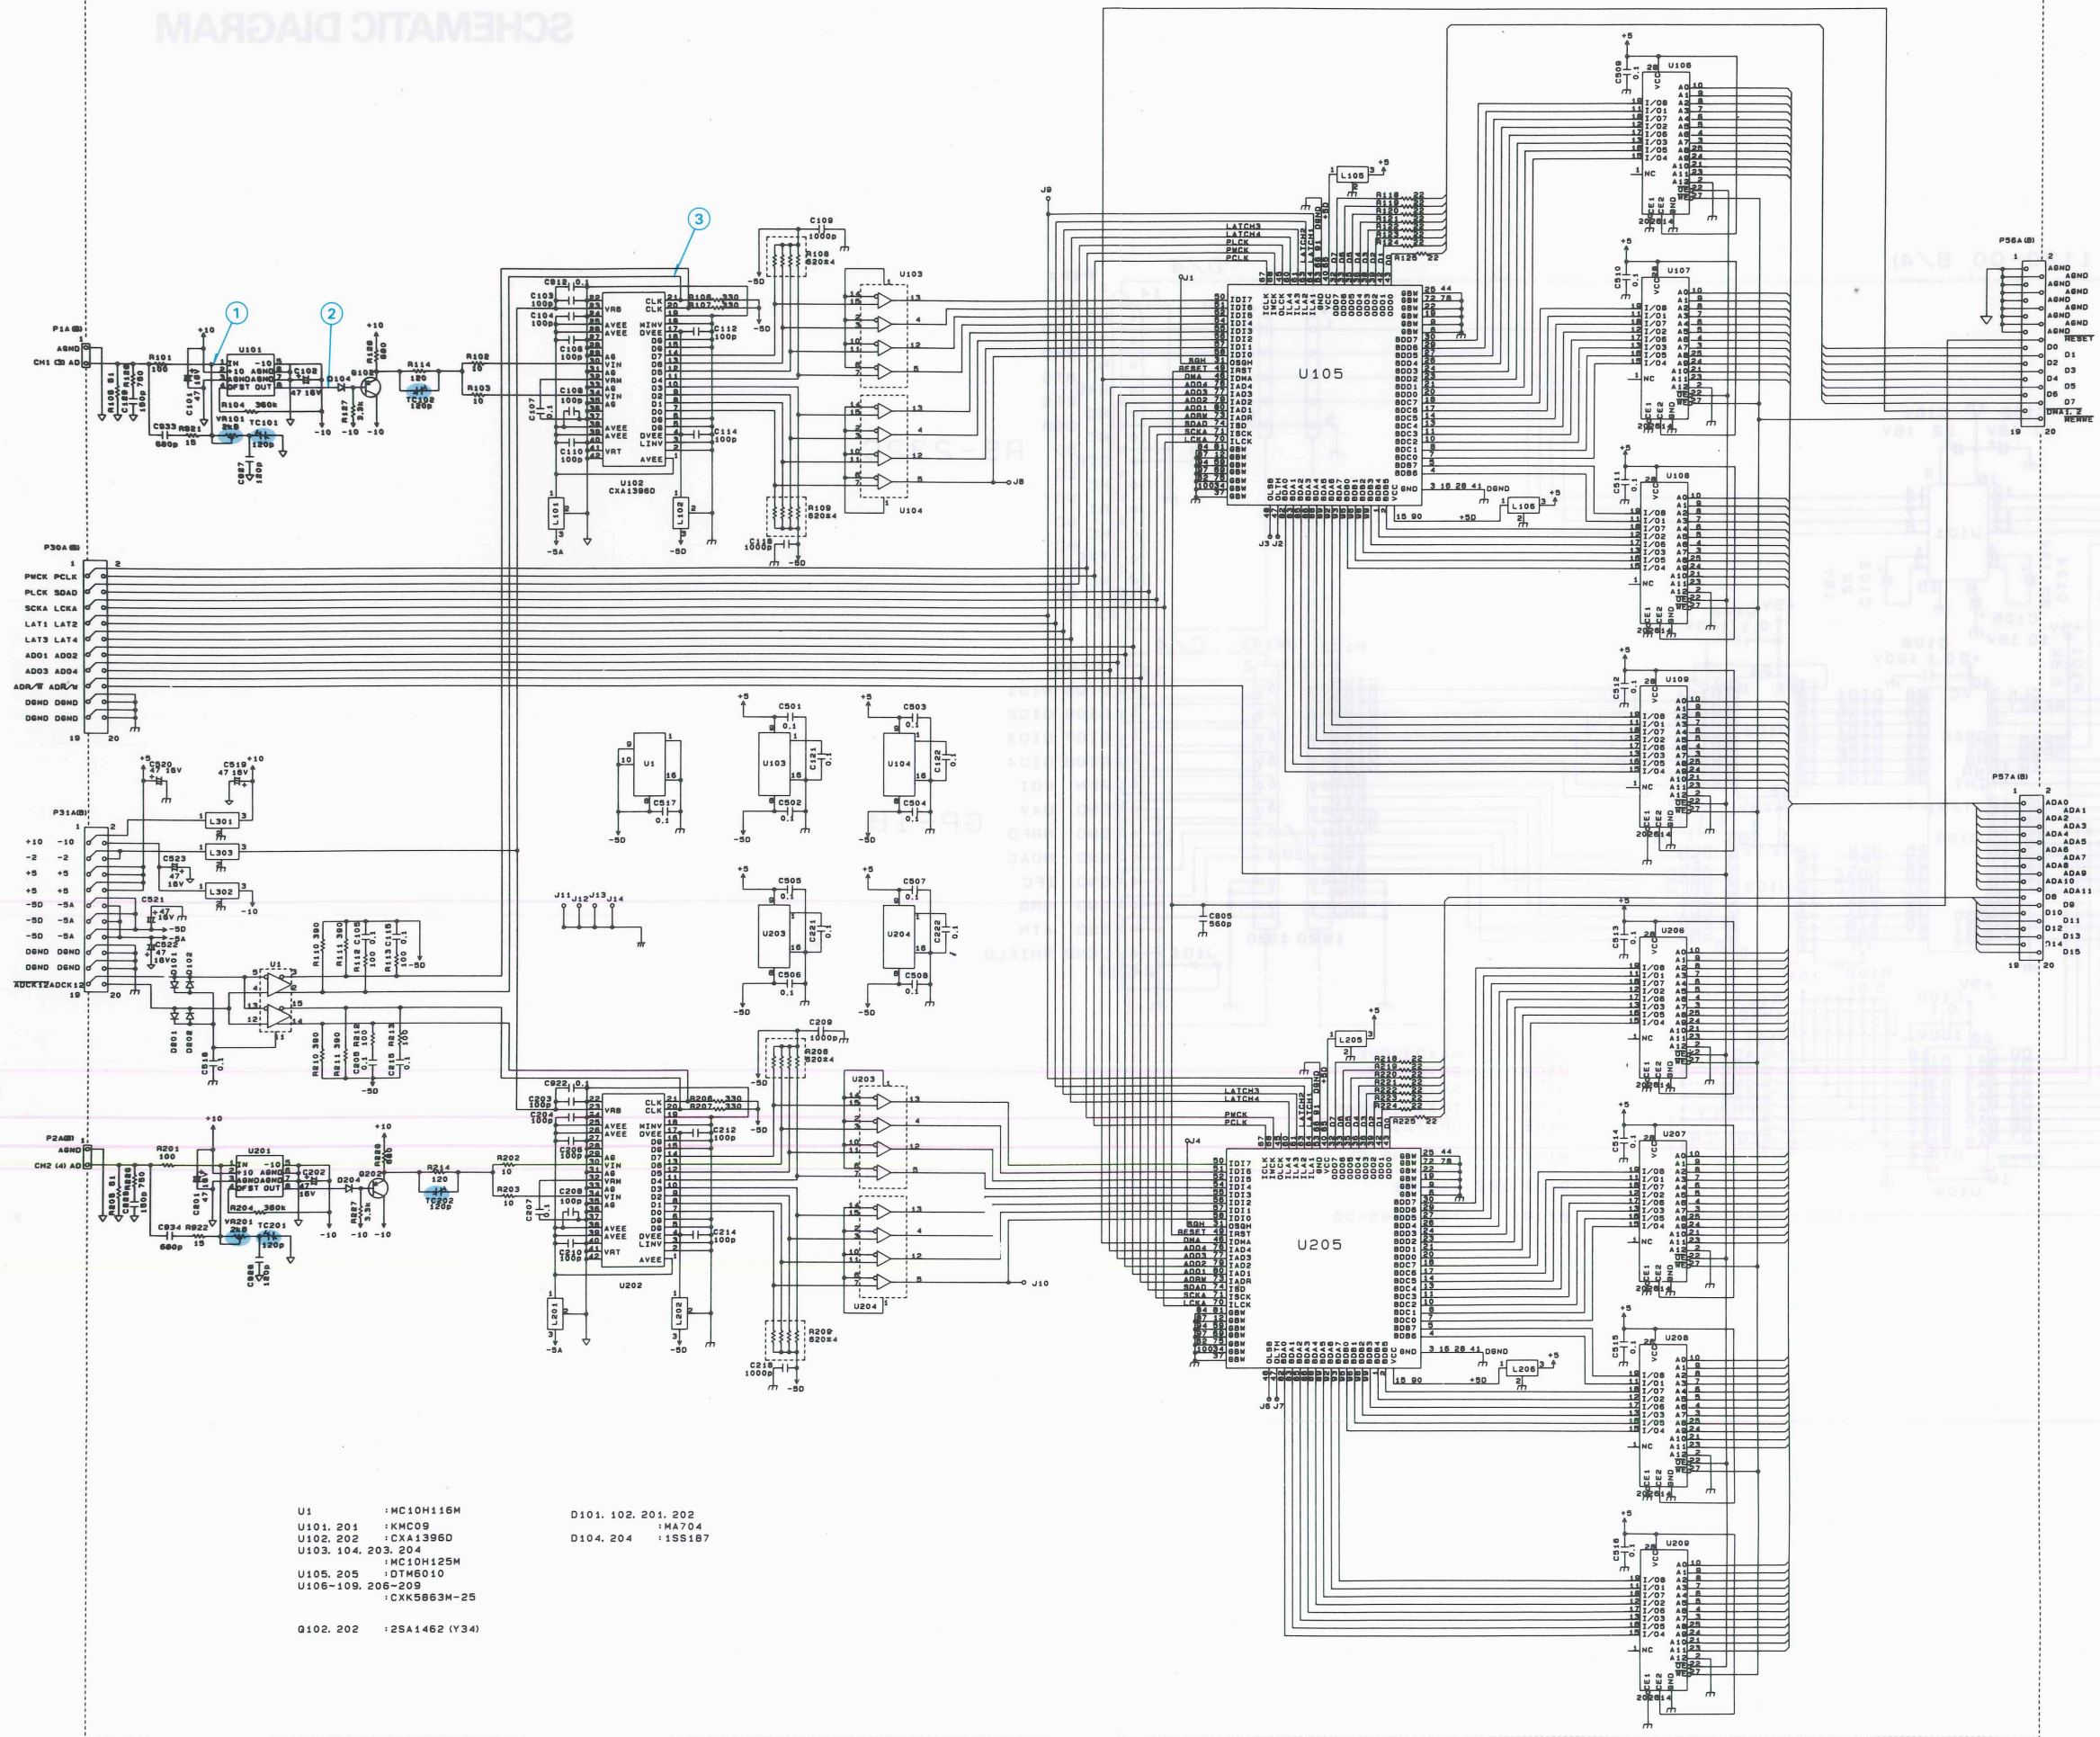

- |                     |                |                     |        |
|---------------------|----------------|---------------------|--------|
| U1                  | :MC10H116M     | D101, 102, 201, 202 |        |
| U101, 201           | :KMC09         | D104, 204           | :HA704 |
| U102, 202           | :CX1396D       |                     |        |
| U103, 104, 203, 204 |                |                     |        |
|                     | :MC10H125M     |                     |        |
| U105, 205           | :DTMSD10       |                     |        |
| U106-109, 206-209   | :CXK5863M-25   |                     |        |
|                     |                |                     |        |
| Q102, 202           | :2SA1462 (Y34) |                     |        |


# SCHEMATIC DIAGRAM

## AD UNIT

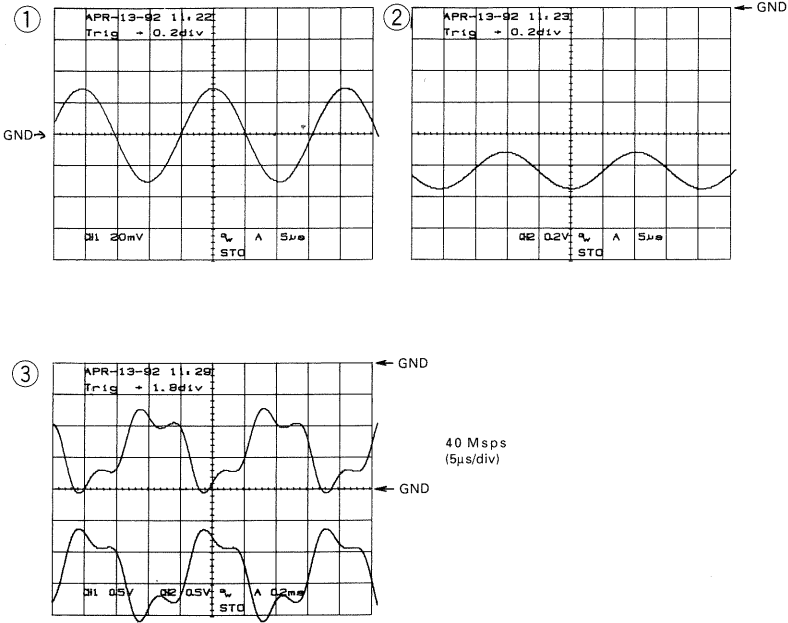




GP-IB UNIT (X79-1120-00 A/4)

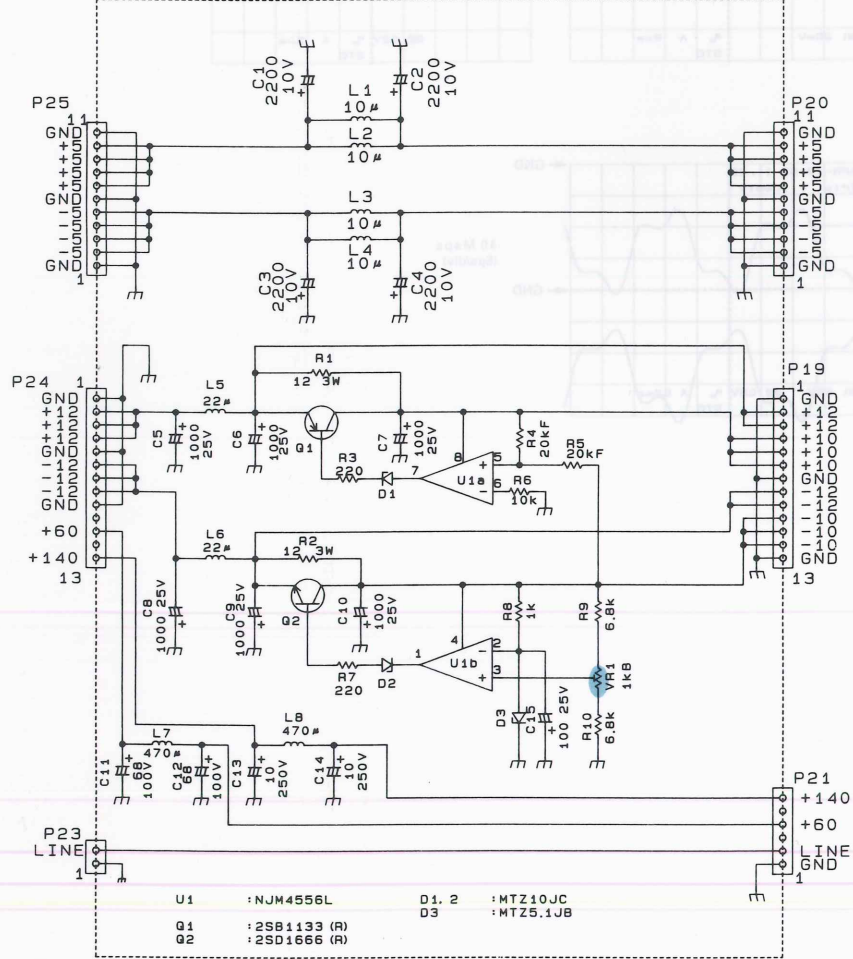

GP-IB UNIT (X79-1120-00 B/4)

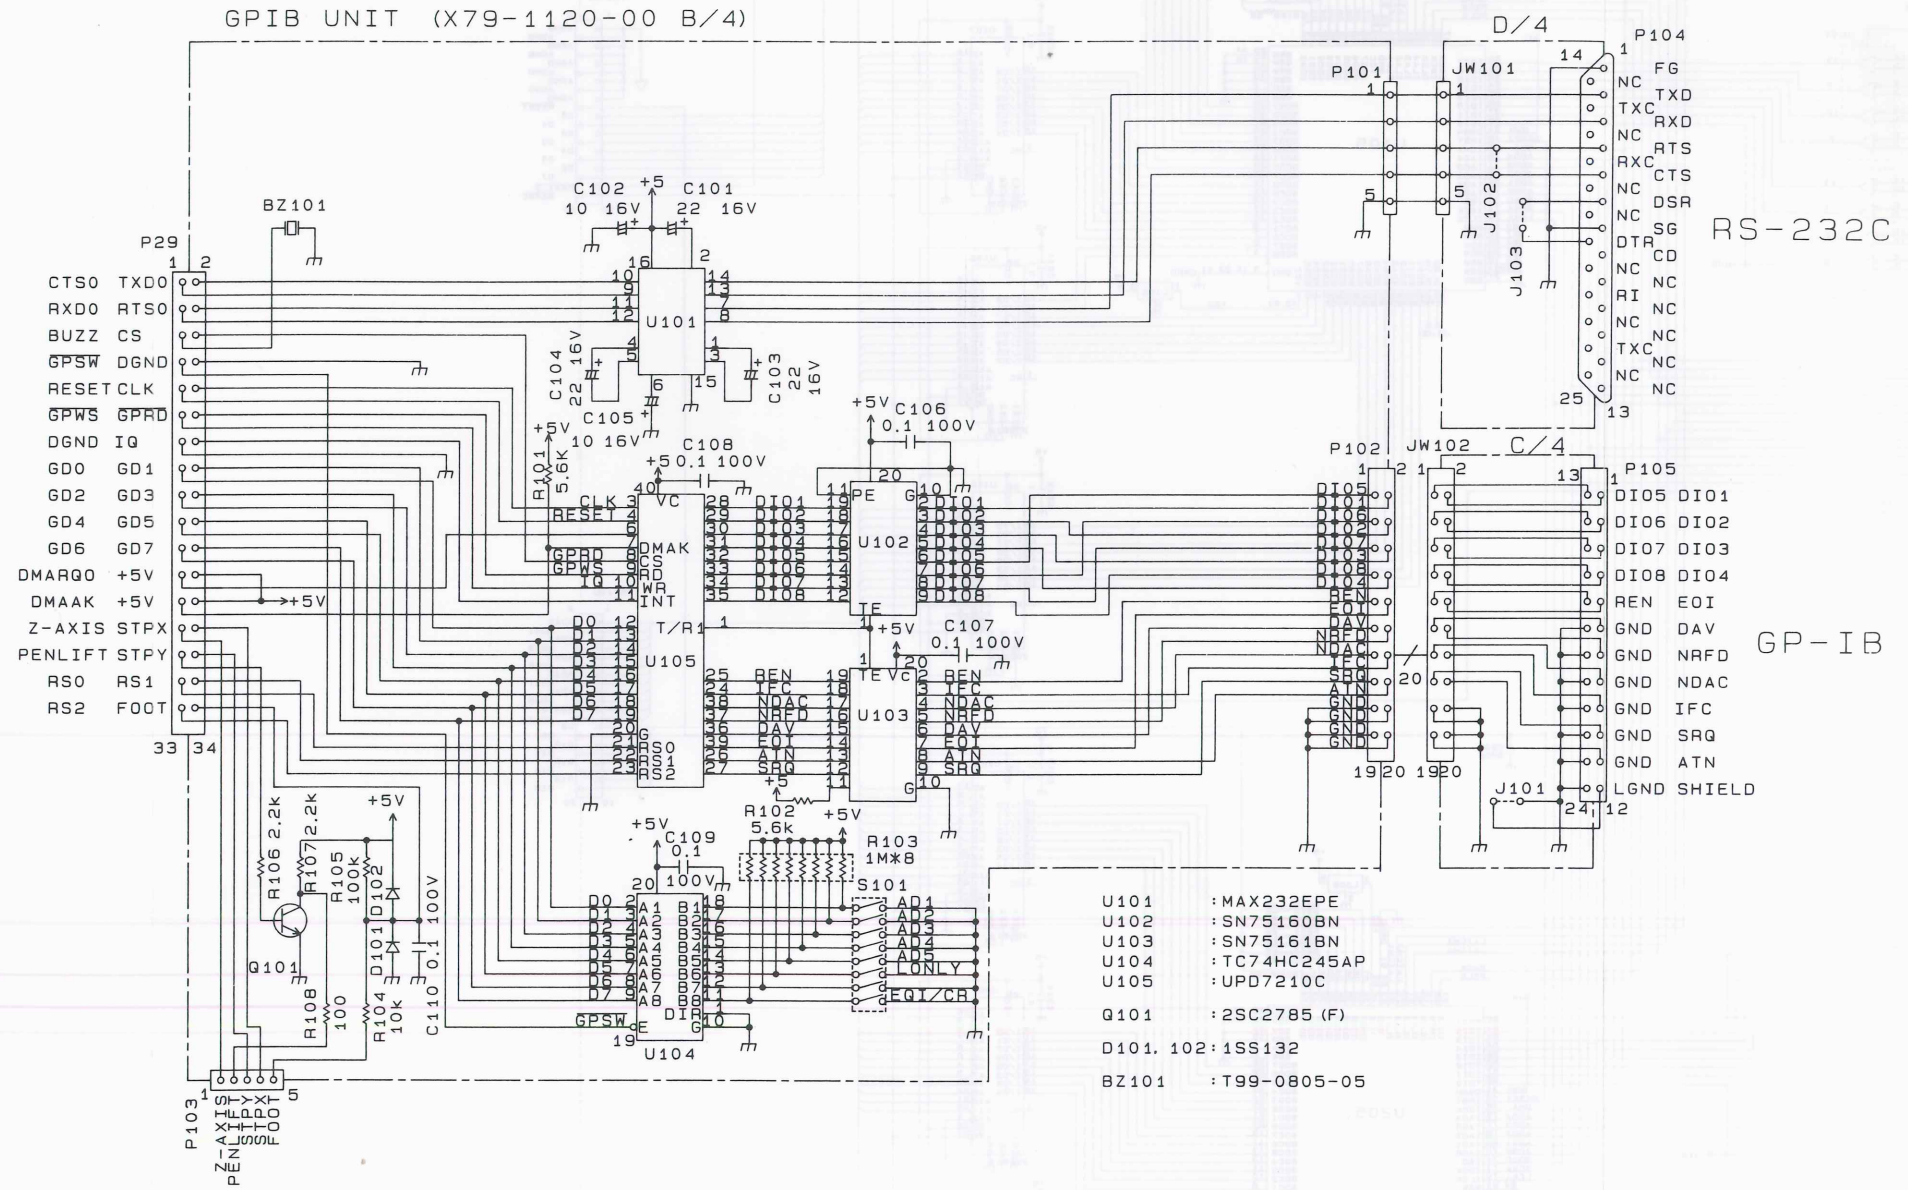


RS-232C


GP-IB



# SCHEMATIC DIAGRAM

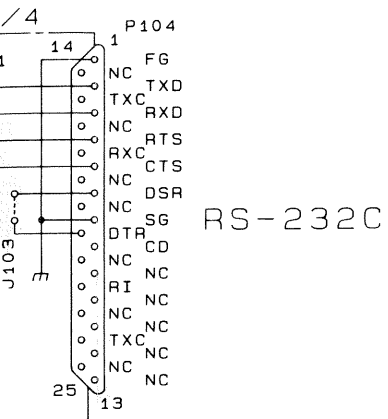


RS-232C

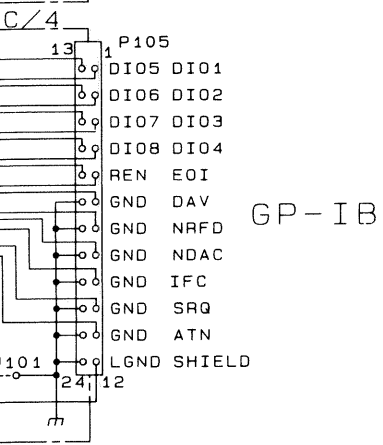


GP-IB

# SCHEMATIC DIAGRAM

FINAL UNIT (X80-1140-00)

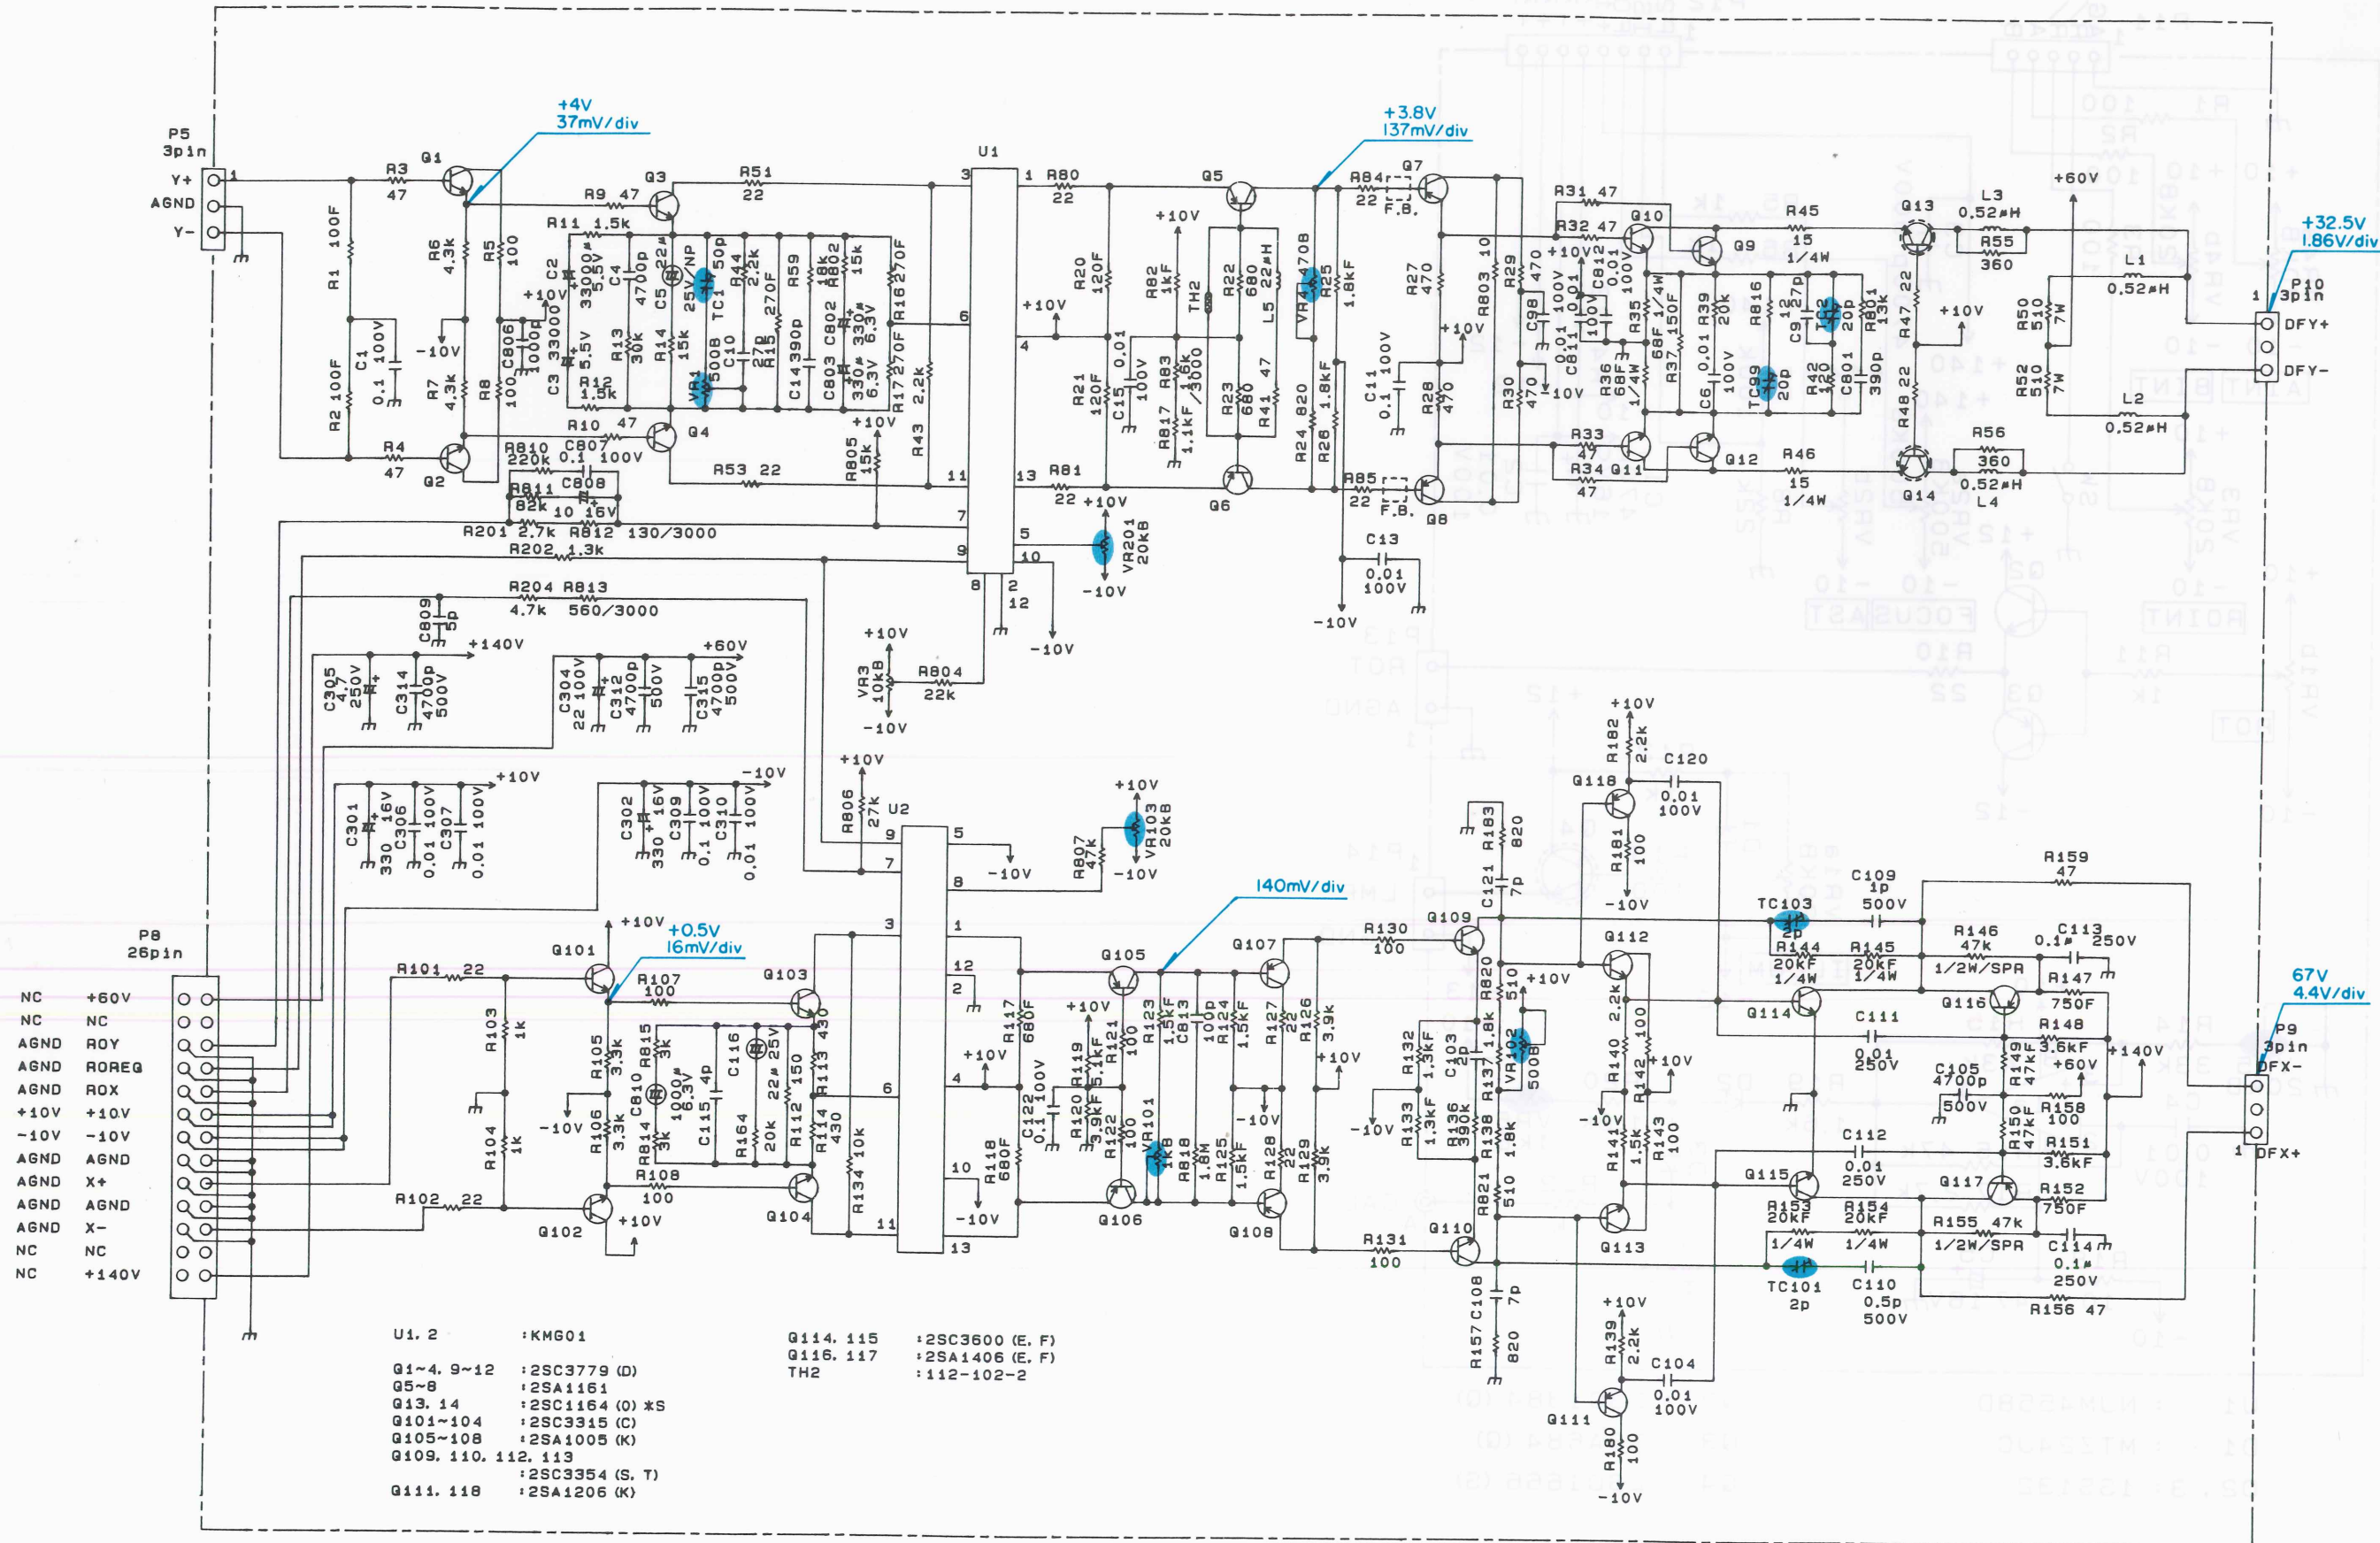



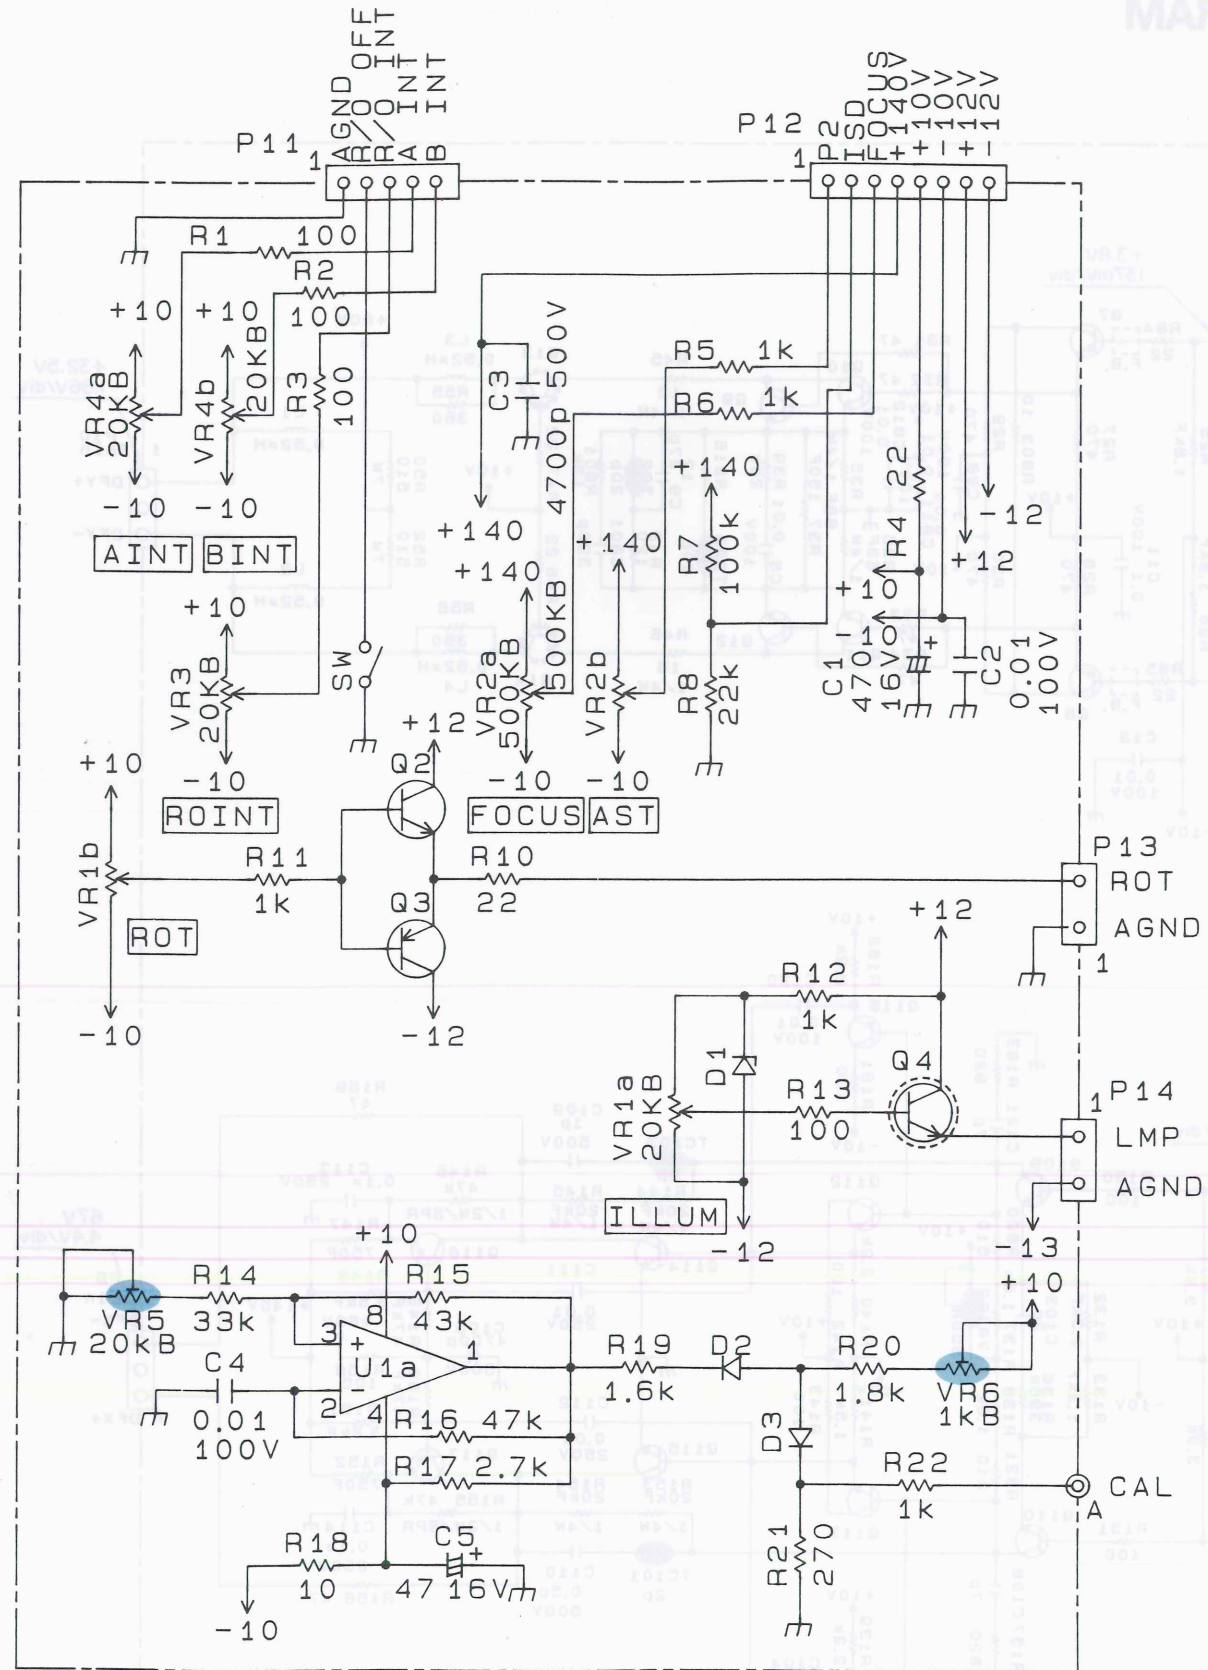


- |                |                  |
|----------------|------------------|
| U1 : NJM4558D  | Q2 : 2SC1384 (Q) |
| D1 : MTZ24JC   | Q3 : 2SA684 (Q)  |
| D2, 3 : 1SS132 | Q4 : 2SD1666 (S) |

FINAL UNIT (X80-1140-00)

# SCHEMATIC DIAGRAM


ENCODER UNIT (X81-3040-00)

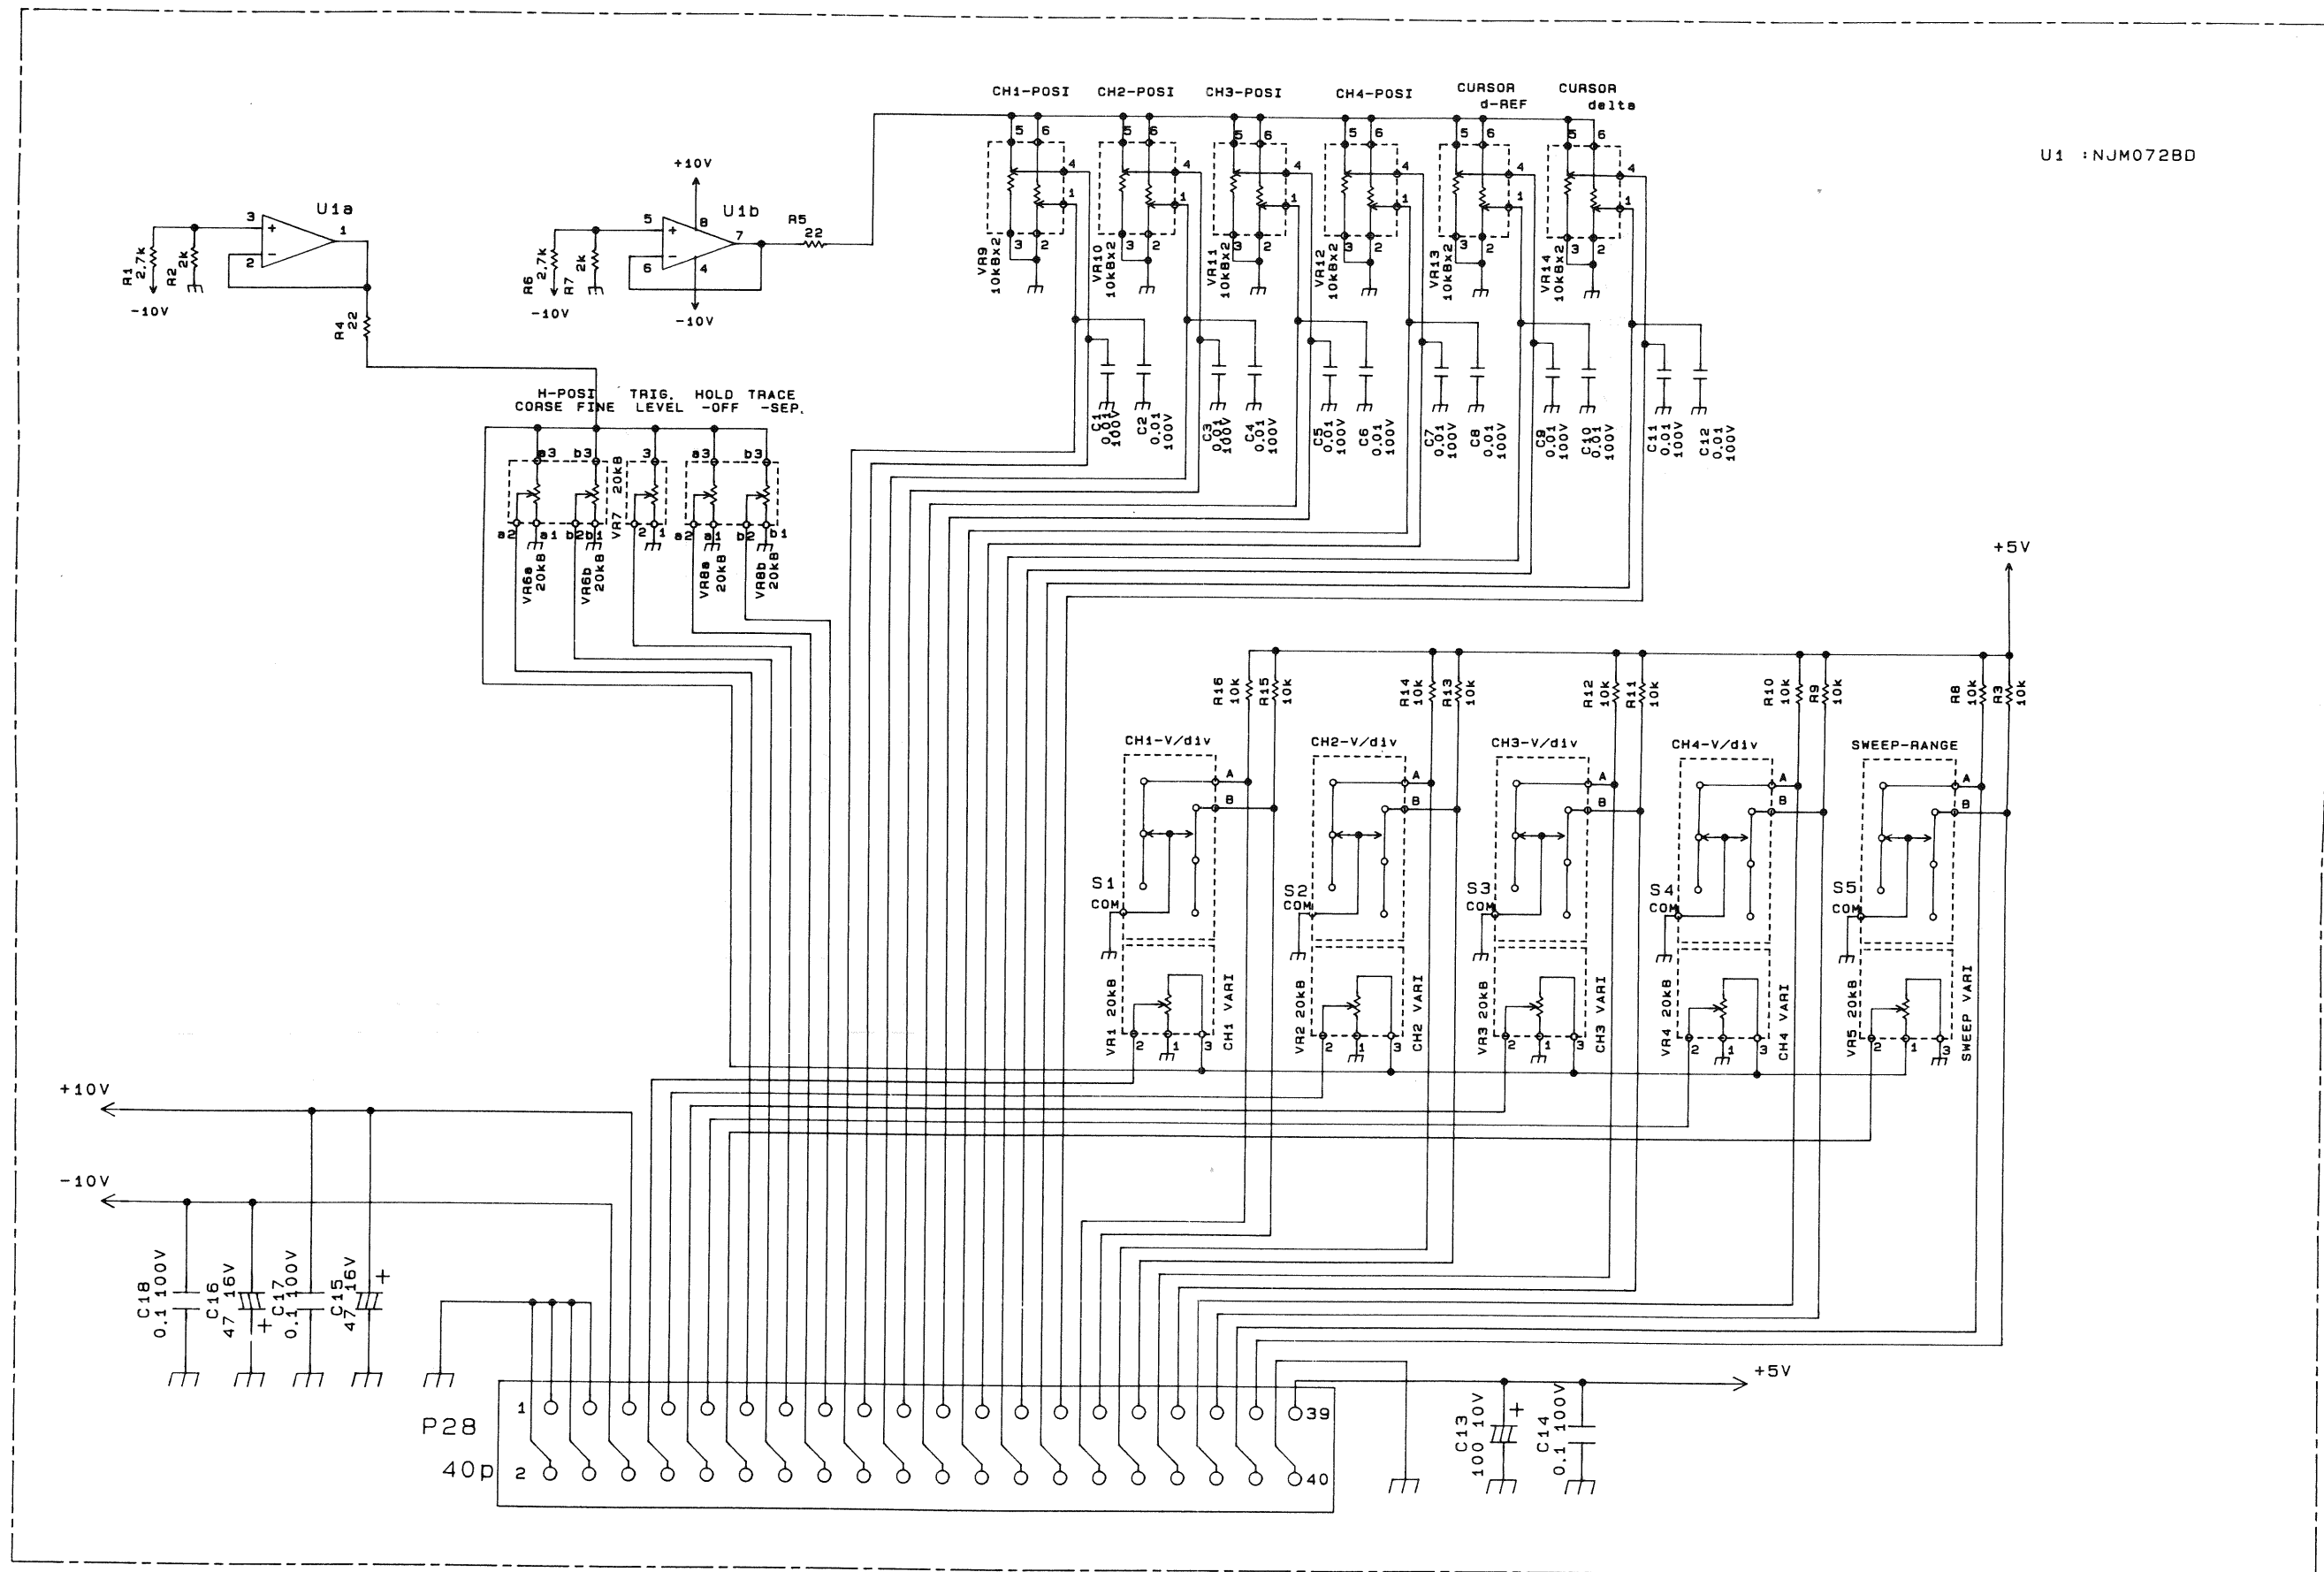




# SCHEMATIC DIAGRAM

PANEL UNIT (W02-2110-08)

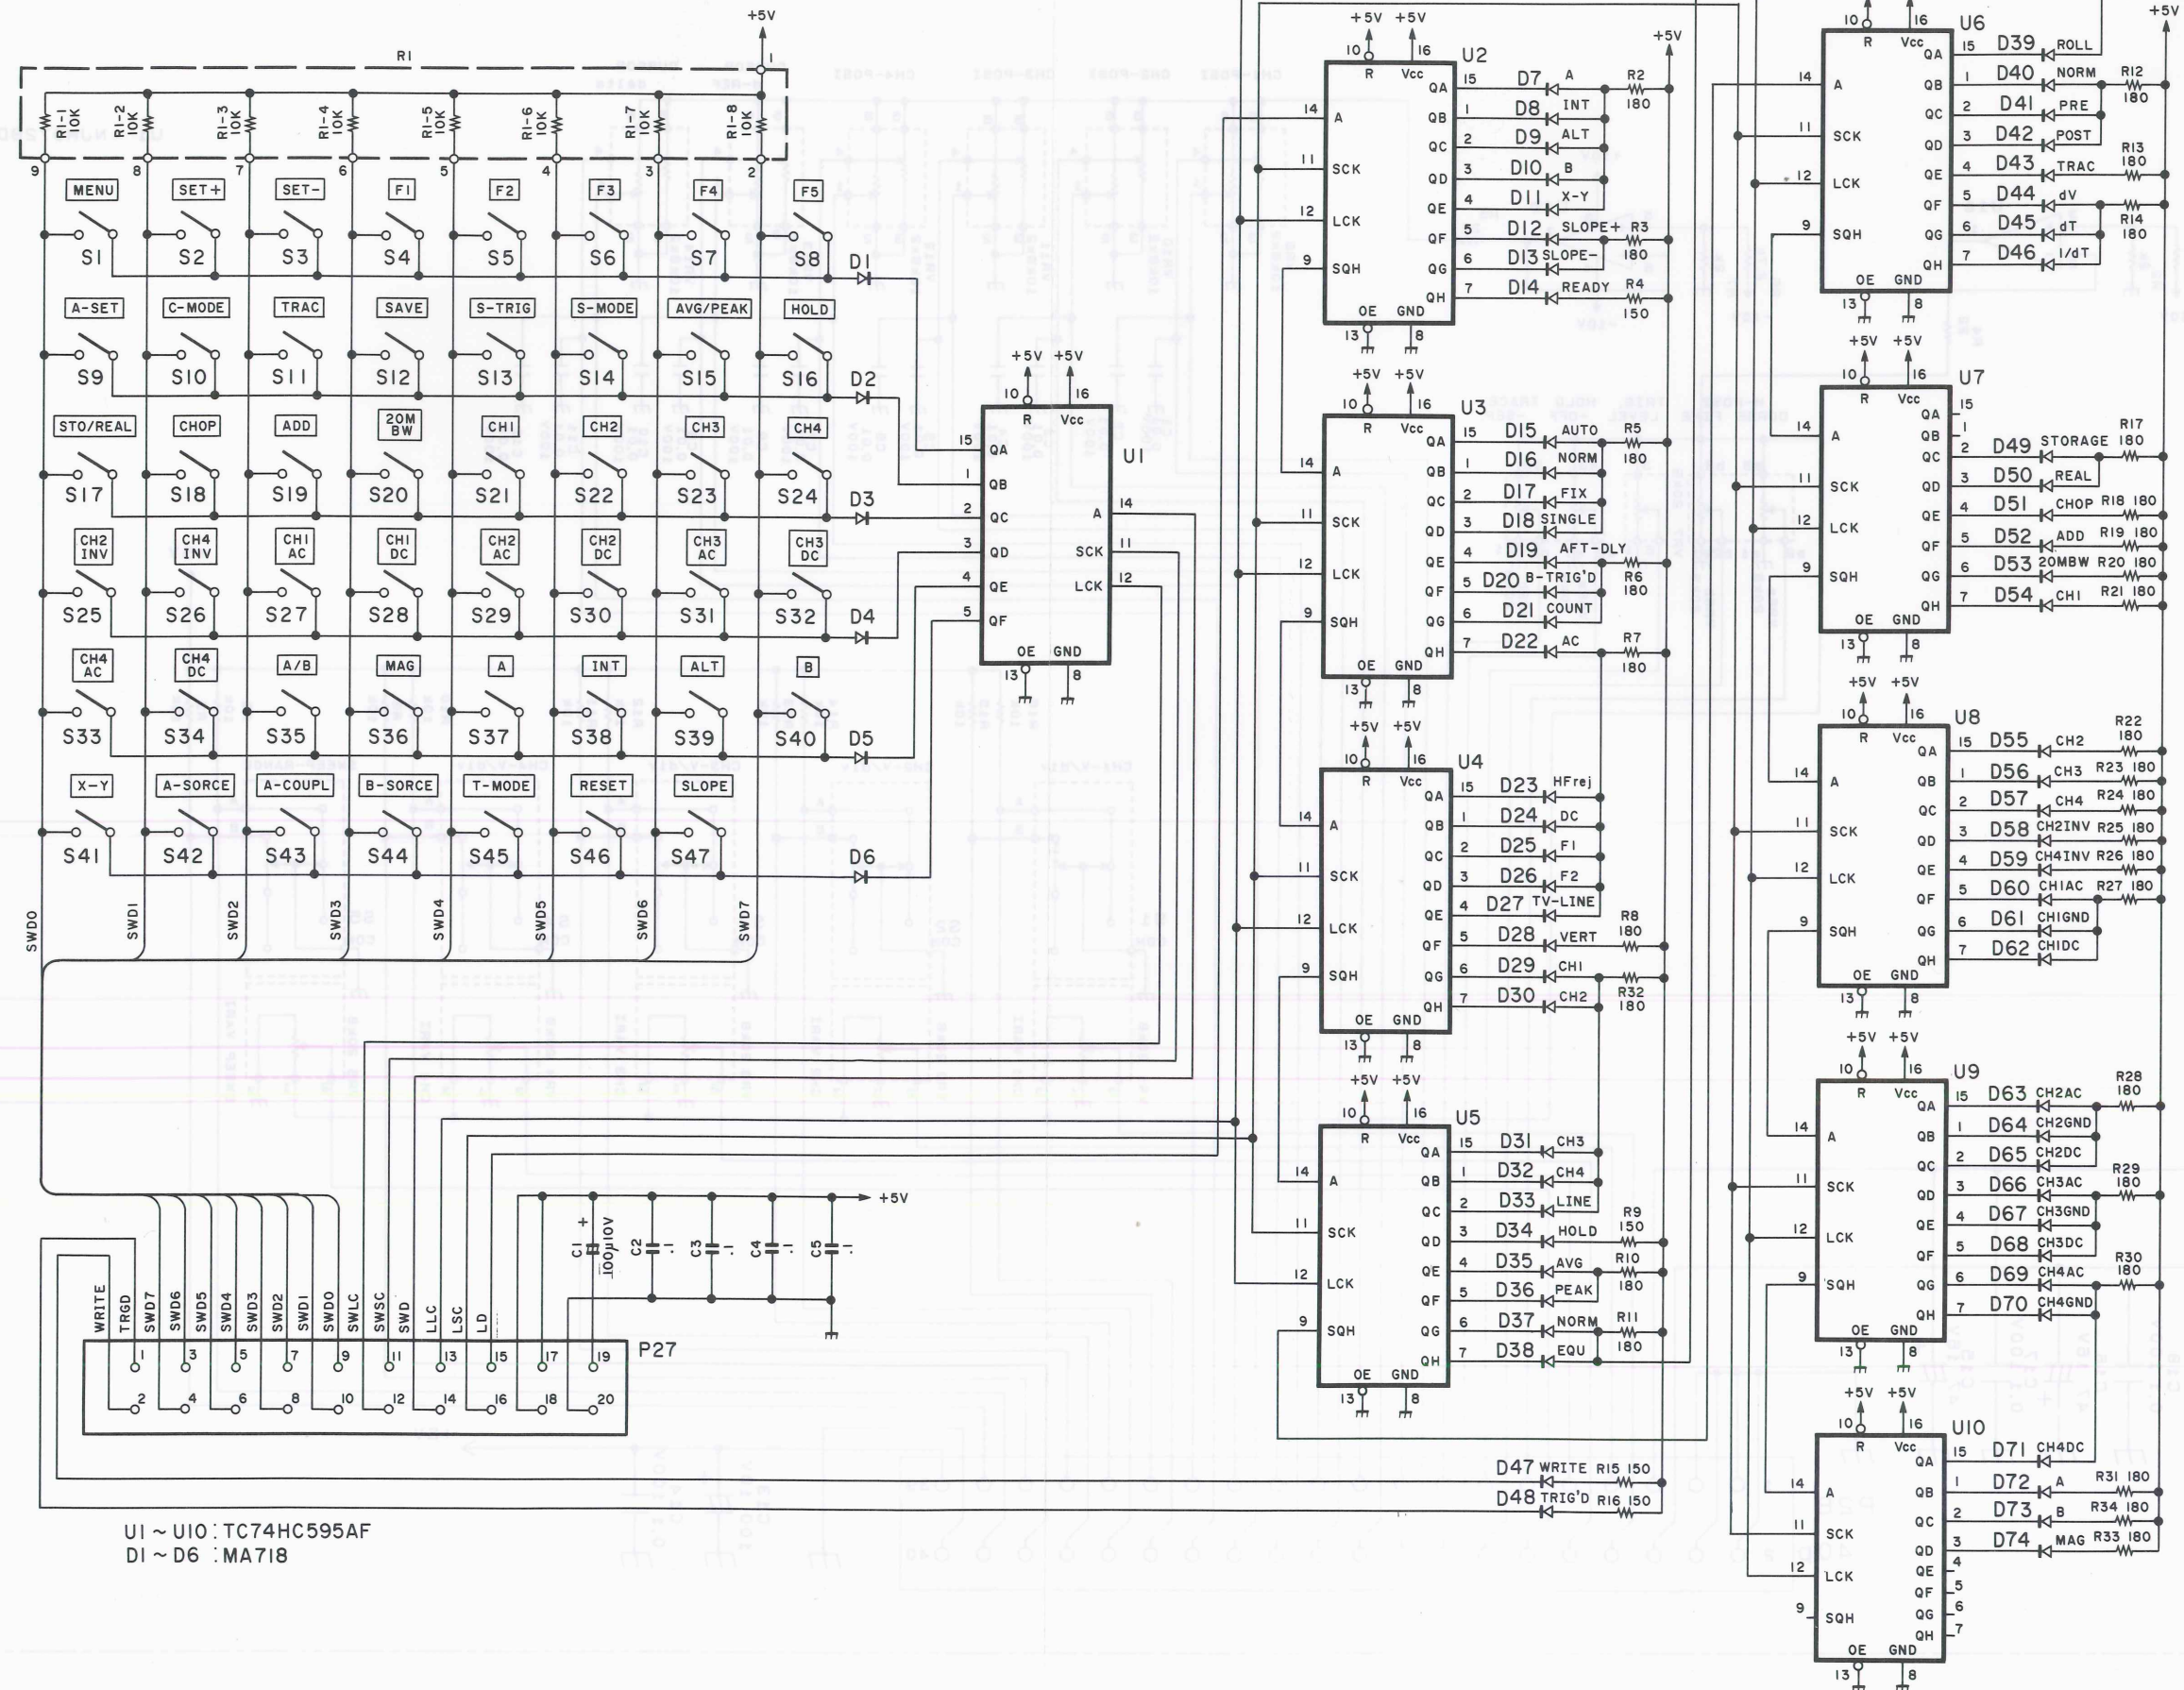

# SCHEMATIC DIAGRAM


## SWITCHING POWER SUPPLY UNIT (W02-2178-08)

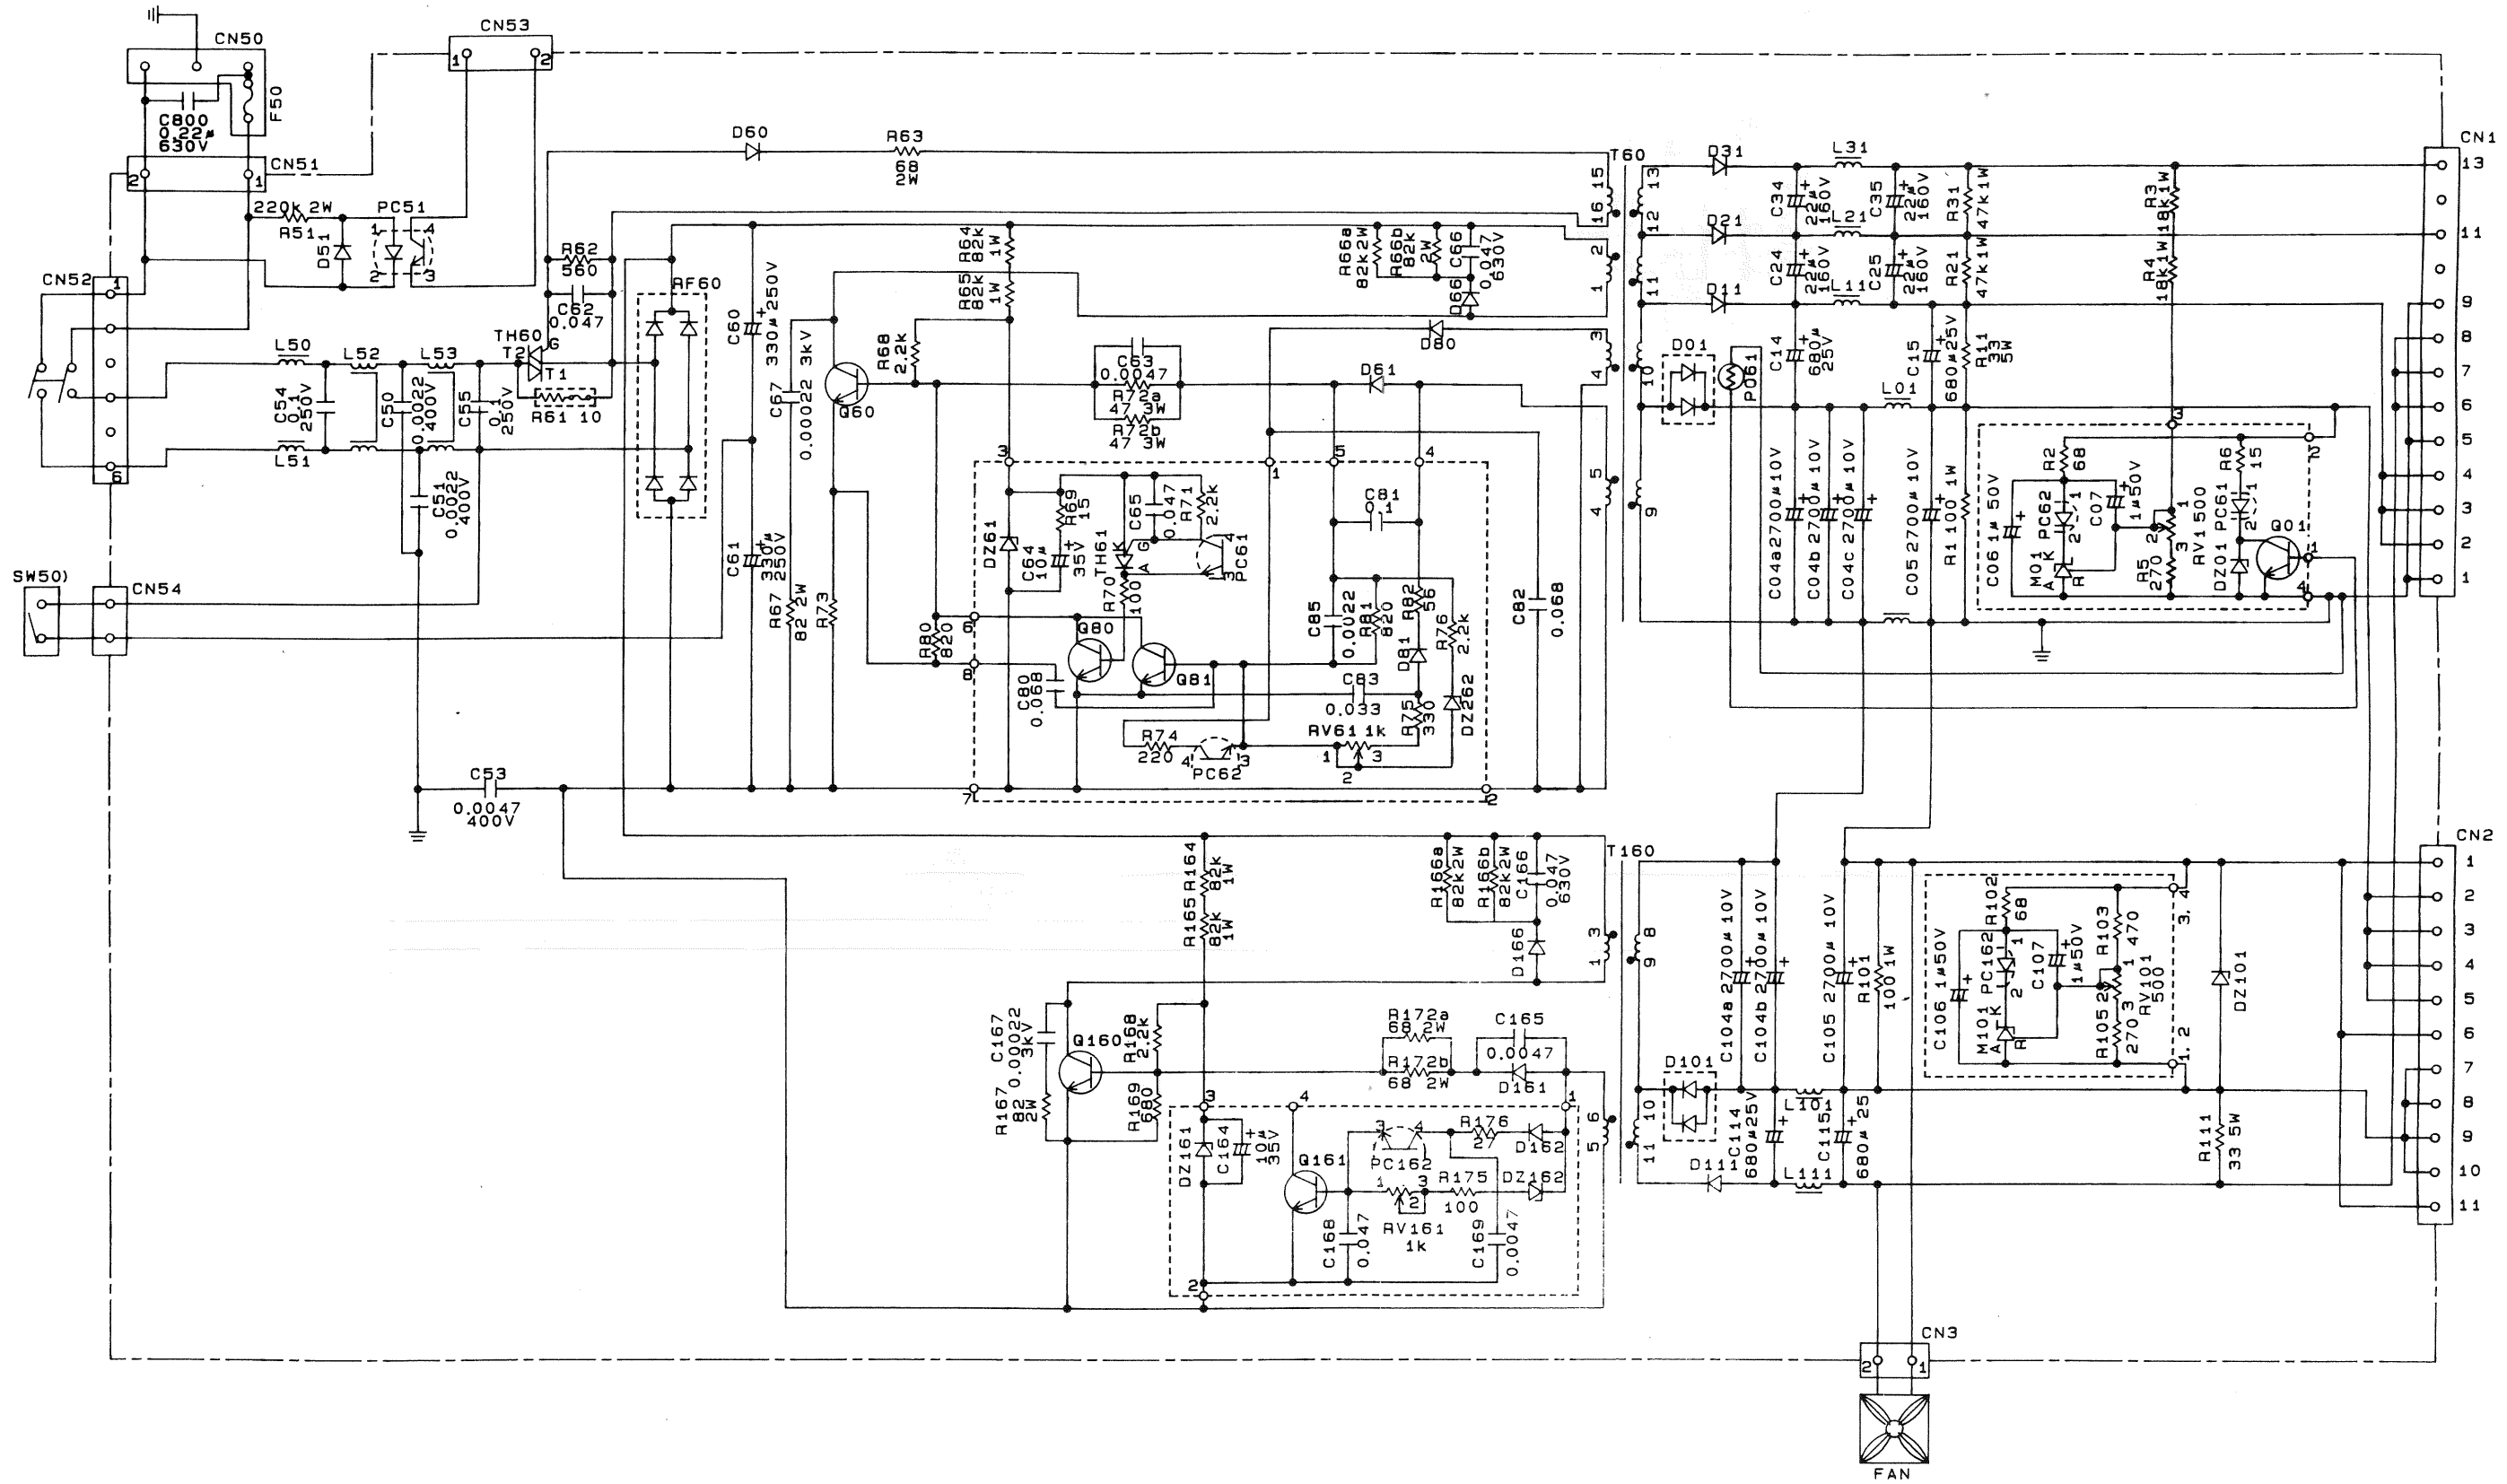




# P.C. BOARD

HIGH VOLTAGE UNIT (X68-1590-00)

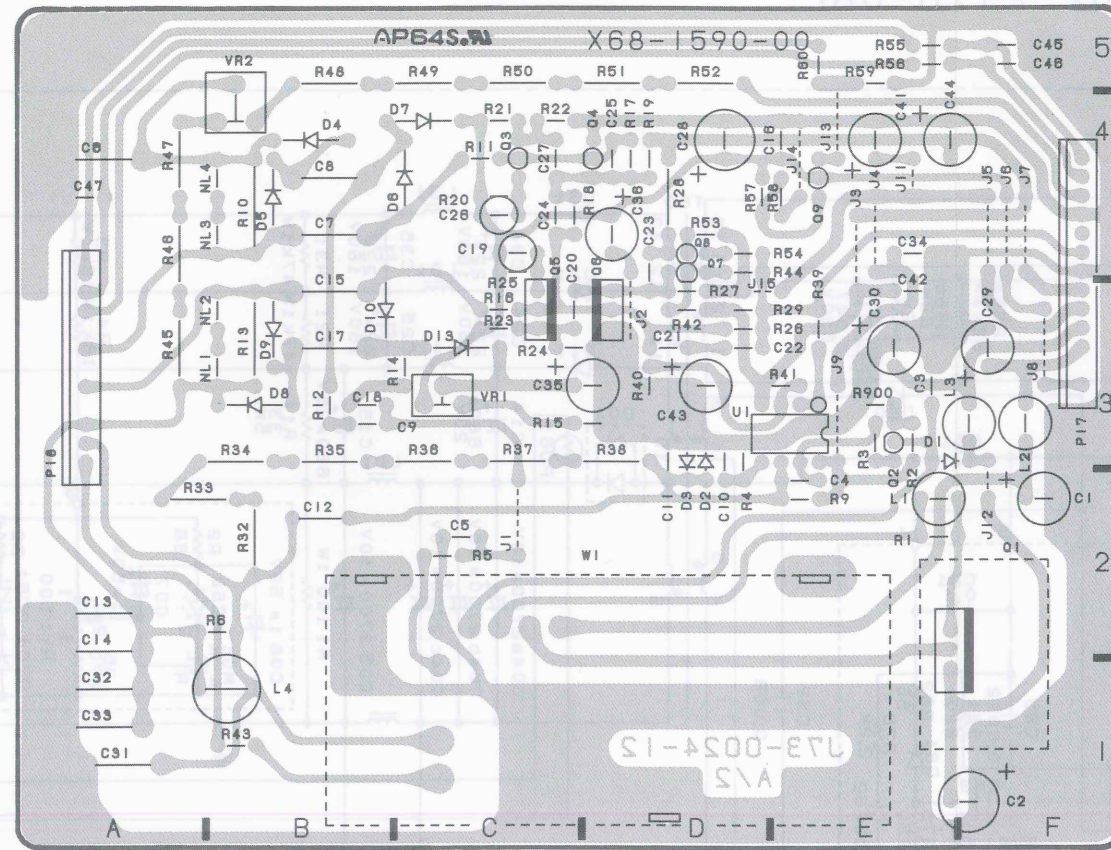

A CONNECTION UNIT (X69-1210-00)

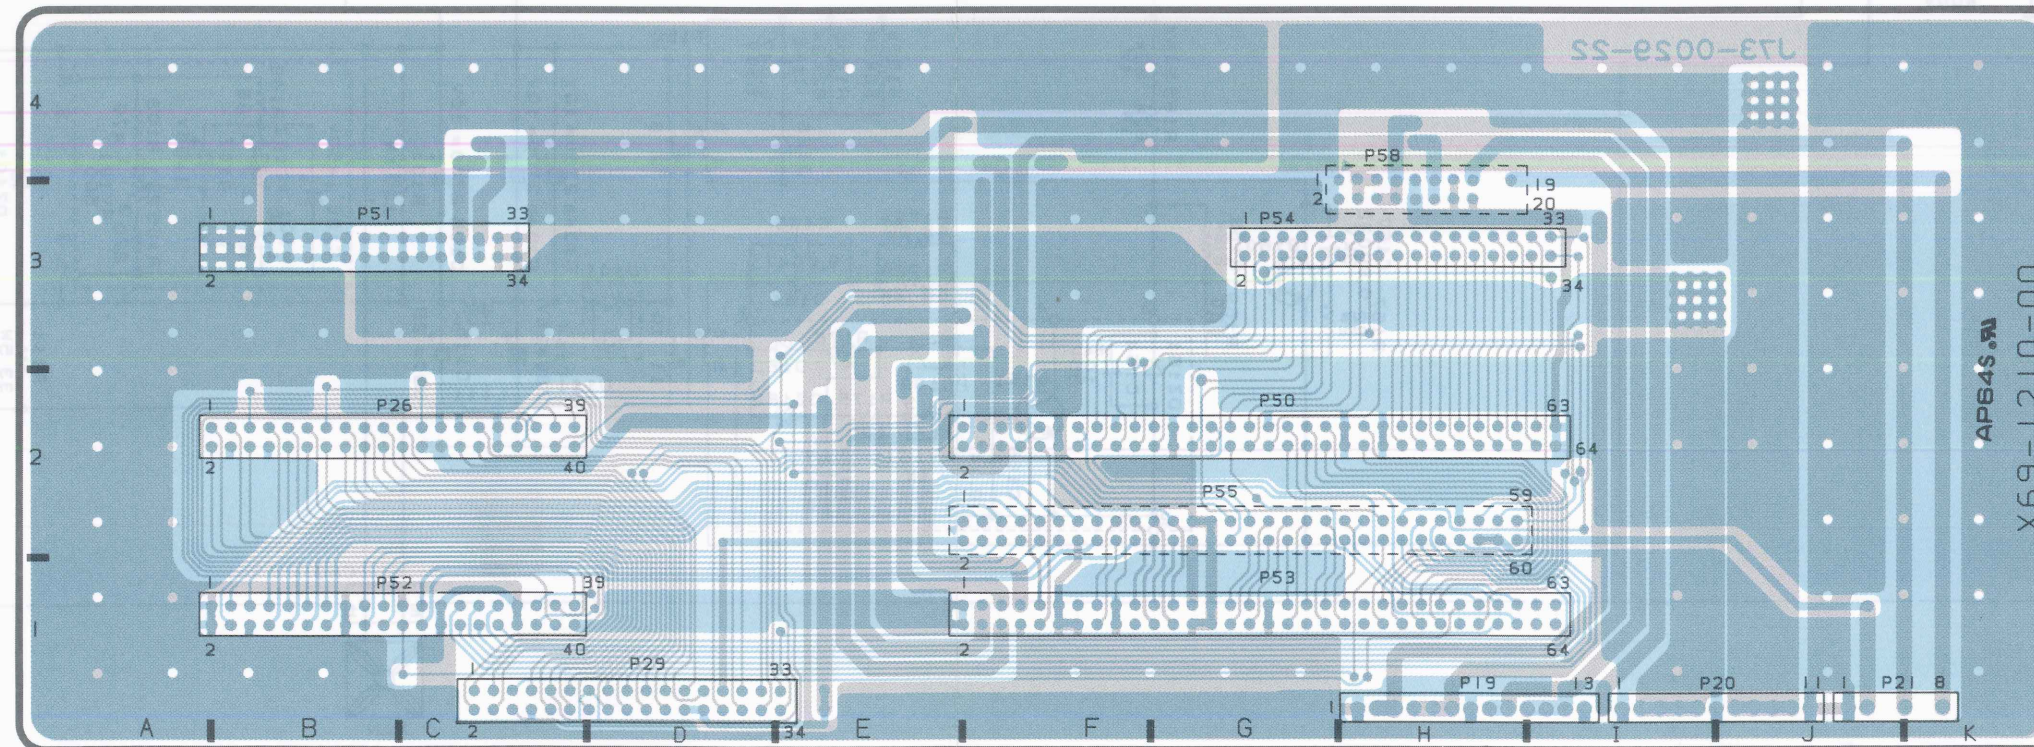




# P.C. BOARD

TIME BASE UNIT (X71-1120-00)

## B CONNECTION UNIT (X69-1230-00)

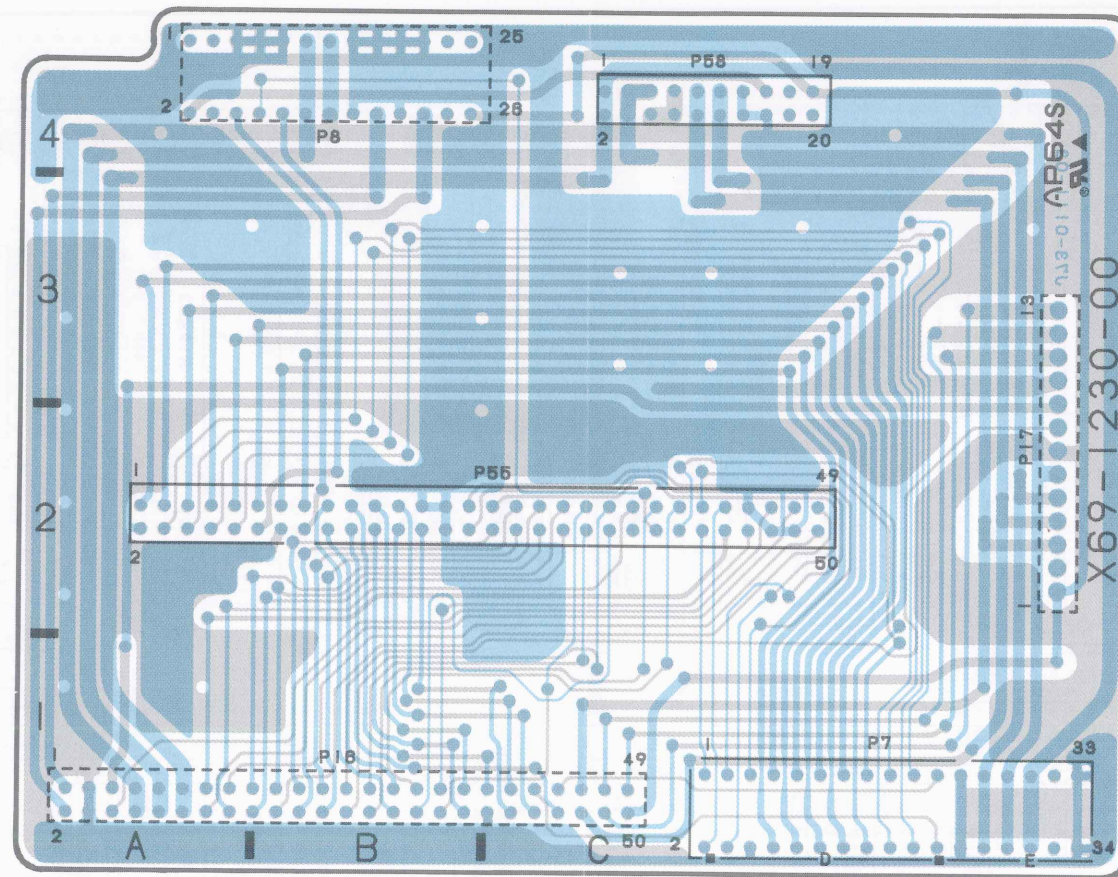




# P.C. BOARD

TIME BASE UNIT (X71-1150-00)

9 CONNECTION UNIT (X89-1530-00)

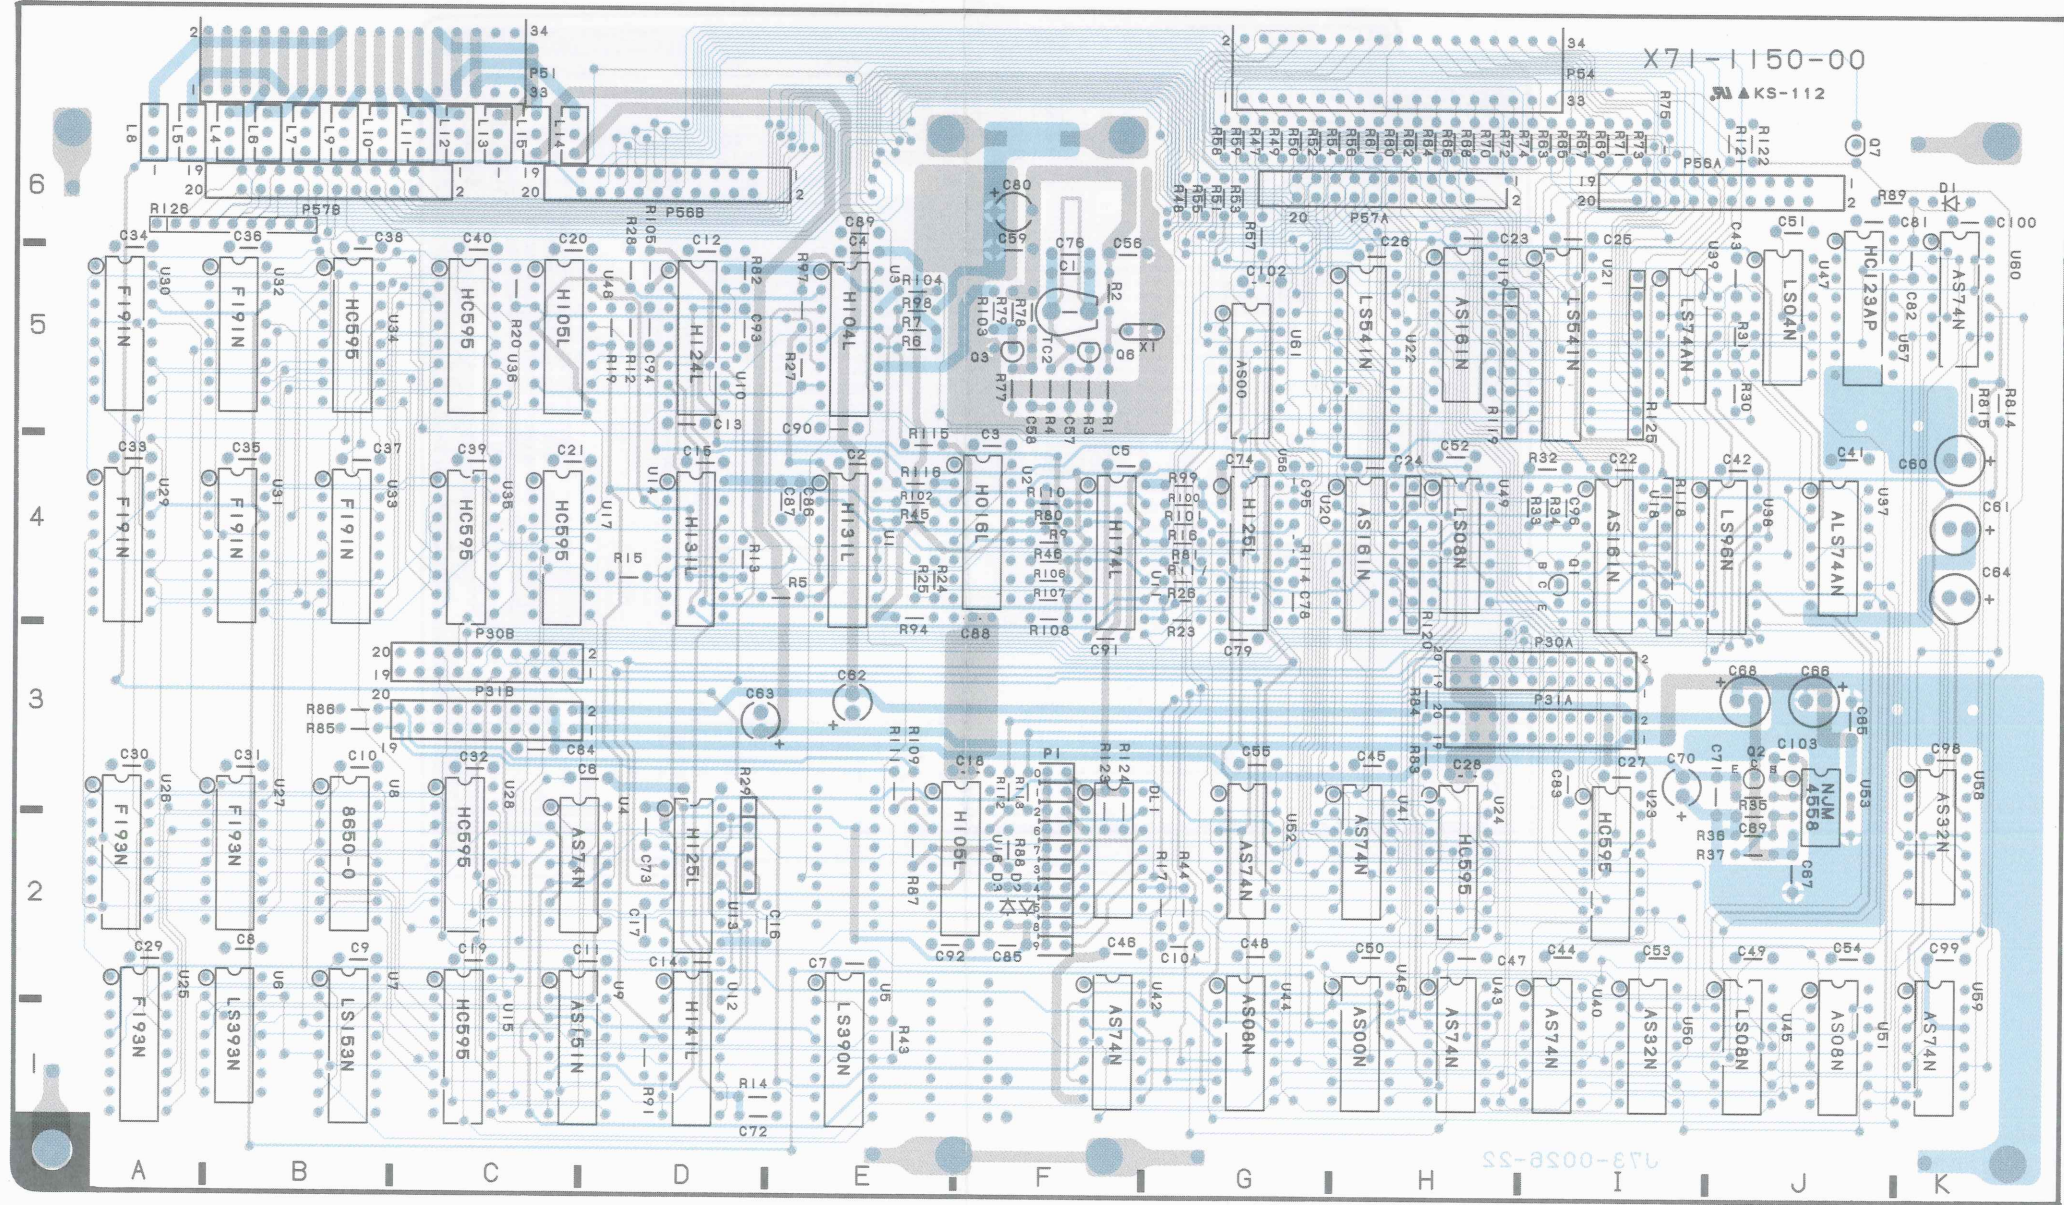




# P.C. BOARD

VERTICAL UNIT (X73-1900-00)

100-020-1 (X73) UNIT JATN03190H

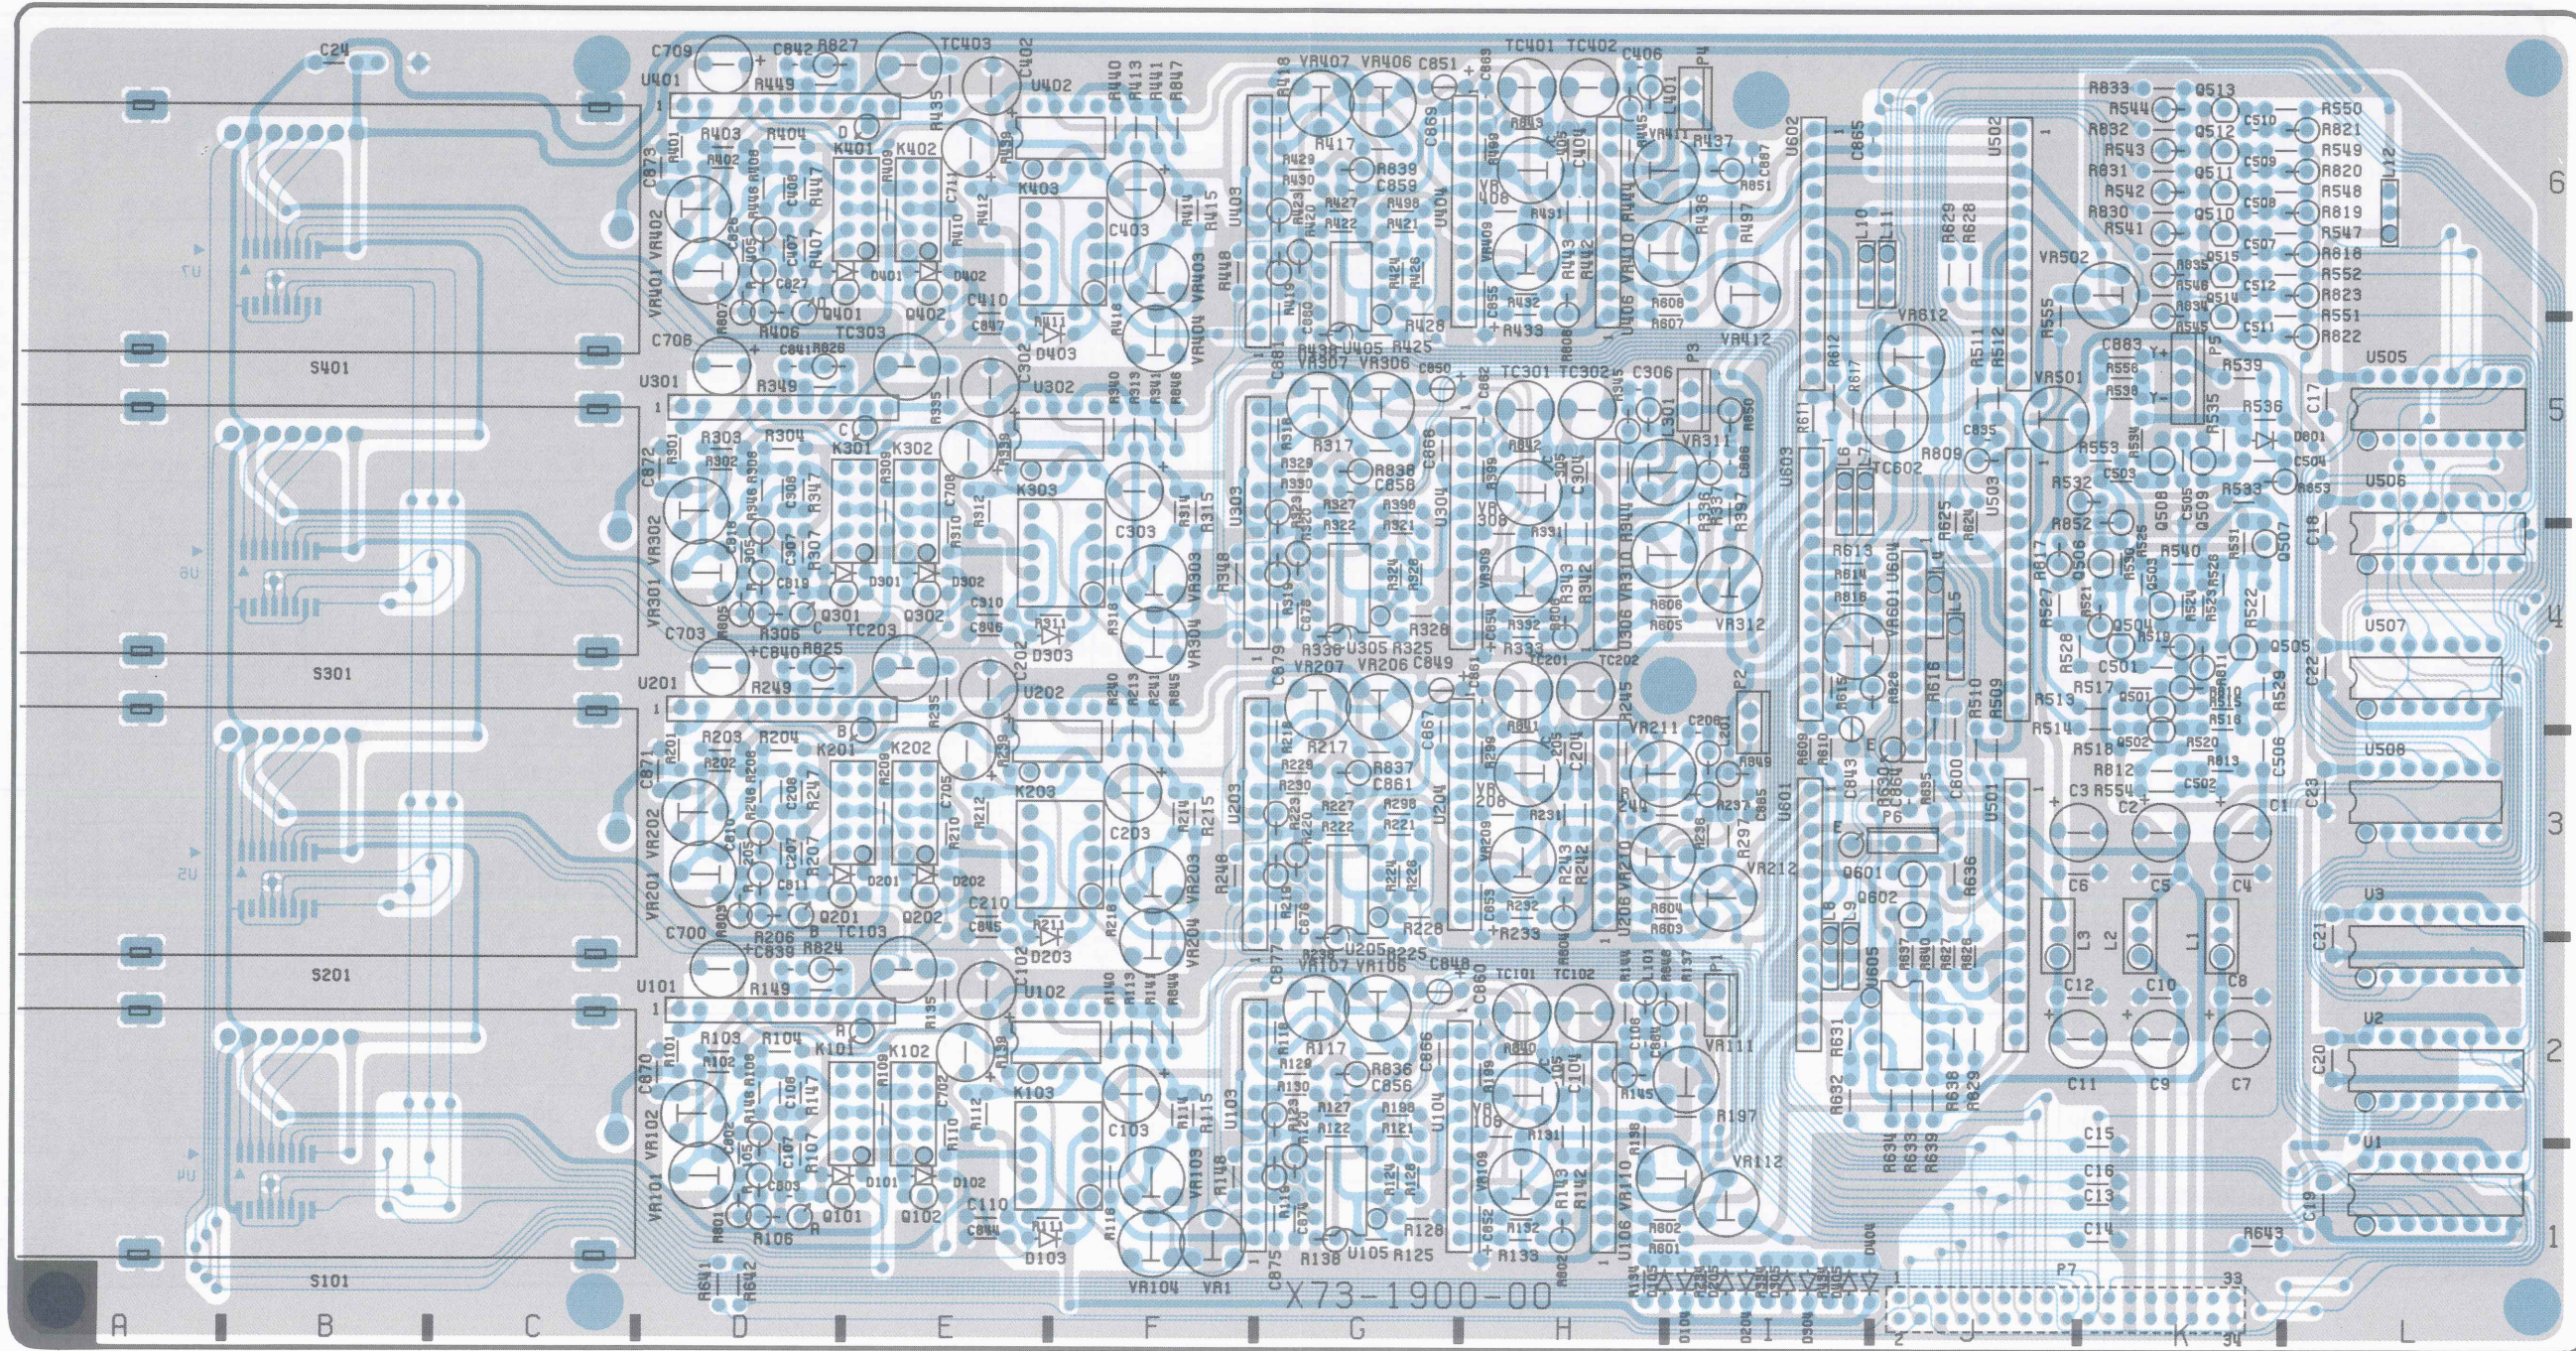




# P.C. BOARD

HORIZONTAL UNIT (X74-1530-00)


VERTICAL UNIT (X73-1500-00)

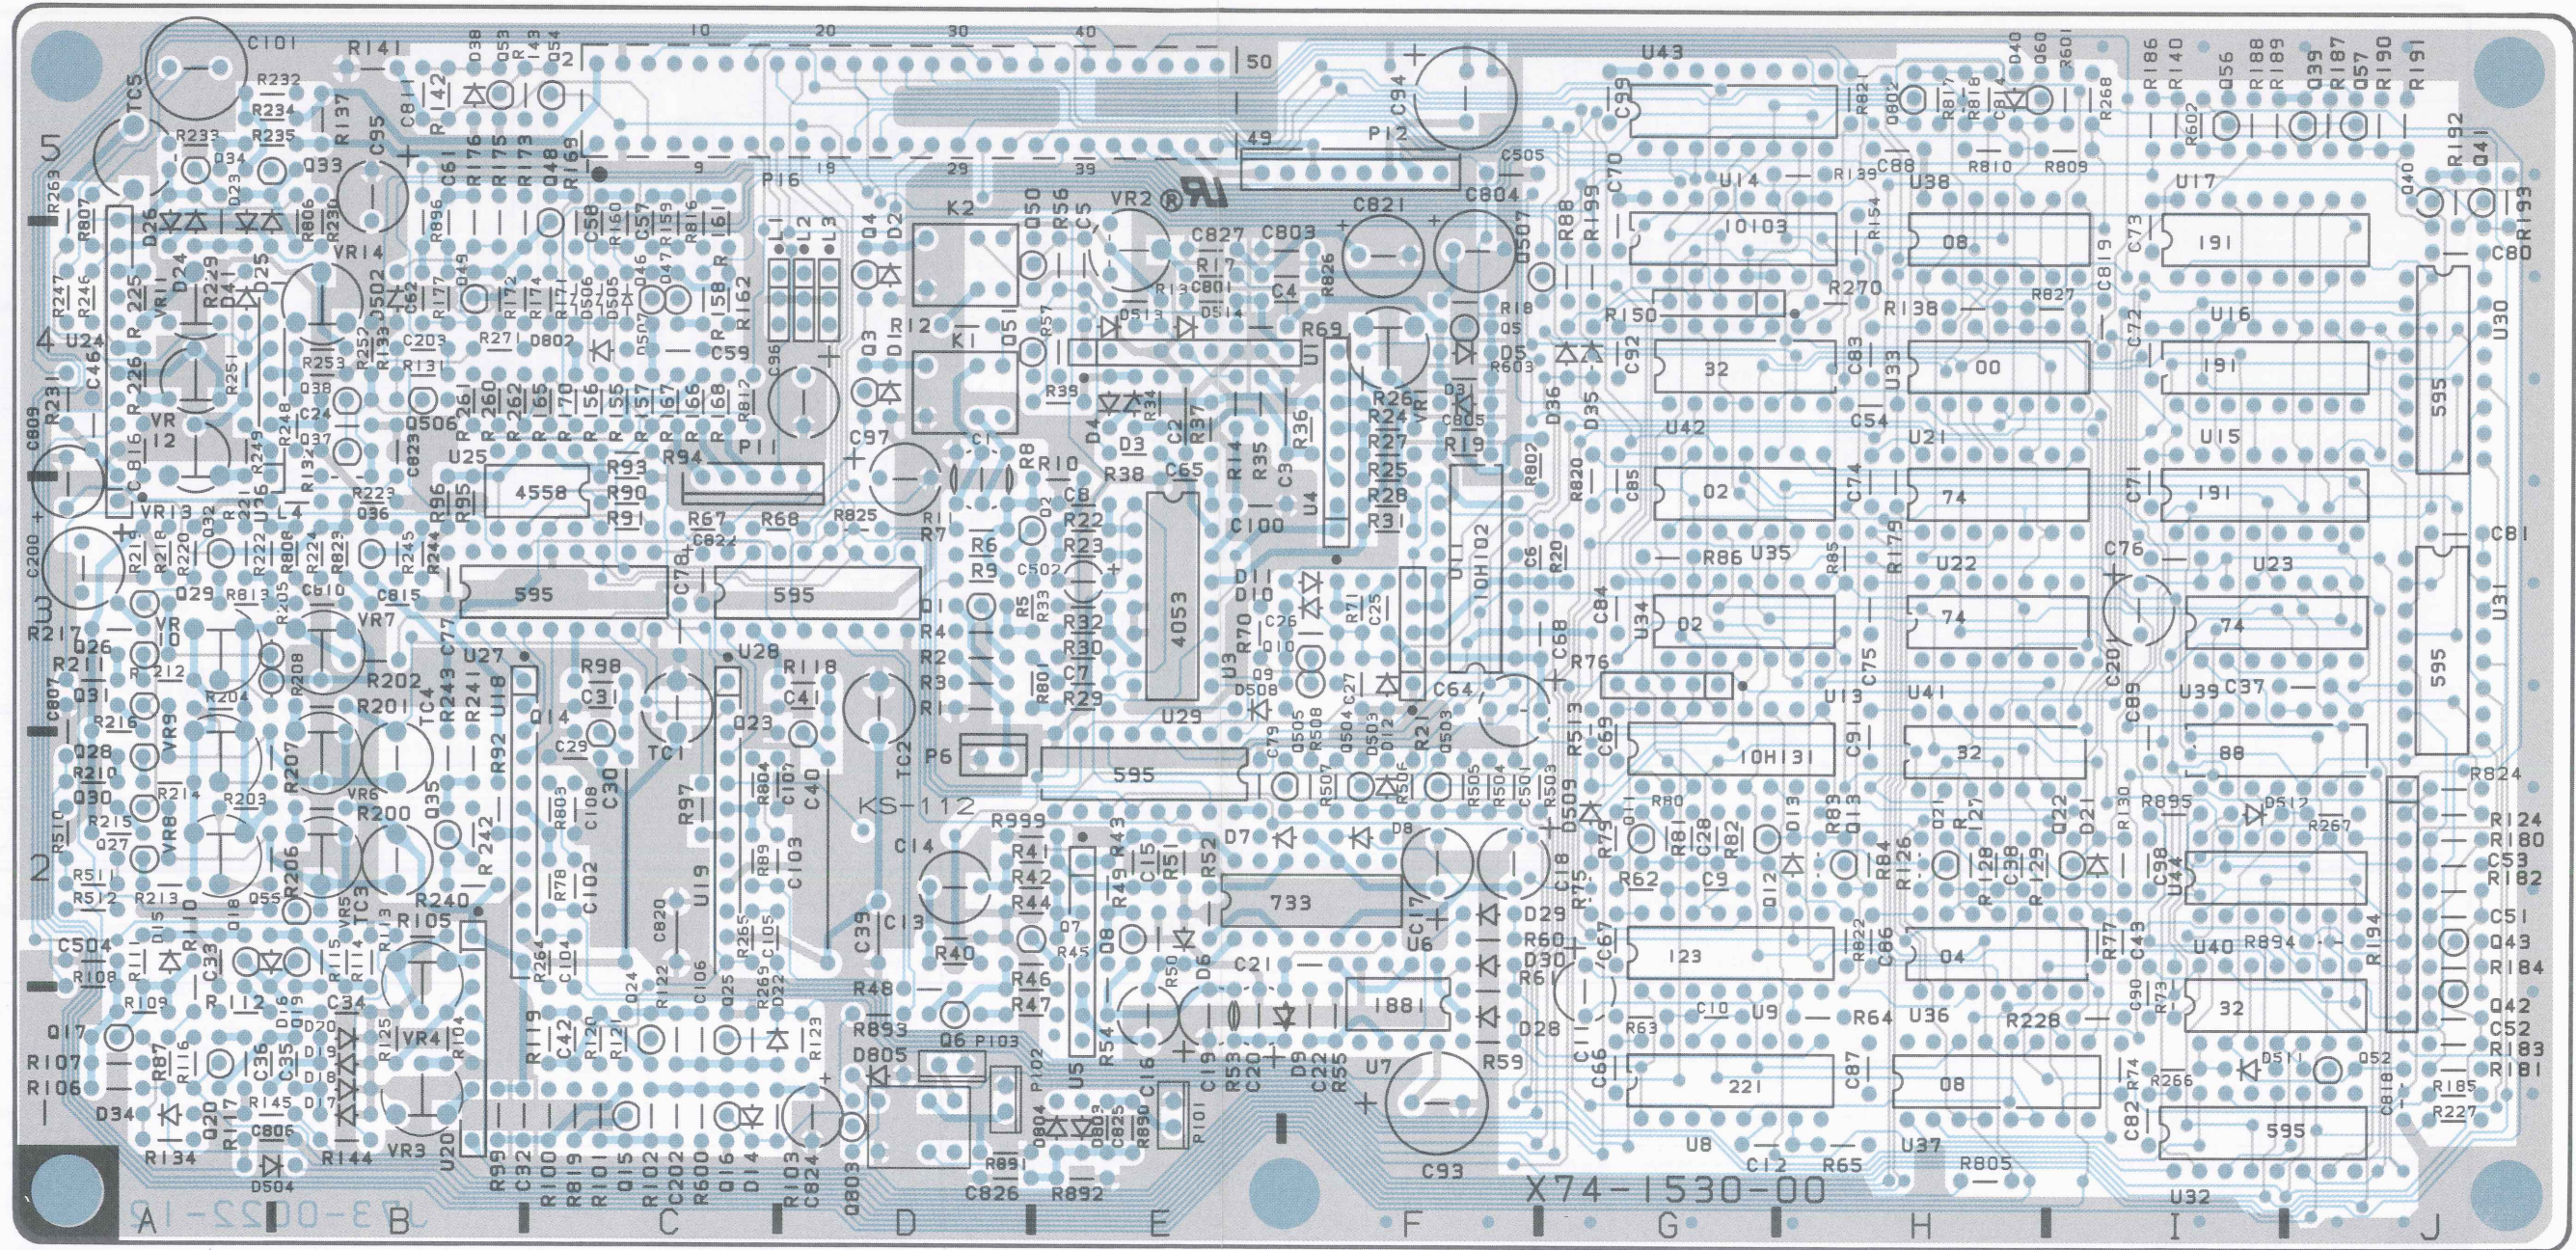



# P.C. BOARD

STORAGE CPU UNIT (X77-1660-0X)

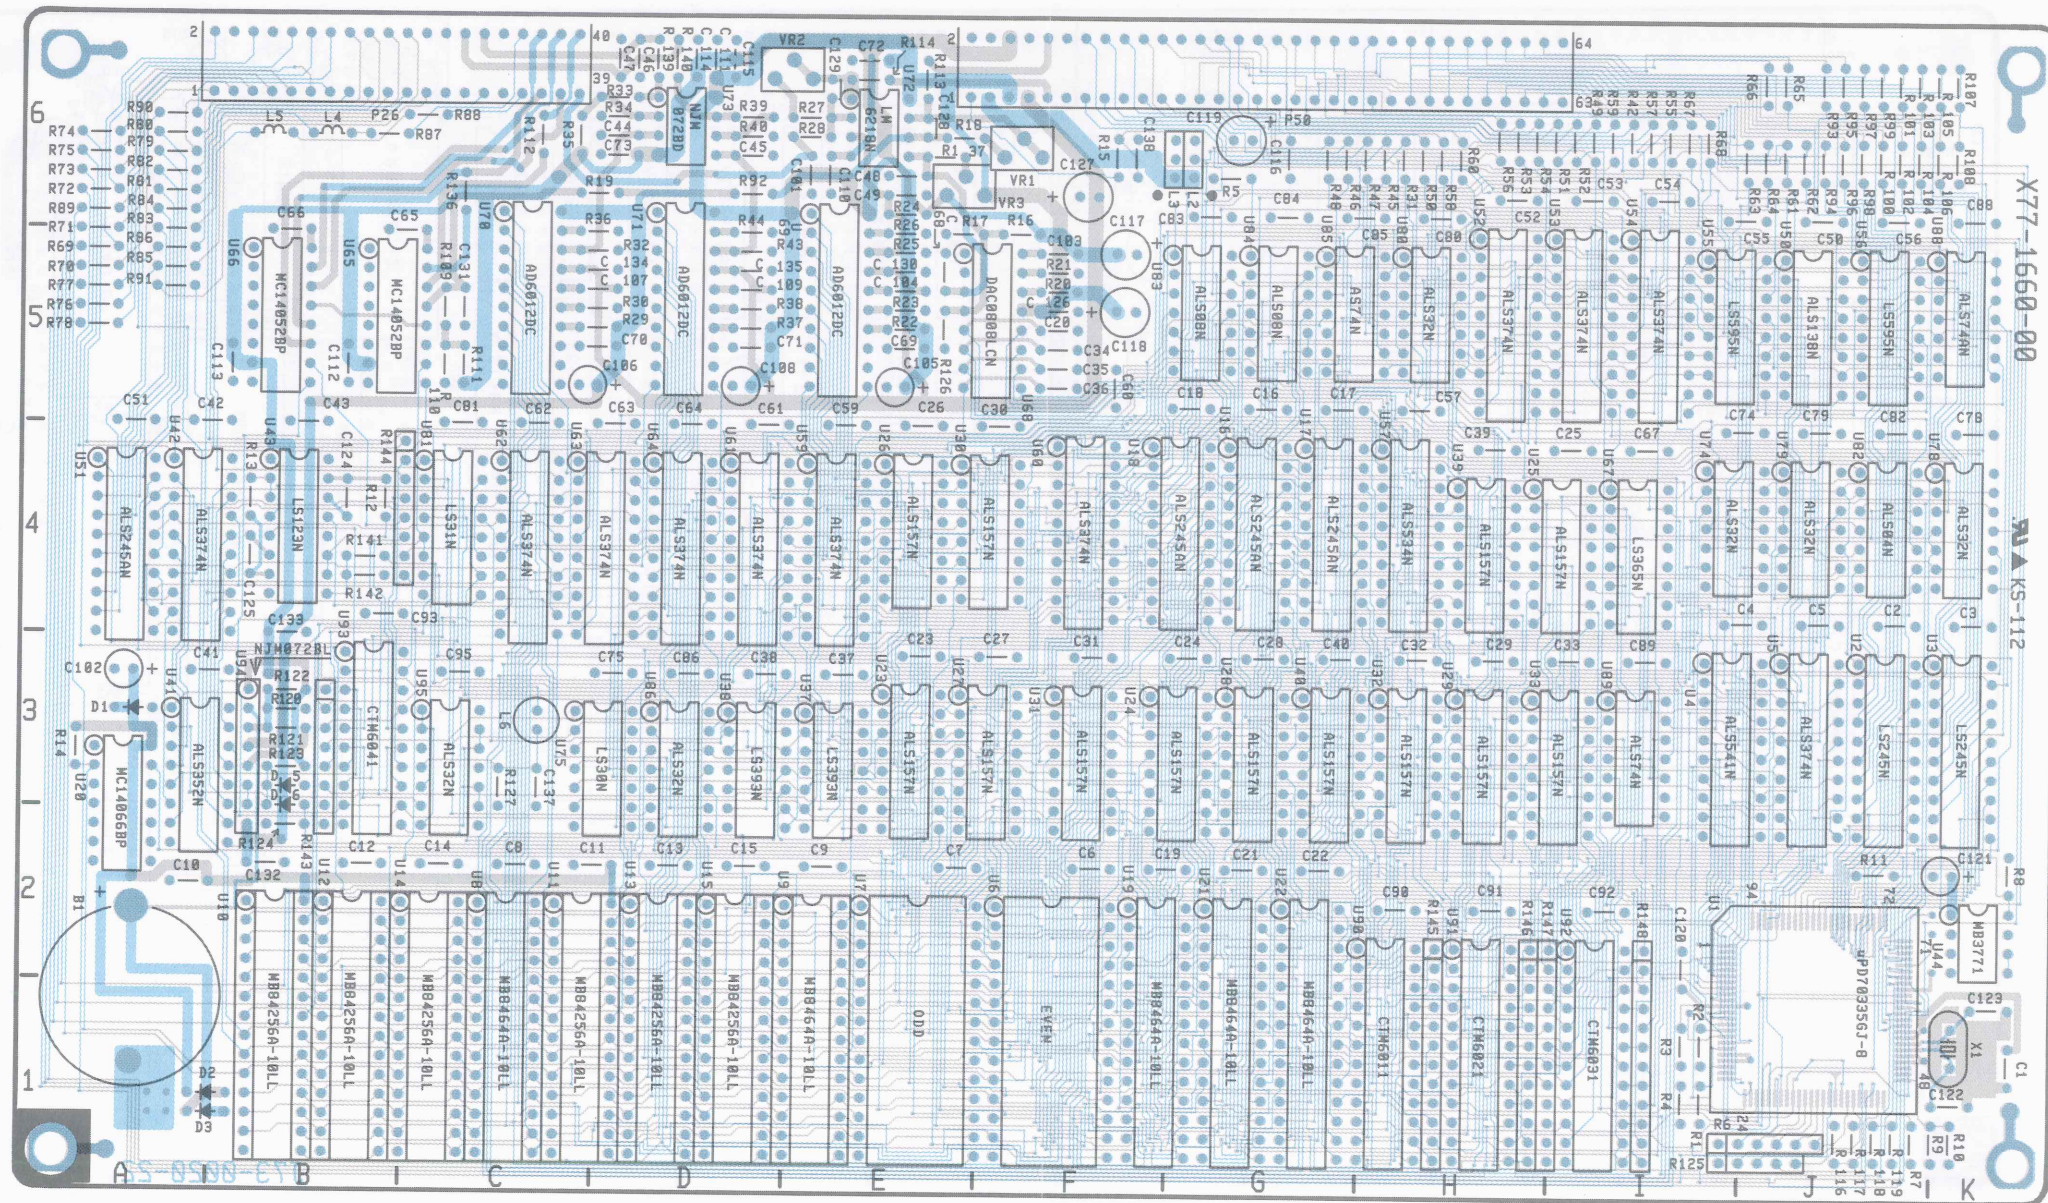









# P.C. BOARD

A/D UNIT (X78-1070-00)A

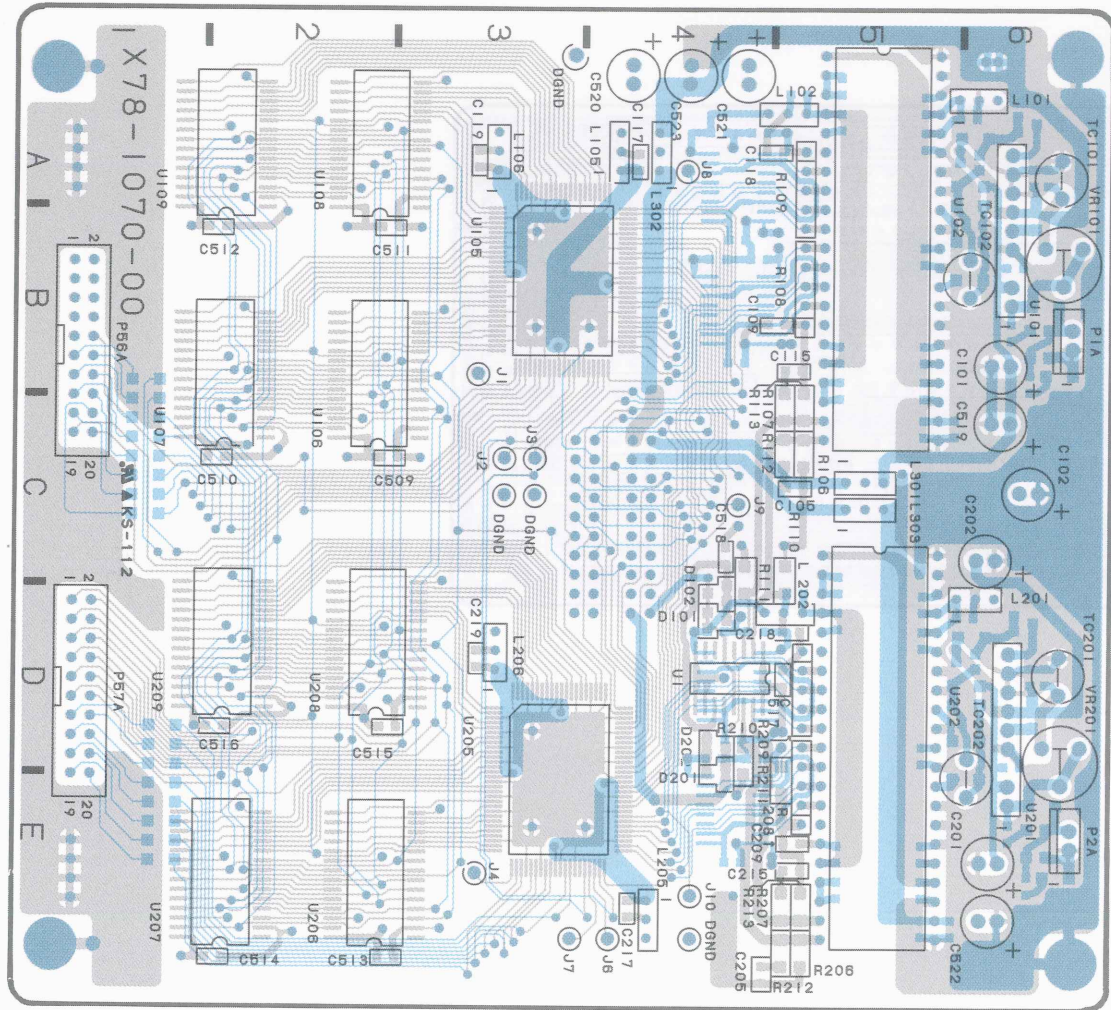





A/D UNIT (X78-1070-00)B

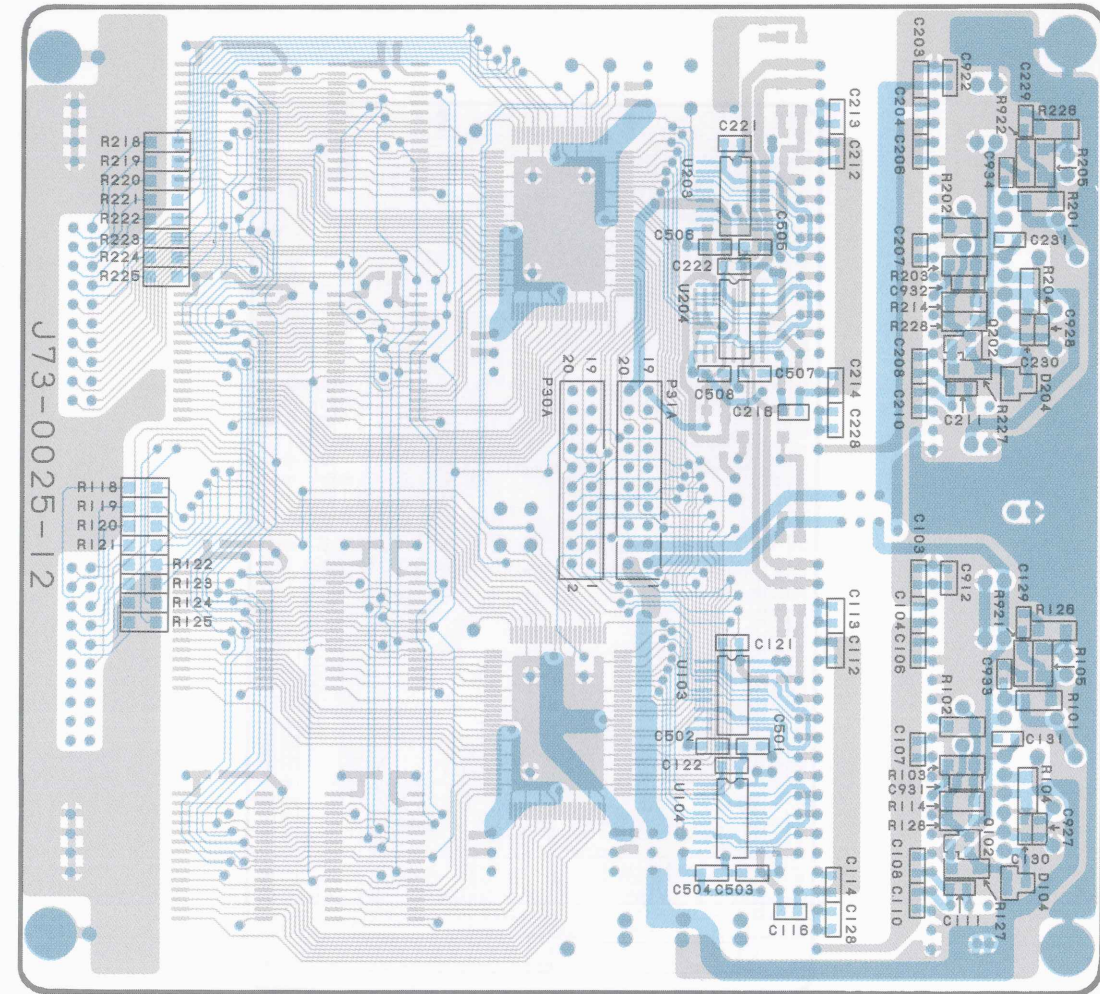



# P.C. BOARD


GPIB UNIT (X79-1120-00)

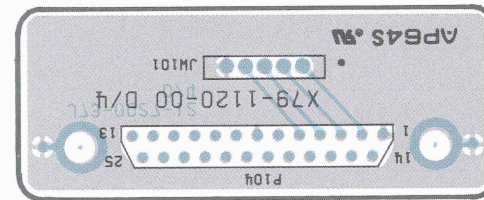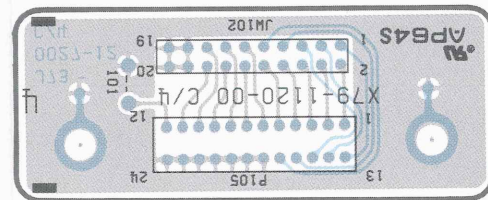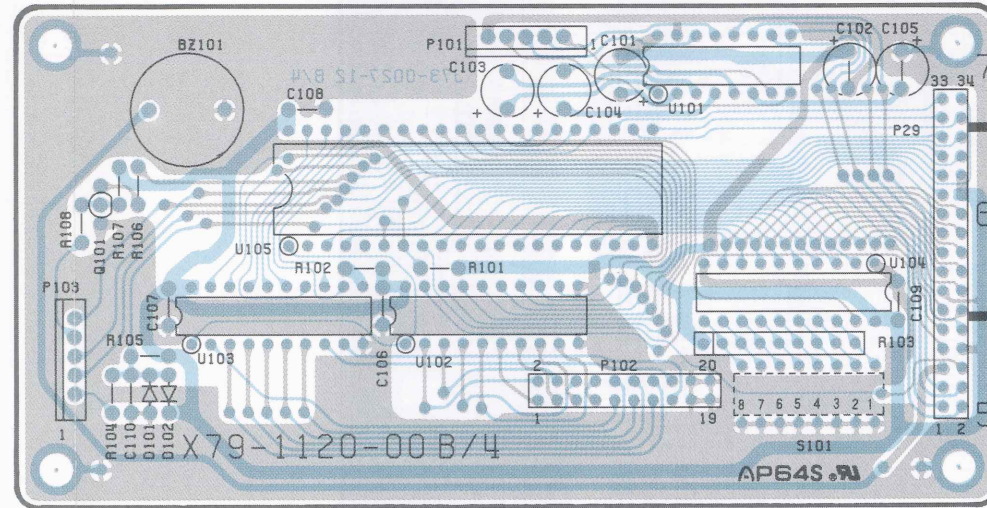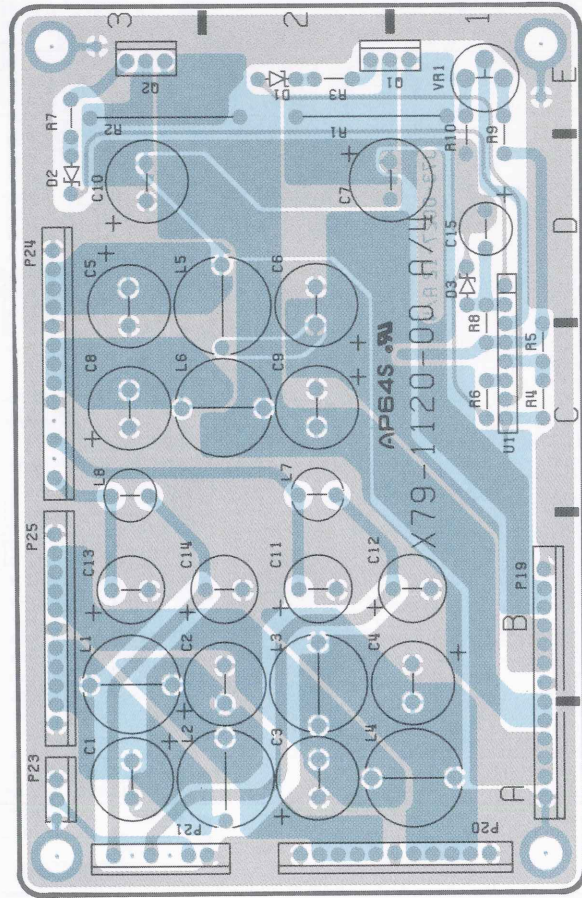






# P.C. BOARD


FINAL UNIT (X80-1140-00)

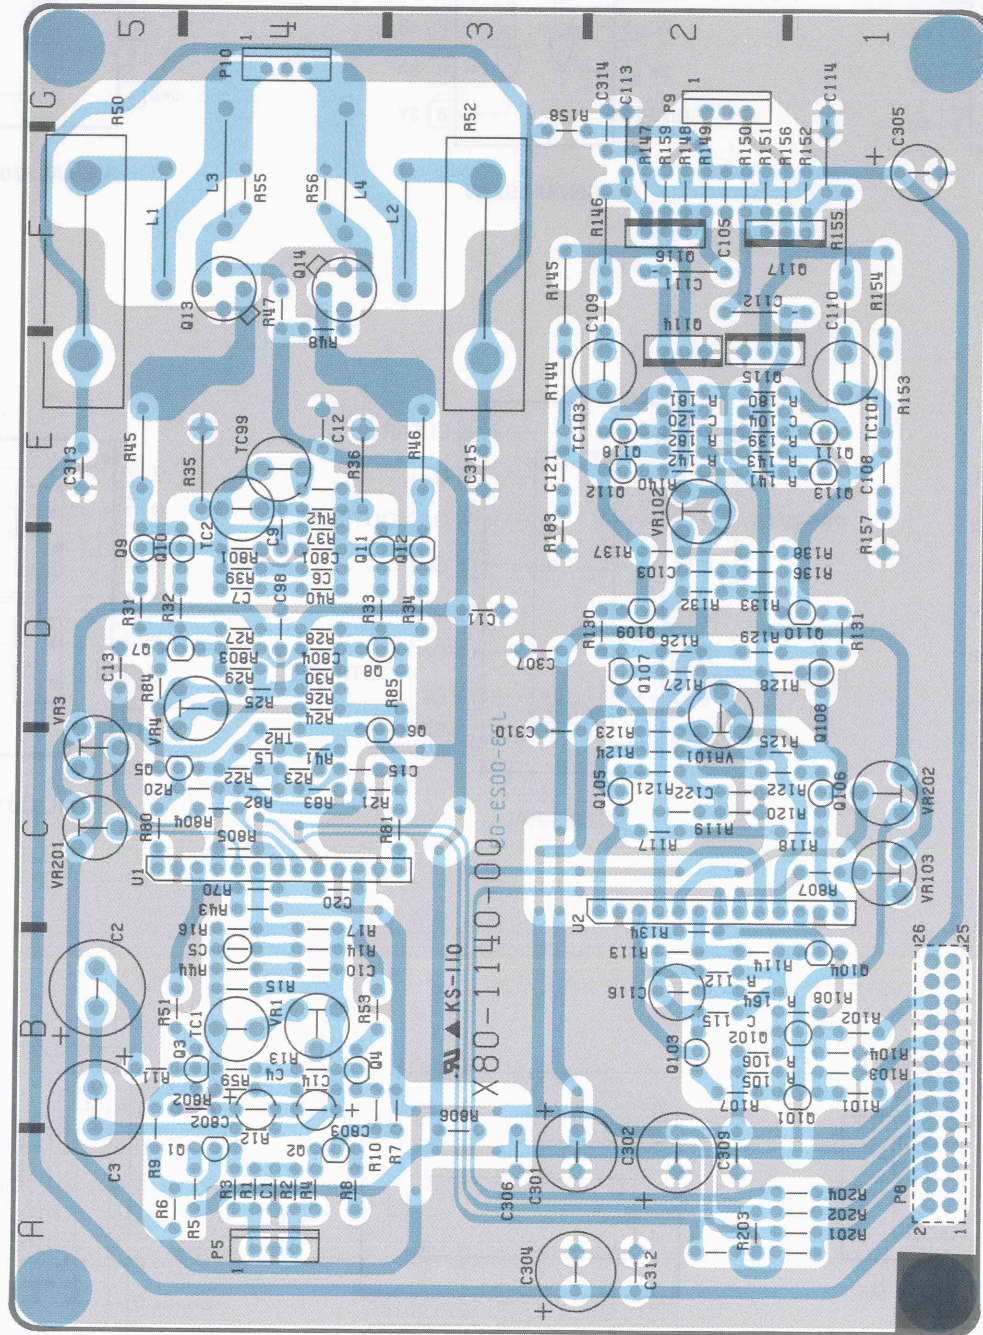

VR UNIT (X81-2900-00)

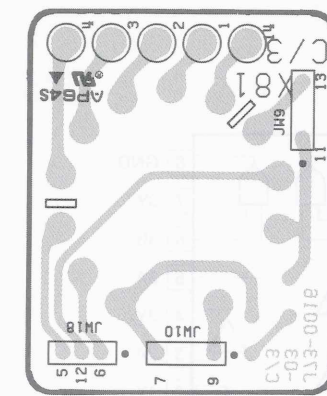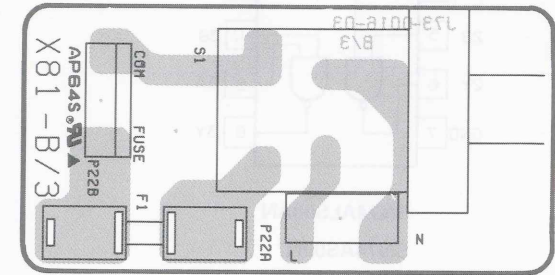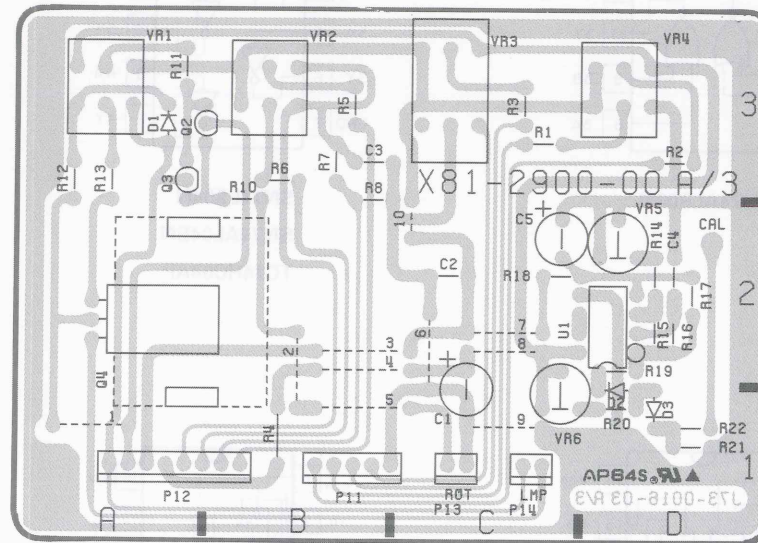


ENCODER UNIT (X81-3040-00)

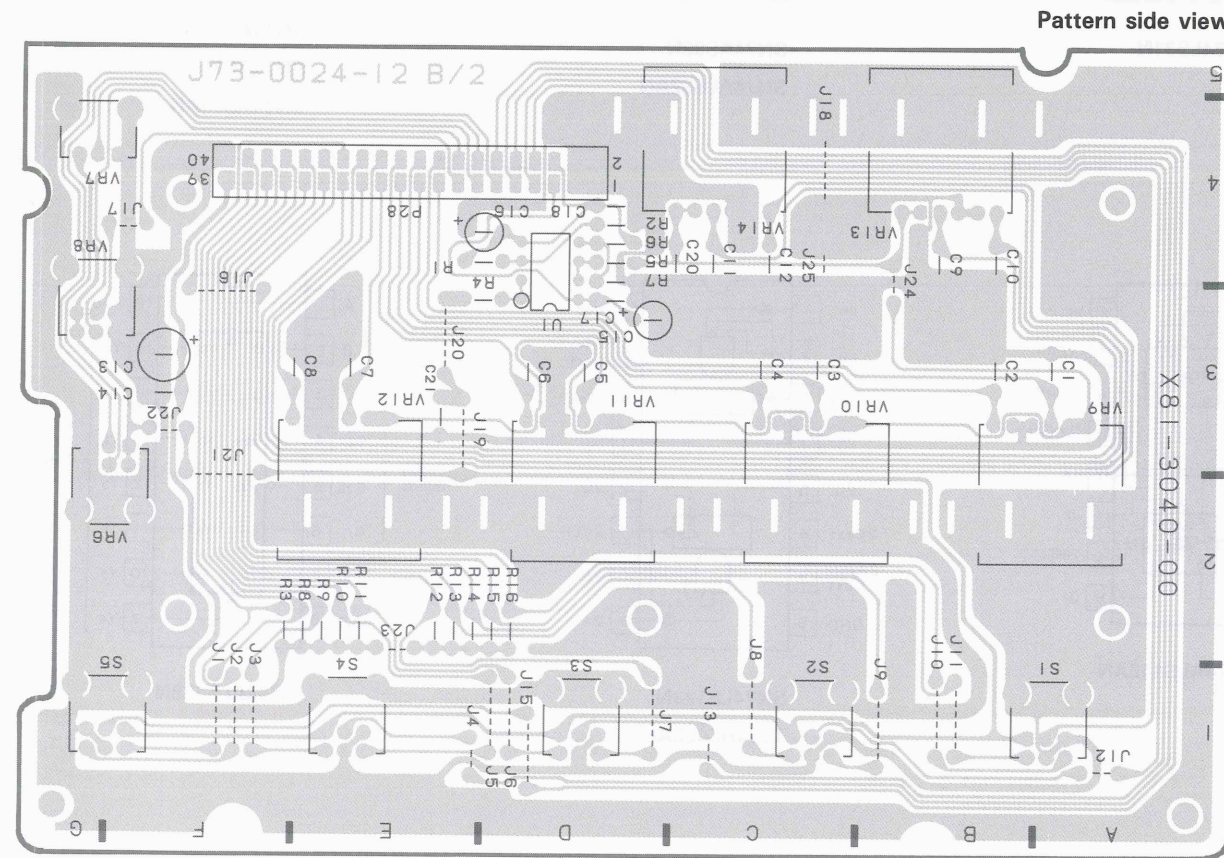





# SEMICONDUCTORS

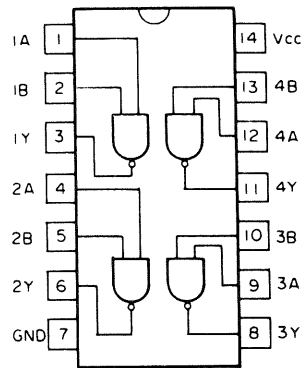


**SN74ALS00AN**  
**SN74AS00N**

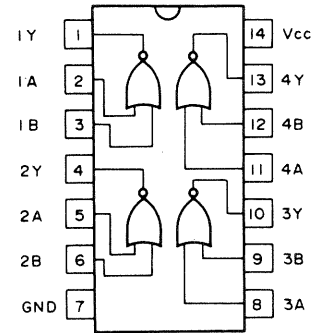


**SN74ALS02N**

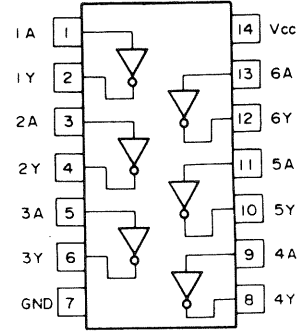


**SN74LS04N**  
**SN74AL04BN**  
**TC74HC04AP**

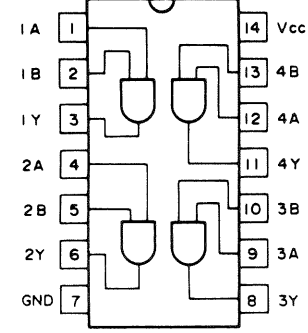


**SN74AS08N**  
**SN74ALS08N**  
**SN74ALS08N**  
**TC74HC08AN**




**SN74ALS27N**




**SN74ALS30AN**




**SN74LS31N**

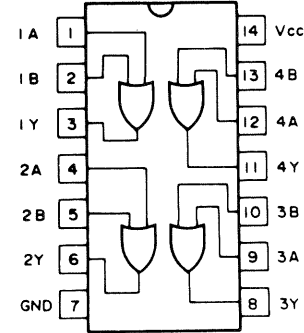


**SN74AS32N**  
**SN74ALS32AN**

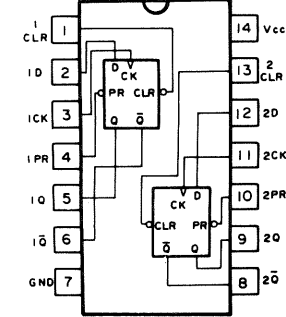


**SN74ALS74AN**  
**SN74AS74N**  
**SN74AS74AN**




**TC74HC86AP**

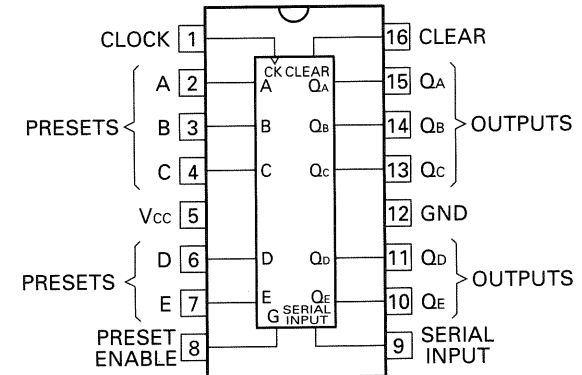


**SN74LS96N**




**SN74LS107AN**

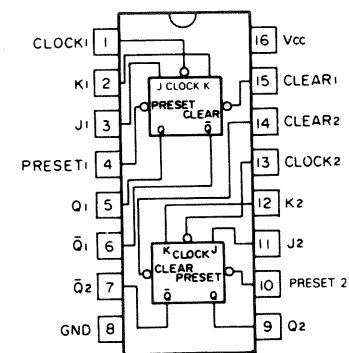


**SN74ALS112AN**

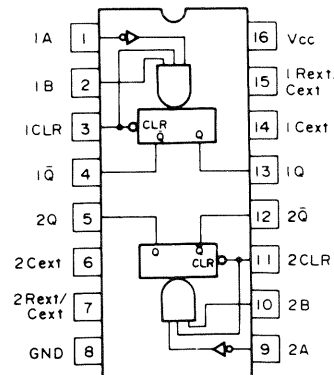


**SN74LS123N**  
**TC74HC123AP**

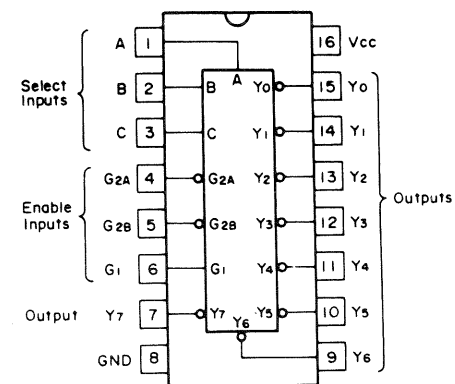


**SN74ALS138N**

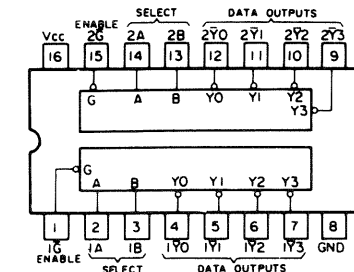

**SN74ALS139N**

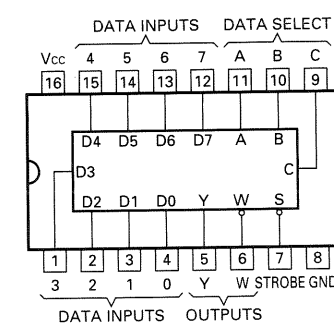


**SN74AS151N**

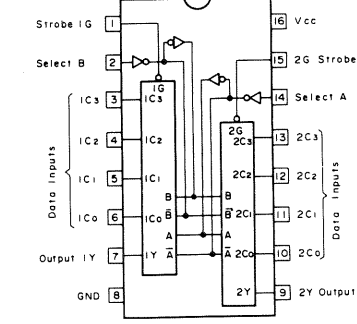


**SN74LS153N**


# SEMICONDUCTORS

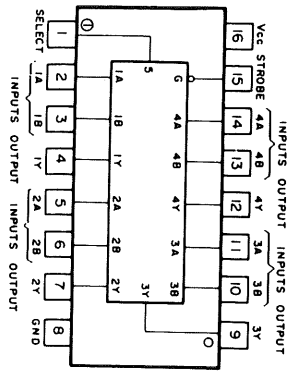


SN74ALS157AN




SN74AS161N

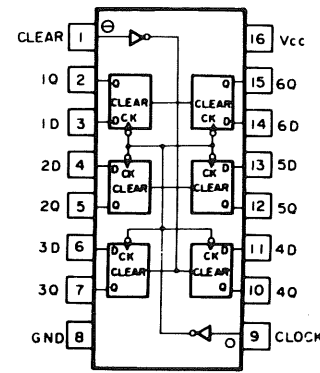


SN74ALS174N

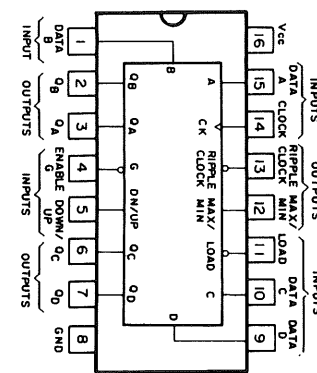


SN74ALS191N

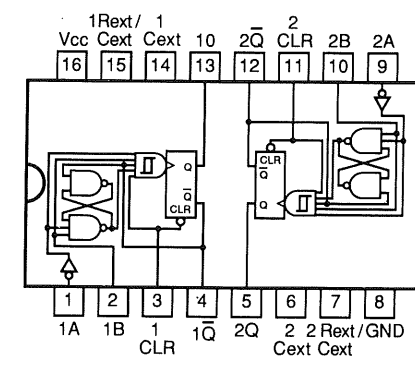


SN74LS221N

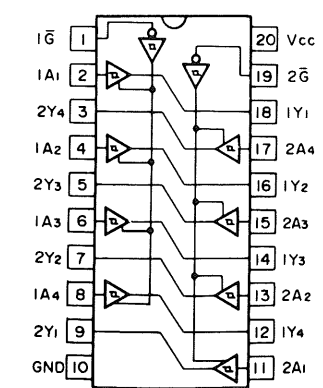


SN74ALS244BN

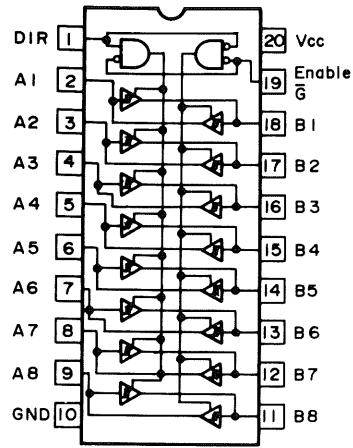


SN74LS245N  
SN74ALS245AN  
TC74HC245AP

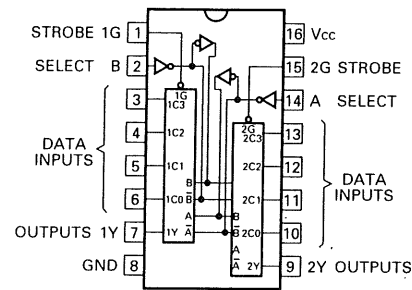


SN74ALS352N

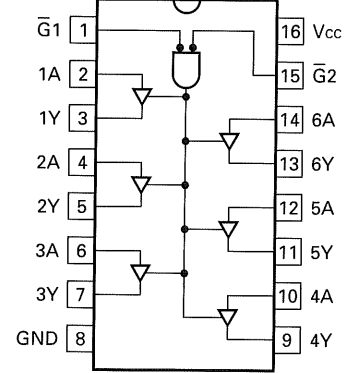


SN74LS365AN

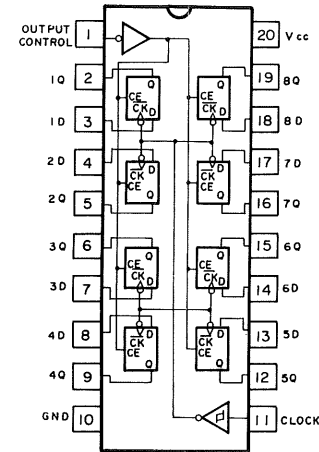


SN74ALS374AN

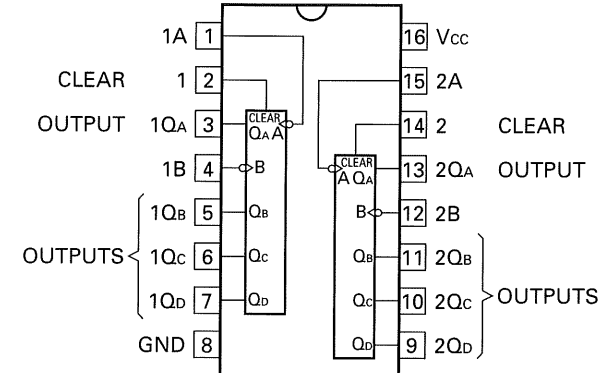


SN74LS390N

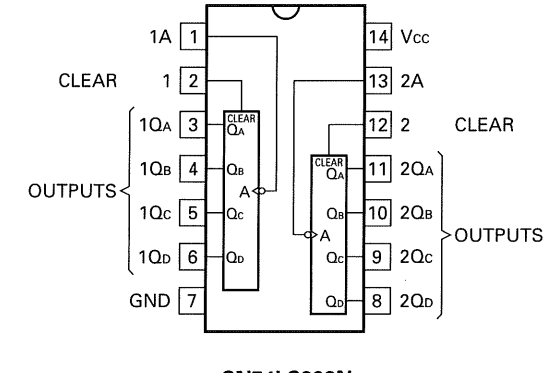


SN74LS393N

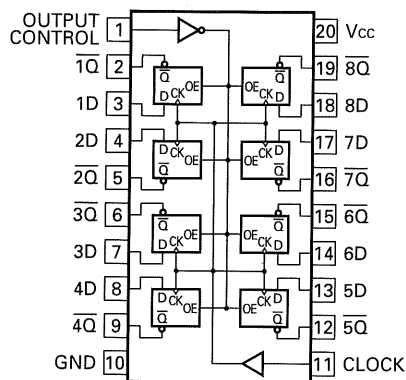


SN74ALS534AN

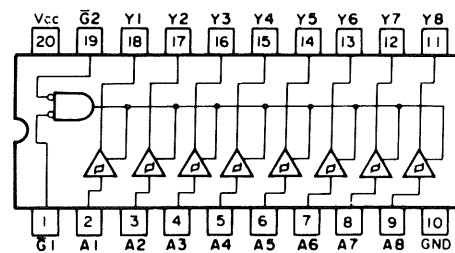


SN74ALS541N  
SN74LS541N

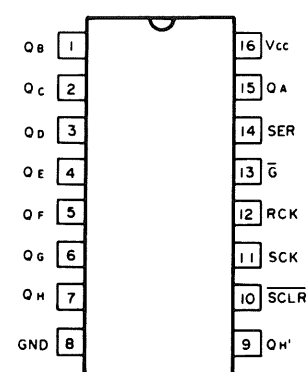


HD74HC595FP  
HD74HC595AP  
SN74LS595N

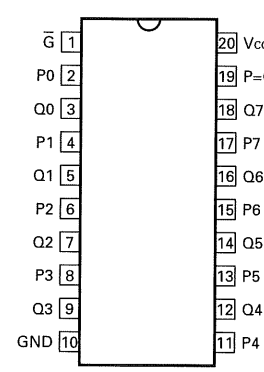

SN74ALS688N

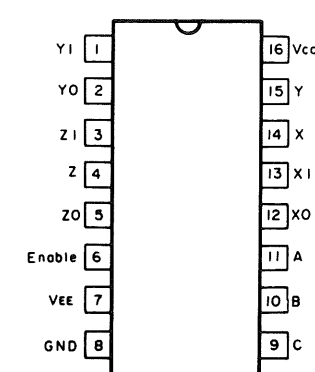


MC74HC4053N

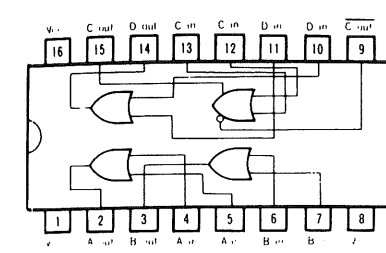


MC10103L


# SEMICONDUCTORS

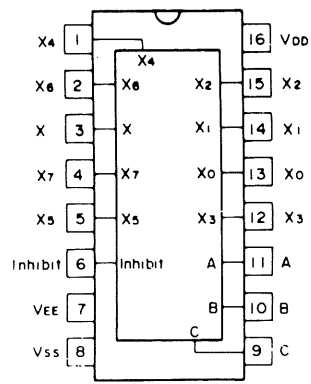


MC14051BCP

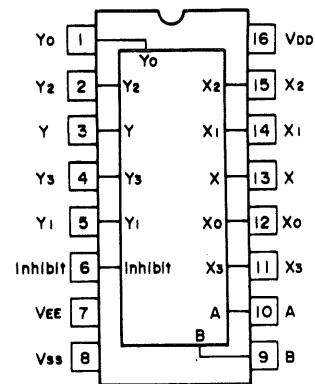


MC14052BCP

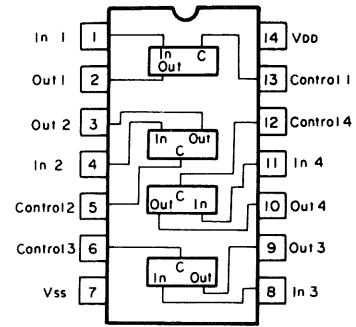


MC14066BCP

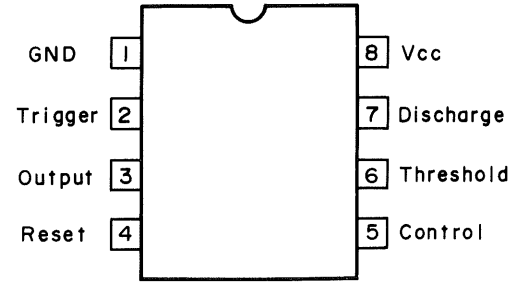


HA17555PS

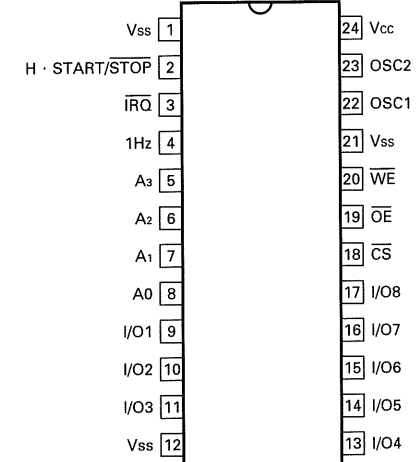


HD64610P

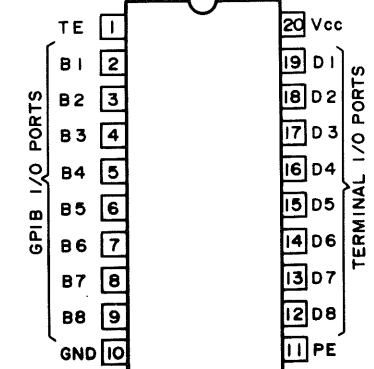


SN75160BN

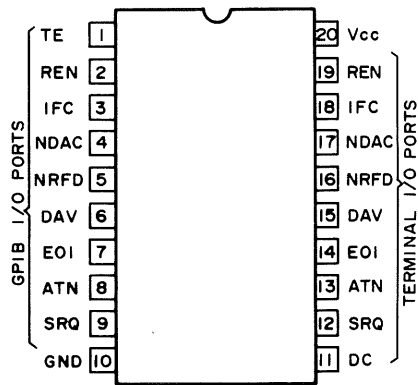


SN75161BN




74F191PC

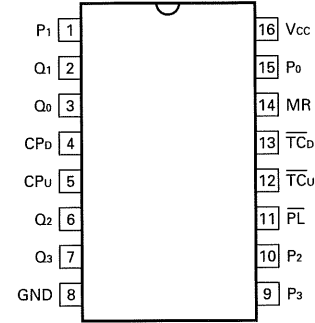


74F193PC




MC10H016L

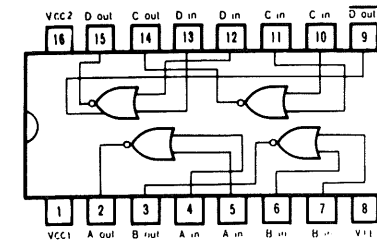


MC10H102L

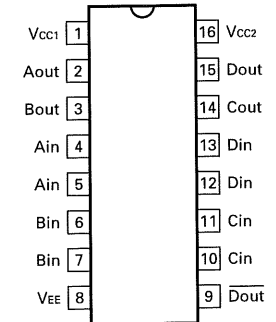


MC10H104L




MC10H105L

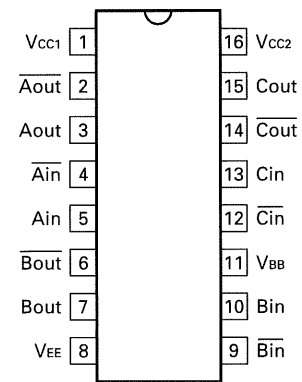


MC10H116M

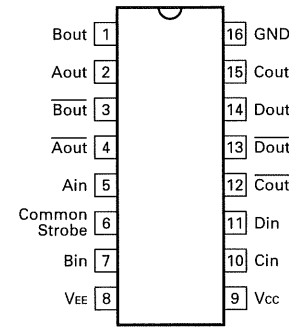


MC10H124L



MC10H125L  
MC10H125M

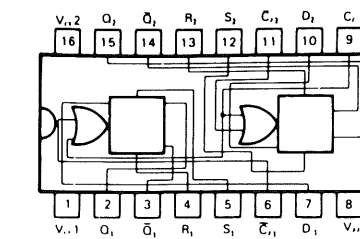


MC10H131L

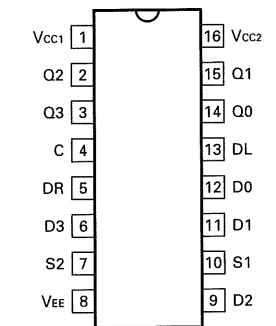


MC10H141L


# SEMICONDUCTORS

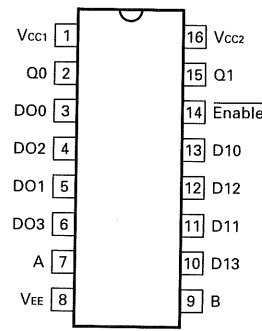


MC10H174L

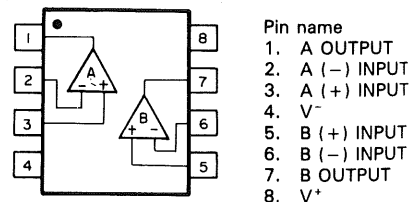


NJM072BD  
NJM072BL

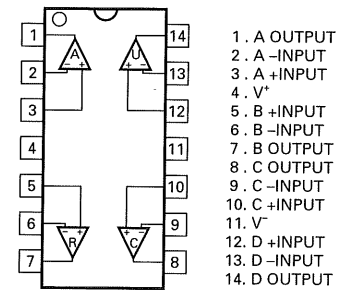

NJM074D




NJM556D

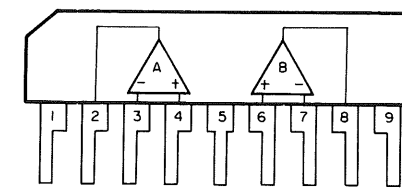


NJM4556L

- Pin name
1. V<sup>+</sup>
  2. A OUTPUT
  3. A - INPUT
  4. A + INPUT
  5. V<sup>-</sup>
  6. B + INPUT
  7. B - INPUT
  8. B OUTPUT
  9. V<sup>+</sup>

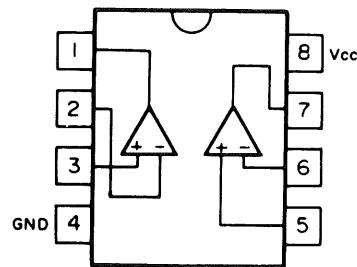


NJM4558D




LM311N


- Pin name
1. GROUND
  2. + INPUT
  3. - INPUT
  4. V<sup>-</sup>
  5. BAL
  6. BAL/STROBE
  7. OUTPUT
  8. V<sup>+</sup>

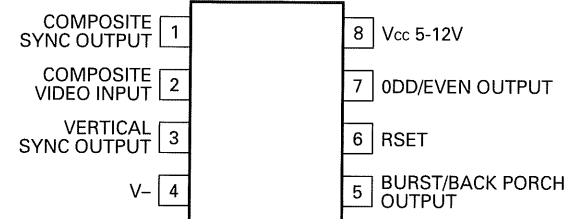


LN1881N

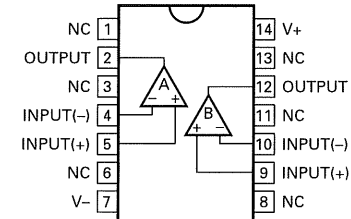


LM6218N

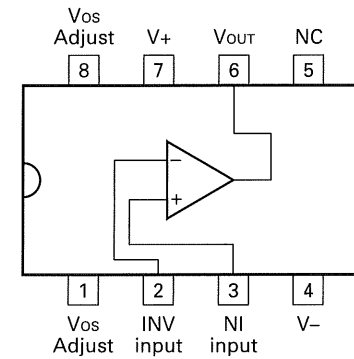


LM6364N

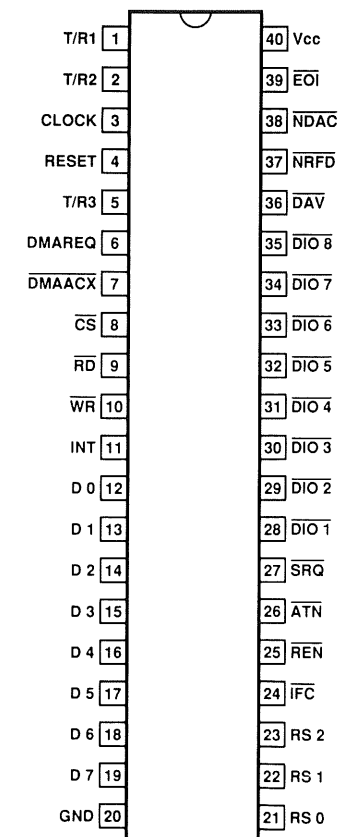


μPD7210C

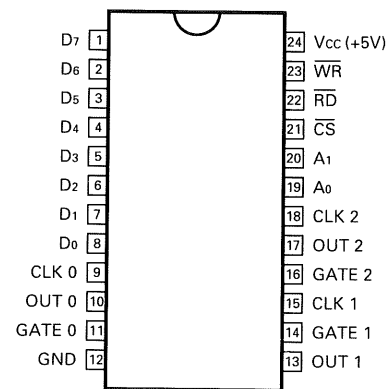


μPD8253C-2

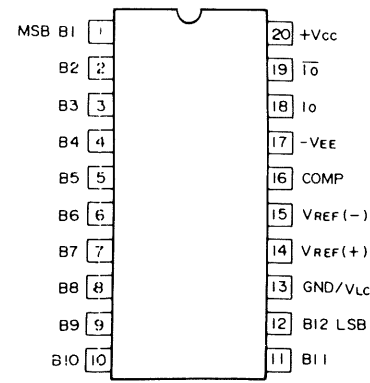

HA17012PB

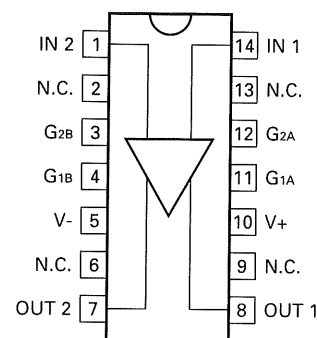


μA733CN

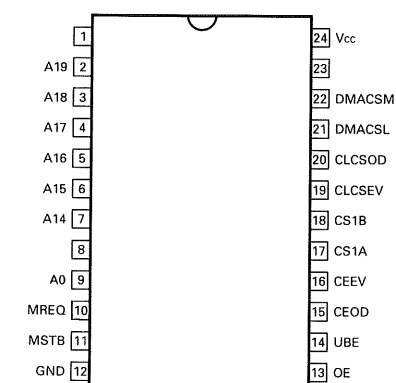


CTM6011



# SEMICONDUCTORS

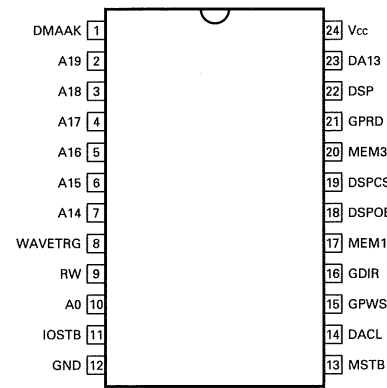


CTM6021

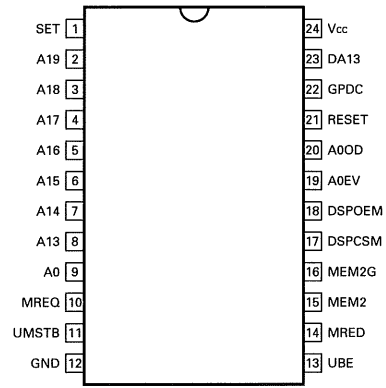


CTM6031




CTM6041

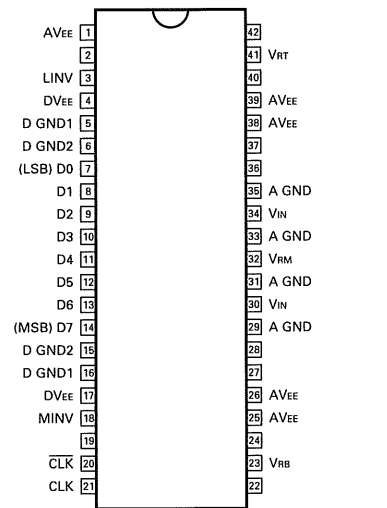


CXA1396D

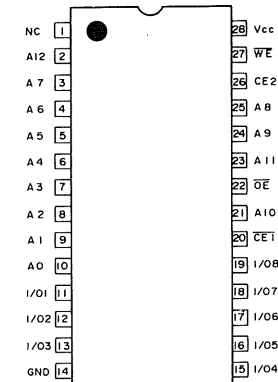


CXK5863M-25

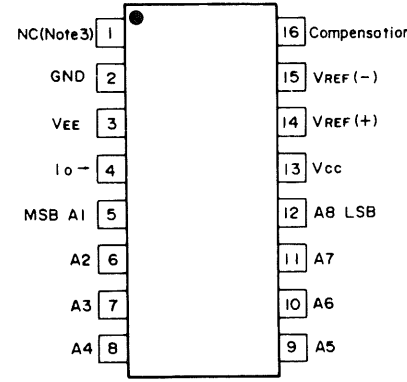

DAC0808LCN

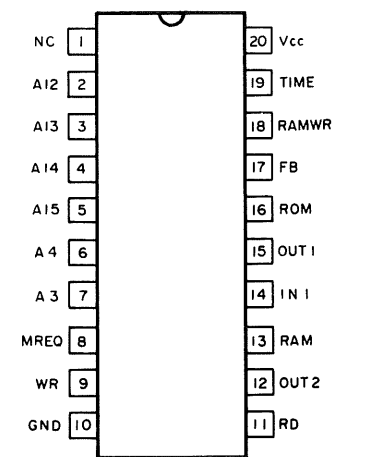


DTM-5010

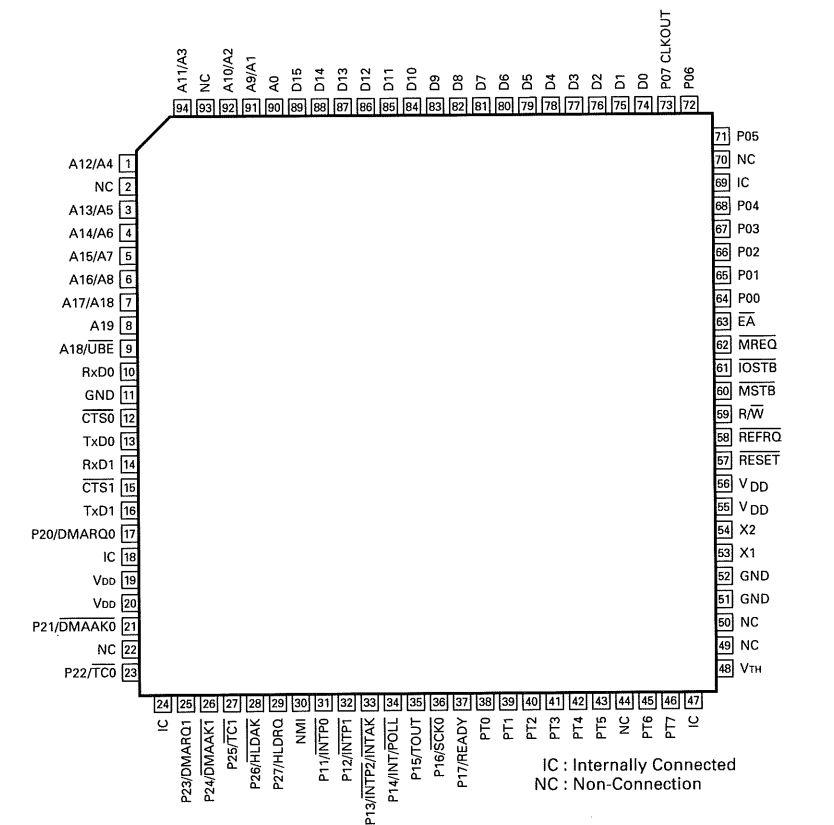


IC : Internally Connected  
NC : Non-Connection

μPD70335GJ-85BG

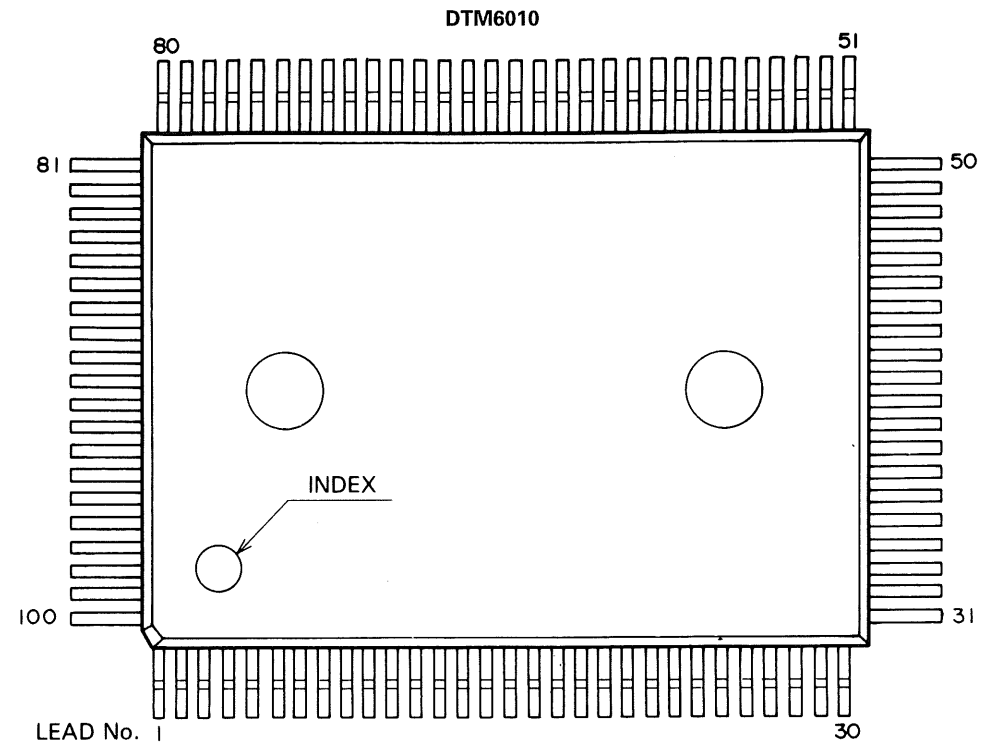


Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name
1	CONT	26	TSD0	51	GETD	76	DD3
2	A13	27	TSD1	52	CA0	77	SING
3	VDD	28	VDD	53	VDD	78	VDD
4	A14	29	TSD2	54	CA4	79	R10M
5	A15	30	AX2	55	CA3	80	10M
6	INT0	31	AX1	56	CA2	81	HLDL
7	VX3	32	AX0	57	CA1	82	SGA
8	VX2	33	AX3	58	CD3	83	ROSP
9	VX1	34	HS2	59	CD2	84	ROD
10	VX0	35	HS1	60	CD4	85	HLDL
11	DA0	36	TDIO	61	CD1	86	ROUB
12	DA1	37	TWE	62	CD5	87	ROB
13	DA2	38	TCK1	63	DC4	88	ROQ
14	DA3	39	TST1	64	CD7	89	ROED
15	VSS	40	VSS	65	VSS	90	VSS
16	DA4	41	TST2	66	DC3	91	D7
17	DA5	42	TADD	67	DC2	92	D5
18	DA6	43	TCK2	68	CD6	93	D3
19	DA7	44	VS2	69	DC1	94	D1
20	DA8	45	VS1	70	DC0	95	ALE
21	DA9	46	VA0	71	CD0	96	D6
22	ROR	47	VA4	72	DD7	97	D4
23	ROA	48	VA3	73	DD6	98	D2
24	LEVX	49	VA2	74	DD5	99	DO
25	TCL	50	VA1	75	DD4	100	WR


# SEMICONDUCTORS

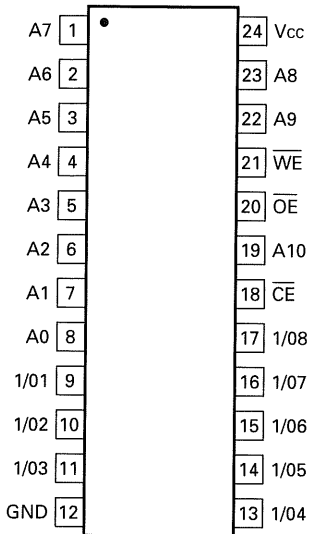


LC3517BS-15

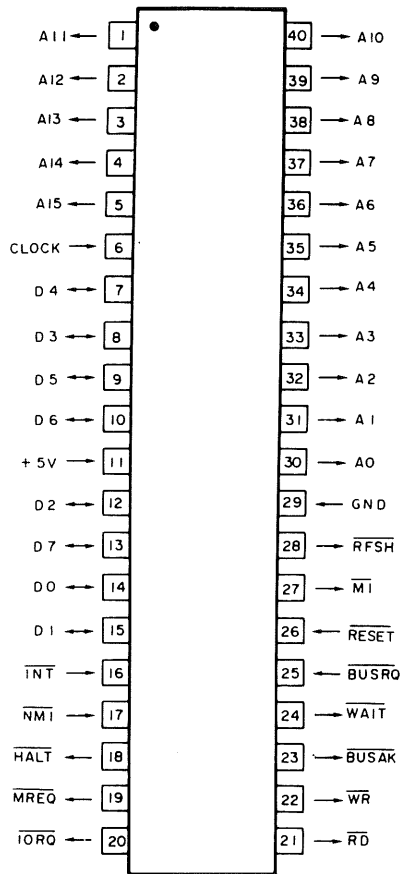


LH0080BF

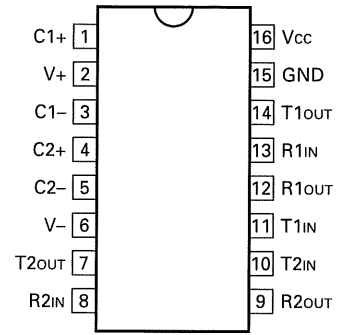

MAX232EPE

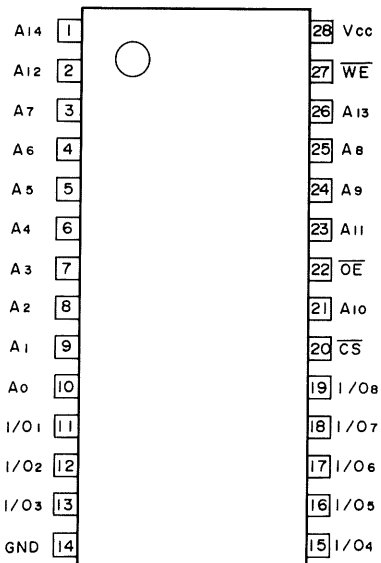


MB84256-10LL-SK

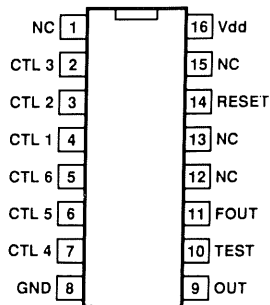


SPG-8650-0


# SEMICONDUCTORS

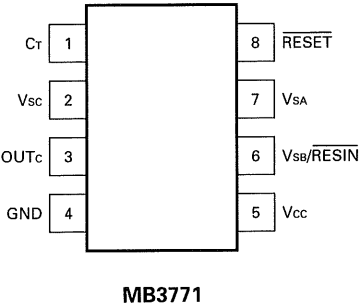

**MB3771**

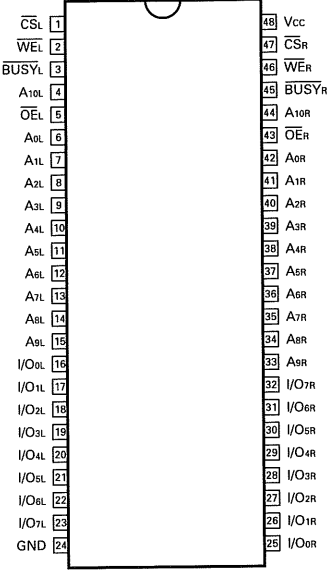


**MB8422-12LP-G**

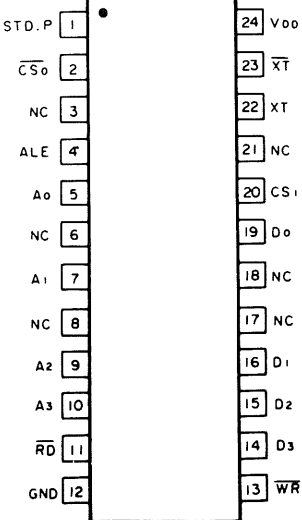


**MB8464-10LL-SK**


# SEMICONDUCTORS




**PST518B**




**2SA684 (Q)**  
**2SA1005 (K)**  
**2SA1208 (S,T)**  
**2SC1384 (Q)**  
**2SC2910 (S,T)**




**2SA1161**  
**2SC3779 (D)**




**2SA1175 (F)**  
**2SC2785 (F)**  
**2SC3732 (L)**




**2SA1206 (K)**




**2SA1209 (S,T)**  
**2SA1406 (E,F)**  
**2SC2911 (S,T)**  
**2SC3600 (E,F)**




**2SA1459**  
**2SA1459 (K)**  
**2SA1459 (L)**




**2SA1462 (Y34)**




**2SA1565**  
**2SC4049**




**2SB1133 (R)**  
**2SD613 (E)**  
**2SD1666 (S)**  
**2SD1666 (R)**




**2SC1164 (D)\*S**




**2SC3315 (C)**  
**2SC3354 (S)**  
**2SC3354 (S,T)**



**2SK241 (GR)**



**2SK304 (F)**



**2SK583-KEN**



---

A product of  
**KENWOOD CORPORATION**  
14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150, Japan

---

B51-1115-00 (MC)