

KENWOOD



PROGRAMMABLE DIGITAL STORAGE OSCILLOSCOPE

DCS-9300

DCS-9320

SERVICE MANUAL

KENWOOD CORPORATION

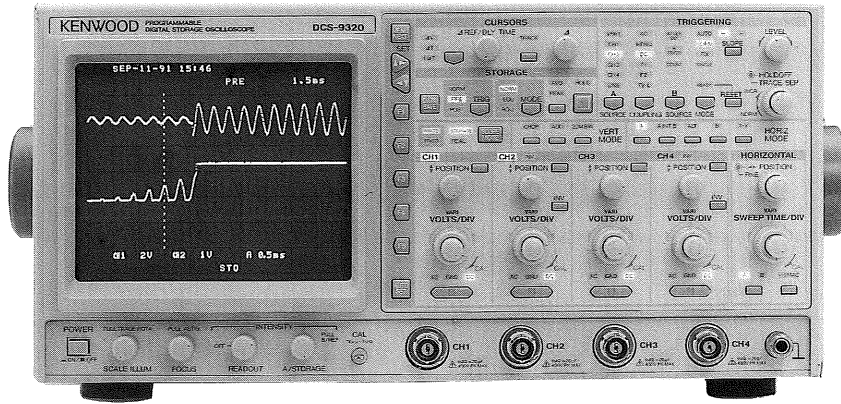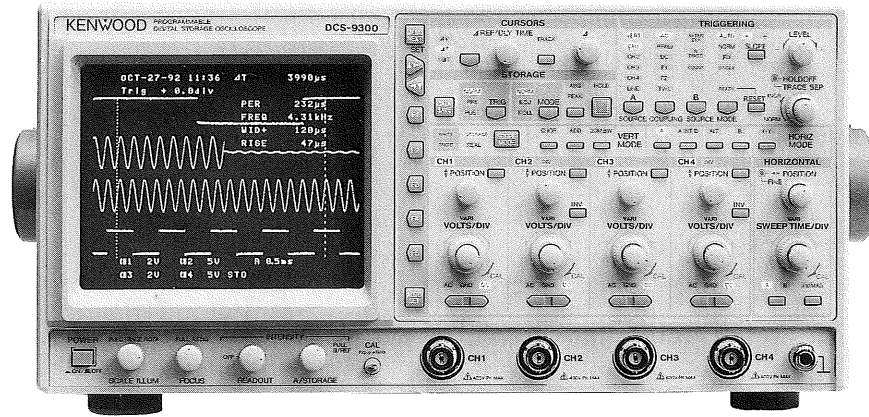

WARNING

The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.

CONTENTS

| | |
|--------------------------------------|------------|
| SPECIFICATIONS | 3 |
| SAFETY | 11 |
| CIRCUIT DESCRIPTION | 12 |
| BLOCK DIAGRAM | 22 |
| ADJUSTMENT | 24 |
| TROUBLESHOOTING | 46 |
| PARTS LIST | 80 |
| DISASSEMBLY | 81 |
| PARTS LIST (ELECTRICAL) | 84 |
| SCHEMATIC DIAGRAM | 108 |
| P.C. BOARD | 122 |
| SEMICONDUCTORS | 132 |

SPECIFICATIONS

【Real-Time Oscilloscope Section】

| | |
|-------------------------------------|--|
| CRT | |
| Type | 150mm rectangular with internal graticule |
| Acceleration voltage | 17kV |
| Display area | 8 div. × 10 div. (1 div. = 10mm) |
| Vertical axis (CH1, CH2, CH3 & CH4) | |
| Sensitivity | 5mV/div. to 5V/div. ±2% (10 to 35°C) 1mV/div., 2mV/div. ±4% (10 to 35°C) |
| Attenuator | 1mV/div. to 5V/div., 1-2-5 steps, 12 ranges, ranges fine-adjustable |
| Input impedance | 1MΩ ± 1%, 23pF ± 3pF |
| Frequency response DC: | DC to 100MHz, within -3dB (5mV/div. to 5V/div.) DC to 20MHz, within -3dB (1mV/div., 2mV/div.) |
| AC: | 5Hz to 100MHz, within -3dB (5mV/div. to 5V/div.) 5Hz to 20MHz, within -3dB (1mV/div., 2mV/div.) |
| Rise time | 3.5ns or less (5mV/div. to 5V/div.) 17.5ns or less (1mV/div., 2mV/div.) |
| Signal delay time | 10ns or more (Delay time on CRT screen) |
| Cross-talk | -40 dB or less (with 1kHz sine wave input) |
| Operation modes CH1 : | CH1 single-trace and 2- to 4-trace display combined with other channel (s) |
| CH2 : | CH2 single-trace and 2- to 4-trace display combined with other channel (s) |
| CH3 : | CH3 single-trace and 2- to 4-trace display combined with other channel (s) |
| CH4 : | CH4 single-trace and 2- to 4-trace display combined with other channel (s) |
| ADD : | CH1 + (±CH2) or CH3 + (±CH4) added waveform and 2- to 4-trace display combination with other channel (s) |
| ALT : | Alternate method signal display |
| CHOP: | Chop method signal display |
| Polarity reversal | Applicable to CH2 and CH4. |
| Bandwidth limiting | Approx. 20MHz -3dB |
| Chopping frequency | Approx. 500kHz |
| Inter-channel delay time difference | Between CH1 and CH4: 0.5ns or less |
| Max. undistorted amplitude | 8div. or more (DC to 100MHz) |
| △Max. input withstand voltage | 800Vp-p or 400V (DC+AC peak) |

SPECIFICATIONS

| | |
|-------------------------------|--|
| Horizontal axis | |
| Operation modes | X-Y mode is switched with HORIZONTAL MODE. Y-axis: CH1 to CH4 and ADD X-axis: Selectable with trigger source. (CH1 to CH4) |
| Sensitivity | Same as vertical axis. |
| Input impedance | Same as vertical axis. |
| Frequency response DC | DC to 2MHz, within -3db |
| AC | 5Hz to 2MHz, within -3db |
| X-Y phase difference | 3° or less at 100kHz |
| △Max. input withstand voltage | Same as vertical axis. |
| Sweep | |
| Sweep method A | A sweep |
| A INT B | Simultaneous intensified B sweep during A sweep |
| ALT | Alternate A (A INT B) sweep and B sweep |
| B | B sweep |
| X-Y | X-Y oscilloscope operation |
| Sweep time A | 20ns/div. to 0.5s/div. ±2% (10 to 35°C), 1-2-5 steps, 23 ranges, ranges fine-adjustable |
| B | 20ns/div. to 50ms/div ±2% (10 to 35°C), 1-2-5 steps, 20 ranges |
| Sweep magnification | ×10±5% (Common to A and B) |
| Linearity | 20ns/div. to 0.5s/div. ±3% (×10MAG: ±5%) |
| Hold off | A sweep is continuously variable from NORM. |
| Trace separation | B sweep is continuously variable by approx. ±4 divisions with resp. to A sweep. |
| Delay method | Continuous delay, trigger delay and trigger count |
| Delay time | Continuous delay and trigger delay: 0.2 to 10 times as large as A SWEEP TIME/DIV. (Full scale at 5000 counts) |
| Trigger count | 1 to 2000 counts, max. operating frequency: 10MHz |
| Delay accuracy | ± (2% of set value+1% of full scale) + (0 to 100ns) |
| Delay jitter | 20000: 1 or less |
| Triggering | |
| A trigger modes | AUTO, NORM, SINGLE & FIX |
| Trigger sources V MODE | Triggered by input signal of lowest-number channel selected for vertical axis mode. |
| CH1 | Triggered by CH1 vertical axis input signal. |
| CH2 | Triggered by CH2 vertical axis input signal. |
| CH3 | Triggered by CH3 vertical axis input signal. |
| CH4 | Triggered by CH4 vertical axis input signal. |
| LINE | Triggered by commercial supply frequency. |
| Trigger coupling | AC, HF _{REF} DC, TV-F1, TV-F2, TV-LINE |
| Trigger level | Variable by ±90° with controller. |
| Polarity | Positive and negative |
| B trigger source | B starts after delay time B triggered after delay time |

SPECIFICATIONS

| | |
|---------------------------------------|---|
| Trigger sensitivity | Trigger count |
| coupling | Frequency range Minimum sync amplitude |
| DC | DC to 50MHz 1 div. |
| | DC to 100MHz 1.5 div. |
| AC | 20Hz to 50MHz 1 div. |
| | 20Hz to 100MHz 1.5 div. |
| HF _{REJ} | Increased minimum sync amplitude for above 10kHz. |
| TV F1 | 1.0 div. |
| TV F2 | 1.0 div. |
| TV LINE | 1.0 div. |
| | AUTO: Same as above specification for above 50Hz. |
| | FIX : Same as above specification for above 40Hz. |
| Jitter | 0.5ns or less at 100MHz at 2ns/div. sweep rate ($\times 10$ MAG on) |
| Intensity modulation | |
| Input voltage | Disappears at TTL-level positive voltage (2Vp-p or more). |
| Input impedance | 10k Ω or more |
| Frequency range | DC to 10MHz |
| Δ Max. input withstand voltage | 50V (DC+AC peak) |
| Others | |
| Program | Program mode (Storing and executing on-panel set values) |
| Programming range | Switches and controllers on panel, excluding power switch and CRT-related controls (Except for the HOLD switch) |
| Number of steps | 20 steps \times 5 (groups) |
| Step setting | With SET switch on front panel and program step terminals on rear panel |
| Trace rotation | Trace angle is adjustable with controller. |
| Calibration voltage | 1Vp-p \pm 1% (Positive polarity, 1 kHz \pm 3%, square wave) |

【Storage Section】

| | |
|--|----------------------|
| Vertical axes (CH1, CH2, CH3 & CH4) <For the DCS-9320, storage channels are only CH1 and CH2.> | |
| Vertical resolution | 8bits (25 dots/div.) |
| Dynamic range | ± 5 div. |
| Frequency response | DC |
| | AC |
| Equivalent sampling | DC |
| | AC |
| Rise time | |

Effective storage frequency: DC to 40MHz [16MHz] (Sine interpolation)
Effective storage frequency: 5Hz to 40MHz [16MHz] (Sine interpolation)
DC to 100MHz, within -3dB (5mV/div. to 5V/div.)
DC to 20MHz, within -3dB (1mV/div., 2mV/div.)
5 Hz to 100MHz, within -3dB (5mV/div. to 5V/div.)
5 Hz to 20MHz, within -3dB (1mV/div., 2mV/div.)
Effective rise time: 16ns [40ns] or less (Linear interpolation)

SPECIFICATIONS

| | |
|--|---|
| Memory capacity (Memory capacity used in each mode) | |
| NORM sampling | Display memory (for data) 2K words/channel (200 dots/div.) Display memory (for REF) 2K words/channel Acquisition memory 16K words/channel REF memory 16K words/channel |
| Equivalent sampling | Display memory (for data) 2K words/channel (200 dots/div.) Display memory (for REF) 2K words/channel Acquisition memory 2K words/channel REF memory 2K words/channel |
| Roll mode | Display memory (for data) 2K words/channel (200 dots/div.) Display memory (for REF) 2K words/channel Acquisition memory 16K words/channel REF memory 16K words/channel |
| Memory backup | Backed up by battery for approx. 30000 hours (at room temp.) REF memory 16K words/channel |
| Sweep time and display mode | |
| NORM sampling | 20ns/div. to 500s/div. (Magnification range: 20ns/div. 1ns [2ns]/div.) (Max. sampling speed: 100Ms/s [40Ms/s]) |
| Peak detector | 10 μ s/div to 500s/div |
| Equivalent sampling | 20ns/div to 1 μ s [2 μ s]/div |
| Roll mode | 0.2s/div to 500s/div |
| Storage method | |
| NORM | Data is updated every time trigger is input. |
| SINGLE | Saves data after storage. |
| AVG | Average by adding 2, 4, 8, 16, 32, 64, 128 and 256 times |
| PEAK | Detects glitch of width up to 50ns. |
| ROLL | Records and updates data continuously on CRT. |
| Equivalent sampling | Random |
| Memory size | 2K words/CH, 16K words/CH, 2K words \times 8/channel |
| Magnification and contraction | |
| Magnification | Data is magnified by setting SWEEP TIME/DIV faster than current sweep time in hold state. (Magnified up to \times 100 away from the screen center.) |
| Contraction | Data is contracted by setting SWEEP TIME/DIV slower than current sweep time in hold state. (Contracted down to 1/10, or 8 div on screen, toward the start point on the screen; down to 50 ms in B sweep.) |
| Interpolation | Linear interpolation, sine interpolation and spline interpolation |
| Triggering | |
| Pre-trigger | 0 to 80 div. (1-division-step setting, div. display or time display) 0 to 10 div. (when MEMORY SIZE menu is set to 2k) |
| Post-trigger | 0 to 10000 div. (1-division-step setting, div. display or time display) |

SPECIFICATIONS

| | |
|--|---|
| B trigger | B starts after delay time B triggered after delay time Trigger count: 1 to 2000 counts |
| X-Y | |
| NORM Equivalent sampling | DC to 40MHz [16MHz] (Sampling speed is adjustable with SWBBP TIME/DIV.) DC to 100MHz |
| Others | |
| Waveform operation GO/NO-GO Judgment error AUTO SET Operation mode Set value Operation range | + , - , × , ÷ (CH1-CH2 and CH3-CH4 operation) Judged in cursor-set condition range. (Output terminal on rear panel) Cursor-set condition range within ±0.5 divisions Automatic range setting in accordance with input waveform. (Auto set operation is possible in the real-time mode) Vertical only, horizontal only, and both vertical and horizontal Vertical (peak value): 2 div (1 to 3 div), 4 div (2 to 4 div) Horizontal (cycle) : 2 div (1 to 3 cycles), 4 div (3 to 7 cycles) 2mVp-p to 40Vp-p, 50Hz to 5MHz (Range where fix triggering is possible) |
| PEN OUT (Hard copy of CRT screen) | |
| Y-axis output voltage X-axis output voltage Pen lift Output impedance Readout speed | 0.5V/div ±5% 0.5V/div ±5% TTL-level; Low level during pen down motion X- and Y-axis: Approx. 2kΩ Pen lift : TTL OUT 10ms, 50ms, 100ms & 500ms/word |
| PLOT OUT (Hard copy of CRT screen) | |
| Through RS-232C Output Baud rate Transmission format Signal | Via RS-232C using HP-GL command, data transfer only, RS-232C/GP-IB selection is allowed (with the DIP switches on the rear panel.) 9600/4800/2400/1200 bps Data length: 7/8 bits, parity setting is possible, stop bits: fixed to 2 bits, hardware hand shake FG (Frame Ground) Frame ground SD (Send Data) Send data → Plotter RD (Receive Data) Receive data ← Plotter RS (Request to Send) Request to send → Plotter CS (Clear to Send) Clear to send ← Plotter DR (Data Set Ready) Data set ready ← Plotter (Request to send from plotter) ER (Data Terminal Ready) Data terminal ready → Plotter (Permission to send from plotter) SG (Signal Ground) Signal ground |

SPECIFICATIONS

| <p>Connection</p> <p>Through GP-IB Output</p> | <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; text-align: left;">DCS-9XX0 side</th> <th style="width: 10%;"></th> <th style="width: 50%; text-align: right;">Plotter side</th> </tr> </thead> <tbody> <tr> <td>1 Shield</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Shield 1</td> </tr> <tr> <td>2 Blue</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Red 2 SD</td> </tr> <tr> <td>3 Red</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Blue 3 RD</td> </tr> <tr> <td>4 Gray</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Yellow 4 RS</td> </tr> <tr> <td>5 Brown</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Green 5 CS</td> </tr> <tr> <td>6 Yellow</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Gray 6 DR</td> </tr> <tr> <td>7 Black</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Black 7 SG</td> </tr> <tr> <td>8 -</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">- 8</td> </tr> <tr> <td>20 Green</td> <td style="text-align: center;">—————</td> <td style="text-align: right;">Brown 20 ER</td> </tr> </tbody> </table> <p>Via GP-IB using HP-GL command (applicable to HP-GL plotter made by EPSON), talk-only, RS-232C/GP-IB selection is allowed (with the DIP switches on the rear panel).</p> | DCS-9XX0 side | | Plotter side | 1 Shield | ————— | Shield 1 | 2 Blue | ————— | Red 2 SD | 3 Red | ————— | Blue 3 RD | 4 Gray | ————— | Yellow 4 RS | 5 Brown | ————— | Green 5 CS | 6 Yellow | ————— | Gray 6 DR | 7 Black | ————— | Black 7 SG | 8 - | ————— | - 8 | 20 Green | ————— | Brown 20 ER |
|--|---|---------------|--|--------------|----------|-------|----------|--------|-------|----------|-------|-------|-----------|--------|-------|-------------|---------|-------|------------|----------|-------|-----------|---------|-------|------------|-----|-------|-----|----------|-------|-------------|
| DCS-9XX0 side | | Plotter side | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 Shield | ————— | Shield 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 Blue | ————— | Red 2 SD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 Red | ————— | Blue 3 RD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 Gray | ————— | Yellow 4 RS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 Brown | ————— | Green 5 CS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 Yellow | ————— | Gray 6 DR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 Black | ————— | Black 7 SG | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 - | ————— | - 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 Green | ————— | Brown 20 ER | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

【Readout Section】

| | |
|--|---|
| Calendar | |
| <p>Display</p> <p>Clock accuracy</p> <p>Battery life</p> <p>Trigger time stamp</p> | <p>Year, month, day, o'clock, & minute</p> <p>±2 minutes/month</p> <p>Approx. 30000 hours (at room temp.)</p> <p>Displays time when trigger is input in storage mode (single sweep).</p> |
| Set value | |
| <p>Vertical axis</p> <p>Horizontal axis</p> <p>Trigger</p> <p>Storage</p> <p>Others</p> | <p>CH1 to CH4 scale factors (with probe detection), GND, AC/DC, V-UNCAL, ADD, INVERT, BW</p> <p>(A, B) sweep scale factors (magnification conversion), SWEEP VARIABLE UNCAL, X-Y (Channel selected as trigger source is displayed.)</p> <p>Delay time and trigger count</p> <p>Sampling speed in X-Y display mode, waveform operation (+, -, ×, ÷), operation channel specification (CH1 to CH4) <For the DCS-9320, storage channels are only CH1 and CH2>, display scroll, average number setting, trigger point display (pre-trigger, post-trigger), equivalent sampling, roll, REF memory set conditions</p> <p>Auto step display, trigger time stamp display, SRQ, comment display (for 10 screens), automatic waveform parameter measurement</p> |
| Automatic waveform parameter measurement | |
| <p>PERIOD</p> <p>FREQUENCY</p> <p>PULSE WIDTH</p> <p>RISE TIME</p> <p>FALL TIME</p> <p>DELAY TIME</p> | <p>Automatic measurement of period of trigger source waveform</p> <p>Automatic measurement of frequency of trigger source waveform</p> <p>Automatic measurement of pulse width of trigger source waveform (Automatic positive/negative selection)</p> <p>Automatic measurement of rise time of trigger source waveform</p> <p>Automatic measurement of fall time of trigger source waveform</p> <p>Automatic measurement of time difference between trigger source waveform and waveform in channel specified on menu</p> |

SPECIFICATIONS

| | | | | | | | | | | | | | | | | | | | | | |
|---------------------------|---|-------------|---|-------------|---|-------------|---|-------------|---|--------------|---|--------------|---|------------|---|--------------|---|-------|---|-------|---|
| OVER SHOOT | Over-shoot of trigger source waveform is displayed in percentage based on amplitude | | | | | | | | | | | | | | | | | | | | |
| UNDER SHOOT | Under-shoot of trigger source waveform is displayed in percentage based on amplitude | | | | | | | | | | | | | | | | | | | | |
| PEAK TO PEAK | Automatic measurement of peak-to-peak voltage of trigger source waveform | | | | | | | | | | | | | | | | | | | | |
| VRMS | Automatic measurement of effective voltage of trigger source waveform | | | | | | | | | | | | | | | | | | | | |
| TOP LEVEL | Automatic measurement of top level of trigger source waveform | | | | | | | | | | | | | | | | | | | | |
| BASE LEVEL | Automatic measurement of base level of trigger source waveform | | | | | | | | | | | | | | | | | | | | |
| AMPLITUDE | Automatic measurement of amplitude of trigger source waveform | | | | | | | | | | | | | | | | | | | | |
| POWER | Automatic measurement of average power from trigger source voltage waveform and current waveform in channel specified on menu | | | | | | | | | | | | | | | | | | | | |
| Cursor measurement | | | | | | | | | | | | | | | | | | | | | |
| Cursor modes | <table border="0"> <tr> <td>$\Delta V1$</td> <td>Voltage measurement between ΔREF and $\Delta cursor$ using CH1 scale factor</td> </tr> <tr> <td>$\Delta V2$</td> <td>Voltage measurement between ΔREF and $\Delta cursor$ using CH2 scale factor</td> </tr> <tr> <td>$\Delta V3$</td> <td>Voltage measurement between ΔREF and $\Delta cursor$ using CH3 scale factor</td> </tr> <tr> <td>$\Delta V4$</td> <td>Voltage measurement between ΔREF and $\Delta cursor$ using CH4 scale factor</td> </tr> <tr> <td>$\Delta V12$</td> <td>Voltage measurement between ΔREF and $\Delta cursor$ using CH1 or CH2 scale factor (when ADD key is ON state)</td> </tr> <tr> <td>$\Delta V34$</td> <td>Voltage measurement between ΔREF and $\Delta cursor$ using CH3 or CH4 scale factor (when ADD key is ON state)</td> </tr> <tr> <td>ΔT</td> <td>Time difference measurement between ΔREF and $\Delta cursor$ using sweep scale factor</td> </tr> <tr> <td>$1/\Delta T$</td> <td>Frequency measurement between ΔREF and $\Delta cursor$ using sweep scale factor</td> </tr> <tr> <td>RATIO</td> <td>Voltage ratio and time ratio measurement between ΔREF and $\Delta cursor$ based on 5 divisions on CRT as 100%</td> </tr> <tr> <td>PHASE</td> <td>Phase difference measurement between ΔREF and $\Delta cursor$ based on 5 divisions on CRT as 360°</td> </tr> </table> | $\Delta V1$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH1 scale factor | $\Delta V2$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH2 scale factor | $\Delta V3$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH3 scale factor | $\Delta V4$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH4 scale factor | $\Delta V12$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH1 or CH2 scale factor (when ADD key is ON state) | $\Delta V34$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH3 or CH4 scale factor (when ADD key is ON state) | ΔT | Time difference measurement between ΔREF and $\Delta cursor$ using sweep scale factor | $1/\Delta T$ | Frequency measurement between ΔREF and $\Delta cursor$ using sweep scale factor | RATIO | Voltage ratio and time ratio measurement between ΔREF and $\Delta cursor$ based on 5 divisions on CRT as 100% | PHASE | Phase difference measurement between ΔREF and $\Delta cursor$ based on 5 divisions on CRT as 360° |
| $\Delta V1$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH1 scale factor | | | | | | | | | | | | | | | | | | | | |
| $\Delta V2$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH2 scale factor | | | | | | | | | | | | | | | | | | | | |
| $\Delta V3$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH3 scale factor | | | | | | | | | | | | | | | | | | | | |
| $\Delta V4$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH4 scale factor | | | | | | | | | | | | | | | | | | | | |
| $\Delta V12$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH1 or CH2 scale factor (when ADD key is ON state) | | | | | | | | | | | | | | | | | | | | |
| $\Delta V34$ | Voltage measurement between ΔREF and $\Delta cursor$ using CH3 or CH4 scale factor (when ADD key is ON state) | | | | | | | | | | | | | | | | | | | | |
| ΔT | Time difference measurement between ΔREF and $\Delta cursor$ using sweep scale factor | | | | | | | | | | | | | | | | | | | | |
| $1/\Delta T$ | Frequency measurement between ΔREF and $\Delta cursor$ using sweep scale factor | | | | | | | | | | | | | | | | | | | | |
| RATIO | Voltage ratio and time ratio measurement between ΔREF and $\Delta cursor$ based on 5 divisions on CRT as 100% | | | | | | | | | | | | | | | | | | | | |
| PHASE | Phase difference measurement between ΔREF and $\Delta cursor$ based on 5 divisions on CRT as 360° | | | | | | | | | | | | | | | | | | | | |
| Tracking | $\Delta cursor$ links with ΔREF cursor operation. | | | | | | | | | | | | | | | | | | | | |
| Measurement resolution | 10 bits | | | | | | | | | | | | | | | | | | | | |
| Measurement error | ±3% | | | | | | | | | | | | | | | | | | | | |
| Measurement range | | | | | | | | | | | | | | | | | | | | | |
| Vertical | ±3.6 divisions or more from CRT center | | | | | | | | | | | | | | | | | | | | |
| Horizontal | ±4.6 divisions or more from CRT center | | | | | | | | | | | | | | | | | | | | |

【Power Supply Section】

| | |
|-------------------|--------------------------------------|
| Supply voltage | 90 to 250VAC (2 ranges), 48 to 440Hz |
| Power consumption | Max. approx. 130W |

【Other Specifications】

| | |
|---|-------------|
| Dimensions and weight (Values enclosed in parentheses include protrusions.) | |
| Width | 310mm (350) |
| Height | 150mm (163) |
| Depth | 460mm (515) |
| Weight | Approx. 9kg |

SPECIFICATIONS

| | |
|------------------------------------|--|
| Operating temperature and humidity | |
| Within specification temperature | 10 to 35°C |
| Within specification humidity | 85% or less |
| Operating temp. and humid. | 0 to 50°C, 85% or less (No dew condensation) |
| Accessories | |
| Probes | PC-31 4 (Compatible with readout function) |
| Attenuation | 1/10 |
| Input impedance | 10MΩ±1%, 14pF±10% |
| Power cord | 1 |
| Instruction manual | 1 copy |
| Replacement fuses | 2 |

【Interface】

| | |
|---|---|
| GP-IB (Compliant with IEEE-488 1978) | |
| Operation | Waveform input/output, panel data output and control; (TALK/LISTEN) Outputting data on screen to plotter (GP-IB/talk-only/RS-232C selection is allowed.) |
| Command | 69 commands |
| Data accuracy | |
| Waveform data | 8 bits (Same as storage section.) |
| Cursor data | 10 bits (Same as readout section.) |
| Analog control data | ±0.5 div. (Div. display section) (% display section not specified) |
| RS-232C EIA Standard (Plot out only; Refer to the description on plot out.) | |

■ The specifications are subject to change without notice.

SAFETY

SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

Line voltage

This instrument operates using ac-power input voltages that 100/120/220/240 V at frequencies from 50 Hz to 60 Hz.

Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.







| Plug configuration | Power cord and plug type | Factory installed instrument fuse | Line cord plug fuse | Parts No. for power cord |
|---|---|--|---------------------|--------------------------|
|  | North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC) | 5 A, 250 V Slow blow 6x30 mm | None | Cord: E30-1951-05 |
|  | Universal Europe 220 volt/50 Hz Rated 16 amp | North Europe 5 A, 250 V Slow blow 6x20 mm Other Europe 5 A, 250 V V Slow blow 6x30 mm | None | Cord: E30-1819-15 |
|  | U.K. 240 volt/50 Hz Rated 13 amp | 5 A, 250 V Slow blow 6x30 mm | 0.8 A Type C | — |
|  | Australian 240 volt/50 Hz Rated 10 amp | 5 A, 250 V Slow blow 6x30 mm | None | Cord: E30-1953-05 |
|  | North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC) | 5 A, 250 V Slow blow 6x30 mm | None | — |
|  | Switzerland 240 volt/50 Hz Rated 10 amp | 5 A, 250 V Slow blow 6x30 mm | None | — |

Fig. 1 Power Input Voltage Configuration

CIRCUIT DESCRIPTION

Vertical Unit (X73-1900-00)

This unit is composed of 12 circuits described below and has the purpose of providing the Y axis of the oscilloscope.

1. 1st ATT

Each of the attenuators of CH1 to CH4 controls the internal relays according to the signal sent from the panel to switch between 1/1, 1/10, 1/100, 1/1000 and AC/DC/GND.

2. Head Amplifiers

Each of the HEAD amplifiers of CH1 to CH4 is composed of KMC-04. The first stage is terminated with 1 megohm and converts the impedance of the signal from the attenuator. A 4x amplifier is added to the latter stage.

3. 2nd ATT

Each of the 2nd attenuators of CH1 to CH4 operates the two relays (K101 and K102 with CH1) according to the signal sent from the panel to switch between 1/2 and 1/4.

4. MAG Amplifiers

Each of the MAG amplifiers of CH1 to CH4 is composed of a relay (K103 with CH1) and opamp (U102 with CH1) and selects whether 5x magnified amplification is applied or not according to the signal sent from the panel. In case 5x amplification is applied (MAG), the signal from the 2nd attenuator is input to the 5x non-inverting amplifier and output to the amplifier of the next stage.

5. VARI Amplifiers

Each of the VARI amplifiers of CH1 to CH4 incorporates an inversion circuit and variation circuit so that the variation amount can be determined according to the amplitude of the analog signal from the Read-Out Unit. The amplifiers of CH1 and CH3 do not incorporate the inversion function but they are still provided with the inversion circuits to assure circuit stability. Each amplifier converts the single-ended signal from the MAG amplifier into differential signal and applies 4x amplification.

6. POSI Amplifiers

Each of the POSI amplifiers of CH1 to CH4 inputs the position signal from the panel and the signal from the VARI amplifier and outputs a signal to which DC bias is applied according to the position signal amount.

7. V-SINGLE Amplifiers

Each of the SINGLE amplifiers of CH1 to CH4 converts differential signal into single-ended signal. As this makes the signal possible to be input to the A/D converter, it is output from the V Unit towards the A/D Unit.

8. Channel Switch

Three channel switching amplifiers are provided for the vertical circuitry and three for the horizontal circuitry. Each of the amplifiers inputs two difference signals and output either or the sum of them for use in V-MODE setting and TRIG-SOURCE setting. The channel switches in the vertical circuitry include U501 for switching between CH1 and CH2, U502 for switching between CH3 and CH4 and U503 for switching between the U501 output and U502 output, and they are controlled according to the signal from the panel. The channel switches in the horizontal circuitry include U601 for switching between CH1 and CH2, U602 for switching between CH3 and CH4 and U603 for

switching between the U601 output and U602 output, and they are also controlled according to the signal from the panel.

9. Delay Line Drivers

The differential signal output from the channel switch U503 is input to the emitter-followers of Q501 and Q502, the outputs of which have some frequency response correcting resistors and capacitors attached to them. Transistors Q503, Q504 and Q505 form the circuit which varies the vertical signal positioning amount according to the voltage from the Horizontal Unit that indicates the trace separation shifting amount. Q503 is the current source which supplies the collector current to Q504 and Q505. The trace separation amount is input to the base of Q505 to control the currents of the collectors of Q504 and Q505. This changes the base voltages input to Q506 and Q507 therefore the position is varied. Q506 and Q507 are emitted-grounded differential amplifiers and the delay line is driven by the outputs of these transistors. Q508 and Q509 are used as band-wise switches.

10. Decoder

The decoder is composed of U506, U507, U508, Q510, Q511, Q512, Q513, Q514 and Q515, and is used to generate the control signal to be input to the channel switches of the vertical circuitry for use as their control signal. The signals input to the decoder circuit are the serial data from the Read-Out Unit and the signal switching timing (VCK) signal from the Horizontal Unit. The decoder circuit makes it possible to output traces of multiple phenomena simultaneously on the oscilloscope's CRT or to output the CH1+CH2 and CH3+CH4 waveforms.

11. Latch

The latch circuit is composed of U1, U2, U3, U4, U5, U6 and U7, and is used to convert the serial data from the Read-Out Unit into parallel data and latch it. This makes it possible to control the switching signal of the Vertical Unit using two clock signal lines and one data line.

12. H-SINGLE Amplifier

The H-single amplifier is composed of U604, U605, Q601 and Q602, and is used to adjust the X signal. The X-GAIN is adjusted by applying the analog signal from the Read-Out Unit to pin 5 of U605 and supplying its output to the analog switch of Q601 and Q602. The X-OFFSET is adjusted by applying the analog signal from the Read-Out Unit to pin 2 of U605 and supplying its output to the offset adjustment terminal of U604. The input to this circuit is a differential signal, which is converted into a single-ended signal before being output.

Horizontal Unit (X74-1530-00)

This unit has the purpose of providing the X axis and Z axis of the oscilloscope.

The trigger signal from the V Unit is input to this unit through Q1 and Q2.

The signal is amplified by the trigger amp and converted from analog to digital. The waveform is rectified by U11 and the sweep gate is generated by U34.

When TV signal is input, it is not sent through the trigger amp but sent to the special video amp (U5, U6) for amplification then to

CIRCUIT DESCRIPTION

U7 for sync separation. The sync signal is input to U34 for generating the sweep gate. This circuit is designed so that, when the sweep gate is turned ON, the sawtooth wave from U18 is output and, when the sawtooth signal attains a certain level, the sweep gate is turned OFF by Q15, Q16 and U21.

The delayed sweep signal which uses U18 as the main sweep signal is output from U19.

The respective blanking signals are input from U13 to U14, mixed with the blanking signal of the storage mode, and the obtained signal is output from Q49 as the unblanking signal to be sent to the High Voltage Unit (X68-1590-00).

Transistors Q26 to Q32 are used to select one of the main sweep signal, delayed sweep signal and the X signal of the X-Y mode. The selected signal is input to U24, mixed with the POSI signal to become differential signals X+ and X-, which are input to the H final amp via P16.

With the random sampling, the time-domain information of the data at the moment it is sampled with random sampling is obtained by sampling-and-holding of sawtooth wave by Q35 to Q38 and U26.

Final Unit (X80-1140-00)

This unit has the purpose of amplifying the signals from the V and H Units until the levels high enough to drive the CRT.

From the V Unit (X73-1900-00), the V signal is input to Q1 and Q2 via the delay line. At U1, the V signal is mixed with the Y signal of R/O. The mixed signal is amplified by Q9 to Q14 and supplied to the CRT.

From the H Unit (X74-1530), the H signal is input to Q101 and Q102. At U2, the H signal is mixed with the X signal of R/O. The mixed signal is amplified by Q107 to Q118 and supplied to the CRT.

A/D Unit (X78-1070-00)

This unit has the purpose of sampling analog signals and writing the obtained data in memory.

After A/D conversion by U102 and U202, the level of the signal is converted from ECL to TTL, by U103 and U104 in case of CH1/3 signal or by U203 and U204 in case of CH2/4 signal. The signal is input to U105 (CH1/3) or U205 (CH2/4) for peak detection and the distribution to the 4 memory phase inside it, and recorded in the memory of U106, U107, U108 and U109 (CH1/3) or U206, U207, U208 and U209 (CH2/4). The recorded data is read out by the ADO1 to ADO4 signals and output to the Storage Unit (X77-1660-00) through the data bus connected to the connectors of P56 and P57 (D0 to D7 with CH1/3, D8 to D15 with CH2/4).

The memory write operation is performed at the positive-going timing of LAT4 (pin 10 of P30) when ADRW (pin 15 of P30) is "L", ADRW (pin 16 of P30) is "H" and MEMWE (pin 20 of P56) is "L". For the memory read operation, while ADRW is "H", ADRW is "L" and DMA1,2 (with CH1/2) or DMA3,4 (with CH3/4) is "L", the data in U106 or U206 is read when ADO1 goes "L", data in U107 or U207 is read when ADO2 goes "L", data in U108 or U208 is read when ADO3 goes "L" and data in U109 or U209 is read when ADO4 goes "L".

Clocks with inverted phase are input to pins 20 and 21 of A/D converters U102 and U202. The A/D conversions are performed at their timings and digital data are output from U102 and U202. U1 is the clock receiver which receives clock from the Time Base Unit (X71-1150-00) and generates the clocks input to the A/D converter.

Gate arrays U105 and U205 have the internal configuration as shown in Fig. 2. The timing of LAT1, LAT2, LAT3 and LAT4 is as shown in Fig. 3 so data is recorded in the order of from memory U106 (U206), U107 (U207), U108 (U208) and U109 (U209). The clocks of ADO1, ADO2, ADO3 and ADO4 are as shown in Fig. 4, and they are read out in the same order as they are written. The peak value is detected with the configuration shown in Fig. 1. The data is latched (latch 1) based on the PCLK (pin 2 of P30) with the same frequency as the data output from the A/D converter and compared with the MIN value data which has been latched by latch 2 in comparator 1. As a result, in case the data in latch 2 is smaller than the data in latch 1, comparator 1 outputs the clock and the data in latch 1 is latched by latch 2. As a result, latch 2 stores the MIN value data in it. In the same manner as above, the MAX value data is stored by latch 3 and comparator 2. The data are transferred to latch 4 and latch 5 based on the PWCK with the same frequency as SWEEP TIME, and the data is recalled from selector 1 according to the three modes of MIN, MAX and MIN/MAX alternate detection.

CIRCUIT DESCRIPTION

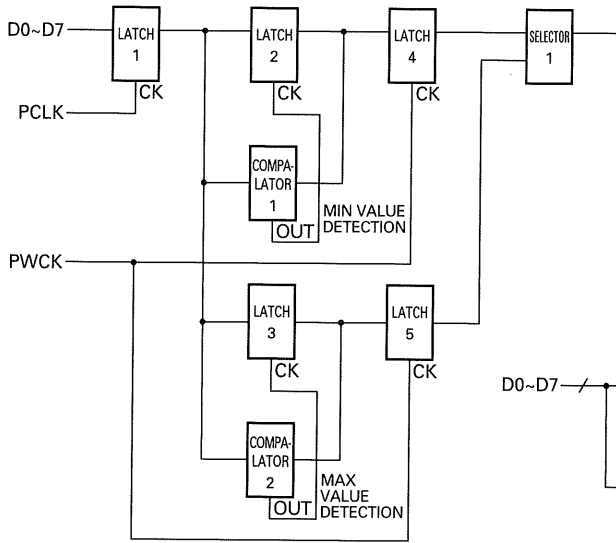


Fig. 1 Block Diagram of Peak Detector Circuit in Gate Array

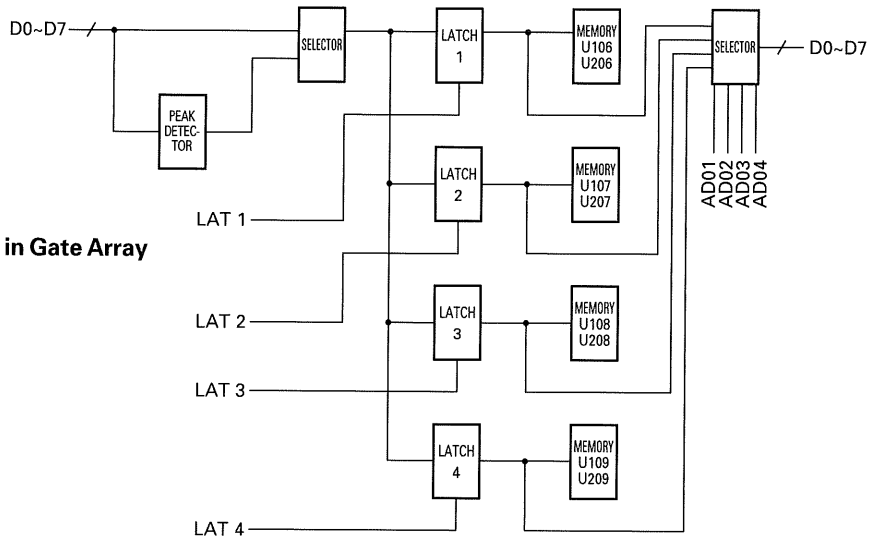


Fig. 2 Internal Block Diagram of Gate Array

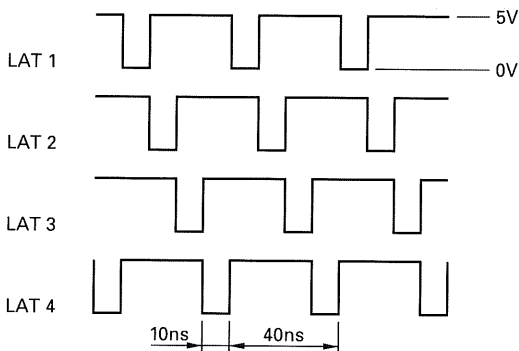


Fig. 3 Clocks LAT1, LAT2, LAT3 and LAT4
When the SWEEP TIME is 2 μs/div. or more

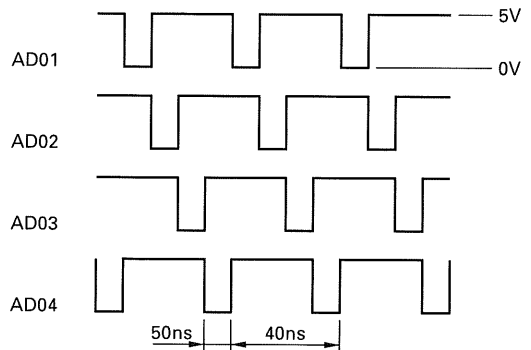


Fig. 4 Clocks ADO1, ADO2, ADO3, ADO4

CIRCUIT DESCRIPTION

Time Base Unit (X71-1150-00)

This unit is composed of 18 circuits described below and has the purpose of generating the timing of the A/D converter.

(1) 200 MHz oscillator

The oscillation by X'tal X1 is amplified by Q6. The oscillation condition is set by trimmer TC2. After impedance conversion by the emitter-follower of Q3, the oscillation signal is input to pin 11 of U3d and set to the ECL level.

(2) CLK divider circuit

The 200 MHz clock is divided by U1b to 1/2, or 100 MHz. Also, a 1/5 divider circuit is formed by U1a, U2 and U3a to divide 200 MHz into 40 MHz. This 40 MHz is input to U56a for level conversion from ECL to TTL and input to U4, where it is divided into 20 MHz and 10 MHz. The 20 MHz clock is then input to U5a, where 2 MHz and 1 MHz are generated from 4 MHz using U6a. The 2 MHz is divided by U5b into 400 kHz. The 400 kHz is further divided into 200 kHz and 100 kHz by U6b and into 400 kHz down to 0.4 Hz by U7 and U8. The dividing ratio of U7 and U8 is determined by the codes (TBCD0 to TBCD4) sent from the U15 according to the sweep time setting.

(3) CLK selector circuit

The clock signals generated by the CLK divider circuit are selected by U9. The selection is made according to the sweep time setting. The sweep time codes (TBCD5 to TBCD7) are sent from U15 to U9 and the corresponding clock is output at pin 6 of U9.

(4) PEAK DET controller circuit

U11, U52b, U10abd and U61d are in charge of control at the time of peak detection. U52b, U10abc and U61d are used to take the timing with G/A in the A/D Unit. U11 is used to select between the AD clock and LATCH clock. U11 is controlled by U17 and pin 2 outputs the AD clock and pin 15 outputs the LATCH clock. At the time of peak detection, 40 MHz is output as the AD clock.

(5) AD CLK adjustment circuit

DL1 and P1 form the circuit for taking the timing between the A/D data and LATCH clock. With this circuit, the position of P1 is adjusted while monitoring the test pins (J2, J3) of the A/D Unit so that the LATCH clock comes on the center of the A/D data.

(6) AD CLK buffer

U16abc send the clock signal from the AD CLK adjustment circuit to the A/D Unit together with a clock with inverted phase. These signals are used as the clock signals (ADCK12, ADCK34) of the AD converter.

(7) LATCH CLK circuit

The LATCH clock output from U11 is converted by U12 and U13 into 4-phase LATCH clock signals, which are output as LAT1 to LAT4. These signals are sent to the A/D Unit for use as the LATCH clocks inside the G/A. Two of these signals (LAT1, LAT3) are also used for various control operations inside the Time Base Unit. The LATCH CLK circuit is controlled by the SGA controller circuit which is described below. However, in the roll mode and during pre-triggering, it outputs 4-phase clock signals regardless of the SGA controller.

(8) SGA controller circuit

This circuit is composed of U14, U48, U3bc, U49d, U50c and Q1,

and is used to start the LATCH CLK circuit in synchronism with the SGA signal. This circuit operates so that SGA can be accepted when ADR_W is "H", and the LATCH CLK circuit is activated when $Q_$ of U14b goes "H". However, this circuit does not function in roll mode and during pre-triggering.

(9) Memory Write CLK controller circuit

This circuit is composed of U42, U43a, U44bc and U46d, and is used to generate the Write Enable signal of the ACQ memory (A/D Unit) and the clock for the address counter of the memory from LAT1 and LAT3 sent from the LATCH CLK circuit. The ACQ memory (A/D Unit) Write Enable signal is output from Q of U42a as $MEM\ WE_$. This signal is used by the EQU sampling control circuit and by the $ADR/W_$ generator, which is used during rolling, in the pre/post delay counter circuit. These circuits will be described later. The clock signal for the memory address counter is output from pin 11 of U46d.

(10) Fast memory counter circuit

The counter formed by U18, U19 and U20 sets the address of the ACQ memory (A/D Unit) and is used both in write and read. The write clock is sent from the memory Write CLK controller circuit (pin 11 of U46d) which is described above, and the read clock is sent from the DMA controller circuit (pin 3, U46a). The write end signals for memory sizes of 2K and 16K are generated from this counter except during pre-triggering and in the roll mode. The signal from pin 11 of U51d indicates the end of write of 2K memory and the signal from $Q_$ of U43b indicates the end of write of 16K memory. The signal is sent to the R/W controller circuit and write ends when $ADR/W_$ goes "H". The end of write during pre-triggering occurs when pin 7 of U33 in the pre/post delay counter circuit goes "H", and the end of write in the roll mode occurs when $Q(MEMWE_)$ of U42a is input to pin 3 of U52a, $Q_$ goes "L" and $ADR/W_$ goes "H".

(11) R/W controller circuit

This circuit is composed of U40, U45cd, U49a, U50ab, U51a and U52a, and is used to inform the Storage CPU of the ACQ memory data transfer by turning the $ADR/W_$ signal "H" when the memory count (16K, 2K, or 4 words in roll mode) set for the ACQ memory (A/D Unit) has been written. Upon receipt of this signal, the Storage CPU sends the AEN and DMAAK signals to the DMA controller and the data is transferred. When the data transfer completes, the Storage CPU sends $DLYCNTLD_$, which resets the R/W controller circuit and turns $ADR/W_$ "L", starting the stand-by for next data write (SGA stand-by). $ADR/W_$ is "L" during write or write stand-by of ACQ memory and "H" during DMA transfer and serial transfer (mode change), and it is used as the base of the operation of the Time Base Unit. In case of mode change, ALL RESET occurs, turning $ADDCNTLD_$ "L" and resetting all circuits to the initial status.

(12) DMA controller circuit

This circuit is composed of U37, U38, U39, U45b, U46a, U47ab and U49bc. When $ADR/W_$ goes "H", the Storage CPU sends AEN, DMAAK_ and DMARST_ to the DMA controller so the waveform data in the ACQ memory is sent to the data memory of the Storage CPU through DMA transfer. At this time, DMAAK is divided into 1/4 by U37 and sent to the fast memory counter

CIRCUIT DESCRIPTION

for use as the DMA read clock. AEN and DMAAK_ are processed by U38 and U39 to generate 4-phase memory select signals (ADO1, 2, 3 and 4), which are sent to the G/A of the A/D Unit. DMARST_ is output at the completion of DMA transfer of CH1 and CH2 or CH3 and CH4 and resets the DMA controller circuit. At the time of read-out, the start address in the ACQ memory is set by HC595 of U23 and U24.

(13) SGA enable counter circuit

This circuit is composed of U25, U26, U27, U41 and U44d, and functions only during pre-triggering. This counter circuit inhibits the acceptance of SGA until the ACQ memory has been written until the set pre-triggering value. The counter setting is specified by software and set in PRED0 to PRED11 in U28 and U36. The value set for the counter is $[\text{Pre-triggering setting value (div.)} * 50]$. The operation of the counter starts at the same time as the write in the ACQ memory. When the count attains the set count value, Q_ of U41a goes "H", the RESET terminal (pin 1) of U41b goes "H" at the same time, and acceptance of SGA is enabled by CK of U41b (pin 11). When SGA is accepted, Q_ of U41b goes "L", pin 4 (CE terminal) of U29 also goes "L" and the operation of the pre/post delay counter circuit is enabled.

(14) Pre/post delay counter circuit

This circuit is composed of U29, U30, U31, U32 and U33, and functions during pre-triggering or post-triggering. During pre-triggering, the value set for this counter differs depending on whether the memory size is 2K or 16K. The value set in the 2K mode is $[511 - N(\text{div.}) * 50]$ while the value set in the 16K mode is $[4095 - N(\text{div.}) * 50]$. During pre-triggering, the value set for the counter is decremented down as SGA is input and, when it is counted down to "0", ADR/W_ goes "H" and the write in the ACQ memory ends. During post-triggering, the value set for the counter is $[N(\text{div.}) * 50]$ regardless of the memory size. Similarly to the case of pre-triggering, the counter is decremented as SGA is input but, in this case, write in the ACQ memory starts when the counter is counted down to "0". "N" in the expressions above can be set up to 80 div with pre-triggering and up to 10,000 div. with post triggering. The counter is set by DLYD0 to DLYD19 of U34, U35 and U36.

(15) Pre-triggering address buffer

This buffer is composed of the line driver of U21 and U22, and is used during pre-triggering. Because the trigger point start address is not specified in the ACQ memory in pre-triggering, the trigger point address is calculated from the end address in the ACQ memory (the address where write was ended) using the set value. The end address can be read as follows; when ADR/W_ goes "H" to request the Storage CPU to transfer the waveform data in the ACQ memory, the Storage CPU sends the LADR signal so the end address is output to the CPU bus.

(16) Equivalent sampling controller circuit

This circuit is composed of U58d, U59 and U60d, and functions during equivalent sampling. This model is based on random sampling and this circuit generates the hold clock (EQA2) for the random sampling. This clock is generated by dividing MEMWE_ of the memory write CLK controller circuit described above, using U59. U60 is used to take the timing of equivalent sampling

during pre-triggering. The generated EQA2 signal is sent to the Horizontal Unit for use in sample & hold of sawtooth wave.

(17) WRITE LED controller circuit

This circuit is composed of U47f, U58ac, U51c, U60a and Q7. This circuit is used to light the WRITE LED on the panel and the signal is sent to the Panel Unit as the WRITE signal. This circuit operates as follows; when SGA is input while the ADR/W_ signal is "L", Q_ of U60a goes "L" and pin 3 of U58a goes "L" and Q7 is turned ON, lighting the WRITE LED. If the sweep time was set faster, this interval would become short and the WRITE LED lights hardly. To prevent this, the one-shot circuit of U60a works to turn Q7, that is, the WRITE LED lights for a certain period of time.

(18) AD REF power (-2 V)

This is the reference voltage generator circuit of AD converter CX1396D and composed of opamp U53a and transistor Q2. The power is supplied to pin 23 of the AD converter in the A/D Unit and determines the dynamic range of the AD converter. The reference voltage is -2 V.

Storage CPU Unit (X77-1660-0X)

This unit has the purpose of providing the waveforms required by the operating by calculating the stored waveform data.

The CPU (U1) is uPD70335GJ-8 (hereinafter V35+). The clock of the CPU is supplied from 16 MHz in X1 and the internal operation uses 8 MHz. The CPU has a 16-bit bus configuration. At the time power is turned ON, the CPU is reset by MB3771 of U44.

The system ROM is composed of U6 and U7, with U6 used for even channels and U7 for odd channels. It is a 64K byte memory. The system RAM is an 8K byte memory composed of U8 and U9.

U10 to U15 are used as the data memory and each memory chip has a capacity of 32K bytes. U10 and U11 are used for reference memory, U12 and U13 are used for computation memory and U14 and U15 are used for data memory. The reference memory is backed up even when the power is OFF by battery B1. The back-up circuit is composed of U20, D2 and D3. U94 checks the battery when the power is turned ON and, if the battery voltage is below about 2.4 V, pin 45 of V35+ goes "H" and the BATT DOWN indication appears.


The data sent from the ACQ memory by DMA transfer is written in the data memory of U14 and U15. The written data is processed by the computation memory of U12 and U13 in case computation or averaging is selected with the menu. The DMA transfer starts when ADR/W_ sent from the TBC Unit goes "H". To start the DMA transfer, pin 19 of the same output port outputs the DMAON signal to turn Q (pin 5) of the flip-flop of U88 "H" and this signal is input to pin 17 of the CPU (V35+) to set the DMA status. The signal is input to pin 19 of the CPU bus buffer of U2 and U3 to cut the data bus between the CPU.

The AEN signal, which is the DMA Transfer Enable signal, is output from pin 12 of U53 of the output port, and DMAAK (acknowledge signal) which is the transfer clock is output from pin 6 of U79. This signal is generated in U79 with R/W_ (pin 59), DMAAKO_ and MREQ_ which are output from V35+. DMARST_

CIRCUIT DESCRIPTION

which is the DMA transfer refresh and reset signal, is output from pin 2 of U52 of the output port. The DMA transfer occurs simultaneously on 2 channels. First, CH1 or CH2 is selected by DMA12_ output from pin 11 of U80, then CH3 or CH4 is selected by DMA34_ output from pin 8 of U80, and DMA transfer is started. The transfer data for odd channels is output at D0 to D7 and that for even channels is output at D8 to D15.

The data transferred from the ACQ memory to the data memory is sent to the display memory after having been processed. The display memory is provided by U21 and U22, each of which is an 8K byte memory. U21 stores the data and reference memory contents for CH1 and CH3 and U22 stores the data and reference memory contents of CH2 and CH4. These memories are read by 2K words per channel and 1 MHz per data so, everything can be read in a period of about 20 ms including the R/O period. The read-out timing is as shown below.

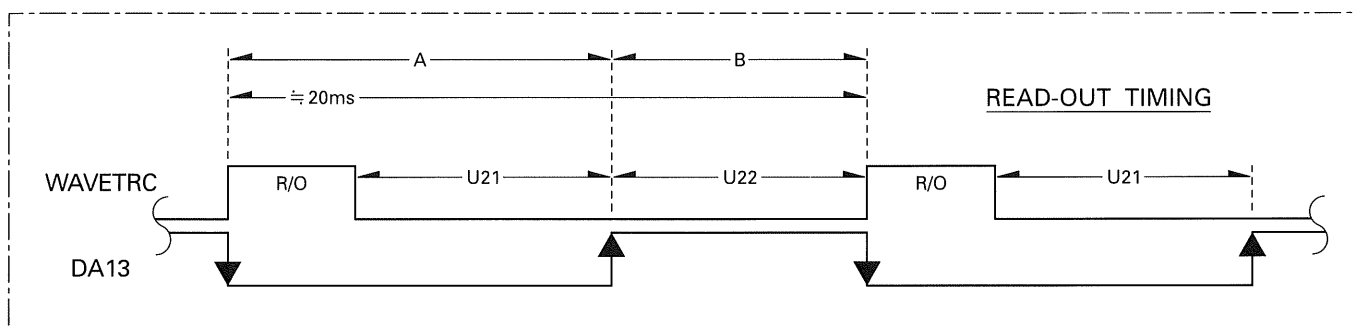

The write timing is set so that data is written in U22 in period A and in U21 in period B. In the X-Y display mode, data is written in the X-display memory of U19 in the R/O period of A. When signal DA13 for starting the write operation is output from pin 13 of the address counter of U38 and input to pins 33 and 40 of V35+, interrupt takes place and data is written in the respective memory. Bus buffer U16 is used with display memory U21, buffer U17 with display memory U22 and buffer U18 with the X-display memory. When writing in the display memory, the buffer to be used is selected using MEM1G of U91, MEM2G of U92 or MEM3G of U93 in the decoder circuit and R/W_ output from the CPU.

U37 and U38 are the address counter for the display memories. The clock for this counter is counted by 2 MHz sent from the TBC Unit. The display memory address counter formed by U37 and U38 is activated by the WAVETRG signal from the R/O Unit (refer to the read-out timing chart above). The WAVETRG signal is connected to pins 2 and 12 (CL terminals) of U37 and U38 and "H" state of this signal indicates the R/O period in which the counter is cleared (address 0). When the WAVETRG signal goes "L", the counter is activated based on the 2 MHz CLK connected to pin 1 of U37. The read-out address output from this counter is sent to the read/write switching circuit. This switching circuit is composed of U23 to U33, where U23 to U26 are used for switching the U21 (display memory for CH1 and CH3), U27 to U30 are used for switching the U22 (display memory for CH2 and CH3) and U31 to U33 are used for switching U19 (X-display

memory). The read/write switching signals used respectively by them are DA13_ from pin 18 of U93 with U21, MEM2 from pin 15 of decoder U92 with U22 and the WAVETRG signal sent from the R/O Unit with U19. With each of these signals, "L" selects the read-out address and "H" selects the write address. The data in display memories U21 and U22 are switched by U39 and U40. These memories are switched by DA13 shown in the chart above; the display memory U21 is selected when DA13 is "L" and the display memory U22 when it is "H", and the selected data is sent to the display memory latch (latch for STO-Y). When the memories of all channels have been read out, DA14 of the display counter causes pin 9 of U81 to output the MOJITRG signal; when this signal is sent to the R/O Unit, the R/O CPU outputs characters.

The circuit for selecting the output ports, communications read signal (ROIN), display memories, etc., is the decoder circuit, which is composed of U50, U74, U78, U79, U80, U82, U83, U84, U86, U90, U91 and U92. U90, U91 and U92 are programmable ICs (GAL). (For the decoder, read the description on the separate sheets.)

The data output from the display memories are selected by U39 and U40, input to the display data latch of U57 and latched by the signal which is generated by U89 using the clock (2 MHz) for the read address counter (pin 8). At this time, the address of the read-out address counter is input to the latch for STO-X of U59 and U61 and latched in the same manner as above. The data of the X-display memory is also latched by the latch for X-Y of U60.

CIRCUIT DESCRIPTION

The data latched by U57 is input to the D/A converter for STO-Y of U68, then the analog data from U68 is input to pin 5 of U72 and output from pin 7 of U72 (opamp) as STO-Y. The data latched by U59 and U61 are input to D/A converter for STO-X of U69. However, in case the display mode is X-Y, pin 6 of U64 goes "L" so the data to be input to U69 are switched over to the data latched in U60. The analog data output from U69 is input to pin 3 of U72 and output from pin 1 of U72 as STO-X. The order of data output channels are as shown in the figure below, and the corresponding blanking is provided by the blanking circuit composed of U93, U43, U41 and U42. (Refer to the diagram below as well as Fig. 5.)

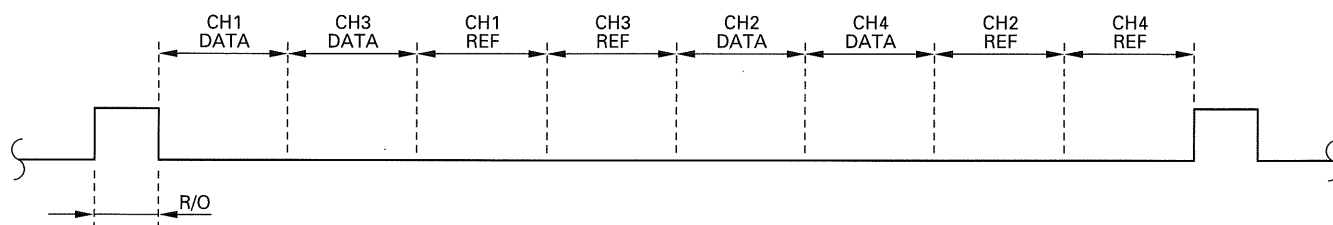


Fig. 5

The blanking circuit provides two kinds of blanking operations, the channel blanking applied when a channel is selected and the GRG blanking applied after reading every single data.

For the channel blanking operation, the CPU sets the condition in the latch of U42 according to the V-MODE setting on the panel and the REF memory setting. The set condition is input to U41 and, using the data set with the display counter signals of DA11 and DA12 input to pins 2 and 14 of U41 as the storage display gate, output from U41 as STB13 (pin 7) for CH1 and CH3 and as STB24 (pin 9) for CH2 and CH4. The Enable signals for CH1/3 and CH2/4 are based on signals DA13 and DA13_ which are input to pins 1 and 15 of U41. These signals are input to U93 (GAL), processed logically with signals such as WAVETRG, DA11 and DA12, and output as STBDAT (pin 13) and STBREF (pin 14). Position select signals DA112 and DA121, which are synchronized with the signals above, are output from pins 16 and 17 of U93 and input respectively to pins 10 and 9 of U66 and U67. At U66, the V position is selected from the V position signals CH1 to CH4, which are input to pins 12, 15, 14 and 11 based on DA13 and DA112 and output the V-POS1 voltage of the selected channel from pin 13 of U66. The output voltage is input to pin 12 of U65, where it is switched between the data memory position and reference memory position based on DA12 and DA121. The reference position voltage uses the trace separation potentiometer, and the voltage is input to pin 13 of U65 as TSEPA. After the position has been selected, the voltage is output from pin 13 as the YOFT signal, input to the amp for STO-Y (pin 6 of U72) and offset is applied there.

When the display channel is switched over, pin 13 of U43 outputs STOBLK to apply blanking for channel switching.

For the GRG blanking, pin 5 of U43 outputs the GRGBLK signal so that blanking is applied after having read every single data. This signal is output in synchronism with the read clock.

The compression blanking is possible when the memory mode

is 16K HOLD. When the compression is 1/10, the length of the trace on the CRT becomes 8 div. so a blanking is applied for the remaining 2 div. The compression blanking circuit is composed of U75, U81, U83 and U85. When the condition as described above occurs, the CMPBLK signal output from pin 12 of U54 of the output port goes "H" to activate the compression blanking circuit. In this operation, when the display counter has counted 1683 counts, pin 5 of U85 goes "H", this signal is input to pin 5 of U93 as the DFF signal and causes blanking.

The analog pen output circuit is composed of U86, latches U62, U63 and U64, D/A converters U70 and U71 and opamp U73. All of the data sets are software-controlled, and data is sent to the latches according to the data read-out rate set by the menu. U62 latches the STO-Y data and U63 and U64 latch the STO-X data. The latched data are sent to the D/A converters, the signal output from U70 (pin 18) is input to pin 3 of U73 and output from its pin 1 as the STPY signal. The signal output from U71 (pin 18) is input to pin 5 of U73 and output from its pin 7 as the STPX signal.

The communications with the R/O Unit occurs when a panel setting is changed, etc. The communications are serial in both directions and the data length is 16 bits. When a command is communicated from the R/O Unit to the Storage CPU, 16 data are transferred to U55 and U56 by ZD (Data) and ZSC (Shift Clock). When these 16 data have been prepared in U55 and U56, ZLC (Latch Clock) comes, making the Storage CPU possible to transmit data towards the data bus. This signal is also input to CK (pin 11) of U85 (F-F), turning Q_ (pin 8) of U85 "L", which is input to NMI (pin 30) of the CPU to cause priority interrupt processing. At the same time, U85 (pin 9) sends the StorageRDY signal to R/O Unit to inform it that the NMI processing is taking place. When the NMI processing starts, the CPU first reads the data prepared in U55 and U56. The data is read by turning OE (pin 13) of U55 and U56 "L" using ROIN_ of U50 (pin 10) of the decoder

CIRCUIT DESCRIPTION

circuit. When the data has been read, the port of pin 27 of V35+ outputs the NMI end signal. When this signal is input to pin 13 of U85 and this flip-flop is reset, the NMI processing completes and the stand-by for the next communication starts.

Inversely, in case of command communication from the Storage CPU to the R/O Unit, serial transfer from output ports YD, YSC and YLC (pins 9, 6 and 5) of U54 to the R/O Unit occurs. YD transfers the data, YSC transfers the shift CLK and YLC transfers the latch CLK in the same way as above.

The output ports mentioned above are composed with U52, U53 and U54. ADDCNTLD_ and DLYCNTLD_ which are sent to the TBC Unit are also output from the output ports of U53. The data of these output ports are latched by decoder U50.

Additionally, there are GP-IB I/O ports of U51. These ports are used to exchange data with GP-IB IC uPD7210 in the GP-IB Unit (X79-1120-00) and read the status of the DIP SW on the rear panel. The DIP SW status is sent to A1 to A8 of U51 when GPSW_ at pin 12 of U52 goes "L". This signal is also sent through U83 and input to pin 19 of U51 to enable it. Then, the GDIR signal at pin 1 of U91 goes "H" to make this IC input ports and the data is read. To exchange data with uPD7210, the GPWS_ and GPRD_ signals output from U91 writes data in or read it from uPD7210, and the GDIR signal mentioned above is switched in synchronism with these signals. The Enable signal for this operation is GPSEL_ at pin 13 of U51. According to it, the GD-IR signal at pin 1 is set to "H" when the IC is input ports and "L" when it is output ports. The set also has the RS-232C interface, which is controlled by signals from V35+. The control signals are RTS0 at pin 66 of V35+, RXD0 at its pin 10, CTS0_ at its pin 12 and TXD0 at its pin 13.

R/O Unit (X77-1670-0X)

The R/O Unit uses 8-bit general-purpose CPU Z80B to control the horizontal, vertical, storage and panel operations and output characters on the CRT. The R/O Unit can be divided roughly into the analog voltage controller block, input/output port block, switch input block, encoder input block, clock block, TV counter block and the CRT controller block.

There are four kinds of clocks used as the basis of IC operation timings, that are the main clock, R/O clock, AH clock and jitter clock.

The main clock is generated by the oscillator composed of an inverter (U96) and 6M ceralock (X1) and supplied to the CPU (Z80B) of U1.

The R/O clock is generated by the oscillator composed of an inverter (U96) and 4M ceralock (X2), used as the CRT display master clock and used to generate the ROREQ, ROUBL, ROBLK and DOT count signals.

The AH clock is generated by U28 and used as the free-running clock for analog hold operation.

The jitter clock is generated by U26 and used to vary the character interrupt period during realtime sweeping.

All of the information changes from switches and encoders, that are necessary for the CRT display information, and communications with the clock and Storage Unit are transmitted to the CPU by means of interrupt.

When a panel SW is pressed, one of D0 to D7 of U77 which are connected as the data bus for switch data goes "L" and pin 9 of U80 outputs the triggering pulse to activate the timer of U28. In about 2 ms when the influence of key chattering has disappeared, pin 2 of U75 goes "L" at the same time as the negative going of the time output, informing the CPU of the change in the SW status. When the CPU is interrupted, it selects the line with serial transfer using U61 (SSC, SLC) and U62 (SD), reads column data from U55 and determines the condition of the SW matrix.

The rotary encoder, which is used for switching between volts/div and sweep time, has two outputs (phase A, phase B). The timing of phases A and B is as shown in Fig. 6.

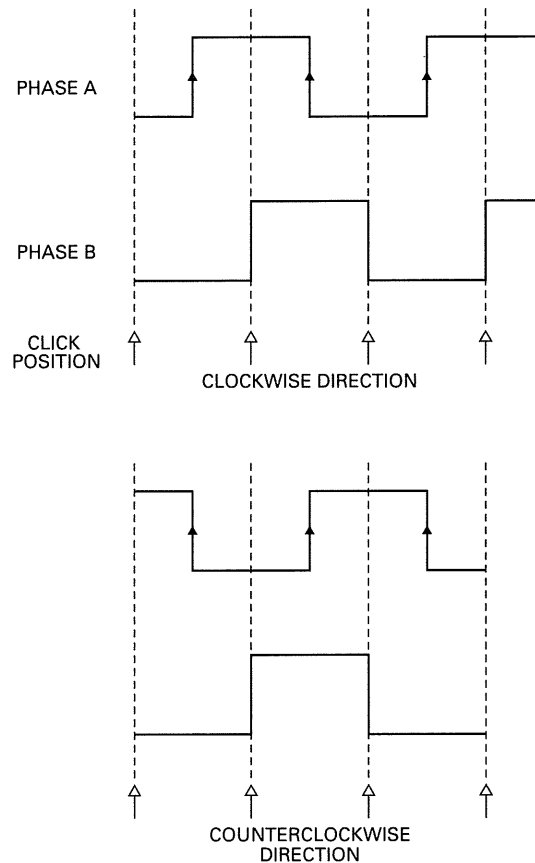


Fig. 6

CIRCUIT DESCRIPTION

For example, when CH 1 volts/div rotary encoder is used, the outputs of phases A and B are input to the Schmitt circuit of U67 to remove chattering and shape the waveform. When phase A changes, pin 6 of U68 outputs a triggering pulse to turn pin 6 of U73 "L" and thereby inform the CPU of the change in the rotary encoder. The CPU determines the rotation direction from the output from pin 3 of U68. If the direction is clockwise, the output is "H" at the moment it is interrupted. If it is counterclockwise, the output is "L" at the moment it is interrupted.

Even when the power is OFF, U7 is backed up by lithium battery B1 and the 32.768 KHz basic clock generated by X'tal oscillator X3 is also operated. When the power is turned ON, IRQ goes "L" at a certain interval and interrupts the CPU to inform it of the change in time. The CPU updates the calendar on the CRT screen according to it.

The communication from the Storage Unit is handled by U64 and U65 and data is sent 16 bits by 16 bits. When the latch signal from the Storage Unit is input, Q of U76 goes "L" and the CPU is interrupted.

The analog voltage block can be divided into input section and output section.

The voltages input through VRs are 1VAR to 4VAR, 1POSI to 4POSI (A/B), ^REF (A/B), TRIG LEVEL, EQVREF, SWEEP VAR, T-SEP, H-POS and H-FINE. These VR voltages are connected to U20, U21 and U22, selected by U38 and U39, compared in U25 with the D/A output voltages from U10, U59 and U60, and quantized. D/A converter U10 and comparator U25 form a simulated approximating A/D converter circuit, which converts the VR voltages into 12-bit data. The 12-bit data after conversion are computed and written in their respective addresses in RAM U6. To write data U41 to U43 connect the bus of U6 with the CPU.

The signals for latching the address setting and output data of the analog hold data RAM (U6) and for selecting the output analog switches are generated by the about 25 kHz clock of U28 and counter U50. The data of the specified address is latched as 12-bit data, the lower 8 bits by U44 and the higher 4 bits by U45, and output to D/A converter U11 for D/A conversion. U16 to U19 are analog switches, and the D/A converter signal is output from the IC pin selected by AC1 to AC5. The output has 32 channels, the voltage of each of these channels is held by an opamp and CR and output through a resistor.

U51, U52, U53, U54, U55, U64 and U65 are the input ports. The signals are decoded by U9 and U57 and output from the IC to the data bus. U51 is used to determine the rotation direction at the time of encoder interrupt and is "H" with clockwise rotation. Bits 0 to 3 of U52 are used for probe detection, with "L" indicating a 1:10 probe. Bit 4 of U52 goes "H" when the data sent to the Storage Unit has not been received. U53 is used to determine the cause of interrupt. Bit 0 of U54 is used for footswitch detection. It goes "H" when

the footswitch is pressed ON and, even after the footswitch is switched OFF, monostable multivibrator U88 holds the "H" status for more about 20 ms. Bit 1 is used for automatic detection of TV signal and goes "H" when PAL signal is input during TV triggering. Bit 2 is the voltage comparator output and connected to pin 7 of U25. Bit 3 goes "H" when the single sweep is ready. Bit 4 goes "H" when write in analog hold RAM (U6) is inhibited. Bit 5 is also used for automatic detection of TV signal and goes "L" when interlaced signal is input during TV triggering. Bit 6 is the battery monitor terminal going "H" in case of abnormal voltage. Bit 7 goes "H" when the communication is inhibited for the Storage Unit.

U55 reads the column data of the SW.

U64 and U65 converts serial data communicated from the Storage Unit into 16-bit parallel data.

U39, U59, U60, U61, U62 and U63 are the output ports. U39 selects the analog voltage input, U59 and U60 latch the data of the D/A converter (U10), U61 and U62 generates the data, shift clock and latch clock for the serial transfers of the Vertical, Horizontal, Switch, LED and Storage Units, and U62 also generates the buzzer output signal. Bit 0 of U63 causes character interrupt, in realtime with "H" and from storage with "L". Bit 1 clears the waveform display when it goes "L" and bit 2 clears the realtime waveforms by forcing ROBLK to "L". Bits 3 and 4 select the bank of the backup ROM (U4), and bit 5 selects the bank of the program ROM.

U9, U38, U40, U56, U57, U58 and U79 form the decoder circuit and U9 uses PAL. The PAL is provided with a circuit configuration which allows it to decode the input ports, output ports, clock, ROM, RAM and dual-port RAM. U56, U57 and U58 are selected by U9 and generates the decoder output according to the address.

The TV counter is composed of U8 and U66, and is used to count the line in TV operation, select the TV signal and select the buzzer frequency.

U4 is an SRAM. Its capacity of 32K bytes is divided into 4 banks to use 1 bank for storage of system data and 3 banks for storage of program step data. The SRAM is backed up by battery B1 even while the power is OFF; when power is turned OFF, U23 switches it to the back-up mode.

U2 is the program ROM with a capacity of 64K bytes. It is used by dividing the capacity into 32K x 2.

U5 is the dual-port RAM for CRT display. It is divided into the CRT display character area with 32 columns x 16 lines x 1 byte, the cursor area with 32 columns x 4 lines x 1 byte and the system stack area. The display on the CRT screen is performed automatically when a numeral value in ASCII code is input in the corresponding address.

CIRCUIT DESCRIPTION

The characters are displayed asynchronously with the CPU. RAM U5 outputs data (in ASCII codes) corresponding to the address generated by the character counter formed by U83, U84a and U90a.

Character generator U3 generates the dot position data based on RAM U5 and dot counter U82.

Character generator U3 contains character data with basically 8 x 16-dot configuration, where 3 bits from D0 to D2 are the X-axis data, 4 bit from D3 to D6 are the Y-axis data and the bit of D7 is the character end control bit. The position data output from U3, U83 and U84 is converted into analog signal by D/A converters U12 and U13, sent through the analog switch of U14 and U15 and buffer amp U29a and U29b, and output as the R/O-X and R/O-Y character signals.

The analog switch of U14 and U15 switches between the character signal, cursor signal and storage waveform signal.



The character dot display on the CRT is controlled by the ROUBL signal, ROBLK signal and ROREQ signal which are output from pin 3 of U92, pin 7 of U95 and pin 12 of U95 respectively. The

ROBLK signal clears the realtime waveform when it is "L". The ROREQ signal switches between the realtime waveform and read-out data and the read-out data is selected when it is "L". The ROUBL signal displays the dot display of read-out data when it is "L".

These signals vary depending on the display modes and the timings are as shown in Fig. 2. In realtime display mode, the realtime waveform is cleared by the ROBLK signal and character interrupt occurs every 2 to 10 μ s.

In the storage display mode, the R/O characters and the storage waveforms are displayed alternately. When the R/O characters have been displayed for 2 screens, pin 8 of U48 goes "L", pin 11 of U72 outputs the triggering pulse to activate the timer of U27, and "H" is displayed for about 30 μ s to leave the time for switching of the analog switch of U14 and U15. After switching by U14 and U15, the WAVETRIG

G signal goes "L", the Storage Unit sends the storage waveform signal and the storage waveform display starts. After the storage waveform display, the MOJITRG signal clears the flip-flop of U48 and the R/O character display starts again.

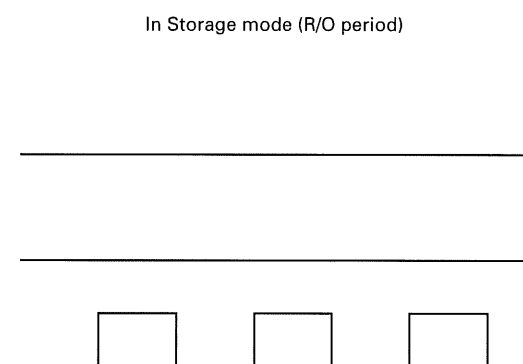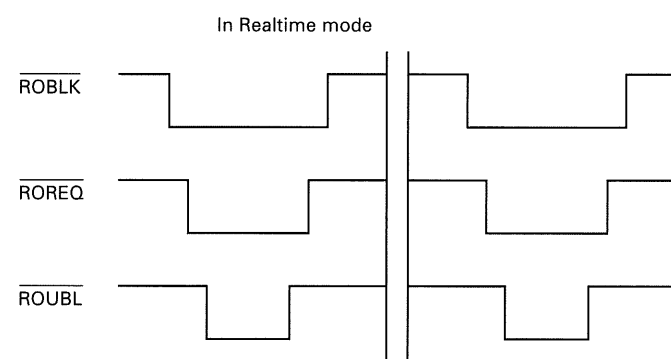

High Voltage Unit (X68-1590-00)

This unit has the purpose of generating the high voltage for driving the CRT.

The unblanking signal applied from the H Unit is modulated with the 300 Vp-p sine wave which is output from the HV block. For the high voltage generated in the HV Unit, the control for maintaining the voltage constant is applied by Q1, Q2 and U1. The modulated wave obtained from the unblanking signal is demodulated, it is DC regenerated with this high DC voltage so that the demodulated unblanking signal becomes a HV signal. This circuit incorporates an auto focusing circuit formed with Q3 and Q4 so that the focusing is not changed when the INTEN control is adjusted. The voltage for use in acceleration in the subsequent stage is also generated in the HV block.

GP-IB Unit (X79-1120-00)

This unit incorporates the RS-232C and GP-IB interface circuits which are used when a computer and/or plotter is connected externally to the oscilloscope.

The communications through RS-232C uses buffer U101. The circuit for communications through GP-IB is composed of buffers U102 and U103, GP-IB controller U105 and address setting dip switch S101.


These interfaces are in compliance with the HP-GL and IEEE488 respectively.

VR Unit (X81-2900-00)


This unit is in charge of the INTEN adjustment, FOCUS ASTIG adjustment, trace rotation adjustment, illumination adjustment and the CAL signal output.

The CAL signal to be output is generated with the 1 kHz, 1 Vp-p square wave generator and U1.

BLOCK DIAGRAM

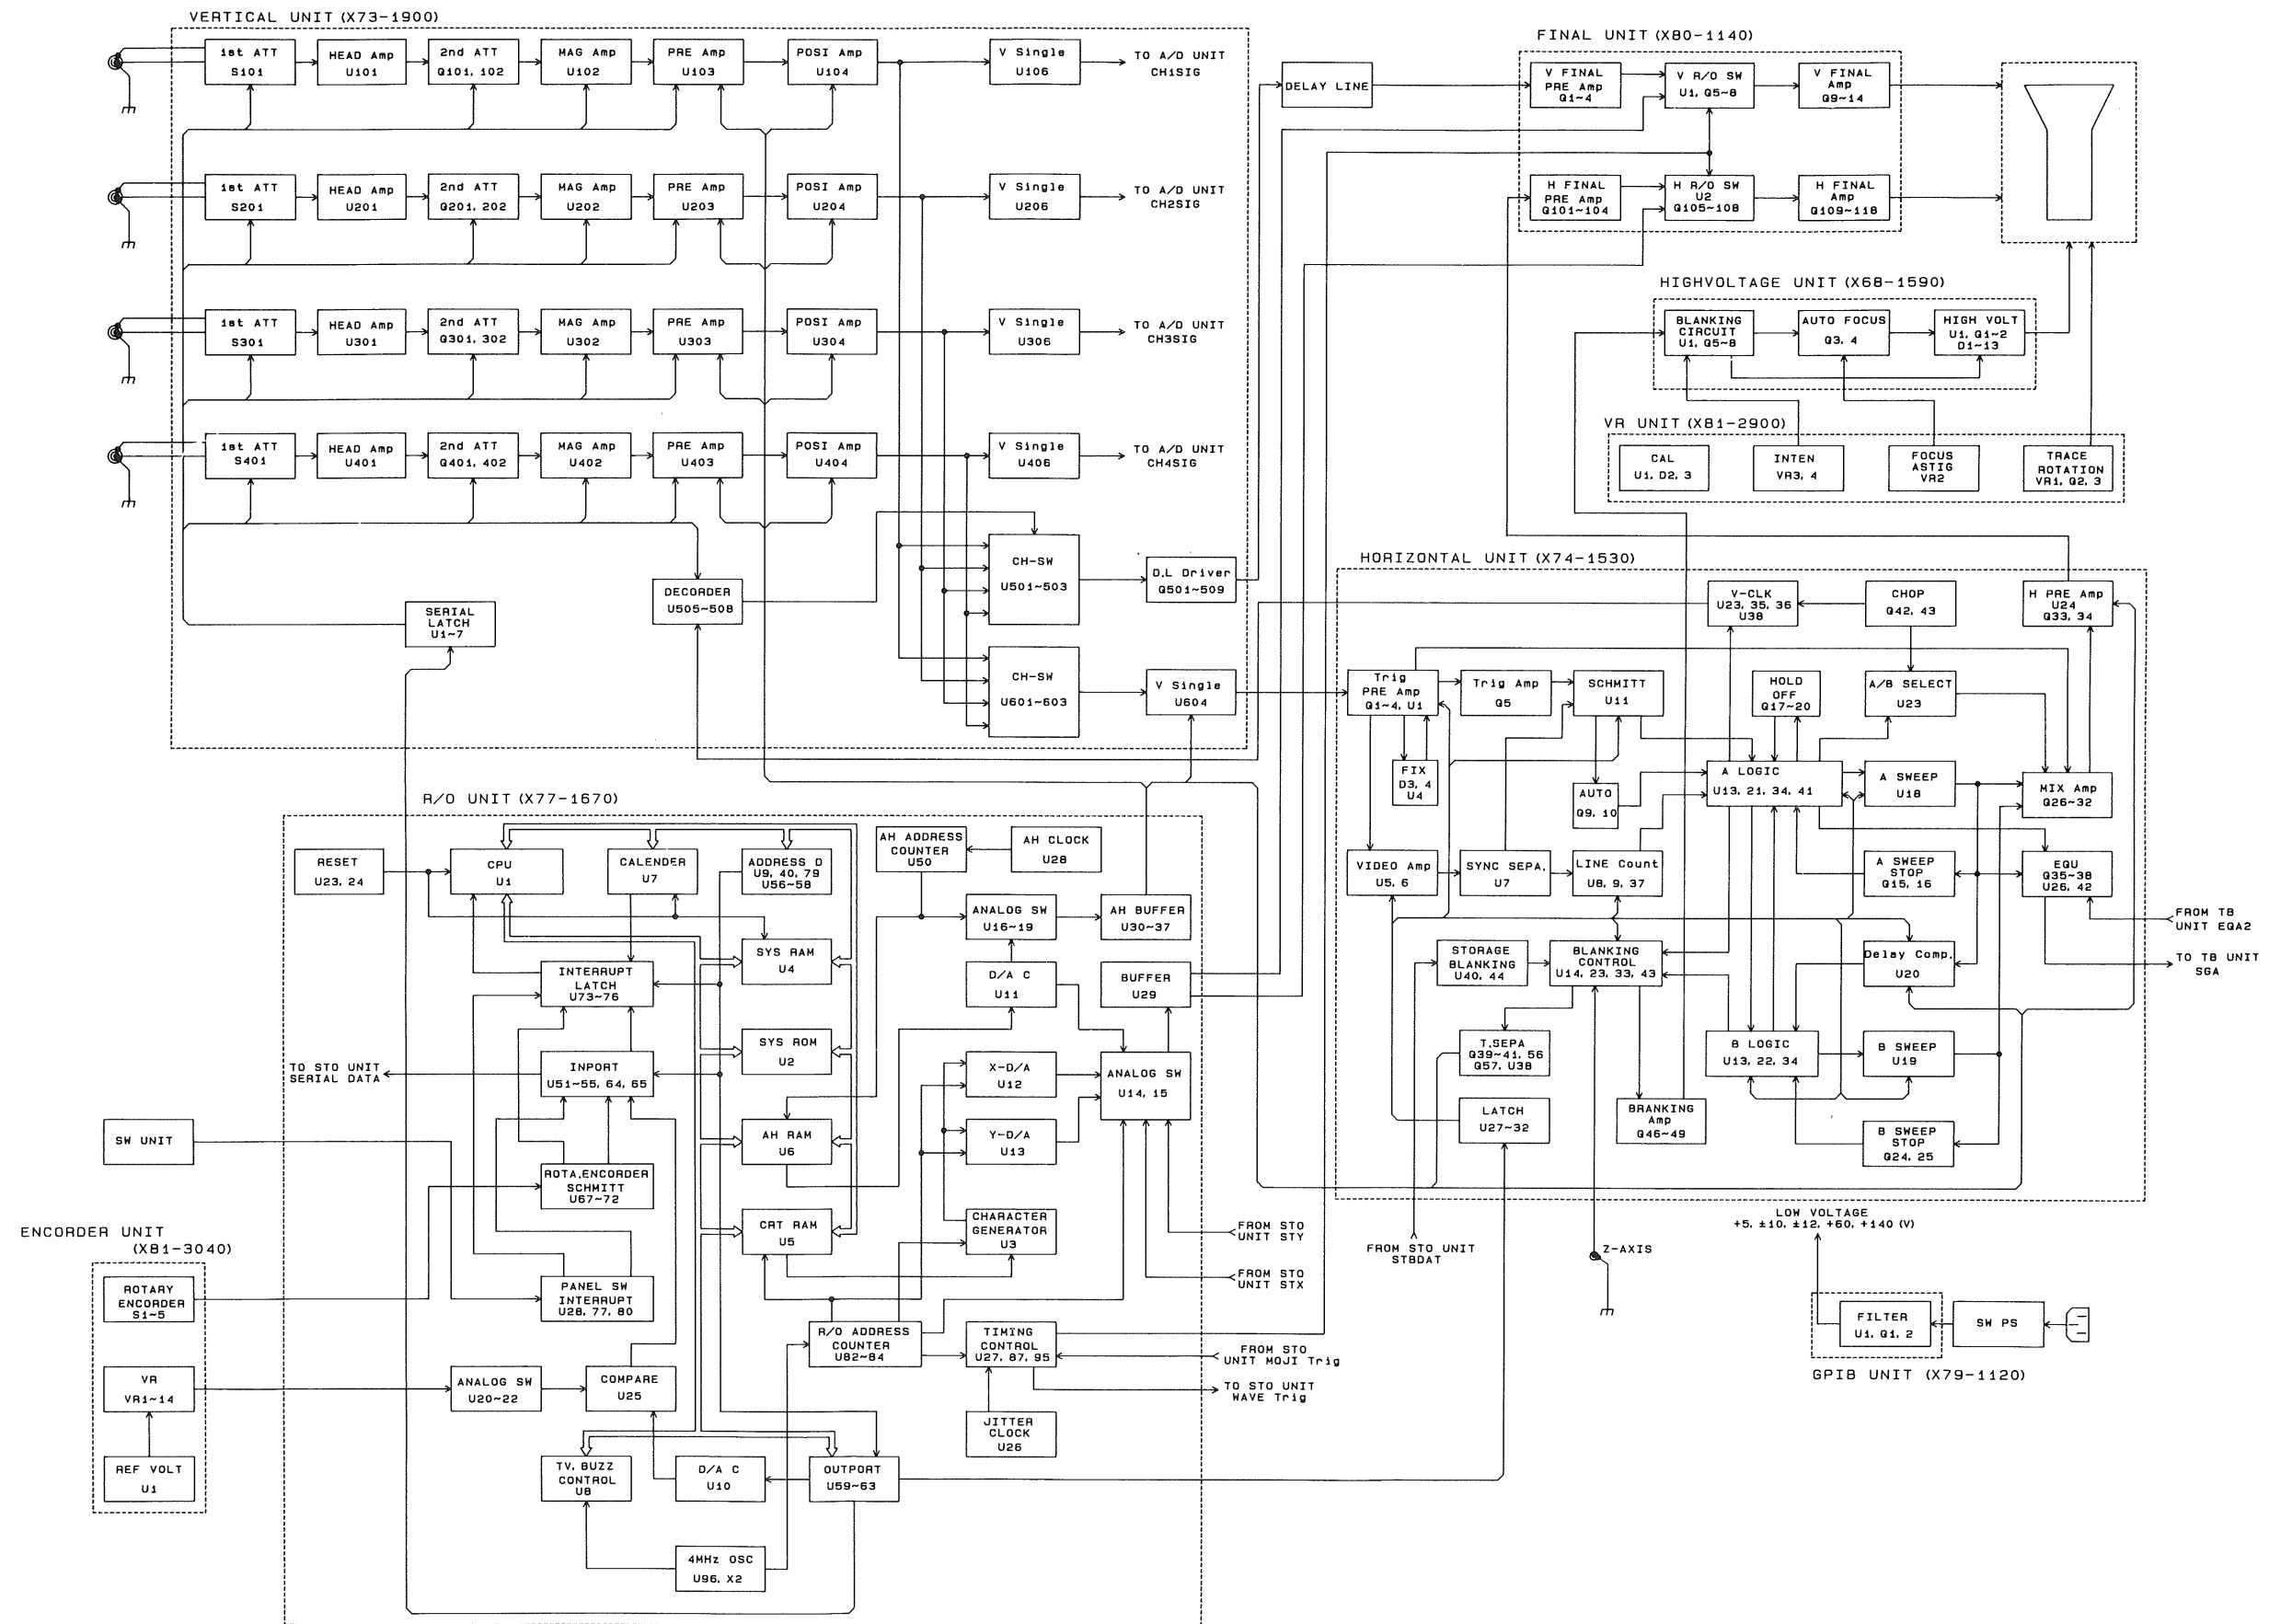


BLOCK DIAGRAM

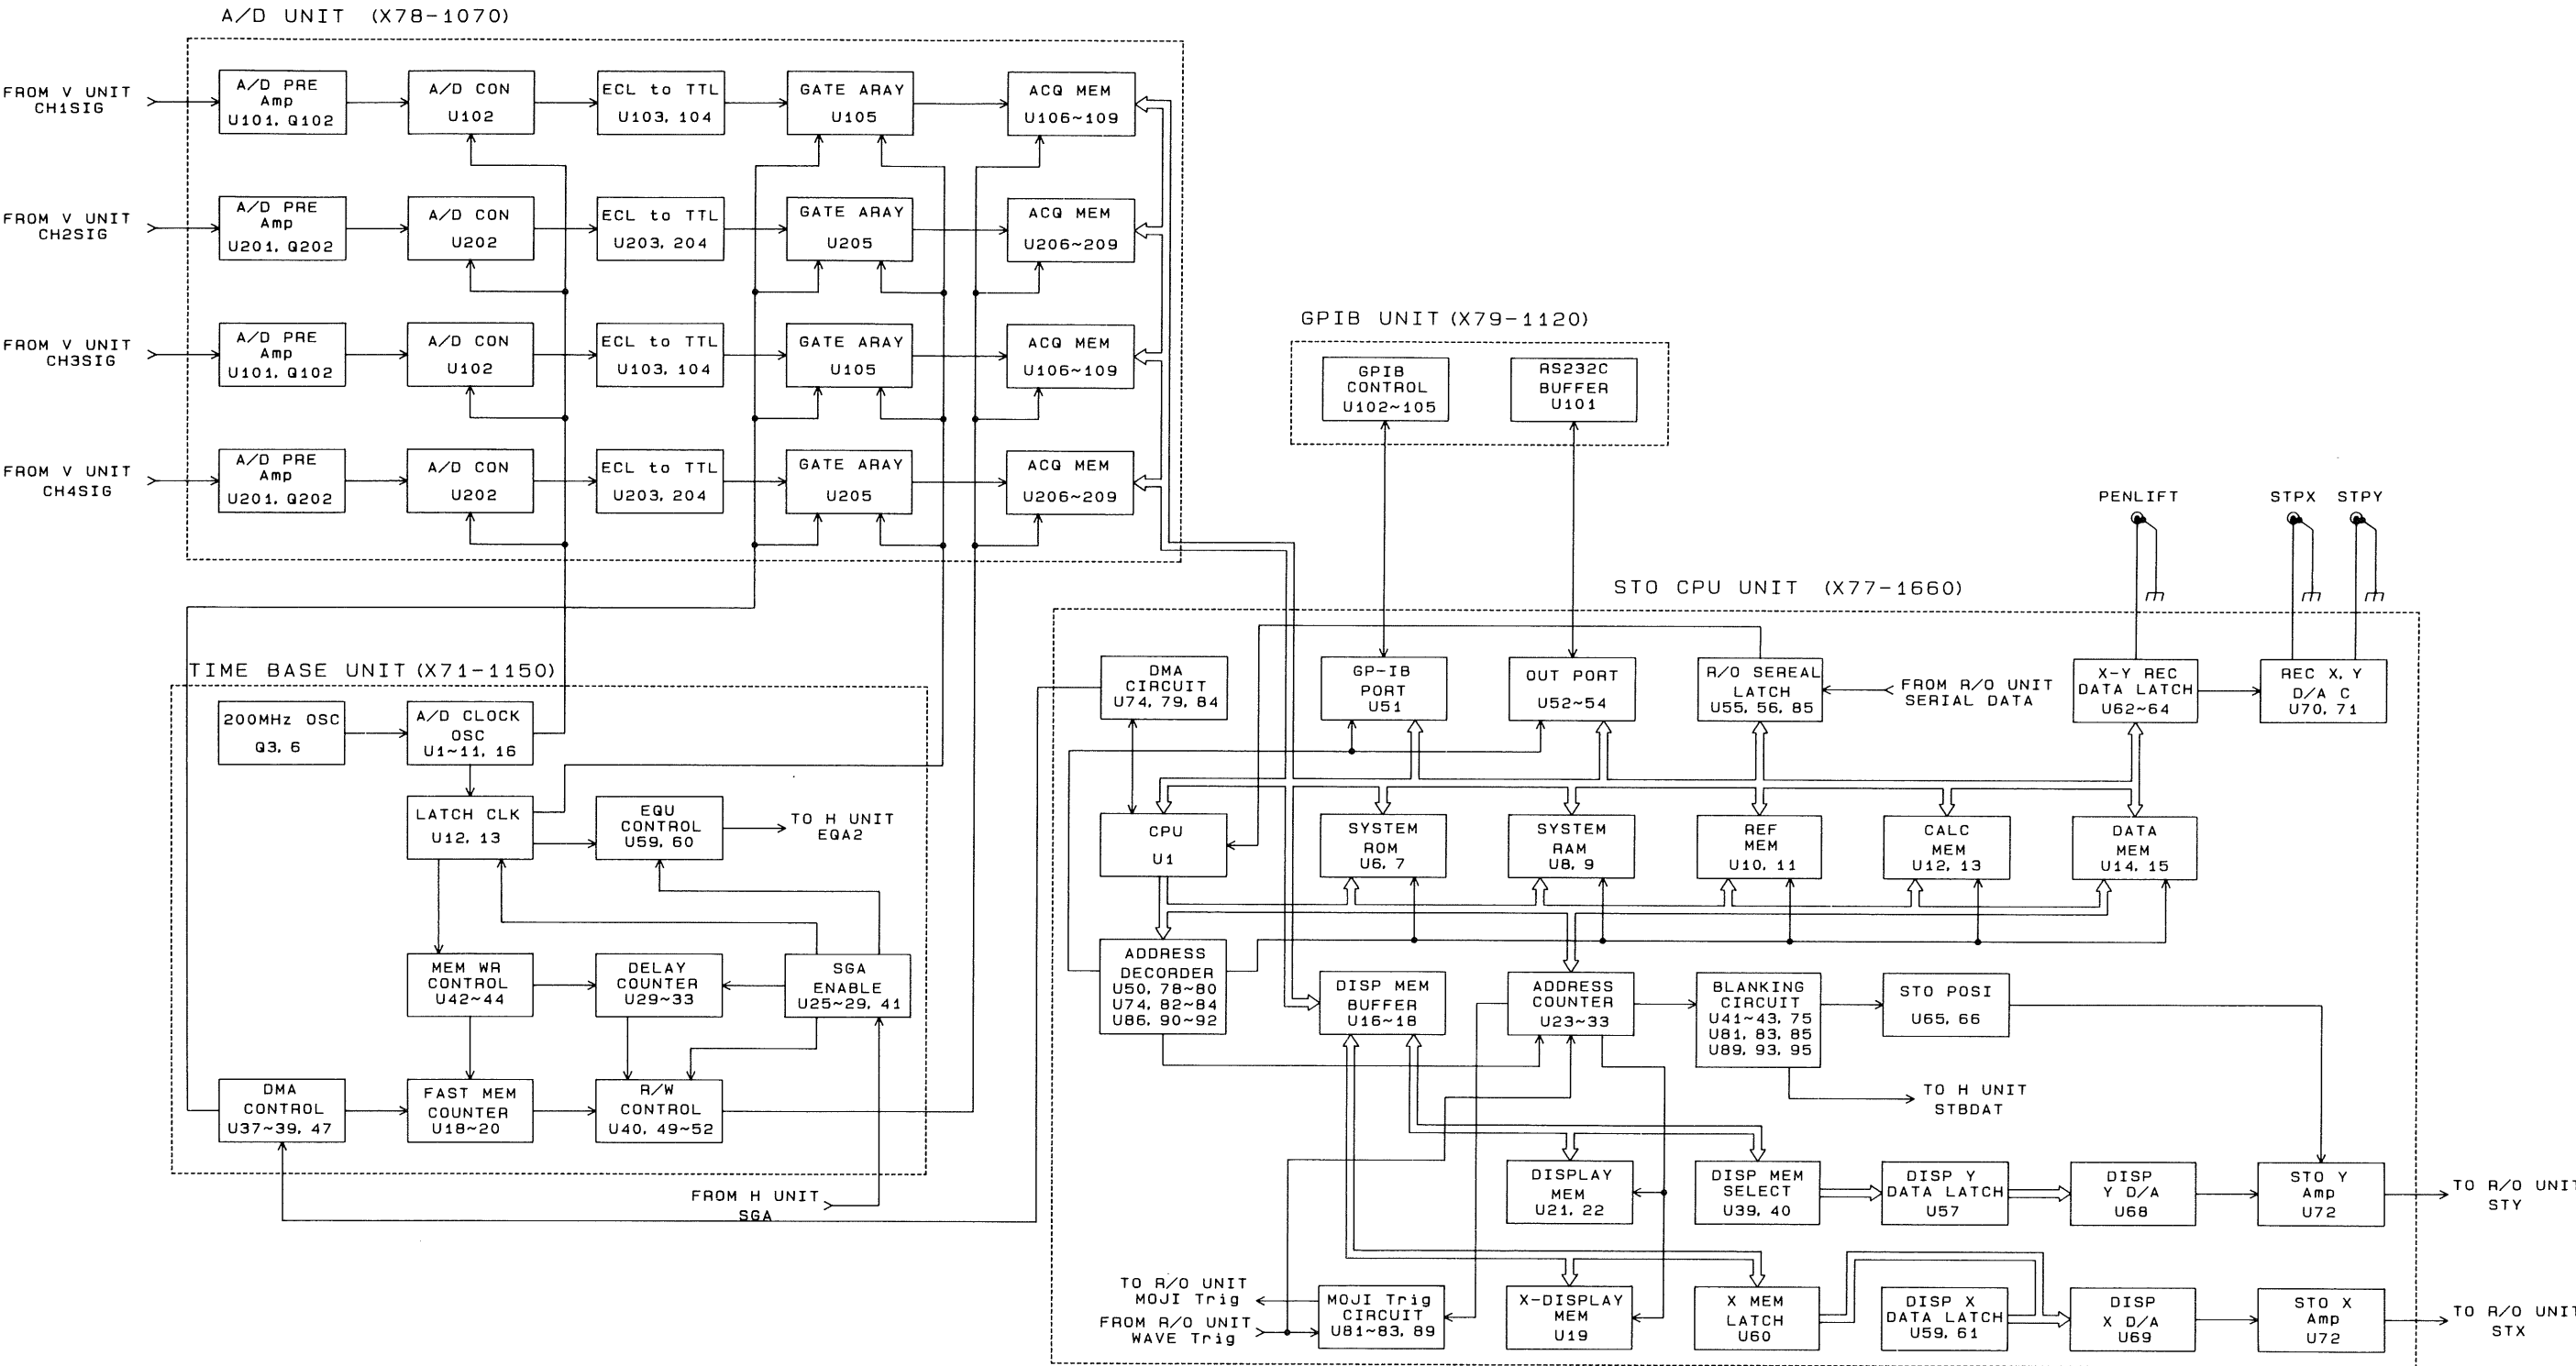

ADJUSTMENT

Operation before adjustment (from the power-off state)

- ① Turn the power on pressing **MENU NEXT** and **F5** simultaneously.
- ② Press **MENU NEXT** once.

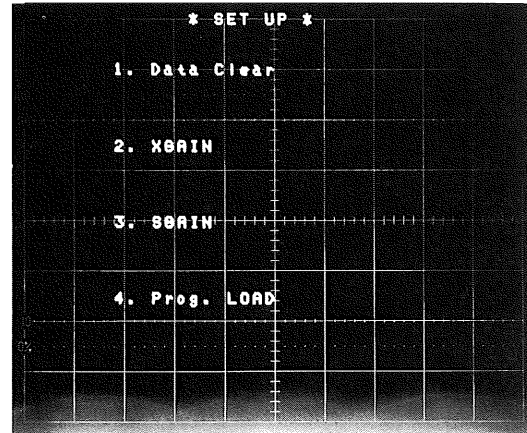

Changes to the DISPLAY mode.

- ③ Press **F1** once. (1. Data Clear)
At this point, the monitor is kept unchanged.
- ④ Press **MENU NEXT** twice, and the mode changes to normal.


The procedures above are not necessary for the second adjustment and on. However, when the power has been interrupted before performing adjustment operation again, only ① of the procedures above must be performed.

Now, let's start the adjustment operation.


PROGRAM MODE

Adjust each center using the following commands:


- ① Turn **MENU NEXT** on.

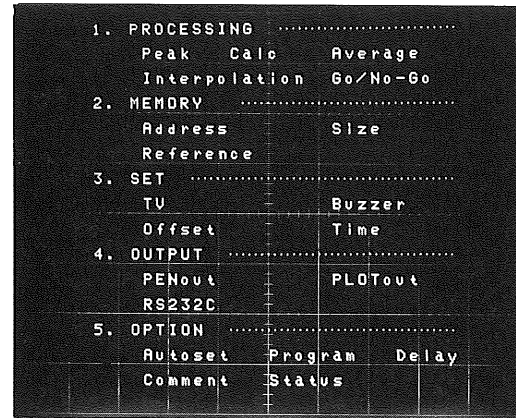


- ② Turn **F5** on. OPTION mode

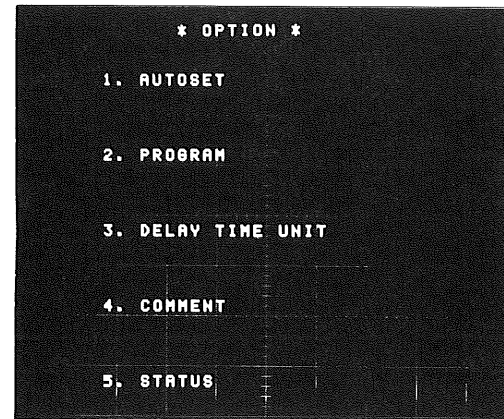

- ③ Turn **F2** on. PROGRAM mode
- ④ Turn **F1** on. RUN mode

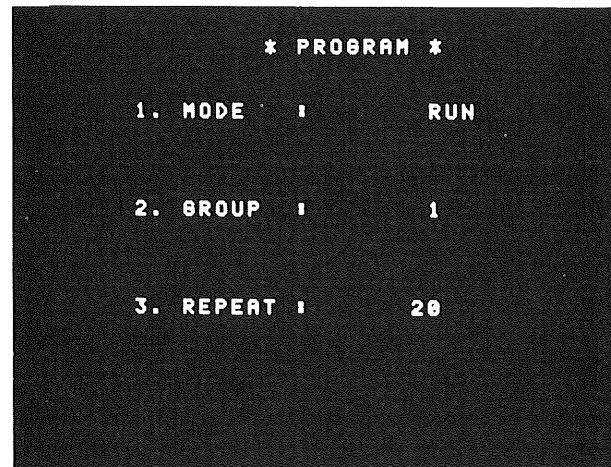

- ⑤ Turn **MENU NEXT** on by pressing it once.

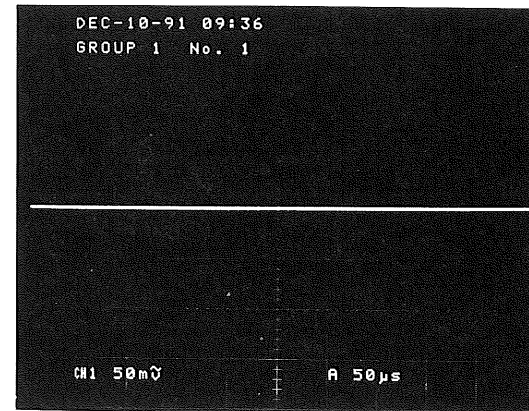

Center adjustment is available in the state of ⑤.

- ⑥ Adjust each adjustment VR following the procedures for each item so that each item is in the center position of its scale.


* While performing the adjustment operation, make sure not to turn the VRs on the panel related to the corresponding adjustment VR.

Example: While adjusting the V.POSI center, never turn the \diamond POSI VRs for the channels CH1 to CH4 on the panel.


- * When any related VR is turned, the center position is canceled and it does not function as an electric center. If this is the case, perform the steps ① to ④ gain and press **F1** three times for cancellation.
RUN → EDIT → FF → RUN
Then perform the step ⑤.
- * From now on, perform the same procedures also when an error is made in operation.

After the adjustment operation is completed,

- ⑦ Perform the steps ① to ④ and turn the RUN mode off.
Press **F1** twice in the step ④.

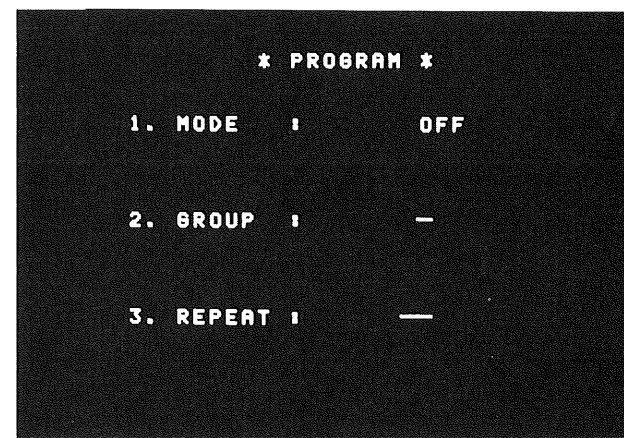

- ⑧ Press **MENU NEXT** three times to change the mode back to normal.

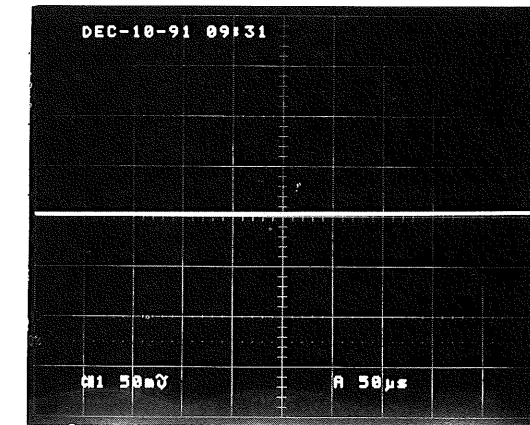

* Successful when the display has changed as shown in the photo above. However, the range varies depending on each condition.
GROUP 1 No.1 disappears.

To these adjustment procedures, an indication of "PROGRAM mode" is specified in the adjustment.







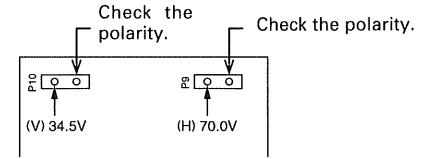
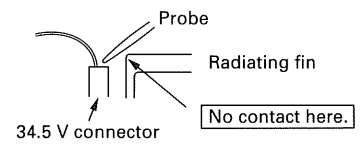
Items to be adjusted in PROGRAM mode:

1. V.POSI center (CH1 to CH4)
2. FIX
3. TRIG level center
4. DC. CUP (CH1)
5. A.SWEEP POSI 1 ms
6. MAG center 1 ms
7. X-POSI
8. STO V.POSI center (CH1 to CH4)

However, the items 2 to 4 are described as normal adjustment procedures.


They also can be adjusted in PROGRAM mode.




ADJUSTMENT
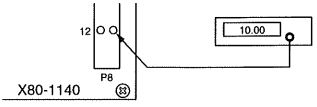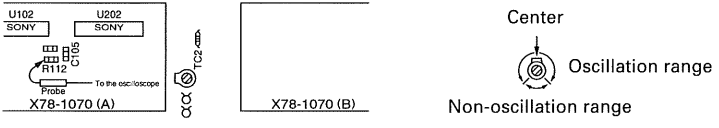
| Item | Adjustment | PCB | Procedure |
|---|----------------------------------|----------|--|
| +10.00 V | VR1 | X79-1200 | <p>Apply the probe to No.12 of P8 of X80-1140 and adjust the voltage so that it falls between 10.00 and 10.05 V.</p>  |
| 100 MHz oscillation (STO mode SWEEP TIME: 0.1 μs Luminescent line center) | TC2 | X71-1150 | <p>Apply the probe to R112 and adjust to the center of the TC2 oscillation range.</p>  |
| INTENSITY | VR1 | X68-1590 | <p>CH1, CH2, VOLTS: 20 mV, VARI: min. 20 MHz Bw: ON, CH2: ON SOURCE: CH1, AC-DC: GND</p> <ol style="list-style-type: none"> Select X-Y for HORIZ mode. Set INTEN VR so that it rotates between . Adjust so that deletion is performed in the position of 9:30. Adjust so that the spot comes to the center of the screen.  |
| FOCUS Center | VR2 | X68-1590 | <ol style="list-style-type: none"> In the state of the step '100 MHz oscillation', adjust ASTIG (PULL) to minimize the size of the spot. Set FOCUS VR so that it rotates between , then set it to the mechanical center position. Adjust VR2 so that the spot is minimized.  |
| V. Output Bias Voltage H. Output Bias Voltage | VR201 (34.5 V) VR102 (70.0 V) | X80-1140 | <ol style="list-style-type: none"> In the state of the step 'Intensity' (with the spot in the center of the screen), turn R/O INTEN off. (INTEN is between 12:00 and 1:00 positions.) Adjust each VR so that the voltage is those indicated by (V) and (H) respectively.  <p>NOTE) Take care that the radiating fin does not come in contact with the probe during voltage adjustment.</p>  <p>(* The value of (H) has been changed from 67.5 to 70.0 V because the voltage is lowered due to time drift while contained in a case.)</p> |





ADJUSTMENT

Step 'R/O Offset' VR Setting (Example) Set the display for CH1. R/O INTEN: ON INTEN: Arbitrary




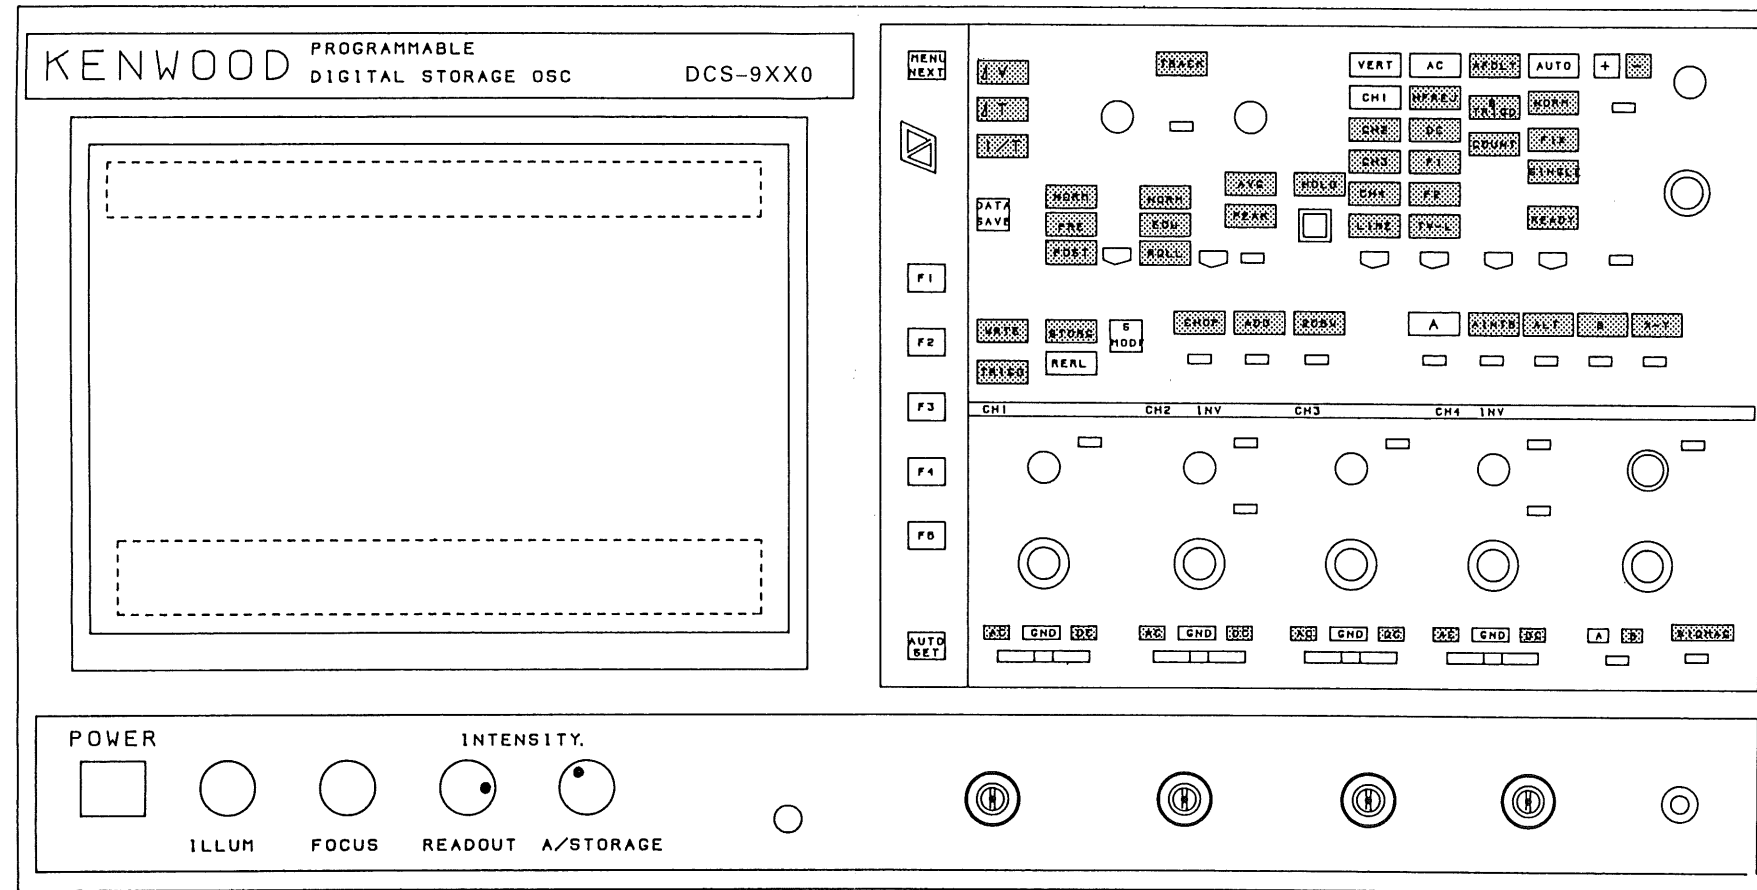

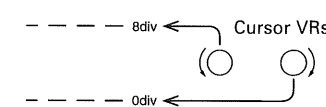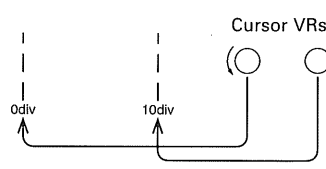
| Item | Adjustment | PCB | Procedure |
|------------|------------|-----------------------------|--|
| R/O Offset | Y | VR3 (POS) VR4 (Gain) | <p>Set the VRs above.</p> <p>① Turn [AV] on. Cursor VRs</p> <p>② Rotate each cursor VR fully to its maximum side. (○ ○)</p> <p>③ Adjust VRs 3 and 4 so that each line cursor corresponds to the maximum position of each VR in the vertical (Y) \updownarrow direction.</p> <p style="text-align: right;"></p> <p>④ Turn [AT] on. Cursor VRs</p> <p>⑤ Rotate each cursor VR fully to its maximum side. (○ ○)</p> <p>⑥ Adjust VRs 103 and 101 so that each line cursor corresponds to the maximum position of each VR in the horizontal (X) \leftrightarrow direction.</p> <p style="text-align: right;"></p> <p>⑦ Turn [AT] off by pressing it twice.</p> |
| | X | VR103 (POS) VR101 (Gain) | |
| STO X-Gain | VR2 | X77-1660 | <p>① Turn [SCOPE MODE] on. (STORAGE action)</p> <p>② Set SWEEP TIME to 1 ms.</p> <p>③ Input a marker signal of 1 ms to CH1.</p> <p>④ Adjust so that the peaks of the marker waveforms are correspondent to each division.</p> <p style="text-align: right;"></p> |



ADJUSTMENT

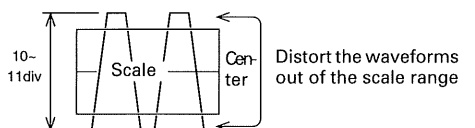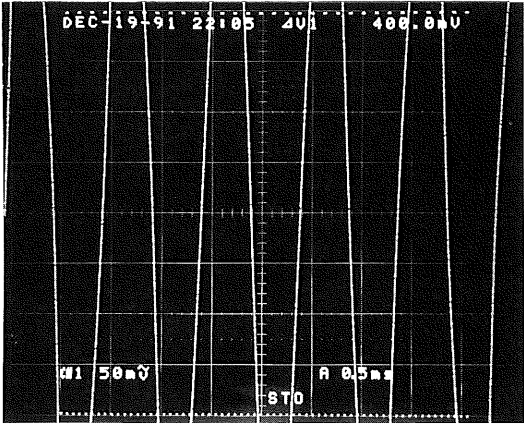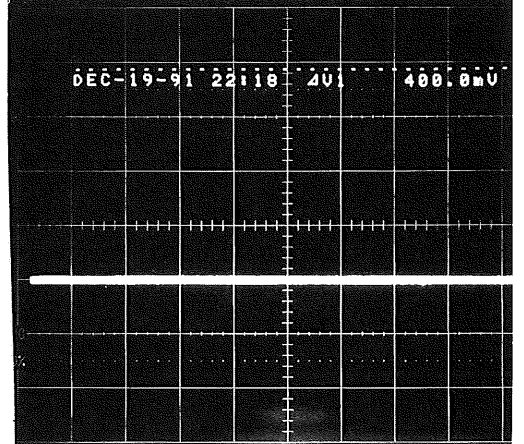
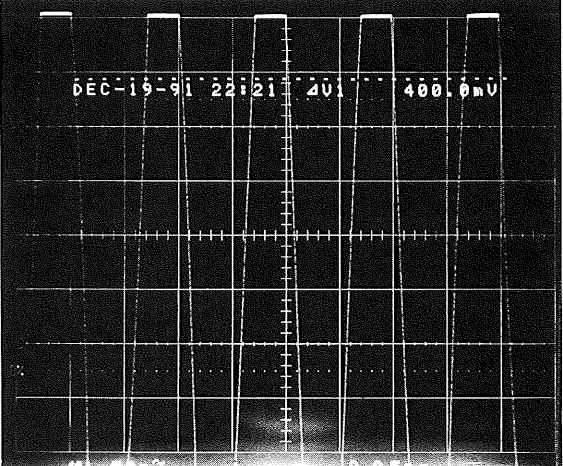
| Item | Adjustment | PCB | Procedure |
|---|----------------------------------|-----------------|---|
| <p>STO Y-Gain</p> <p>* Adjustment is performed by a program using pattern waveforms. (The program has already been provided.)</p> | <p>VR1 (Gain) VR3 (POSI)</p> | <p>X77-1660</p> | <p>① Turn SCOPE MODE on. (STORAG action)</p> <p>② Turn AV on. Locate each line cursor to its maximum position.</p> <p>③ Set the AC-VOLTS of CH1 AC-DC to 20 mV and locate the luminescent line in the center scale using \diamond POS.</p> <p>④ Input a sine wave of 1 kHz \sim and adjust so that the amplitude extends over approx. 15 divisions in the vertical direction \updownarrow. (Input excessively so that the waveform extends out of the scale range.)</p> <div style="text-align: center;">  </div> <p>* Never rotate \diamond POSI at this point. If rotated, the center position of the luminescent line will move.</p> <p>⑤ Adjust VR3 of X80-1140 described in the step No.7 so that line cursor on the scale is 1.1 div apart from the upper limit of the scale.</p> <p>⑥ Adjust VR1 so that the peaks of the waveform are on the upper limit of the scale.</p> |
| | | |  |
| | | |  <p>1.1 div</p> <p>No waveform is displayed for good understanding.</p> |
| | | |  <p>Align.</p> |

ADJUSTMENT

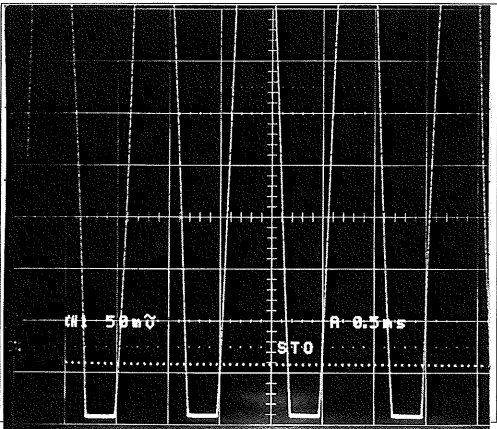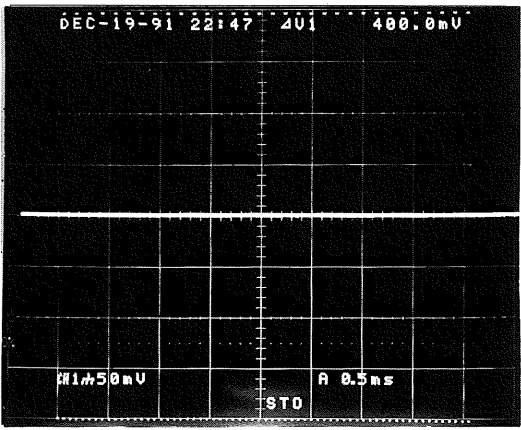

| Item | Adjustment | PCB | Procedure |
|---|--|----------|--|
| STO Y-Gain | | | <p>⑦ Adjust VR3 so that the waveform is completely symmetrical in the vertical direction.</p>  <p>⑧ Align the line cursor with the division using VR3 of X80-1140. At this point, it is not required to display a waveform on the screen.</p>  <p>⑨ Turn ΔT off. ⑩ Turn SCOP MODE on and change the mode to REAL.</p> <p style="text-align: right;">Set to 1.1 div using VR3 of X80-1140.</p> |
| CH1 10kHz Square Wave (REAL) 10kHz ↓ (STO) 10kHz ← ↓ (STO) 100kHz | VR101 TC103 | X73-1900 | <div style="border: 1px solid black; padding: 2px; width: fit-content;"> VOLTS: 10 mV AC-DC: AC SWEEP TIME: 20 μs </div> <p>① Input a square wave of 10 kHz \square to CH1 and adjust so that the amplitude extends over 6 divisions. ② Shape the leading edge of the waveform.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>VR101 TC103</p> </div> <div style="text-align: center;">  <p>TC 103 changes around here.</p> </div> </div> <p>Procedure: REAL 10 kHz → STO 10 kHz → STO 100 kHz As there is a certain relationship between 10 kHz adjustment and 100 kHz adjustment, make sure to check the values several times.</p> |
| CH2 10 kHz Square Wave | VR201 TC203 | X73-1900 | Adjust in the same way as for CH1. |
| CH3 10 kHz Square Wave | VR301 TC303 | X73-1900 | Adjust in the same way as for CH1. |
| CH4 10 kHz Square Wave | VR401 TC403 | X73-1900 | Adjust in the same way as for CH1. |
| CH1 ATT Balance | VR102 (1 mV to 2 mV) VR104 (2 mV to 5 mV) | X73-1900 | <div style="border: 1px solid black; padding: 2px; width: fit-content;"> VOLTS: 2 mV AC-DC: GND VARI: CAL (Turn 20 MHzB/W on as required.) </div> <p>① For 1 to 2 mV, perform adjustment when the voltage is 1 mV with 2 mV as reference. ② For 2 to 5 mV, perform adjustment when the voltage is 2 mV with 5 mV as reference.</p> |

ADJUSTMENT




| Item | Adjustment | PCB | Procedure |
|--|--|----------|---|
| CH1 VARI Balance | VR107 | X73-1900 | <div style="border: 1px solid black; padding: 2px; display: inline-block;">VOLTS: 10 mV AC-DC: GND</div> Perform adjustment when VARI VR is set to MAX (i.e. CAL) with MIN as reference. <div style="float: right; text-align: center;">  </div> |
| CH2 ATT Balance | VR202 (1 mV to 2 mV) VR204 (2 mV to 5 mV) | X73-1900 | ① For 1 to 2 mV, perform adjustment when the voltage is 1 mV with 2 mV as reference. ② For 2 to 5 mV, perform adjustment when the voltage is 2 mV with 5 mV as reference. |
| CH2 INV Balance ↑ As VARI BAL is also dislocated, adjust it again. | VR206 | X73-1900 | Adjust so that the luminescent line does not move even when the INV switch is turned on and off. |
| CH2 VARI Balance | VR207 | X73-1900 | Perform adjustment when VARI VR is set to MAX (i.e. CAL) with MIN as reference. <div style="float: right; text-align: center;">  </div> |
| CH3 ATT Balance | VR302 (1 mV to 2 mV) VR304 (2 mV to 5 mV) | X73-1900 | Adjust in the same way as for CH1. |
| CH3 VARI Balance | VR307 | X73-1900 | Adjust in the same way as for CH1. |
| CH4 ATT Balance | VR402 (1 mV to 2 mV) VR404 (2 mV to 5 mV) | X73-1900 | Adjust in the same way as for CH2. |
| CH4 INV Balance ↑ As VARI BAL is also dislocated, adjust it again. | VR406 | X73-1900 | Adjust in the same way as for CH2. |
| CH4 VARI Balance | VR407 | X73-1900 | Adjust in the same way as for CH2. |
| CH1/CH2 ADD Center | VR501 | X73-1900 | ① Press MENU NEXT once. ② Press F1 once. ③ Press F2 once. ④ Press F1 once. 1. REAL CH1 + CH2 ↑ + is inserted. ⑤ Press MENU NEXT three times to return to NORMAL. ⑥ Display the luminescent lines for CH1 and CH2. ⑦ Turn ADD on. There are three luminescent lines now. ⑧ Move these three luminescent lines using CH1, CH2 and POS1 so that they overlap one another. ⑨ Adjust so that the luminescent lines are in the scale center. ⑩ Turn ADD off. |

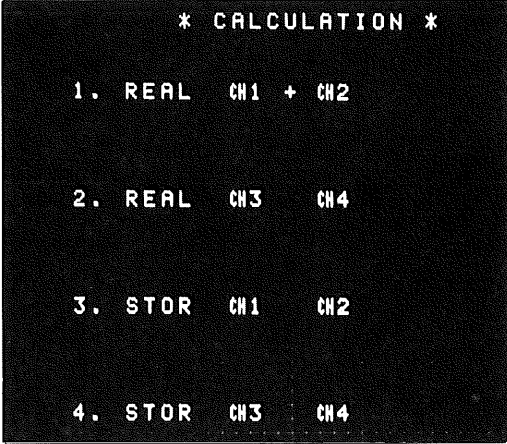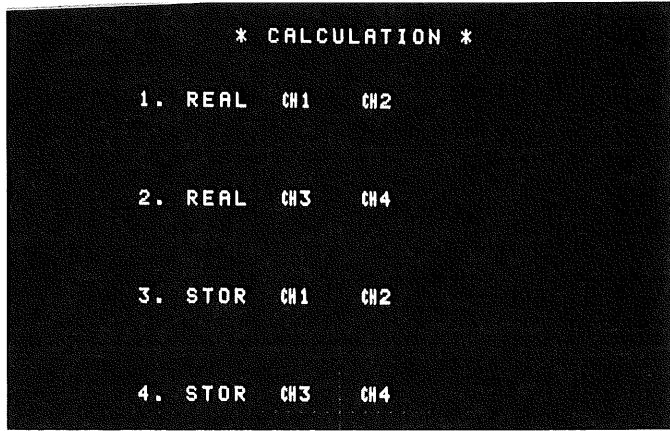






ADJUSTMENT
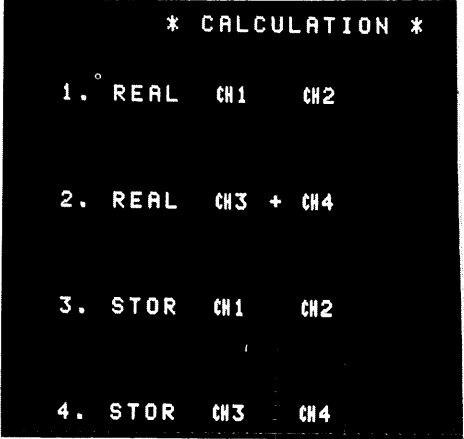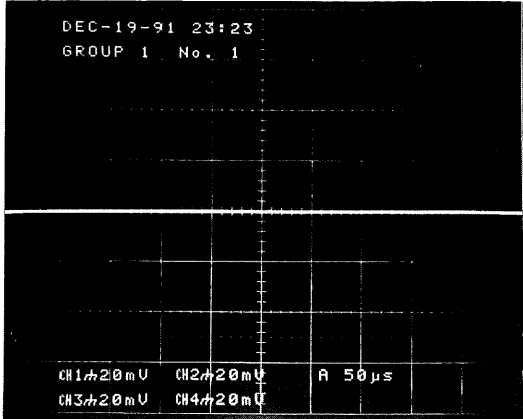
| Item | Adjustment | PCB | Procedure | | | | | | | | | | | | | | | |
|---|---|----------|--|------|-----|-------|-------|-----|-------|-------|-----|-------|-------|-----|-------|-------|----------|---|
| CH3/CH4 ADD Center | VR502 | X73-1900 | <p>① Press MENU NEXT twice.</p> <p>② Press F1 once.</p> <p>③ Press F2 once.</p> <p>④ Press F1 once. (Delete + for CH1/CH2.)</p> <p>⑤ Press F2 once.</p> <p style="margin-left: 20px;">2. REAL CH3 + CH4</p> <p style="margin-left: 40px;">↑</p> <p style="margin-left: 40px;">+ is inserted.</p> <div style="text-align: right; margin-top: 20px;">  </div> <p>⑥ Press MENU NEXT three times to return to NORMAL.</p> <p>⑦ Display the luminescent lines for CH3 and CH4. Turn off CH1 and CH2 for this step.</p> <p>⑧ Turn ADD on. (If it is already lit on, keep it as it is.) There are three luminescent lines now.</p> <p>⑨ Move these three luminescent lines using CH3, CH4 and POSI so that they overlap one another.</p> <p>⑩ Adjust so that the luminescent lines are in the scale center.</p> <p>⑪ Turn ADD off.</p> | | | | | | | | | | | | | | | |
| V.POSI Center ↓ STO V.POSI Center | VR109 (CH1) VR209 (CH2) VR309 (CH3) VR409 (CH4) | X73-1900 | <p>① Change the mode to PROGRAM.</p> <p>② Turn on CH1, CH2, CH3 and CH4.</p> <p>③ Set VOLTS to 20 mV (CH1 to CH4).</p> <p>④ Set AC-DC to GND (CH1 to CH4).</p> <p>⑤ Adjust so that all the luminescent lines for each channel overlap one another in the scale center.</p> <p>NOTE) Take care not to rotate \diamond POSI before adjustment.</p> <div style="text-align: right; margin-top: 20px;">  </div> | | | | | | | | | | | | | | | |
| V.Gain | <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th>10 mV</th> <th>1 mV</th> </tr> </thead> <tbody> <tr> <td>CH1</td> <td>VR108</td> <td>VR103</td> </tr> <tr> <td>CH2</td> <td>VR208</td> <td>VR203</td> </tr> <tr> <td>CH3</td> <td>VR308</td> <td>VR303</td> </tr> <tr> <td>CH4</td> <td>VR408</td> <td>VR403</td> </tr> </tbody> </table> | | 10 mV | 1 mV | CH1 | VR108 | VR103 | CH2 | VR208 | VR203 | CH3 | VR308 | VR303 | CH4 | VR408 | VR403 | X73-1900 | <p>VOLTS: 10 mV, VARI: CAL</p> <p>① Input a 50 mV square wave \square of 1 kHz and adjust so that the amplitude extends over 5 divisions.</p> <p>② Change VOLTS to 1 mV. Then input a 5 mV square wave \square and adjust so that the amplitude extends over 5 divisions. Adjust CH1 to CH4 repeating the steps ① and ②.</p> |
| | 10 mV | 1 mV | | | | | | | | | | | | | | | | |
| CH1 | VR108 | VR103 | | | | | | | | | | | | | | | | |
| CH2 | VR208 | VR203 | | | | | | | | | | | | | | | | |
| CH3 | VR308 | VR303 | | | | | | | | | | | | | | | | |
| CH4 | VR408 | VR403 | | | | | | | | | | | | | | | | |




ADJUSTMENT
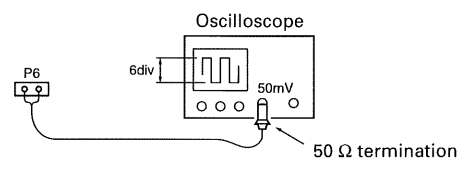
| Item | Adjustment | PCB | Procedure |
|--|--|----------|---|
| VARI Gain | VR1 | X73-1900 | <div style="border: 1px solid black; padding: 2px; display: inline-block;">VOLTS: 10 mV VARI: CAL</div> <ol style="list-style-type: none"> ① Input a 50 mV square wave \square to CH1. Then check to make sure that the amplitude extends over 5 divisions. ② Adjust so that the amplitude extends over 1.5 divisions when VARI is set to MIN (○). ③ Set VARI to CAL and check to make sure that the amplitude extends over 5 divisions. * If GAIN has been dislocated, adjust it again. ④ For CH2 ~ CH4, perform step (11 then check to make sure that the amplitude does not extend over 1.8 divisions or greater when VARI is set to MIN (○). |
| CH1 Waveform Shaping | TC105 (0.1 V) TC107 (1 V) | X73-1900 | VOLTS 10 mV Ideal waveform ① Adjust so that the waveforms for 0.1 V and 1 V are flat. |
| CH2 Waveform Shaping | TC205 (0.1 V) TC207 (1 V) | X73-1900 | Adjust in the same way as for CH1. |
| CH3 Waveform Shaping | TC305 (0.1 V) TC307 (1 V) | X73-1900 | Adjust in the same way as for CH1. |
| CH4 Waveform Shaping | TC405 (0.1 V) TC407 (1 V) | X73-1900 | Adjust in the same way as for CH1. |
| CH1 Input Capacity | TC106 (0.1 V) TC108 (1 V) | X73-1900 | <ol style="list-style-type: none"> ① Measure the capacity when VOLTS is 10 mV. ② Adjust so that the capacities for 0.1 V and 1 V are the same as that for 10 mV. |
| CH2 Input Capacity | TC206 (0.1 V) TC208 (1 V) | X73-1900 | Adjust in the same way as for CH1. |
| CH3 Input Capacity | TC306 (0.1 V) TC308 (1 V) | X73-1900 | Adjust in the same way as for CH1. |
| CH4 Input Capacity | TC406 (0.1 V) TC408 (1 V) | X73-1900 | Adjust in the same way as for CH1. |
| TRIG AMP 1 kHz Square Wave | VR612 (for all over the range) TC601 (for the high frequency range) | X73-1900 | <div style="border: 1px solid black; padding: 2px; display: inline-block;">VOLTS: 10 mV</div> <ol style="list-style-type: none"> ① Pull out the P6 connector of X73-1900 and insert a jig. <div style="text-align: right; margin-top: 10px;">  </div> ② Input a square wave \square of 1 kHz to CH1 and adjust so that the amplitude extends over 6 divisions on the oscilloscope. ③ Adjust so that the waveforms look well-proportioned. (Waveform shaping) |
| TRIG AMP 1 MHz Square Wave (F characteristics for 100 MHz) ↑ The amplitude changes through 1 MHz square wave adjustment. | HIC U604 TC1 | X73-1900 | <ol style="list-style-type: none"> ① In the state of the step No.37, input a square wave \square of 50 kHz to CH1 and adjust so that the amplitude extends over 6 divisions on the oscilloscope. ② From this state, change the frequency to 100 MHz keeping the SG level, and adjust so that the amplitude extends over 5 divisions on the oscilloscope. ③ After adjustment is completed, insert the P6 connector. <div style="text-align: right; margin-top: 10px;">  </div> |
| FIX Level | VR2 | X74-1530 | * <div style="border: 1px solid black; padding: 2px; display: inline-block;">This item also can be adjusted in PROGRAM mode.</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">VOLTS: 10mV AC-DC: AC SWEEP TIME: 0.2 ms</div> <ol style="list-style-type: none"> ① Set TRIG MODE to FIX. ② Inter a sine wave \sin of 1 kHz to CH1 and adjust so that the amplitude extends over 6 divisions with 3 divisions symmetrically on the upper and lower sides of the scale center. <div style="text-align: right; margin-top: 10px;">  </div> <p style="text-align: right; margin-top: 5px;">Locate the starting point in the center position.</p> ③ If synchronization is available, reduce the amplitude gradually using VOLTS and V.VARI, and adjust \pm SLOP for synchronization. ④ Reduce the amplitude up to the maximum value of 0.5 divisions and perform the adjustment operation. |

ADJUSTMENT
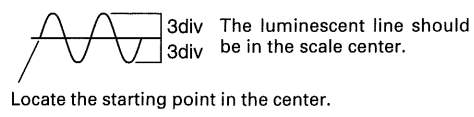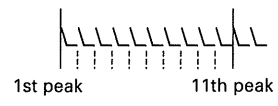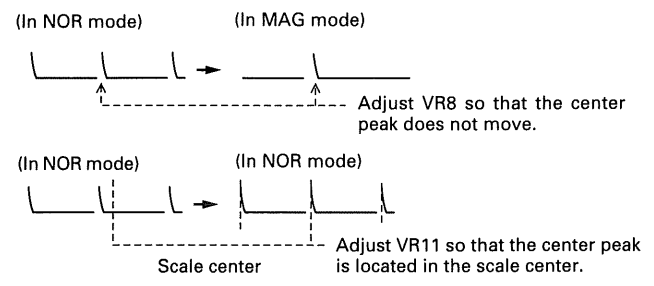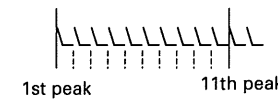
| Item | Adjustment | PCB | Procedure |
|-----------------------------|-----------------------------------|----------|--|
| TRIG Level Center | VR1 | X74-1530 | <p>* This item also can be adjusted in PROGRAM mode.</p> <p>VOLTS: 10 mV, AC-DC: AC, TRIG MODE: AUTO TRIG.LEVEL: Mechanical center, SWEEP TIME: 0.2 ms</p> <p>1) Inter a sine wave of 1 kHz to CH1 and adjust so that the amplitude extends over 6 divisions with 3 divisions symmetrically on the upper and lower sides of the scale center.</p> <p>2) Adjust so that the starting point of the waveform is located in the scale center.</p> <p>* When adjustment is performed in PROGRAM mode, never rotate TRIG. LEVEL VR before the operation is completed.</p>  |
| CH1 DC COUPLING | VR601 | X73-1900 | <p>* This item also can be adjusted in PROGRAM mode.</p> <p>COUPLING should be set to AC in the state of the step 'CH1 Waveform Shaping'</p> <p>① In the state of the step 'CH1 Waveform Shaping', set SLOPE to + and check to make sure that the starting point of the waveform is located in the scale center. (If not, adjust it using TRIG LEVEL.)</p> <p>② Switch COUPLING to DC and adjust the starting point to the scale center. For channels 2 to 4, only a check should be made.</p> <p>* When adjustment is performed in PROGRAM mode, never rotate TRIG.LEVEL VR before the operation is completed.</p> |
| A.SWEEP TIME 1 ms | VR5 | X74-1530 | <p>HORIZONTAL MODE: A SWEEP TIME: 1 ms, H. VARI: CAL</p> <p>1) Input a marker signal of 1 ms.</p> <p>2) Adjust so that every division corresponds to each peak of the marker signal one by one. (During this operation, the marker will move in the horizontal direction. Adjust it with H.POSI.)</p>  |
| A.SWEEP POSI | VR11 | X74-1530 | <p>This item is adjusted in PROGRAM mode.</p> <p>① Turn the mode to PROGRAM.</p> <p>② Set SWEEP TIME to 1 ms and H.VARI to CAL. * Do not rotate H.POSI and FINE on the panel.</p> <p>③ Input a marker signal of 1 ms.</p> <p>④ Adjust so that the first peak of the marker signal (i.e. starting point) comes to the left end of the scale.</p>  |
| MAG Gain | VR12 | X74-1530 | <p>Continue from the step 'CH4 Waveform Shaping' in PROGRAM mode.</p> <p>⑤ Turn X10 MAG on and adjust so that the interval between two adjacent peaks is 10 divisions.</p> <p>⑥ Turn X10 MAG off.</p> |
| MAG Center and A.SWEEP POSI | VR8 (MAG Center) VR11 (H.POSI) | X74-1530 | <p>Continue from the step 'CH1 Input Capacity' in PROGRAM mode.</p> <p>⑦ Set the marker signal to 5 ms.</p> <p>⑧ Adjust VR8 so that the center peak of the marker signal does not move even when X10 MAG is turned on/off both in NOR and MAG modes. (If the center peak is not displayed on the screen, rotate VR11 slightly, then adjust VR8.)</p> <p>⑨ Turn X10 MAG off and adjust VR11 so that the center peak is located in the scale center.</p> <p>⑩ Set the marker signal to 1 ms and check SWEEP TIME and A.SWEEP POSI of 1 ms again. If the error is not negligible (in other words, when the value is not within 1.5%), perform readjustment following the steps 'CH3 Waveform Shaping' to 'CH2 Input Capacity'</p> <p>* Turn PROGRAM mode off.</p>  |
| B.SWEEP TIME 1 ms | VR6 | X74-1530 | <p>Set HORIZONTAL MODE to A and A.SWEEP TIME to 2 ms first. Next, change HORIZONTAL MODE to B, then set B.SWEEP TIME to 1 ms and B TRIG to "D".</p> <p>1) Input a marker signal of 1 ms.</p> <p>2) Adjust so that every division corresponds to each peak of the marker signal one by one. (During this operation, the marker will move in the horizontal direction. Adjust it with H.POSI.)</p> <p>* If the luminescent line B is not displayed, rotate the VR for delay time.</p>  |






ADJUSTMENT
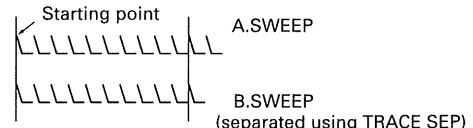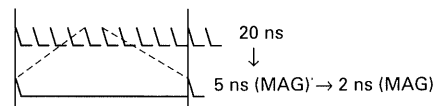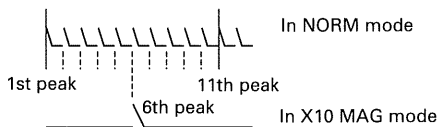
| Item | Adjustment | PCB | Procedure | | | | | | | | | | | | |
|--|------------------------------|--------------------------|--|------------|--------------|--------------|--------------|------------|------------|---------------|---------------|------------|---------------|---------------|--------------------------|
| B.SWEEP POSI | VR9 | X74-1530 | <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Set HORIZONTAL MODE to A and A.SWEEP TIME to 1 ms first. Next, change HORIZONTAL MODE to ALT, then set B.SWEEP TIME to 1 ms and B TRIG to "D".</div> <ol style="list-style-type: none"> 1) Input a marker signal of 1 ms. 2) Adjust so that the waveform of B.SWEEP overlaps that of A.SWEEP. At this point, the starting points of A. and B.SWEEP waveforms should agree.  | | | | | | | | | | | | |
| A.SWEEP TIME | TC1 (2 μs) TC3 (20 ns) | X74-1530 | <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">HORIZONTAL MODE: A SWEEP TIME: 2 μs</div> <ol style="list-style-type: none"> 1) Input a marker signal of 2 μs. 2) Adjust so that every division corresponds to each peak of the marker signal one by one. 3) Change SWEEP TIME to 20 ns and perform the same adjustment operation. | | | | | | | | | | | | |
| X10 MAG | TC101 (2 ns) TC103 (5 ns) | X80-1140 | <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">HORIZONTAL MODE: A SWEEP TIME: 50 ns X10MAG: ON</div> <ol style="list-style-type: none"> 1) Input a marker signal of 50 ns. 2) Adjust so that the interval between two adjacent peaks is 10 divisions. 3) Set SWEEP TIME to 2 ns and perform the same adjustment operation. 4) Change SWEEP TIME repeatedly among 20 ns, 5 ns (MAG) and 2 ns (MAG) till the best condition is obtained.  | | | | | | | | | | | | |
| B.SWEEP TIME | TC2 (2 μs) TC4 (20 ns) | X74-1530 | <div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Set HORIZONTAL MODE to A and A.SWEEP TIME to 5 μs first. Next, change HORIZONTAL MODE to B, then set B.SWEEP TIME to 2 μs and B TRIG to "D".</div> <ol style="list-style-type: none"> 1) Input a marker signal of 2 μs. 2) Adjust so that every division corresponds to each peak of the marker signal one by one. 3) Change SWEEP TIME to 20 ns and perform the same adjustment operation. | | | | | | | | | | | | |
| MAG Center 20 ns ↑ Readjust the dislocated gain for 2 ns. | TC5 | X74-1530 | <ol style="list-style-type: none"> ① Set SWEEP TIME to 20 ns and input a marker signal of 20 ns. ② Adjust POSI so that every division corresponds to each peak of the marker signal one by one. ③ Turn MAG on and adjust so that the 6th peak is located in the scale center.  <p>MAG Center and H.POSI H.POSI is dislocated every time when MAG center (for 1 ms) is readjusted. Never fail to check A. and B.SWEEP POSIs and adjust them again if needed.</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>MAG Center</th> <th>A.SWEEP POSI</th> <th>B.SWEEP POSI</th> </tr> </thead> <tbody> <tr> <td>Readjust VR8</td> <td>Dislocated</td> <td>Dislocated</td> </tr> <tr> <td>Stay as it is</td> <td>Readjust VR11</td> <td>Dislocated</td> </tr> <tr> <td>Stay as it is</td> <td>Stay as it is</td> <td>Make the same as A.SWEEP</td> </tr> </tbody> </table> | MAG Center | A.SWEEP POSI | B.SWEEP POSI | Readjust VR8 | Dislocated | Dislocated | Stay as it is | Readjust VR11 | Dislocated | Stay as it is | Stay as it is | Make the same as A.SWEEP |
| MAG Center | A.SWEEP POSI | B.SWEEP POSI | | | | | | | | | | | | | |
| Readjust VR8 | Dislocated | Dislocated | | | | | | | | | | | | | |
| Stay as it is | Readjust VR11 | Dislocated | | | | | | | | | | | | | |
| Stay as it is | Stay as it is | Make the same as A.SWEEP | | | | | | | | | | | | | |






ADJUSTMENT

| Item | Adjustment | PCB | Procedure |
|---------------------------------|---|--------------------------|---|
| D.T.M (DELAY TIME) | VR3 (Start) VR4 (Stop) | X74-1530 | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> HORIZONTAL MODE: ALT AC-DC: GND (for both channels) A. SWEEP TIME: 1 ms B. SWEEP TIME: 0.2 μs </div> <ol style="list-style-type: none"> 1) Display 0.200 by rotating DELAY TIME POSI. 2) Set B.SWEEP to 0.2 div (Start). 3) Display 10.000 by rotating DELAY TIME POSI. 4) Set B.SWEEP to 10 div (Stop). <div style="text-align: right; margin-top: 10px;"> </div> |
| CH1 X-Gain | VR7 | X74-1530 | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> H. MODE: X-Y, TRIG SOURCE: CH1 CH2: ON, CH1 VOLTS: 10mV However, do not CH1 on. CH2 VOLTS: 10 mV AC-DC: AC (for both channels) </div> <ol style="list-style-type: none"> ① Input a 50 mV \square square wave to CH1. ② Adjust so that the amplitude extends over 5 divisions. * Make sure to perform adjustment in the center position on the screen. <div style="text-align: right; margin-top: 10px;"> </div> |
| CH1 X-POSI | VR10 | X74-1530 | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> This item is adjusted in PROGRAM mode. </div> <ol style="list-style-type: none"> ① Change the mode to PROGRAM. ② Turn CH2 on. Then turn CH1 off. ③ Set TRIG SOURCE to CH1. ④ Set AC-DC to GND. ⑤ Check to make sure that the luminescent line is in the scale center. Then set HORI MODE to X-Y. ⑥ Adjust so that the spot comes to the center of the scale. * Take care not to rotate \diamond POSI before adjustment is completed ⑦ Turn the PROGRAM mode off. <p style="margin-top: 10px;">For channels 2 to 4, check each item.</p> <div style="text-align: right; margin-top: 10px;"> </div> |
| CH1 Square Wave Characteristics | VR1 \odot Position TC1 (for the whole range) TC2 (for the mid-range) TC39 (for the whole range) TC101 (for the mid-range) | X80-1140 X73-1900 | <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> VOLTS: 5 mV AC-DC: DC </div> <ol style="list-style-type: none"> ① Input a sweep signal to CH1 and adjust each TC and VR so that the waveform is as shown in the photo. However, TC101 of X73-1900 is omitted. <div style="text-align: right; margin-top: 10px;"> </div> |




ADJUSTMENT
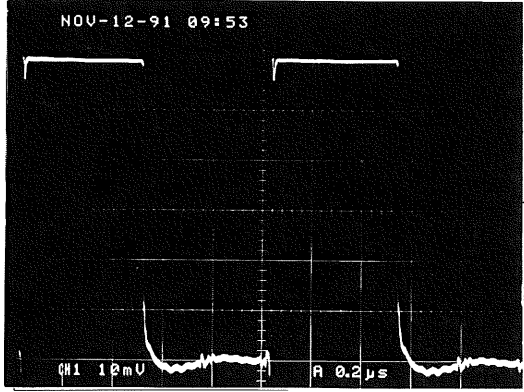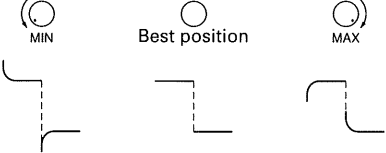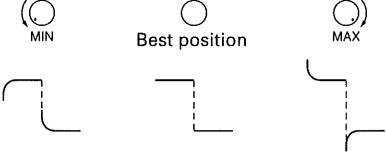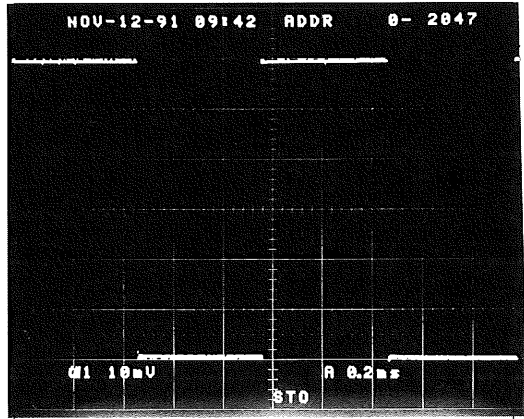
| Item | Adjustment | PCB | Procedure |
|---------------------------------|--|----------|---|
| CH1 Square Wave Characteristics | | | <p>② Input a square wave of 1 MHz and adjust so that the amplitude extends over 6 divisions. The waveform is as shown in the photo.</p> <p>③ Shape the overshoot using TC101 of X73-1900 and other TCs/VRs, and adjust TC1 in the final stage so that the overshoot extends over 2 divisions.</p>   |
| Square Wave Characteristics | TC201 (CH2) TC301 (CH3) TC401 (CH4) | X73-1900 | <p>VOLTS: 5 mV, AC-DC: DC</p> <p>① Input a square wave of 1 MHz and adjust so that the amplitude extends over 6 divisions. ② Adjust so that the waveform is the same as that of CH1. Adjust each channel repeating the steps ① and ②.</p> |
| CH1 STO 10 kHz Square Wave | VR112 TC102 | X73-1900 | <p>Variable range of VR112 (effective for Gain and OS)</p>  <p>Variable range of TC102 (effective for OS only)</p>  <p>SCOPE MODE: STORAGE VOLTS: 10 mV, AC-DC: DC</p> <p>① Input a square wave \square of 10 kHz and adjust so that the amplitude extends over approx. 5 divisions. ② Adjust so that the leading edge of the waveform is flat.</p>  |
| CH2 STO 10 kHz Square Wave | VR212 TC202 | X73-1900 | Adjust in the same way as for CH1. |
| CH3 STO 10 kHz Square Wave | VR312 TC302 | X73-1900 | Adjust in the same way as for CH1. |
| CH4 STO 10 kHz Square Wave | VR412 TC402 | X73-1900 | Adjust in the same way as for CH1. |
| STO V.Gain | VR111 (CH1) VR211 (CH2) VR311 (CH3) VR411 (CH4) | X73-1900 | <p>SCOPE MODE: STORAGE VOLTS: 10 mV, VARI: CAL, AC-DC: DC</p> <p>① Input a 50 mV square wave \square of 1 kHz and adjust so that the amplitude extends over 5 divisions.</p> <p>Adjust CH1 to CH4 repeating the step ①.</p> |





ADJUSTMENT
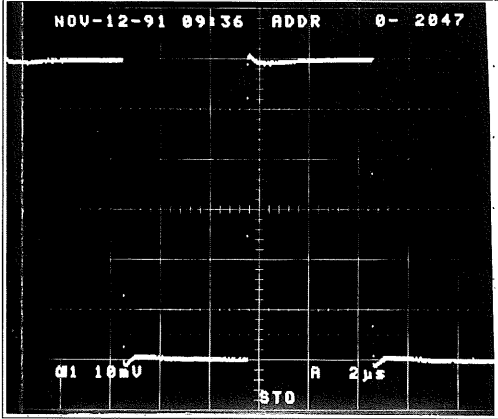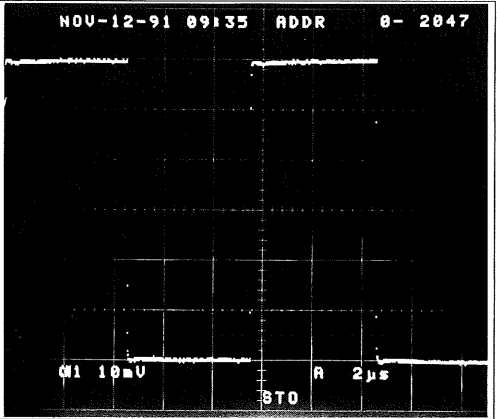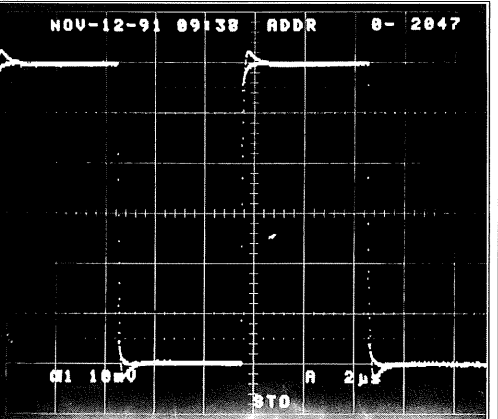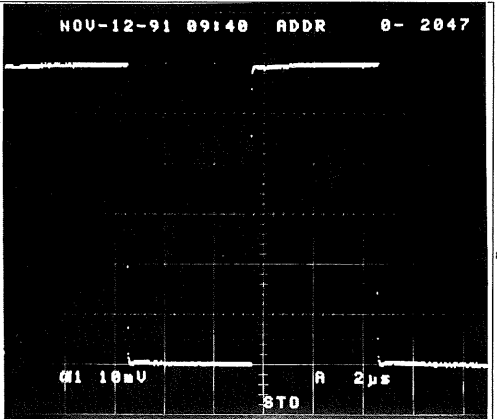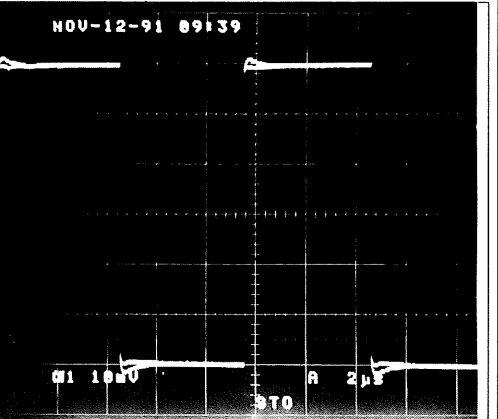
| Item | Adjustment | PCB | Procedure |
|--------------------------------|--|----------|--|
| STO POSI Center | VR110 (CH1) VR210 (CH2) VR310 (CH3) VR410 (CH4) | X73-1900 | <ol style="list-style-type: none"> ① Change the mode to PROGRAM. ② Turn on CH1, CH2, CH3 and CH4. ③ Set VOLTS to 20 mV (CH1 to CH4). ④ Set AC-DC to GND (CH1 to CH4). (Adjust so that all the luminescent lines for channels 1 to 4 overlap one another in the scale center.) ⑤ Turn SCOPE MODE on to change the mode to STORAGE. ⑥ Adjust each VR so that all the luminescent lines for channels 1 to 4 are in the scale center. (Adjust so that the positions are the same as those in REAL mode.) <p>* Take care not to rotate \diamond POSI before adjustment is completed.</p> <ol style="list-style-type: none"> ⑦ Turn the PROGRAM mode off. |
| CH1 STO 100 kHz Square Wave | VR101 TC101 | X78-1070 | <div style="border: 1px solid black; padding: 2px; width: fit-content; margin-bottom: 10px;"> SCOPE MODE: STORAGE VOLTS: 10 mV, AC-DC: DC </div> <p style="text-align: center;">Variable range of VR101 (effective for GAIN and OS)</p> <div style="display: flex; justify-content: space-around; text-align: center;"> <div style="width: 30%;"> <p>(Set to MIN)</p>  </div> <div style="width: 30%;"> <p>(Best position)</p>  </div> <div style="width: 30%;"> <p>(Around MAX)</p>  </div> </div> <p style="text-align: center;">Variable range of TC101 (effective for OS only)</p> <div style="display: flex; justify-content: space-around; text-align: center;"> <div style="width: 45%;"> <p>(Best position)</p>  </div> <div style="width: 45%;"> <p>(Variable range)</p>  </div> </div> <ol style="list-style-type: none"> ① Input a square wave \square of 100 kHz and adjust so that the amplitude extends over approx. 5 divisions. ② Adjust so that the leading edge of the waveform is flat. |
| CH2 STO 100 kHz Square Wave | VR201 TC201 | X78-1070 | Adjust in the same way as for CH1. |
| CH3 STO 100 kHz Square Wave | VR101 TC101 | X78-1070 | Adjust in the same way as for CH1. |
| CH4 STO 100 kHz Square Wave | VR201 TC201 | X78-1070 | Adjust in the same way as for CH1. |

ADJUSTMENT
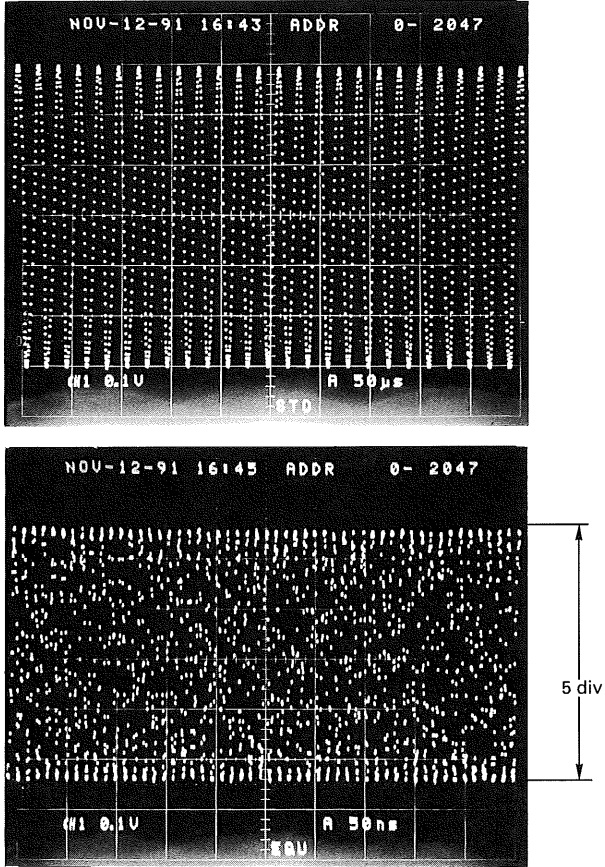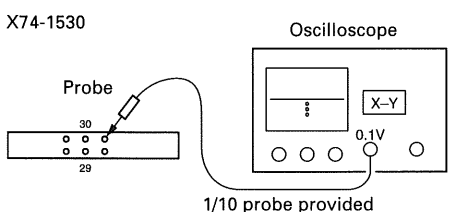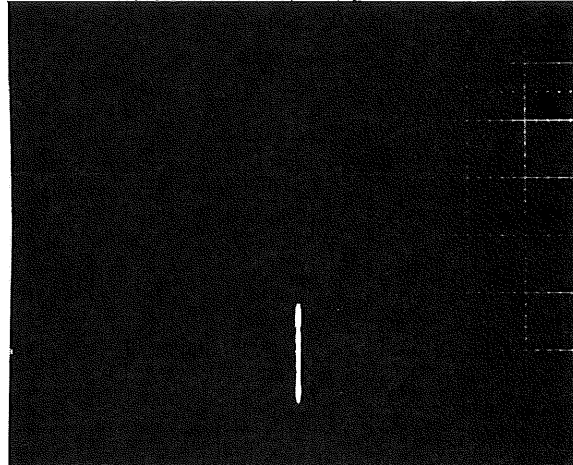
| Item | Adjustment | PCB | Procedure |
|---|--|----------|--|
| CH1 STO Frequency Characteristics | U106-TC1 | X73-1900 | <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-bottom: 10px;">SCOPE MODE: STORAGE VOLTS: 10 mV, AC-DC: DC</div> <ol style="list-style-type: none"> ① Input a sine wave A_v of 50 kHz to CH1 and adjust so that the amplitude extends over 6 divisions. ② Change the frequency to 100 MHz keeping the level of the signal generator (SG). <div style="text-align: right; margin-top: 20px;">  </div> <ol style="list-style-type: none"> ③ Change the STORAGE mode from NOR to EQU. ④ Adjust so that the amplitude extends over 5 divisions. |
| STO Frequency Characteristics (CH2 to CH4) | U206-TC1 (CH2) U306-TC1 (CH3) U406-TC1 (CH4) | X73-1900 | Adjust each channel in the same way as for CH1. |
| Equivalent Sampling Offset and Gain | VR14 (Offset) VR13 (Gain) | X74-1530 | <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-bottom: 10px;">SCOPE MODE: STORAGE VOLTS: 10 mV, STORAGE MODE: EQU</div> <ol style="list-style-type: none"> ① Input a sine wave of 40MHz to CH1 and adjust so that the amplitude extends over 6 divisions. ② Set VOLTS of the oscilloscope to 1 V range (i.e. 0.1 V range when the probe is used) and the mode to X-Y operation. Then adjust POSI so that the spot comes to the scale center. ③ Apply the probe to No.32 of P16 of X74-1530. <div style="text-align: center; margin-top: 20px;">  </div> <div style="text-align: right; margin-top: 20px;"> <p>Waveform on the oscilloscope screen</p>  </div> |


ADJUSTMENT
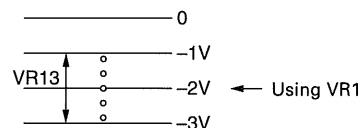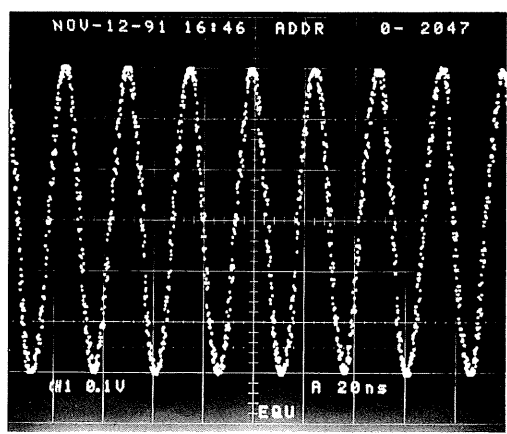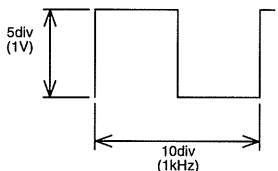
| Item | Adjustment | PCB | Procedure |
|-------------------------------------|------------------------------|----------|---|
| Equivalent Sampling Offset and Gain | VR14 (Offset) VR13 (Gain) | X74-1530 | <p>④ Adjust VR14 so that the moving center of the spot is -2 V, then adjust VR13 so that whole the movement range is 2 V.</p> <div style="text-align: right;">  </div> <p>In addition, the spot moves frequently in the vertical direction. Make sure to perform the operation correctly.</p> <p>⑤ Check to make sure that there is no great gap found in the waveform of the main body.</p> <div style="text-align: right;">  </div> |
| CAL Voltage | VR5 (1 kHz) VR6 (1 V) | X81-2900 | <p>1) Connect the calibrated oscilloscope and frequency counter with the CAL terminal and adjust as shown in the figure below.</p> <div style="text-align: center;">  </div> <div style="text-align: right;">  </div> <p>* The figure shows the case where the oscilloscope for measurement has been set as follows: VOLTS: 0.2 V SWEEP TIME: 0.1 ms.</p> |

ADJUSTMENT


HIGH VOLTAGE UNIT (X68-1590-00)

UPPER

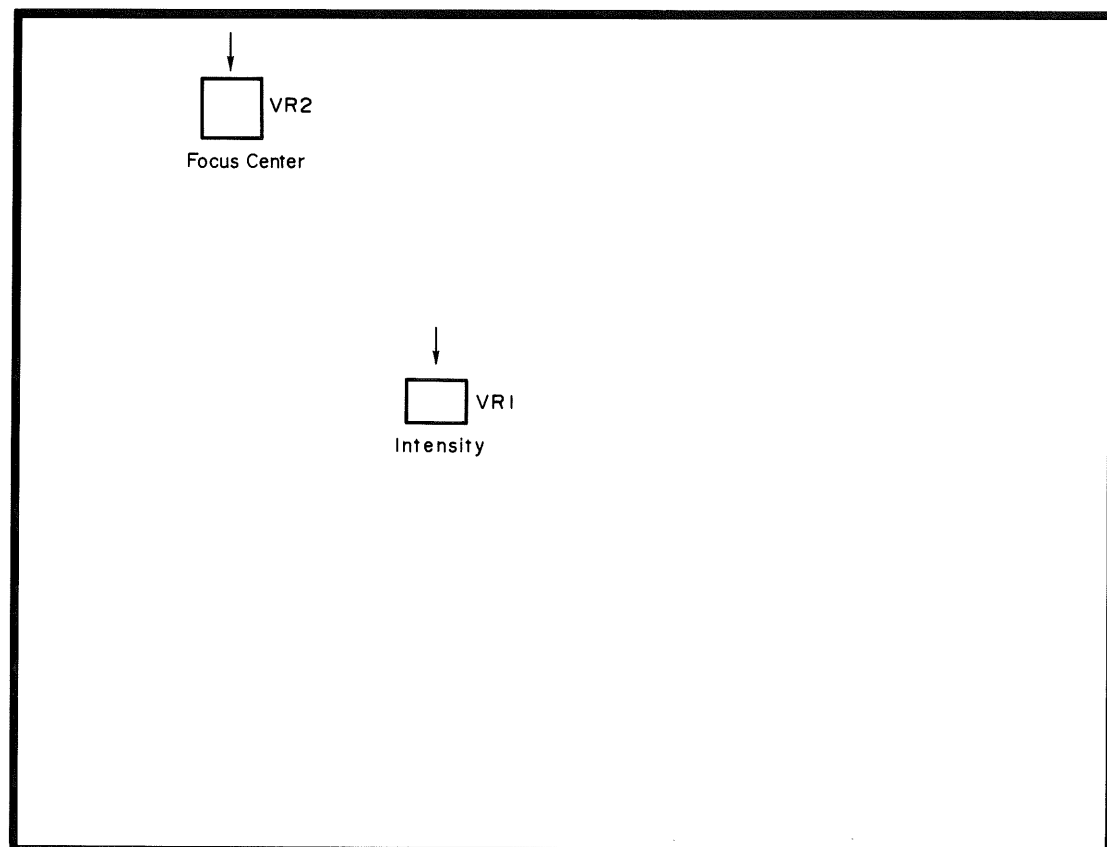
ADJUSTMENT

VERTICAL UNIT (X73-1900-00)

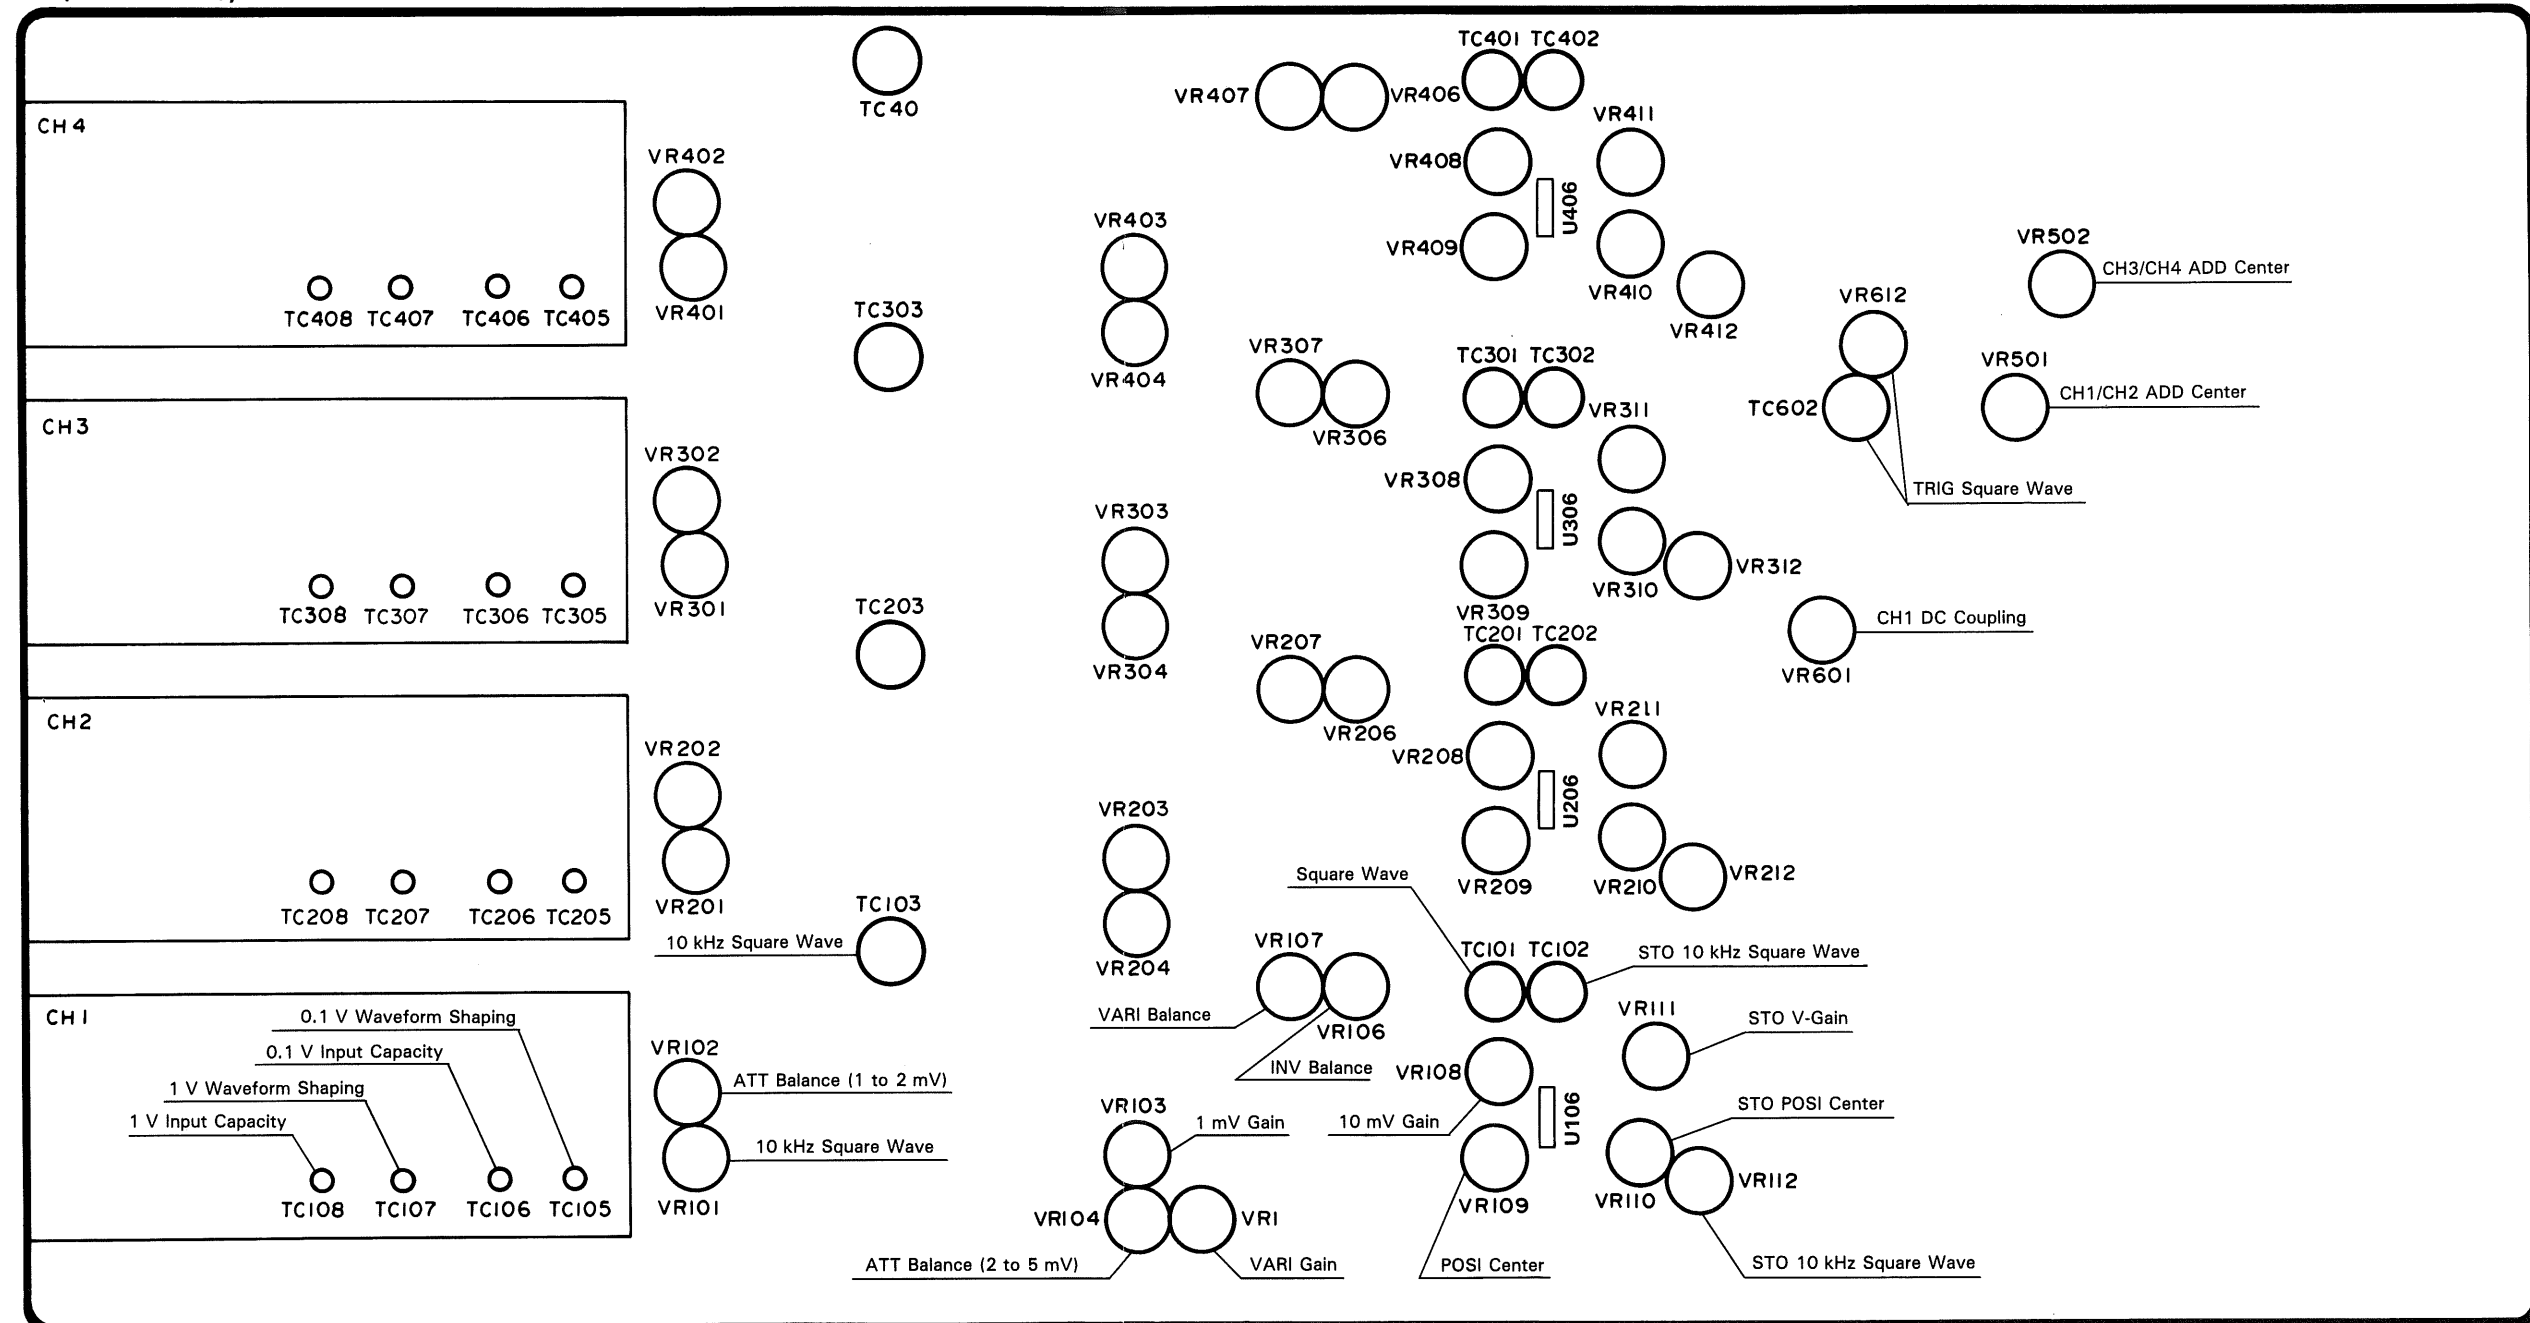


ADJUSTMENT

HORIZONTAL UNIT (74-1530-00)

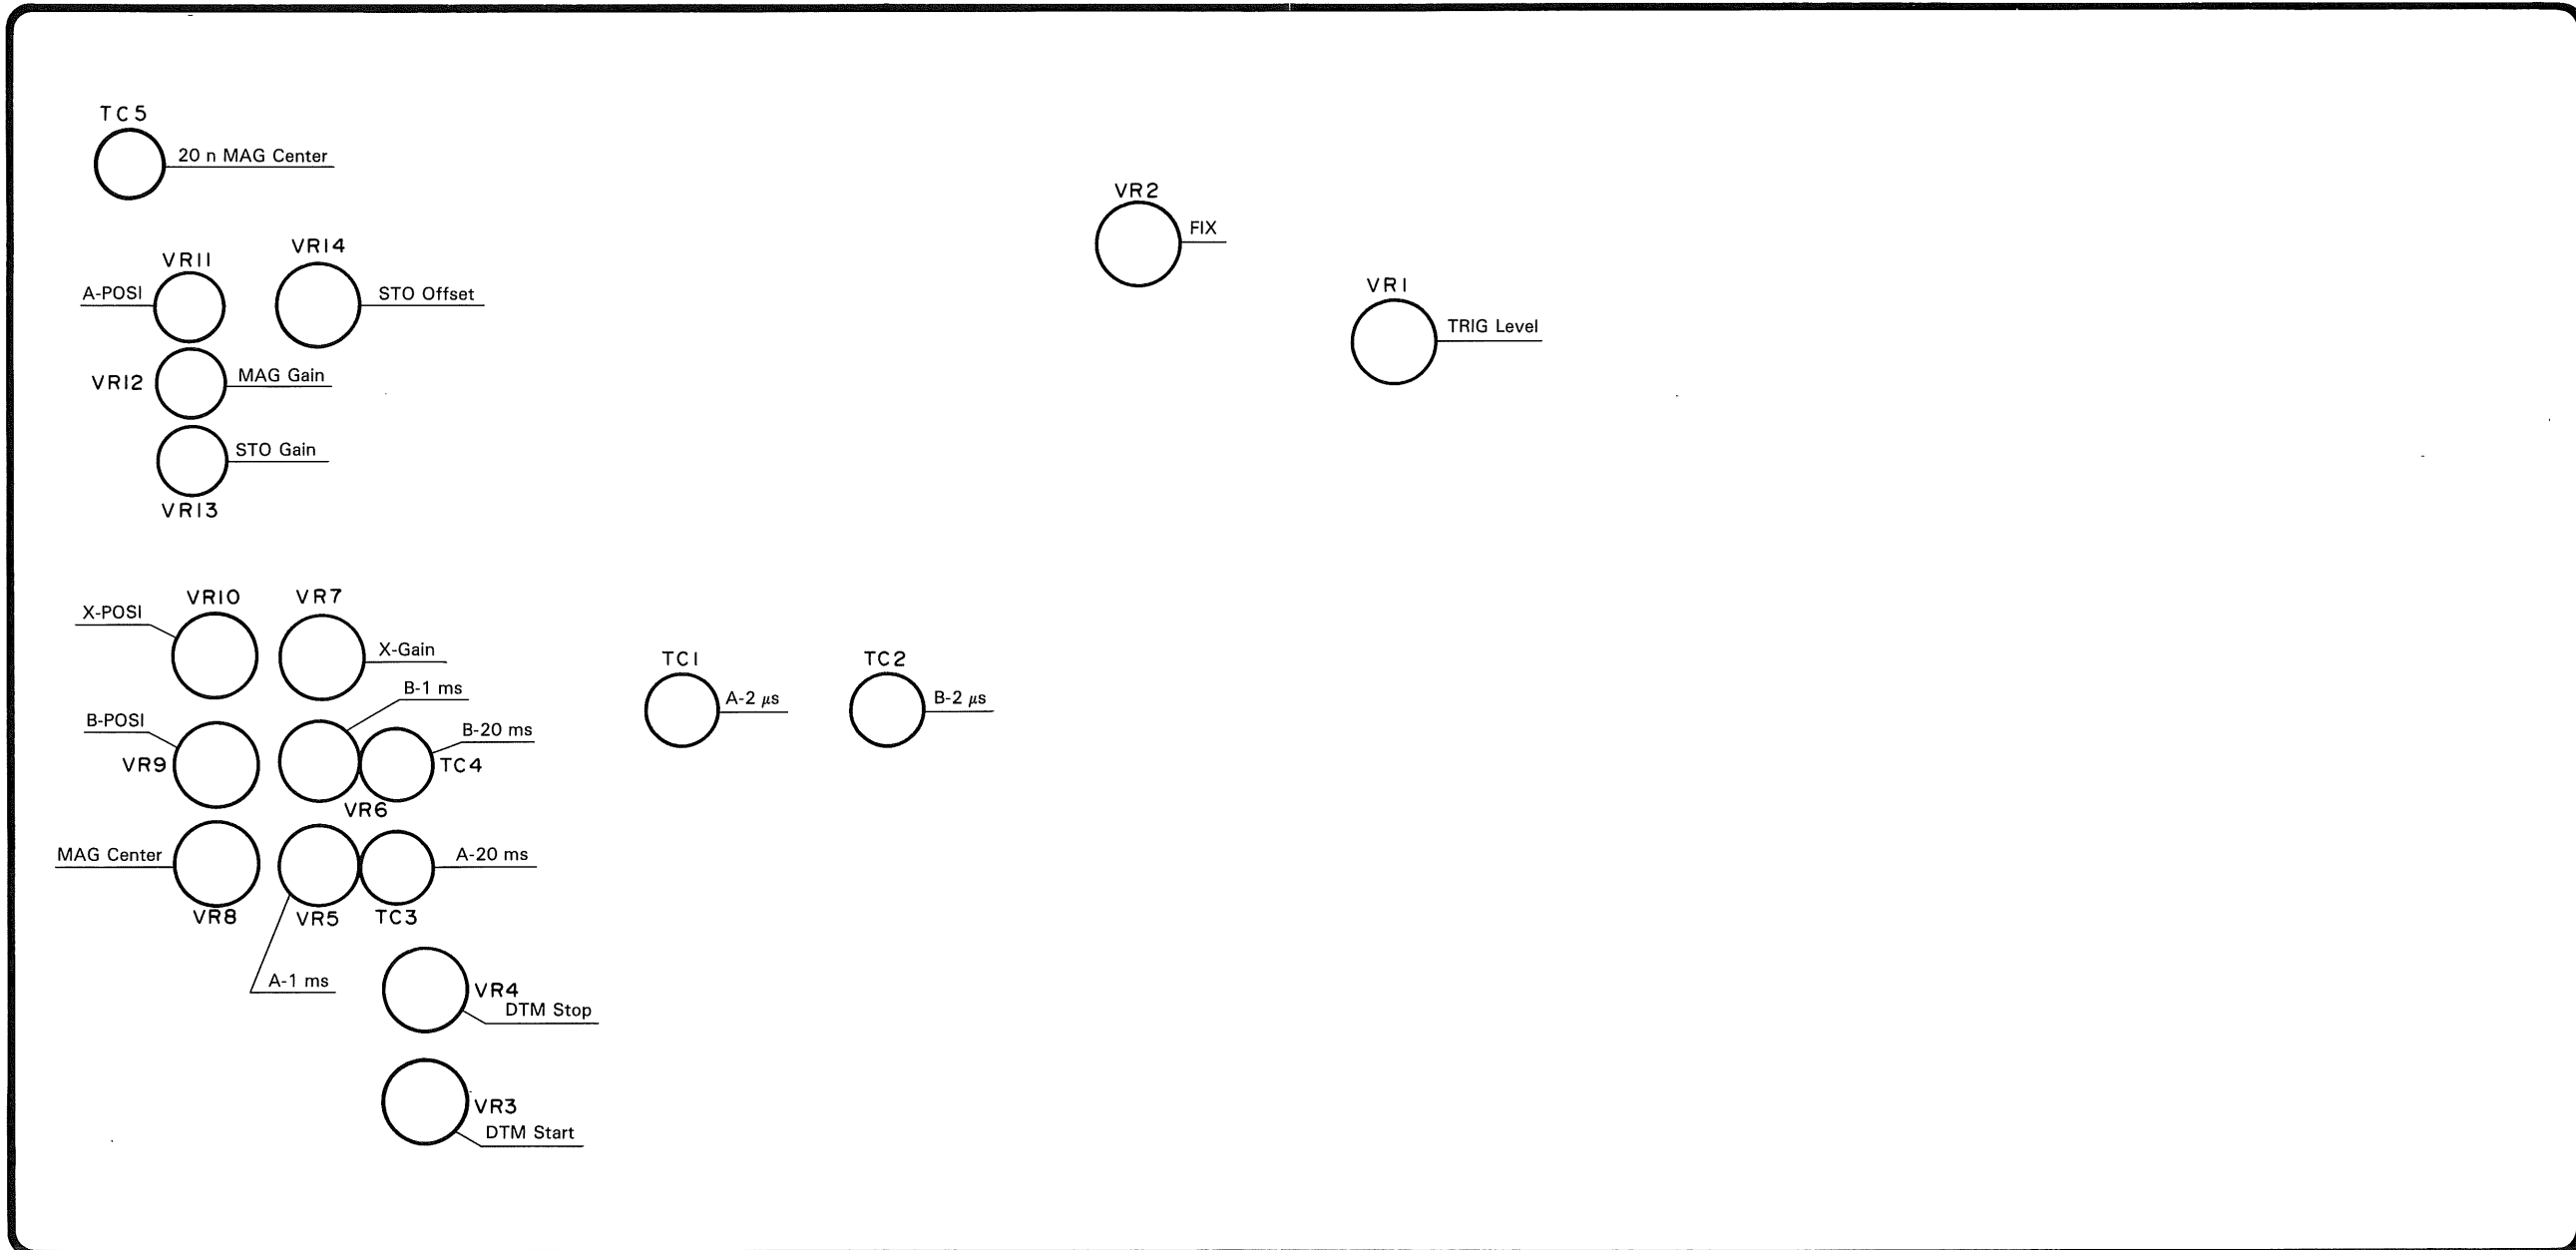



ADJUSTMENT

STO CPU UNIT (X77-1660-0X)

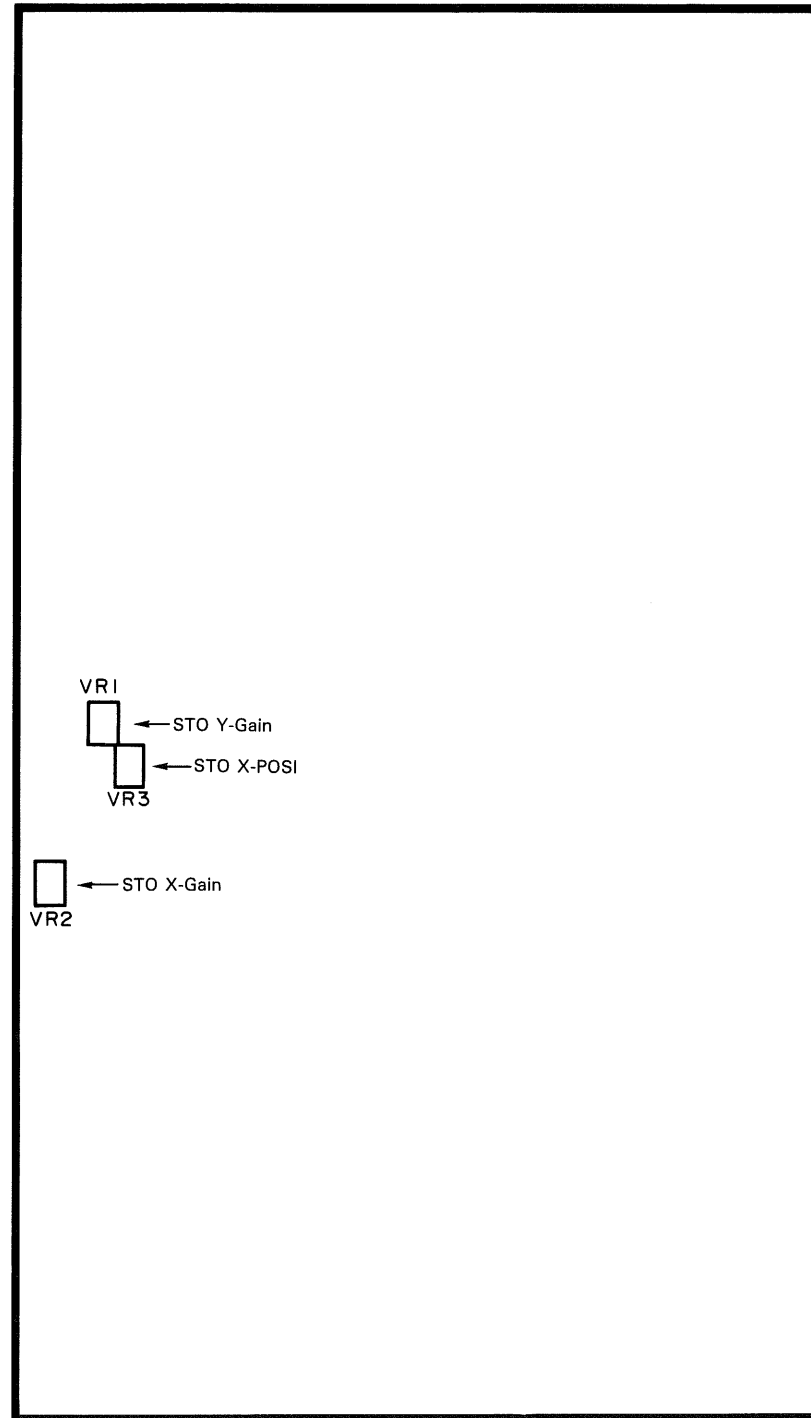

ADJUSTMENT


R/O UNIT (X78-1070-00)

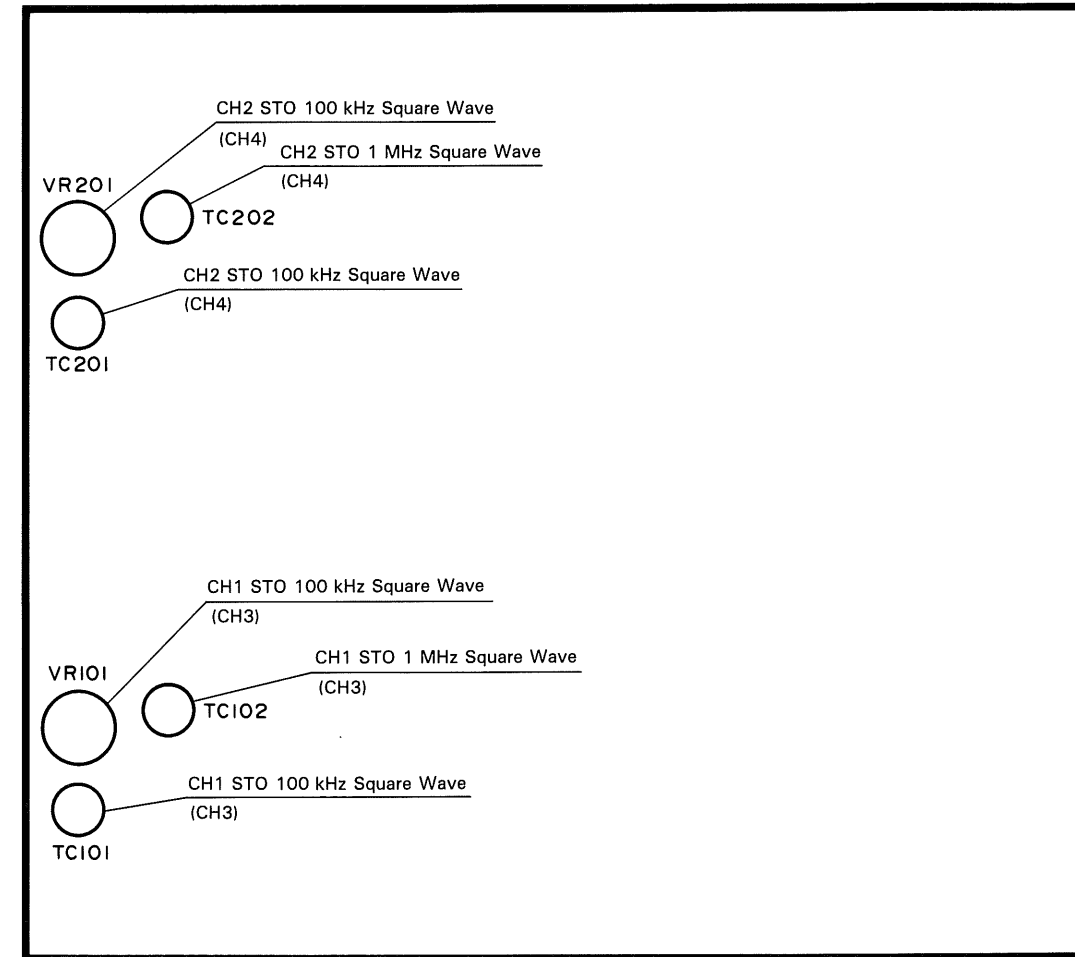

ADJUSTMENT


GPIB UNIT (X79-1120-00 A/4)

FRONT

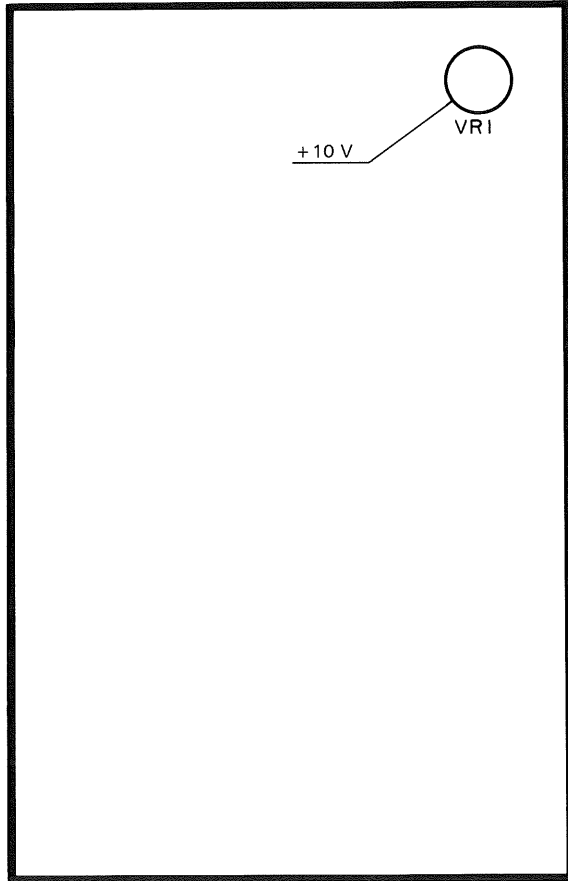

ADJUSTMENT


FINAL UNIT (X80-1140-00)

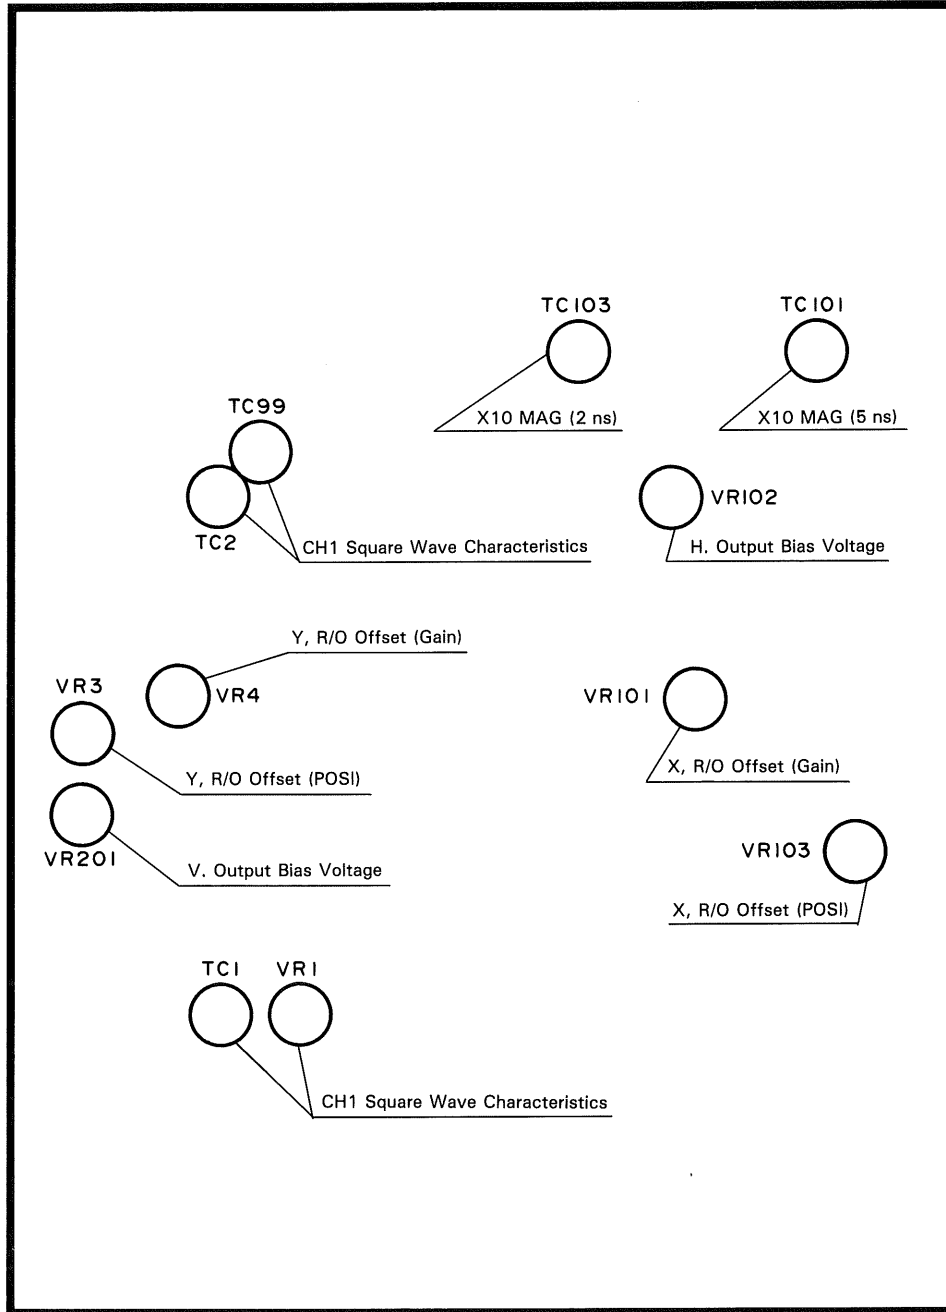

FRONT

ADJUSTMENT

VR UNIT (X81-2900-00)

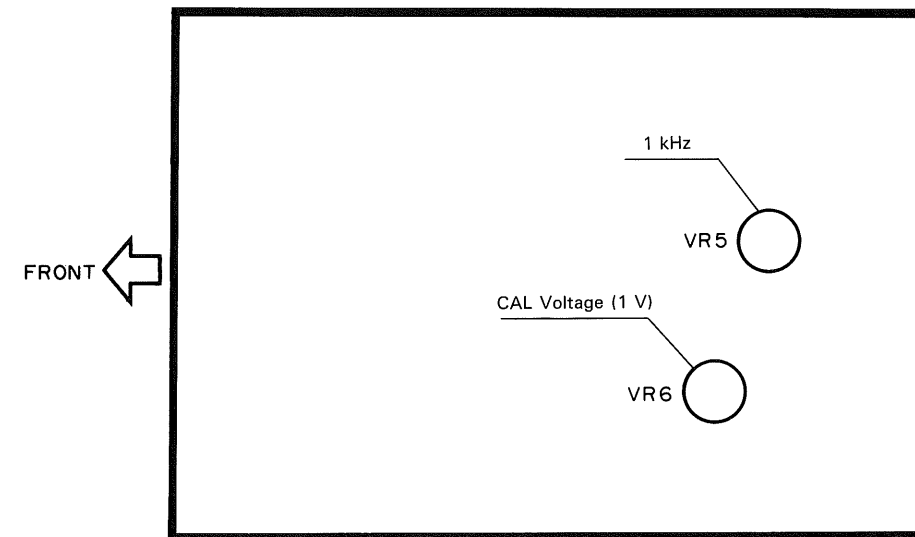

TROUBLESHOOTING






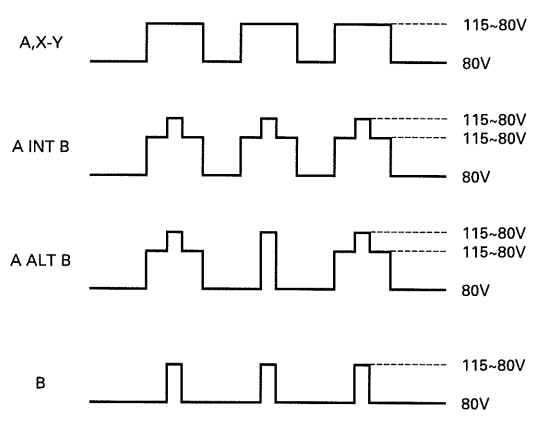


Fig.1 Q6 Collector Signal

TROUBLESHOOTING

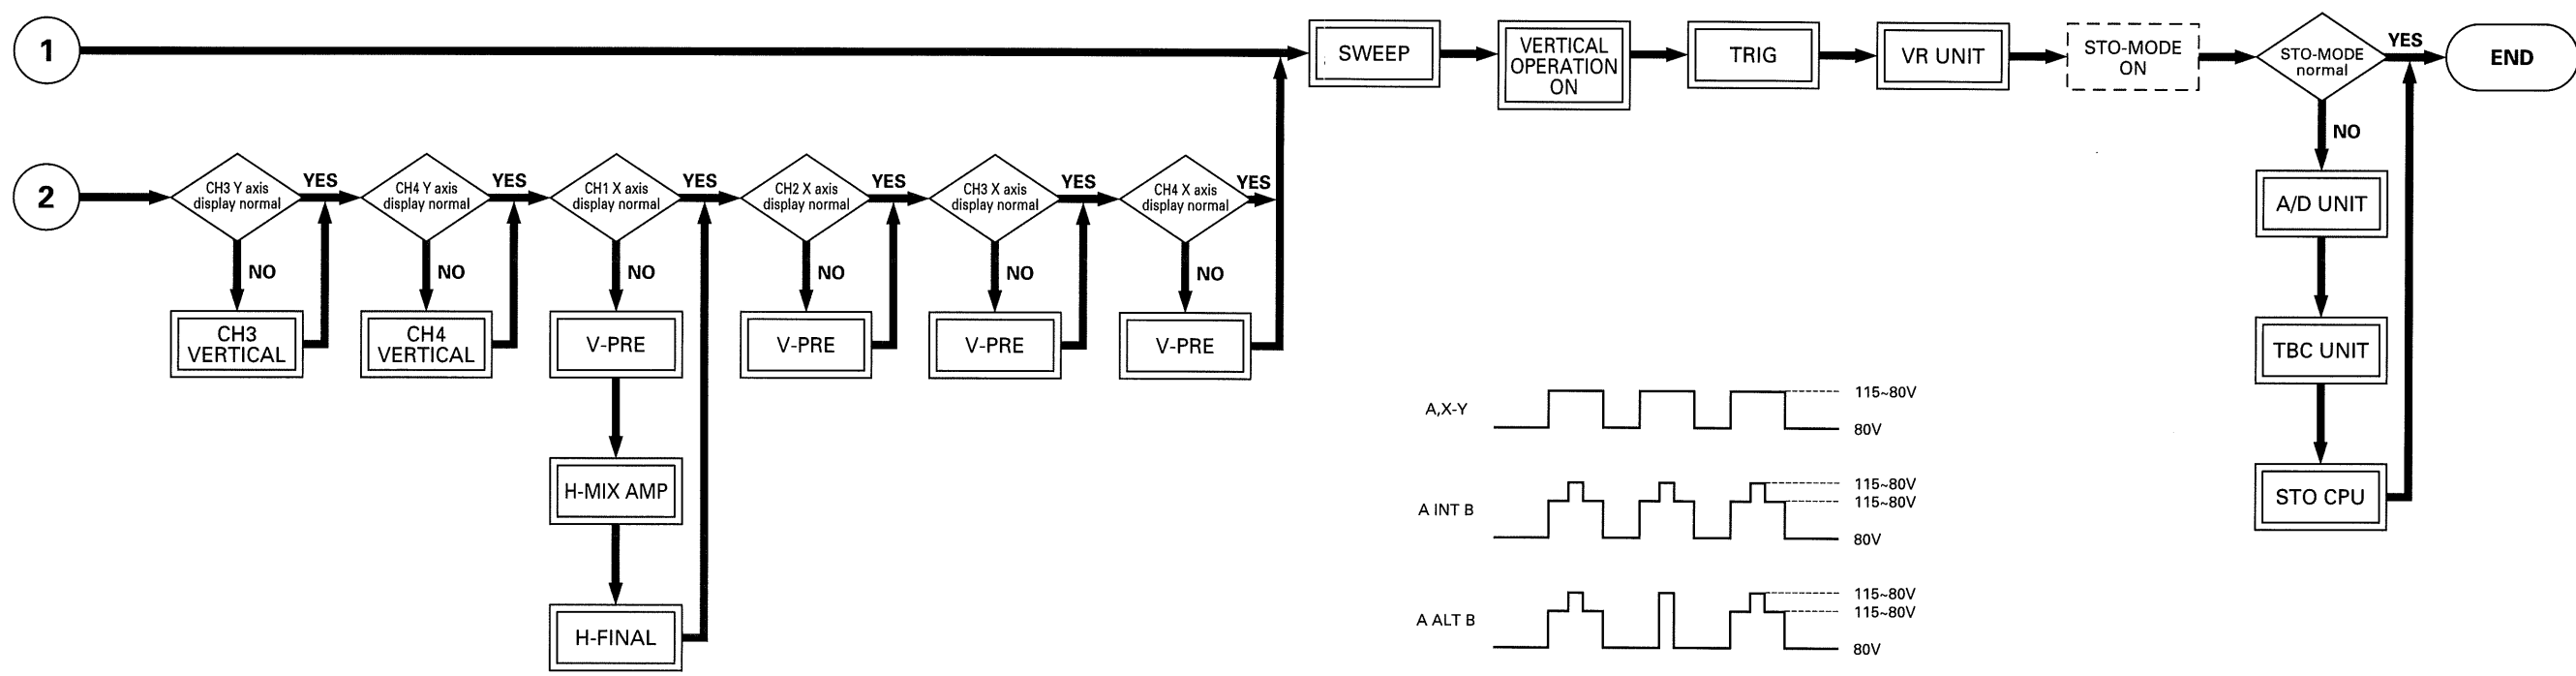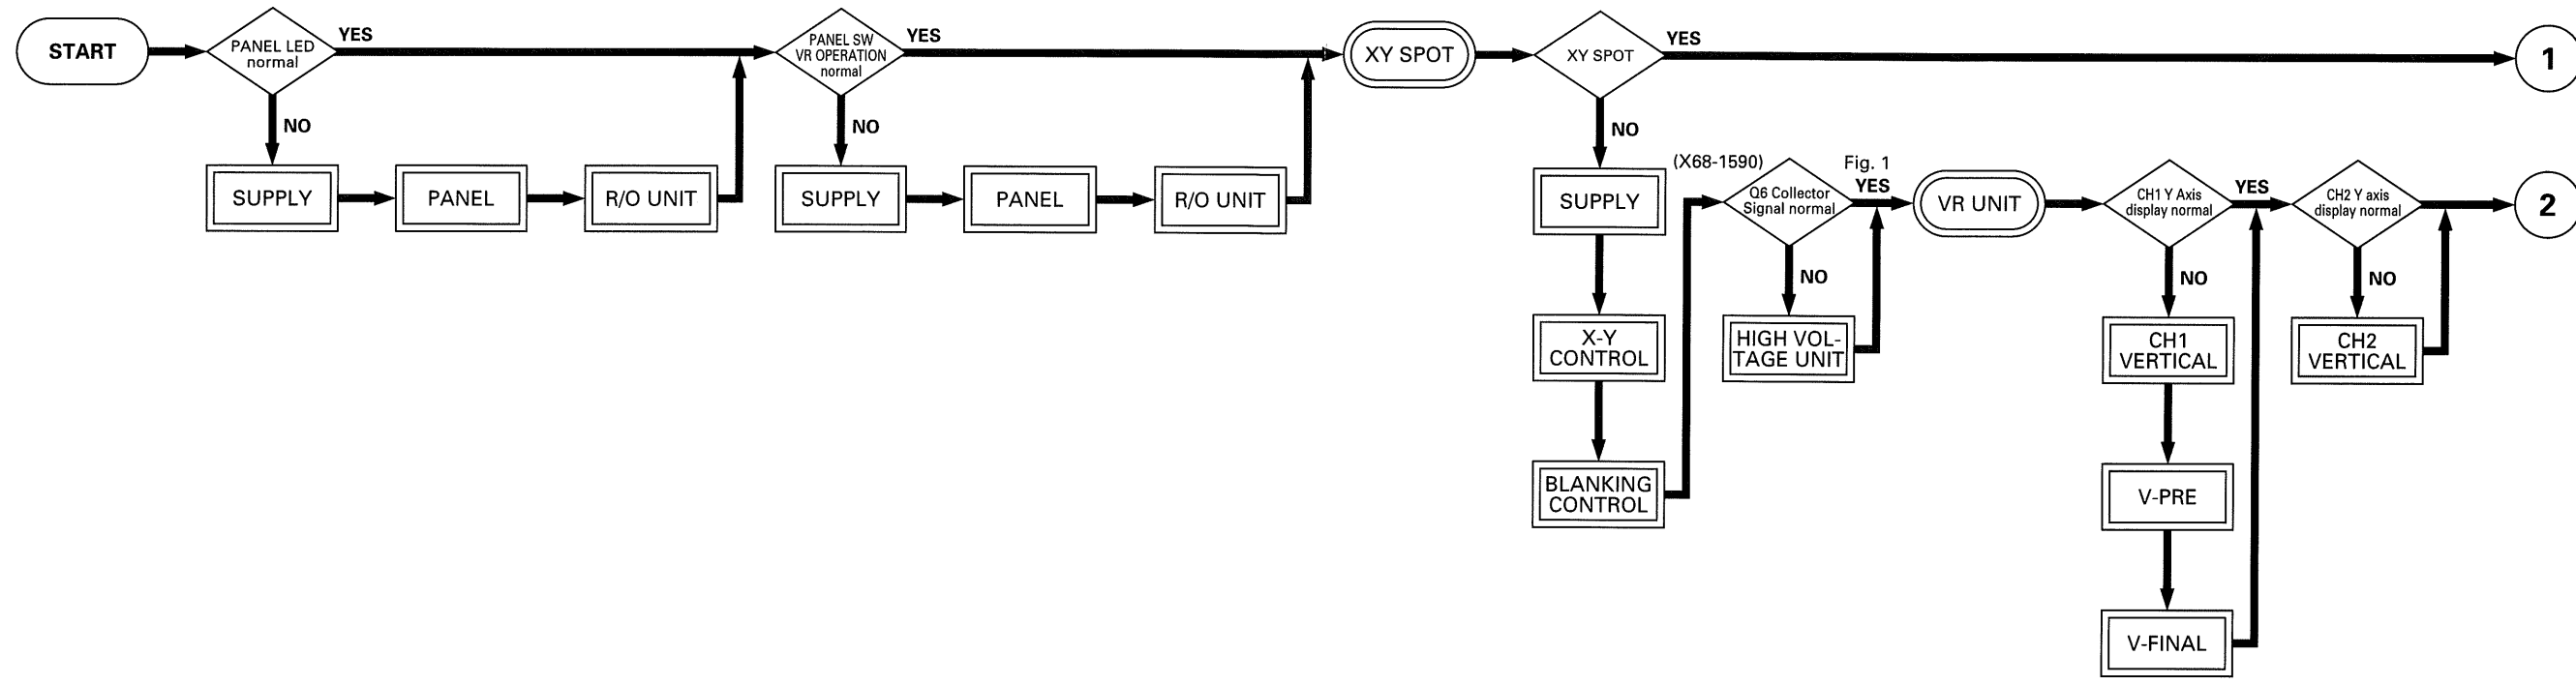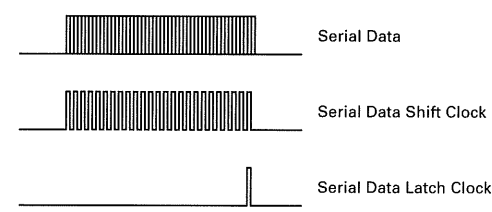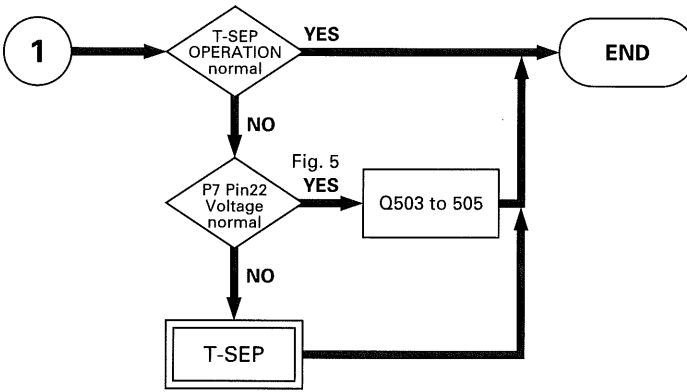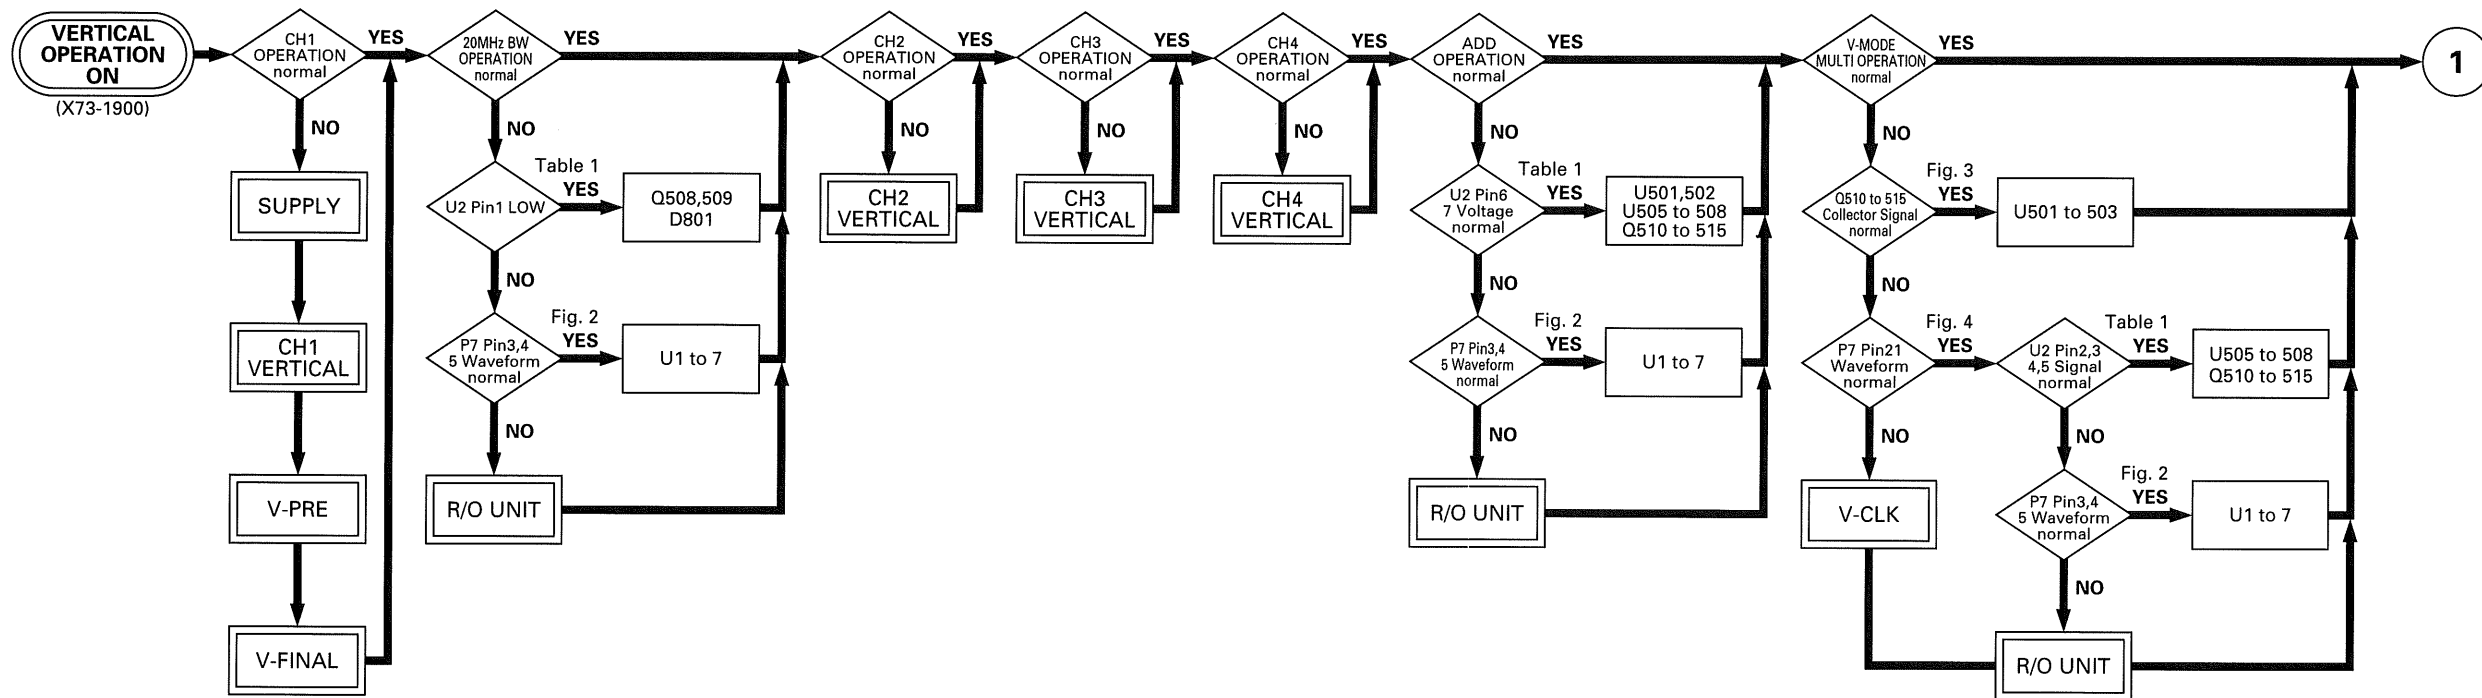

| | PANEL SW SCAN | PANEL LED Control | V UNIT Control | H UNIT Control | TBC UNIT Control |
|-------------------------|-----------------|-------------------|----------------|----------------|------------------|
| Serial Data | P27 Pin 14 SWD | P27 Pin 15 LD | P7 Pin 5 VD | P16 Pin 18 HD | P54 Pin 3 SDAD |
| Serial Data Shift Clock | P27 Pin 11 SWSC | P27 Pin 16 LSC | P7 Pin 3 VSC | P16 Pin 17 HSC | P54 Pin 2 SCKA |
| Serial Data Latch Clock | P27 Pin 12 SWLC | P27 Pin 13 LLC | P7 Pin 4 VLC | P16 Pin 19 HLC | P54 Pin 1 LCKA |

Fig.2 Transration Time Chart

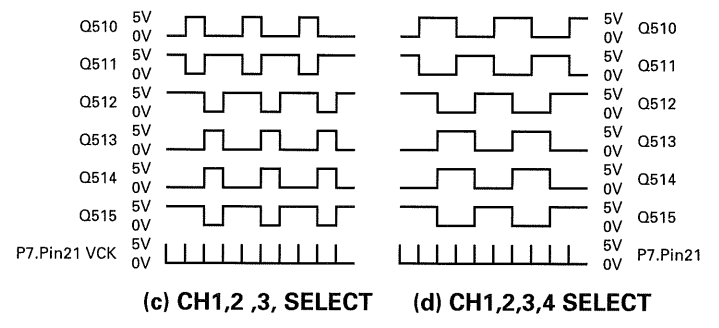
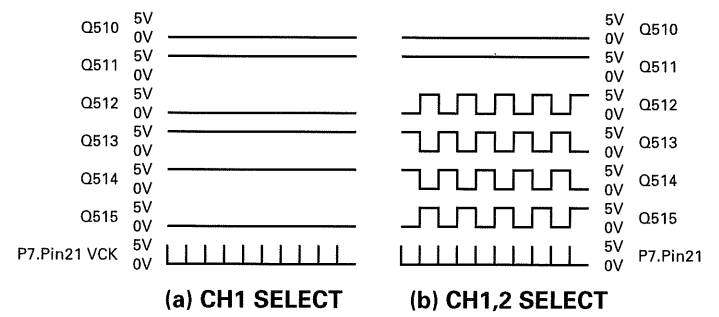


Fig.3 Q510-515 Collector Signal




Fig.4 V-CLK Signal

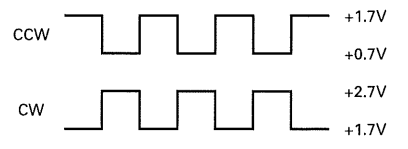


Fig.5 P7 Pin 22 TS-O

TROUBLESHOOTING

VERTICAL UNIT (From R/O)

| No | Pin | Output Order | Signal Name | Content |
|----|-----|--------------|--|--|
| U1 | 15 | 56 | CH1INV | CH1-INV="ON" THEN "H" ELSE "L" |
| | 1 | 55 | CH1NOR | CH1-INV="ON" THEN "L" ELSE "H" |
| | 2 | 54 | CH2INV | CH2-INV="ON" THEN "H" ELSE "L" |
| | 3 | 53 | CH2NOR | CH2-INV="ON" THEN "L" ELSE "H" |
| | 4 | 52 | CH3INV | CH3-INV="ON" THEN "H" ELSE "L" |
| | 5 | 51 | CH3NOR | CH3-INV="ON" THEN "L" ELSE "H" |
| | 6 | 50 | CH4INV | CH4-INV="ON" THEN "H" ELSE "L" |
| 7 | 49 | CH4NOR | CH4-INV="ON" THEN "L" ELSE "H" | |
| U2 | 15 | 48 | NULL | "L" |
| | 1 | 47 | BWL | BAND-WIDTH-LIMIT="ON" THEN "L" ELSE "H" |
| | 2 | 46 | CH1E | V-Mode=CH1 Select THEN "L" ELSE "H" |
| | 3 | 45 | CH2E | V-Mode=CH2 Select THEN "L" ELSE "H" |
| | 4 | 44 | CH3E | V-Mode=CH3 Select THEN "L" ELSE "H" |
| | 5 | 43 | CH4E | V-Mode=CH4 Select THEN "L" ELSE "H" |
| | 6 | 42 | ADD1E | V-Mode=CALC AND MENU CH1+CH2 THEN "L" ELSE "H" |
| 7 | 41 | ADD3E | V-Mode=CALC AND MENU CH3+CH4 THEN "L" ELSE "H" | |
| U3 | 15 | 40 | NULL | "L" |
| | 1 | 39 | CH13TE | T-Source="CH1" OR "CH3" THEN "L" ELSE "H" |
| | 2 | 38 | CH34TE | T-Source="CH3" OR "CH4" THEN "L" ELSE "H" |
| | 3 | 37 | CH12TE | T-Source="CH1" OR "CH2" THEN "L" ELSE "H" |
| | 4 | 36 | CH24TE | T-Source="CH2" OR "CH4" THEN "L" ELSE "H" |
| | 5 | 35 | NULL | "L" |
| | 6 | 34 | NULL | "L" |
| 7 | 33 | NULL | "L" | |
| U4 | 15 | 32 | NULL | "L" |
| | 1 | 31 | CH1DC | CH1-DC = "ON" THEN "H" ELSE "L" |
| | 2 | 30 | CH1GND | CH1-GND = "ON" THEN "L" ELSE "H" |
| | 3 | 29 | CH11/10 | CH1-1/10-ATT = "ON" THEN "H" ELSE "L" |
| | 4 | 28 | CH11/100 | CH1-1/100-ATT = "ON" THEN "H" ELSE "L" |
| | 5 | 27 | CH11/4 | CH1-1/4-ATT = "ON" THEN "H" ELSE "L" |
| | 6 | 26 | CH1MAG | CH1-MAG = "ON" THEN "H" ELSE "L" |
| 7 | 25 | CH11/2 | CH1-1/2-ATT = "ON" THEN "H" ELSE "L" | |
| U5 | 15 | 24 | NULL | "L" |
| | 1 | 23 | CH2DC | CH2-DC = "ON" THEN "H" ELSE "L" |
| | 2 | 22 | CH2GND | CH2-GND = "ON" THEN "L" ELSE "H" |
| | 3 | 21 | CH21/10 | CH2-1/10-ATT = "ON" THEN "H" ELSE "L" |
| | 4 | 20 | CH21/100 | CH2-1/100-ATT = "ON" THEN "H" ELSE "L" |
| | 5 | 19 | CH21/4 | CH2-1/4-ATT = "ON" THEN "H" ELSE "L" |
| | 6 | 18 | CH2MAG | CH2-MAG = "ON" THEN "H" ELSE "L" |
| 7 | 17 | CH21/2 | CH2-1/2-ATT = "ON" THEN "H" ELSE "L" | |
| U6 | 15 | 16 | NULL | "L" |
| | 1 | 15 | CH3DC | CH3-DC = "ON" THEN "H" ELSE "L" |
| | 2 | 14 | CH3GND | CH3-GND = "ON" THEN "L" ELSE "H" |
| | 3 | 13 | CH31/10 | CH3-1/10-ATT = "ON" THEN "H" ELSE "L" |
| | 4 | 12 | CH31/100 | CH3-1/100-ATT = "ON" THEN "H" ELSE "L" |
| | 5 | 11 | CH31/4 | CH3-1/4-ATT = "ON" THEN "H" ELSE "L" |
| | 6 | 10 | CH3MAG | CH3-MAG = "ON" THEN "H" ELSE "L" |
| 7 | 9 | CH31/2 | CH3-1/2-ATT = "ON" THEN "H" ELSE "L" | |
| U7 | 15 | 8 | NULL | "L" |
| | 1 | 7 | CH4DC | CH4-DC = "ON" THEN "H" ELSE "L" |
| | 2 | 6 | CH4GND | CH4-GND = "ON" THEN "L" ELSE "H" |
| | 3 | 5 | CH41/10 | CH4-1/10-ATT = "ON" THEN "H" ELSE "L" |
| | 4 | 4 | CH41/100 | CH4-1/100-ATT = "ON" THEN "H" ELSE "L" |
| | 5 | 3 | CH41/4 | CH4-1/4-ATT = "ON" THEN "H" ELSE "L" |
| | 6 | 2 | CH4MAG | CH4-MAG = "ON" THEN "H" ELSE "L" |
| 7 | 1 | CH41/2 | CH4-1/2-ATT = "ON" THEN "H" ELSE "L" | |

Table 1 Serial Transfer




Fig. 6




Fig. 7




Fig. 8




Fig. 9







Fig. 10

- 1 kHz Sine Wave
- 60 mV_{P-P} Input
- V_{ATT}: 10 mV/div

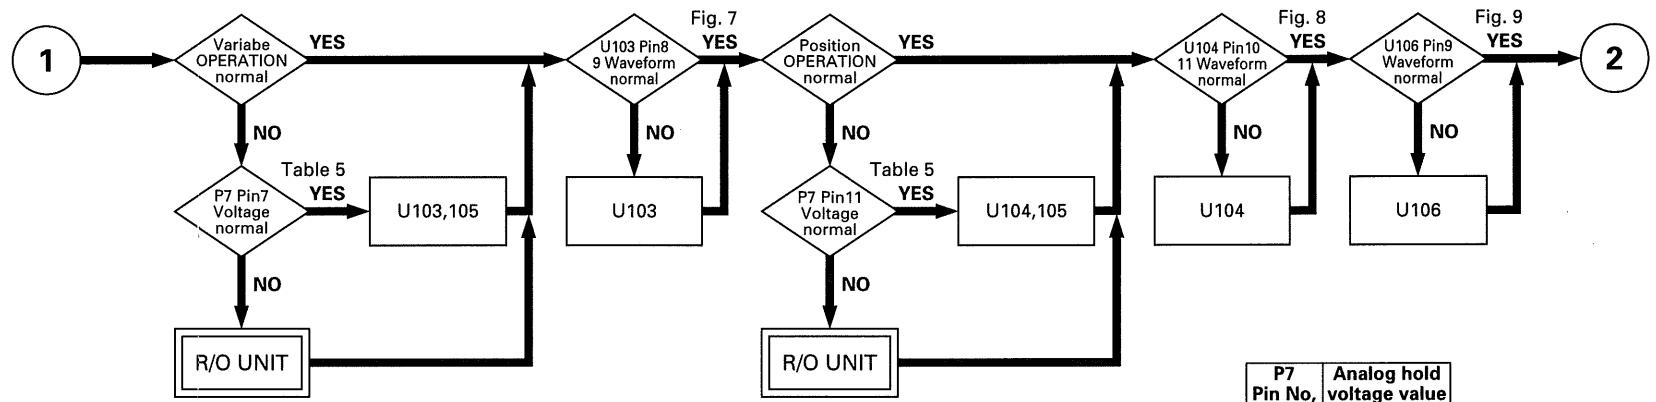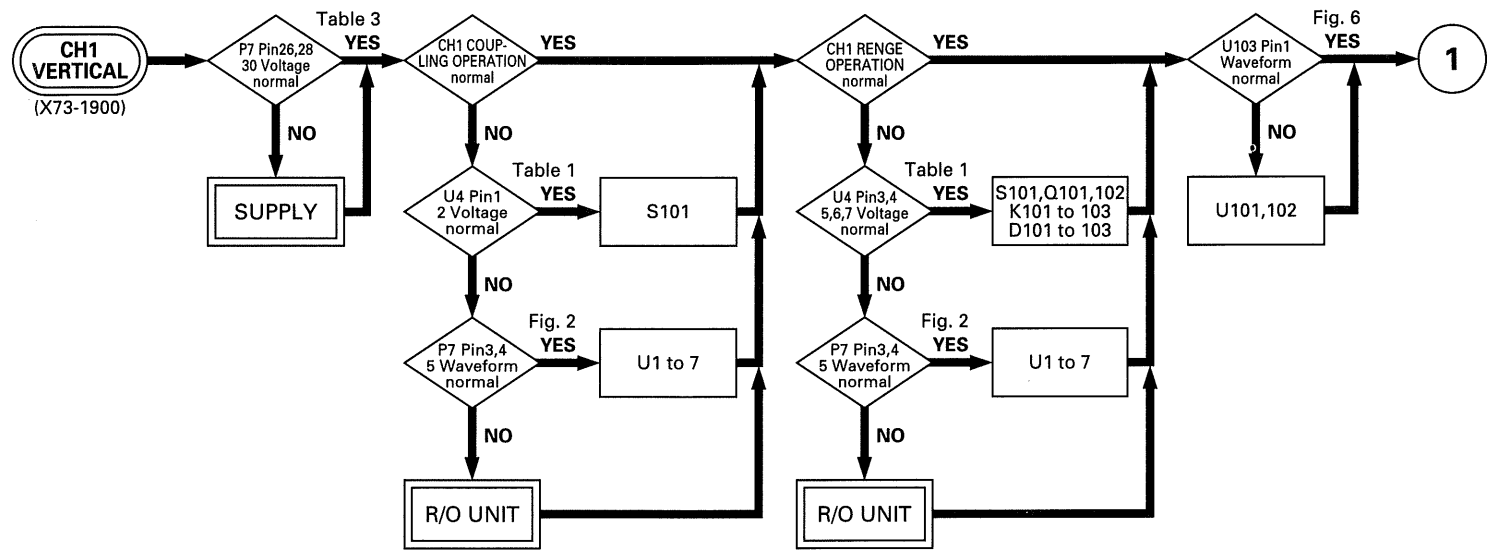

| P7 Pin No. | Analog hold voltage value |
|------------|---------------------------|
| 7 | 0~-4 V |
| 8 | 0~-4 V |
| 9 | 0~-4 V |
| 10 | 0~-4 V |
| 11 | 0~-4 V |
| 12 | 0~-4 V |
| 13 | 0~-4 V |
| 14 | 0~-4 V |

Table 5 Analog Hold Voltage

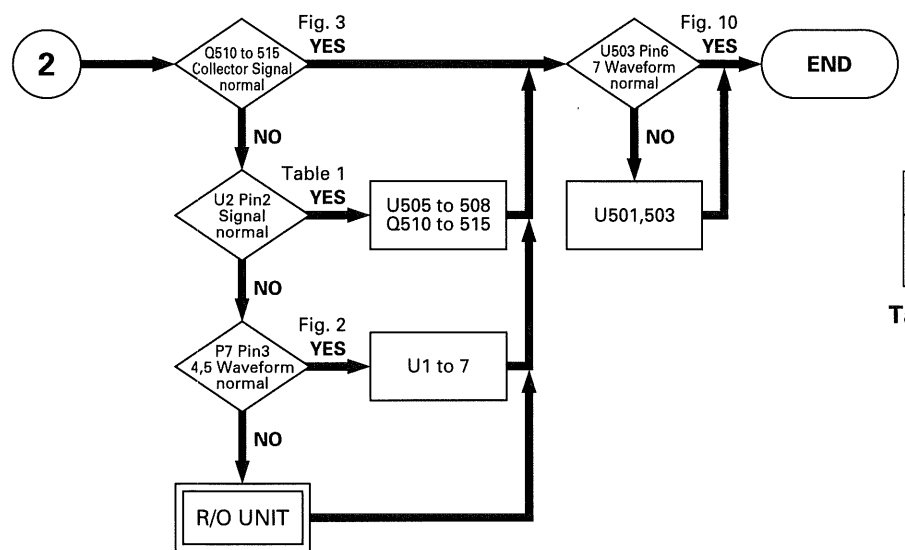



| P7 Pin No. | Voltage [V] |
|------------|-------------|
| 25,26 | +10 |
| 27,28 | -10 |
| 29,30 | +5 |

Table 3 Voltage



| P8 Pin No. | Voltage [V] |
|------------|-------------|
| 2 | +60 |
| 11,12 | +10 |
| 13,14 | -10 |
| 26 | +140 |

Table 4 Voltage



TROUBLESHOOTING

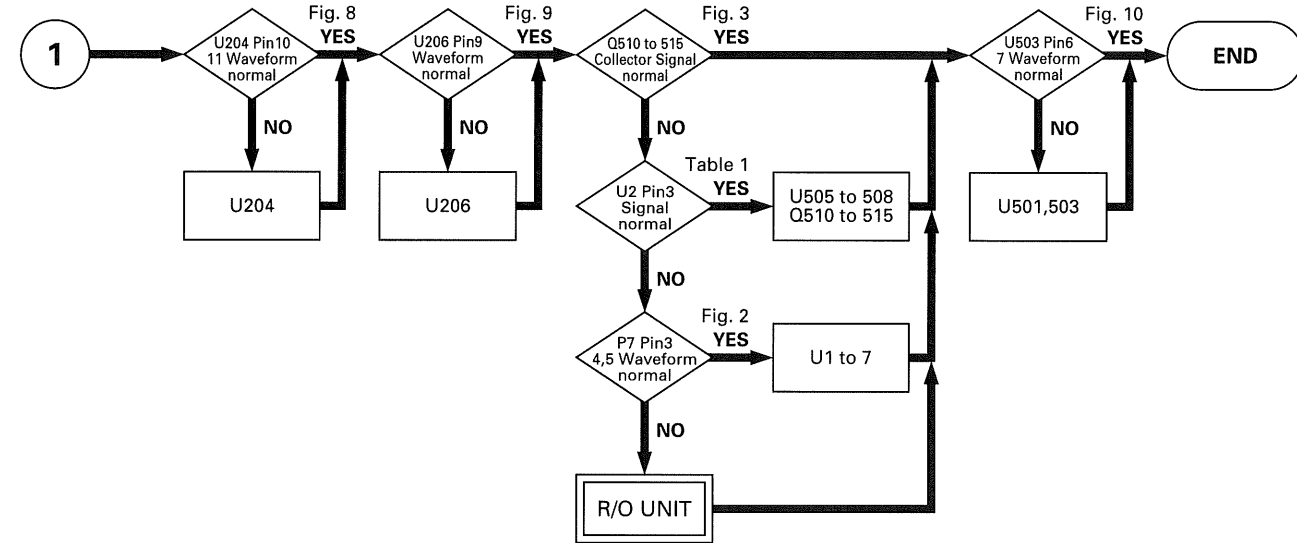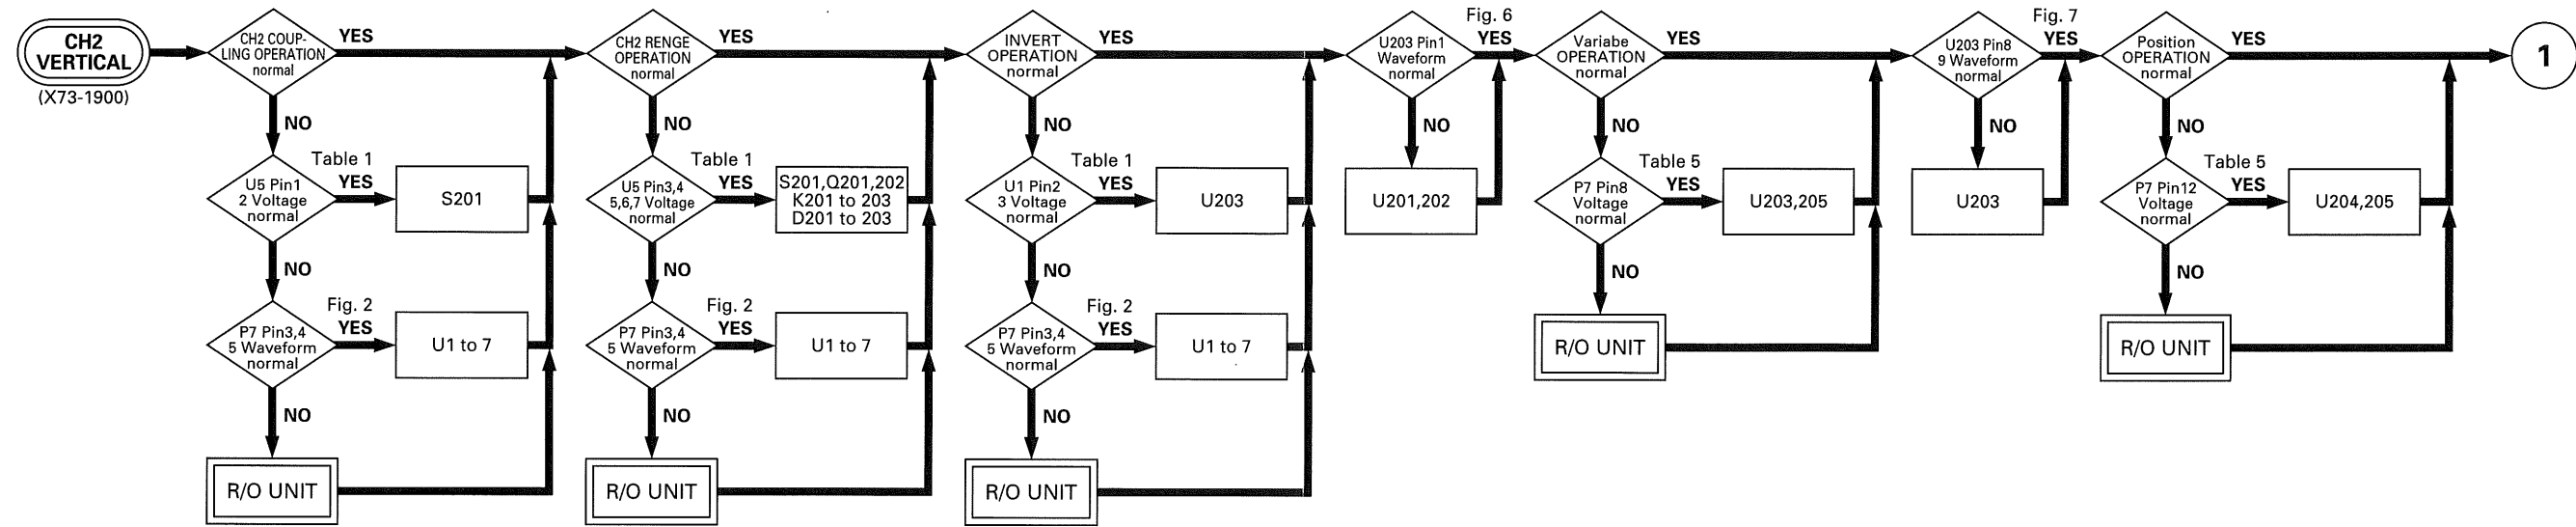

TROUBLESHOOTING

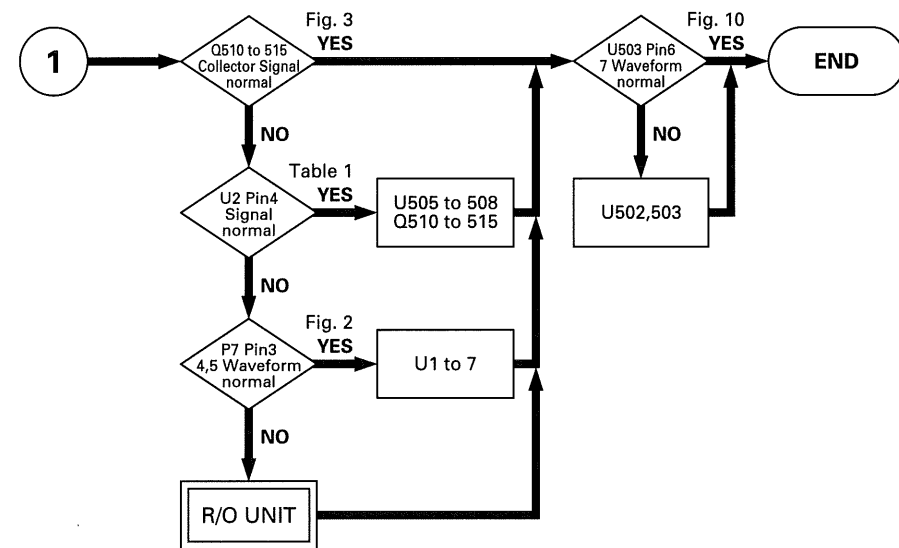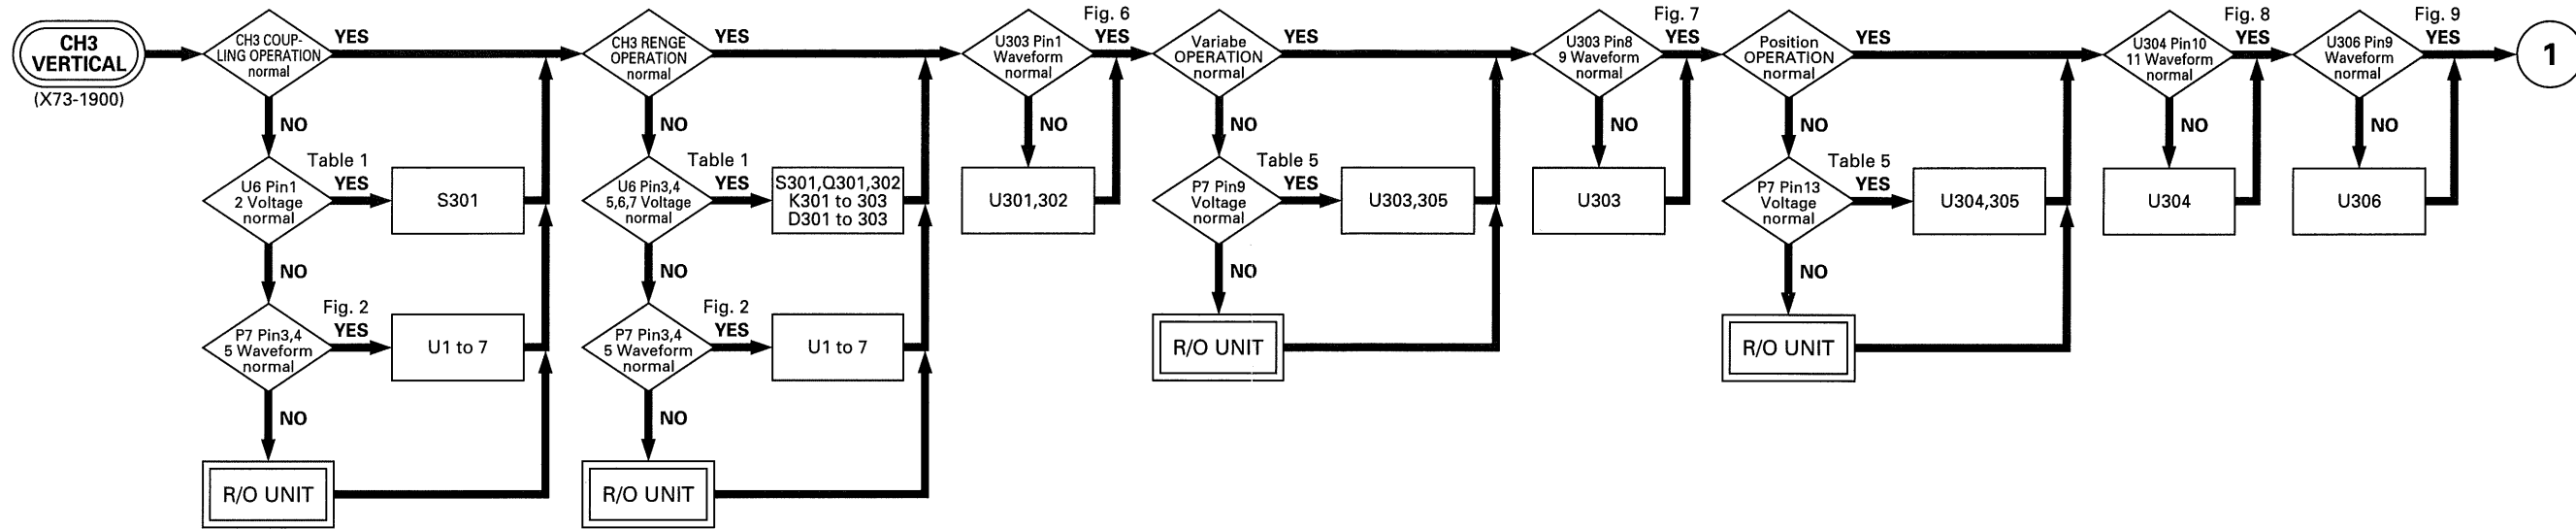

TROUBLESHOOTING

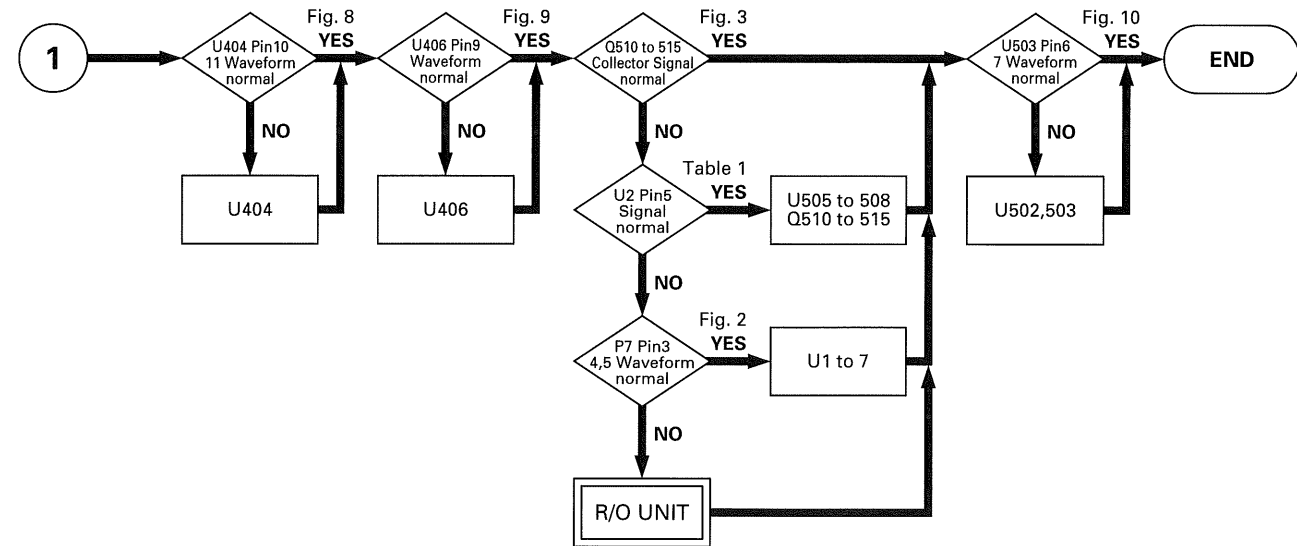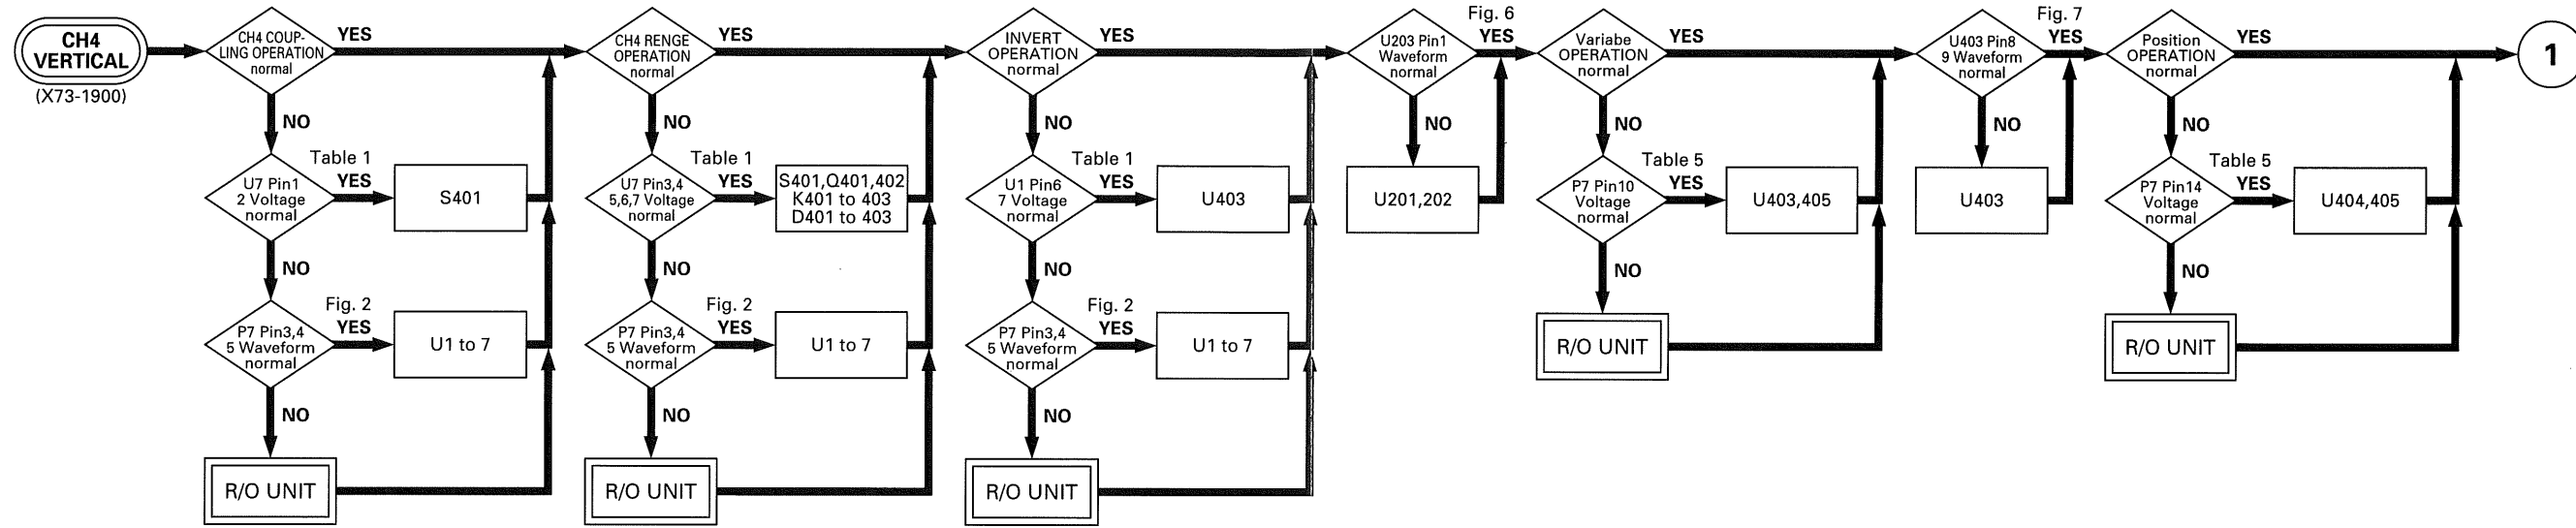

TROUBLESHOOTING

- 1 kHz Sine Wave
- 60 mV_{P-P} Input
- V_{ATT}: 10 mV/div


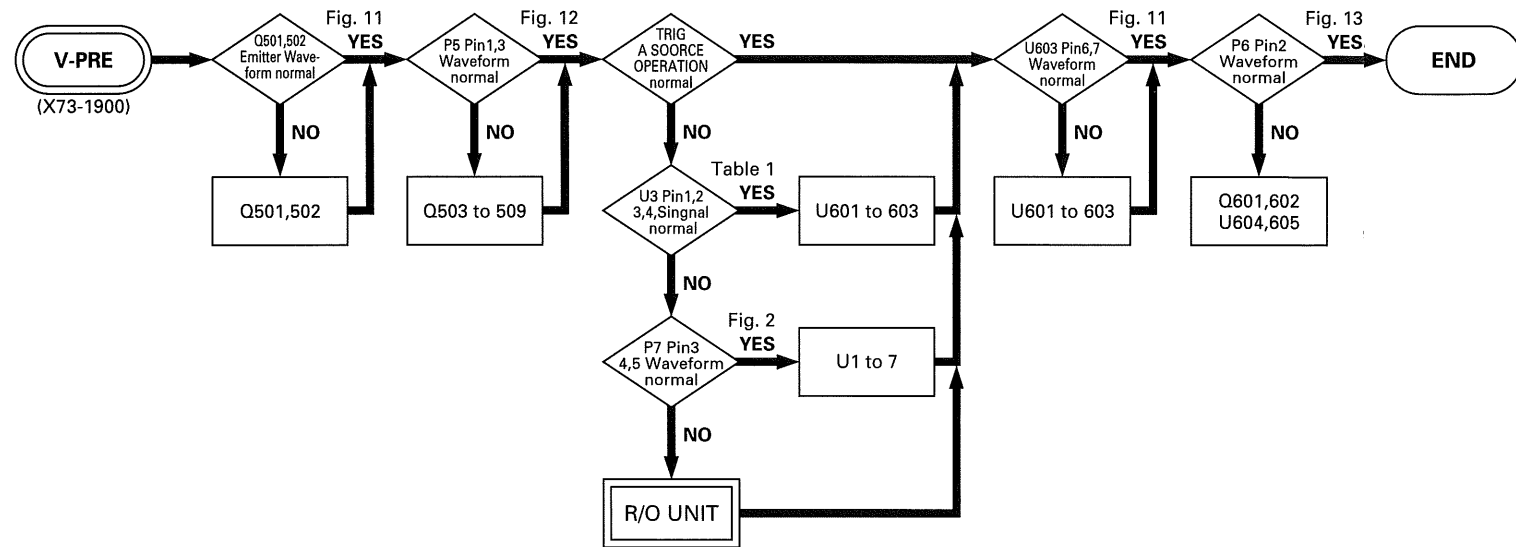


Fig.11




Fig.14




Fig.12




Fig.15







Fig.13



(a) P8 Pin6 R/O Y

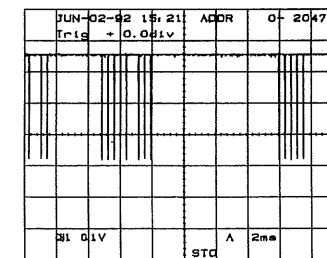


(b) P8 Pin8 R/O REQ




(c) P8 Pin10 R/O X



Fig.16

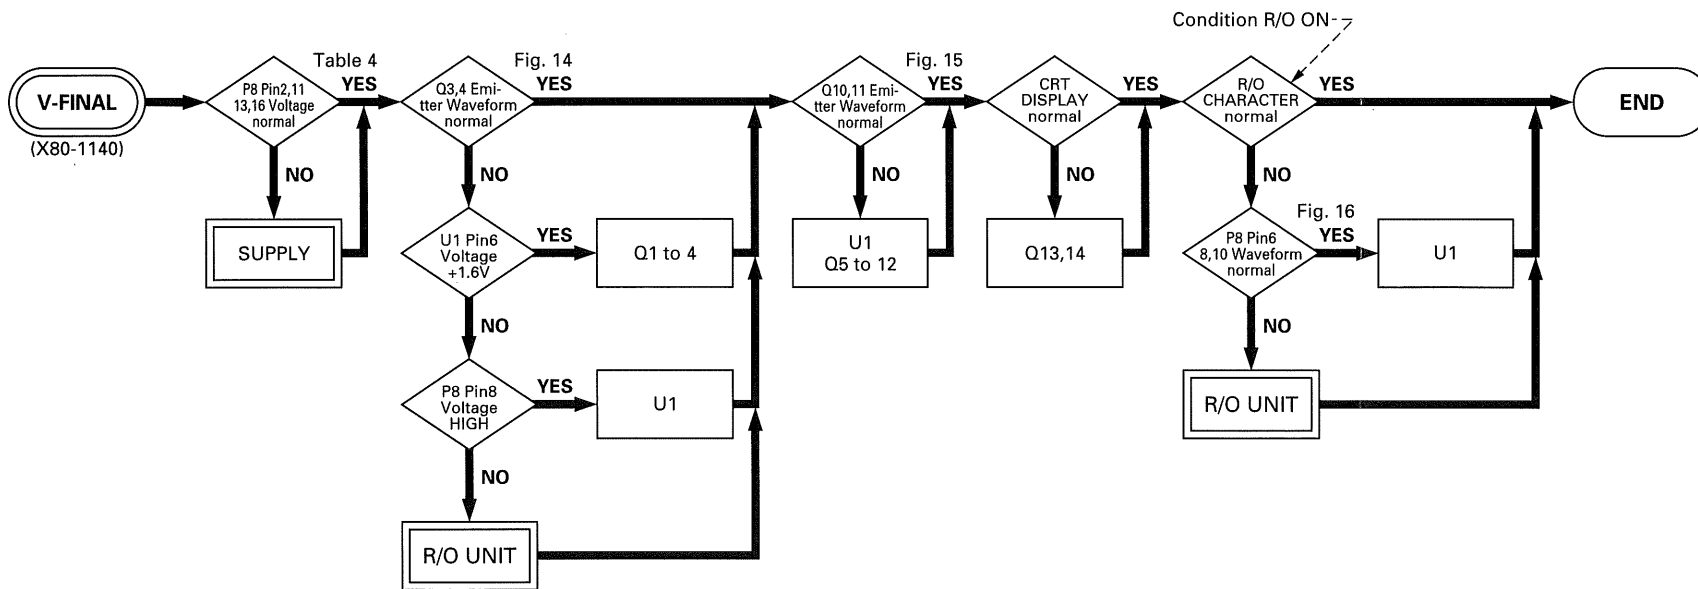

TROUBLESHOOTING

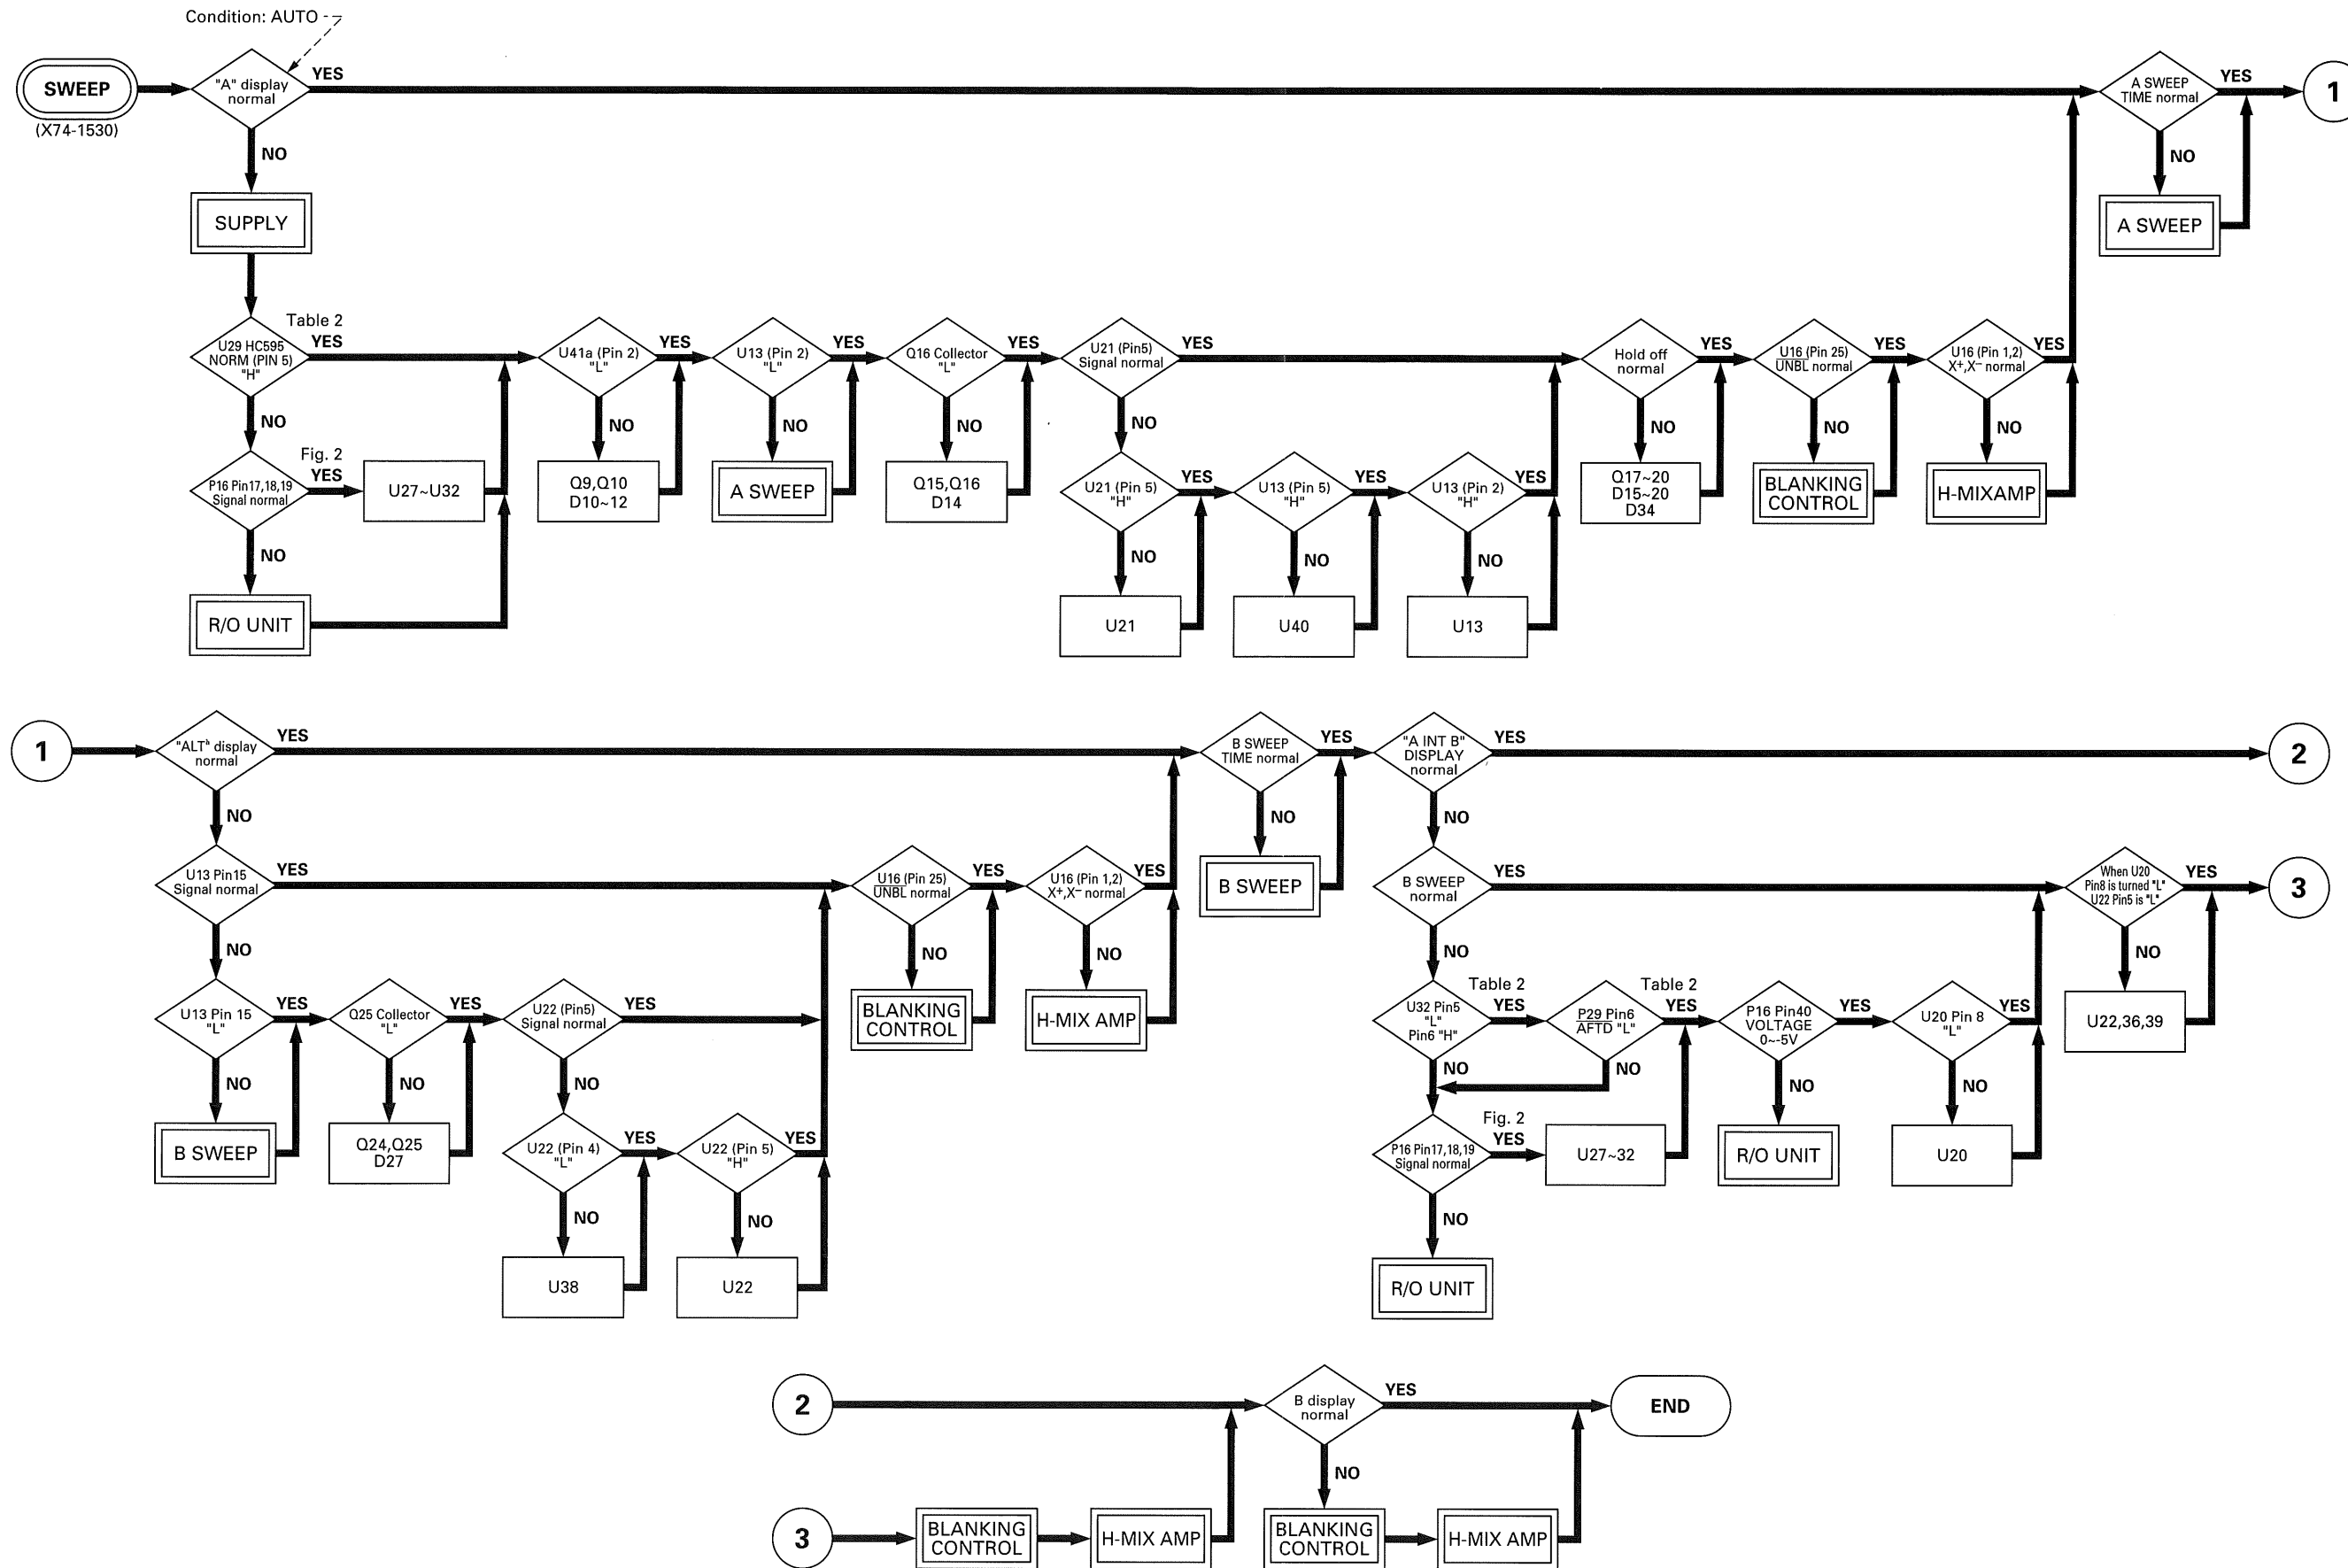

TROUBLESHOOTING

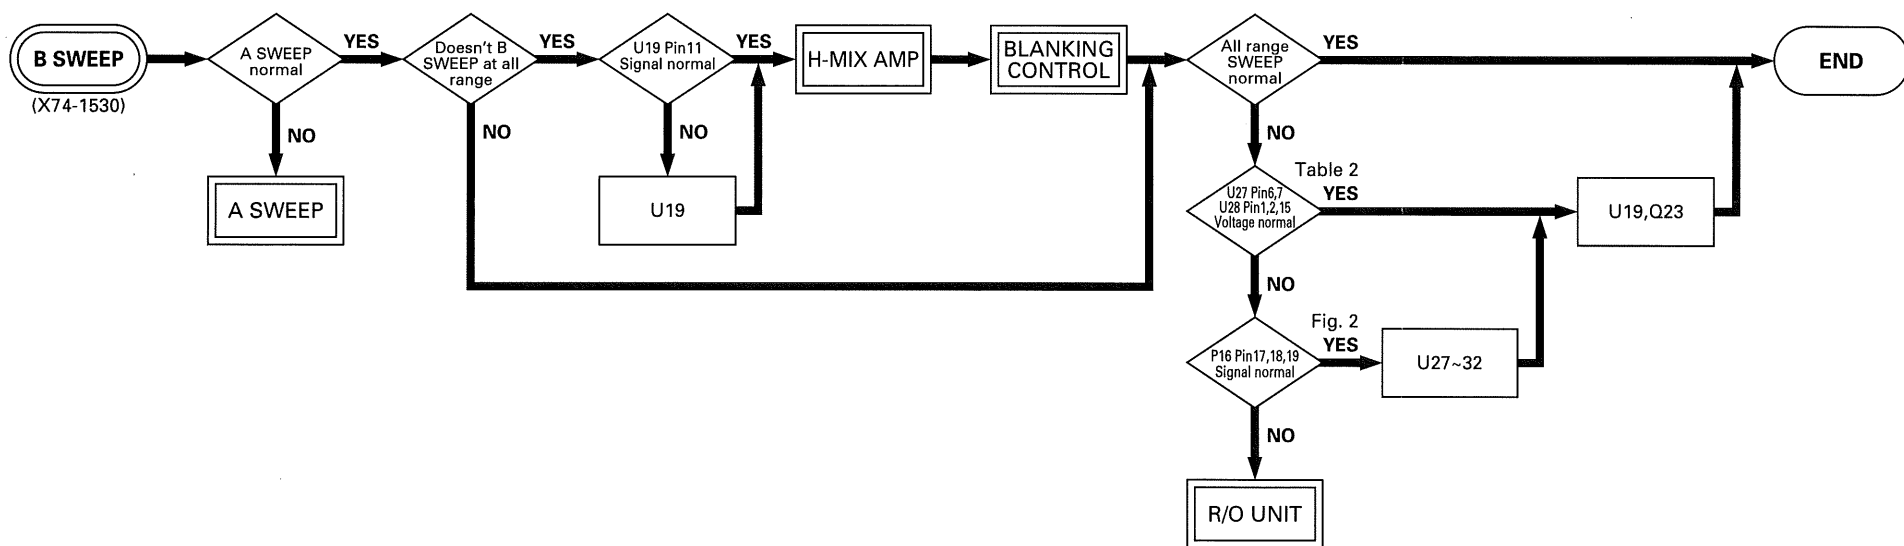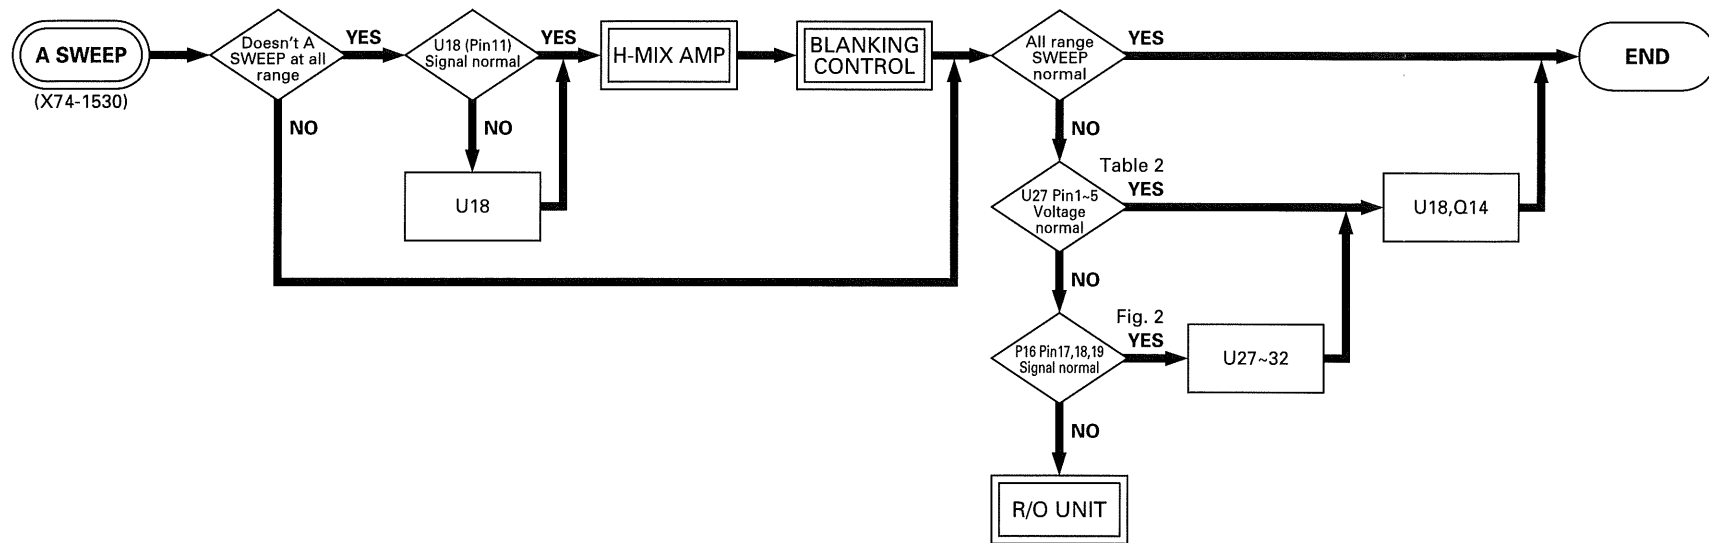




HORIZONTAL UNIT (From R/O)

| No | HC595 | Output Order | Signal Name | Content |
|----|-------|--------------|-------------|---|
| 06 | QA | 48 | XY | H-Mode="XY" THEN "L" ELSE "H" |
| | QB | 47 | ASD0 | A SWEEP DATA 0 |
| | QC | 46 | ASD1 | A SWEEP DATA 1 |
| | QD | 45 | ASD2 | A SWEEP DATA 2 |
| | QE | 44 | ASD3 | A SWEEP DATA 3 |
| | QF | 43 | ASDC | A SWEEP DATA C |
| 05 | QG | 42 | BSD0 | B SWEEP DATA 0 |
| | QH | 41 | BSD1 | B SWEEP DATA 1 |
| | QA | 40 | BSD2 | B SWEEP DATA 2 |
| | QB | 39 | BSD3 | B SWEEP DATA 3 |
| | QC | 38 | BSDC | B SWEEP DATA C |
| | QD | 37 | AC | T-Coupl="AC" THEN "L" ELSE "H" |
| 04 | QE | 36 | HFLN | T-Coupl="HFrej" OR A-T-Source="LINE" THEN "L" ELSE "H" |
| | QF | 35 | TSLP | T-Coupl="TV-*" AND SLOPE="-" THEN "L" ELSE "H" |
| | QG | 34 | EXT | MODE = "LINE TRIG" THEN "L" ELSE (EXT TRIG) THEN "H" |
| | QH | 33 | NULL | "L" |
| | QA | 32 | FIX | T-Mode="FIX" THEN "L" ELSE "H" |
| | QB | 31 | LINE | A-T-Source="LINE" OR "EXT" THEN "H" ELSE "L" |
| 03 | QC | 30 | TV | T-Coupl="TV-*" THEN "H" ELSE "L" |
| | QD | 29 | SLP+ | T-Coupl="AC,HFrej,DC" AND SLOPE="+" THEN "L" ELSE "H" |
| | QE | 28 | SLP- | T-Coupl="AC,HFrej,DC" AND SLOPE="-" THEN "L" ELSE "H" |
| | QF | 27 | NORM | T-Mode="NORM" OR "SINGLE" THEN "L" ELSE "H" |
| | QG | 26 | AFTD | B-Trig-Source="AFTER DELAY" THEN "L" ELSE "H" |
| | QH | 25 | STO | SCOPE-mode="STORAGE" THEN "H" ELSE "L" |
| 02 | QA | 24 | TVL | T-Coupl="TV-L" THEN "L" ELSE "H" |
| | QB | 23 | XYSSL | H-Mode="XY" AND single-trace THEN "H" ELSE "L" |
| | QC | 22 | TCD0 | Trig Counter DATA LSB |
| | QD | 21 | TCD1 | Trig Counter DATA |
| | QE | 20 | TCD2 | Trig Counter DATA |
| | QF | 19 | TCD3 | Trig Counter DATA |
| 01 | QG | 18 | TCD4 | Trig Counter DATA |
| | QH | 17 | TCD5 | Trig Counter DATA |
| | QA | 16 | TCD6 | Trig Counter DATA |
| | QB | 15 | TCD7 | Trig Counter DATA |
| | QC | 14 | TCD8 | Trig Counter DATA |
| | QD | 13 | TCD9 | Trig Counter DATA |
| 00 | QE | 12 | TCD10 | Trig Counter DATA MSB |
| | QF | 11 | TCE | B-T-Source="COUNT" THEN "L" ELSE "H" |
| | QG | 10 | SGL | T-Mode="SINGLE" OR Storage-Mode="EQU" THEN "L" ELSE "H" |
| | QH | 9 | CHOP | V-Mode="CHOP" THEN "L" ELSE "H" |
| | QA | 8 | TVA | T-Coupl="TV-*" THEN "L" ELSE "H" |
| | QB | 7 | TRGD | B-T-Source="TRIG'D" or "COUNT" THEN "L" ELSE "H" |
| 00 | QC | 6 | EQU | Storage-Mode="EQU" THEN "L" ELSE "H" |
| | QD | 5 | MAG | H-MAG="ON" THEN "L" ELSE "H" |
| | QE | 4 | A | H-Mode="A" OR "XY" THEN "L" ELSE "H" |
| | QF | 3 | B | H-Mode="B" THEN "L" ELSE "H" |
| | QG | 2 | ALT+B | H-Mode="ALT" OR "B" THEN "H" ELSE "L" |
| | QH | 1 | ALT | H-Mode="ALT" THEN "H" ELSE "L" |

↓ : Indicates the negative logic data.

Table 2 Serial Transfer




TROUBLESHOOTING

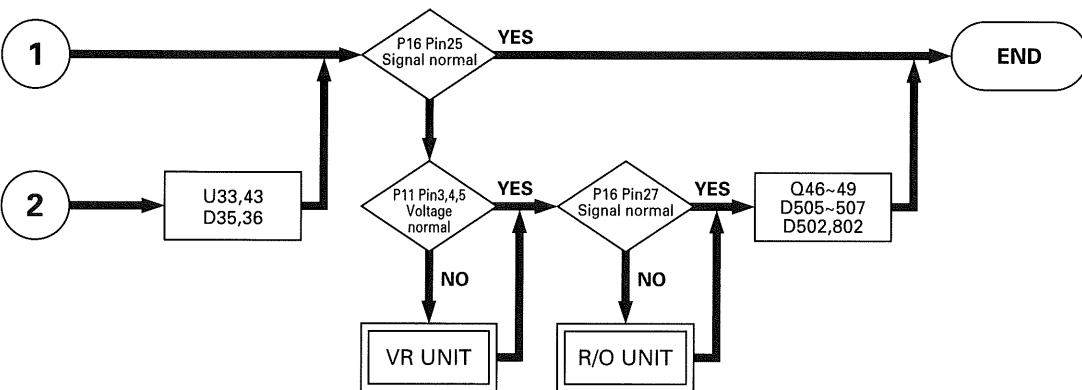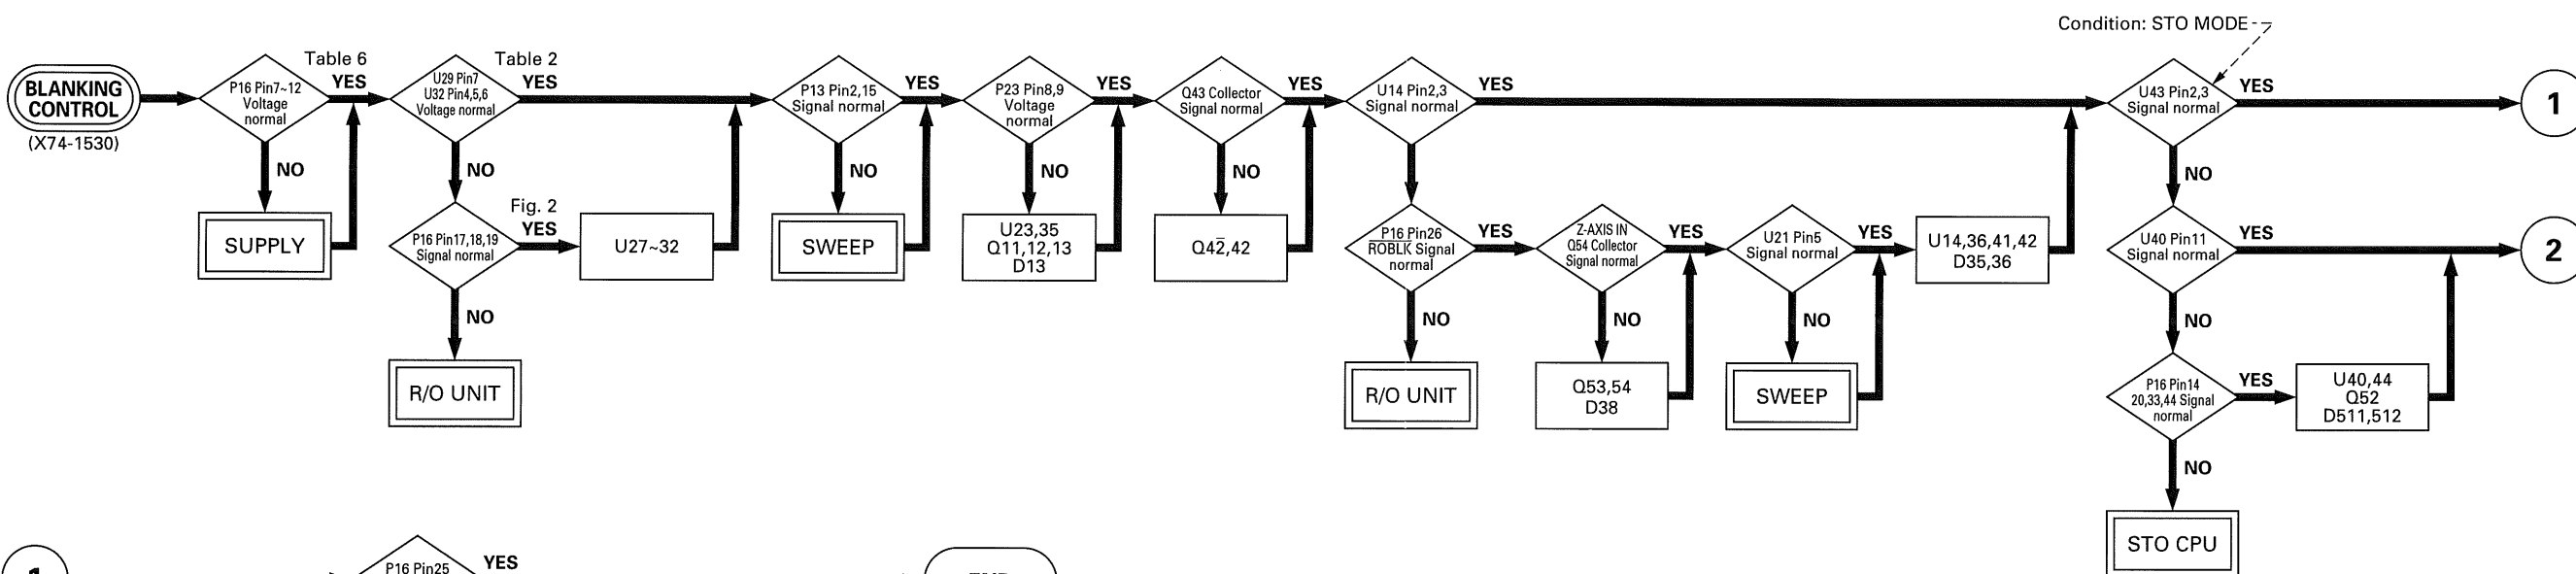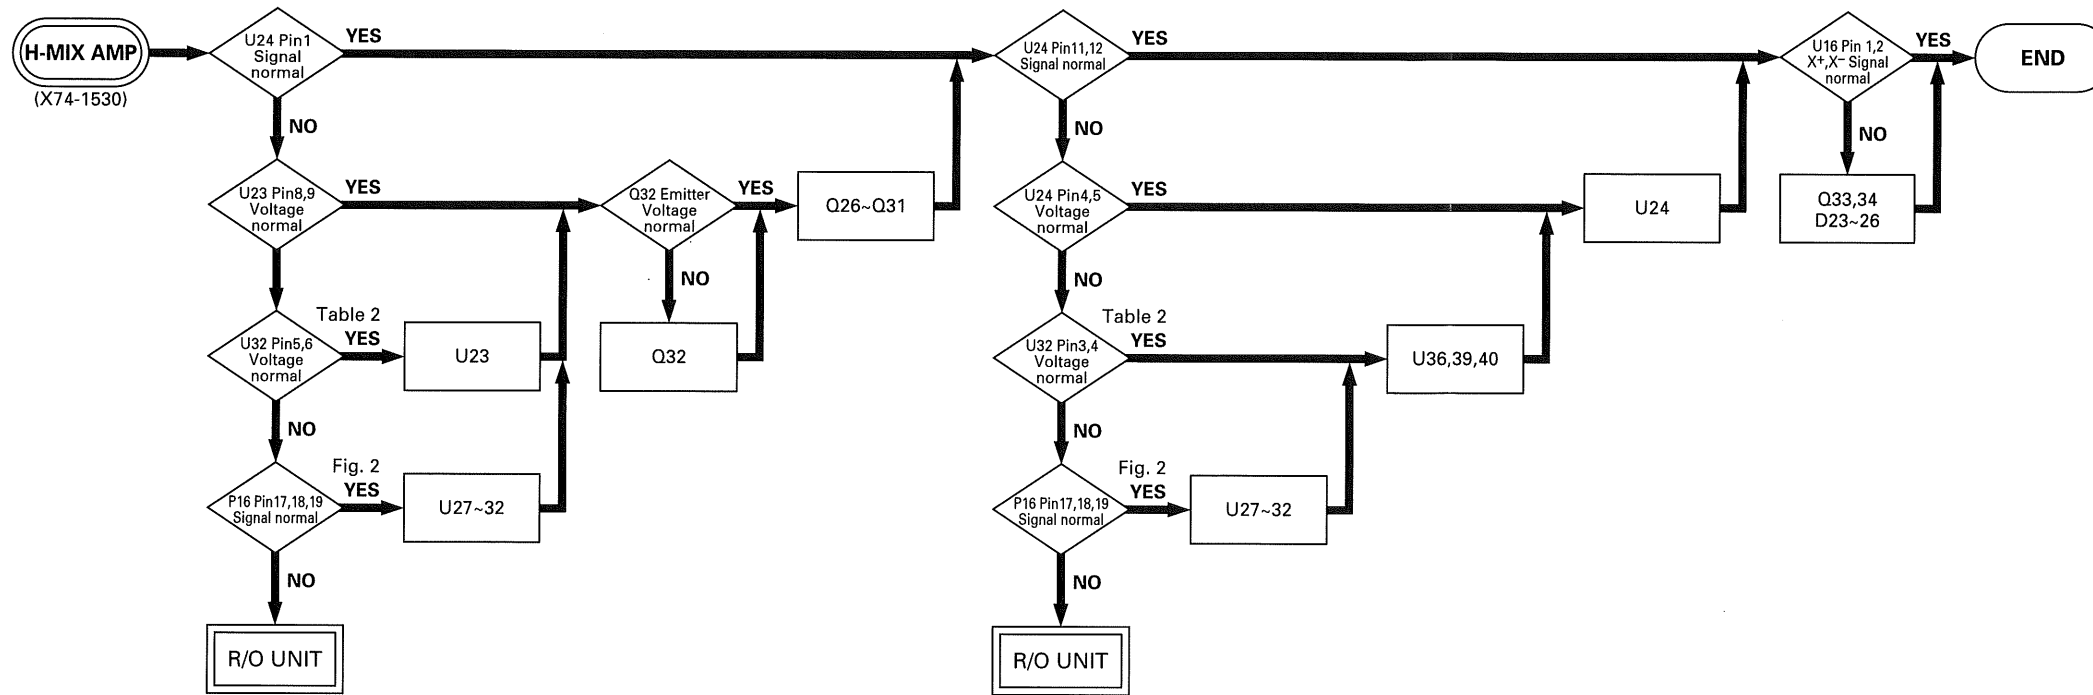




| P16 Pin No. | Voltage [V] |
|-------------|-------------|
| 7 | -10 |
| 8 | -10 |
| 9 | +10 |
| 10 | +10 |
| 11 | +5 |
| 12 | +5 |

Table 6 Voltage




TROUBLESHOOTING

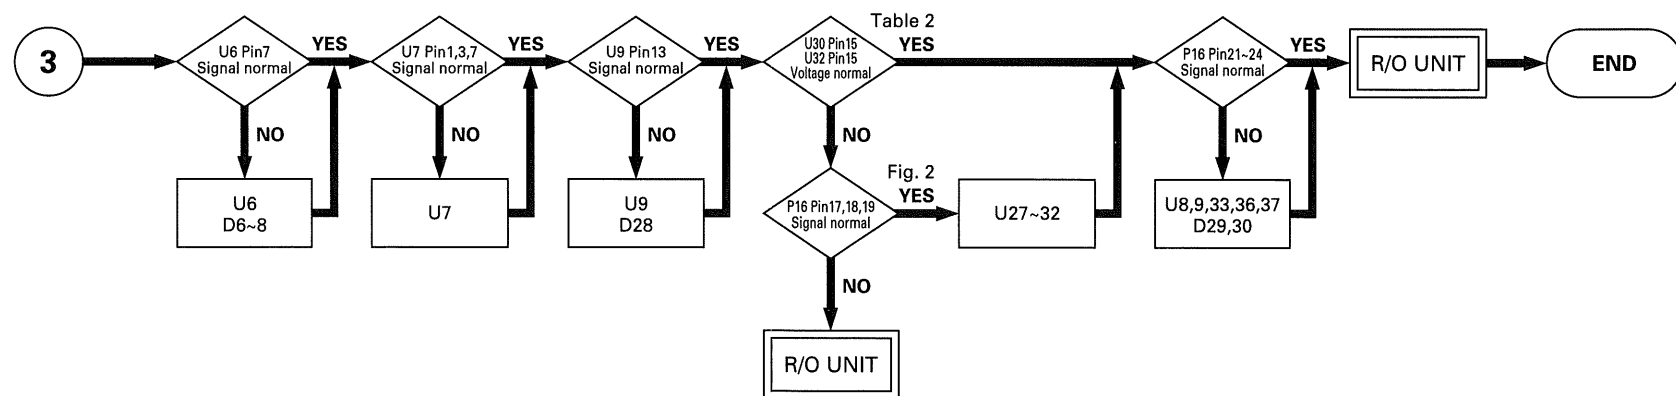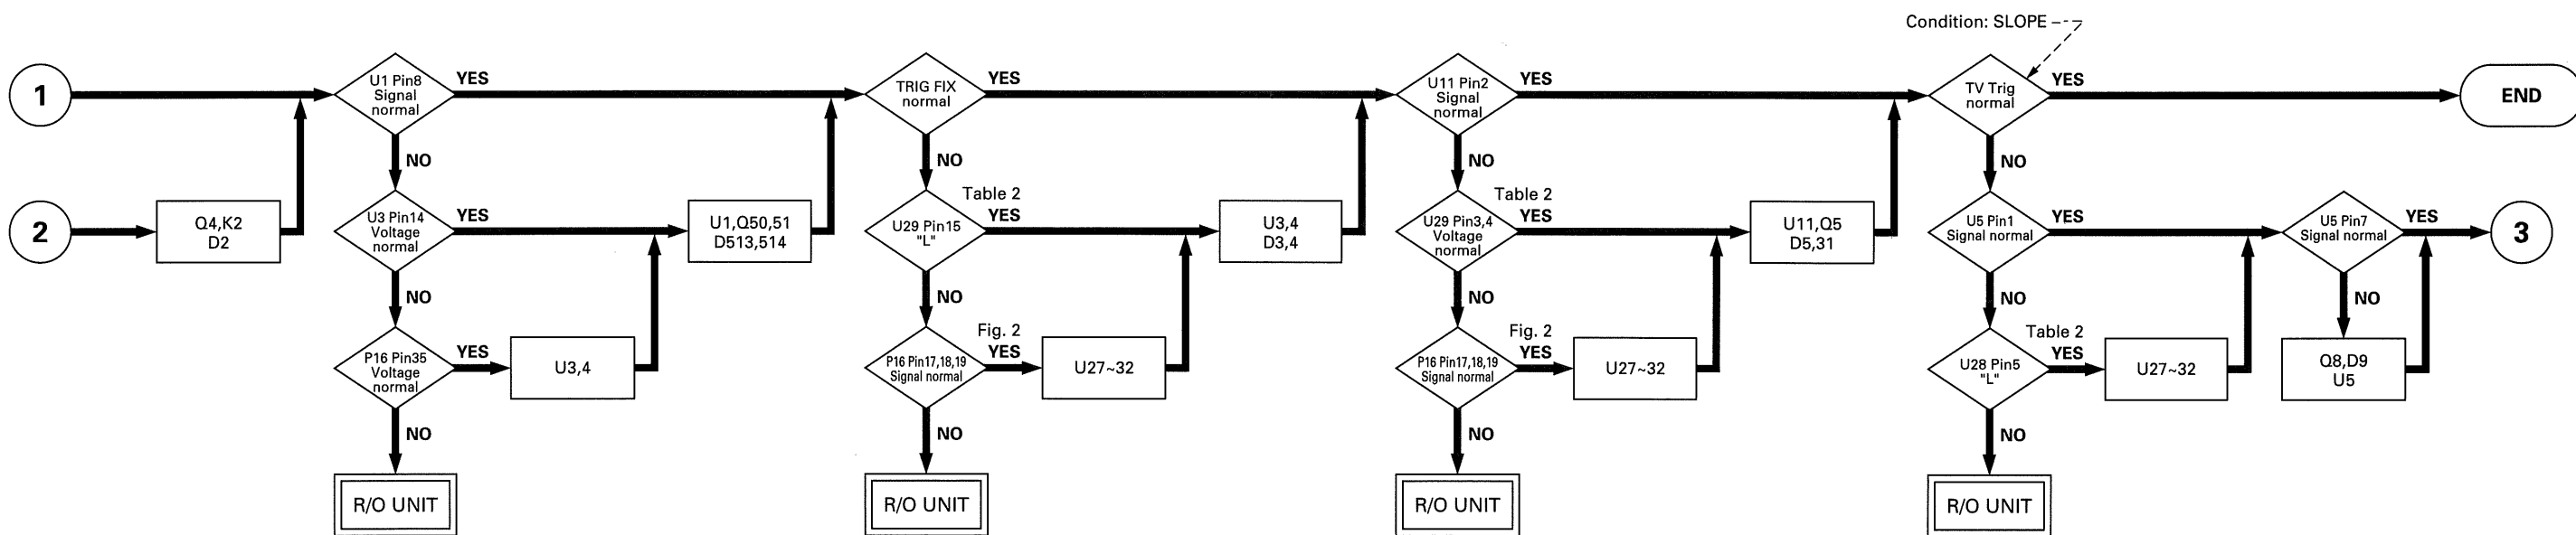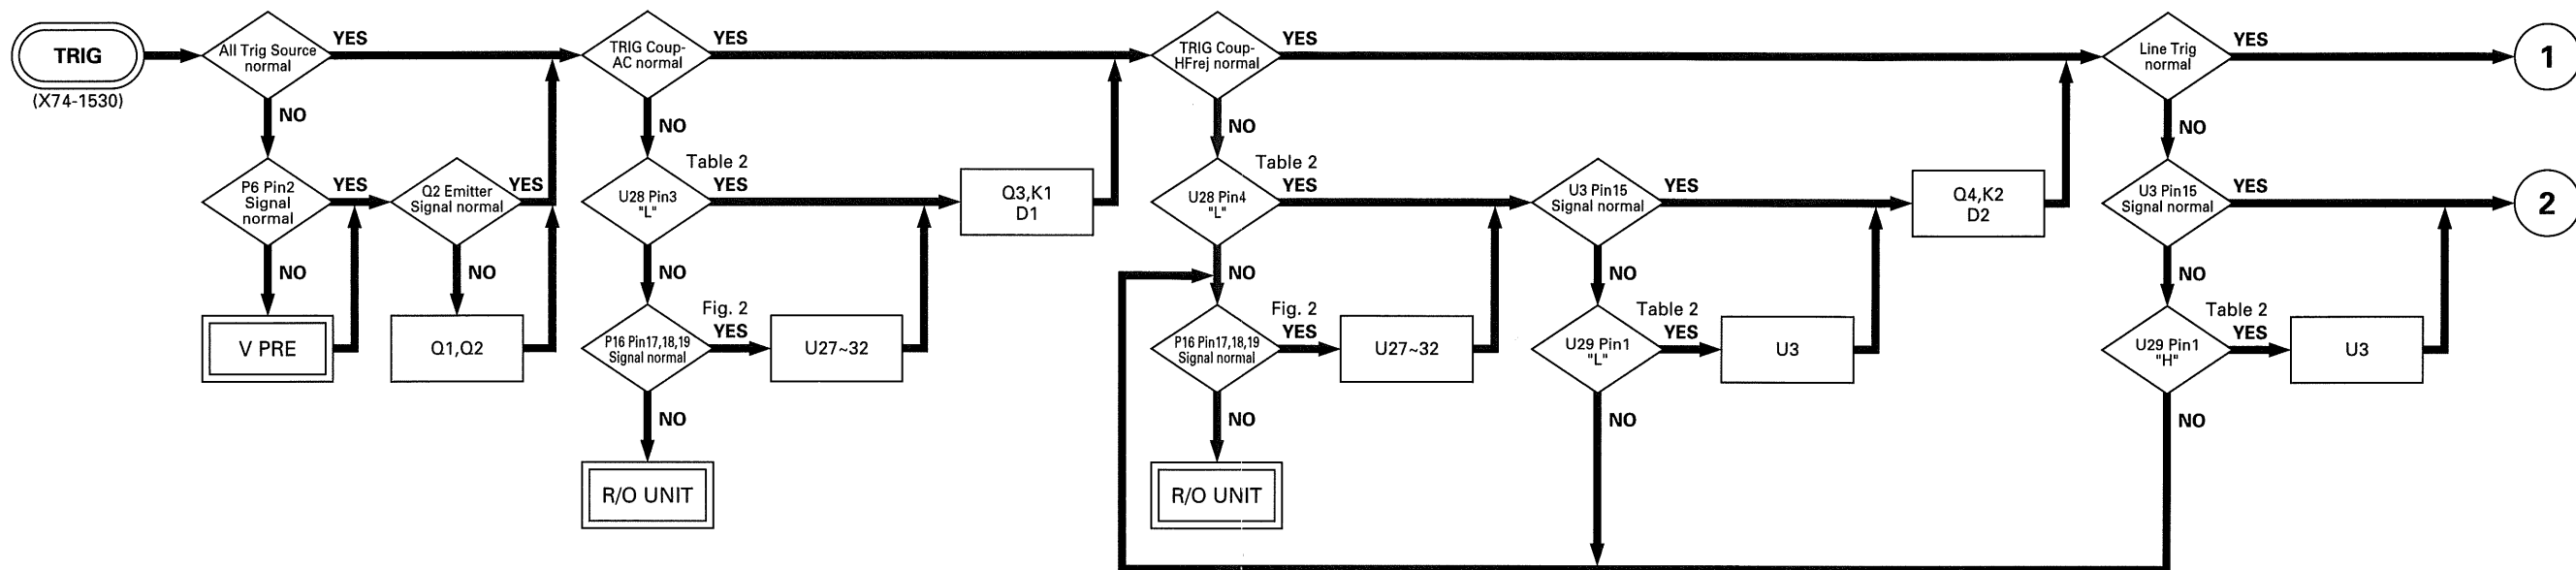


TROUBLESHOOTING

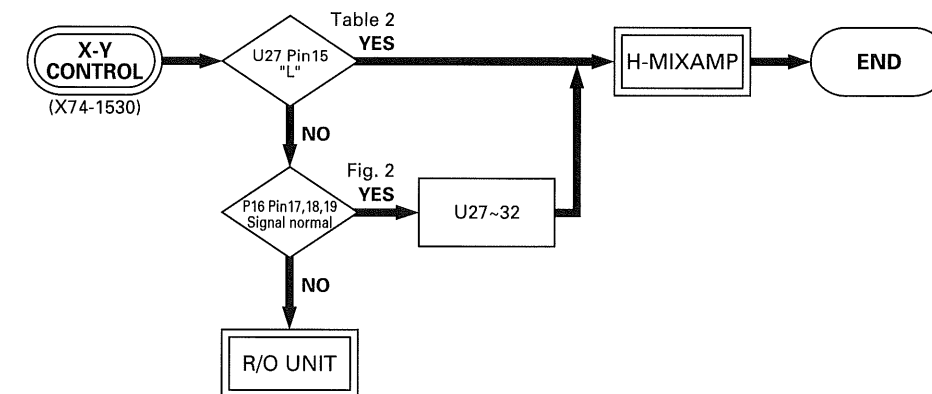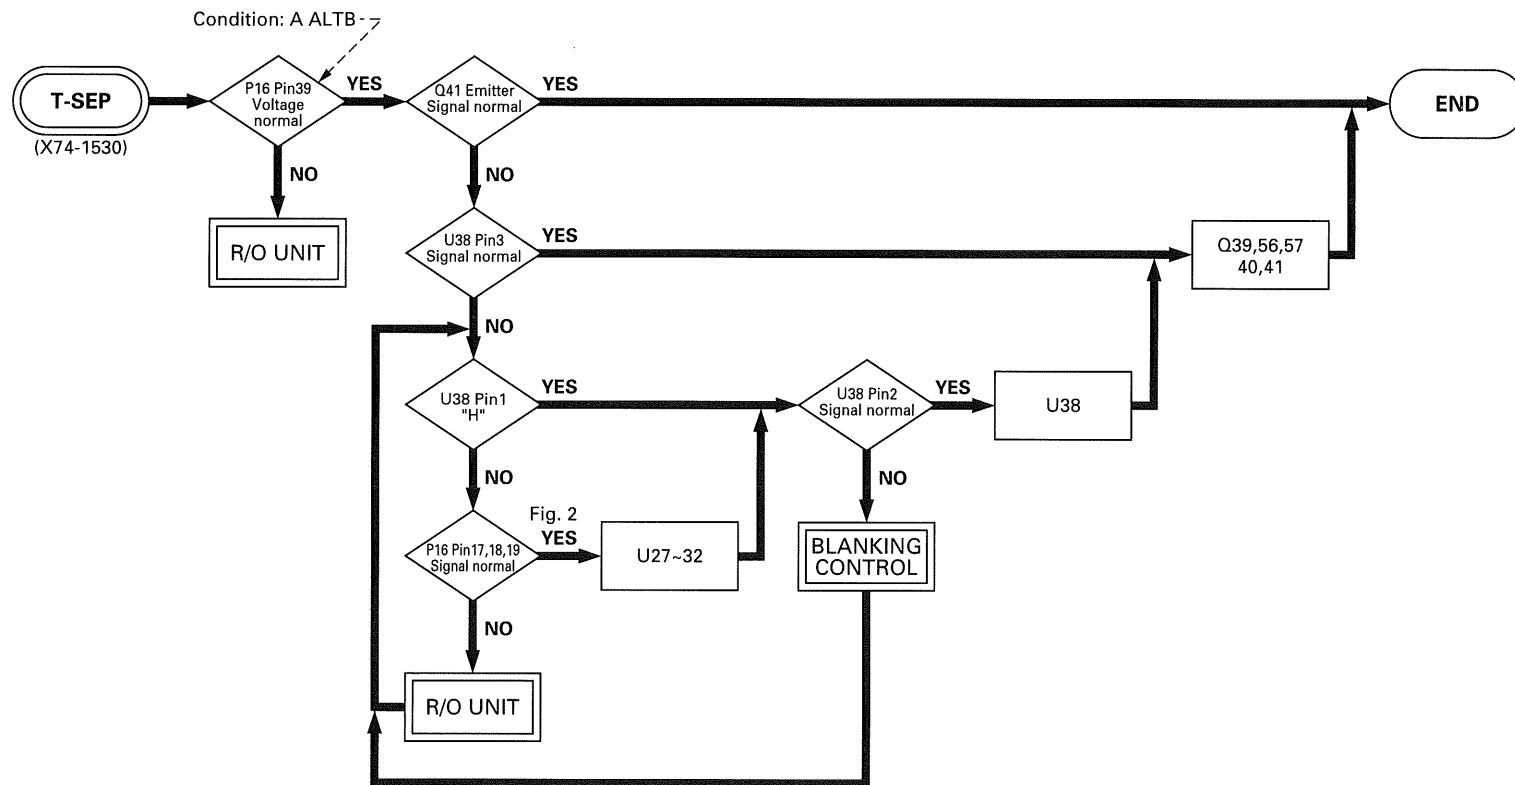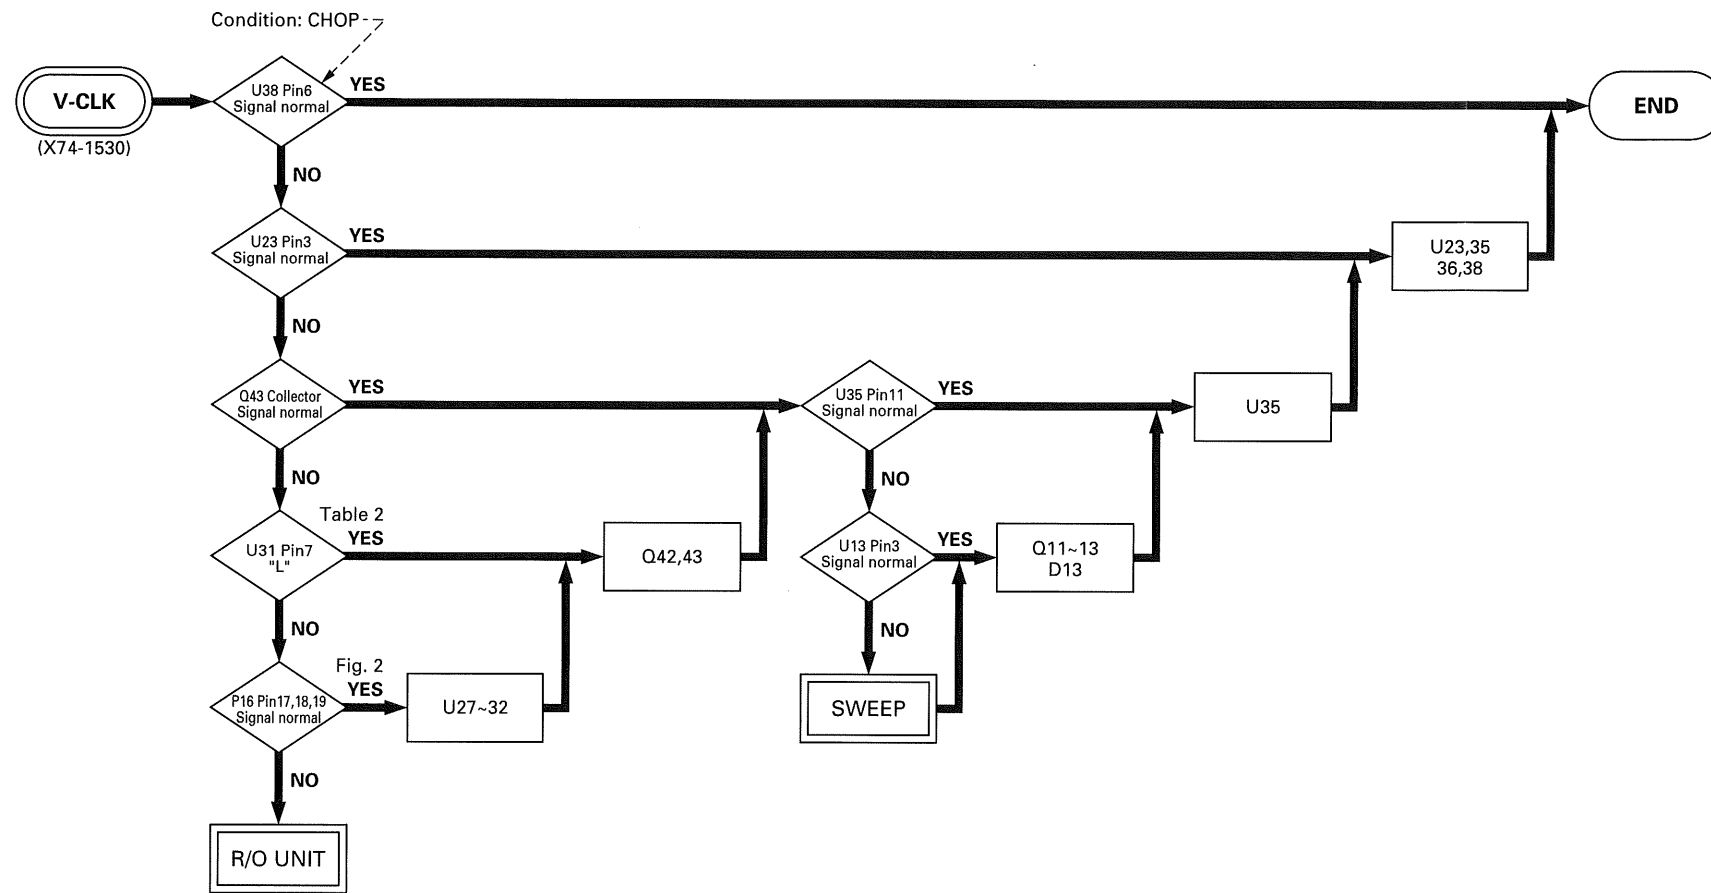

TROUBLESHOOTING

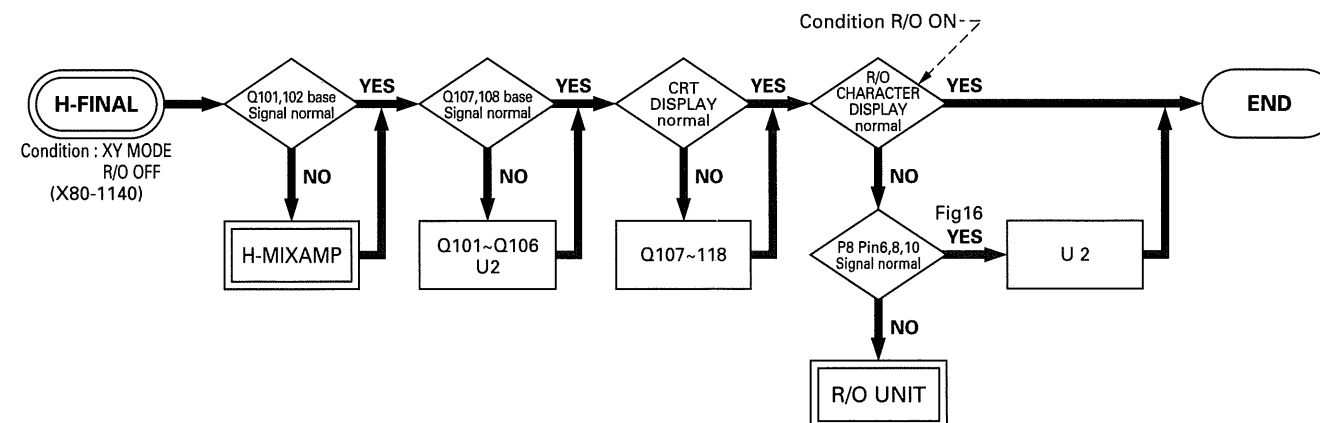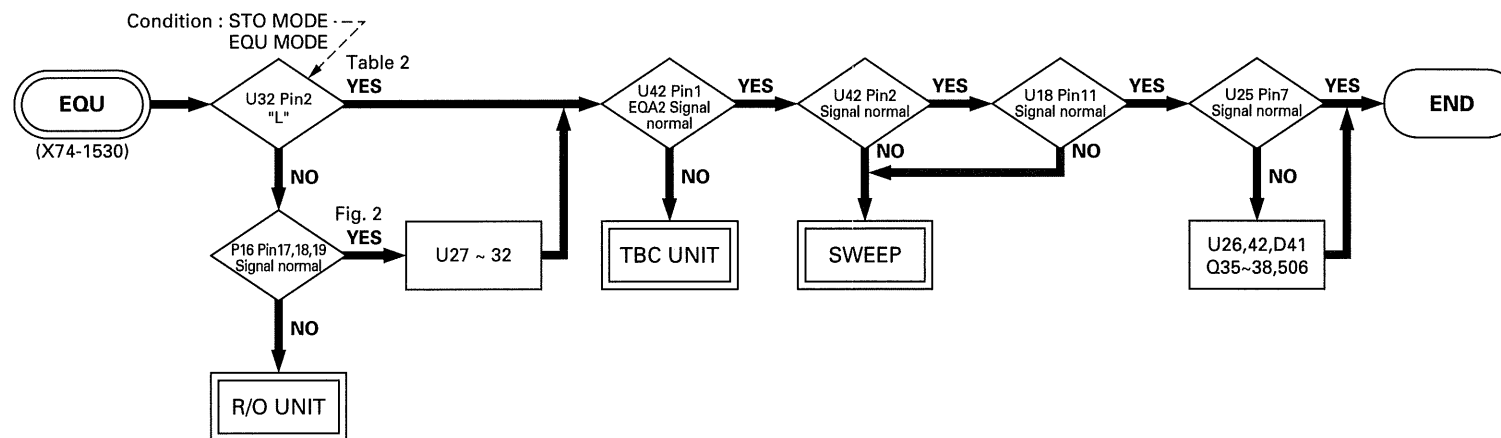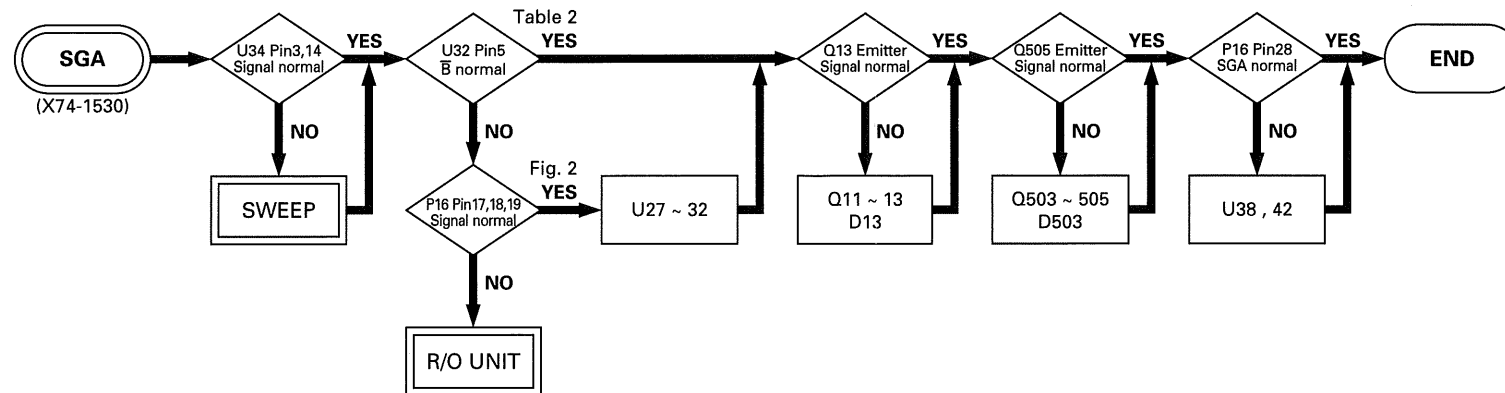

TROUBLESHOOTING

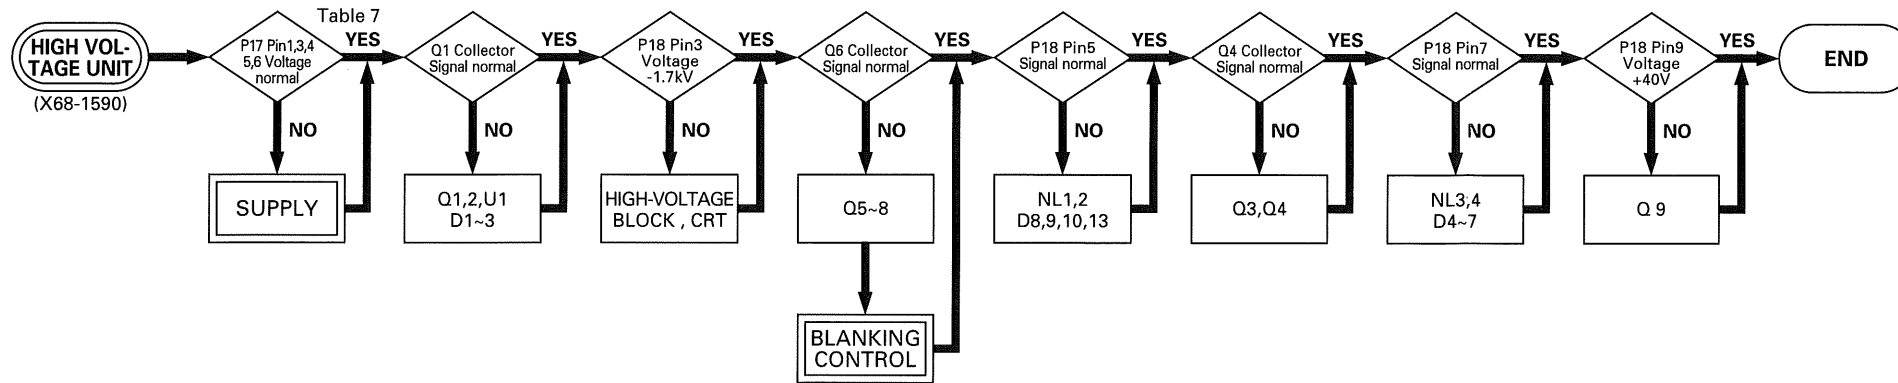


| P17 Pin No. | Voltage [V] |
|----------------|----------------|
| 1 | +140 |
| 3 | +12 |
| 4 | -12 |
| 5 | +10 |
| 6 | -10 |

Table 7 Voltage

| P29 Pin No. | Voltage [V] |
|----------------|----------------|
| 24 | +5 |
| 26 | +5 |

Table 8 Voltage

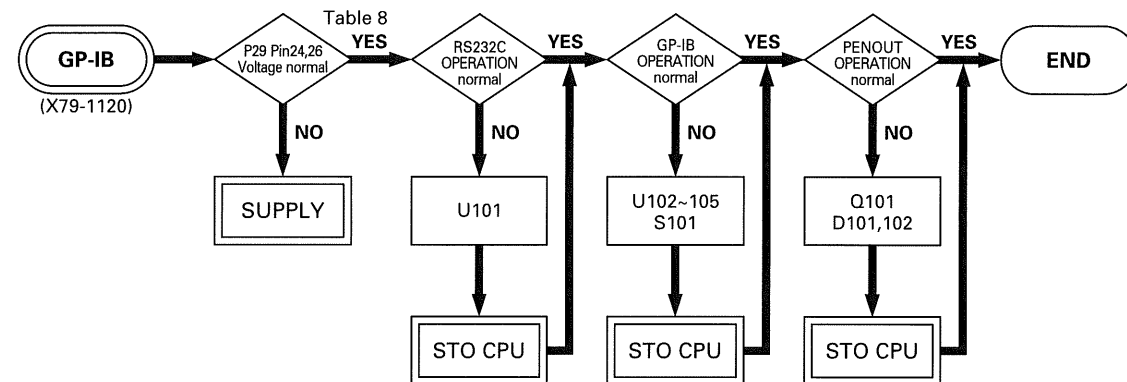

| P No. | Pin No. | Voltage [V] |
|-------|---------|-------------|
| 19 | 2 | +12 |
| 19 | 3 | +12 |
| 19 | 4 | +10 |
| 19 | 5 | +10 |
| 19 | 6 | +10 |
| 19 | 8 | -12 |
| 19 | 9 | -12 |
| 19 | 10 | -10 |
| 19 | 11 | -10 |
| 19 | 12 | -10 |
| 20 | 2 | -5 |
| 20 | 3 | -5 |
| 20 | 4 | -5 |
| 20 | 5 | -5 |
| 20 | 7 | +5 |
| 20 | 8 | +5 |
| 20 | 9 | +5 |
| 20 | 10 | +5 |
| 21 | 4 | +60 |
| 21 | 6 | +140 |


Table 9 Voltage

| P No. | Pin No. | Voltage [V] |
|-------|---------|-------------|
| 24 | 2 | +12 |
| 24 | 3 | +12 |
| 24 | 4 | +12 |
| 24 | 6 | -12 |
| 24 | 7 | -12 |
| 24 | 8 | -12 |
| 24 | 11 | +60 |
| 24 | 13 | +140 |
| 25 | 2 | -5 |
| 25 | 3 | -5 |
| 25 | 5 | -5 |
| 25 | 7 | +5 |
| 25 | 8 | +5 |
| 25 | 9 | +5 |
| 25 | 10 | +5 |


Table 10 Voltage

| P12 Pin No. | Voltage [V] |
|----------------|----------------|
| 4 | +140 |
| 5 | +10 |
| 6 | -10 |
| 7 | +12 |
| 8 | +12 |

Table 11 Voltage

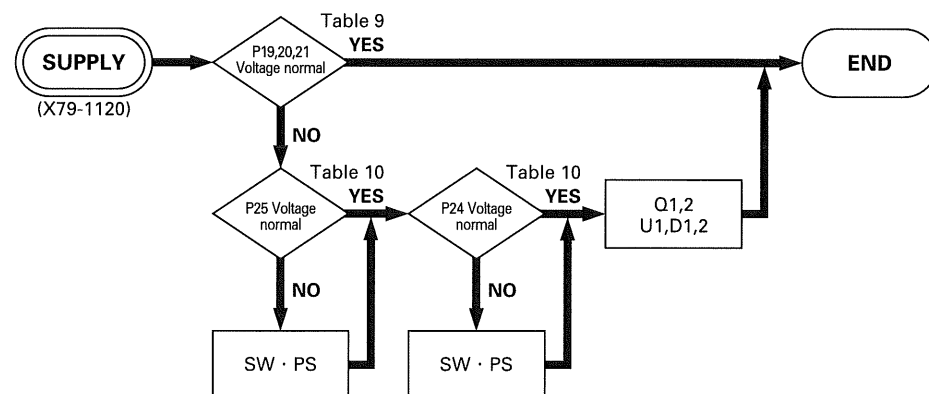

TROUBLESHOOTING

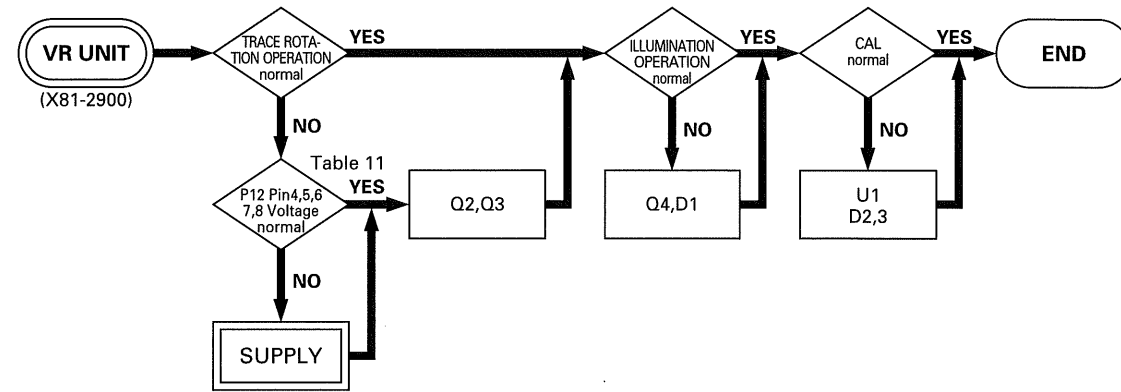


| P27 Pin No. | Voltage [V] |
|----------------|----------------|
| 17 | +5 |
| 18 | +5 |



Table 12 Voltage

| P28 Pin No. | Voltage [V] |
|----------------|----------------|
| 5 | +10 |
| 6 | -10 |
| 39 | +5 |



Table 13 Voltage

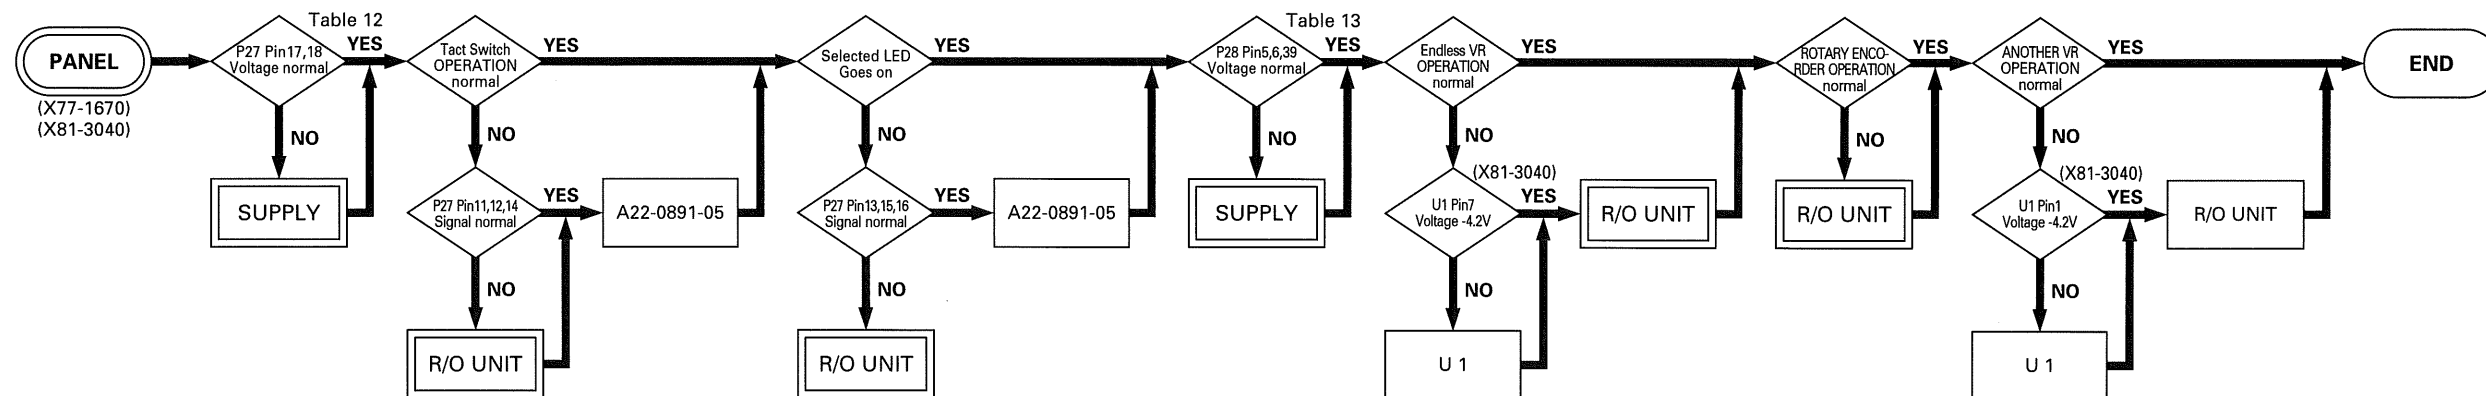

TROUBLESHOOTING

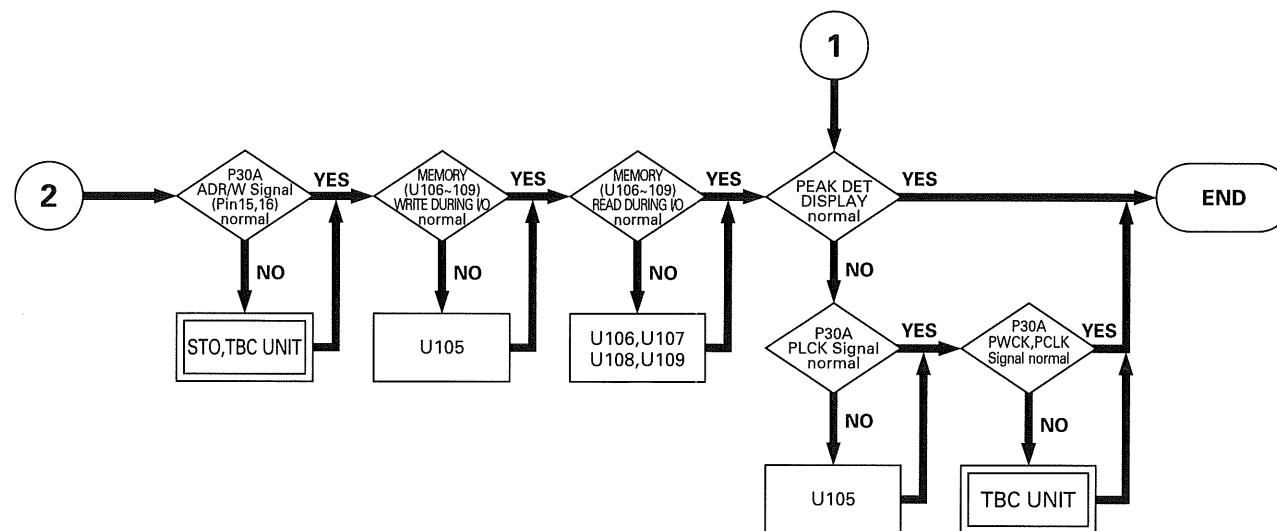
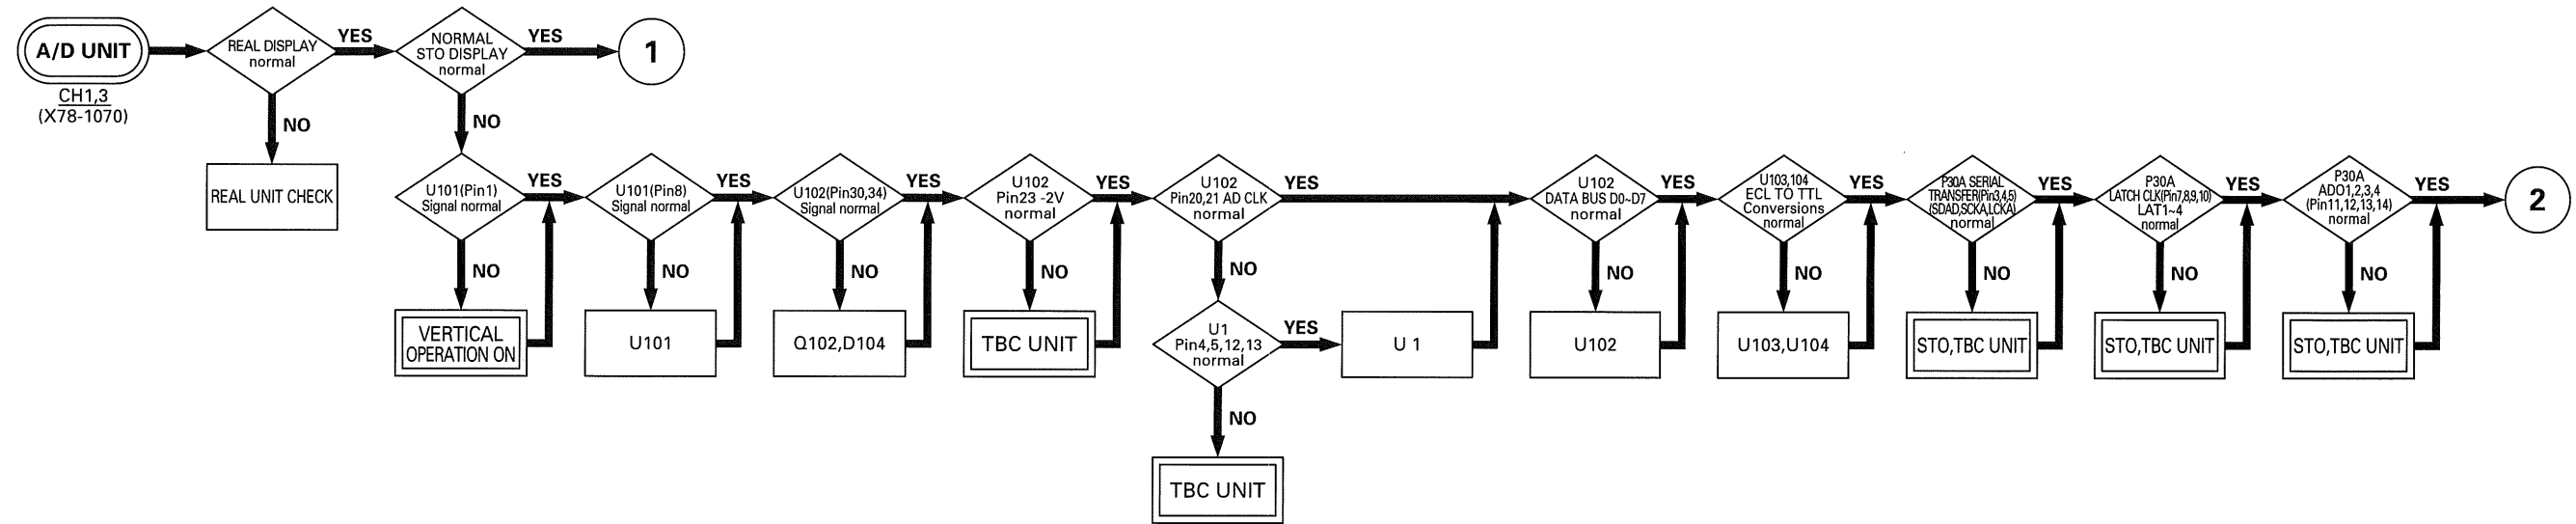


TROUBLESHOOTING


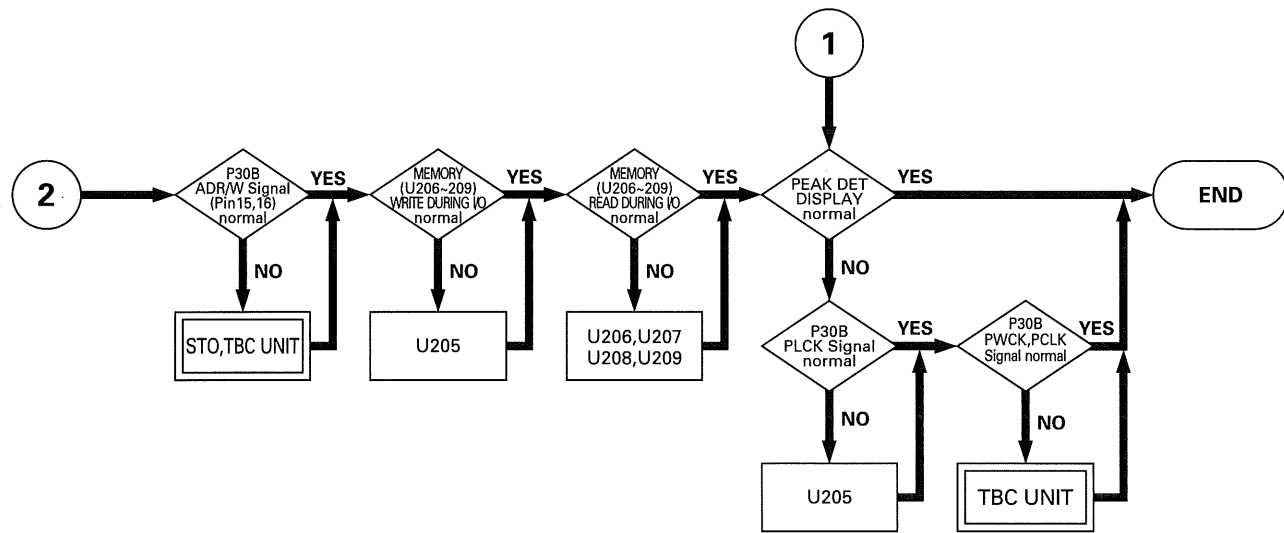
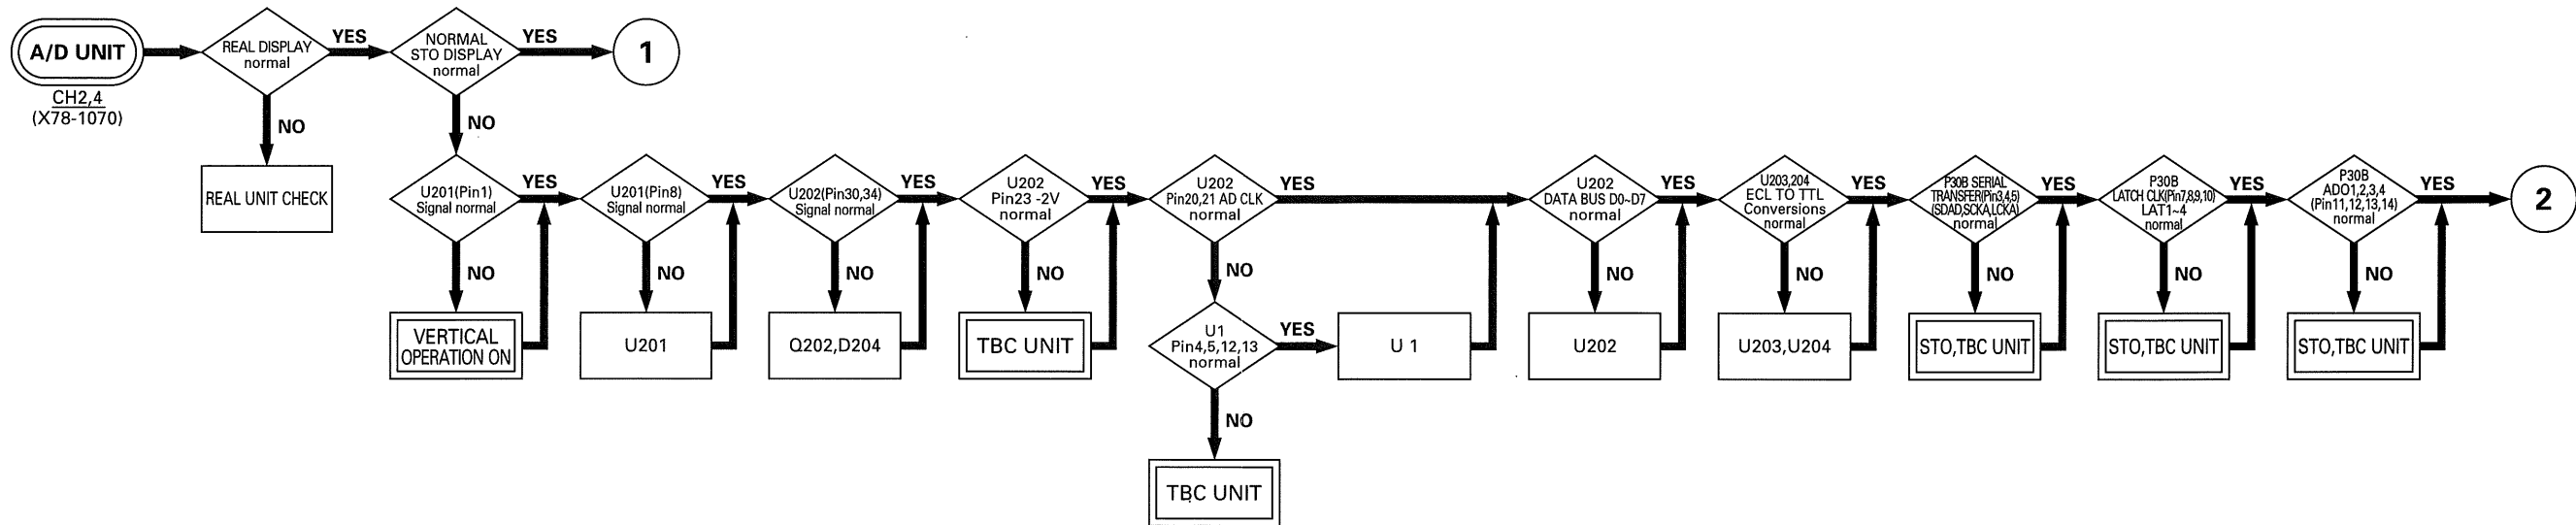


TROUBLESHOOTING





TIME BASE UNIT TROUBLESHOOTING

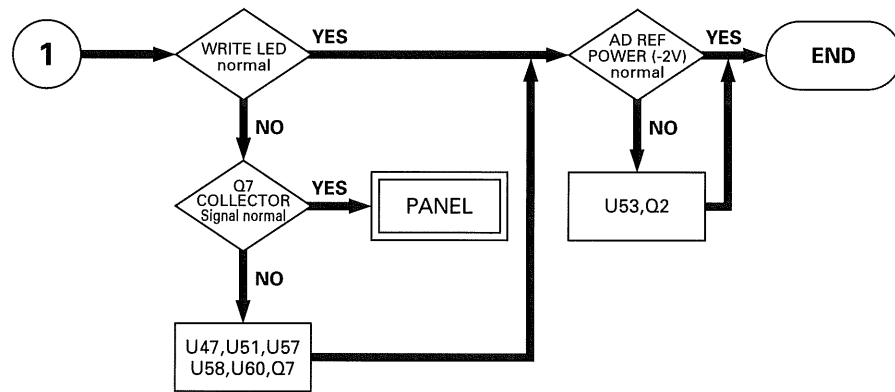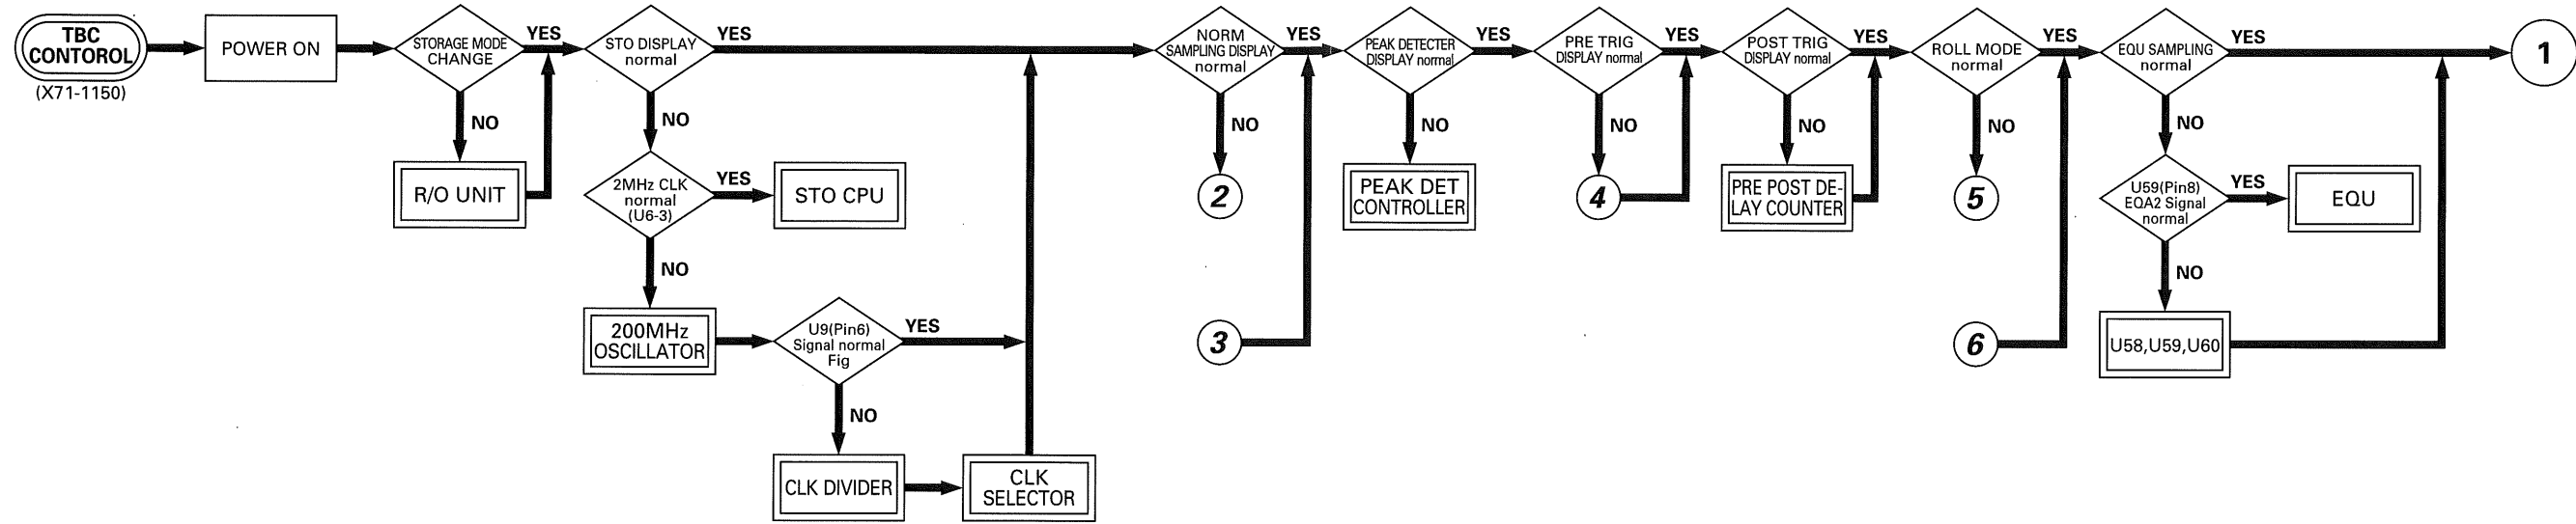

TROUBLESHOOTING

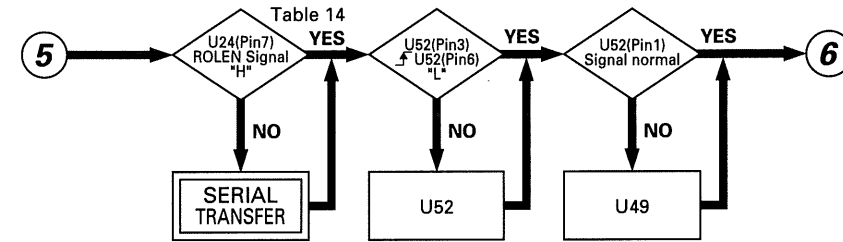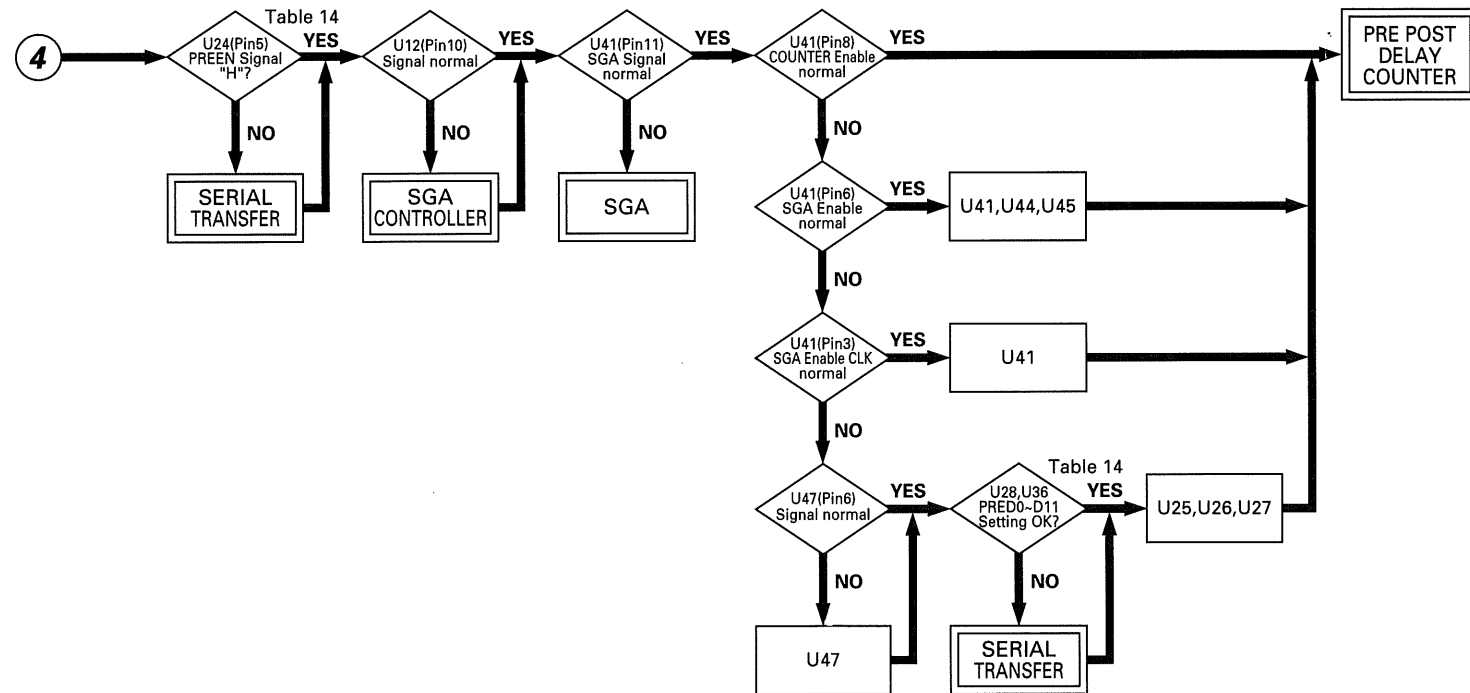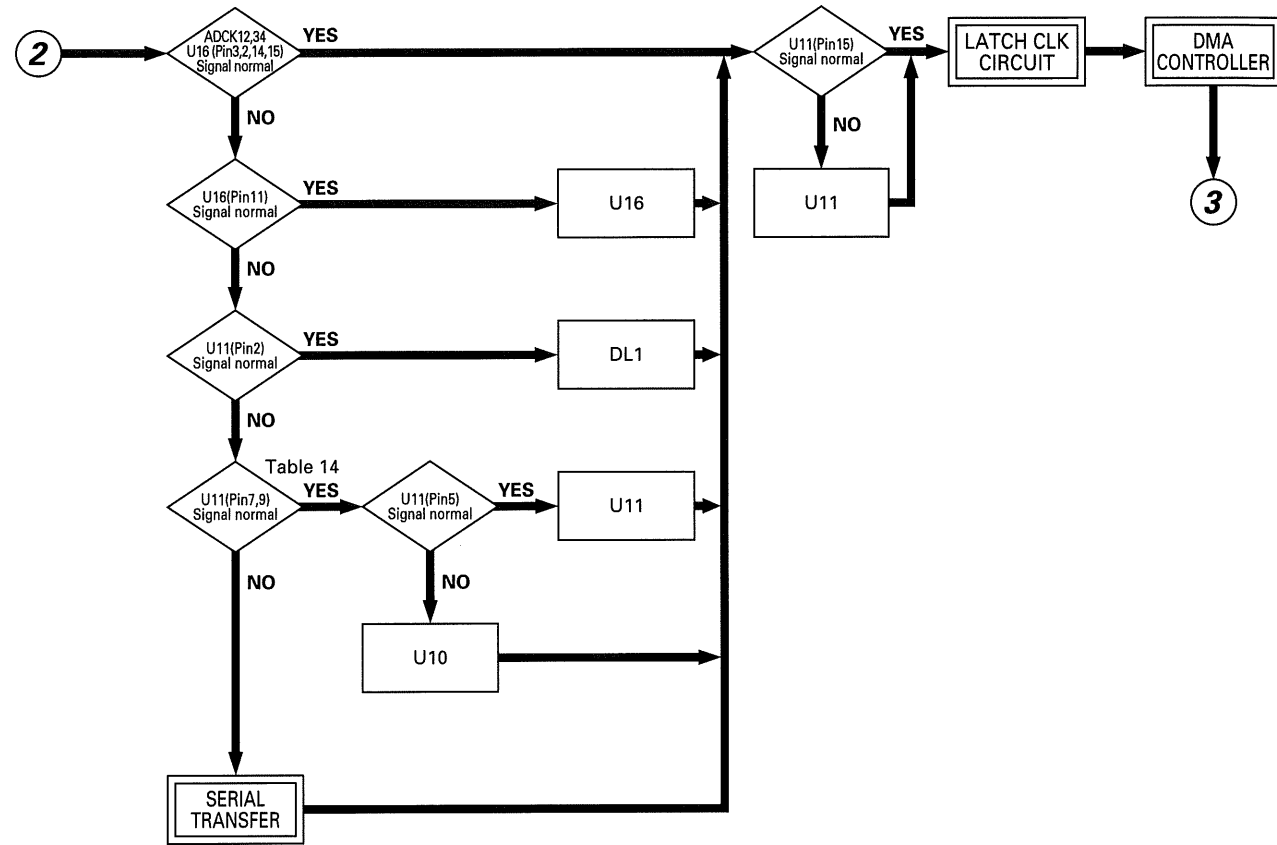

TROUBLESHOOTING

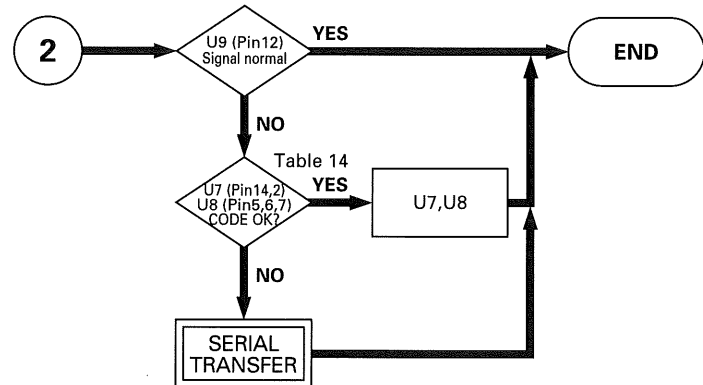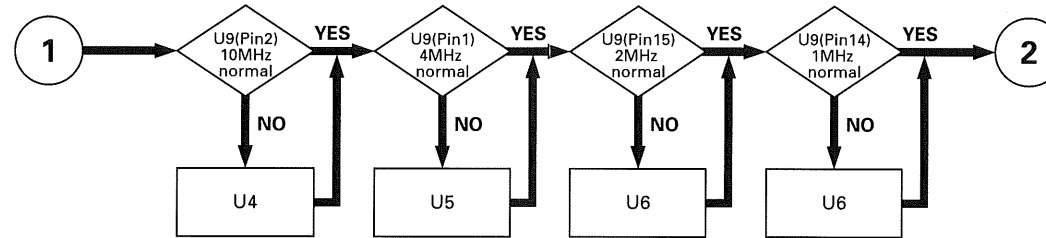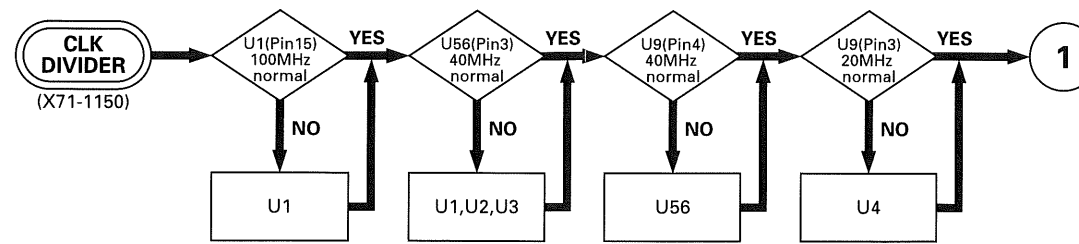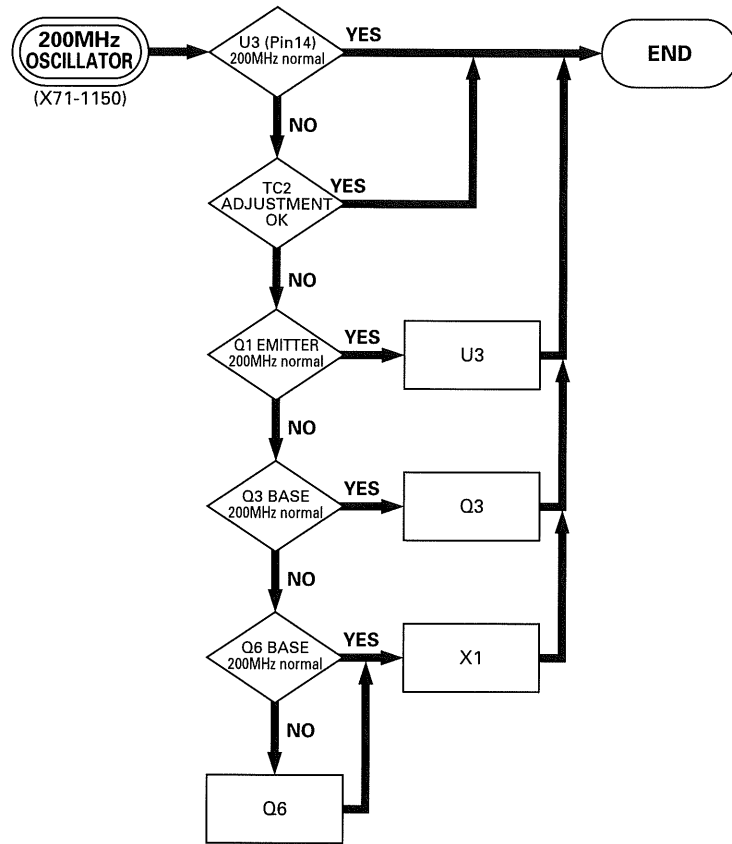

| U23 | HC595 | Output Order | Signal Name | Content |
|-----|-------|--------------|-------------|-----------------------------|
| | QA | 72 | FMD0 | FAST MEMORY ADDRESS DATA D0 |
| | QB | 71 | FMD1 | FAST MEMORY ADDRESS DATA D1 |
| | QC | 70 | FMD2 | FAST MEMORY ADDRESS DATA D2 |
| | QD | 69 | FMD3 | FAST MEMORY ADDRESS DATA D3 |
| | QE | 68 | FMD4 | FAST MEMORY ADDRESS DATA D4 |
| | QF | 67 | FMD5 | FAST MEMORY ADDRESS DATA D5 |
| | QG | 66 | FMD6 | FAST MEMORY ADDRESS DATA D6 |
| | QH | 65 | FMD7 | FAST MEMORY ADDRESS DATA D7 |

| U24 | HC595 | Output Order | Signal Name | Content |
|-----|-------|--------------|-------------|---|
| | QA | 64 | FMD8 | FAST MEMORY ADDRESS DATA D8 |
| | QB | 63 | FMD9 | FAST MEMORY ADDRESS DATA D9 |
| | QC | 62 | FMD10 | FAST MEMORY ADDRESS DATA D10 |
| | QD | 61 | FMD11 | FAST MEMORY ADDRESS DATA D11 |
| | QE | 60 | MESEL | 2k Mem. for NOR or POST operation. "H" when divided, "L" in other case. |
| | QF | 59 | PREEN | "H" during PRE TRIG, "L" in other case. |
| | QG | 58 | PSTEN | "H" during POST TRIG, "L" in other case. |
| | QH | 57 | ROLEN | "H" during ROLL MODE, "L" in other case. |

| U28 | HC595 | Output Order | Signal Name | Content |
|-----|-------|--------------|-------------|-----------------------------------|
| | QA | 56 | PRED0 | PRE TRIG SGA ENABLE COUNT DATA D0 |
| | QB | 55 | PRED1 | PRE TRIG SGA ENABLE COUNT DATA D1 |
| | QC | 54 | PRED2 | PRE TRIG SGA ENABLE COUNT DATA D2 |
| | QD | 53 | PRED3 | PRE TRIG SGA ENABLE COUNT DATA D3 |
| | QE | 52 | PRED4 | PRE TRIG SGA ENABLE COUNT DATA D4 |
| | QF | 51 | PRED5 | PRE TRIG SGA ENABLE COUNT DATA D5 |
| | QG | 50 | PRED6 | PRE TRIG SGA ENABLE COUNT DATA D6 |
| | QH | 49 | PRED7 | PRE TRIG SGA ENABLE COUNT DATA D7 |

| TIME BASE UNIT | | | | |
|----------------|-------|--------------|-------------|-----------------------------------|
| U34 | HC595 | Output Order | Signal Name | Content |
| | QA | 48 | DLYD0 | PRE&POST TRIG DELAY COUNT DATA D0 |
| | QB | 47 | DLYD1 | PRE&POST TRIG DELAY COUNT DATA D1 |
| | QC | 46 | DLYD2 | PRE&POST TRIG DELAY COUNT DATA D2 |
| | QD | 45 | DLYD3 | PRE&POST TRIG DELAY COUNT DATA D3 |
| | QE | 44 | DLYD4 | PRE&POST TRIG DELAY COUNT DATA D4 |
| | QF | 43 | DLYD5 | PRE&POST TRIG DELAY COUNT DATA D5 |
| | QG | 42 | DLYD6 | PRE&POST TRIG DELAY COUNT DATA D6 |
| | QH | 41 | DLYD7 | PRE&POST TRIG DELAY COUNT DATA D7 |

| TIME BASE UNIT | | | | |
|----------------|-------|--------------|-------------|------------------------------------|
| U35 | HC595 | Output Order | Signal Name | Content |
| | QA | 40 | DLYD8 | PRE&POST TRIG DELAY COUNT DATA D8 |
| | QB | 39 | DLYD9 | PRE&POST TRIG DELAY COUNT DATA D9 |
| | QC | 38 | DLYD10 | PRE&POST TRIG DELAY COUNT DATA D10 |
| | QD | 37 | DLYD11 | PRE&POST TRIG DELAY COUNT DATA D11 |
| | QE | 36 | DLYD12 | PRE&POST TRIG DELAY COUNT DATA D12 |
| | QF | 35 | DLYD13 | PRE&POST TRIG DELAY COUNT DATA D13 |
| | QG | 34 | DLYD14 | PRE&POST TRIG DELAY COUNT DATA D14 |
| | QH | 33 | DLYD15 | PRE&POST TRIG DELAY COUNT DATA D15 |

| TIME BASE UNIT | | | | |
|----------------|-------|--------------|-------------|------------------------------------|
| U36 | HC595 | Output Order | Signal Name | Content |
| | QA | 32 | DLYD16 | PRE&POST TRIG DELAY COUNT DATA D16 |
| | QB | 31 | DLYD17 | PRE&POST TRIG DELAY COUNT DATA D17 |
| | QC | 30 | DLYD18 | PRE&POST TRIG DELAY COUNT DATA D18 |
| | QD | 29 | DLYD19 | PRE&POST TRIG DELAY COUNT DATA D19 |
| | QE | 28 | PRED8 | PRE TRIG SGA ENABLE COUNT DATA D8 |
| | QF | 27 | PRED9 | PRE TRIG SGA ENABLE COUNT DATA D9 |
| | QG | 26 | PRED10 | PRE TRIG SGA ENABLE COUNT DATA D10 |
| | QH | 25 | PRED11 | PRE TRIG SGA ENABLE COUNT DATA D11 |




| TIME BASE UNIT | | | | |
|----------------|-------|--------------|-------------|-------------------|
| U17 | HC595 | Output Order | Signal Name | Content |
| | QA | 24 | * | Always "L". |
| | QB | 23 | * | Always "L". |
| | QC | 22 | * | Always "L". |
| | QD | 21 | * | Always "L". |
| | QE | 20 | * | Always "L". |
| | QF | 19 | * | Always "L". |
| | QG | 18 | TBCD9 | TIME BASE CODE D9 |
| | QH | 17 | TBCD8 | TIME BASE CODE D8 |

| TIME BASE UNIT | | | | |
|----------------|-------|--------------|-------------|-------------------|
| U15 | HC595 | Output Order | Signal Name | Content |
| | QA | 16 | TBCD7 | TIME BASE CODE D7 |
| | QB | 15 | TBCD6 | TIME BASE CODE D6 |
| | QC | 14 | TBCD5 | TIME BASE CODE D5 |
| | QD | 13 | TBCD4 | TIME BASE CODE D4 |
| | QE | 12 | TBCD3 | TIME BASE CODE D3 |
| | QF | 11 | TBCD2 | TIME BASE CODE D2 |
| | QG | 10 | TBCD1 | TIME BASE CODE D1 |
| | QH | 9 | TBCD0 | TIME BASE CODE D0 |




| A/D UNIT | | | | |
|----------|--------------|-------------|---------|---|
| HC595 | Output Order | Signal Name | Content | |
| | QA | 8 | * | Always "L". |
| | QB | 7 | * | Always "L". |
| | QC | 6 | * | Always "L". |
| | QD | 5 | * | Always "L". |
| | QE | 4 | PKOUT | "H" when PEAK DET is ON, "L" in other case. |
| | QF | 3 | PKA | "L" MIN "L" MAX "H" MIN "H" OFF |
| | QG | 2 | PKB | "L"/MAX "H" "L" "H" |
| | QH | 1 | PKDEN | "L" when PEAK DET is ON, "H" in other case. |

Table 1 Serial Transfer



TROUBLESHOOTING

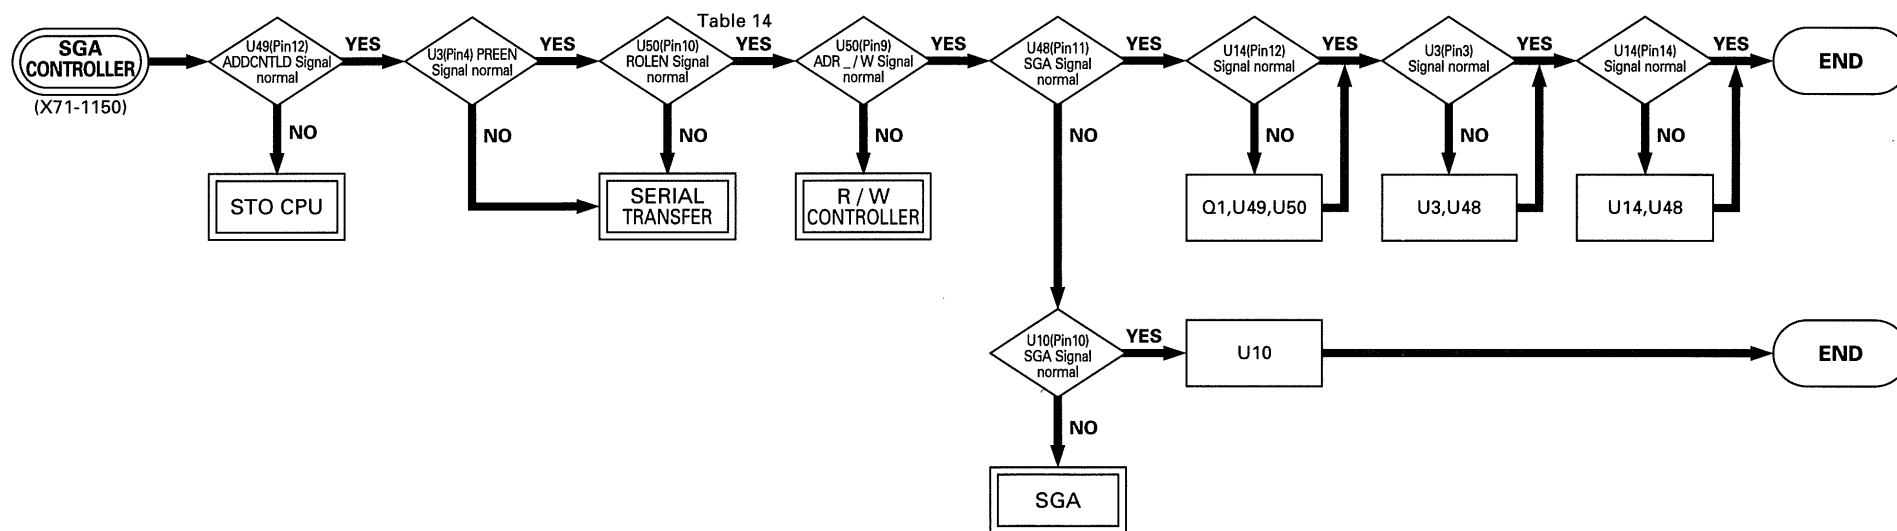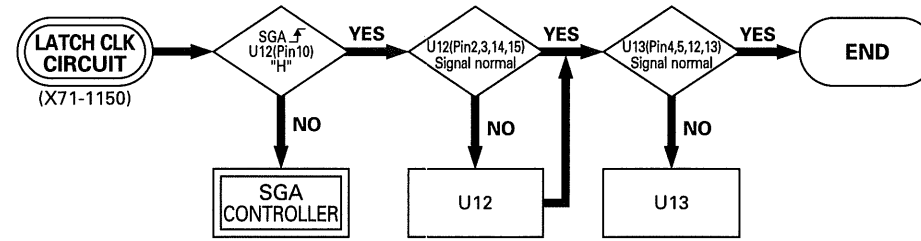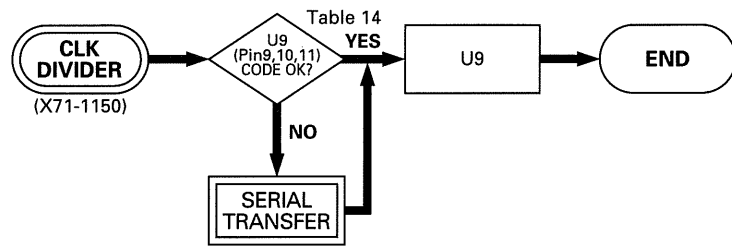




TROUBLESHOOTING

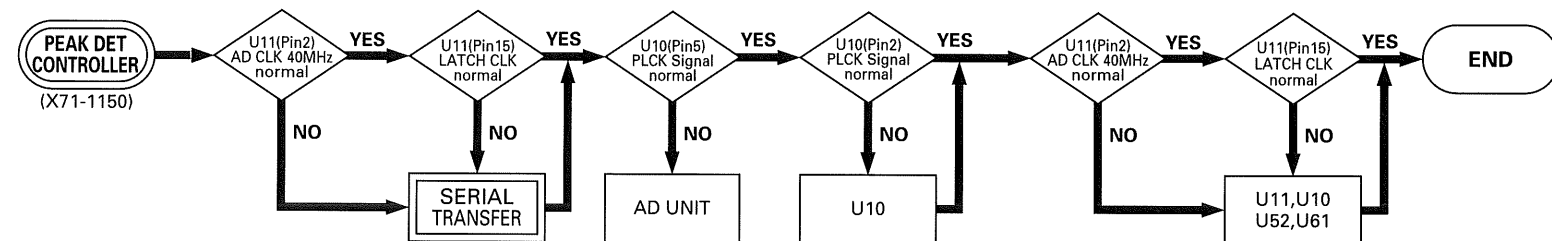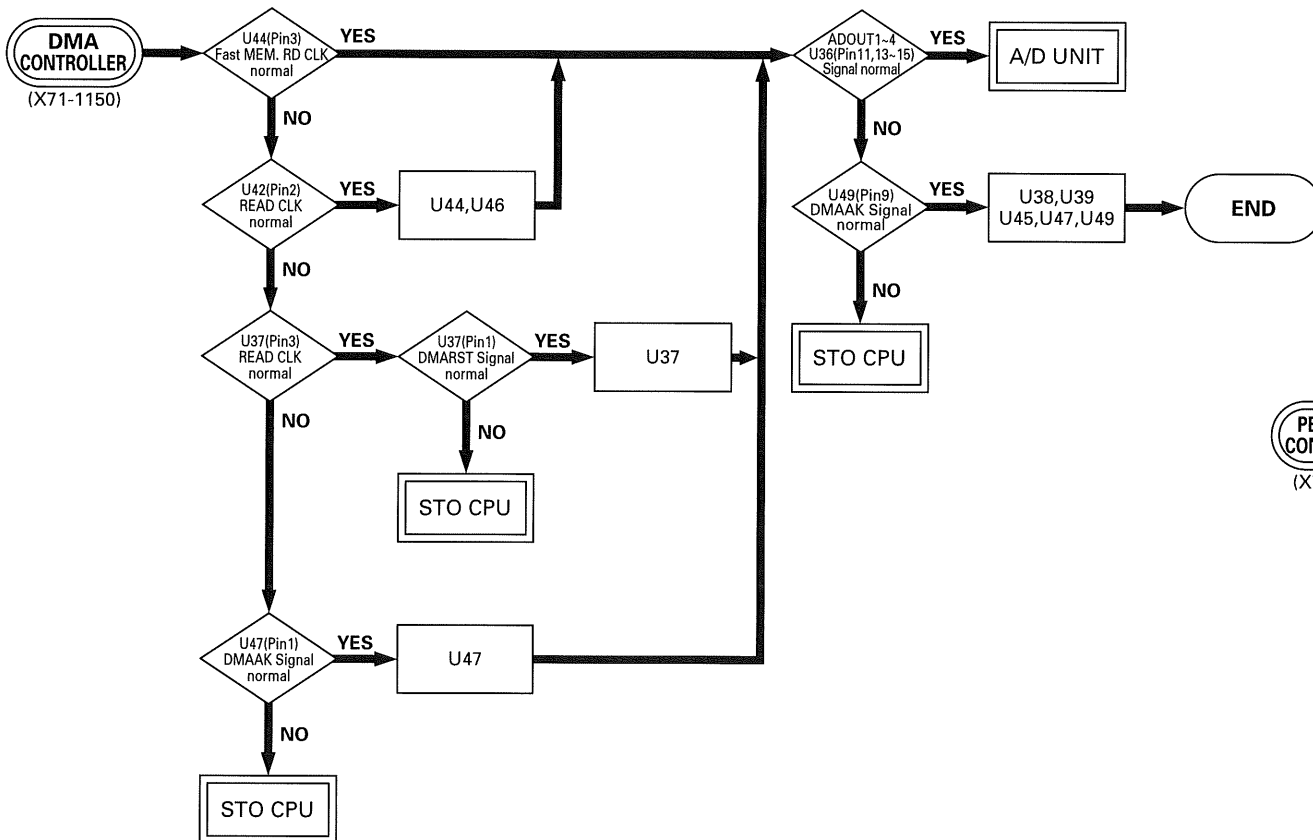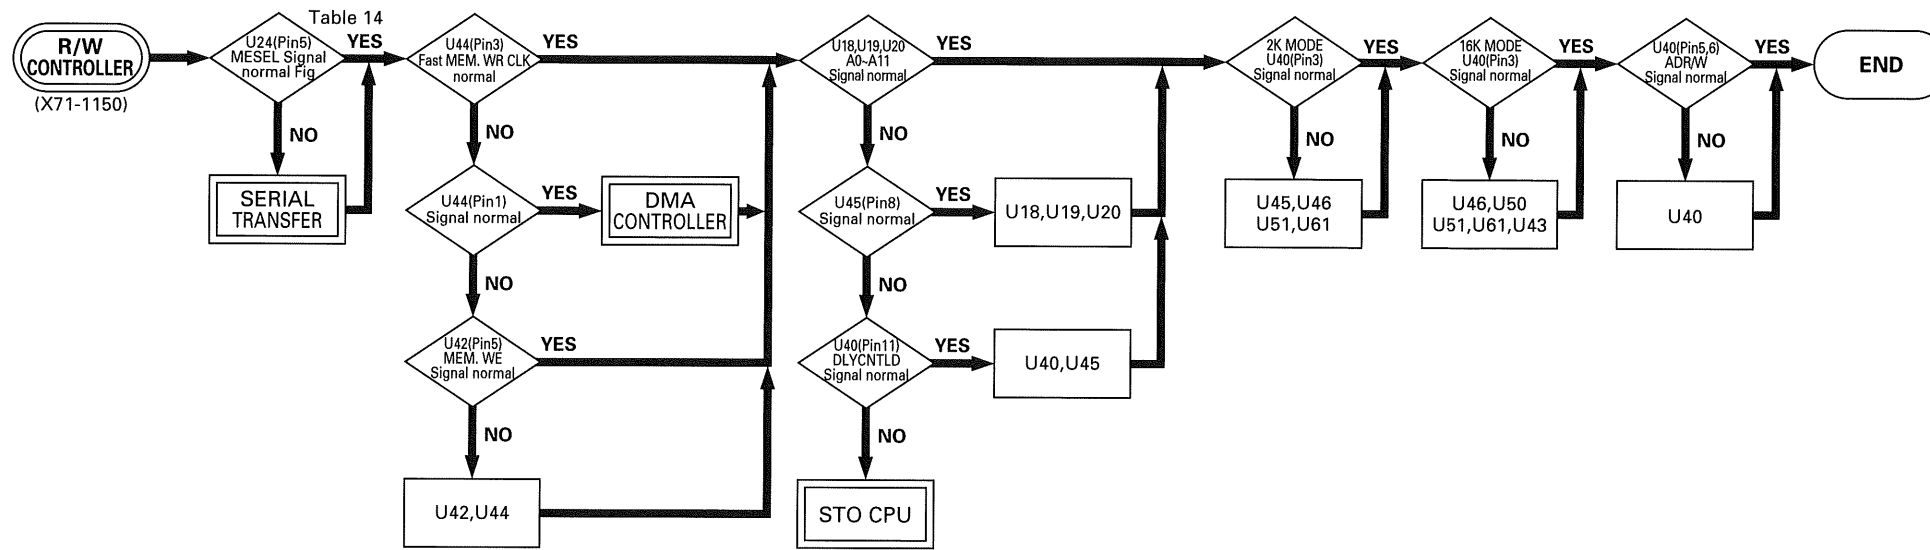




TROUBLESHOOTING

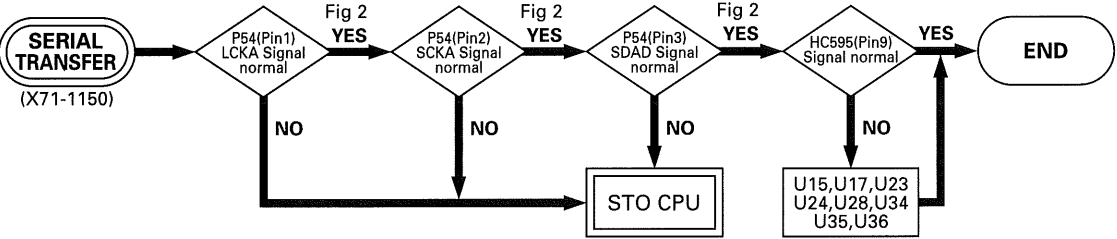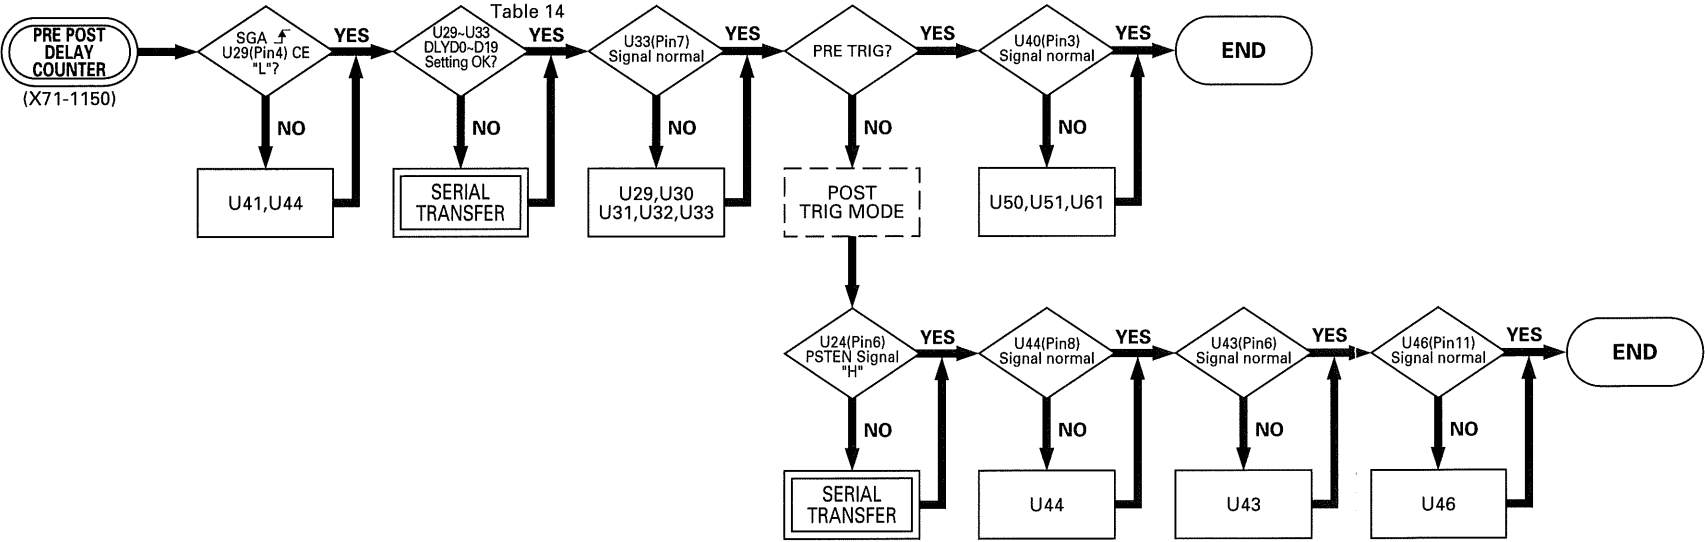





TROUBLESHOOTING

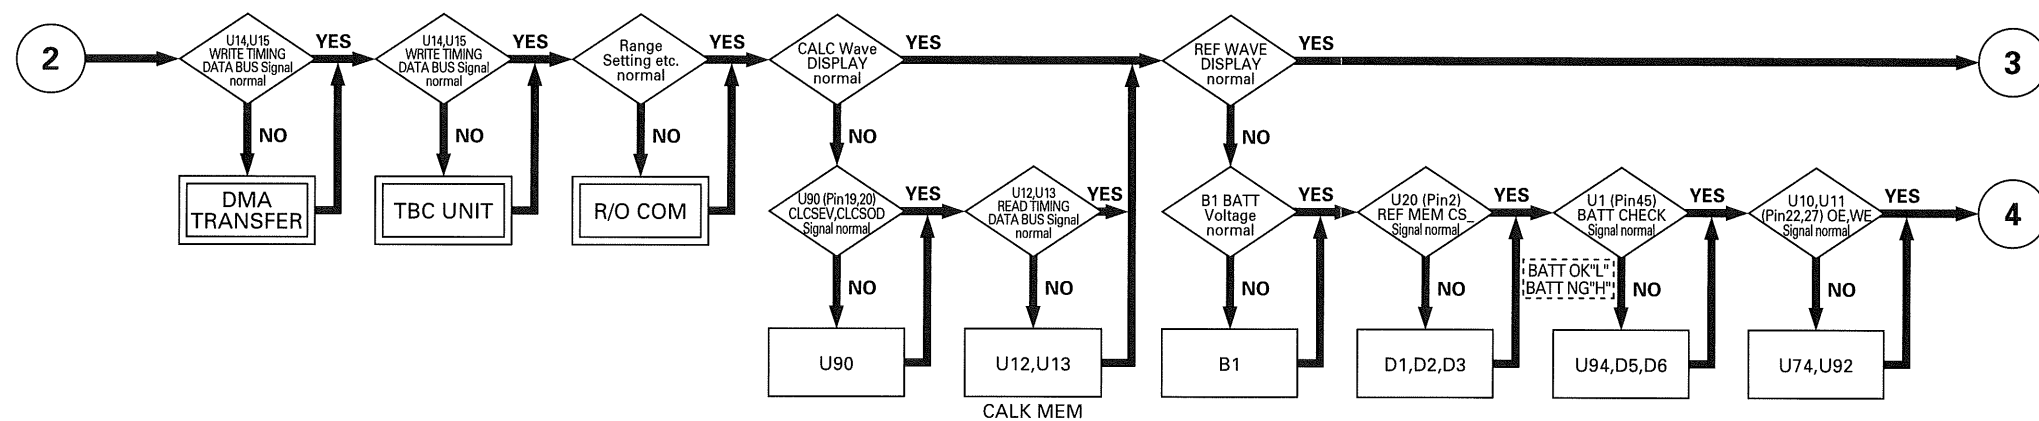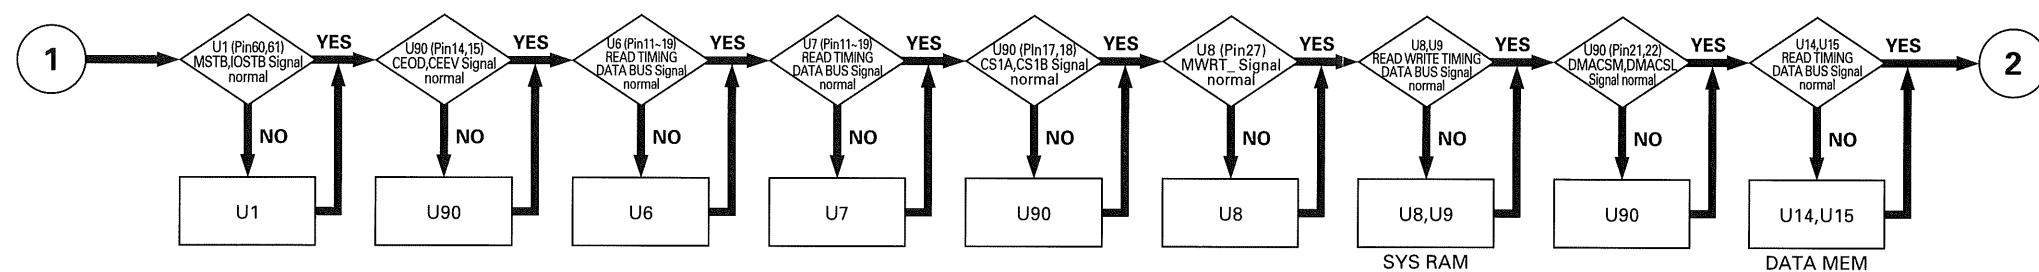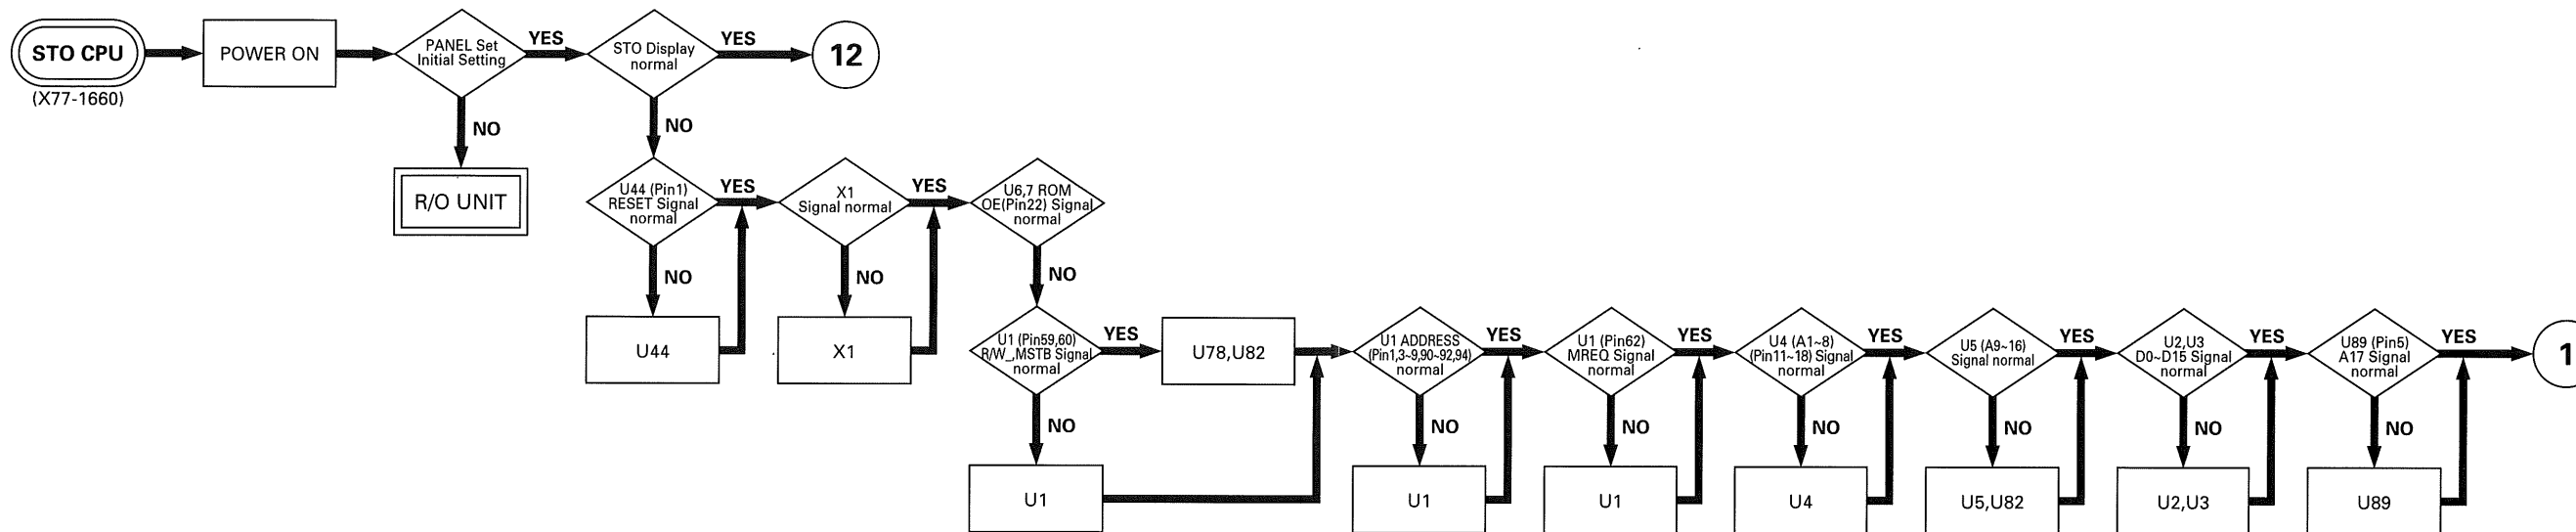




TROUBLESHOOTING

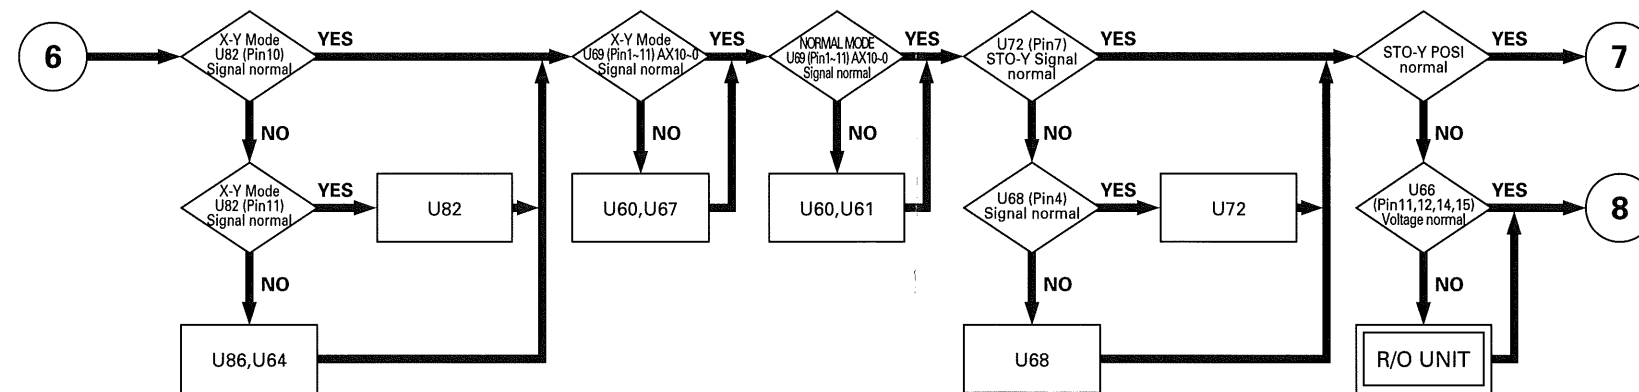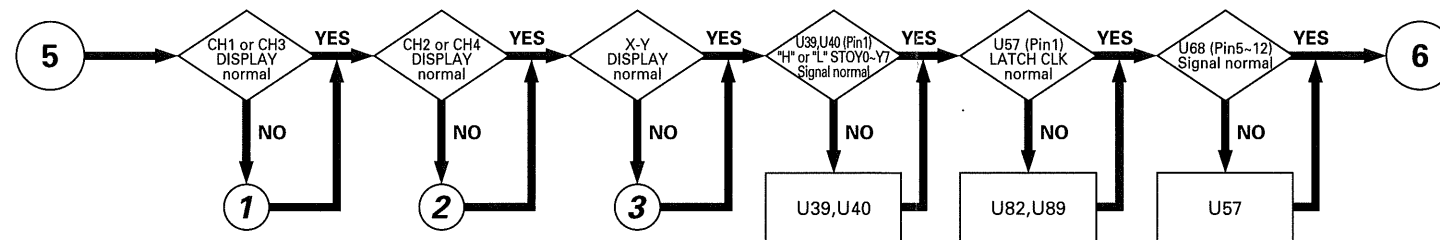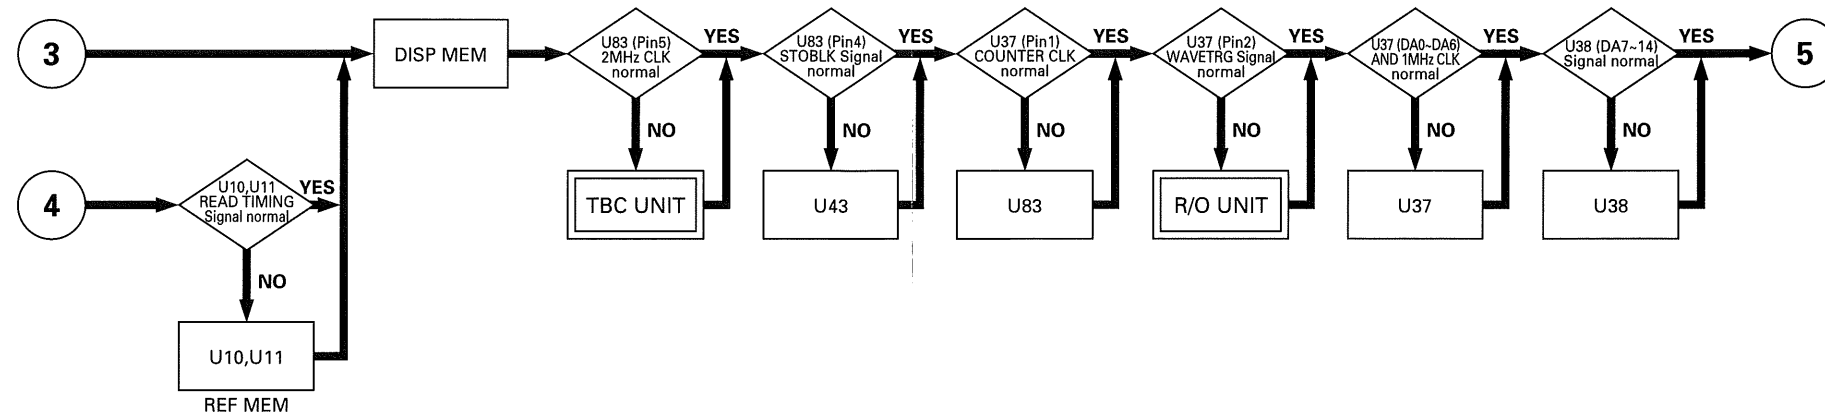



TROUBLESHOOTING

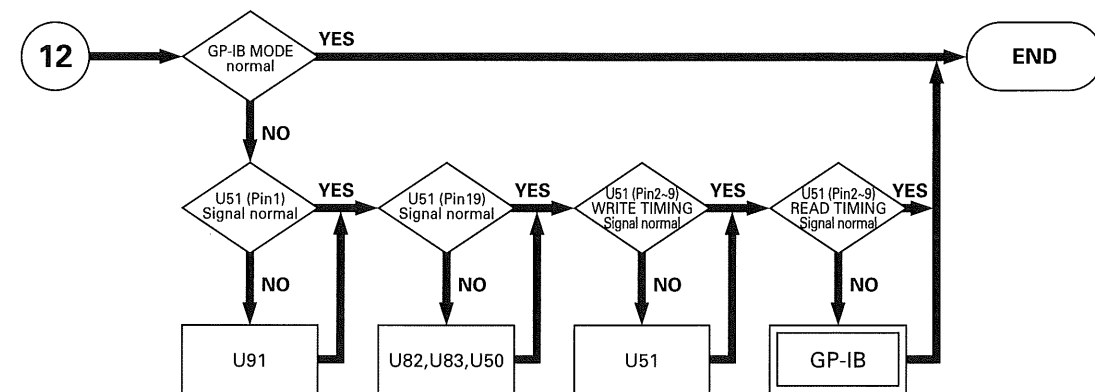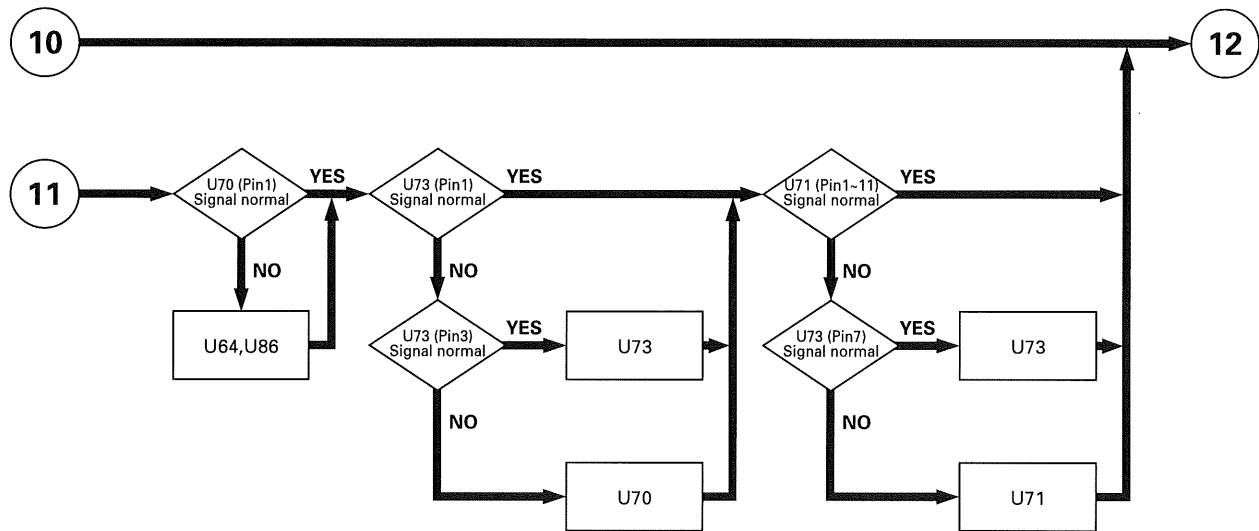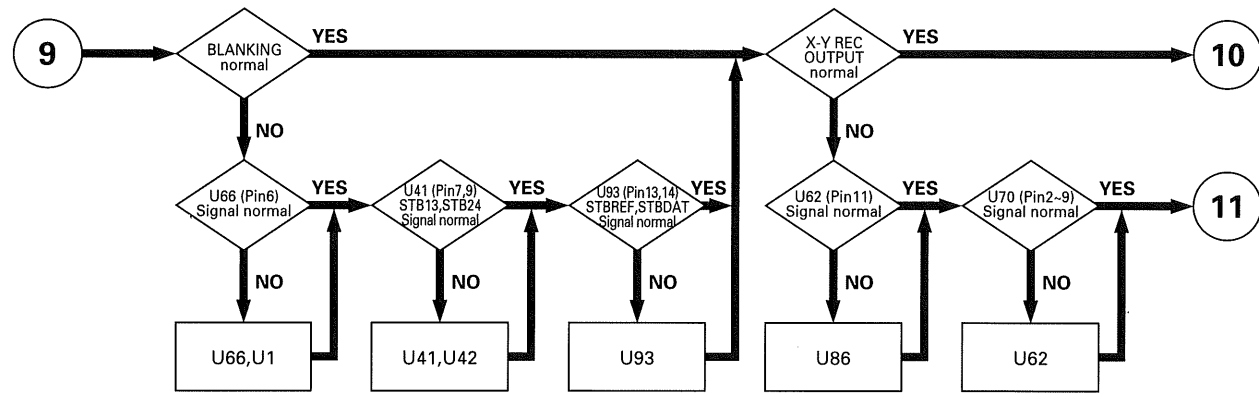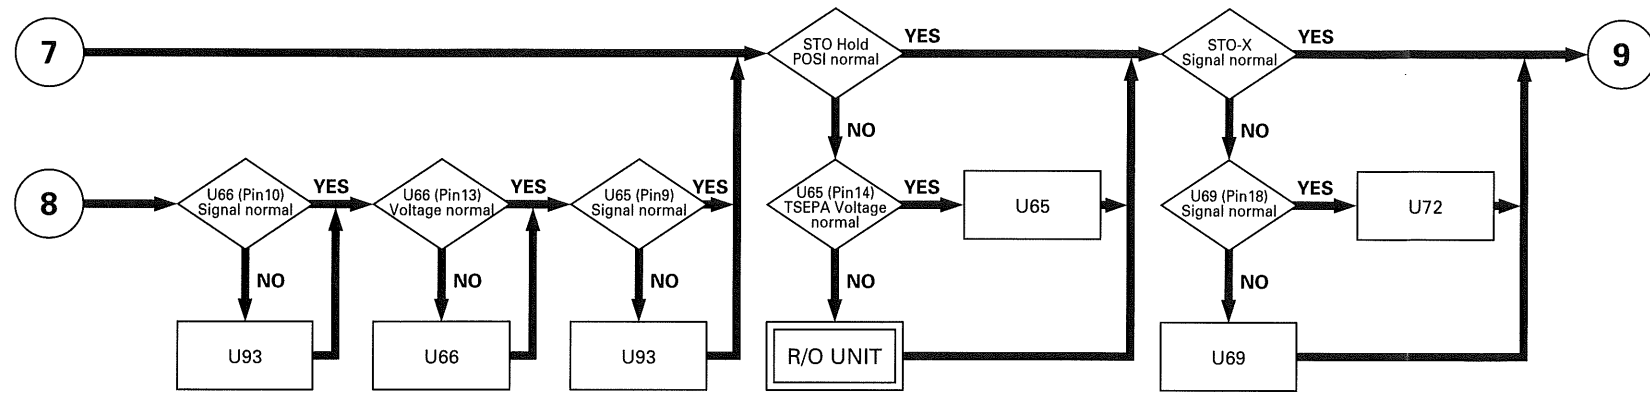


TROUBLESHOOTING

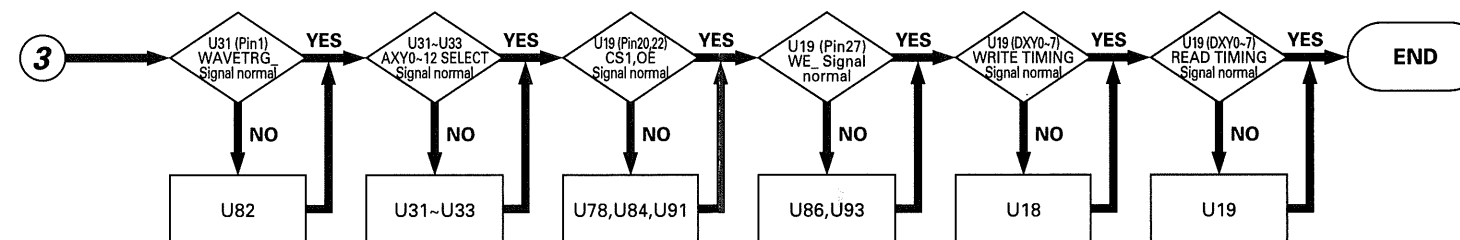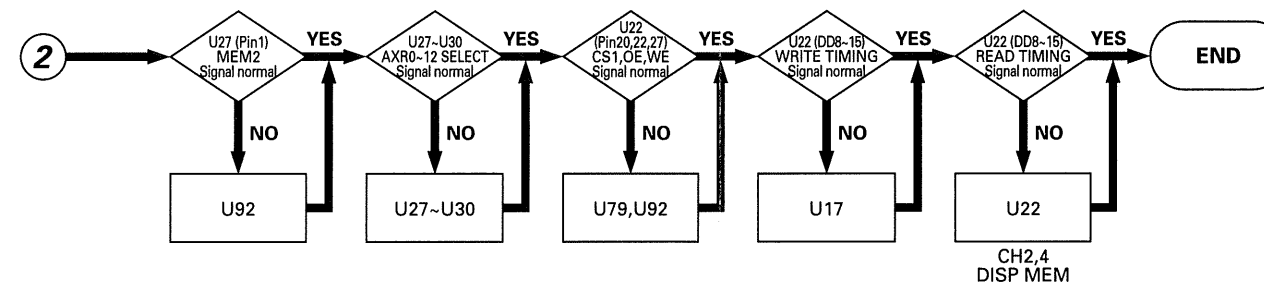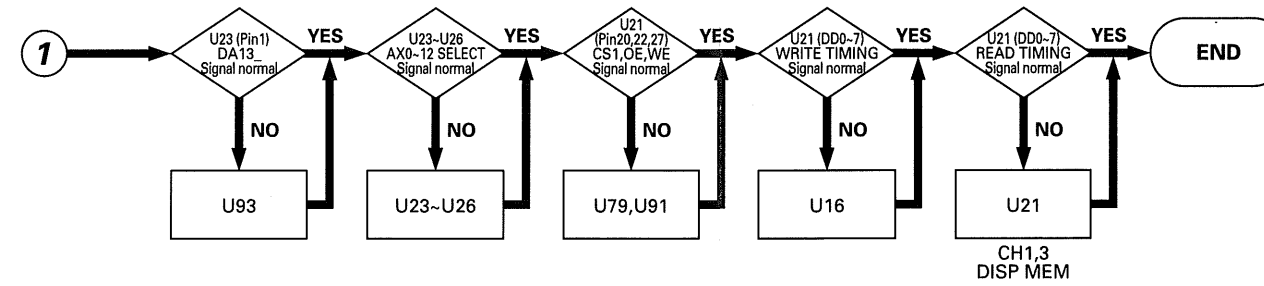


TROUBLESHOOTING

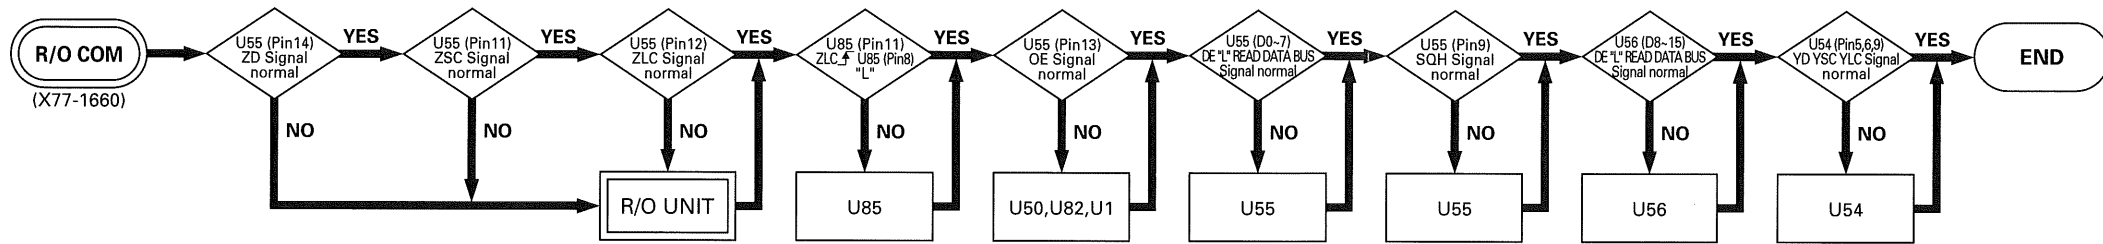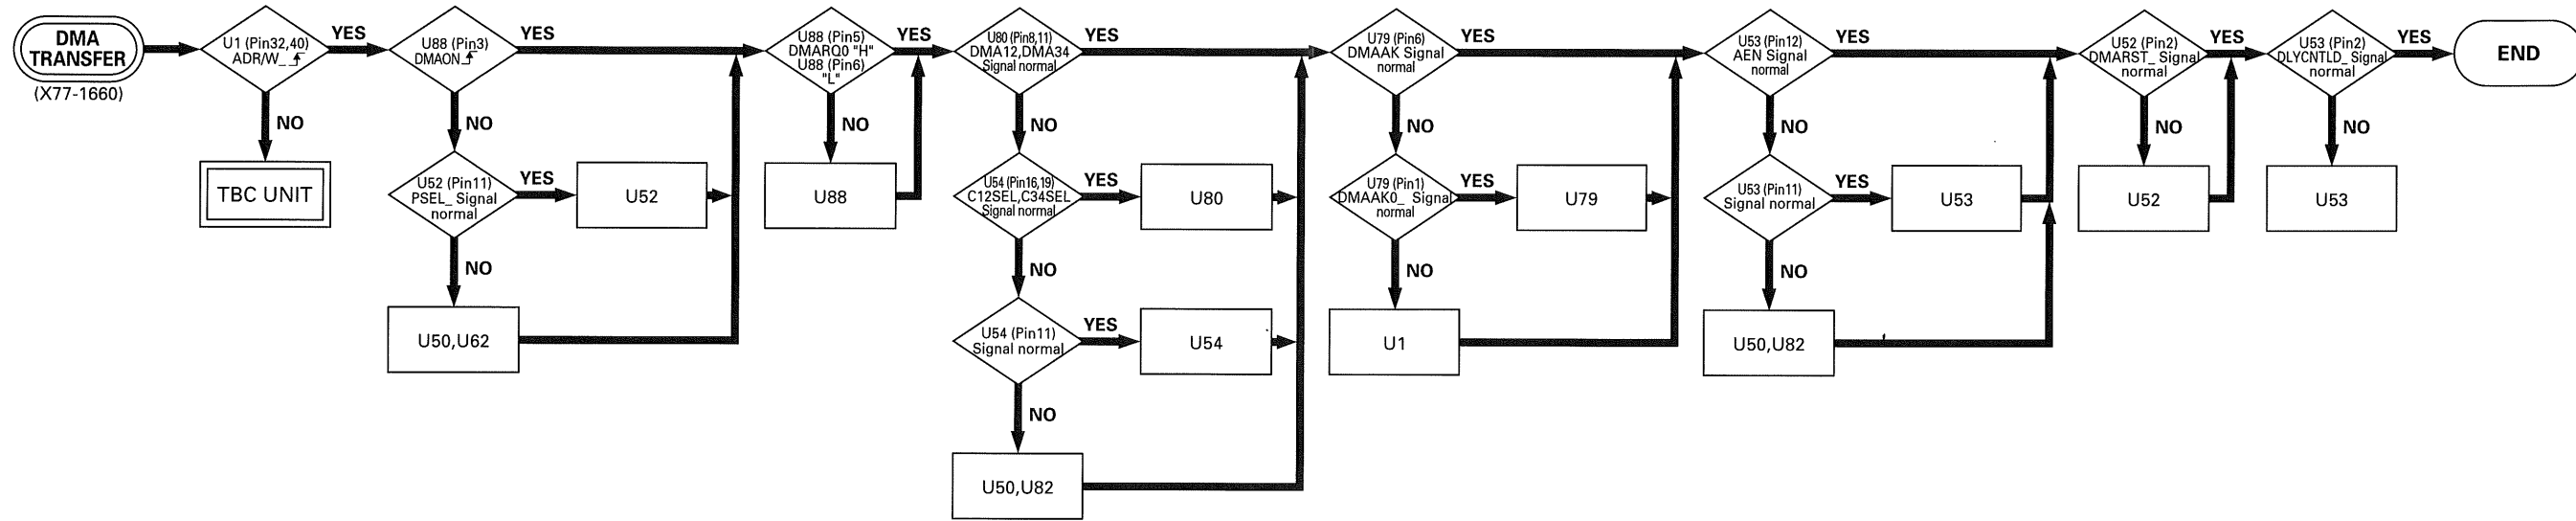

TROUBLESHOOTING

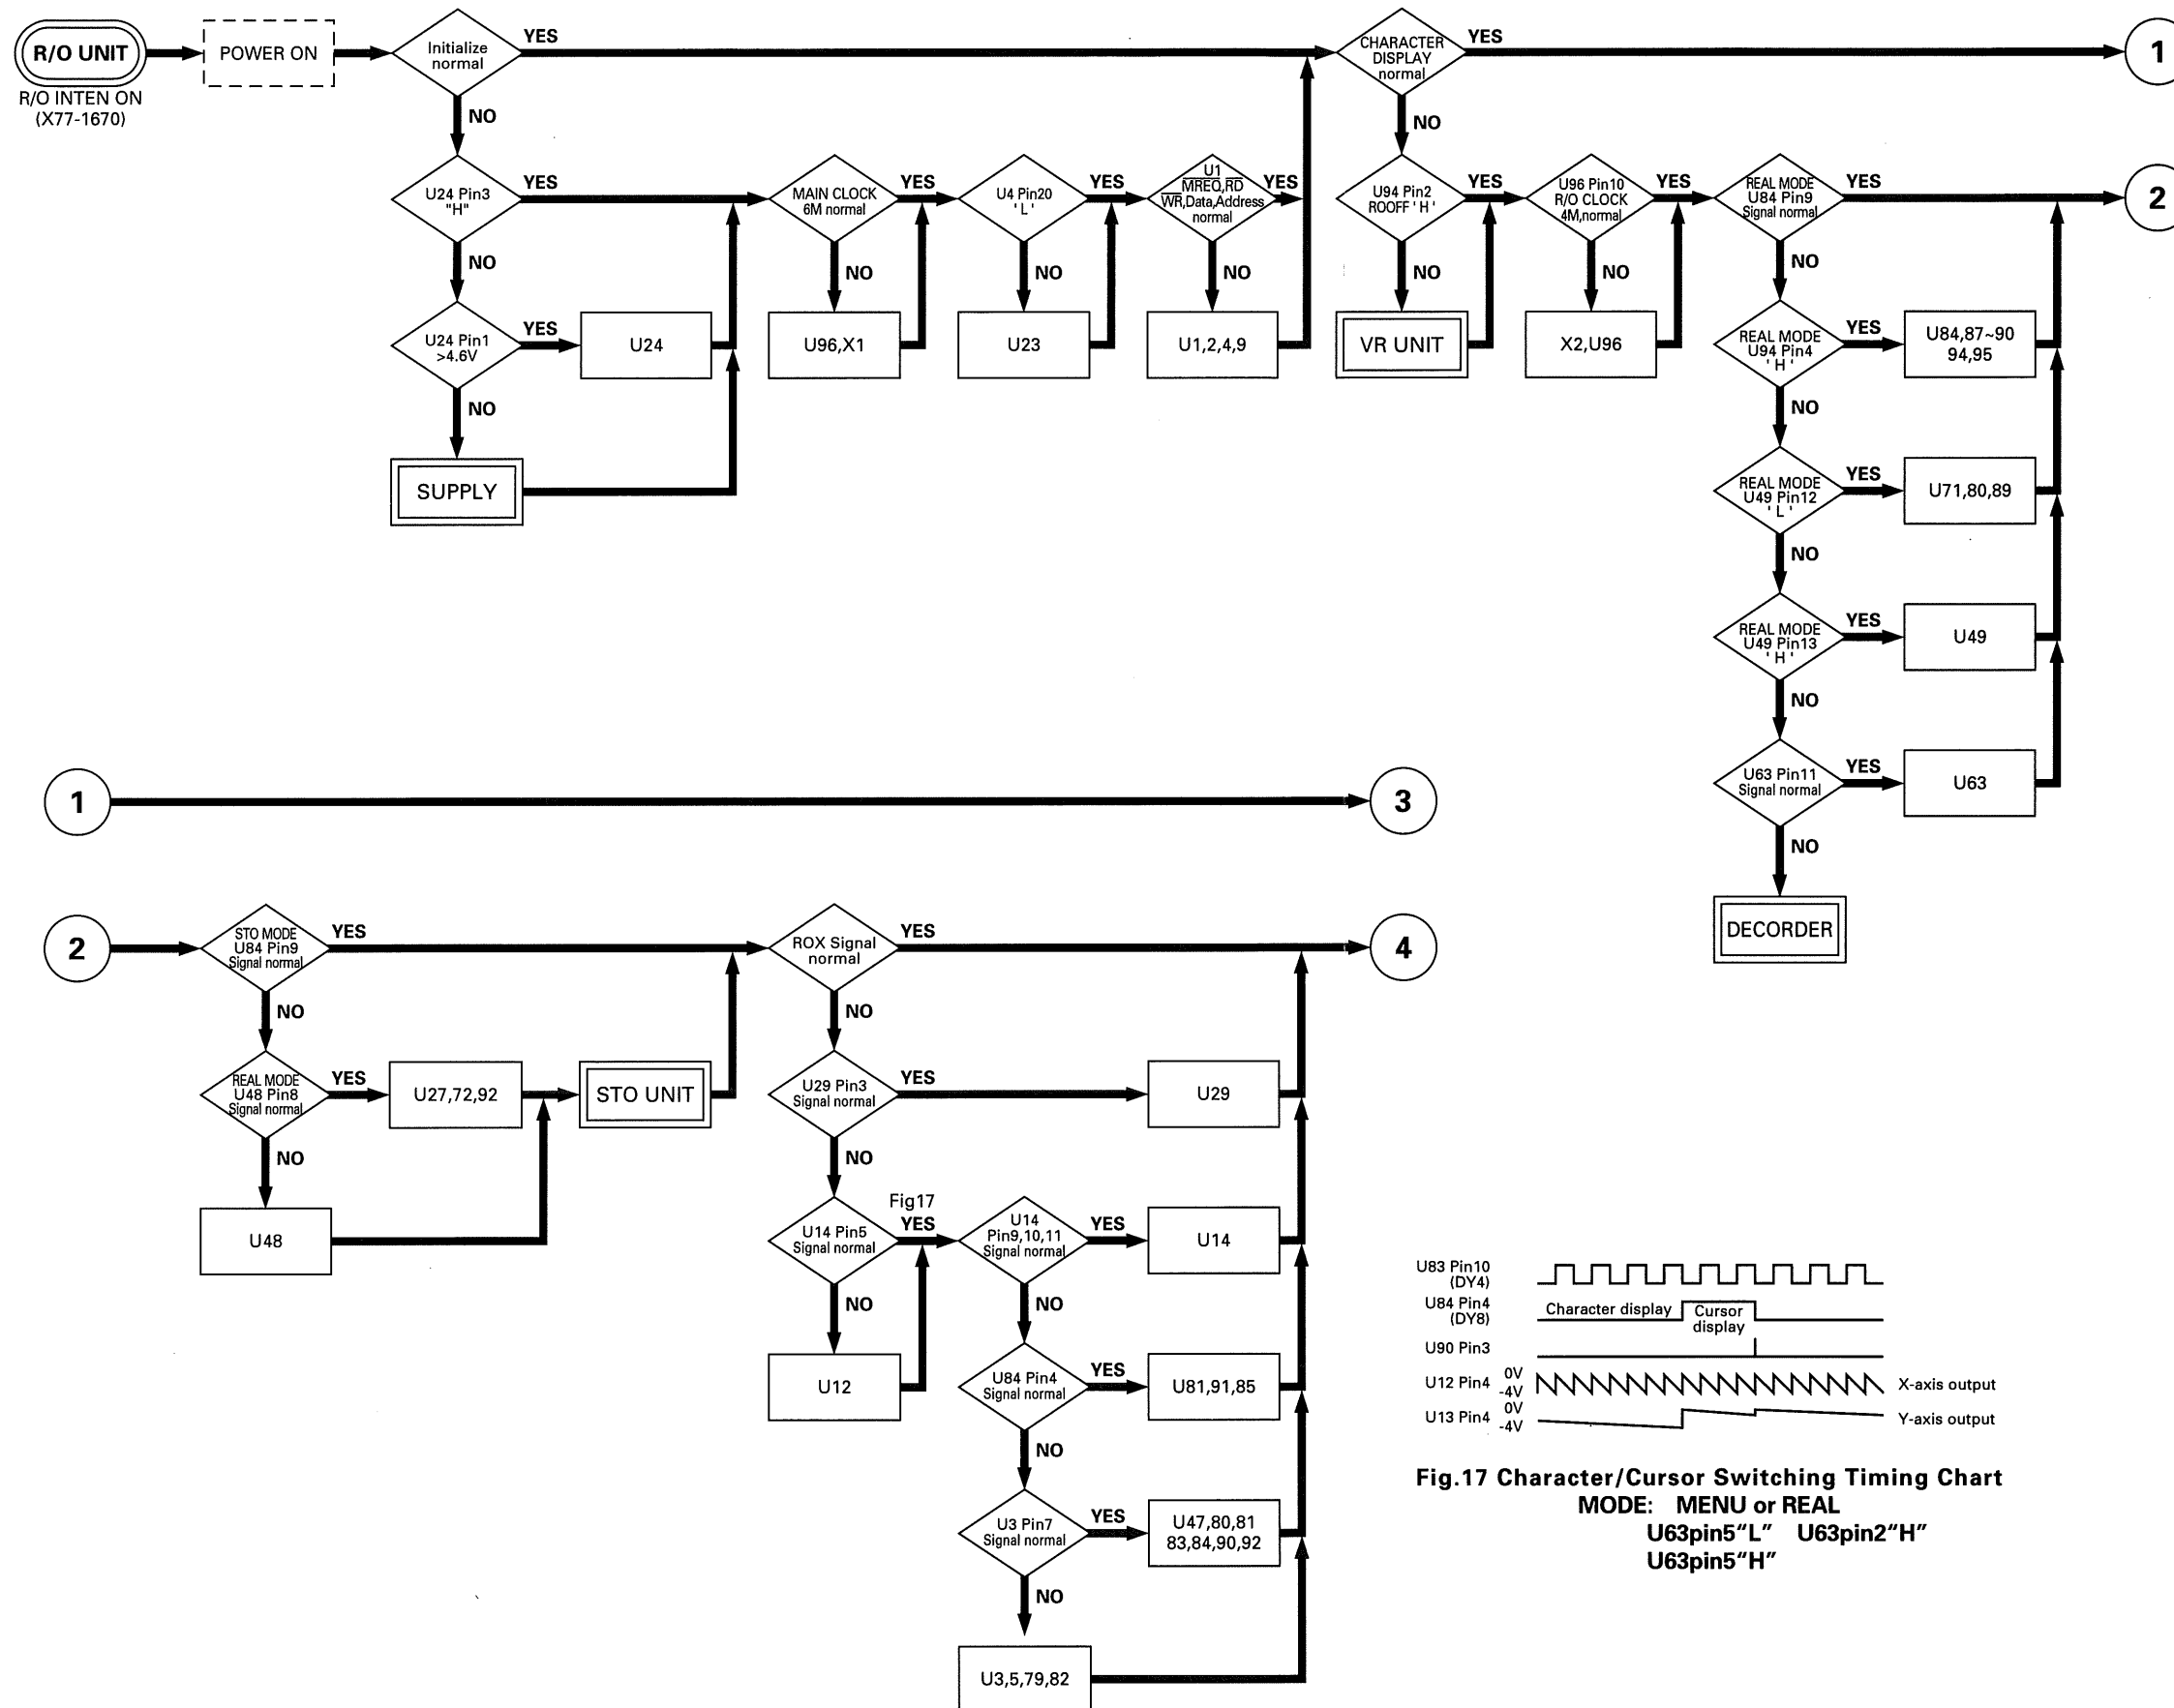

TROUBLESHOOTING

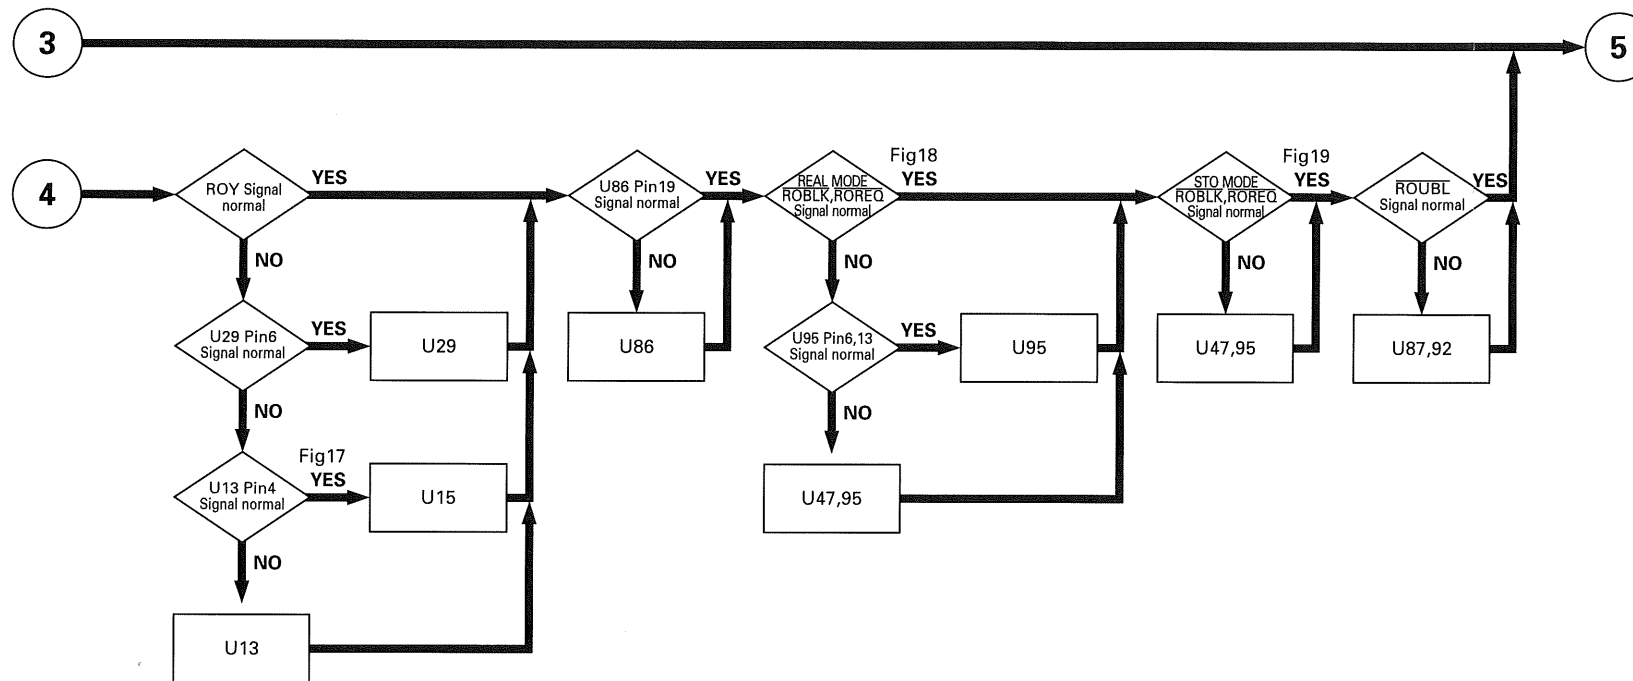

MODE=:REAL [REAL/STO (U63 pin 2) "H"
MENU (U63 pin 5) "H"]

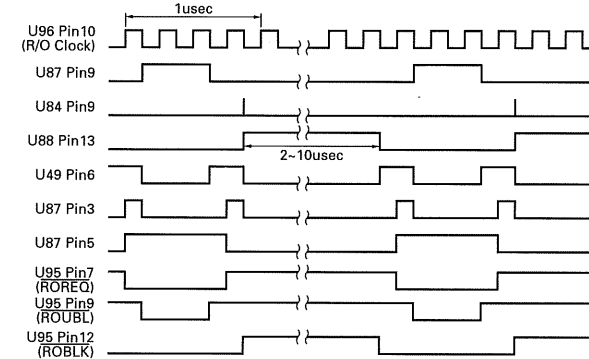


Fig. 18

MODE=:STO [REAL/STO (U63 pin 2) "L"
MENU (U63 pin 5) "H"]
WAVE TRG in "H" period




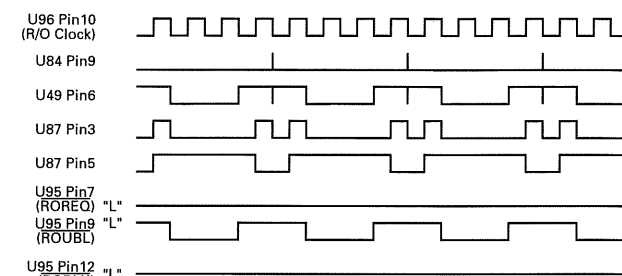


Fig. 19




ROUBL, ROREQ and ROBLK Signal Timing Chart

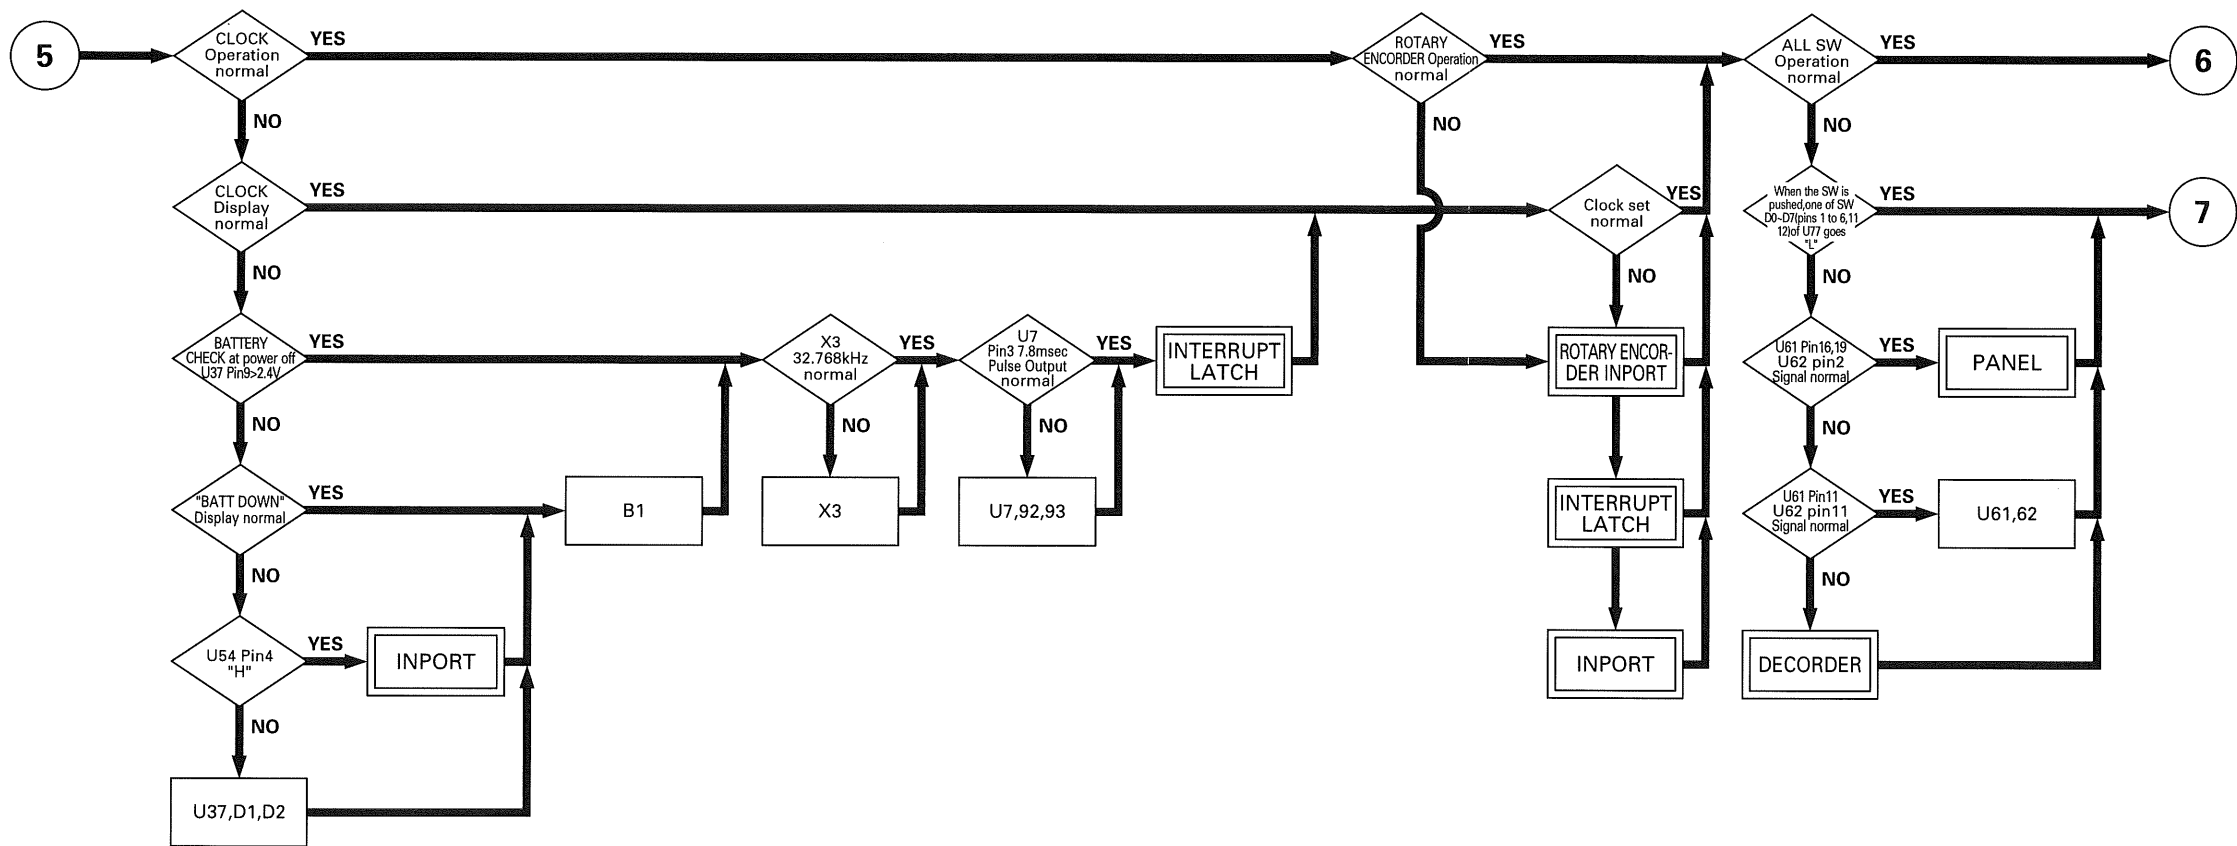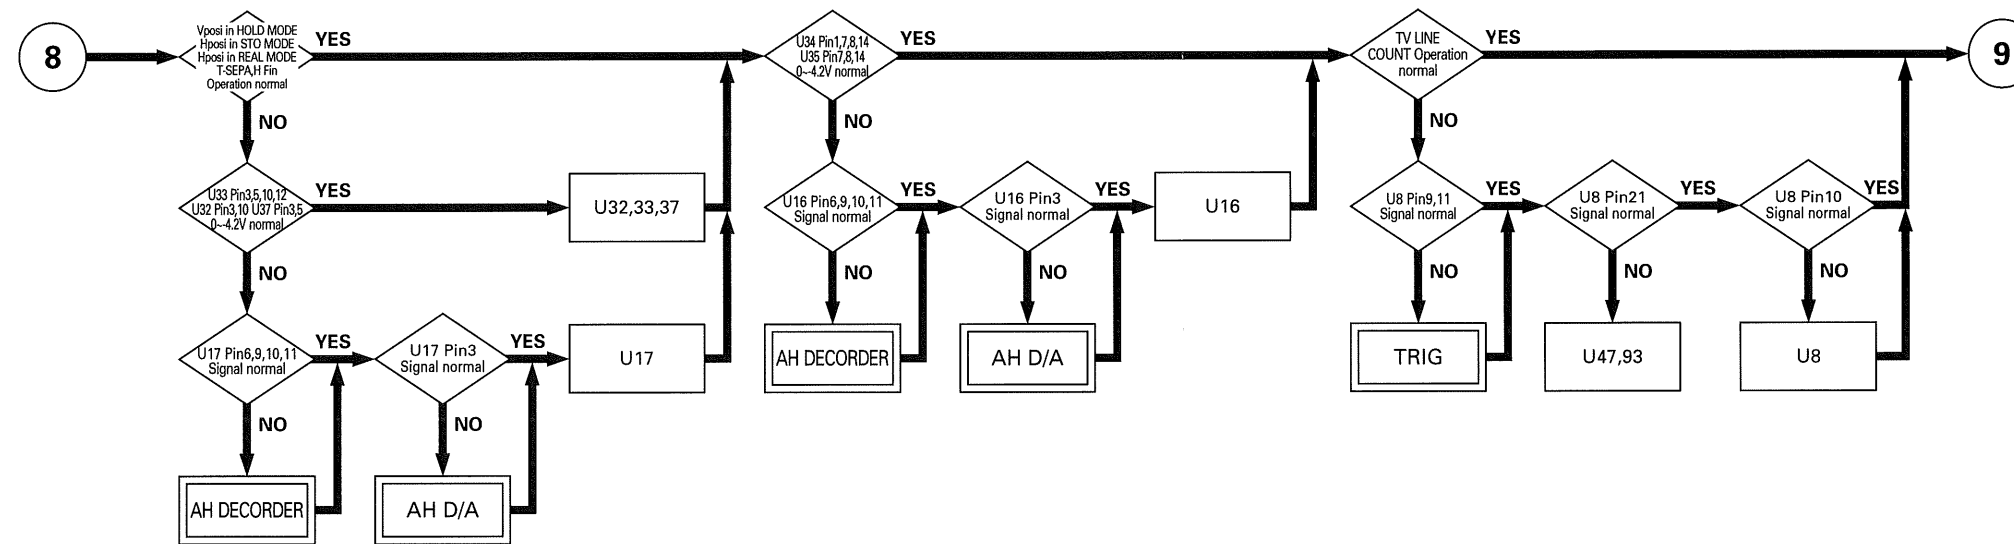

TROUBLESHOOTING

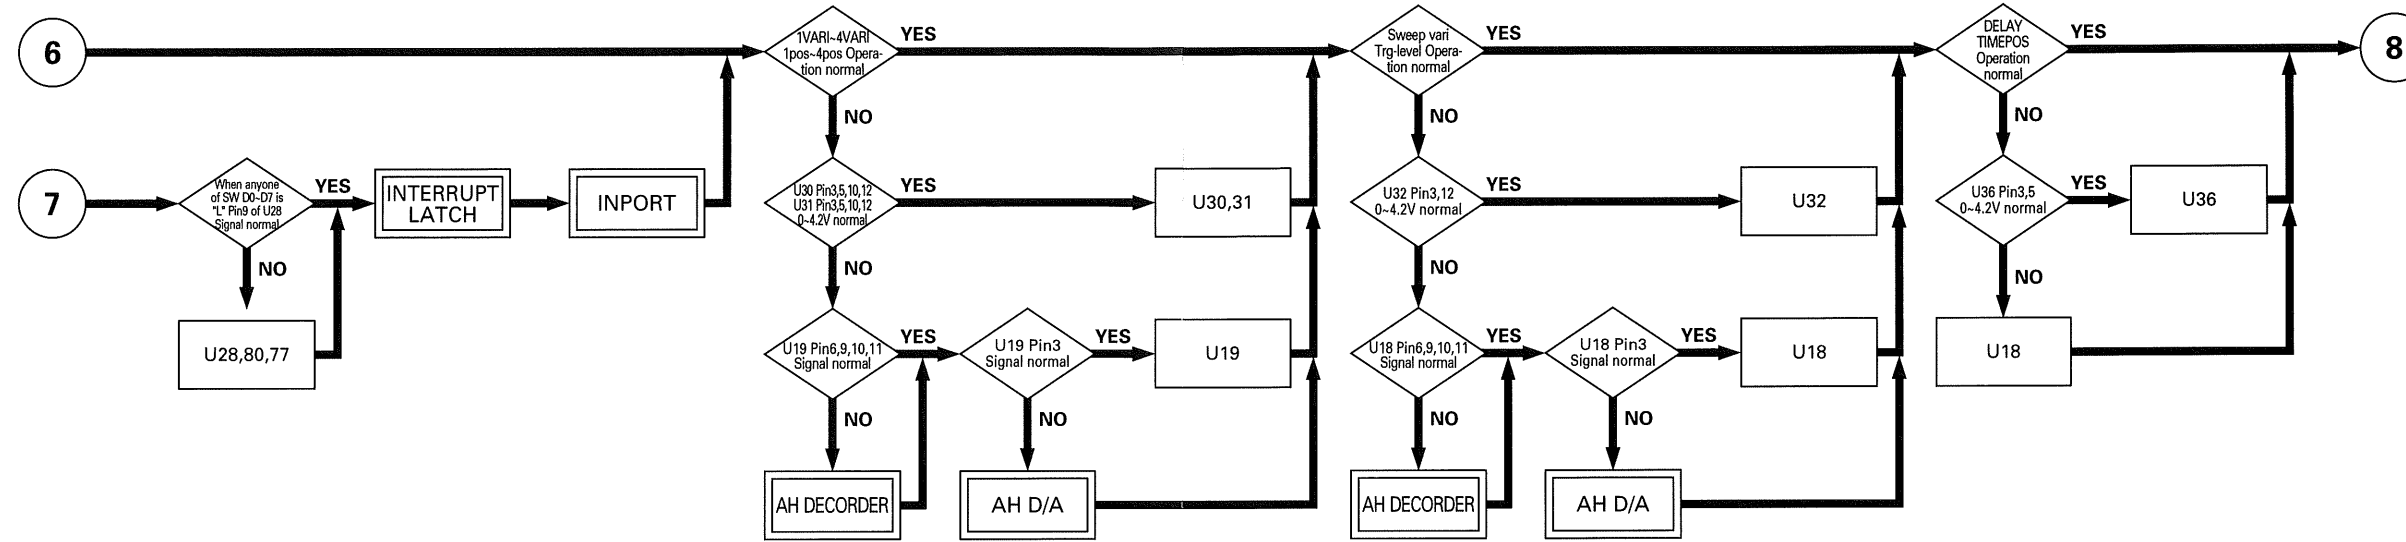

TROUBLESHOOTING

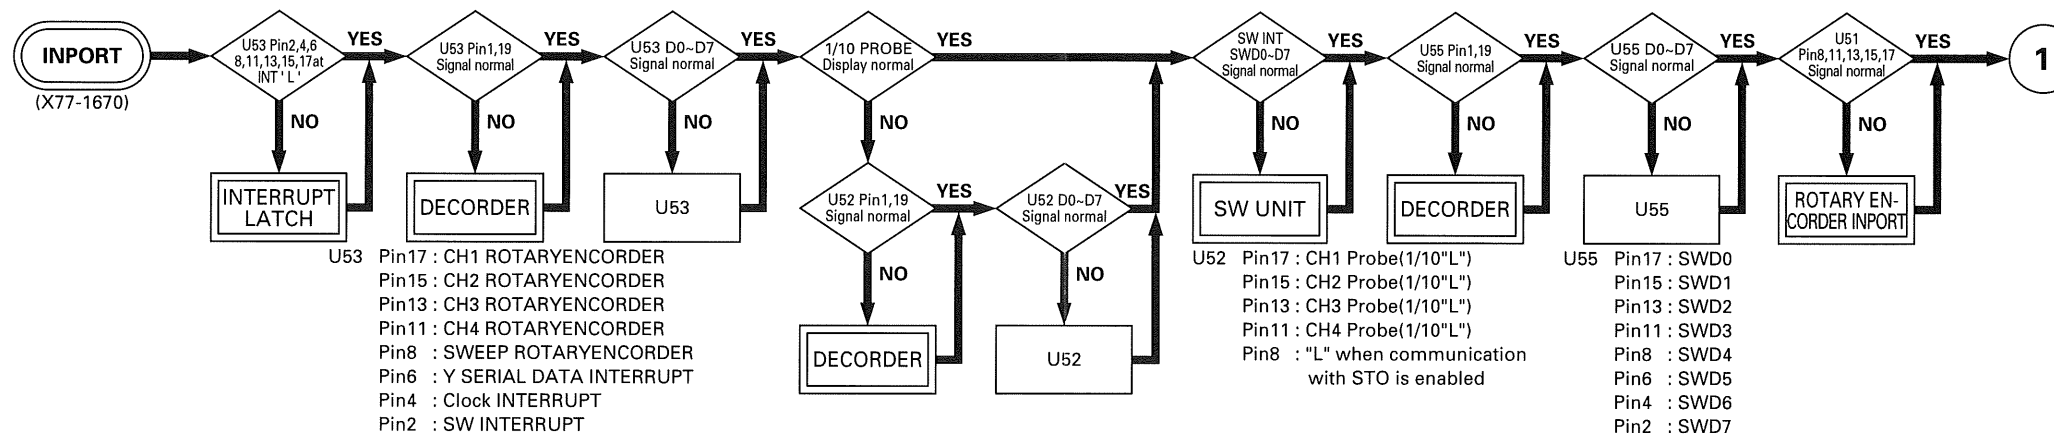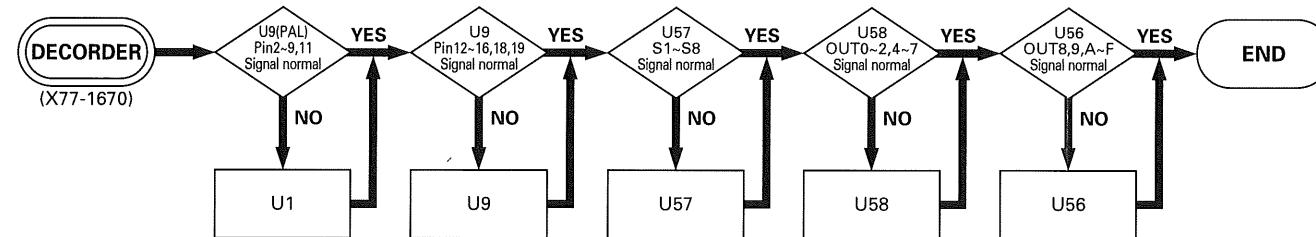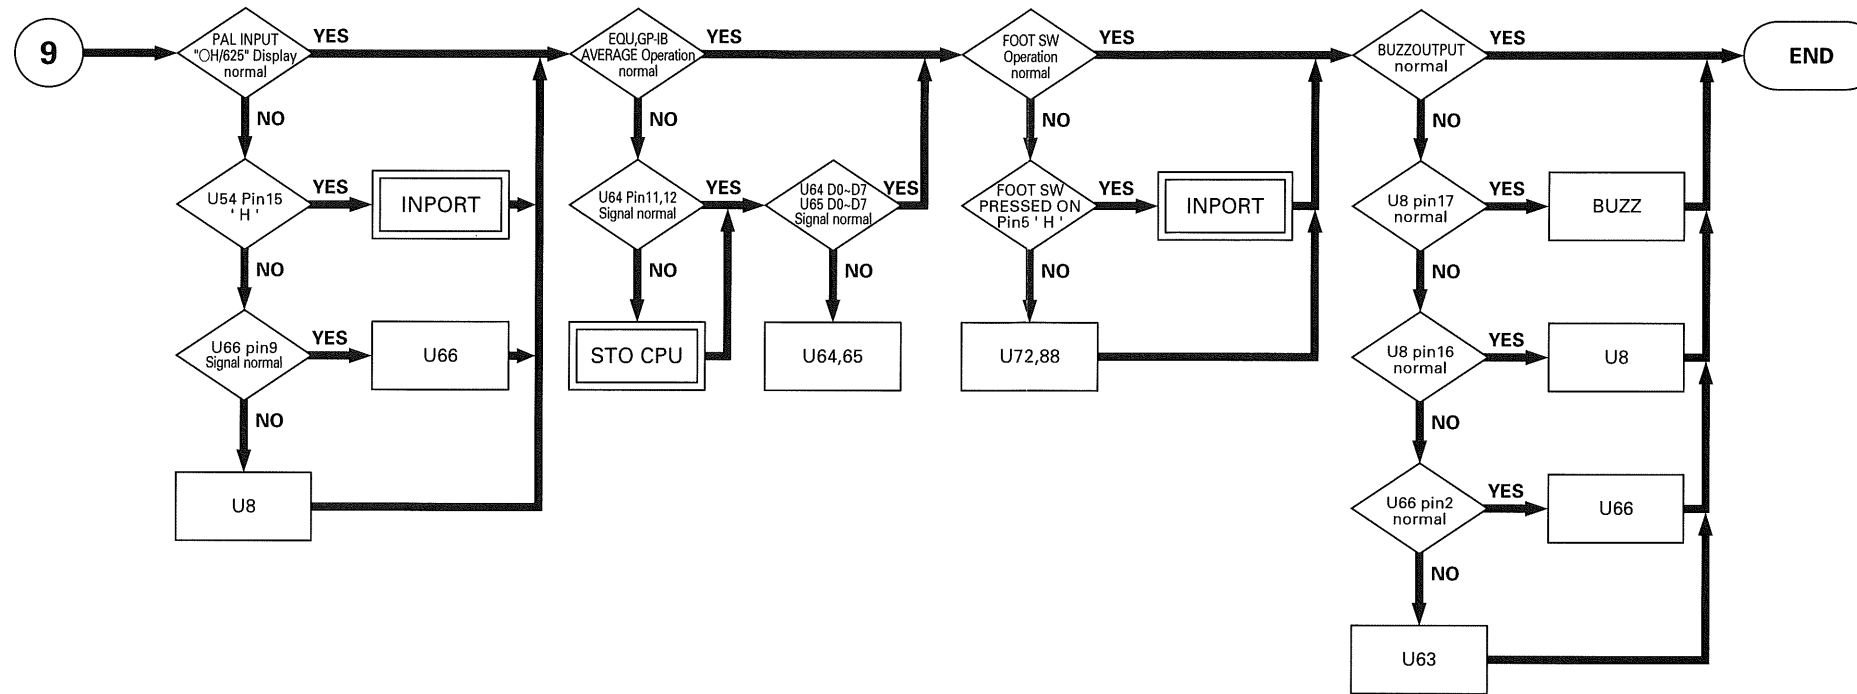

TROUBLESHOOTING





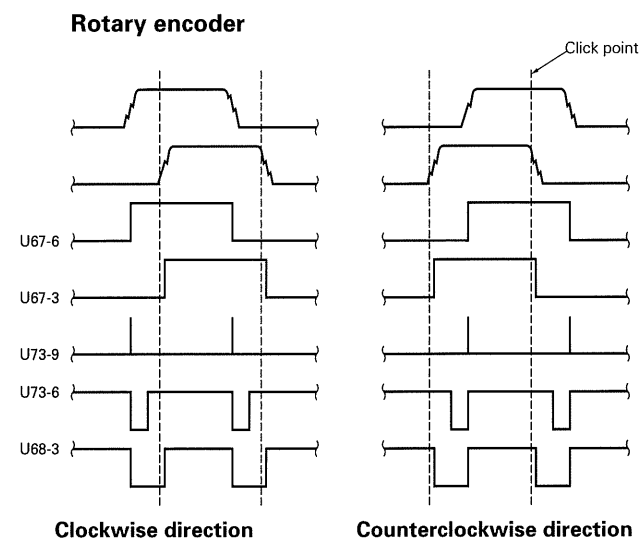


Fig.20

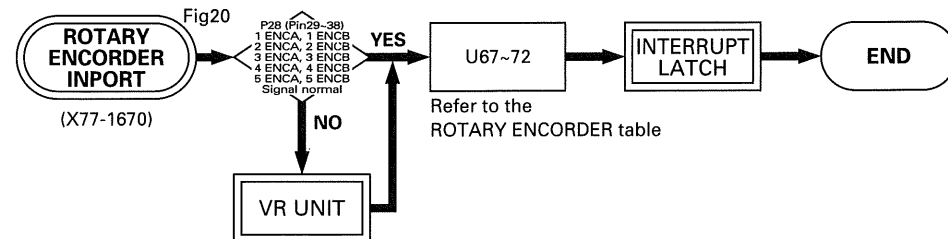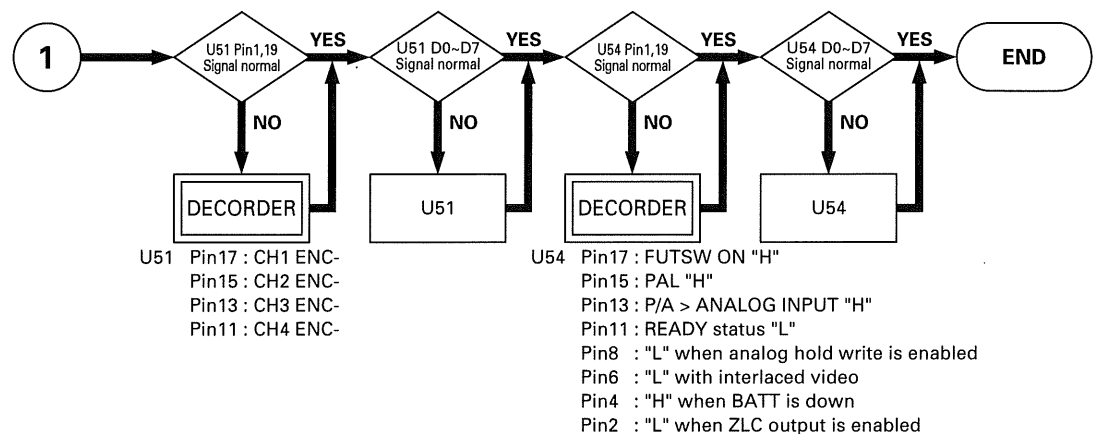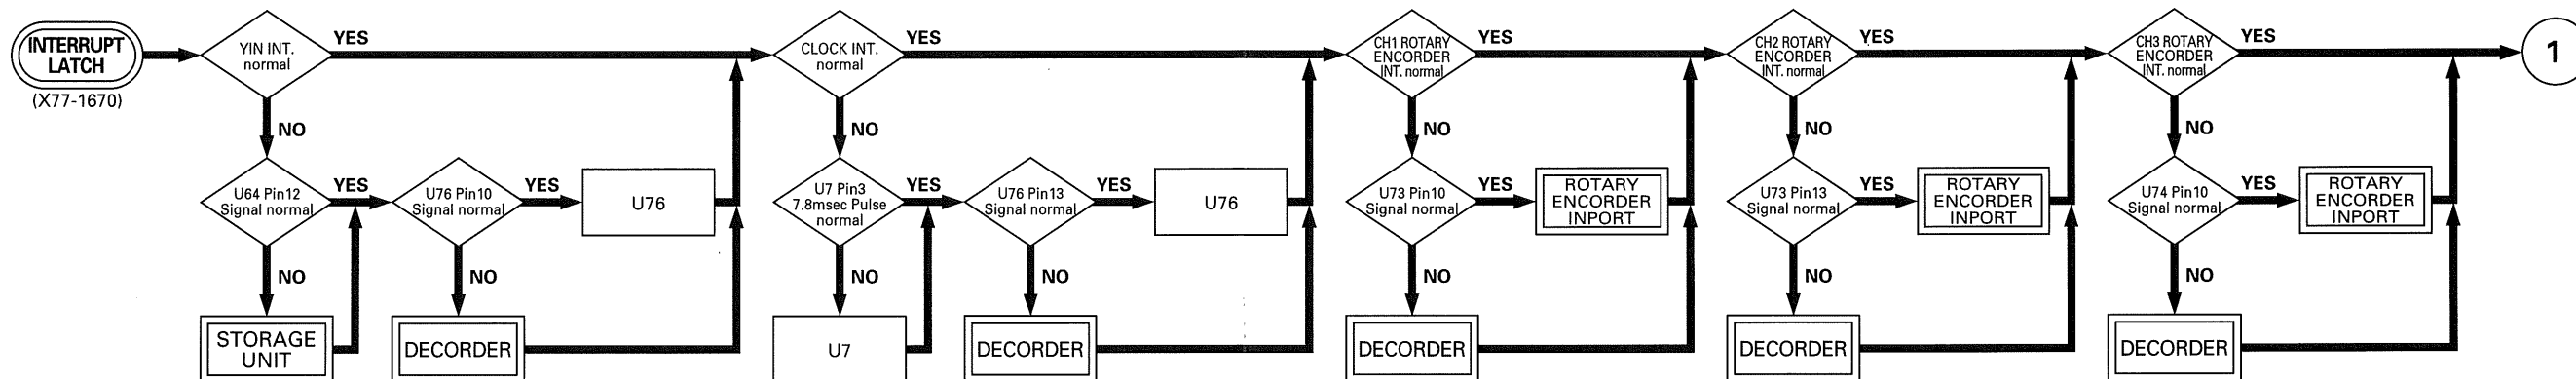

TROUBLESHOOTING

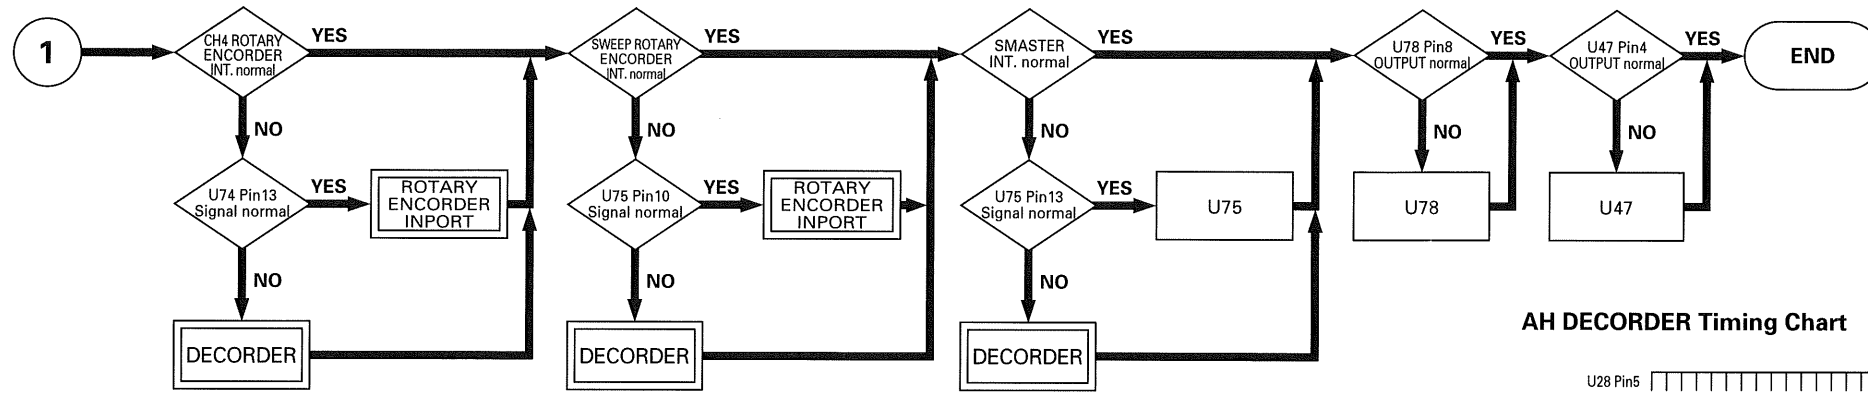

AH DECORDER Timing Chart




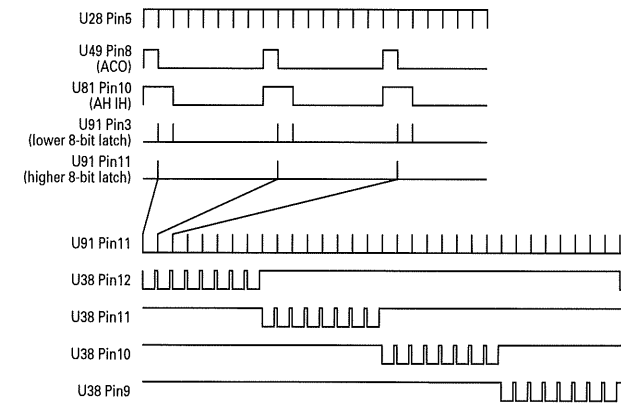


Fig.21

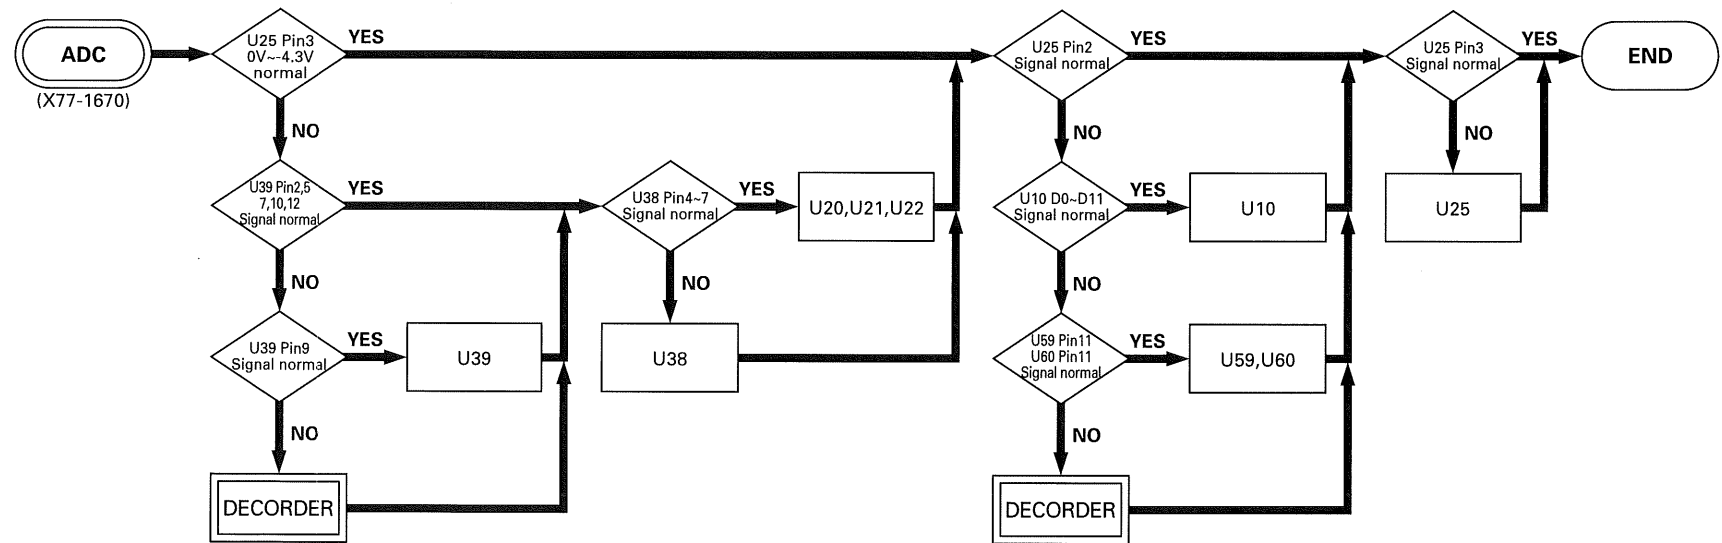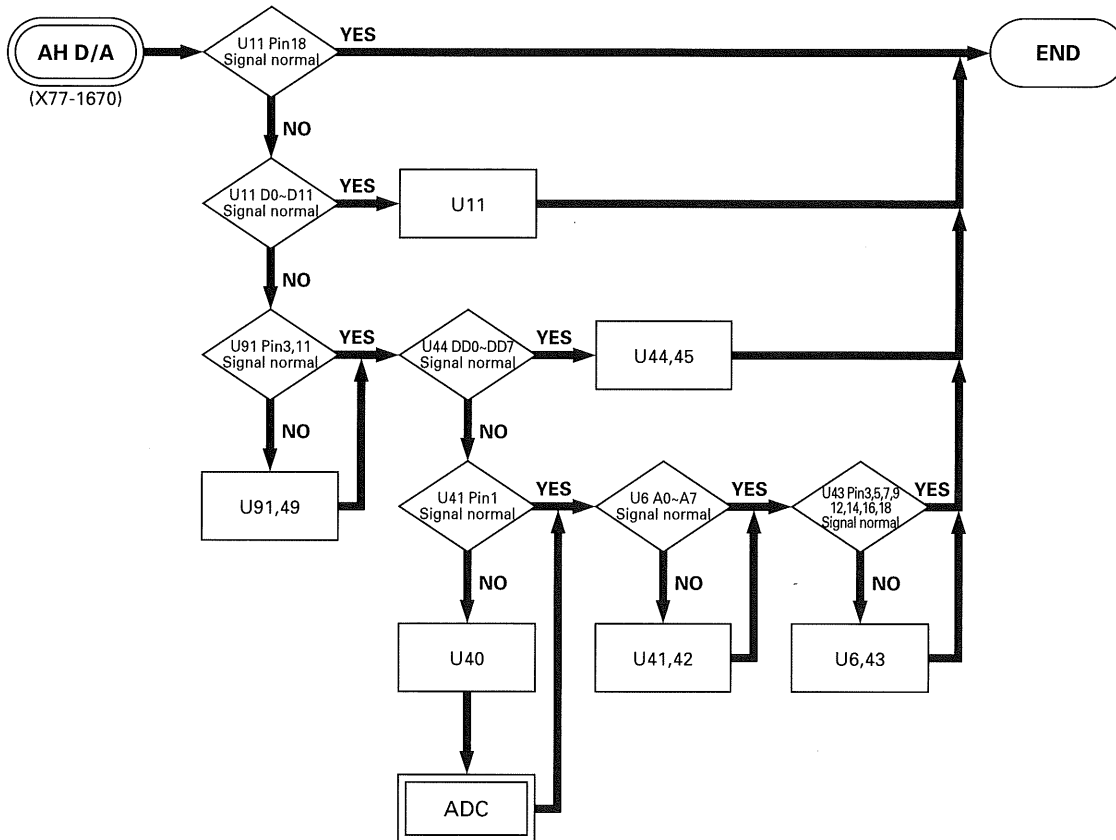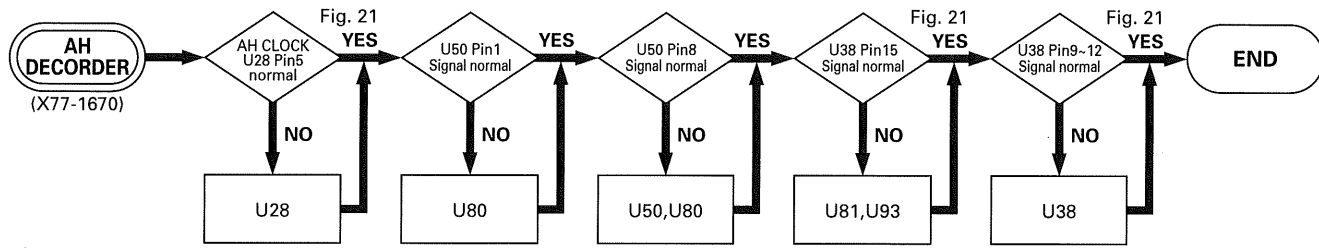

PARTS LIST

DCS-9300 UNIT

Y70-1710-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|---------------------------------|
| | B30-0925-05 | LAMP |
| | B41-0710-14 | CAUTION LABEL,HIGH VOLTAGE |
| | B41-2031-04 | SERIAL NO. PLATE |
| | B42-3819-05 | SERIAL NO. PLATE |
| | B42-3820-05 | LABEL;FOR CARTON BOX |
| | B63-0102-10 | INSTRUCTION MANUAL;JAPANESE |
| | B63-0103-10 | INSTRUCTION MANUAL;ENGLISH |
| | C91-2575-08 | CAPACITOR AC250V 0.22UF |
| | E30-1929-05 | BS POWER CORD |
| | E30-1950-05 | JIS POWER CORD |
| | E30-1951-05 | UL/CSA POWER CORD |
| | E30-1952-05 | CEE POWER CORD |
| | E30-1953-05 | SAA POWER CORD |
| | E38-0454-05 | WIRE ASS'Y:P6 |
| | E38-0455-05 | WIRE ASS'Y:P11 |
| | E38-0456-05 | WIRE ASS'Y:P12 |
| | E38-0457-05 | WIRE ASS'Y:P22 |
| | E38-0458-05 | WIRE ASS'Y:P23 |
| | E38-0459-05 | WIRE ASS'Y:P24 |
| | E38-0460-05 | WIRE ASS'Y:P25 |
| | E38-0461-15 | WIRE ASS'Y:P27 |
| | E38-0462-15 | WIRE ASS'Y:P28 |
| | E38-0463-05 | WIRE ASS'Y:P103 |
| | E38-0464-05 | WIRE ASS'Y:P56 TO P57 |
| | E38-0472-05 | WIRE ASS'Y:CAL |
| | E38-0670-05 | WIRE ASS'Y:A/D TO GND |
| | E38-0690-05 | WIRE ASS'Y:P1 TO P4 |
| | F05-5025-05 | FUSE(5X20MM) T5A/250V |
| | F20-0697-04 | INSULATOR |
| | F51-0020-05 | FUSE(6X32MM) T5A/250V |
| | H10-2901-02 | FOAMED STYRENE PAD,FRONT |
| | H10-2902-12 | FOAMED STYRENE PAD,REAR |
| | H20-1727-04 | VINYL COVER |
| | H53-0057-04 | CARTON BOX |
| | J19-1620-05 | CORD KEEP |
| | J31-0624-04 | COLLAR |
| | J61-0408-05 | WIRE WRAPPING BAND |
| | J61-0509-05 | WIRE WRAPPING BAND |
| | N15-1026-41 | WASHER H2.6 |
| | N19-0710-05 | WASHER,DIECAST |
| | W03-2301-15 | R/O PROBE,PC-31 |
| | A01-1252-02 | CASE, TOP |
| | A01-1253-02 | CASE, BOTTOM |
| | A10-1475-01 | CHASSIS |
| | A10-1484-08 | CHASSIS, FOR SWITCHING PS UNIT |
| | A11-0506-03 | CHASSIS, FOR UNIT |
| | A13-0928-13 | FRAME |
| | A13-0979-01 | FRAME, RIGHT |
| | A13-0980-01 | FRAME, LEFT |
| | A13-0981-01 | FRAME, CENTER |
| | A21-1193-13 | DECORATIVE PANEL |
| | A63-0056-01 | MOLDED PANEL |
| | A63-0066-08 | SUB PANEL |
| | A83-0027-01 | REAR PANEL |
| | B11-0504-14 | FILTER |
| | B30-0979-05 | LAMP ASS'Y;SCALE ILLUMINATION |
| | B73-0021-03 | NAME PLATE;MODEL NO. |
| | D19-0505-05 | FLEXIBLE WIRE, FOR POWER SWITCH |
| | E04-0259-05 | BNC RECEPTACLE |
| | E18-0351-05 | AC INLET |
| | E21-0660-04 | TERMINAL, CAL |
| | E23-0587-04 | EARTH |
| | F07-0936-04 | COVER, HANDLE LATCH |
| | F07-0963-05 | FAN GUARD |
| | F07-0985-08 | COVER;FOR SWITCHING PS UNIT |
| | F11-1210-03 | SHIELD,CRT;REAR |
| | F11-1251-22 | SHIELD,CRT |
| | F15-0733-04 | FELT (CRT SHIELD) |
| | F20-0700-08 | INSULATION SHEET;FOR SUB PANEL |
| | G02-0606-14 | SPRING, FOR HANDLE |
| | G13-0736-14 | RUBBER |
| | G13-0738-08 | BUFFER PLATE;FOR SUB-PANEL |
| | G13-0739-08 | RUBBER;FOR SUB PANEL |
| | J02-0089-05 | RUBBER FOOT |
| | J13-0522-05 | FUSE HOLDER BODY |
| | J13-0524-05 | FUSE HOLDER CAP(6.3X32MM) |
| | J13-0525-05 | FUSE HOLDER CAP(5X20MM) |
| | J19-1656-03 | HOLDER;CRT |
| | J19-1657-04 | WEDGE |
| | J21-2906-05 | GEAR, FOR HANDLE |
| | J21-2907-05 | RING, FOR HANDLE |
| | J21-4613-04 | BRACKET |
| | J21-4765-13 | BRACKET |
| | J21-4766-02 | BRACKET FOR P.C.B. |
| | J21-4767-04 | BRACKET |
| | J21-4787-03 | BRACKET |
| | J21-4788-04 | BRACKET FOR PANEL UNIT |
| | J29-0532-08 | HOLDER FOR INLET |
| | J32-0854-04 | BOSS |
| | J32-0857-04 | BOSS |
| | J32-0887-04 | BOSS, FOR POWER SWITCH |
| | J59-0403-05 | NYLON RIVET (ILLUMI) |
| | J61-0521-05 | SUPPORT |
| | J83-0001-08 | ELECTRODE SHEET;FOR SUB PANEL |
| | K01-0528-05 | HANDLE,CARRYING |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|--------------------------------|
| | K21-0919-04 | KNOB;5 USED |
| | K21-0920-04 | KNOB;7 USED |
| | K21-0921-04 | KNOB;2 USED |
| | K23-0814-04 | KNOB;11 USED |
| | K27-0504-04 | BUTTON;POWER |
| | K29-0818-08 | BUTTON;MENU NEXT,AUTO SET,ETC. |
| | K29-0819-08 | BUTTON;DATA SAVE,F4,F5,ETC. |
| | K29-0820-08 | BUTTON;SCOPE MODE,ETC. |
| | K29-0821-08 | BUTTON;NO PRINTED |
| | L39-0533-05 | COIL, TRACE ROTATION |
| | L76-0119-05 | DELAY LINE |
| | N14-0637-04 | PLATE NUT H3 |
| | S40-1524-05 | PUSH SWITCH,POWER |
| | S79-0606-08 | VOLTAGE SELECTOR SW |
| | T40-0424-08 | FAN WITH CONNECTOR |
| | W01-0503-04 | REAR RUBBER FOOT/CORD WRAP |
| | W02-2110-08 | PANEL UNIT |
| | W02-2178-08 | SWITCHING POWER SUPPLY UNIT |
| | X68-1590-00 | HIGH VOLTAGE UNIT |
| | X69-1210-00 | CONNECTION UNIT |
| | X69-1230-00 | CONNECTION UNIT |
| | X71-1150-00 | TIME BASE UNIT |
| | X73-1900-00 | VERTICAL UNIT |
| | X74-1530-00 | HORIZONTAL UNIT |
| | X77-1660-00 | STO CPU UNIT |
| | X77-1670-00 | R/O UNIT |
| | X78-1070-00 | A/D UNIT |
| | X79-1120-00 | GP-IB UNIT |
| | X80-1140-00 | FINAL UNIT |
| | X81-2900-00 | VR UNIT |
| | X81-3040-00 | ENCODER UNIT |
| | 150YTH31A | CRT |

DCS-9320 UNIT

Y70-1710-02


| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|---------------------------------|
| | B30-0925-05 | LAMP |
| | B41-0710-14 | CAUTION LABEL,HIGH VOLTAGE |
| | B41-2033-14 | SERIAL NO. PLATE |
| | B42-3819-05 | SERIAL NO. PLATE |
| | B42-3820-05 | LABEL;FOR CARTON BOX |
| | B63-0102-10 | INSTRUCTION MANUAL;JAPANESE |
| | B63-0103-10 | INSTRUCTION MANUAL;ENGLISH |
| | C91-2575-08 | CAPACITOR AC250V 0.22UF |
| | E30-1929-05 | BS POWER CORD |
| | E30-1950-05 | JIS POWER CORD |
| | E30-1951-05 | UL/CSA POWER CORD |
| | E30-1952-05 | CEE POWER CORD |
| | E30-1953-05 | SAA POWER CORD |
| | E38-0454-05 | WIRE ASS'Y:P6 |
| | E38-0455-05 | WIRE ASS'Y:P11 |
| | E38-0456-05 | WIRE ASS'Y:P12 |
| | E38-0457-05 | WIRE ASS'Y:P22 |
| | E38-0458-05 | WIRE ASS'Y:P23 |
| | E38-0459-05 | WIRE ASS'Y:P24 |
| | E38-0460-05 | WIRE ASS'Y:P25 |
| | E38-0461-05 | WIRE ASS'Y:P27 |
| | E38-0462-05 | WIRE ASS'Y:P28 |
| | E38-0463-05 | WIRE ASS'Y:P103 |
| | E38-0464-05 | WIRE ASS'Y:P56 TO P57 |
| | E38-0472-05 | WIRE ASS'Y:CAL |
| | E38-0672-05 | WIRE ASS'Y:A/D TO GND |
| | E38-0868-05 | WIRE ASS'Y:P1 TO P2 |
| | F05-5025-05 | FUSE(5X20MM) T5A/250V |
| | F20-0697-04 | INSULATOR |
| | F51-0020-05 | FUSE(6X32MM) T5A/250V |
| | H10-2901-02 | FOAMED STYRENE PAD,FRONT |
| | H10-2902-12 | FOAMED STYRENE PAD,REAR |
| | H20-1727-04 | VINYL COVER |
| | H53-0067-04 | CARTON BOX |
| | J31-0624-04 | COLLAR |
| | N15-1026-41 | WASHER H2.6 |
| | N19-0710-05 | WASHER,DIECAST |
| | W03-2301-15 | R/O PROBE,PC-31 |
| | A01-1252-02 | CASE, TOP |
| | A01-1253-02 | CASE, BOTTOM |
| | A10-1475-01 | CHASSIS |
| | A10-1484-08 | CHASSIS, FOR SWITCHING PS UNIT |
| | A11-0506-03 | CHASSIS, FOR UNIT |
| | A13-0928-13 | FRAME |
| | A13-0979-01 | FRAME, RIGHT |
| | A13-0980-01 | FRAME, LEFT |
| | A13-0981-01 | FRAME, CENTER |
| | A21-1193-13 | DECORATIVE PANEL |
| | A63-0056-01 | MOLDED PANEL |
| | A63-0066-08 | SUB PANEL |
| | A83-0027-01 | REAR PANEL |
| | B11-0504-14 | FILTER |
| | B30-0979-05 | LAMP ASS'Y;SCALE ILLUMINATION |
| | B73-0032-13 | NAME PLATE;MODEL NO. |
| | D19-0505-05 | FLEXIBLE WIRE, FOR POWER SWITCH |
| | E04-0259-05 | BNC RECEPTACLE |
| | E18-0351-05 | AC INLET |
| | E21-0660-04 | TERMINAL, CAL |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|--------------------------------|
| | E23-0587-04 | EARTH |
| | F07-0936-04 | COVER, HANDLE LATCH |
| | F07-0963-05 | FAN GUARD |
| | F07-0985-08 | COVER;FOR SWITCHING PS UNIT |
| | F11-1210-03 | SHIELD,CRT;REAR |
| | F11-1251-22 | SHIELD,CRT |
| | F15-0733-04 | FELT (CRT SHIELD) |
| | F20-0700-08 | INSULATION SHEET;FOR SUB PANEL |
| | G02-0606-14 | SPRING, FOR HANDLE |
| | G13-0736-14 | RUBBER |
| | G13-0738-08 | BUFFER PLATE;FOR SUB-PANEL |
| | G13-0739-08 | RUBBER;FOR SUB PANEL |
| | J02-0089-05 | RUBBER FOOT |
| | J13-0522-05 | FUSE HOLDER BODY |
| | J13-0524-05 | FUSE HOLDER CAP(6.3X32MM) |
| | J13-0525-05 | FUSE HOLDER CAP(5X20MM) |
| | J19-1656-03 | HOLDER;CRT |
| | J19-1657-04 | WEDGE |
| | J21-2906-05 | GEAR, FOR HANDLE |
| | J21-2907-05 | RING, FOR HANDLE |
| | J21-4613-04 | BRACKET |
| | J21-4765-13 | BRACKET |
| | J21-4766-02 | BRACKET FOR P.C.B. |
| | J21-4767-04 | BRACKET |
| | J21-4787-03 | BRACKET |
| | J21-4788-04 | BRACKET FOR PANEL UNIT |
| | J29-0532-08 | HOLDER FOR INLET |
| | J32-0854-04 | BOSS |
| | J32-0857-04 | BOSS |
| | J32-0887-04 | BOSS, FOR POWER SWITCH |
| | J59-0403-05 | NYLON RIVET (ILLUMI) |
| | J61-0521-05 | SUPPORT |
| | J83-0001-08 | ELECTRODE SHEET;FOR SUB PANEL |
| | K01-0528-05 | HANDLE,CARRYING |
| | K21-0919-04 | KNOB;5 USED |
| | K21-0920-04 | KNOB;7 USED |
| | K21-0921-04 | KNOB;2 USED |
| | K23-0814-04 | KNOB;11 USED |
| | K27-0504-04 | BUTTON;POWER |
| | K29-0818-08 | BUTTON;MENU NEXT,AUTO SET,ETC. |
| | K29-0819-08 | BUTTON;DATA SAVE,F4,F5,ETC. |
| | K29-0820-08 | BUTTON;SCOPE MODE,ETC. |
| | K29-0821-08 | BUTTON;NO PRINTED |
| | L39-0533-05 | COIL, TRACE ROTATION |
| | L76-0119-05 | DELAY LINE |
| | N14-0637-04 | PLATE NUT H3 |
| | S40-1524-05 | PUSH SWITCH,POWER |
| | S79-0606-08 | VOLTAGE SELECTOR SW |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|-----------------------------|
| | T40-0424-08 | FAN WITH CONNECTOR |
| | W01-0503-04 | REAR RUBBER FOOT/CORD WRAP |
| | W02-2110-08 | PANEL UNIT |
| | W02-2178-08 | SWITCHING POWER SUPPLY UNIT |
| | X68-1590-00 | HIGH VOLTAGE UNIT |
| | X69-1210-00 | CONNECTION UNIT |
| | X69-1230-00 | CONNECTION UNIT |
| | X71-1150-00 | TIME BASE UNIT |
| | X73-1900-00 | VERTICAL UNIT |
| | X74-1530-00 | HORIZONTAL UNIT |
| | X77-1660-02 | STO CPU UNIT |
| | X77-1670-02 | R/O UNIT |
| | X78-1070-00 | A/D UNIT |
| | X79-1120-00 | GP-IB UNIT |
| | X80-1140-00 | FINAL UNIT |
| | X81-2900-00 | VR UNIT |
| | X81-3040-00 | ENCODER UNIT |
| | 150YTH31A | CRT |

MODEL PC-31 (LOW CAPACITY PROBE)

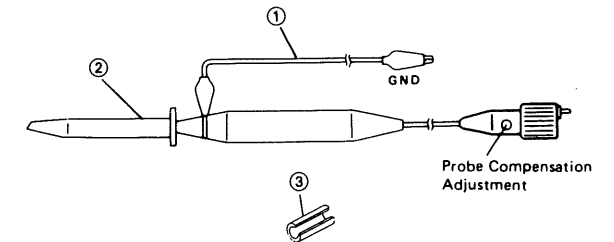


| ITEM | DESCRIPTION | PARTS NO. |
|------|----------------------|-------------|
| ① | Ground Wire Assembly | E30-1883-08 |
| ② | Retractable Hook Tip | E29-0540-08 |
| ③ | Marker (Orange) | B42-1950-08 |


SCREWS

| | Parts No. | Parts Name | Figure |
|---|-------------|-------------------------------------|--------|
| A | N08-0611-04 | SCREW (FOR CORD WRAP) | |
| B | N09-0623-04 | SCREW, SEMS PAN HD (M3 x 8) | |
| C | N09-0705-05 | SCREW, HEX SOCKET FLAT HD (M4 x 8) | |
| D | N09-0718-05 | SCREW, SEMS PAN HD (M3 x 6) | |
| E | N09-0731-05 | SCREW, SEMS PAN HD (M3 x 12) | |
| F | N09-0733-05 | SCREW, SEMS PAN HD (M3 x 20) | |
| G | N09-0739-05 | SCREW, SEMS BINDING TAPTITE (3 x 8) | |
| H | N09-0742-04 | SCREW, SEMS PAN HD (M3 x 8) | |
| J | N14-0404-04 | FLANGE NUT | |
| K | N32-3008-41 | SCREW, FLAT HD (M3 x 8) | |
| L | N88-3008-41 | SCREW, FLAT HD TAPTITE (3 x 8) | |
| M | N89-3006-41 | SCREW, BINDING TAPTITE (3 x 6) | |
| N | N89-3008-41 | SCREW, BINDING TAPTITE (3 x 8) | |


DISASSEMBLY

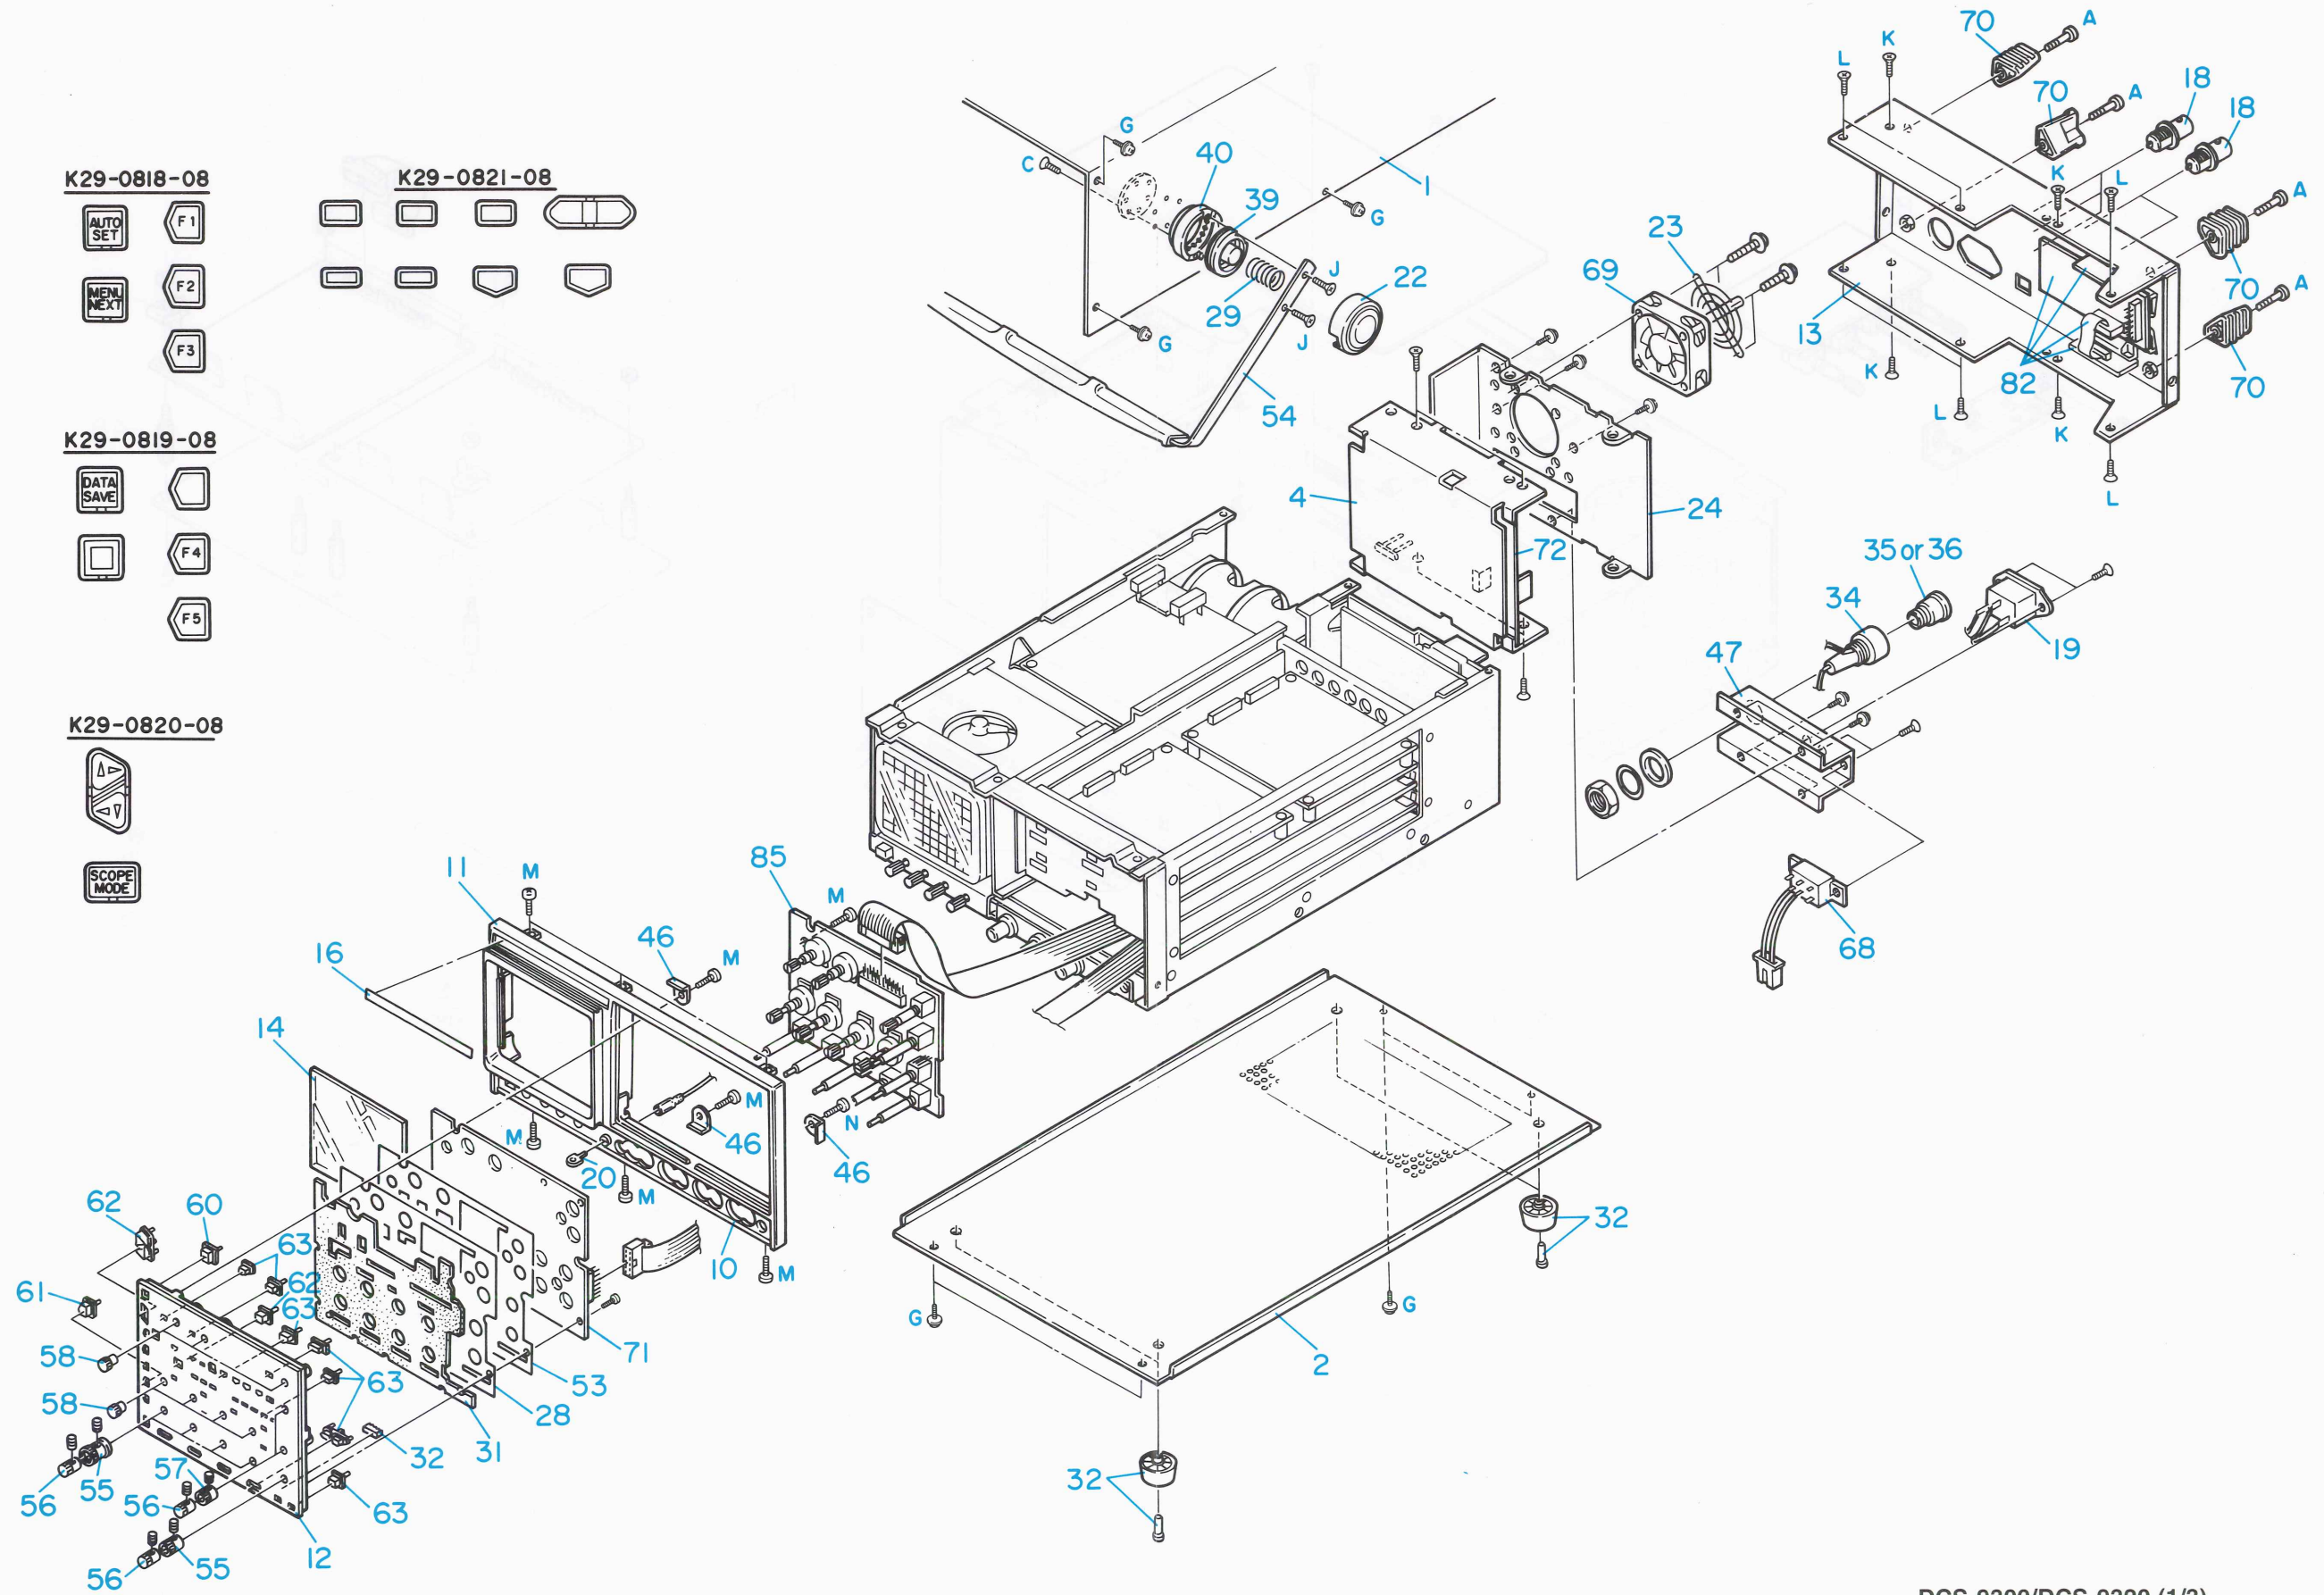

DISASSEMBLY

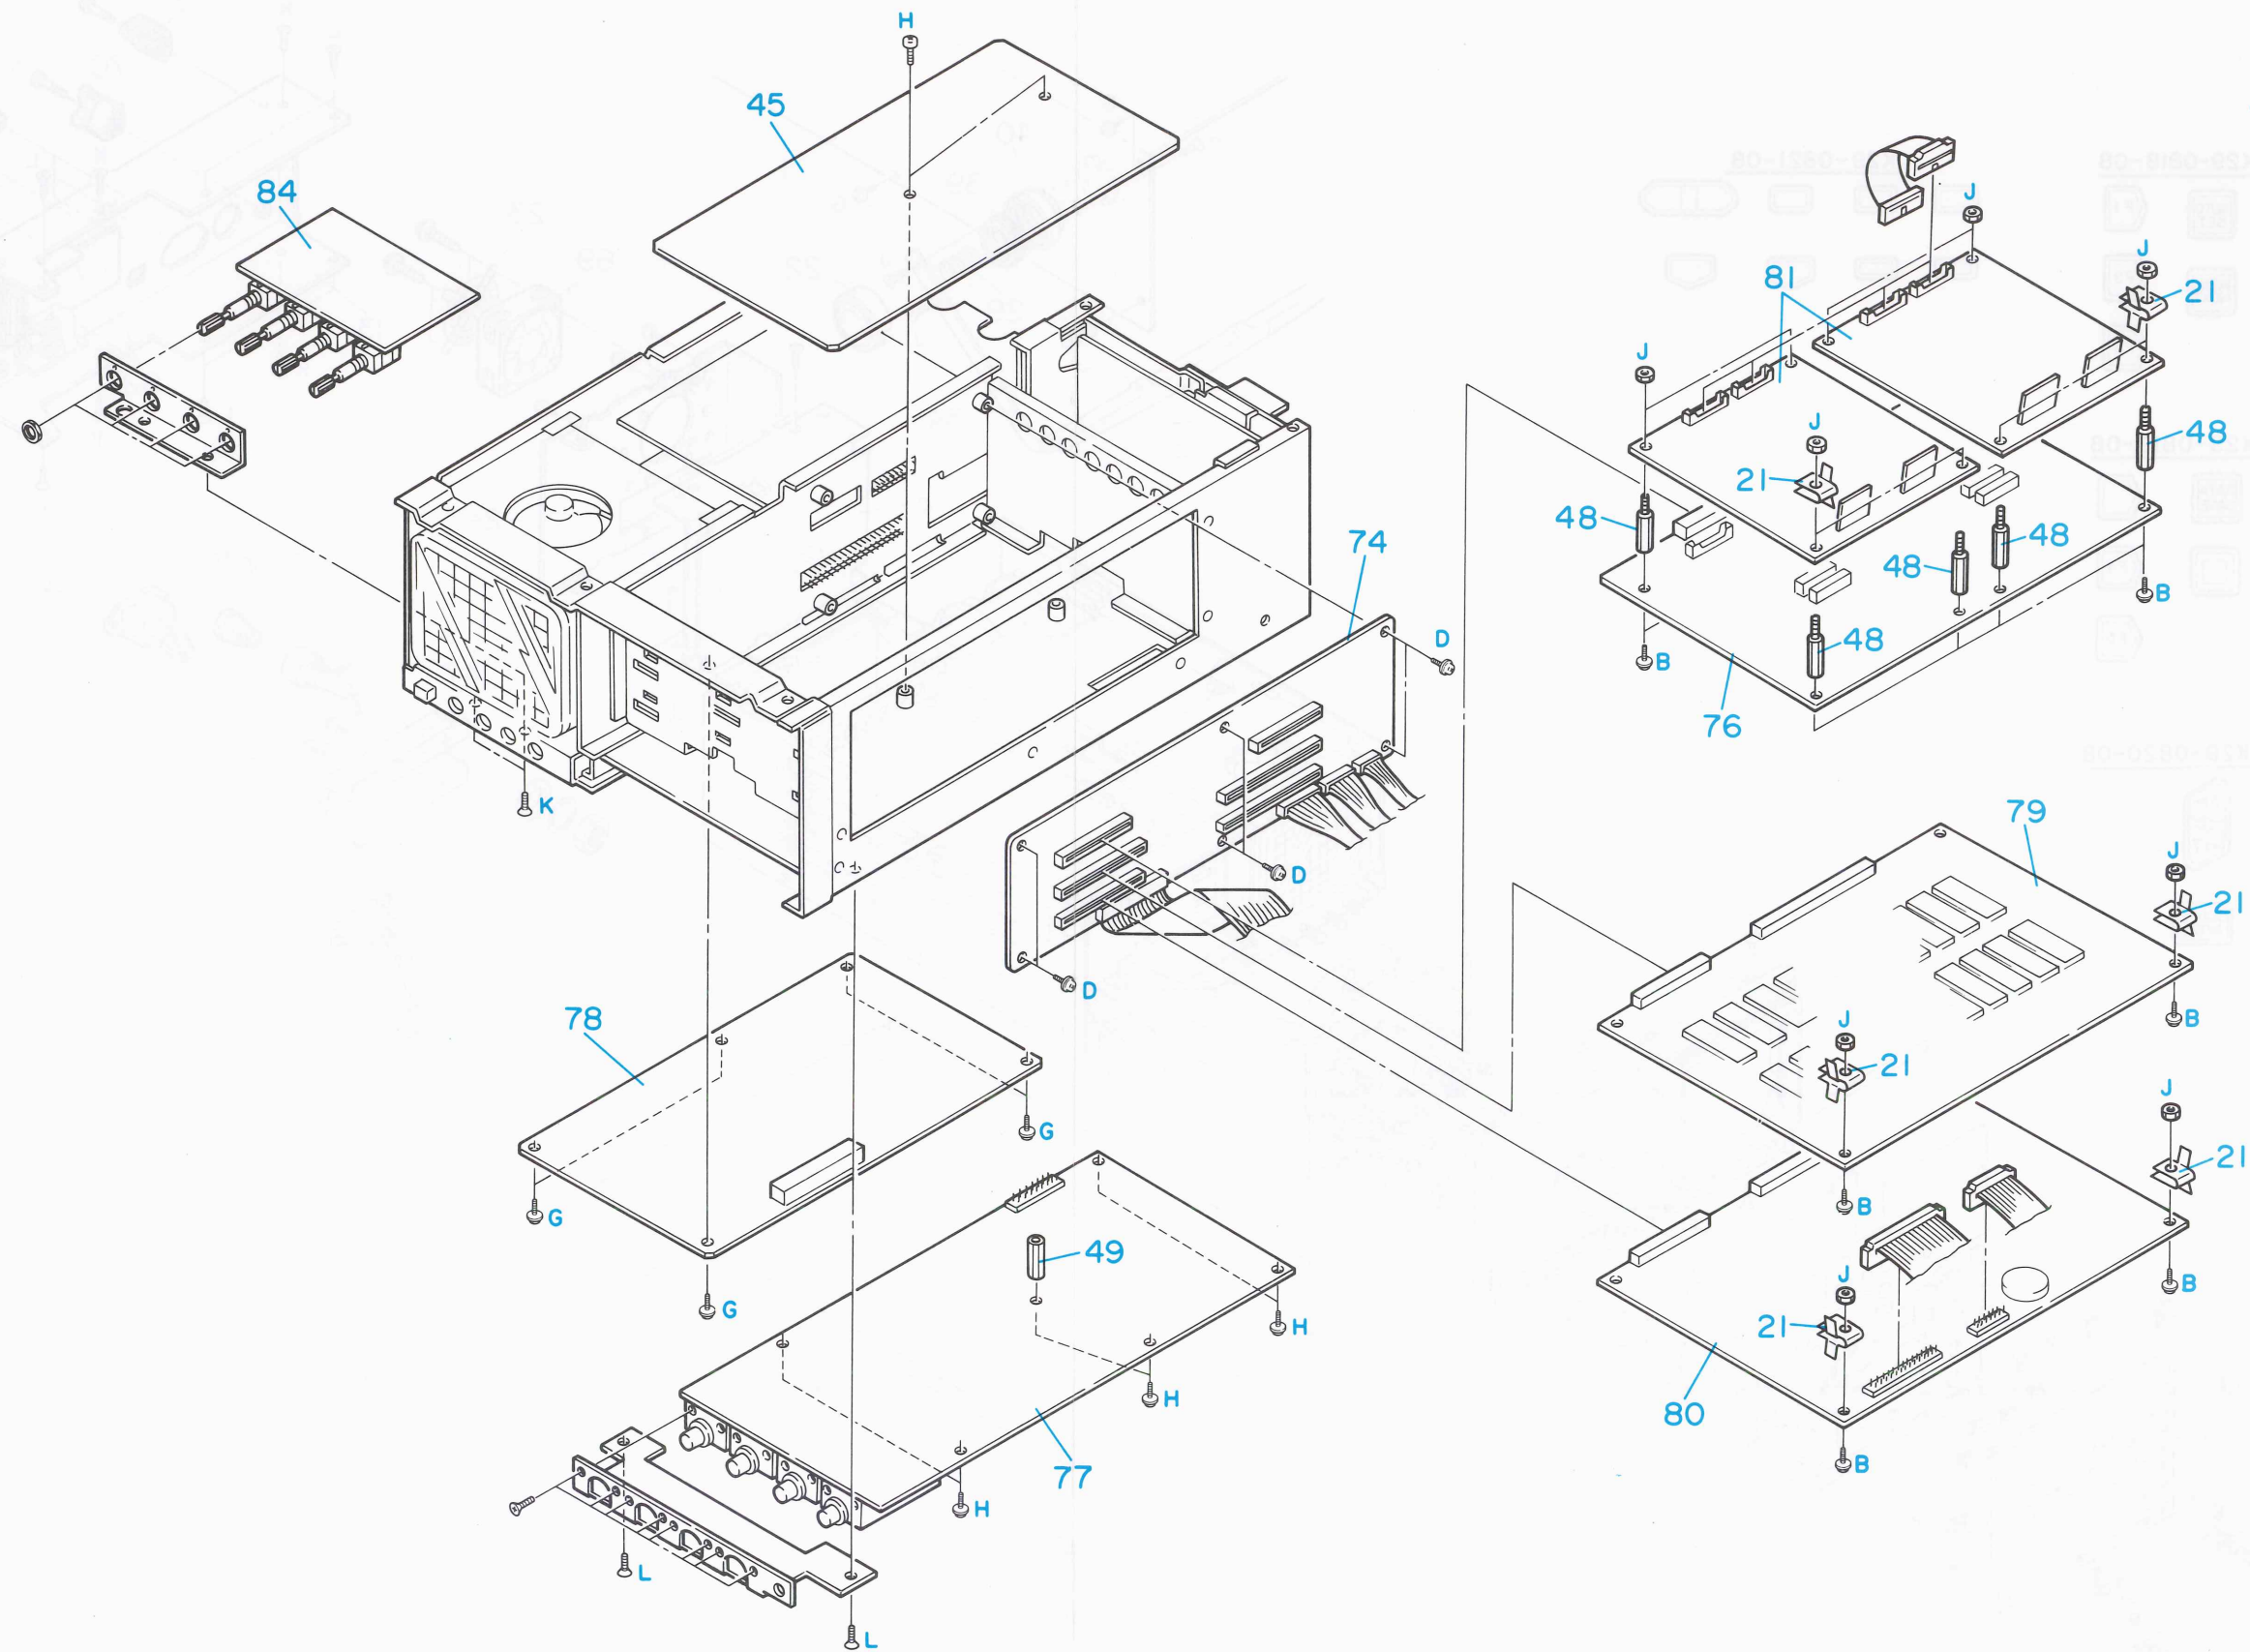

DISASSEMBLY

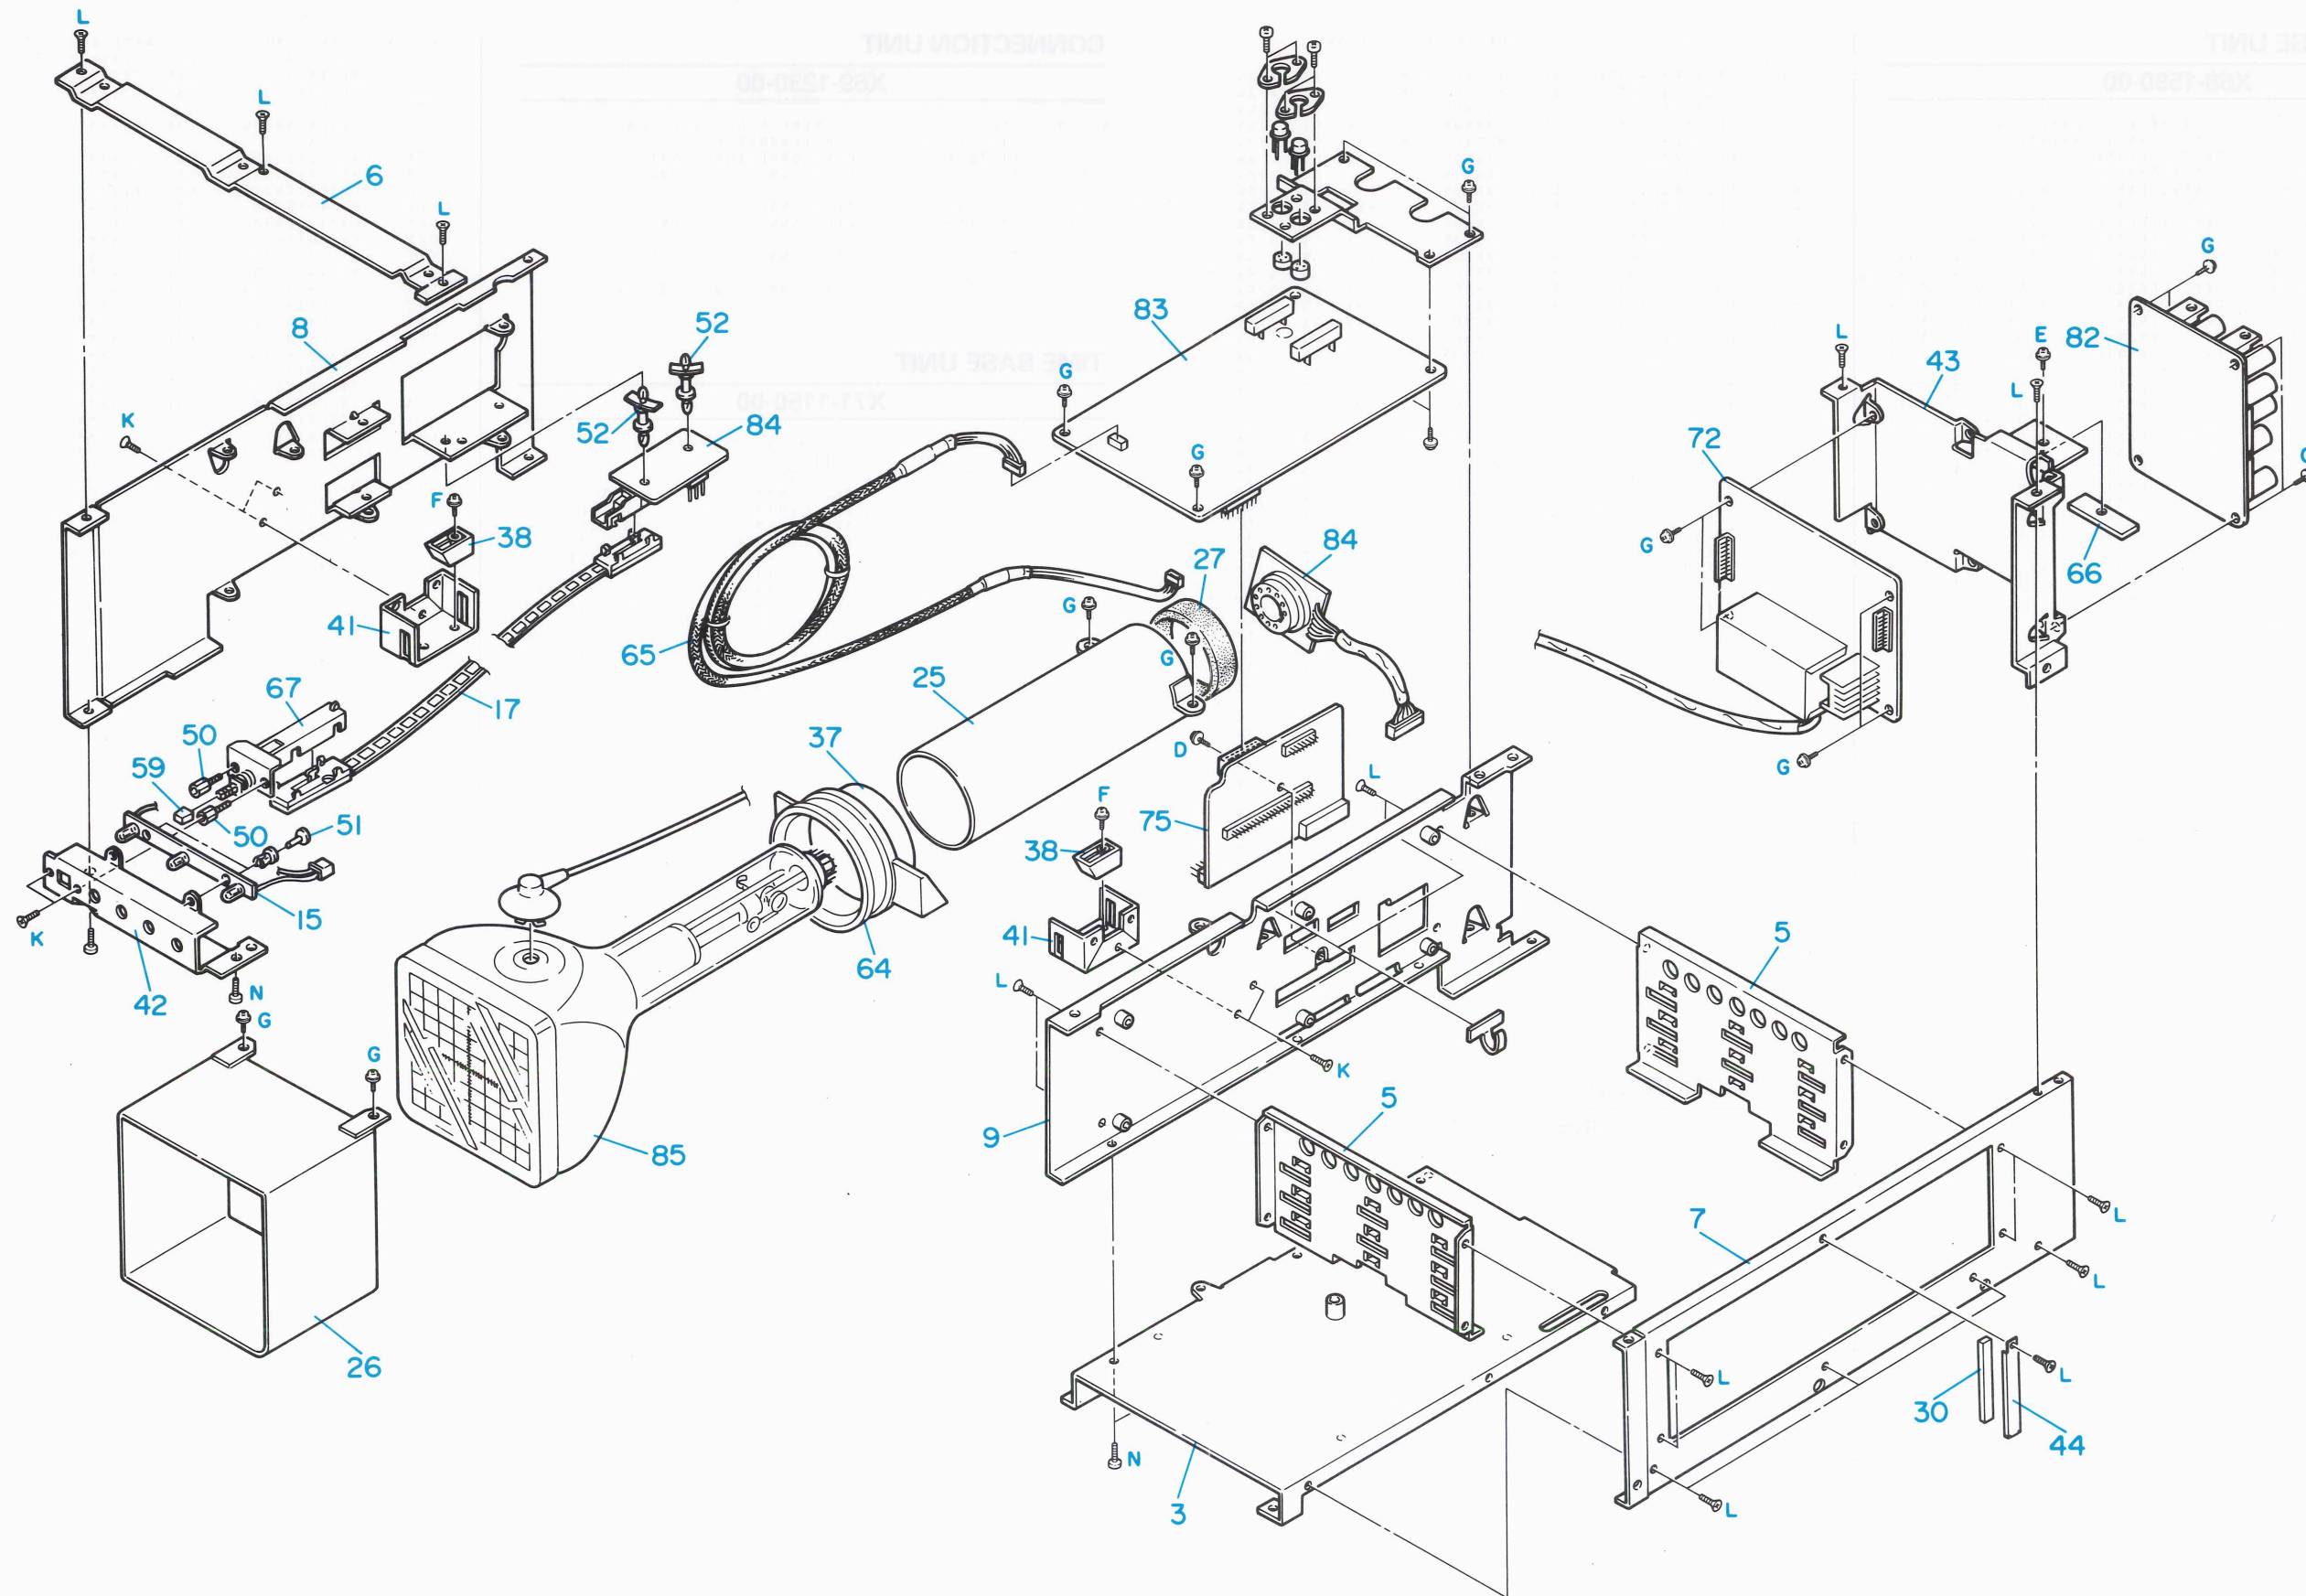

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION | REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|-----------------------------|---------|--------------|---------------------------------|
| R23 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W | R814 | RD14BB2C391J | RES. CARBON 390 5% 1/6W |
| R24 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W | R815 | RD14BB2C561J | RES. CARBON 560 5% 1/6W |
| R25 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W | TC2 | C05-0464-05 | CAP. TRINNER 2P |
| R26 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W | U1 | MC10H131L | IC, DUAL D-FILP FLOP |
| R27 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | U2 | MC10H016L | IC, BINARY COUNTER |
| R28 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | U3 | MC10H104L | IC, GATE FUNCTIONS |
| R29 | R90-1127-05 | RES. NETWORK 390 | U4 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R30 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W | U5 | SN74LS390N | IC, DUAL DECADE COUNTERS |
| R31 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W | U6 | SN74LS393N | IC, 4-STATE BINARY COUNTER |
| R32 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | U7 | SN74LS153N | IC, DUAL 4-1 DATA SELECTOR/MPX |
| R33 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | U8 | SPGR650-0 | IC, PROGRAMMABLE DEMULTIPLIER |
| R34 | RD14BB2C682J | RES. CARBON 6.8K 5% 1/6W | U9 | SN74AS151N | IC, 8-CHANNEL MULTIPLEXER |
| R35 | RD14BB2C242J | RES. CARBON 2.4K 5% 1/6W | U10 | MC10H124L | IC, QUAD TTL-TO-NECL TRANSIATOR |
| R36 | RN14BK2C3001F | RES. METAL FILM 3K 1% 1/6W | U11 | MC10H174L | IC, DUAL 4-TO-1 MULTIPLEXER |
| R37 | RN14BK2C1202F | RES. METAL FILM 12K 1% 1/6W | U12 | MC10H141L | IC, 4-BIT SHIFT REGISTER |
| R43 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U13 | MC10H125L | IC, QUAD NECL-TO-TLL TRANSIATOR |
| R44 | RD14BB2C131J | RES. CARBON 130 5% 1/6W | U14 | MC10H131L | IC, DUAL D-FILP FLOP |
| R45 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | U15 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R46 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | U16 | MC10H105L | IC, GATE FUNCTION |
| R47 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U17 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R48 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U18 | SN74AS161N | IC, SYNCHRONOUS DECADE COUNTERS |
| R49 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U19 | SN74AS161N | IC, SYNCHRONOUS DECADE COUNTERS |
| R50 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U20 | SN74AS161N | IC, SYNCHRONOUS DECADE COUNTERS |
| R51 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U21 | SN74LS541N | IC, OCTAL BUS BUFFER(3-STATE) |
| R52 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U22 | SN74LS541N | IC, OCTAL BUS BUFFER(3-STATE) |
| R53 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U23 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R54 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U24 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R55 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U25 | 74F193PC | IC, UP/DOWN BINARY COUNTER |
| R56 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U26 | 74F193PC | IC, UP/DOWN BINARY COUNTER |
| R57 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U27 | 74F193PC | IC, UP/DOWN BINARY COUNTER |
| R58 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U28 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R59 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U29 | 74F191PC | IC, UP/DOWN BINARY COUNTER |
| R60 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U30 | 74F191PC | IC, UP/DOWN BINARY COUNTER |
| R61 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U31 | 74F191PC | IC, UP/DOWN BINARY COUNTER |
| R62 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U32 | 74F191PC | IC, UP/DOWN BINARY COUNTER |
| R63 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U33 | 74F191PC | IC, UP/DOWN BINARY COUNTER |
| R64 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U34 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R65 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U35 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R66 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U36 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| R67 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U37 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| R68 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U38 | SN74LS96N | IC, 5-BIT SHIFT REGISTERS |
| R69 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U39 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| R70 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U40 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R71 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U41 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R72 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U42 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R73 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U43 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R74 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U44 | SN74AS08N | IC, QUAD 2-INPUT AND GATE |
| R75 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | U45 | SN74LS08N | IC, QUAD 2-INPUT AND GATE |
| R76 | NO USE | | U46 | SN74AS00N | IC, QUAD 2-INPUT NAND GATE |
| R77 | RD14BB2C361J | RES. CARBON 360 5% 1/6W | U47 | SN74LS04N | IC, HEX INVERTER |
| R78 | RD14BB2C242J | RES. CARBON 2.4K 5% 1/6W | U48 | MC10H105L | IC, GATE FUNCTION |
| R79 | RD14BB2C331J | RES. CARBON 330 5% 1/6W | U49 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| R80 | RD14BB2C431J | RES. CARBON 430 5% 1/6W | U50 | SN74AS32N | IC, QUAD 2-INPUT OR GATE |
| R81 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | U51 | SN74AS08N | IC, QUAD 2-INPUT AND GATE |
| R82 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | U52 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R83 | RD14BB2C301J | RES. CARBON 300 5% 1/6W | U53 | NJH4558D | IC, DUAL OP AMP |
| R84 | RD14BB2C301J | RES. CARBON 300 5% 1/6W | U56 | MC10H125L | IC, QUAD NECL-TO-TLL TRANSIATOR |
| R85 | RD14BB2C301J | RES. CARBON 300 5% 1/6W | U57 | TC74HC123AP | IC, DUAL MONOSTABLE MULTIVIB. |
| R86 | RD14BB2C301J | RES. CARBON 300 5% 1/6W | U58 | SN74AS32N | IC, QUAD 2-INPUT OR GATE |
| R87 | RD14BB2C511J | RES. CARBON 510 5% 1/6W | U59 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R88 | RD14BB2C511J | RES. CARBON 510 5% 1/6W | U60 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| R89 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | U61 | SN74AS00N | IC, QUAD 2-INPUT NAND GATE |
| R90 | NO USE | | X1 | L77-1072-15 | CRYSTAL RESONATOR (10MHZ) |
| R91 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | | | |
| R94 | RD14BB2C431J | RES. CARBON 430 5% 1/6W | | | |
| R97 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | | | |
| R98 | RD14BB2C431J | RES. CARBON 430 5% 1/6W | | | |
| R99 | RD14BB2C431J | RES. CARBON 430 5% 1/6W | | | |
| R100 | RD14BB2C751J | RES. CARBON 750 5% 1/6W | | | |
| R101 | RD14BB2C271J | RES. CARBON 270 5% 1/6W | | | |
| R102 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | | | |
| R103 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | | | |
| R104 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | | | |
| R105 | RD14BB2C360J | RES. CARBON 36 5% 1/6W | | | |
| R106 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | | | |
| R107 | RD14BB2C431J | RES. CARBON 430 5% 1/6W | | | |
| R108 | RD14BB2C751J | RES. CARBON 750 5% 1/6W | | | |
| R109 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | | | |
| R110 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | | | |
| R111 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | | | |
| R112 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | | | |
| R113 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | | | |
| R114 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | | | |
| R115 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | | | |
| R116 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | | | |
| R117 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | | | |
| R118 | R90-1145-05 | RES. NETWORK 10X4 | | | |
| R119 | R90-1145-05 | RES. NETWORK 10X4 | | | |
| R120 | R90-1145-05 | RES. NETWORK 10X4 | | | |
| R125 | R90-0653-05 | RES. NETWORK 8X10K | | | |
| R126 | R90-0653-05 | RES. NETWORK 8X10K | | | |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|--------------------------------|
| K201 | S76-0613-05 | RELAY |
| K202 | S76-0613-05 | RELAY |
| K203 | S76-0612-05 | RELAY |
| K301 | S76-0613-05 | RELAY |
| K302 | S76-0613-05 | RELAY |
| K303 | S76-0612-05 | RELAY |
| K401 | S76-0613-05 | RELAY |
| K402 | S76-0613-05 | RELAY |
| K403 | S76-0612-05 | RELAY |
| L1 | L79-0551-05 | FILTER |
| L2 | L79-0551-05 | FILTER |
| L3 | L79-0551-05 | FILTER |
| L4 | L79-0553-05 | FILTER |
| L5 | L79-0553-05 | FILTER |
| L6 | L79-0553-05 | FILTER |
| L7 | L79-0553-05 | FILTER |
| L8 | L79-0553-05 | FILTER |
| L9 | L79-0553-05 | FILTER |
| L10 | L79-0553-05 | FILTER |
| L11 | L79-0553-05 | FILTER |
| L12 | L79-0553-05 | FILTER |
| L101 | L40-6882-70 | FERRI INDUCTOR 0.68UH 20% |
| L201 | L40-6882-70 | FERRI INDUCTOR 0.68UH 20% |
| L301 | L40-6882-70 | FERRI INDUCTOR 0.68UH 20% |
| L401 | L40-6882-70 | FERRI INDUCTOR 0.68UH 20% |
| P1 | E40-3237-05 | PIN CONNECTOR 2P |
| P2 | E40-3237-05 | PIN CONNECTOR 2P |
| P3 | E40-3237-05 | PIN CONNECTOR 2P |
| P4 | E40-3237-05 | PIN CONNECTOR 2P |
| P5 | E40-3238-05 | PIN CONNECTOR 3P |
| P6 | E40-3237-05 | PIN CONNECTOR 2P |
| P7 | E40-7230-05 | PIN CONNECTOR 34P |
| Q101 | 2SC4049 | TR. SI, NPN |
| Q102 | 2SC4049 | TR. SI, NPN |
| Q201 | 2SC4049 | TR. SI, NPN |
| Q202 | 2SC4049 | TR. SI, NPN |
| Q301 | 2SC4049 | TR. SI, NPN |
| Q302 | 2SC4049 | TR. SI, NPN |
| Q401 | 2SC4049 | TR. SI, NPN |
| Q402 | 2SC4049 | TR. SI, NPN |
| Q501 | 2SC3779(D) | TR. SI, NPN |
| Q502 | 2SC3779(D) | TR. SI, NPN |
| Q503 | 2SA1175(F) | TR. SI, PNP |
| Q504 | 2SA1005(K) | TR. SI, PNP |
| Q505 | 2SA1005(K) | TR. SI, PNP |
| Q506 | 2SC3779(D) | TR. SI, NPN |
| Q507 | 2SC3779(D) | TR. SI, NPN |
| Q508 | 2SA1206(K) | TR. SI, PNP |
| Q509 | 2SA1206(K) | TR. SI, PNP |
| Q510 | 2SA1459 | TR. SI, PNP |
| Q511 | 2SA1459 | TR. SI, PNP |
| Q512 | 2SA1459 | TR. SI, PNP |
| Q513 | 2SA1459 | TR. SI, PNP |
| Q514 | 2SA1459 | TR. SI, PNP |
| Q515 | 2SA1459 | TR. SI, PNP |
| Q601 | 2SK583-KEN | FET, N-CHANNEL |
| Q602 | 2SK583-KEN | FET, N-CHANNEL |
| R101 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R102 | RD14BB2C511J | RES. CARBON 510 5% 1/6W |
| R103 | RN14BK2C1004F | RES. METAL FILM 1M 1% 1/6W |
| R104 | RN14BK2C1500D | RES. METAL FILM 150 0.5% 1/6W |
| R105 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W |
| R106 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W |
| R107 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R108 | RD14BB2C390J | RES. CARBON 39 5% 1/6W |
| R109 | RD14BB2C620J | RES. CARBON 62 5% 1/6W |
| R110 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R111 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R112 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R113 | RD14BB2C161J | RES. CARBON 160 5% 1/6W |
| R114 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R115 | RD14BB2C474J | RES. CARBON 470K 5% 1/6W |
| R116 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R117 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R118 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R119 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R120 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W |
| R121 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R122 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W |
| R123 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R124 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|--------------------------------|
| R125 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W |
| R126 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R127 | RD14BB2C303J | RES. CARBON 30K 5% 1/6W |
| R128 | RD14BB2C203J | RES. CARBON 20K 5% 1/6W |
| R129 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R130 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R131 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W |
| R132 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R133 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R134 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R135 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R136 | RN14BK2C1004F | RES. METAL FILM 1M 1% 1/6W |
| R137 | RD14BB2C390J | RES. CARBON 39 5% 1/6W |
| R138 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W |
| R139 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R140 | RN14BK2C1501F | RES. METAL FILM 1.5K 1% 1/6W |
| R141 | RN14BK2C4701F | RES. METAL FILM 4.7K 1% 1/6W |
| R142 | RD14BB2C243J | RES. CARBON 24K 5% 1/6W |
| R143 | RD14BB2C393J | RES. CARBON 39K 5% 1/6W |
| R144 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R145 | RD14BB2C161J | RES. CARBON 160 5% 1/6W |
| R146 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R147 | RD14BB2C100J | RES. CARBON 10 5% 1/6W |
| R148 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R149 | RD14BB2C163J | RES. CARBON 16K 5% 1/6W |
| R197 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R198 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R199 | RD14BB2C2R2J | RES. CARBON 2.2 5% 1/6W |
| R200 | NO USE | |
| R201 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R202 | RD14BB2C511J | RES. CARBON 510 5% 1/6W |
| R203 | RN14BK2C1004F | RES. METAL FILM 1M 1% 1/6W |
| R204 | RN14BK2C1500D | RES. METAL FILM 150 0.5% 1/6W |
| R205 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W |
| R206 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W |
| R207 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R208 | RD14BB2C390J | RES. CARBON 39 5% 1/6W |
| R209 | RD14BB2C620J | RES. CARBON 62 5% 1/6W |
| R210 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R211 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R212 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R213 | RD14BB2C161J | RES. CARBON 160 5% 1/6W |
| R214 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R215 | RD14BB2C474J | RES. CARBON 470K 5% 1/6W |
| R216 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R217 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R218 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R219 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R220 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W |
| R221 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R222 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W |
| R223 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R224 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W |
| R225 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W |
| R226 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R227 | RD14BB2C303J | RES. CARBON 30K 5% 1/6W |
| R228 | RD14BB2C203J | RES. CARBON 20K 5% 1/6W |
| R229 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R230 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R231 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W |
| R232 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R233 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R234 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R235 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R236 | RN14BK2C1004F | RES. METAL FILM 1M 1% 1/6W |
| R237 | RD14BB2C390J | RES. CARBON 39 5% 1/6W |
| R238 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W |
| R239 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R240 | RN14BK2C1501F | RES. METAL FILM 1.5K 1% 1/6W |
| R241 | RN14BK2C4701F | RES. METAL FILM 4.7K 1% 1/6W |
| R242 | RD14BB2C243J | RES. CARBON 24K 5% 1/6W |
| R243 | RD14BB2C393J | RES. CARBON 39K 5% 1/6W |
| R244 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R245 | RD14BB2C161J | RES. CARBON 160 5% 1/6W |
| R246 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R247 | RD14BB2C100J | RES. CARBON 10 5% 1/6W |
| R248 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R249 | RD14BB2C163J | RES. CARBON 16K 5% 1/6W |
| R297 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R298 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R299 | RD14BB2C2R2J | RES. CARBON 2.2 5% 1/6W |
| R300 | NO USE | |
| R301 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R302 | RD14BB2C511J | RES. CARBON 510 5% 1/6W |
| R303 | RN14BK2C1004F | RES. METAL FILM 1M 1% 1/6W |
| R304 | RN14BK2C1500D | RES. METAL FILM 150 0.5% 1/6W |
| R305 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W |
| R306 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W |
| R307 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R308 | RD14BB2C390J | RES. CARBON 39 5% 1/6W |
| R309 | RD14BB2C620J | RES. CARBON 62 5% 1/6W |
| R310 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R311 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R312 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R313 | RD14BB2C161J | RES. CARBON 160 5% 1/6W |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION | REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|--------------------------------|---------|---------------|------------------------------|
| R314 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W | R509 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R315 | RD14BB2C474J | RES. CARBON 470K 5% 1/6W | R510 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R316 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R511 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R317 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W | R512 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R318 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W | R513 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R319 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R514 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R320 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W | R515 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R321 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W | R516 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R322 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W | R517 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R323 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R518 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R324 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W | R519 | RN14BK2C8200F | RES. METAL FILM 820 1% 1/6W |
| R325 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W | R520 | RN14BK2C8200F | RES. METAL FILM 820 1% 1/6W |
| R326 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R521 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R327 | RD14BB2C303J | RES. CARBON 30K 5% 1/6W | R522 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R328 | RD14BB2C203J | RES. CARBON 20K 5% 1/6W | R523 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R329 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R524 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R330 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R525 | RD14BB2C911J | RES. CARBON 910 5% 1/6W |
| R331 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W | R526 | RD14BB2C911J | RES. CARBON 910 5% 1/6W |
| R332 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R527 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W |
| R333 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R528 | RD14BB2C182J | RES. CARBON 1.8K 5% 1/6W |
| R334 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R529 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R335 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | R530 | RN14BK2C8200F | RES. METAL FILM 820 1% 1/6W |
| R336 | RN14BK2C1004F | RES. METAL FILM 1H 1% 1/6W | R531 | RN14BK2C8200F | RES. METAL FILM 820 1% 1/6W |
| R337 | RD14BB2C390J | RES. CARBON 39 5% 1/6W | R532 | RN14BK2C3000F | RES. METAL FILM 300 1% 1/6W |
| R338 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W | R533 | RN14BK2C3000F | RES. METAL FILM 300 1% 1/6W |
| R339 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | R534 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R340 | RN14BK2C1501F | RES. METAL FILM 1.5K 1% 1/6W | R535 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R341 | RN14BK2C4701F | RES. METAL FILM 4.7K 1% 1/6W | R536 | RD14BB2C272J | RES. CARBON 2.7K 5% 1/6W |
| R342 | RD14BB2C243J | RES. CARBON 24K 5% 1/6W | R537 | NO USE | |
| R343 | RD14BB2C393J | RES. CARBON 39K 5% 1/6W | R538 | RN14BK2C6880F | RES. METAL FILM 68.0 1% 1/6W |
| R344 | RD14BB2C221J | RES. CARBON 220 5% 1/6W | R539 | RN14BK2C6880F | RES. METAL FILM 68.0 1% 1/6W |
| R345 | RD14BB2C161J | RES. CARBON 160 5% 1/6W | R540 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R346 | RD14BB2C221J | RES. CARBON 220 5% 1/6W | R541 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R347 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | R542 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R348 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | R543 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R349 | RD14BB2C163J | RES. CARBON 16K 5% 1/6W | R544 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R397 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R545 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R398 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R546 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R399 | RD14BB2C2R2J | RES. CARBON 2.2 5% 1/6W | R547 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R400 | NO USE | | R548 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R401 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R549 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R402 | RD14BB2C511J | RES. CARBON 510 5% 1/6W | R550 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R403 | RN14BK2C1004F | RES. METAL FILM 1H 1% 1/6W | R551 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R404 | RN14BK2C1500D | RES. METAL FILM 150 0.5% 1/6W | R552 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R405 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W | R553 | RD14BB2C393J | RES. CARBON 39K 5% 1/6W |
| R406 | RN14BK2C75R0D | RES. METAL FILM 75.0 0.5% 1/6W | R554 | NO USE | |
| R407 | RD14BB2C101J | RES. CARBON 100 5% 1/6W | R555 | RD14BB2C392J | RES. CARBON 3.9K 5% 1/6W |
| R408 | RD14BB2C390J | RES. CARBON 39 5% 1/6W | R601 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R409 | RD14BB2C620J | RES. CARBON 62 5% 1/6W | R602 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R410 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R603 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R411 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R604 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R412 | RD14BB2C221J | RES. CARBON 220 5% 1/6W | R605 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R413 | RD14BB2C161J | RES. CARBON 160 5% 1/6W | R606 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R414 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W | R607 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R415 | RD14BB2C474J | RES. CARBON 470K 5% 1/6W | R608 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R416 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R609 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R417 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W | R610 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R418 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W | R611 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R419 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R612 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R420 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W | R613 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R421 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W | R614 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R422 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W | R615 | RD14BB2C474J | RES. CARBON 470K 5% 1/6W |
| R423 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R616 | RD14BB2C750J | RES. CARBON 75 5% 1/6W |
| R424 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W | R617 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R425 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W | R624 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R426 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R625 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R427 | RD14BB2C303J | RES. CARBON 30K 5% 1/6W | R626 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R428 | RD14BB2C203J | RES. CARBON 20K 5% 1/6W | R627 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R429 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R628 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R430 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R629 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R431 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W | R630 | RD14BB2C474J | RES. CARBON 470K 5% 1/6W |
| R432 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R631 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R433 | RD14BB2C220J | RES. CARBON 22 5% 1/6W | R632 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R434 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R633 | RD14BB2C202J | RES. CARBON 2K 5% 1/6W |
| R435 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | R634 | RD14BB2C183J | RES. CARBON 18K 5% 1/6W |
| R436 | RN14BK2C1004F | RES. METAL FILM 1H 1% 1/6W | R635 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R437 | RD14BB2C390J | RES. CARBON 39 5% 1/6W | R636 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R438 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W | R637 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R439 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | R638 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R440 | RN14BK2C1501F | RES. METAL FILM 1.5K 1% 1/6W | R639 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R441 | RN14BK2C4701F | RES. METAL FILM 4.7K 1% 1/6W | R640 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R442 | RD14BB2C243J | RES. CARBON 24K 5% 1/6W | R641 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R443 | RD14BB2C393J | RES. CARBON 39K 5% 1/6W | R642 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R444 | RD14BB2C221J | RES. CARBON 220 5% 1/6W | R643 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R445 | RD14BB2C161J | RES. CARBON 160 5% 1/6W | R801 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R446 | RD14BB2C221J | RES. CARBON 220 5% 1/6W | R802 | RD14BB2C751J | RES. CARBON 750 5% 1/6W |
| R447 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | R803 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R448 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | R804 | RD14BB2C751J | RES. CARBON 750 5% 1/6W |
| R449 | RD14BB2C163J | RES. CARBON 16K 5% 1/6W | R805 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R497 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R806 | RD14BB2C751J | RES. CARBON 750 5% 1/6W |
| R498 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R807 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R499 | RD14BB2C2R2J | RES. CARBON 2.2 5% 1/6W | R808 | RD14BB2C751J | RES. CARBON 750 5% 1/6W |
| | | | R809 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| | | | R810 | RN14BK2C2001F | RES. METAL FILM 2K 1% 1/6W |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|--------------------------------|
| R811 | R92-1189-05 | RES. LT3000 470 5% 1/6W |
| R812 | RN14BK2C2001F | RES. METAL FILM 2K 1% 1/6W |
| R813 | R92-1189-05 | RES. LT3000 470 5% 1/6W |
| R816 | RD14BB2C751J | RES. CARBON 750 5% 1/6W |
| R817 | RN14BK2E4300F | RES. METAL FILM 430 1% 1/4W |
| R818 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R819 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R820 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R821 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R822 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R823 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R824 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R825 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R826 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R827 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R828 | RD14BB2C684J | RES. CARBON 680K 5% 1/6W |
| R829 | RD14BB2C912J | RES. CARBON 9.1K 5% 1/6W |
| R830 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R831 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R832 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R833 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R834 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R835 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R836 | RD14BB2C272J | RES. CARBON 2.7K 5% 1/6W |
| R837 | RD14BB2C272J | RES. CARBON 2.7K 5% 1/6W |
| R838 | RD14BB2C272J | RES. CARBON 2.7K 5% 1/6W |
| R839 | RD14BB2C272J | RES. CARBON 2.7K 5% 1/6W |
| R840 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R841 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R842 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R843 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R844 | RD14BB2C181J | RES. CARBON 180 5% 1/6W |
| R845 | RD14BB2C181J | RES. CARBON 180 5% 1/6W |
| R846 | RD14BB2C181J | RES. CARBON 180 5% 1/6W |
| R847 | RD14BB2C181J | RES. CARBON 180 5% 1/6W |
| R852 | RN14BK2C22R0F | RES. METAL FILM 22.0 1% 1/6W |
| R853 | RN14BK2C22R0F | RES. METAL FILM 22.0 1% 1/6W |
| R854 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R855 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| S101 | W02-2137-05 | ATTENUATOR UNIT |
| S201 | W02-2137-05 | ATTENUATOR UNIT |
| S301 | W02-2137-05 | ATTENUATOR UNIT |
| S401 | W02-2137-05 | ATTENUATOR UNIT |
| TC101 | C05-0470-05 | CAP. TRIMMER 20P |
| TC102 | C05-0473-05 | CAP. CERAMIC 120P |
| TC103 | C05-0472-05 | CAP. TRIMMER 6PF TO 50PF |
| TC201 | C05-0470-05 | CAP. TRIMMER 20P |
| TC202 | C05-0473-05 | CAP. CERAMIC 120P |
| TC203 | C05-0472-05 | CAP. TRIMMER 6PF TO 50PF |
| TC301 | C05-0470-05 | CAP. TRIMMER 20P |
| TC302 | C05-0473-05 | CAP. CERAMIC 120P |
| TC303 | C05-0472-05 | CAP. TRIMMER 6PF TO 50PF |
| TC401 | C05-0470-05 | CAP. TRIMMER 20P |
| TC402 | C05-0473-05 | CAP. CERAMIC 120P |
| TC403 | C05-0472-05 | CAP. TRIMMER 6PF TO 50PF |
| TC602 | C05-0473-05 | CAP. CERAMIC 120P |
| U1 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U2 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U3 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U4 | HD74HC595FP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U5 | HD74HC595FP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U6 | HD74HC595FP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U7 | HD74HC595FP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U101 | KNC04 | IC, LINEAR |
| U102 | LM6364N | IC, OP AMP |
| U103 | KNC05 | IC, LINEAR |
| U104 | KNC06 | IC, LINEAR |
| U105 | NJN4558D | IC, DUAL OP AMP |
| U106 | KNC08 | IC, LINEAR |
| U201 | KNC04 | IC, LINEAR |
| U202 | LM6364N | IC, OP AMP |
| U203 | KNC05 | IC, LINEAR |
| U204 | KNC06 | IC, LINEAR |
| U205 | NJN4558D | IC, DUAL OP AMP |
| U206 | KNC08 | IC, LINEAR |
| U301 | KNC04 | IC, LINEAR |
| U302 | LM6364N | IC, OP AMP |
| U303 | KNC05 | IC, LINEAR |
| U304 | KNC06 | IC, LINEAR |
| U305 | NJN4558D | IC, DUAL OP AMP |
| U306 | KNC08 | IC, LINEAR |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|---------------------------------|
| U401 | KNC04 | IC, LINEAR |
| U402 | LM6364N | IC, OP AMP |
| U403 | KNC05 | IC, LINEAR |
| U404 | KNC06 | IC, LINEAR |
| U405 | NJN4558D | IC, DUAL OP AMP |
| U406 | KNC08 | IC, LINEAR |
| U501 | KNC11 | IC, LINEAR |
| U502 | KNC11 | IC, LINEAR |
| U503 | KNC11 | IC, LINEAR |
| U504 | NO USE | |
| U505 | SN74ALS112AN | IC, DUAL J-K F.F. (WITH PR&CLR) |
| U506 | SN74ALS112AN | IC, DUAL J-K F.F. (WITH PR&CLR) |
| U507 | SN74ALS00AN | IC, QUAD 2 INPUT NAND GATE |
| U508 | SN74ALS00AN | IC, QUAD 2 INPUT NAND GATE |
| U601 | KNC07 | IC, LINEAR |
| U602 | KNC07 | IC, LINEAR |
| U603 | KNC07 | IC, LINEAR |
| U604 | KNC08 | IC, LINEAR |
| U605 | NJN4558D | IC, DUAL OP AMP |
| VR1 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR101 | R12-0571-05 | RES. SEMI FIXED 500 B |
| VR102 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR103 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR104 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR105 | NO USE | |
| VR106 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR107 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR108 | R12-1539-05 | RES. SEMI FIXED 2KB |
| VR109 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR110 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR111 | R12-0569-05 | RES. SEMI FIXED 100 B |
| VR112 | R12-3453-05 | RES. SEMI FIXED 10KB |
| VR201 | R12-0571-05 | RES. SEMI FIXED 500 B |
| VR202 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR203 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR204 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR205 | NO USE | |
| VR206 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR207 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR208 | R12-1539-05 | RES. SEMI FIXED 2KB |
| VR209 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR210 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR211 | R12-0569-05 | RES. SEMI FIXED 100 B |
| VR212 | R12-3453-05 | RES. SEMI FIXED 10KB |
| VR301 | R12-0571-05 | RES. SEMI FIXED 500 B |
| VR302 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR303 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR304 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR305 | NO USE | |
| VR306 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR307 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR308 | R12-1539-05 | RES. SEMI FIXED 2KB |
| VR309 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR310 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR311 | R12-0569-05 | RES. SEMI FIXED 100 B |
| VR312 | R12-3453-05 | RES. SEMI FIXED 10KB |
| VR401 | R12-0571-05 | RES. SEMI FIXED 500 B |
| VR402 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR403 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR404 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR405 | NO USE | |
| VR406 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR407 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR408 | R12-1539-05 | RES. SEMI FIXED 2KB |
| VR409 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR410 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR411 | R12-0569-05 | RES. SEMI FIXED 100 B |
| VR412 | R12-3453-05 | RES. SEMI FIXED 10KB |
| VR501 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR502 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR601 | R12-5526-05 | RES. SEMI FIXED 100KB |
| VR612 | R12-3453-05 | RES. SEMI FIXED 10KB |

PARTS LIST

HORIZONTAL UNIT

X74-1530-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|----------------------------|
| | J73-0022-12 | PCB (UNMOUNTED) |
| | L92-0110-05 | FERRITE BEADS |
| C1 | CQ92FH1H154J | CAP. NYLAR 0.15 5% 50V |
| C2 | CF92V1H684J | CAP. POLYESTER 0.68 5% 50V |
| C3 | CF92V1H684J | CAP. POLYESTER 0.68 5% 50V |
| C4 | CC45FCH1H150J | CAP. CERAMIC 15P 5% 50V |
| C5 | NO USE | |
| C6 | CC45FCH1H050C | CAP. CERAMIC 5P 0.25P 50V |
| C7 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C8 | CK45FB1H102K | CAP. CERAMIC 1000P 10% 50V |
| C9 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C10 | CQ92FH1H682K | CAP. NYLAR 6800P 10% 50V |
| C11 | CE04EW1E010M | CAP. ELECTRO 1 20% 25V |
| C12 | C91-1358-05 | CAP. NYLAR 0.15 10% 63V |
| C13 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C14 | CE04HW1E220M | CAP. ELECTRO 22 20% 25V |
| C15 | CC45FCH1H100D | CAP. CERAMIC 10P 0.5P 50V |
| C16 | CE04HW1E220M | CAP. ELECTRO 22 20% 25V |
| C17 | CE04EW1C470M | CAP. ELECTRO 47 20% 16V |
| C18 | CE04EW1C470M | CAP. ELECTRO 47 20% 16V |
| C19 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C20 | CE04EW1H3R3M | CAP. ELECTRO 3.3 20% 50V |
| C21 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C22 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C23 | NO USE | |
| C24 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V |
| C25 | CQ92FH1H472J | CAP. NYLAR 4700P 5% 50V |
| C26 | CK45FB1H102K | CAP. CERAMIC 1000P 10% 50V |
| C27 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C28 | NO USE | |
| C29 | CC45FCH1H100D | CAP. CERAMIC 10P 0.5P 50V |
| C30 | C91-1272-05 | CAP. POLYESTER 1.5 5% 100V |
| C31 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C32 | CC45FCH1H100D | CAP. CERAMIC 10P 0.5P 50V |
| C33 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C34 | CC45FSL1H391J | CAP. CERAMIC 390P 5% 50V |
| C35 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C36 | CF92V1H224J | CAP. POLYESTER 0.22 5% 50V |
| C37 | CC45FCH1H470J | CAP. CERAMIC 47P 5% 50V |
| C38 | NO USE | |
| C39 | CC45CH1H100D | CAP. CERAMIC 10P 0.5P 50V |
| C40 | C91-1272-05 | CAP. POLYESTER 1.5 5% 100V |
| C41 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C42 | CC45FCH1H470J | CAP. CERAMIC 47P 5% 50V |
| C43 | CK45FB1H102K | CAP. CERAMIC 1000P 10% 50V |
| C46 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C51 | CC45FCH1H910J | CAP. CERAMIC 91P 5% 50V |
| C52 | CC45FCH1H121J | CAP. CERAMIC 120P 5% 50V |
| C53 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C54 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C57 | CC45FCH1H330J | CAP. CERAMIC 33P 5% 50V |
| C58 | CC45FCH1H330J | CAP. CERAMIC 33P 5% 50V |
| C59 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C60 | NO USE | |
| C61 | CC45FCH1H220J | CAP. CERAMIC 22P 5% 50V |
| C62 | CC45FCH1H040C | CAP. CERAMIC 4P 0.25P 50V |
| C63 | NO USE | |
| C64 | CE04EW1A471M | CAP. ELECTRO 470 20% 10V |
| C65 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C66 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C67 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C68 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C69 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C70 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C71 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C72 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C73 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C74 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C75 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C76 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C77 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C78 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C79 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C80 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C81 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C82 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C83 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C84 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C85 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C86 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C87 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C88 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C89 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C90 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C91 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C92 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C93 | CE04EW1C471M | CAP. ELECTRO 470 20% 16V |
| C94 | CE04EW1C471M | CAP. ELECTRO 470 20% 16V |
| C95 | CE04EW1C331M | CAP. ELECTRO 330 20% 16V |
| C96 | CE04EW1C331M | CAP. ELECTRO 330 20% 16V |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|-----------------------------|
| C97 | CE04EW1A471M | CAP. ELECTRO 470 20% 10V |
| C98 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C99 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C100 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C101 | CE04HW1C101M | CAP. ELECTRO 100 20% 16V |
| C102 | CC45CH1H151J | CAP. CERAMIC 150P 5% 50V |
| C103 | CC45FCH1H151J | CAP. CERAMIC 150P 5% 50V |
| C104 | CC45FCH1H270J | CAP. CERAMIC 27P 5% 50V |
| C105 | CC45FCH1H270J | CAP. CERAMIC 27P 5% 50V |
| C106 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C107 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C108 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C200 | CE04EW1C331M | CAP. ELECTRO 330 20% 16V |
| C201 | CE04EW1A331M | CAP. ELECTRO 330 20% 10V |
| C202 | CC45FCH1H680J | CAP. CERAMIC 68P 5% 50V |
| C203 | CC45FCH1H470J | CAP. CERAMIC 47P 5% 50V |
| C502 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C503 | NO USE | |
| C504 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C505 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C801 | CC45FCH1H030C | CAP. CERAMIC 3P 0.25P 50V |
| C802 | NO USE | |
| C803 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C804 | CE04EW1C102M | CAP. ELECTRO 1000 20% 16V |
| C805 | CC45FCH1H120J | CAP. CERAMIC 12P 5% 50V |
| C806 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C807 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C808 | NO USE | |
| C809 | CE04EW1E101M | CAP. ELECTRO 100 20% 25V |
| C810 | C91-1357-05 | CAP. METALIZED 0.1 10% 100V |
| C811 | CC45FCH1H030C | CAP. CERAMIC 3P 0.25P 50V |
| C814 | CC45FCH1H390J | CAP. CERAMIC 39P 5% 50V |
| C815 | CQ92FH1H123J | CAP. NYLAR 0.012 5% 50V |
| C816 | CC45FCH1H220J | CAP. CERAMIC 22P 5% 50V |
| C817 | NO USE | |
| C818 | CQ92FH1H223J | CAP. NYLAR 0.022 5% 50V |
| C819 | CC45FCH1H470J | CAP. CERAMIC 47P 5% 50V |
| C820 | CK45R2H103K | CAP. CERAMIC 0.01 10% 500V |
| C821 | CE04EW1C331M | CAP. ELECTRO 330 20% 16V |
| C822 | CE04EW0J331M | CAP. ELECTRO 330 20% 6.3V |
| C823 | CE04EW1C220M | CAP. ELECTRO 22 20% 16V |
| C824 | CE04EW0J331M | CAP. ELECTRO 330 20% 6.3V |
| C827 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C828 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V |
| C829 | CK45B1H102K | CAP. CERAMIC 1000P 10% 50V |
| C830 | CC45CH1H050C | CAP. CERAMIC 5P 0.25P 50V |
| D1 | 1SS132 | DIODE |
| D2 | 1SS132 | DIODE |
| D3 | NA700 | DIODE |
| D4 | NA700 | DIODE |
| D5 | NA700 | DIODE |
| D6 | NA700 | DIODE |
| D7 | NTZ3.0JA | DIODE, ZENER 2.96V |
| D8 | NTZ3.0JA | DIODE, ZENER 2.96V |
| D9 | 1SS132 | DIODE |
| D10 | NA700 | DIODE |
| D11 | NA700 | DIODE |
| D12 | NA700 | DIODE |
| D13 | NA700 | DIODE |
| D14 | NA700 | DIODE |
| D15 | 1SS132 | DIODE |
| D16 | NA700 | DIODE |
| D17 | NA700 | DIODE |
| D18 | NA700 | DIODE |
| D19 | 1SS132 | DIODE |
| D20 | 1SS132 | DIODE |
| D21 | NA700 | DIODE |
| D22 | NA700 | DIODE |
| D23 | NA700 | DIODE |
| D24 | TLR112 | LED, RED |
| D25 | TLR112 | LED, RED |
| D26 | NA700 | DIODE |
| D27 | NO USE | |
| D28 | NA700 | DIODE |
| D29 | NA700 | DIODE |
| D30 | NA700 | DIODE |
| D31 | NA700 | DIODE |
| D34 | 1SS132 | DIODE |
| D35 | 1SS132 | DIODE |
| D36 | 1SS132 | DIODE |
| D37 | NO USE | |
| D38 | 1SS132 | DIODE |
| D39 | NO USE | |
| D40 | NA700 | DIODE |
| D41 | NA700 | DIODE |
| D502 | NA700 | DIODE |
| D503 | NA700 | DIODE |
| D504 | 1SS132 | DIODE |
| D505 | NA700 | DIODE |
| D506 | NA700 | DIODE |
| D507 | NA700 | DIODE |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|-----------------------------|
| D508 | 1SS132 | DIODE |
| D509 | 1SS132 | DIODE |
| D510 | NO USE | |
| D511 | 1SS132 | DIODE |
| D512 | 1SS132 | DIODE |
| D513 | 1SS132 | DIODE |
| D514 | 1SS132 | DIODE |
| D802 | HA700 | DIODE |
| J3 | R92-1061-05 | JUMPING RES. ZERO OHM (5MM) |
| K1 | S51-1527-05 | RELAY |
| K2 | S51-1527-05 | RELAY |
| L1 | L79-0551-05 | FILTER |
| L2 | L79-0551-05 | FILTER |
| L3 | L79-0551-05 | FILTER |
| L4 | L40-2212-70 | FERRI INDUCTOR 220UH 20% |
| L5 | NO USE | |
| P6 | E40-3237-05 | PIN CONNECTOR 2P |
| P11 | E40-3240-05 | PIN CONNECTOR 5P |
| P12 | E40-3243-05 | PIN CONNECTOR 8P |
| P16 | E40-7209-05 | PIN CONNECTOR 50P |
| Q1 | 2SA1206(K) | TR. SI, PNP |
| Q2 | 2SC3354(S) | TR. SI, NPN |
| Q3 | 2SA1565 | TR. SI, PNP |
| Q4 | 2SA1565 | TR. SI, PNP |
| Q5 | 2SC3779(D) | TR. SI, NPN |
| Q6 | 2SA1175(F) | TR. SI, PNP |
| Q7 | 2SK304(F) | FET, N-CHANNEL |
| Q8 | 2SK241(GR) | FET, N-CHANNEL |
| Q9 | 2SA1206(K) | TR. SI, PNP |
| Q10 | 2SC2785(F) | TR. SI, NPN |
| Q11 | 2SA1206(K) | TR. SI, PNP |
| Q12 | 2SC3315(C) | TR. SI, NPN |
| Q13 | 2SC3315(C) | TR. SI, NPN |
| Q14 | 2SC2785(F) | TR. SI, NPN |
| Q15 | 2SC3315(C) | TR. SI, NPN |
| Q16 | 2SC3315(C) | TR. SI, NPN |
| Q17 | 2SC2785(F) | TR. SI, NPN |
| Q18 | 2SA1175(F) | TR. SI, PNP |
| Q19 | 2SC2785(F) | TR. SI, NPN |
| Q20 | 2SC3732(L) | TR. SI, NPN |
| Q21 | 2SA1206(K) | TR. SI, PNP |
| Q22 | 2SC3315(C) | TR. SI, NPN |
| Q23 | 2SC2785(F) | TR. SI, NPN |
| Q24 | 2SC3315(C) | TR. SI, NPN |
| Q25 | 2SC3315(C) | TR. SI, NPN |
| Q26 | 2SC3315(C) | TR. SI, NPN |
| Q27 | 2SC3315(C) | TR. SI, NPN |
| Q28 | 2SC3315(C) | TR. SI, NPN |
| Q29 | 2SC3315(C) | TR. SI, NPN |
| Q30 | 2SC3315(C) | TR. SI, NPN |
| Q31 | 2SC3315(C) | TR. SI, NPN |
| Q32 | 2SA1005(K) | TR. SI, PNP |
| Q33 | 2SC3315(C) | TR. SI, NPN |
| Q34 | 2SC3315(C) | TR. SI, NPN |
| Q35 | 2SA1005(K) | TR. SI, PNP |
| Q36 | 2SC3315(C) | TR. SI, NPN |
| Q37 | 2SK583-KEN | FET, N-CHANNEL |
| Q38 | 2SK583-KEN | FET, N-CHANNEL |
| Q39 | 2SK583-KEN | FET, N-CHANNEL |
| Q40 | 2SA1175(F) | TR. SI, PNP |
| Q41 | 2SC2785(F) | TR. SI, NPN |
| Q42 | 2SA1005(K) | TR. SI, PNP |
| Q43 | 2SA1005(K) | TR. SI, PNP |
| Q46 | 2SC2785(F) | TR. SI, NPN |
| Q47 | 2SC2785(F) | TR. SI, NPN |
| Q48 | 2SA1005(K) | TR. SI, PNP |
| Q49 | 2SC3354(S) | TR. SI, NPN |
| Q50 | 2SK241(GR) | FET, N-CHANNEL |
| Q51 | 2SK241(GR) | FET, N-CHANNEL |
| Q52 | 2SA1565 | TR. SI, PNP |
| Q53 | 2SC3732(L) | TR. SI, NPN |
| Q54 | 2SA1005(K) | TR. SI, PNP |
| Q55 | 2SA1565 | TR. SI, PNP |
| Q56 | 2SC2785(F) | TR. SI, NPN |
| Q57 | 2SK583-KEN | FET, N-CHANNEL |
| Q60 | 2SA1565 | TR. SI, PNP |
| Q503 | 2SA1206(K) | TR. SI, PNP |
| Q504 | 2SC3315(C) | TR. SI, NPN |
| Q505 | 2SC3315(C) | TR. SI, NPN |
| Q506 | 2SA1459(L) | TR. SI, PNP |
| Q507 | 2SC4049 | TR. SI, NPN |
| Q802 | 2SC2785(F) | TR. SI, NPN |
| R1 | RD14BB2C201J | RES. CARBON 200 5% 1/6W |
| R2 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R3 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|------------------------------|
| R4 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R5 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R6 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R7 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R8 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R9 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R10 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R11 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R12 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R13 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R14 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R17 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R18 | RD14BB2C391J | RES. CARBON 390 5% 1/6W |
| R19 | RD14BB2C181J | RES. CARBON 180 5% 1/6W |
| R20 | RD14BB2C751J | RES. CARBON 750 5% 1/6W |
| R21 | R90-0659-05 | RES. NETWORK 4X510 |
| R22 | RD14BB2C163J | RES. CARBON 16K 5% 1/6W |
| R23 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R24 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W |
| R25 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R26 | RD14BB2C183J | RES. CARBON 18K 5% 1/6W |
| R27 | RD14BB2C203J | RES. CARBON 20K 5% 1/6W |
| R28 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R29 | RD14BB2C393J | RES. CARBON 39K 5% 1/6W |
| R30 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R31 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R32 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R33 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R34 | RD14BB2C105J | RES. CARBON 1M 5% 1/6W |
| R35 | RD14BB2C105J | RES. CARBON 1M 5% 1/6W |
| R36 | RD14BB2C105J | RES. CARBON 1M 5% 1/6W |
| R37 | RD14BB2C105J | RES. CARBON 1M 5% 1/6W |
| R38 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R39 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R40 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R41 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R42 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R43 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R44 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R45 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R46 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R47 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R48 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R49 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R50 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R51 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R52 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R53 | RD14BB2C474J | RES. CARBON 470K 5% 1/6W |
| R54 | RD14BB2C105J | RES. CARBON 1M 5% 1/6W |
| R55 | RD14BB2C684J | RES. CARBON 680K 5% 1/6W |
| R56 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R57 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R58 | NO USE | |
| R59 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R60 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R61 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R62 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W |
| R63 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R64 | RD14BB2C334J | RES. CARBON 330K 5% 1/6W |
| R65 | RD14BB2C274J | RES. CARBON 270K 5% 1/6W |
| R66 | NO USE | |
| R67 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R68 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R69 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R70 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R71 | RD14BB2C105J | RES. CARBON 1M 5% 1/6W |
| R72 | NO USE | |
| R73 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R74 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R75 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R76 | R90-0660-05 | RES. NETWORK 4X1K |
| R77 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R78 | RD14BB2C151J | RES. CARBON 150 5% 1/6W |
| R79 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R80 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R81 | RD14BB2C622J | RES. CARBON 6.2K 5% 1/6W |
| R82 | RD14BB2C391J | RES. CARBON 390 5% 1/6W |
| R83 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R84 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R85 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R86 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R87 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R88 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R89 | RD14BB2C151J | RES. CARBON 150 5% 1/6W |
| R90 | RD14BB2C1002F | RES. METAL FILM 10K 1% 1/6W |
| R91 | RD14BB2C1202F | RES. METAL FILM 12K 1% 1/6W |
| R92 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R93 | RD14BB2C1202F | RES. METAL FILM 12K 1% 1/6W |
| R94 | RD14BB2C1202F | RES. METAL FILM 12K 1% 1/6W |
| R95 | RD14BB2C1502F | RES. METAL FILM 15K 1% 1/6W |
| R96 | RD14BB2C3601F | RES. METAL FILM 3.6K 1% 1/6W |
| R97 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R98 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R99 | RD14BB2C2401F | RES. METAL FILM 2.4K 1% 1/6W |
| R100 | RD14BB2C3002F | RES. METAL FILM 30K 1% 1/6W |
| R101 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION | REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|------------------------------|---------|---------------|-----------------------------|
| R102 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R210 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R103 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W | R211 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R104 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W | R212 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R105 | RD14BB2C752J | RES. CARBON 7.5K 5% 1/6W | R213 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R106 | RN14BK2C6201F | RES. METAL FILM 6.2K 1% 1/6W | R214 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R107 | RN14BK2C1102F | RES. METAL FILM 11K 1% 1/6W | R215 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R108 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W | R216 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R109 | RN14BK2C6801F | RES. METAL FILM 6.8K 1% 1/6W | R217 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R110 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R218 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W |
| R111 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W | R219 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R112 | RN14BK2C1301F | RES. METAL FILM 1.3K 1% 1/6W | R220 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R113 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R221 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W |
| R114 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R222 | RD14BB2C752J | RES. CARBON 7.5K 5% 1/6W |
| R115 | RD14BB2C682J | RES. CARBON 6.8K 5% 1/6W | R223 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R116 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W | R224 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R117 | RD14BB2C100J | RES. CARBON 10 5% 1/6W | R225 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R118 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | R226 | RD14BB2C621J | RES. CARBON 620 5% 1/6W |
| R119 | RN14BK2C2401F | RES. METAL FILM 2.4K 1% 1/6W | R227 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R120 | RN14BK2C3002F | RES. METAL FILM 30K 1% 1/6W | R228 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R121 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R229 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R122 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R230 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R123 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W | R231 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R124 | RD14BB2C101J | RES. CARBON 100 5% 1/6W | R232 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R125 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R233 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R126 | RD14BB2C682J | RES. CARBON 6.8K 5% 1/6W | R234 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R127 | RD14BB2C101J | RES. CARBON 100 5% 1/6W | R235 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R128 | RD14BB2C622J | RES. CARBON 6.2K 5% 1/6W | | | |
| R129 | RD14BB2C391J | RES. CARBON 390 5% 1/6W | R240 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R130 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R241 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R131 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R242 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R132 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W | R243 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R133 | RD14BB2C751J | RES. CARBON 750 5% 1/6W | R244 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R134 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R245 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| | | | R246 | RN14BK2C3902F | RES. METAL FILM 39K 1% 1/6W |
| R137 | RD14BB2C181J | RES. CARBON 180 5% 1/6W | R247 | RN14BK2C3902F | RES. METAL FILM 39K 1% 1/6W |
| R138 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W | R248 | RD14BB2C682J | RES. CARBON 6.8K 5% 1/6W |
| R139 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W | R249 | RD14BB2C122J | RES. CARBON 1.2K 5% 1/6W |
| R140 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W | R250 | NO USE | |
| R141 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W | R251 | RD14BB2C183J | RES. CARBON 18K 5% 1/6W |
| R142 | RD14BB2C113J | RES. CARBON 11K 5% 1/6W | R252 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R143 | RD14BB2C101J | RES. CARBON 100 5% 1/6W | R253 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R144 | RN14BK2C2201F | RES. METAL FILM 2.2K 1% 1/6W | | | |
| R145 | RN14BK2C2203F | RES. METAL FILM 220K 1% 1/6W | | | |
| R150 | R90-0660-05 | RES. NETWORK 4X1K | R260 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W |
| | | | R261 | RD14BB2C362J | RES. CARBON 3.6K 5% 1/6W |
| R154 | RD14BB2C331J | RES. CARBON 330 5% 1/6W | R262 | RD14BB2C183J | RES. CARBON 18K 5% 1/6W |
| R155 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | R263 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R156 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | R264 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R157 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R265 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R158 | RD14BB2C470J | RES. CARBON 47 5% 1/6W | R266 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R159 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | R267 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R160 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | R268 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R161 | RD14BB2C202J | RES. CARBON 2K 5% 1/6W | R269 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R162 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W | R270 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| | | | R271 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R165 | RD14BB2C243J | RES. CARBON 24K 5% 1/6W | | | |
| R166 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W | R503 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R167 | RD14BB2C822J | RES. CARBON 8.2K 5% 1/6W | R504 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R168 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W | R505 | RD14BB2C622J | RES. CARBON 6.2K 5% 1/6W |
| R169 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R506 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R170 | RN14BK2C2001F | RES. METAL FILM 2K 1% 1/6W | R507 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R171 | RN14BK2C4701F | RES. METAL FILM 4.7K 1% 1/6W | R508 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R172 | RD14BB2C202J | RES. CARBON 2K 5% 1/6W | R509 | NO USE | |
| R173 | RD14BB2C202J | RES. CARBON 2K 5% 1/6W | R510 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W |
| R174 | RD14BB2C101J | RES. CARBON 100 5% 1/6W | R511 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R175 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W | R512 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W |
| R176 | RD14BB2C242J | RES. CARBON 2.4K 5% 1/6W | R513 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R177 | RD14BB2C101J | RES. CARBON 100 5% 1/6W | | | |
| R178 | NO USE | | R600 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R179 | RD14BB2C221J | RES. CARBON 220 5% 1/6W | R601 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R180 | RD14BB2C273J | RES. CARBON 27K 5% 1/6W | R602 | RD14BB2C182J | RES. CARBON 1.8K 5% 1/6W |
| R181 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R603 | R92-1480-05 | RES. LT3000 1.6K 5% 1/6W |
| R182 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | | | |
| R183 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R801 | RD14BB2C334J | RES. CARBON 330K 5% 1/6W |
| R184 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | R802 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R185 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R803 | RD14BB2C680J | RES. CARBON 68 5% 1/6W |
| R186 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W | R804 | RD14BB2C680J | RES. CARBON 68 5% 1/6W |
| R187 | RD14BB2C471J | RES. CARBON 470 5% 1/6W | R805 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R188 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W | R806 | RD14BB2C512J | RES. CARBON 5.1K 5% 1/6W |
| R189 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R807 | RD14BB2C123J | RES. CARBON 12K 5% 1/6W |
| R190 | RD14BB2C682J | RES. CARBON 6.8K 5% 1/6W | R808 | R92-1480-05 | RES. LT3000 1.6K 5% 1/6W |
| R191 | RD14BB2C362J | RES. CARBON 3.6K 5% 1/6W | R809 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R192 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R810 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R193 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | R811 | NO USE | |
| R194 | R90-1124-05 | RES. NETWORK 5X10K | R812 | RD14BB2C154J | RES. CARBON 150K 5% 1/6W |
| | | | R813 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R199 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W | | | |
| R200 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W | R816 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R201 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W | R817 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R202 | RD14BB2C561J | RES. CARBON 560 5% 1/6W | R818 | RD14BB2C202J | RES. CARBON 2K 5% 1/6W |
| R203 | RD14BB2C392J | RES. CARBON 3.9K 5% 1/6W | R819 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R204 | RD14BB2C392J | RES. CARBON 3.9K 5% 1/6W | R820 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R205 | RD14BB2C432J | RES. CARBON 4.3K 5% 1/6W | R821 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R206 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W | R822 | RD14BB2C362J | RES. CARBON 3.6K 5% 1/6W |
| R207 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W | R823 | RD14BB2C363J | RES. CARBON 36K 5% 1/6W |
| R208 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W | R824 | RD14BB2C105J | RES. CARBON 1K 5% 1/6W |
| R209 | NO USE | | R825 | RD14BB2C154J | RES. CARBON 150K 5% 1/6W |
| | | | R826 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|---------------------------------|
| R827 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R828 | RD14BB2C334J | RES. CARBON 330K 5% 1/6W |
| R829 | RD14BB2C821J | RES. CARBON 820 5% 1/6W |
| R830 | RD14BB2C222J | RES. CARBON 22K 5% 1/6W |
| R894 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| R895 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| R896 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R999 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| TC1 | C05-0471-05 | CAP. TRIMMER 30P |
| TC2 | C05-0471-05 | CAP. TRIMMER 30P |
| TC3 | C05-0469-05 | CAP. TRIMMER 10P |
| TC4 | C05-0469-05 | CAP. TRIMMER 10P |
| TC5 | C05-0473-05 | CAP. CERAMIC 120P |
| U1 | KNC09 | IC, LINEAR |
| U2 | NO USE | |
| U3 | HC74HC4053N | IC, TRIPLE 2CH ANALOG MPX/DE-MP |
| U4 | NJM072BL | IC, JFET INPUT OP AMP |
| U5 | NJM072BL | IC, JFET INPUT OP AMP |
| U6 | UA733CN | IC, DIFFERENTIAL VIDEO AMP |
| U7 | LM1881N | IC, VIDEO SYNC SEPARATOR |
| U8 | SN74LS221N | IC, DUAL MONOSTABLE MULTI. |
| U9 | SN74LS123N | IC, DUAL MONOSTABLE MULTIVIB. |
| U10 | NO USE | |
| U11 | MC10H102L | IC, GATE FUNCTION |
| U12 | NO USE | |
| U13 | MC10H131L | IC, DUAL D-FILP FLOP |
| U14 | MC10103L | IC, QUAD 2-INPUT OR GATE |
| U15 | SN74ALS191N | IC, SYNC. U/D 4-BIT BINARY COUN |
| U16 | SN74ALS191N | IC, SYNC. U/D 4-BIT BINARY COUN |
| U17 | SN74ALS191N | IC, SYNC. U/D 4-BIT BINARY COUN |
| U18 | KND03 | IC, LINEAR |
| U19 | KND03. | IC, LINEAR |
| U20 | KNT01 | IC, LINEAR |
| U21 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U22 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U23 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U24 | KNC10 | IC, LINEAR |
| U25 | NJM4558D | IC, DUAL OP AMP |
| U26 | NJM072BL | IC, JFET INPUT OP AMP |
| U27 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U28 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U29 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U30 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U31 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U32 | HD74HC595AP | IC, 8-BIT SHIFT REGISTER/LATCH |
| U33 | SN74ALS00AN | IC, QUAD 2 INPUT NAND GATE |
| U34 | SN74ALS02N | IC, QUAD 2 INPUT NOR |
| U35 | SN74ALS02N | IC, QUAD 2 INPUT NOR |
| U36 | SN74ALS04BN | IC, HEX INVERTERS |
| U37 | SN74ALS153N | IC, DUAL 4-1 DATA SELECTOR/MPX |
| U38 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U39 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U40 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U41 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U42 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U43 | MC10H104L | IC, GATE FUNCTIONS |
| U44 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| VR1 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR2 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR3 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR4 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR5 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR6 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR7 | R12-1538-05 | RES. SEMI FIXED 1KB |
| VR8 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR9 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR10 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR11 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR12 | R12-2520-05 | RES. SEMI FIXED 5KB |
| VR13 | R12-0571-05 | RES. SEMI FIXED 500 B |
| VR14 | R12-3543-05 | RES. SEMI FIXED 20KB |

DCS-9300 STO CPU UNIT

X77-1660-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|------------------------------|
| | E02-0143-05 | IC SOCKET 28P |
| | F15-0744-05 | BLIND PLATE |
| | J73-0020-22 | PCB (UNMOUNTED) |
| B1 | W09-0408-05 | BATTERY, CR2354-1HF |
| C1 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C2 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C3 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C4 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C5 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C6 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C7 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C8 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C9 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C10 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C11 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C12 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C13 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C14 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C15 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C16 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C17 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C18 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C19 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C20 | NO USE | |
| C21 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C22 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C23 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C24 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C25 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C26 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C27 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C28 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C29 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C30 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C31 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C32 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C33 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C37 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C38 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C39 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C40 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C41 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C42 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C43 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C44 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C45 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C46 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C47 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C48 | NO USE | |
| C49 | CC45SL1H151J | CAP. CERAMIC 150P 5% 50V |
| C50 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C51 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C52 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C53 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C54 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C55 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C56 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C57 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C58 | NO USE | |
| C59 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C60 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C61 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C62 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C63 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C64 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C65 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C66 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C67 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C68 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C69 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C70 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C71 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C72 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C73 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C74 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C75 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C78 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C79 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C80 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C81 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C82 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C83 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C84 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C85 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C86 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C87 | NO USE | |
| C88 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C89 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C90 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C91 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C92 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C93 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|--------------------------|
| R142 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R143 | R90-1147-05 | RES. NETWORK |
| R144 | R90-1147-05 | RES. NETWORK |
| R145 | R90-1146-05 | RES. NETWORK 75 |
| R146 | R90-1146-05 | RES. NETWORK 75 |
| R147 | R90-1146-05 | RES. NETWORK 75 |
| R148 | R90-1146-05 | RES. NETWORK 75 |
| R149 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R150 | RD14BB2C182J | RES. CARBON 1.8K 5% 1/6W |
| R151 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R152 | RD14BB2C912J | RES. CARBON 9.1K 5% 1/6W |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|----------------------|
| U95 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| VR1 | R12-1548-05 | RES. SEMI FIXED 2KB |
| VR2 | R12-1548-05 | RES. SEMI FIXED 2KB |
| VR3 | R12-3552-05 | RES. SEMI FIXED 20KB |
| X1 | L78-0117-05 | CERAMIC OSCILLATOR |

DCS-9320 STO CPU UNIT

X77-1660-02

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-----------------|---------------------------------|
| U1 | UPD70335GJ-85BG | IC, 16-BIT CPU |
| U2 | SN74LS245N | IC, OCTAL BUS TRANSCEIVER(3-S) |
| U3 | SN74LS245N | IC, OCTAL BUS TRANSCEIVER(3-S) |
| U4 | SN74ALS541N | IC, OCTAL 3-S BUFFER/LINE DRIVE |
| U5 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U6 | T93-0781-04 | PROGRAMMED ROM |
| U7 | T93-0782-04 | PROGRAMMED ROM |
| U8 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U9 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U10 | N884256-10LL-SK | IC, S-RAM |
| U11 | N884256-10LL-SK | IC, S-RAM |
| U12 | N884256-10LL-SK | IC, S-RAM |
| U13 | N884256-10LL-SK | IC, S-RAM |
| U14 | N884256-10LL-SK | IC, S-RAM |
| U15 | N884256-10LL-SK | IC, S-RAM |
| U16 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U17 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U18 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U19 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U20 | NC14066BCP | IC, QUAD ANALOG SW/QUAD HPX |
| U21 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U22 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U23 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U24 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U25 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U26 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U27 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U28 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U29 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U30 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U31 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U32 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U33 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U37 | SN74LS393N | IC, 4-STATE BINARY COUNTER |
| U38 | SN74LS393N | IC, 4-STATE BINARY COUNTER |
| U39 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U40 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT. /HPX |
| U41 | SN74ALS352N | IC, DUAL 4-1 DATA SELECT. /HPX |
| U42 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U43 | SN74ALS123N | IC, DUAL MONOSTABLE MULTIVIB. |
| U44 | H83771 | IC, RESET |
| U50 | SN74ALS138N | IC, 3-8 DECODER/DE-HPX |
| U51 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U52 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U53 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U54 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U55 | SN74LS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U56 | SN74LS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U57 | SN74ALS534AN | IC, OCTAL D-F. F. (3-S) |
| U58 | NO USE | |
| U59 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U60 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U61 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U62 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U63 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U64 | SN74ALS374AN | IC, OCTAL D-F. F. |
| U65 | NC14052BCP | IC, DUAL 4-CH ANALOG HPX/DE-HPX |
| U66 | NC14052BCP | IC, DUAL 4-CH ANALOG HPX/DE-HPX |
| U67 | SN74LS365AN | IC, HEX BUS DRIVERS |
| U68 | DAC0808LCN | IC, 8-BIT D/A CONVERTER |
| U69 | HA17012PD | IC, 12-BIT D/A CONVERTER |
| U70 | HA17012PD | IC, 12-BIT D/A CONVERTER |
| U71 | HA17012PD | IC, 12-BIT D/A CONVERTER |
| U72 | LH6218N | IC, FAST SETTLING DUAL OP-AMP |
| U73 | NJH072BD | IC, JFET INPUT OP AMP |
| U74 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U75 | SN74ALS30AN | IC, 8-INPUT POSITIVE-NAND GATE |
| U78 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U79 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U80 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U81 | SN74LS31N | IC, DELAY ELEMENTS |
| U82 | SN74ALS04BN | IC, HEX INVERTERS |
| U83 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U84 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U85 | SN74ALS74N | IC, DUAL D-F. F. (WITH PR&CLR) |
| U86 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U87 | NO USE | |
| U88 | SN74ALS74AN | IC, DUAL D-F. F. (WITH PR&CLR) |
| U89 | SN74ALS74AN | IC, DUAL D-F. F. (WITH PR&CLR) |
| U90 | CTHG011 | IC, GATE ARRAY |
| U91 | CTHG021 | IC, GATE ARRAY |
| U92 | CTHG031 | IC, GATE ARRAY |
| U93 | CTHG041 | IC, GATE ARRAY |
| U94 | NJH072BL | IC, JFET INPUT OP AMP |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|------------------------------|
| B1 | E02-0143-05 | IC SOCKET 28P |
| | F15-0744-05 | BLIND PLATE |
| | J73-0020-22 | PCR (UNMOUNTED) |
| | W09-0408-05 | BATTERY, CR2354-1HF |
| C1 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C2 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C3 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C4 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C5 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C6 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C7 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C8 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C9 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C10 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C11 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C12 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C13 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C14 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C15 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C16 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C17 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C18 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C19 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C20 | NO USE | |
| C21 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C22 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C23 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C24 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C25 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C26 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C27 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C28 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C29 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C30 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C31 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C32 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C33 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C37 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C38 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C39 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C40 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C41 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C42 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C43 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C44 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C45 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C46 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C47 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C48 | NO USE | |
| C49 | CC455LIH151J | CAP. CERAMIC 150P 5% 50V |
| C50 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C51 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C52 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C53 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C54 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C55 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C56 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C57 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C58 | NO USE | |
| C59 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C60 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C61 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C62 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C63 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C64 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C65 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C66 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C67 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C68 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C69 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C70 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C71 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C72 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C73 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C74 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C75 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C78 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C79 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C80 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION | REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|--------------------|---------|---------------|------------------------------|
| C81 | C91-1315-05 | CAP. CERAMIC | R22 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| C82 | C91-1315-05 | CAP. CERAMIC | R23 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| C83 | C91-1315-05 | CAP. CERAMIC | R24 | RN14BK2C3601F | RES. METAL FILM 3.6K 1% 1/6W |
| C84 | C91-1315-05 | CAP. CERAMIC | R25 | RN14BK2C4700F | RES. METAL FILM 470 1% 1/6W |
| C85 | C91-1315-05 | CAP. CERAMIC | R26 | RN14BK2C4700F | RES. METAL FILM 470 1% 1/6W |
| C86 | C91-1315-05 | CAP. CERAMIC | R27 | RD14BB2C133J | RES. CARBON 13K 5% 1/6W |
| C87 | NO USE | | R28 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| C88 | C91-1315-05 | CAP. CERAMIC | R29 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| C89 | C91-1315-05 | CAP. CERAMIC | R30 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| C90 | C91-1315-05 | CAP. CERAMIC | R31 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C91 | C91-1315-05 | CAP. CERAMIC | R32 | RN14BK2C1001F | RES. METAL FILM 1K 1% 1/6W |
| C92 | C91-1315-05 | CAP. CERAMIC | R33 | RN14BK2C1001F | RES. METAL FILM 1K 1% 1/6W |
| C93 | C91-1315-05 | CAP. CERAMIC | R34 | RN14BK2C7500F | RES. METAL FILM 750 1% 1/6W |
| C94 | NO USE | | R35 | RN14BK2C4701F | RES. METAL FILM 4.7K 1% 1/6W |
| C95 | C91-1315-05 | CAP. CERAMIC | R36 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| C101 | C91-1361-05 | CAP. NYLAR | R37 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| C102 | CE04EW0J101H | CAP. ELECTRO | R38 | RN14BK2C1002F | RES. METAL FILM 10K 1% 1/6W |
| C103 | C91-1361-05 | CAP. NYLAR | R39 | RN14BK2C1001F | RES. METAL FILM 1K 1% 1/6W |
| C104 | C91-1361-05 | CAP. NYLAR | R40 | RN14BK2C3901F | RES. METAL FILM 3.9K 1% 1/6W |
| C105 | CE04EW1C470M | CAP. ELECTRO | R41 | NO USE | |
| C106 | CE04EW1C470M | CAP. ELECTRO | R42 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C107 | CC45CH1H101J | CAP. CERAMIC | R43 | RN14BK2C1001F | RES. METAL FILM 1K 1% 1/6W |
| C108 | CE04EW1C470M | CAP. ELECTRO | R44 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| C109 | CC45CH1H101J | CAP. CERAMIC | R45 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C110 | C91-1315-05 | CAP. CERAMIC | R46 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C111 | C91-1315-05 | CAP. CERAMIC | R47 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C112 | C91-1315-05 | CAP. CERAMIC | R48 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C113 | C91-1315-05 | CAP. CERAMIC | R49 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C114 | C91-1315-05 | CAP. CERAMIC | R50 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C115 | C91-1315-05 | CAP. CERAMIC | R51 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C116 | C91-1315-05 | CAP. CERAMIC | R52 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C117 | CE04EW1C101H | CAP. ELECTRO | R53 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C118 | CE04EW1C101H | CAP. ELECTRO | R54 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C119 | CE04EW0J221H | CAP. ELECTRO | R55 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C120 | C91-1315-05 | CAP. CERAMIC | R56 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C121 | CE04EW1H010M | CAP. ELECTRO | R57 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C122 | CC45CH1H270J | CAP. CERAMIC | R58 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C123 | CC45CH1H270J | CAP. CERAMIC | R59 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C124 | CC45CH1H101J | CAP. CERAMIC | R60 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C125 | CC45CH1H101J | CAP. CERAMIC | R61 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C126 | C91-1315-05 | CAP. CERAMIC | R62 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C127 | CE04EW1C101H | CAP. ELECTRO | R63 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C128 | CC45CH1H270J | CAP. CERAMIC | R64 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C129 | CC45CH1H070D | CAP. CERAMIC | R65 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C130 | C91-1357-05 | CAP. METALIZED | R66 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C131 | C902NH102K | CAP. NYLAR | R67 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C132 | C91-1315-05 | CAP. CERAMIC | R68 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| C133 | C91-1315-05 | CAP. CERAMIC | R69 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C134 | C91-1357-05 | CAP. METALIZED | R70 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C135 | C91-1357-05 | CAP. METALIZED | R71 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C136 | NO USE | | R72 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C137 | CF92VIH472J | CAP. POLYESTER | R73 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C138 | NO USE | | R74 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C139 | CC45SL1H331J | CAP. CERAMIC | R75 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C140 | CC45SL1H331J | CAP. CERAMIC | R76 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| C141 | CC45CH1H220J | CAP. CERAMIC | R77 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| | | | R78 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| | | | R79 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| | | | R80 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| D1 | HA700 | DIODE | R81 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| D2 | HA700 | DIODE | R82 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| D3 | HA700 | DIODE | R83 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| D4 | NO USE | | R84 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| D5 | 1SS132 | DIODE | R85 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| D6 | 1SS132 | DIODE | R86 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| | | | R87 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| L2 | L79-0551-05 | FILTER | R88 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| L3 | L79-0551-05 | FILTER | R89 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| L4 | L40-2291-70 | FERRI INDUCTOR | R90 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| L5 | L40-2291-70 | FERRI INDUCTOR | R91 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| L6 | L40-1021-03 | FERRI INDUCTOR | R92 | R92-1480-05 | RES. LT3000 1.6K 5% 1/6W |
| L7 | L79-0553-05 | FILTER | R93 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| L8 | L40-2201-70 | FERRI INDUCTOR | R94 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R95 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| P26 | E40-7035-05 | PIN CONNECTOR | R96 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R97 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R98 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R99 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R100 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R101 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R102 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R103 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R104 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R105 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R106 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R107 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R108 | RD14BB2C131J | RES. CARBON 130 5% 1/6W |
| | | | R109 | RD14BB2C751J | RES. CARBON 750 5% 1/6W |
| | | | R110 | RN14BK2C7500F | RES. METAL FILM 750 1% 1/6W |
| | | | R111 | RN14BK2C3001F | RES. METAL FILM 3K 1% 1/6W |
| | | | R112 | RD14BB2C241J | RES. CARBON 240 5% 1/6W |
| | | | R113 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| | | | R114 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| | | | | | |
| | | | R117 | RD14BB2C432J | RES. CARBON 4.3K 5% 1/6W |
| | | | R118 | NO USE | |
| | | | R119 | RD14BB2C910J | RES. CARBON 91P 5% 1/6W |
| | | | R120 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|------------------------------|
| R121 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R122 | RD14BB2C134J | RES. CARBON 130K 5% 1/6W |
| R123 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R124 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R125 | R90-0286-05 | RES. NETWORK 4X4.7K |
| R126 | RD14BB2C683J | RES. CARBON 68K 5% 1/6W |
| R127 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R136 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R137 | RN14BK2C1003F | RES. METAL FILM 100K 1% 1/6W |
| R138 | NO USE | |
| R139 | RD14BB2C202J | RES. CARBON 2K 5% 1/6W |
| R140 | RD14BB2C202J | RES. CARBON 2K 5% 1/6W |
| R141 | NO USE | |
| R142 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R143 | R90-1147-05 | RES. NETWORK |
| R144 | R90-1147-05 | RES. NETWORK |
| R145 | R90-1146-05 | RES. NETWORK 75 |
| R146 | R90-1146-05 | RES. NETWORK 75 |
| R147 | R90-1146-05 | RES. NETWORK 75 |
| R148 | R90-1146-05 | RES. NETWORK 75 |
| R149 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R150 | RD14BB2C182J | RES. CARBON 1.8K 5% 1/6W |
| R151 | RD14BB2C331J | RES. CARBON 330 5% 1/6W |
| R152 | RD14BB2C912J | RES. CARBON 9.1K 5% 1/6W |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-----------------|---------------------------------|
| U1 | UPD703356J-85BG | IC, 16-BIT CPU |
| U2 | SN74ALS245N | IC, OCTAL BUS TRANSCEIVER(3-S) |
| U3 | SN74ALS245N | IC, OCTAL BUS TRANSCEIVER(3-S) |
| U4 | SN74ALS541N | IC, OCTAL 3-S BUFFER/LINE DRIVE |
| U5 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U6 | T93-0781-04 | PROGRAMMED ROM |
| U7 | T93-0782-04 | PROGRAMMED ROM |
| U8 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U9 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U10 | MB84256-10LL-SK | IC, S-RAM |
| U11 | MB84256-10LL-SK | IC, S-RAM |
| U12 | MB84256-10LL-SK | IC, S-RAM |
| U13 | MB84256-10LL-SK | IC, S-RAM |
| U14 | MB84256-10LL-SK | IC, S-RAM |
| U15 | MB84256-10LL-SK | IC, S-RAM |
| U16 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U17 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U18 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U19 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U20 | HC14066BCP | IC, QUAD ANALOG SW/QUAD MPX |
| U21 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U22 | LC3664ASL-10 | IC, CMOS 64K SRAM |
| U23 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U24 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U25 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U26 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U27 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U28 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U29 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U30 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U31 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U32 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U33 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|---------------------------------|
| U37 | SN74ALS393N | IC, 4-STATE BINARY COUNTER |
| U38 | SN74ALS393N | IC, 4-STATE BINARY COUNTER |
| U39 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U40 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U41 | SN74ALS352N | IC, DUAL 4-1 DATA SELECT./MPX |
| U42 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U43 | SN74ALS123N | IC, DUAL MONOSTABLE MULTIVIB. |
| U44 | MB3771 | IC, RESET |
| U50 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U51 | SN74ALS245AN | IC, OCTAL BUS BUFFER |
| U52 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U53 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U54 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U55 | SN74ALS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U56 | SN74ALS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U57 | SN74ALS534AN | IC, OCTAL D-F.F. (3-S) |
| U58 | NO USE | |
| U59 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U60 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U61 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U62 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U63 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U64 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U65 | HC14052BCP | IC, DUAL 4-CH ANALOG MPX/DE-MPX |
| U66 | HC14052BCP | IC, DUAL 4-CH ANALOG MPX/DE-MPX |
| U67 | SN74ALS365AN | IC, HEX BUS DRIVERS |
| U68 | DAC0808LCN | IC, 8-BIT D/A CONVERTER |
| U69 | HA17012PD | IC, 12-BIT D/A CONVERTER |
| U70 | HA17012PD | IC, 12-BIT D/A CONVERTER |
| U71 | HA17012PD | IC, 12-BIT D/A CONVERTER |
| U72 | LM6218N | IC, FAST SETTLING DUAL OP-AMP |
| U73 | NJH072BD | IC, JFET INPUT OP AMP |
| U74 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U75 | SN74ALS30AN | IC, 8-INPUT POSITIVE-NAND GATE |

| | | |
|-----|------------|---------------------|
| U78 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U79 | SN74ALS32N | IC, QUAD 2 INPUT OR |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|-------------------------------|
| U80 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U81 | SN74ALS31N | IC, DELAY ELEMENTS |
| U82 | SN74ALS04BN | IC, HEX INVERTERS |
| U83 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U84 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U85 | SN74AS74N | IC, DUAL D-F.F. (WITH PR&CLR) |
| U86 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U87 | NO USE | |
| U88 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U89 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U90 | CTHG011 | IC, GATE ARRAY |
| U91 | CTHG021 | IC, GATE ARRAY |
| U92 | CTHG031 | IC, GATE ARRAY |
| U93 | CTHG041 | IC, GATE ARRAY |
| U94 | NJH072BL | IC, JFET INPUT OP AMP |
| U95 | SN74ALS32N | IC, QUAD 2 INPUT OR |

| | | |
|-----|-------------|----------------------|
| VR1 | R12-1548-05 | RES. SEMI FIXED 2KB |
| VR2 | R12-1548-05 | RES. SEMI FIXED 2KB |
| VR3 | R12-3552-05 | RES. SEMI FIXED 20KB |

| | | |
|----|-------------|--------------------|
| X1 | L78-0117-05 | CERAMIC OSCILLATOR |
|----|-------------|--------------------|

DCS-9300 R/O UNIT

X77-1670-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|-------------|-----------------|------------------------------|
| E02-0143-05 | IC SOCKET | 28P |
| F15-0744-05 | BLIND PLATE | |
| J73-0028-12 | PCB (UNMOUNTED) | |
| W09-0408-05 | BATTERY | CR2354-1HF |
| B1 | | |
| C1 | CE04EWIC221M | CAP. ELECTRO 220 20% 16V |
| C2 | CE04EWIC221M | CAP. ELECTRO 220 20% 16V |
| C3 | CE04EWIC221M | CAP. ELECTRO 220 20% 16V |
| C4 | CE04EWIC221M | CAP. ELECTRO 220 20% 16V |
| C5 | CE04EWI1010M | CAP. ELECTRO 1 20% 50V |
| C6 | CE04EWI1010M | CAP. ELECTRO 1 20% 50V |
| C7 | CE04EWIC220M | CAP. ELECTRO 22 20% 16V |
| C8 | CE04EWIC220M | CAP. ELECTRO 22 20% 16V |
| C9 | CE04EWIC220M | CAP. ELECTRO 22 20% 16V |
| C10 | CE04EWIC470M | CAP. ELECTRO 47 20% 16V |
| C11 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C12 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C13 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C14 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V |
| C15 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C16 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C17 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C18 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C19 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C20 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C21 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C22 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C23 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C24 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C25 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V |
| C26 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C27 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C28 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C29 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C30 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C31 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C32 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C33 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C34 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C35 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C36 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C37 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C38 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C39 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C40 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C41 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C42 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C43 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C44 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C45 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C46 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C47 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C48 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C49 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C50 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C51 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C52 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C53 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C54 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C55 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C56 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C57 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C58 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C59 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C60 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C61 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C62 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION | REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|------------------------------|---------|--------------|------------------------------|
| C63 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C159 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C64 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C160 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C65 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C161 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C66 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C162 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C67 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C163 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C68 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C164 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C69 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C165 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C70 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C166 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C71 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C167 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C72 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C168 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C73 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C169 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C74 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C170 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C75 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C171 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C76 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C172 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C77 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C173 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C78 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C174 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C79 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C175 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C80 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C176 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C81 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C177 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C82 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C178 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C83 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C179 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C84 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V | C180 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C85 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C181 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C86 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C182 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C87 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C183 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C88 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C184 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C89 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C185 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C90 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C186 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C91 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C187 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C92 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C188 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C93 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C189 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C94 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C190 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C95 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C191 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C96 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V | C192 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C97 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C193 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C98 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C194 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C99 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C195 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C100 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C196 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| G101 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C197 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C102 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C198 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C103 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C199 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C104 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C200 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C105 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C201 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C106 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | C202 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C107 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V | C203 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C108 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C204 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C109 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C205 | CE04EW1H010M | CAP. ELECTRO 1 20% 50V |
| C110 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C206 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C111 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C207 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C112 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C208 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C113 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C209 | CF92V1H273J | CAP. POLYESTER 0.027 5% 50V |
| C114 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C210 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C115 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | C211 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V |
| C116 | CQ92NH1H153J | CAP. NYLAR 0.015 5% 50V | C212 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V |
| C117 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | C213 | CC45CH1H270J | CAP. CERAMIC 27P 5% 50V |
| C118 | C91-1362-05 | CAP. NETWORK 10X0.01 20% 50V | | | |
| C119 | CC45CH1H560J | CAP. CERAMIC 56P 5% 50V | G801 | C91-0769-05 | CAP. CERAMIC 0.01 20% 16V |
| C120 | CK45B1H102K | CAP. CERAMIC 1000P 10% 50V | G802 | C91-0769-05 | CAP. CERAMIC 0.01 20% 16V |
| C121 | CK45B1H102K | CAP. CERAMIC 1000P 10% 50V | G803 | CQ92NH1H473K | CAP. NYLAR 0.047 10% 50V |
| C122 | CK45B1H102K | CAP. CERAMIC 1000P 10% 50V | G804 | CC45SL1H331J | CAP. CERAMIC 330P 5% 50V |
| C123 | CK45B1H102K | CAP. CERAMIC 1000P 10% 50V | G805 | CC45SL1H471J | CAP. CERAMIC 470P 5% 50V |
| C124 | CK45B1H102K | CAP. CERAMIC 1000P 10% 50V | | | |
| C125 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V | C901 | CC45CH1H470J | CAP. CERAMIC 47P 5% 50V |
| C126 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V | | | |
| C127 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | D1 | 1SS132 | DIODE |
| C128 | CC45CH1H150J | CAP. CERAMIC 15P 5% 50V | D2 | 1SS132 | DIODE |
| C129 | CC45CH1H150J | CAP. CERAMIC 15P 5% 50V | D3 | 1SS132 | DIODE |
| C130 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | D4 | 1SS132 | DIODE |
| C131 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | D5 | 1SS132 | DIODE |
| C132 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | D6 | 1SS132 | DIODE |
| C133 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | | | |
| C134 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | JP1 | R92-1061-05 | JUMPING RES. ZERO OHM (5MM) |
| C135 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | JP2 | R92-1061-05 | JUMPING RES. ZERO OHM (5MM) |
| C136 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | JP3 | R92-1061-05 | JUMPING RES. ZERO OHM (5MM) |
| C137 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | JP4 | NO USE | |
| C138 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | JP5 | R92-1061-05 | JUMPING RES. ZERO OHM (5MM) |
| C139 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | | | |
| C140 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | L1 | L40-1021-03 | FERRI INDUCTOR 1NH 10% |
| C141 | CC45CH1H560J | CAP. CERAMIC 56P 5% 50V | L2 | L79-0551-05 | FILTER |
| C142 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | L3 | L79-0551-05 | FILTER |
| C143 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | L4 | L79-0551-05 | FILTER |
| C144 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | L5 | L79-0551-05 | FILTER |
| C145 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | L6 | L40-1021-03 | FERRI INDUCTOR 1NH 10% |
| C146 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | | | |
| C147 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | P27 | E40-7398-05 | PIN CONNECTOR 20P |
| C148 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | P28 | E40-7397-05 | PIN CONNECTOR 40P |
| C149 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | | | |
| C150 | CK45B1H102K | CAP. CERAMIC 1000P 10% 50V | P52 | E40-7035-05 | PIN CONNECTOR 40P |
| C151 | CF92V1H273J | CAP. POLYESTER 0.027 5% 50V | P53 | E40-7226-05 | PIN CONNECTOR 64P |
| C152 | C91-1361-05 | CAP. NYLAR 0.01 5% 100V | | | |
| C153 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V | R1 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| C154 | CC45CH1H101J | CAP. CERAMIC 100P 5% 50V | R2 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| C155 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | R3 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| C156 | CC45SL1H221J | CAP. CERAMIC 220P 5% 50V | R4 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| C157 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | R5 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| C158 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V | R6 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|---------------------------------|
| U11 | HA17012PB | IC, 12-BIT D/A CONVERTER |
| U12 | DAC0808LCN | IC, 8-BIT D/A CONVERTER |
| U13 | DAC0808LCN | IC, 8-BIT D/A CONVERTER |
| U14 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U15 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U16 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U17 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U18 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U19 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U20 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U21 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U22 | NC14051BCP | IC, 8-CH ANALOG MPX/DE-MPX |
| U23 | NC14066BCP | IC, QUAD ANALOG SW/QUAD MPX |
| U24 | PST518B | IC, RESET |
| U25 | LX311N | IC, VOLTAGE COMPARATOR |
| U26 | HA17555PS | IC, TIMER |
| U27 | HA17555PS | IC, TIMER |
| U28 | NJM556D | IC, DUAL TIMER |
| U29 | LHG218N | IC, FAST SETTLING DUAL OP-AMP |
| U30 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U31 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U32 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U33 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U34 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U35 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U36 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U37 | NJM074D | IC, QUAD JFET INPUT OP AMP |
| U38 | SN74ALS139N | IC, DUAL 2-4 DECODER/DE-MPX |
| U39 | SN74ALS174N | IC, HEX D-FFS WITH CLEAR |
| U40 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U41 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U42 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U43 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U44 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U45 | SN74ALS174N | IC, HEX D-FFS WITH CLEAR |
| U46 | NO USE | |
| U47 | SN74ALS04BN | IC, HEX INVERTERS |
| U48 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U49 | SN74ALS27N | IC, TRIPPLE 3-INPUT NOR GATE |
| U50 | SN74ALS393N | IC, 4-STATE BINARY COUNTER |
| U51 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U52 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U53 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U54 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U55 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U56 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U57 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U58 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U59 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U60 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U61 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U62 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U63 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U64 | SN74ALS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U65 | SN74ALS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U66 | SN74ALS123N | IC, DUAL MONOSTABLE MULTIVIB. |
| U67 | TC74HC08AP | IC, QUAD 2-INPUT AND GATE |
| U68 | TC74HC86AP | IC, QUAD EXCLUSIVE OR GATE |
| U69 | TC74HC08AP | IC, QUAD 2-INPUT AND GATE |
| U70 | TC74HC86AP | IC, QUAD EXCLUSIVE OR GATE |
| U71 | TC74HC08AP | IC, QUAD 2-INPUT AND GATE |
| U72 | TC74HC86AP | IC, QUAD EXCLUSIVE OR GATE |
| U73 | SN74ALS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U74 | SN74ALS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U75 | SN74ALS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U76 | SN74ALS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U77 | SN74ALS30AN | IC, 8-INPUT POSITIVE-NAND GATE |
| U78 | SN74ALS30AN | IC, 8-INPUT POSITIVE-NAND GATE |
| U79 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U80 | SN74ALS31N | IC, DELAY ELEMENTS |
| U81 | SN74ALS04BN | IC, HEX INVERTERS |
| U82 | SN74ALS393N | IC, 4-STATE BINARY COUNTER |
| U83 | SN74ALS393N | IC, 4-STATE BINARY COUNTER |
| U84 | SN74ALS393N | IC, 4-STATE BINARY COUNTER |
| U85 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U86 | SN74ALS688N | IC, 8-BIT MAGNITUDE COMPARATORS |
| U87 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U88 | SN74ALS123N | IC, DUAL MONOSTABLE MULTIVIB. |
| U89 | SN74ALS04BN | IC, HEX INVERTERS |
| U90 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U91 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U92 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U93 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U94 | SN74ALS00AN | IC, QUAD 2 INPUT NAND GATE |
| U95 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U96 | TC74HC04AP | IC, HEX INVERTER |
| X1 | L78-0119-05 | CERAMIC OSCILLATOR |
| X2 | L78-0118-05 | CERAMIC OSCILLATOR |
| X3 | L77-1229-05 | CRYSTAL RESONATOR |

DCS-9320 R/O UNIT

X77-1670-02

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|------------------------------|
| | E02-0143-05 | IC SOCKET 28P |
| | F15-0744-05 | BLIND PLATE |
| | J73-0028-12 | PCB (UNMOUNTED) |
| B1 | W09-0408-05 | BATTERY, CR2354-1HF |
| C1 | GE04EWIC221H | CAP. ELECTRO 220 20% 16V |
| C2 | GE04EWIC221H | CAP. ELECTRO 220 20% 16V |
| C3 | GE04EWIC221H | CAP. ELECTRO 220 20% 16V |
| C4 | GE04EWIC221H | CAP. ELECTRO 220 20% 16V |
| C5 | GE04EW1H010M | CAP. ELECTRO 1 20% 50V |
| C6 | GE04EW1H010M | CAP. ELECTRO 1 20% 50V |
| C7 | GE04EWIC220H | CAP. ELECTRO 22 20% 16V |
| C8 | GE04EWIC220H | CAP. ELECTRO 22 20% 16V |
| C9 | GE04EWIC220H | CAP. ELECTRO 22 20% 16V |
| C10 | GE04EWIC470H | CAP. ELECTRO 47 20% 16V |
| C11 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C12 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C13 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C14 | CC45CH11101J | CAP. CERAMIC 100P 5% 50V |
| C15 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C16 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C17 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C18 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C19 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C20 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C21 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C22 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C23 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C24 | C91-1361-05 | CAP. NYLON 0.01 5% 100V |
| C25 | CC45CH11101J | CAP. CERAMIC 100P 5% 50V |
| C26 | C91-1361-05 | CAP. NYLON 0.01 5% 100V |
| C27 | C91-1361-05 | CAP. NYLON 0.01 5% 100V |
| C28 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C29 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C30 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C31 | C91-1315-05 | CAP. CERAMIC 0.1 80/-20% 50V |
| C32 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C33 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C34 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C35 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C36 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C37 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C38 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C39 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C40 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C41 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C42 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C43 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C44 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C45 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C46 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C47 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C48 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C49 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C50 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C51 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C52 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C53 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C54 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C55 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C56 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C57 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C58 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C59 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C60 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C61 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C62 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C63 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C64 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C65 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C66 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C67 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C68 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C69 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C70 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C71 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C72 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C73 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C74 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C75 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C76 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C77 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C78 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C79 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C80 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C81 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C82 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C83 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C84 | CC45CH11101J | CAP. CERAMIC 100P 5% 50V |
| C85 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C86 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C87 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C88 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |
| C89 | C91-1357-05 | CAP. METALIZED 0.1 5% 100V |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|---------------------------------|
| U49 | SN74ALS27N | IC, TRIPPLE 3-INPUT NOR GATE |
| U50 | SN74LS393N | IC, 4-STATE BINARY COUNTER |
| U51 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U52 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U53 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U54 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U55 | SN74ALS244BN | IC, OCTAL BUS BUFFER |
| U56 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U57 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U58 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U59 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U60 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U61 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U62 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U63 | SN74ALS374AN | IC, OCTAL D-F.F. |
| U64 | SN74ALS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U65 | SN74ALS595N | IC, 8-BIT SHIFT REGISTERS/LATCH |
| U66 | SN74ALS123N | IC, DUAL MONOSTABLE MULTIVIB. |
| U67 | TC74HC08AP | IC, QUAD 2-INPUT AND GATE |
| U68 | TC74HC86AP | IC, QUAD EXCLUSIVE OR GATE |
| U69 | TC74HC08AP | IC, QUAD 2-INPUT AND GATE |
| U70 | TC74HC86AP | IC, QUAD EXCLUSIVE OR GATE |
| U71 | TC74HC08AP | IC, QUAD 2-INPUT AND GATE |
| U72 | TC74HC86AP | IC, QUAD EXCLUSIVE OR GATE |
| U73 | SN74LS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U74 | SN74LS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U75 | SN74LS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U76 | SN74LS107AN | IC, DUAL J-K F.F. WITH CLEAR |
| U77 | SN74ALS30AN | IC, 8-INPUT POSITIVE-NAND GATE |
| U78 | SN74ALS30AN | IC, 8-INPUT POSITIVE-NAND GATE |
| U79 | SN74ALS138N | IC, 3-8 DECODER/DE-MPX |
| U80 | SN74ALS31N | IC, DELAY ELEMENTS |
| U81 | SN74ALS04BN | IC, HEX INVERTERS |
| U82 | SN74LS393N | IC, 4-STATE BINARY COUNTER |
| U83 | SN74LS393N | IC, 4-STATE BINARY COUNTER |
| U84 | SN74LS393N | IC, 4-STATE BINARY COUNTER |
| U85 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U86 | SN74ALS688N | IC, 8-BIT MAGNITUDE COMPARATORS |
| U87 | SN74ALS74AN | IC, DUAL D-F.F. (WITH PR&CLR) |
| U88 | SN74ALS123N | IC, DUAL MONOSTABLE MULTIVIB. |
| U89 | SN74ALS04BN | IC, HEX INVERTERS |
| U90 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U91 | SN74ALS08N | IC, QUAD 2 INPUT AND GATE |
| U92 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U93 | SN74ALS32N | IC, QUAD 2 INPUT OR |
| U94 | SN74ALS00AN | IC, QUAD 2 INPUT NAND GATE |
| U95 | SN74ALS157AN | IC, QUAD 2-1 DATA SELECT./MPX |
| U96 | TC74HC04AP | IC, HEX INVERTER |
| X1 | L78-0119-05 | CERAMIC OSCILLATOR |
| X2 | L78-0118-05 | CERAMIC OSCILLATOR |
| X3 | L77-1220-05 | CRYSTAL RESONATOR |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|------------------------------|
| C221 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C222 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C229 | CC73FCH1H151J | CAP. CERAMIC 150P 5% 50V |
| C501 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C502 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C503 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C504 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C505 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C506 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C507 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C508 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C509 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C510 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C511 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C512 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C513 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C514 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C515 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C516 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C517 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C518 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C519 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C520 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C521 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C522 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C523 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C801 | CC45CH1H010C | CAP. CERAMIC 1P 0.25P 50V |
| C802 | CC45CH1H020C | CAP. CERAMIC 2P 0.25P 50V |
| C803 | CC45CH1H010C | CAP. CERAMIC 1P 0.25P 50V |
| C804 | CC45CH1H020C | CAP. CERAMIC 2P 0.25P 50V |
| C805 | CC45SL1H561J | CAP. CERAMIC 560P 5% 50V |
| C912 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C922 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C927 | CC73FCH1H121J | CAP. CERAMIC 120P 5% 50V |
| C928 | CC73FCH1H121J | CAP. CERAMIC 120P 5% 50V |
| C933 | CC73FCH1H681J | CAP. CERAMIC 680P 5% 50V |
| C934 | CC73FCH1H681J | CAP. CERAMIC 680P 5% 50V |
| D101 | MA704 | DIODE |
| D102 | MA704 | DIODE |
| D103 | NO USE | |
| D104 | 1SS187 | DIODE |
| D201 | MA704 | DIODE |
| D202 | MA704 | DIODE |
| D203 | NO USE | |
| D204 | 1SS187 | DIODE |

A/D UNIT

X78-1070-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|------------------------------|
| | J73-0025-12 | PCB (UNMOUNTED) |
| C101 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C102 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C103 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C104 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C105 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C106 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C107 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C108 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C109 | CK73FB1H102K | CAP. CERAMIC 1000P 10% 50V |
| C110 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C111 | NO USE | |
| C112 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C113 | NO USE | |
| C114 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C115 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C118 | CK73FB1H102K | CAP. CERAMIC 1000P 10% 50V |
| C121 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C122 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C129 | CC73FCH1H151J | CAP. CERAMIC 150P 5% 50V |
| C201 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C202 | CE04EWIC470N | CAP. ELECTRO 47 20% 16V |
| C203 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C204 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C205 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C206 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C207 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C208 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C209 | CK73FB1H102K | CAP. CERAMIC 1000P 10% 50V |
| C210 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C211 | NO USE | |
| C212 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C213 | NO USE | |
| C214 | CC73FCH1H101J | CAP. CERAMIC 100P 5% 50V |
| C215 | CK73FFH104Z | CAP. CERAMIC 0.1 20/-20% 50V |
| C218 | CK73FB1H102K | CAP. CERAMIC 1000P 10% 50V |

| | | |
|------|--------------|-------------------|
| J1 | E23-0563-05 | TEST PIN |
| J2 | E23-0563-05 | TEST PIN |
| J3 | E23-0563-05 | TEST PIN |
| J4 | E23-0563-05 | TEST PIN |
| J5 | NO USE | |
| J6 | E23-0563-05 | TEST PIN |
| J7 | E23-0563-05 | TEST PIN |
| J8 | E23-0563-05 | TEST PIN |
| J9 | E23-0563-05 | TEST PIN |
| J10 | E23-0563-05 | TEST PIN |
| J11 | E23-0563-05 | TEST PIN |
| J12 | E23-0563-05 | TEST PIN |
| J13 | E23-0563-05 | TEST PIN |
| L101 | L79-0553-05 | FILTER |
| L102 | L79-0553-05 | FILTER |
| L105 | L79-0553-05 | FILTER |
| L106 | L79-0553-05 | FILTER |
| L201 | L79-0553-05 | FILTER |
| L202 | L79-0553-05 | FILTER |
| L205 | L79-0553-05 | FILTER |
| L206 | L79-0553-05 | FILTER |
| L301 | L79-0553-05 | FILTER |
| L302 | L79-0553-05 | FILTER |
| L303 | L79-0553-05 | FILTER |
| P1 | E40-3237-05 | PIN CONNECTOR 2P |
| P2 | E40-3237-05 | PIN CONNECTOR 2P |
| P30 | E40-7237-05 | PIN CONNECTOR 20P |
| P31 | E40-7237-05 | PIN CONNECTOR 20P |
| P56 | E40-7238-05 | PIN CONNECTOR 20P |
| P57 | E40-7238-05 | PIN CONNECTOR 20P |
| Q102 | 2SA1462(Y34) | TR. SI, PNP |
| Q202 | 2SA1462(Y34) | TR. SI, PNP |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|---------------------------------|
| R101 | RK73EB2B101J | RES. METALGLACE 100 5% 1/8W |
| R102 | RK73EB2B100J | RES. METALGLACE 10 5% 1/8W |
| R103 | RK73EB2B100J | RES. METALGLACE 10 5% 1/8W |
| R104 | RK73EB2B364J | RES. METALGLACE 360K 5% 1/8W |
| R105 | RK73EB2B510J | RES. METALGLACE 51 5% 1/8W |
| R106 | RK73EB2B331J | RES. METALGLACE 330 5% 1/8W |
| R107 | RK73EB2B331J | RES. METALGLACE 330 5% 1/8W |
| R108 | R90-1128-05 | RES. NETWORK 4X620 |
| R109 | R90-1128-05 | RES. NETWORK 4X620 |
| R110 | RK73EB2B391J | RES. METALGLACE 390 5% 1/8W |
| R111 | RK73EB2B391J | RES. METALGLACE 390 5% 1/8W |
| R112 | RK73EB2B101J | RES. METALGLACE 100 5% 1/8W |
| R113 | RK73EB2B101J | RES. METALGLACE 100 5% 1/8W |
| R114 | RK73EB2B121J | RES. METALGLACE 120 5% 1/8W |
| R118 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R119 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R120 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R121 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R122 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R123 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R124 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R125 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R126 | RK73EB2B751J | RES. METALGLACE 750 5% 1/8W |
| R127 | RK73EB2B332J | RES. METALGLACE 3.3K 5% 1/8W |
| R128 | RK73EB2B681J | RES. METALGLACE 680 5% 1/8W |
| R201 | RK73EB2B101J | RES. METALGLACE 100 5% 1/8W |
| R202 | RK73EB2B100J | RES. METALGLACE 10 5% 1/8W |
| R203 | RK73EB2B100J | RES. METALGLACE 10 5% 1/8W |
| R204 | RK73EB2B364J | RES. METALGLACE 360K 5% 1/8W |
| R205 | RK73EB2B510J | RES. METALGLACE 51 5% 1/8W |
| R206 | RK73EB2B331J | RES. METALGLACE 330 5% 1/8W |
| R207 | RK73EB2B331J | RES. METALGLACE 330 5% 1/8W |
| R208 | R90-1128-05 | RES. NETWORK 4X620 |
| R209 | R90-1128-05 | RES. NETWORK 4X620 |
| R210 | RK73EB2B391J | RES. METALGLACE 390 5% 1/8W |
| R211 | RK73EB2B391J | RES. METALGLACE 390 5% 1/8W |
| R212 | RK73EB2B101J | RES. METALGLACE 100 5% 1/8W |
| R213 | RK73EB2B101J | RES. METALGLACE 100 5% 1/8W |
| R214 | RK73EB2B121J | RES. METALGLACE 120 5% 1/8W |
| R218 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R219 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R220 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R221 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R222 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R223 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R224 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R225 | RK73EB2B220J | RES. METALGLACE 22 5% 1/8W |
| R226 | RK73EB2B751J | RES. METALGLACE 750 5% 1/8W |
| R227 | RK73EB2B332J | RES. METALGLACE 3.3K 5% 1/8W |
| R228 | RK73EB2B681J | RES. METALGLACE 680 5% 1/8W |
| R921 | RK73EB2B150J | RES. METALGLACE 15 5% 1/8W |
| R922 | RK73EB2B150J | RES. METALGLACE 15 5% 1/8W |
| TC101 | C05-0473-05 | CAP. CERAMIC 120P |
| TC102 | C05-0473-05 | CAP. CERAMIC 120P |
| TC201 | C05-0473-05 | CAP. CERAMIC 120P |
| TC202 | C05-0473-05 | CAP. CERAMIC 120P |
| U1 | NC10H116M | IC, TRIPLE LINE RECEIVER |
| U101 | KMC09 | IC, LINEAR |
| U102 | CXA1396D | IC, A/D CONVERTER |
| U103 | NC10H125M | IC, QUAD TTL TO HECL TRANSIATOR |
| U104 | NC10H125M | IC, QUAD TTL TO HECL TRANSIATOR |
| U105 | DTM6010 | IC, GATE ARRAY |
| U106 | CXK5863M-25 | IC, S-RAM |
| U107 | CXK5863M-25 | IC, S-RAM |
| U108 | CXK5863M-25 | IC, S-RAM |
| U109 | CXK5863M-25 | IC, S-RAM |
| U201 | KMC09 | IC, LINEAR |
| U202 | CXA1396D | IC, A/D CONVERTER |
| U203 | NC10H125M | IC, QUAD TTL TO HECL TRANSIATOR |
| U204 | NC10H125M | IC, QUAD TTL TO HECL TRANSIATOR |
| U205 | DTM6010 | IC, GATE ARRAY |
| U206 | CXK5863M-25 | IC, S-RAM |
| U207 | CXK5863M-25 | IC, S-RAM |
| U208 | CXK5863M-25 | IC, S-RAM |
| U209 | CXK5863M-25 | IC, S-RAM |
| VR101 | R12-1529-05 | RES. SEMI FIXED 20 |
| VR201 | R12-1529-05 | RES. SEMI FIXED 20 |

GP-IB UNIT

X79-1120-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|-----------------------------|
| BZ101 | J73-0027-12 | PCB (UNMOUNTED) |
| | T99-0805-05 | BUZZER |
| C1 | C90-3060-05 | CAP. ELECTRO 2200 20% 10V |
| C2 | C90-3060-05 | CAP. ELECTRO 2200 20% 10V |
| C3 | C90-3060-05 | CAP. ELECTRO 2200 20% 10V |
| C4 | C90-3060-05 | CAP. ELECTRO 2200 20% 10V |
| C5 | C90-3059-05 | CAP. ELECTRO 1000 20% 25V |
| C6 | C90-3059-05 | CAP. ELECTRO 1000 20% 25V |
| C7 | C90-3059-05 | CAP. ELECTRO 1000 20% 25V |
| C8 | C90-3059-05 | CAP. ELECTRO 1000 20% 25V |
| C9 | C90-3059-05 | CAP. ELECTRO 1000 20% 25V |
| C10 | C90-3059-05 | CAP. ELECTRO 1000 20% 25V |
| C11 | C90-3061-05 | CAP. ELECTRO 68 1% 100V |
| C12 | C90-3061-05 | CAP. ELECTRO 68 1% 100V |
| C13 | CE04W2E100M | CAP. ELECTRO 10 20% 250V |
| C14 | CE04W2E100M | CAP. ELECTRO 10 20% 250V |
| C15 | CE04EW1E101M | CAP. ELECTRO 100 20% 25V |
| C101 | CE04EW1C220M | CAP. ELECTRO 22 20% 16V |
| C102 | CE04EW1C100M | CAP. ELECTRO 10 20% 16V |
| C103 | CE04EW1C220M | CAP. ELECTRO 22 20% 16V |
| C104 | CE04EW1C220M | CAP. ELECTRO 22 20% 16V |
| C105 | CE04EW1C100M | CAP. ELECTRO 10 20% 16V |
| C106 | C91-1357-05 | CAP. METALIZED 0.1 10% 100V |
| C107 | C91-1357-05 | CAP. METALIZED 0.1 10% 100V |
| C108 | C91-1357-05 | CAP. METALIZED 0.1 10% 100V |
| C109 | C91-1357-05 | CAP. METALIZED 0.1 10% 100V |
| C110 | C91-1357-05 | CAP. METALIZED 0.1 10% 100V |
| D1 | MTZ10JC | DIODE, ZENER 9.95V |
| D2 | MTZ10JC | DIODE, ZENER 9.95V |
| D3 | MTZ5.1JB | DIODE, ZENER 5.07V |
| D101 | 1SS132 | DIODE |
| D102 | 1SS132 | DIODE |
| J101 | R92-1061-05 | JUMPING RES. ZERO OHM (5MM) |
| JW101 | E38-0469-05 | WIRE ASS'Y |
| JW102 | E38-0470-05 | WIRE ASS'Y |
| L1 | L33-0813-05 | CHOKE COIL 10UH |
| L2 | L33-0813-05 | CHOKE COIL 10UH |
| L3 | L33-0813-05 | CHOKE COIL 10UH |
| L4 | L33-0813-05 | CHOKE COIL 10UH |
| L5 | L33-0814-05 | CHOKE COIL 22UH |
| L6 | L33-0814-05 | CHOKE COIL 22UH |
| L7 | L33-0815-05 | CHOKE COIL 470UH |
| L8 | L33-0815-05 | CHOKE COIL 470UH |
| P19 | E40-5070-05 | PIN CONNECTOR 13P |
| P20 | E40-5068-05 | PIN CONNECTOR 11P |
| P21 | E40-3241-05 | PIN CONNECTOR 6P |
| P22 | NO USE | |
| P23 | E40-3237-05 | PIN CONNECTOR 2P |
| P24 | E40-5070-05 | PIN CONNECTOR 13P |
| P25 | E40-5068-05 | PIN CONNECTOR 11P |
| P29 | E40-7230-05 | PIN CONNECTOR 34P |
| P101 | E40-3240-05 | PIN CONNECTOR 5P |
| P102 | E40-7036-05 | PIN CONNECTOR 20P |
| P103 | E40-3240-05 | PIN CONNECTOR 5P |
| P104 | E40-7231-05 | PIN CONNECTOR 2P |
| P105 | E58-0613-05 | PIN CONNECTOR 24P |
| Q1 | 2SB1133(R) | TR. SI, PNP |
| Q2 | 2SD1666(R) | TR. SI, NPN |
| Q101 | 2SC2785(F) | TR. SI, NPN |
| R1 | RD14KB3F120J | RES. CARBON 12 5% 3W |
| R2 | RD14KB3F120J | RES. CARBON 12 5% 3W |
| R3 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R4 | RD14BK2C2002F | RES. METAL FILM 20K 1% 1/6W |
| R5 | RD14BK2C2002F | RES. METAL FILM 20K 1% 1/6W |
| R6 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R7 | RD14BB2C221J | RES. CARBON 220 5% 1/6W |
| R8 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R9 | RD14BB2C682J | RES. CARBON 6.8K 5% 1/6W |
| R10 | RD14BB2C682J | RES. CARBON 6.8K 5% 1/6W |
| R101 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W |
| R102 | RD14BB2C562J | RES. CARBON 5.6K 5% 1/6W |
| R103 | R90-1126-05 | RES. NETWORK 8X1M |
| R104 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R105 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R106 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R107 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R108 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| S101 | S62-0608-05 | DIP SWITCH |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|-------------------------------|
| U1 | NJM4556L | IC, DUAL HIGH CURRENT OP AMP |
| U101 | HAX232EPE | IC, RS-232C DRIVERS/RECEIVERS |
| U102 | SN75160BN | IC, OCTAL GP-IB TRANSCEIVER |
| U103 | SN75161BN | IC, OCTAL GP-IB TRANSCEIVER |
| U104 | TC74HC245AP | IC, OCTAL BUS TRANSCEIVER |
| U105 | UPD7210C | IC, GP-IB CONTROLLER |
| VR1 | R12-1551-05 | RES. SEMI FIXED 1KB |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|--------------------|
| P5 | E40-3238-05 | PIN CONNECTOR 3P |
| P8 | E40-7037-05 | PIN CONNECTOR 26P |
| P9 | E40-3238-05 | PIN CONNECTOR 3P |
| P10 | E40-3238-05 | PIN CONNECTOR 3P |

| | | |
|-----|--------------|-------------|
| Q1 | 2SC3779(D) | TR. SI, NPN |
| Q2 | 2SC3779(D) | TR. SI, NPN |
| Q3 | 2SC3779(D) | TR. SI, NPN |
| Q4 | 2SC3779(D) | TR. SI, NPN |
| Q5 | 2SA1161 | TR. SI, PNP |
| Q6 | 2SA1161 | TR. SI, PNP |
| Q7 | 2SA1161 | TR. SI, PNP |
| Q8 | 2SA1161 | TR. SI, PNP |
| Q9 | 2SC3779(D) | TR. SI, NPN |
| Q10 | 2SC3779(D) | TR. SI, NPN |
| Q11 | 2SC3779(D) | TR. SI, NPN |
| Q12 | 2SC3779(D) | TR. SI, NPN |
| Q13 | 2SC1164(O)*S | TR. SI, NPN |
| Q14 | 2SC1164(O)*S | TR. SI, NPN |

FINAL UNIT

X80-1140-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|-----------------------------|
| | F01-0891-03 | HEAT SINK |
| | F02-0502-04 | HEAT SINK |
| | J30-0605-05 | SPACER |
| | J73-0023-13 | PCB (UNMOUNTED) |
| | L92-0110-05 | FERRITE BEADS |
| | N09-0623-04 | SCREW, SENS PAN HD N3X8 |
| | N89-3008-41 | SCREW, BINDING TAPTITE 3X8 |
| | R92-1061-05 | JUMPING RES. ZERO OHM (5HM) |
| C1 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C2 | C91-1275-05 | CAP. ELECTRO 33000 5.5V |
| C3 | C91-1275-05 | CAP. ELECTRO 33000 5.5V |
| C4 | CK45FB1H472K | CAP. CERAMIC 4700P 10% 50V |
| C5 | CE04HW1E220H | CAP. ELECTRO 22 20% 25V |
| C6 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |

| | | |
|------|--------------|-------------|
| Q101 | 2SC3315(C) | TR. SI, NPN |
| Q102 | 2SC3315(C) | TR. SI, NPN |
| Q103 | 2SC3315(C) | TR. SI, NPN |
| Q104 | 2SC3315(C) | TR. SI, NPN |
| Q105 | 2SA1005(K) | TR. SI, PNP |
| Q106 | 2SA1005(K) | TR. SI, PNP |
| Q107 | 2SA1005(K) | TR. SI, PNP |
| Q108 | 2SA1005(K) | TR. SI, PNP |
| Q109 | 2SC3354(S,T) | TR. SI, NPN |
| Q110 | 2SC3354(S,T) | TR. SI, NPN |
| Q111 | 2SA1206(K) | TR. SI, PNP |
| Q112 | 2SC3354(S,T) | TR. SI, NPN |
| Q113 | 2SC3354(S,T) | TR. SI, NPN |
| Q114 | 2SC3600(E,F) | TR. SI, NPN |
| Q115 | 2SC3600(E,F) | TR. SI, NPN |
| Q116 | 2SA1406(E,F) | TR. SI, PNP |
| Q117 | 2SA1406(E,F) | TR. SI, PNP |
| Q118 | 2SA1206(K) | TR. SI, PNP |

| | | |
|-----|---------------|--------------------------|
| C9 | CC45FCH1H270J | CAP. CERAMIC 27P 5% 50V |
| C10 | CC45FCH1H270J | CAP. CERAMIC 27P 5% 50V |
| C11 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C12 | NO USE | |
| C13 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C14 | CC45FSL1H391J | CAP. CERAMIC 390P 5% 50V |
| C15 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |

| | | |
|-----|---------------|-----------------------------|
| R1 | RN14BK2C1000F | RES. METAL FILM 100 1% 1/6W |
| R2 | RN14BK2C1000F | RES. METAL FILM 100 1% 1/6W |
| R3 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R4 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R5 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R6 | RD14BB2C432J | RES. CARBON 4.3K 5% 1/6W |
| R7 | RD14BB2C432J | RES. CARBON 4.3K 5% 1/6W |
| R8 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R9 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R10 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R11 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R12 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R13 | RD14BB2C303J | RES. CARBON 30K 5% 1/6W |
| R14 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R15 | RN14BK2C2700F | RES. METAL FILM 270 1% 1/6W |
| R16 | RN14BK2C2700F | RES. METAL FILM 270 1% 1/6W |
| R17 | RN14BK2C2700F | RES. METAL FILM 270 1% 1/6W |

| | | |
|------|---------------|-----------------------------|
| C98 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C103 | CC45FCH1H020C | CAP. CERAMIC 2P 0.25P 50V |
| C104 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C105 | CK45FB2H472K | CAP. CERAMIC 4700P 10% 500V |

| | | |
|-----|---------------|------------------------------|
| R20 | RN14BK2C1200F | RES. METAL FILM 120 1% 1/6W |
| R21 | RN14BK2C1200F | RES. METAL FILM 120 1% 1/6W |
| R22 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R23 | RD14BB2C681J | RES. CARBON 680 5% 1/6W |
| R24 | RD14BB2C821J | RES. CARBON 820 5% 1/6W |
| R25 | RN14BK2C1801F | RES. METAL FILM 1.8K 1% 1/6W |
| R26 | RN14BK2C1801F | RES. METAL FILM 1.8K 1% 1/6W |
| R27 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R28 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R29 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R30 | RD14BB2C471J | RES. CARBON 470 5% 1/6W |
| R31 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R32 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R33 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R34 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R35 | RN14BK2E6880F | RES. METAL FILM 68.0 1% 1/4W |
| R36 | RN14BK2E6880F | RES. METAL FILM 68.0 1% 1/4W |
| R37 | RN14BK2C1500F | RES. METAL FILM 150 1% 1/6W |
| R38 | NO USE | |
| R39 | RD14BB2C203J | RES. CARBON 20K 5% 1/6W |

| | | |
|------|---------------|------------------------------|
| C108 | CC45FCH1H070D | CAP. CERAMIC 7P 0.5P 50V |
| C109 | CC45FCH2H010C | CAP. CERAMIC 1P 0.25P 500V |
| C110 | CC45FCH2H0R5C | CAP. CERAMIC 0.5P 0.25P 500V |
| C111 | C91-1359-05 | CAP. METALIZED 0.01 10% 250V |
| C112 | C91-1359-05 | CAP. METALIZED 0.01 10% 250V |
| C113 | C91-1360-05 | CAP. METALIZED 0.1 10% 250V |
| C114 | C91-1360-05 | CAP. METALIZED 0.1 10% 250V |
| C115 | CC45FCH1H040C | CAP. CERAMIC 4P 0.25P 50V |
| C116 | CE04HW1E220H | CAP. ELECTRO 22 20% 25V |

| | | |
|-----|--------------|---------------------------|
| R40 | NO USE | |
| R41 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R42 | RD14BB2C121J | RES. CARBON 120 5% 1/6W |
| R43 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R44 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R45 | RD14BB2E150J | RES. CARBON 15 5% 1/4W |
| R46 | RD14BB2E150J | RES. CARBON 15 5% 1/4W |
| R47 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R48 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R49 | NO USE | |
| R50 | R92-1420-05 | RES. METAL FILM 510 5% 7W |
| R51 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R52 | R92-1420-05 | RES. METAL FILM 510 5% 7W |
| R53 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R54 | NO USE | |
| R55 | RD14BB2C361J | RES. CARBON 360 5% 1/6W |
| R56 | RD14BB2C361J | RES. CARBON 360 5% 1/6W |

| | | |
|------|---------------|--------------------------|
| C120 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C121 | CC45FCH1H070D | CAP. CERAMIC 7P 0.5P 50V |
| C122 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |

| | | |
|------|--------------|-----------------------------|
| C301 | CE04EW1C331H | CAP. ELECTRO 330 20% 16V |
| C302 | CE04EW1C331H | CAP. ELECTRO 330 20% 16V |
| C303 | NO USE | |
| C304 | CE04EW2A220H | CAP. ELECTRO 22 20% 100V |
| C305 | CE04EW2E4R7M | CAP. ELECTRO 4.7 20% 250V |
| C306 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C307 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C308 | NO USE | |
| C309 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C310 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C311 | NO USE | |
| C312 | CK45FB2H472K | CAP. CERAMIC 4700P 10% 500V |
| C313 | NO USE | |
| C314 | CK45FB2H472K | CAP. CERAMIC 4700P 10% 500V |
| C315 | CK45FB2H472K | CAP. CERAMIC 4700P 10% 500V |

| | | |
|------|---------------|----------------------------|
| C801 | CC45FSL1H391J | CAP. CERAMIC 390P 5% 50V |
| C802 | CE04EW0J331H | CAP. ELECTRO 330 20% 6.3V |
| C803 | CE04EW0J331H | CAP. ELECTRO 330 20% 6.3V |
| C806 | CK45FB1H102K | CAP. CERAMIC 1000P 10% 50V |
| C807 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C808 | CE04EW1C100H | CAP. ELECTRO 10 20% 16V |
| C809 | CC45FCH1H050C | CAP. CERAMIC 5P 0.25P 50V |
| C810 | CE04HW0J102H | CAP. ELECTRO 1000 20% 6.3V |
| C811 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C812 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C813 | CC45FCH1H101J | CAP. CERAMIC 100P 5% 50V |

| | | |
|----|-------------|-------------------------|
| L1 | L33-0806-05 | CHOKO COIL (0.52UH) |
| L2 | L33-0806-05 | CHOKO COIL (0.52UH) |
| L3 | L33-0806-05 | CHOKO COIL (0.52UH) |
| L4 | L33-0806-05 | CHOKO COIL (0.52UH) |
| L5 | L40-2201-70 | FERRI INDUCTOR 22UH 10% |

PARTS LIST

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|--------------------------------|
| R59 | RD14BB2C183J | RES. CARBON 18K 5% 1/6W |
| R80 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R81 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R82 | RN14BK2C1001F | RES. METAL FILM 1K 1% 1/6W |
| R83 | R92-1480-05 | RES. LT3000 1.6K 5% 1/6W |
| R84 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R85 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R101 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R102 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R103 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R104 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R105 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R106 | RD14BB2C332J | RES. CARBON 3.3K 5% 1/6W |
| R107 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R108 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R112 | RD14BB2C151J | RES. CARBON 150 5% 1/6W |
| R113 | RD14BB2C431J | RES. CARBON 430 5% 1/6W |
| R114 | RD14BB2C431J | RES. CARBON 430 5% 1/6W |
| R117 | RN14BK2C6800F | RES. METAL FILM 680 1% 1/6W |
| R118 | RN14BK2C6800F | RES. METAL FILM 680 1% 1/6W |
| R119 | RN14BK2C5101F | RES. METAL FILM 5.1K 1% 1/6W |
| R120 | RN14BK2C3901F | RES. METAL FILM 3.9K 1% 1/6W |
| R121 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R122 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R123 | RN14BK2C2001F | RES. METAL FILM 2K 1% 1/6W |
| R124 | RN14BK2C1501F | RES. METAL FILM 1.5K 1% 1/6W |
| R125 | RN14BK2C1501F | RES. METAL FILM 1.5K 1% 1/6W |
| R126 | RD14BB2C392J | RES. CARBON 3.9K 5% 1/6W |
| R127 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R128 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R129 | RD14BB2C392J | RES. CARBON 3.9K 5% 1/6W |
| R130 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R131 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R132 | RN14BK2C1301F | RES. METAL FILM 1.3K 1% 1/6W |
| R133 | RN14BK2C1301F | RES. METAL FILM 1.3K 1% 1/6W |
| R134 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R135 | NO USE | |
| R136 | RD14BB2C394J | RES. CARBON 390K 5% 1/6W |
| R137 | RD14BB2C182J | RES. CARBON 1.8K 5% 1/6W |
| R138 | RD14BB2C182J | RES. CARBON 1.8K 5% 1/6W |
| R139 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R140 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R141 | RD14BB2C152J | RES. CARBON 1.5K 5% 1/6W |
| R142 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R143 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R144 | RN14BK2E2002F | RES. METAL FILM 20K 1% 1/4W |
| R145 | RN14BK2E2002F | RES. METAL FILM 20K 1% 1/4W |
| R146 | R92-1434-05 | RES. SPECIAL POWER 47K 5% 1/2W |
| R147 | RN14BK2C7500F | RES. METAL FILM 750 1% 1/6W |
| R148 | RN14BK2C3601F | RES. METAL FILM 3.6K 1% 1/6W |
| R149 | RN14BK2C4702F | RES. METAL FILM 47K 1% 1/6W |
| R150 | RN14BK2C4702F | RES. METAL FILM 47K 1% 1/6W |
| R151 | RN14BK2C3601F | RES. METAL FILM 3.6K 1% 1/6W |
| R152 | RN14BK2C7500F | RES. METAL FILM 750 1% 1/6W |
| R153 | RN14BK2E2002F | RES. METAL FILM 20K 1% 1/4W |
| R154 | RN14BK2E2002F | RES. METAL FILM 20K 1% 1/4W |
| R155 | R92-1434-05 | RES. SPECIAL POWER 47K 5% 1/2W |
| R156 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R157 | RD14BB2C821J | RES. CARBON 820 5% 1/6W |
| R158 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R159 | RD14BB2C470J | RES. CARBON 47 5% 1/6W |
| R164 | RD14BB2C203J | RES. CARBON 20K 5% 1/6W |
| R180 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R181 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R182 | RD14BB2C222J | RES. CARBON 2.2K 5% 1/6W |
| R183 | RD14BB2C821J | RES. CARBON 820 5% 1/6W |
| R201 | RD14BB2C272J | RES. CARBON 2.7K 5% 1/6W |
| R202 | RD14BB2C132J | RES. CARBON 1.3K 5% 1/6W |
| R203 | NO USE | |
| R204 | RD14BB2C472J | RES. CARBON 4.7K 5% 1/6W |
| R801 | RD14BB2C133J | RES. CARBON 13K 5% 1/6W |
| R802 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R803 | RD14BB2C100J | RES. CARBON 10 5% 1/6W |
| R804 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R805 | RD14BB2C153J | RES. CARBON 15K 5% 1/6W |
| R806 | RD14BB2C273J | RES. CARBON 27K 5% 1/6W |
| R807 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R810 | RD14BB2C224J | RES. CARBON 220K 5% 1/6W |
| R811 | RD14BB2C823J | RES. CARBON 82K 5% 1/6W |
| R812 | R92-1481-05 | RES. LT3000 130 5% 1/6W |
| R813 | R92-1162-05 | RES. LT3000 560 5% 1/6W |
| R814 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R815 | RD14BB2C302J | RES. CARBON 3K 5% 1/6W |
| R816 | RD14BB2C120J | RES. CARBON 12 5% 1/6W |
| R817 | RN14BK2C1101F | RES. METAL FILM 1.1K 1% 1/6W |
| R818 | RD14BB2C185J | RES. CARBON 1.8K 5% 1/6W |
| R819 | NO USE | |

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|-------------|-------------------------|
| R820 | R92-1190-05 | RES. LT3000 510 5% 1/6W |
| R821 | R92-1190-05 | RES. LT3000 510 5% 1/6W |
| TC1 | C05-0471-05 | CAP. TRIMMER 30P |
| TC2 | C05-0470-05 | CAP. TRIMMER 20P |
| TC99 | C05-0470-05 | CAP. TRIMMER 20P |
| TC100 | NO USE | |
| TC101 | C05-0464-05 | CAP. TRIMMER 2P |
| TC102 | NO USE | |
| TC103 | C05-0464-05 | CAP. TRIMMER 2P |
| TH2 | 112-102-2 | THERMISTOR |
| U1 | KXG01 | IC, LINEAR |
| U2 | KXG01 | IC, LINEAR |
| VR1 | R12-0571-05 | RES. SEMI FIXED 500 B |
| VR2 | NO USE | |
| VR3 | R12-3453-05 | RES. SEMI FIXED 10KB |
| VR4 | R12-0058-05 | RES. SEMI FIXED 470 B |
| VR101 | R12-1538-05 | RES. SEMI FIXED 1KB |
| VR102 | R12-0571-05 | RES. SEMI FIXED 500 B |
| VR103 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR201 | R12-3543-05 | RES. SEMI FIXED 20KB |

VR UNIT

X81-2900-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|------------------------------|
| | E01-0103-05 | CRT SOCKET |
| | F01-0859-14 | HEAT SINK |
| | J13-0041-05 | FUSE HOLDER |
| | J21-4610-04 | BRACKET FOR P.C.B. |
| | J61-0521-05 | SUPPORT |
| | J73-0016-03 | PCB (UNMOUNTED) |
| | N09-0623-14 | SCREW, SENS PAN HD N3X8 |
| | R92-0150-05 | JUMPING RES. ZERO OHM (10MM) |
| | R92-1061-05 | JUMPING RES. ZERO OHM (5MM) |
| C1 | CE04EW1C471M | CAP. ELECTRO 470 20% 16V |
| C2 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C3 | CK45B2H472K | CAP. CERAMIC 4700P 10% 500V |
| C4 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C5 | CE04EW1C470M | CAP. ELECTRO 47 20% 16V |
| C901 | C91-2537-05 | CAP. CERAMIC 3300 20% 400V |
| C902 | C91-2537-05 | CAP. CERAMIC 3300 20% 400V |
| D1 | NTZ24JC | DIODE, ZENER 23.72V |
| D2 | 1SS132 | DIODE |
| D3 | 1SS132 | DIODE |
| F1 | F53-0039-05 | THERMAL FUSE 70°C |
| JW9 | E38-0473-15 | WIRE ASS'Y; CRT TO FINAL |
| JW10 | E38-0473-15 | WIRE ASS'Y; CRT TO FINAL |
| JW18 | E38-0471-05 | WIRE ASS'Y; CRT TO HIGH V |
| JW19 | NO USE | |
| JW20 | E31-0564-15 | WIRE ASS'Y; AC IN TO GND |
| P11 | E40-3240-05 | PIN CONNECTOR 5P |
| P12 | E40-3243-05 | PIN CONNECTOR 8P |
| P13 | E40-3237-05 | PIN CONNECTOR 2P |
| P14 | E40-3237-05 | PIN CONNECTOR 2P |
| P15 | E38-0046-04 | WIRE ASS'Y; CAL |
| P22A | E40-0328-05 | PIN CONNECTOR 3P |
| P22B | E40-0330-05 | PIN CONNECTOR 3P |
| Q2 | 2SC1384(Q) | TR. SI, NPN |
| Q3 | 2SA684(Q) | TR. SI, PNP |
| Q4 | 2SD1666(S) | TR. SI, NPN |
| R1 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R2 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R3 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R4 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R5 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R6 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R7 | RD14BB2C104J | RES. CARBON 100K 5% 1/6W |
| R8 | RD14BB2C223J | RES. CARBON 22K 5% 1/6W |
| R9 | NO USE | |
| R10 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R11 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R12 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| R13 | RD14BB2C101J | RES. CARBON 100 5% 1/6W |
| R14 | RD14BB2C333J | RES. CARBON 33K 5% 1/6W |
| R15 | RD14BB2C433J | RES. CARBON 43K 5% 1/6W |

PARTS LIST


| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|--------------|----------------------------------|
| R16 | RD14BB2C473J | RES. CARBON 47K 5% 1/6W |
| R17 | RD14BB2C272J | RES. CARBON 2.7K 5% 1/6W |
| R18 | RD14BB2C100J | RES. CARBON 10 5% 1/6W |
| R19 | RD14BB2C162J | RES. CARBON 1.6K 5% 1/6W |
| R20 | RD14BB2C182J | RES. CARBON 1.8K 5% 1/6W |
| R21 | RD14BB2C271J | RES. CARBON 270 5% 1/6W |
| R22 | RD14BB2C102J | RES. CARBON 1K 5% 1/6W |
| S1 | S59-2505-05 | POWER SWITCH |
| U1 | NJM4558D | IC,DUAL OP AMP |
| VR1 | R10-3505-05 | V. R. (A/B INT,ROT+ILLUM)20KB X2 |
| VR2 | R10-7501-05 | V. R. (FOCUS/ASTIG)500KB/500KB |
| VR3 | R05-3515-05 | V. R. WITH SW(READOUT INT) 20KB |
| VR4 | R10-3505-05 | V. R. (A/B INT,ROT+ILLUM)20KB X2 |
| VR5 | R12-3543-05 | RES. SEMI FIXED 20KB |
| VR6 | R12-1538-05 | RES. SEMI FIXED 1KB |

ENCODER UNIT


X81-3040-00

| REF. NO | PARTS NO | NAME & DESCRIPTION |
|---------|---------------|------------------------------|
| | J73-0024-12 | PCB (UNMOUNTED) |
| C1 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C2 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C3 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C4 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C5 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C6 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C7 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C8 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C9 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C10 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C11 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C12 | C91-1361-05 | CAP. NYLAR 0.01 10% 100V |
| C13 | CE04EW1A101H | CAP. ELECTRO 100 20% 10V |
| C14 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C15 | CE04EW1C470H | CAP. ELECTRO 47 20% 16V |
| C16 | CE04EW1C470H | CAP. ELECTRO 47 20% 16V |
| C17 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| C18 | C91-1357-05 | CAP. NYLAR 0.1 10% 100V |
| P28 | E40-7236-05 | PIN CONNECTOR 40P |
| R1 | RN14BK2C2701F | RES. METAL FILM 2.7K 1% 1/6W |
| R2 | RN14BK2C2001F | RES. METAL FILM 2K 1% 1/6W |
| R3 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R4 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R5 | RD14BB2C220J | RES. CARBON 22 5% 1/6W |
| R6 | RN14BK2C2701F | RES. METAL FILM 2.7K 1% 1/6W |
| R7 | RN14BK2C2001F | RES. METAL FILM 2K 1% 1/6W |
| R8 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R9 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R10 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R11 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R12 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R13 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R14 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R15 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| R16 | RD14BB2C103J | RES. CARBON 10K 5% 1/6W |
| S1 | W02-0498-05 | ENCORDER SWITCH |
| S2 | W02-0498-05 | ENCORDER SWITCH |
| S3 | W02-0498-05 | ENCORDER SWITCH |
| S4 | W02-0498-05 | ENCORDER SWITCH |
| S5 | W02-0498-05 | ENCORDER SWITCH |
| U1 | NJM072BD | IC,JFET INPUT OP AMP |
| VR6 | R23-3505-05 | V. R. 2X20K B |
| VR7 | R05-3525-15 | V. R. 20K B |
| VR8 | R23-3505-05 | V. R. 2X20K B |
| VR9 | R10-3504-15 | ENDLESS VOLUME 2X10K B |
| VR10 | R10-3504-15 | ENDLESS VOLUME 2X10K B |
| VR11 | R10-3504-15 | ENDLESS VOLUME 2X10K B |
| VR12 | R10-3504-15 | ENDLESS VOLUME 2X10K B |
| VR13 | R10-3504-15 | ENDLESS VOLUME 2X10K B |
| VR14 | R10-3504-15 | ENDLESS VOLUME 2X10K B |

SCHEMATIC DIAGRAM

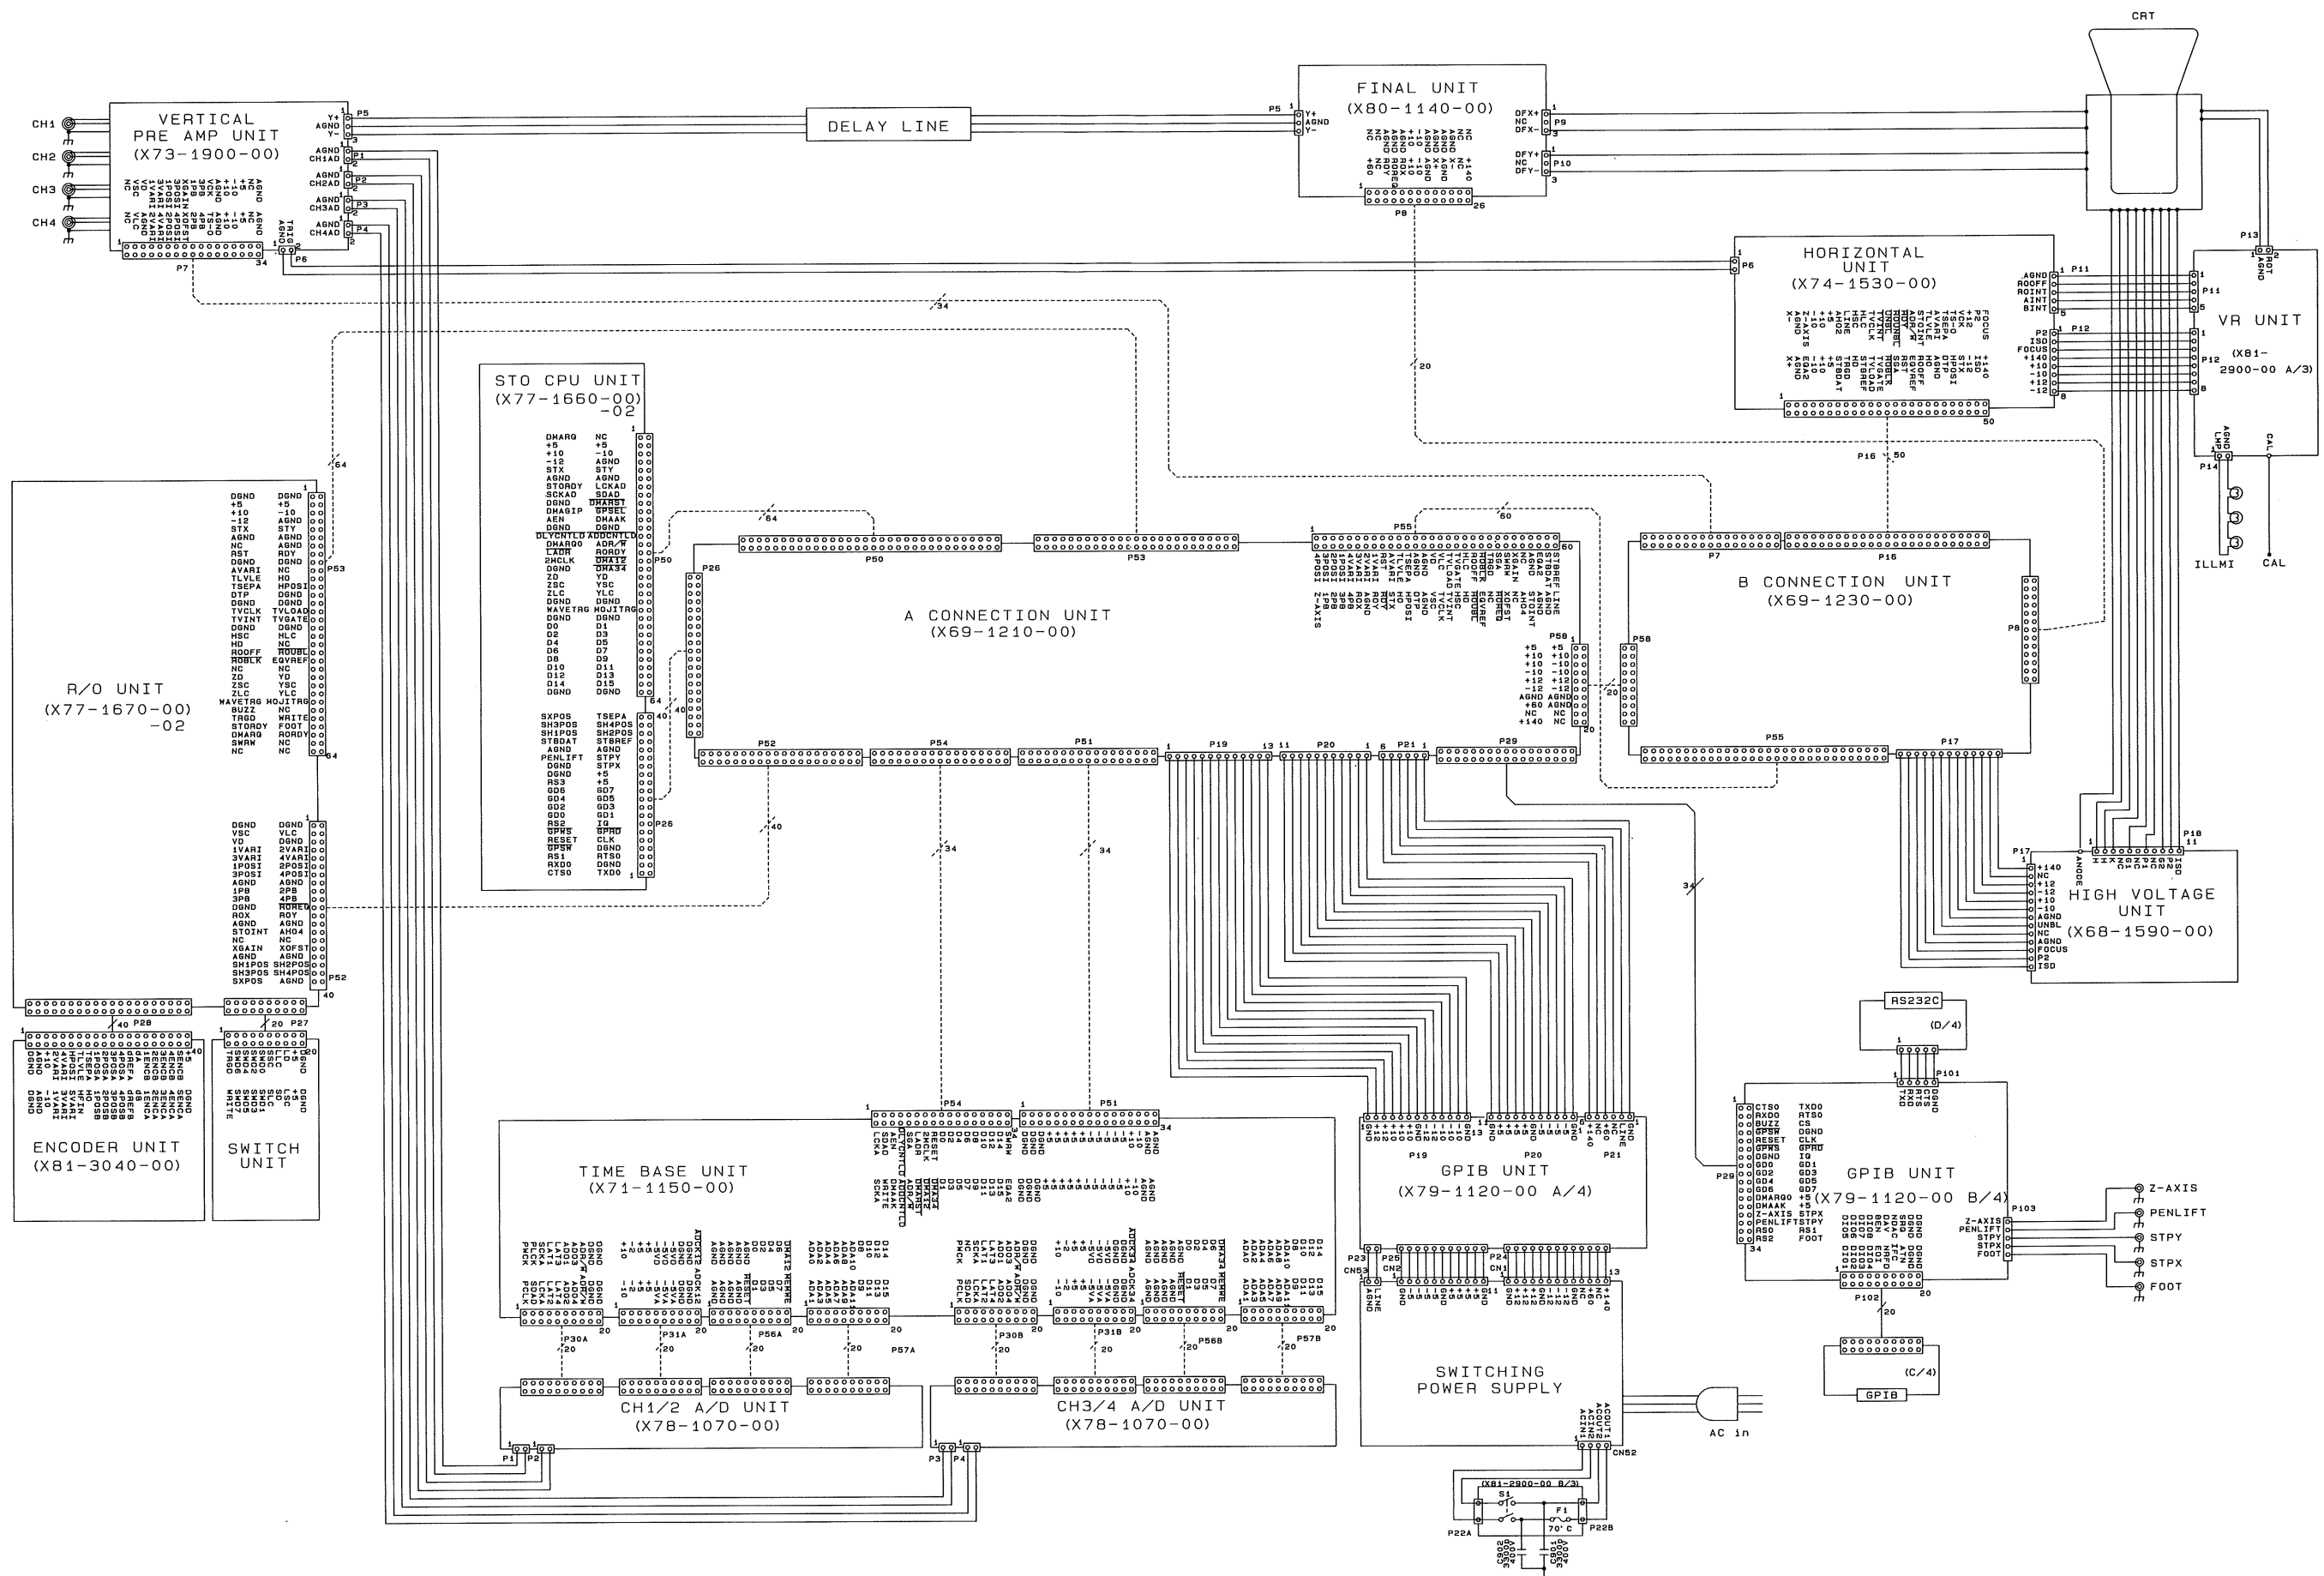


SCHEMATIC DIAGRAM
HIGH VOLTAGE UNIT (X68-1590-00)

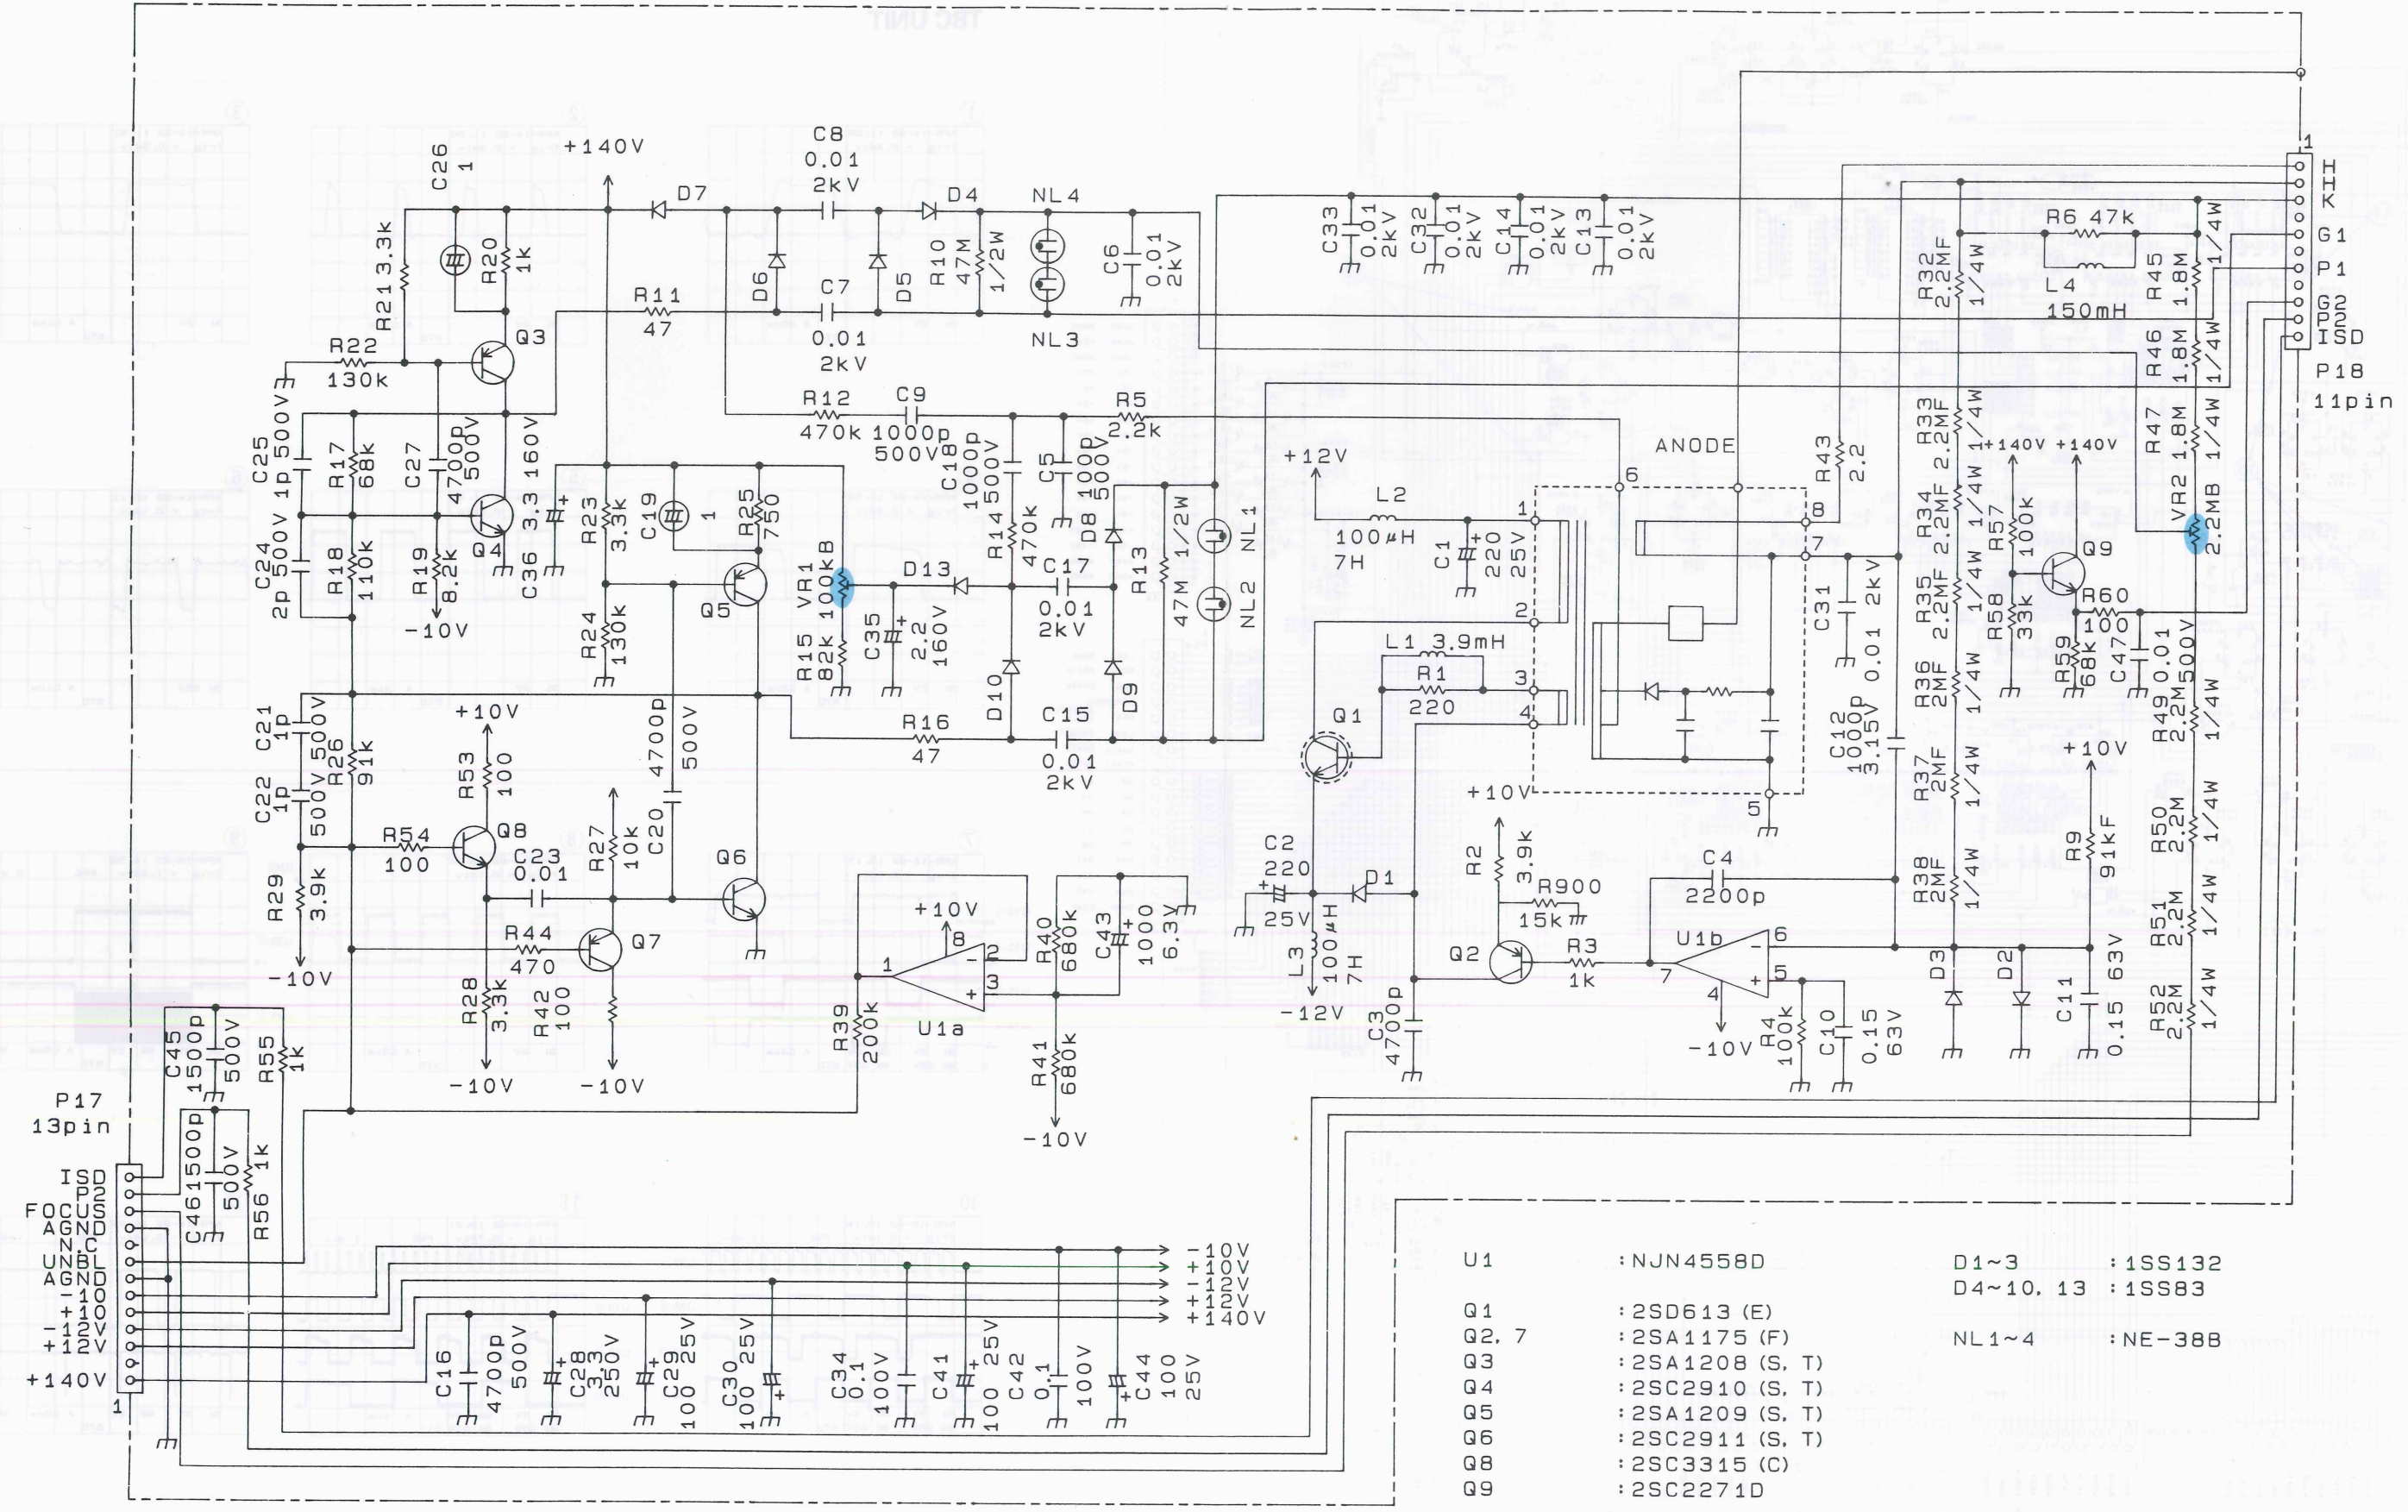

- | | | | |
|-------|------------------|-----------|----------|
| U1 | : NJN4558D | D1~3 | : 1SS132 |
| Q1 | : 2SD613 (E) | D4~10, 13 | : 1SS83 |
| Q2, 7 | : 2SA1175 (F) | NL1~4 | : NE-38B |
| Q3 | : 2SA1208 (S, T) | | |
| Q4 | : 2SC2910 (S, T) | | |
| Q5 | : 2SA1209 (S, T) | | |
| Q6 | : 2SC2911 (S, T) | | |
| Q8 | : 2SC3315 (C) | | |
| Q9 | : 2SC2271D | | |














TIME BASE UNIT (X71-1150-00) SCHEMATIC

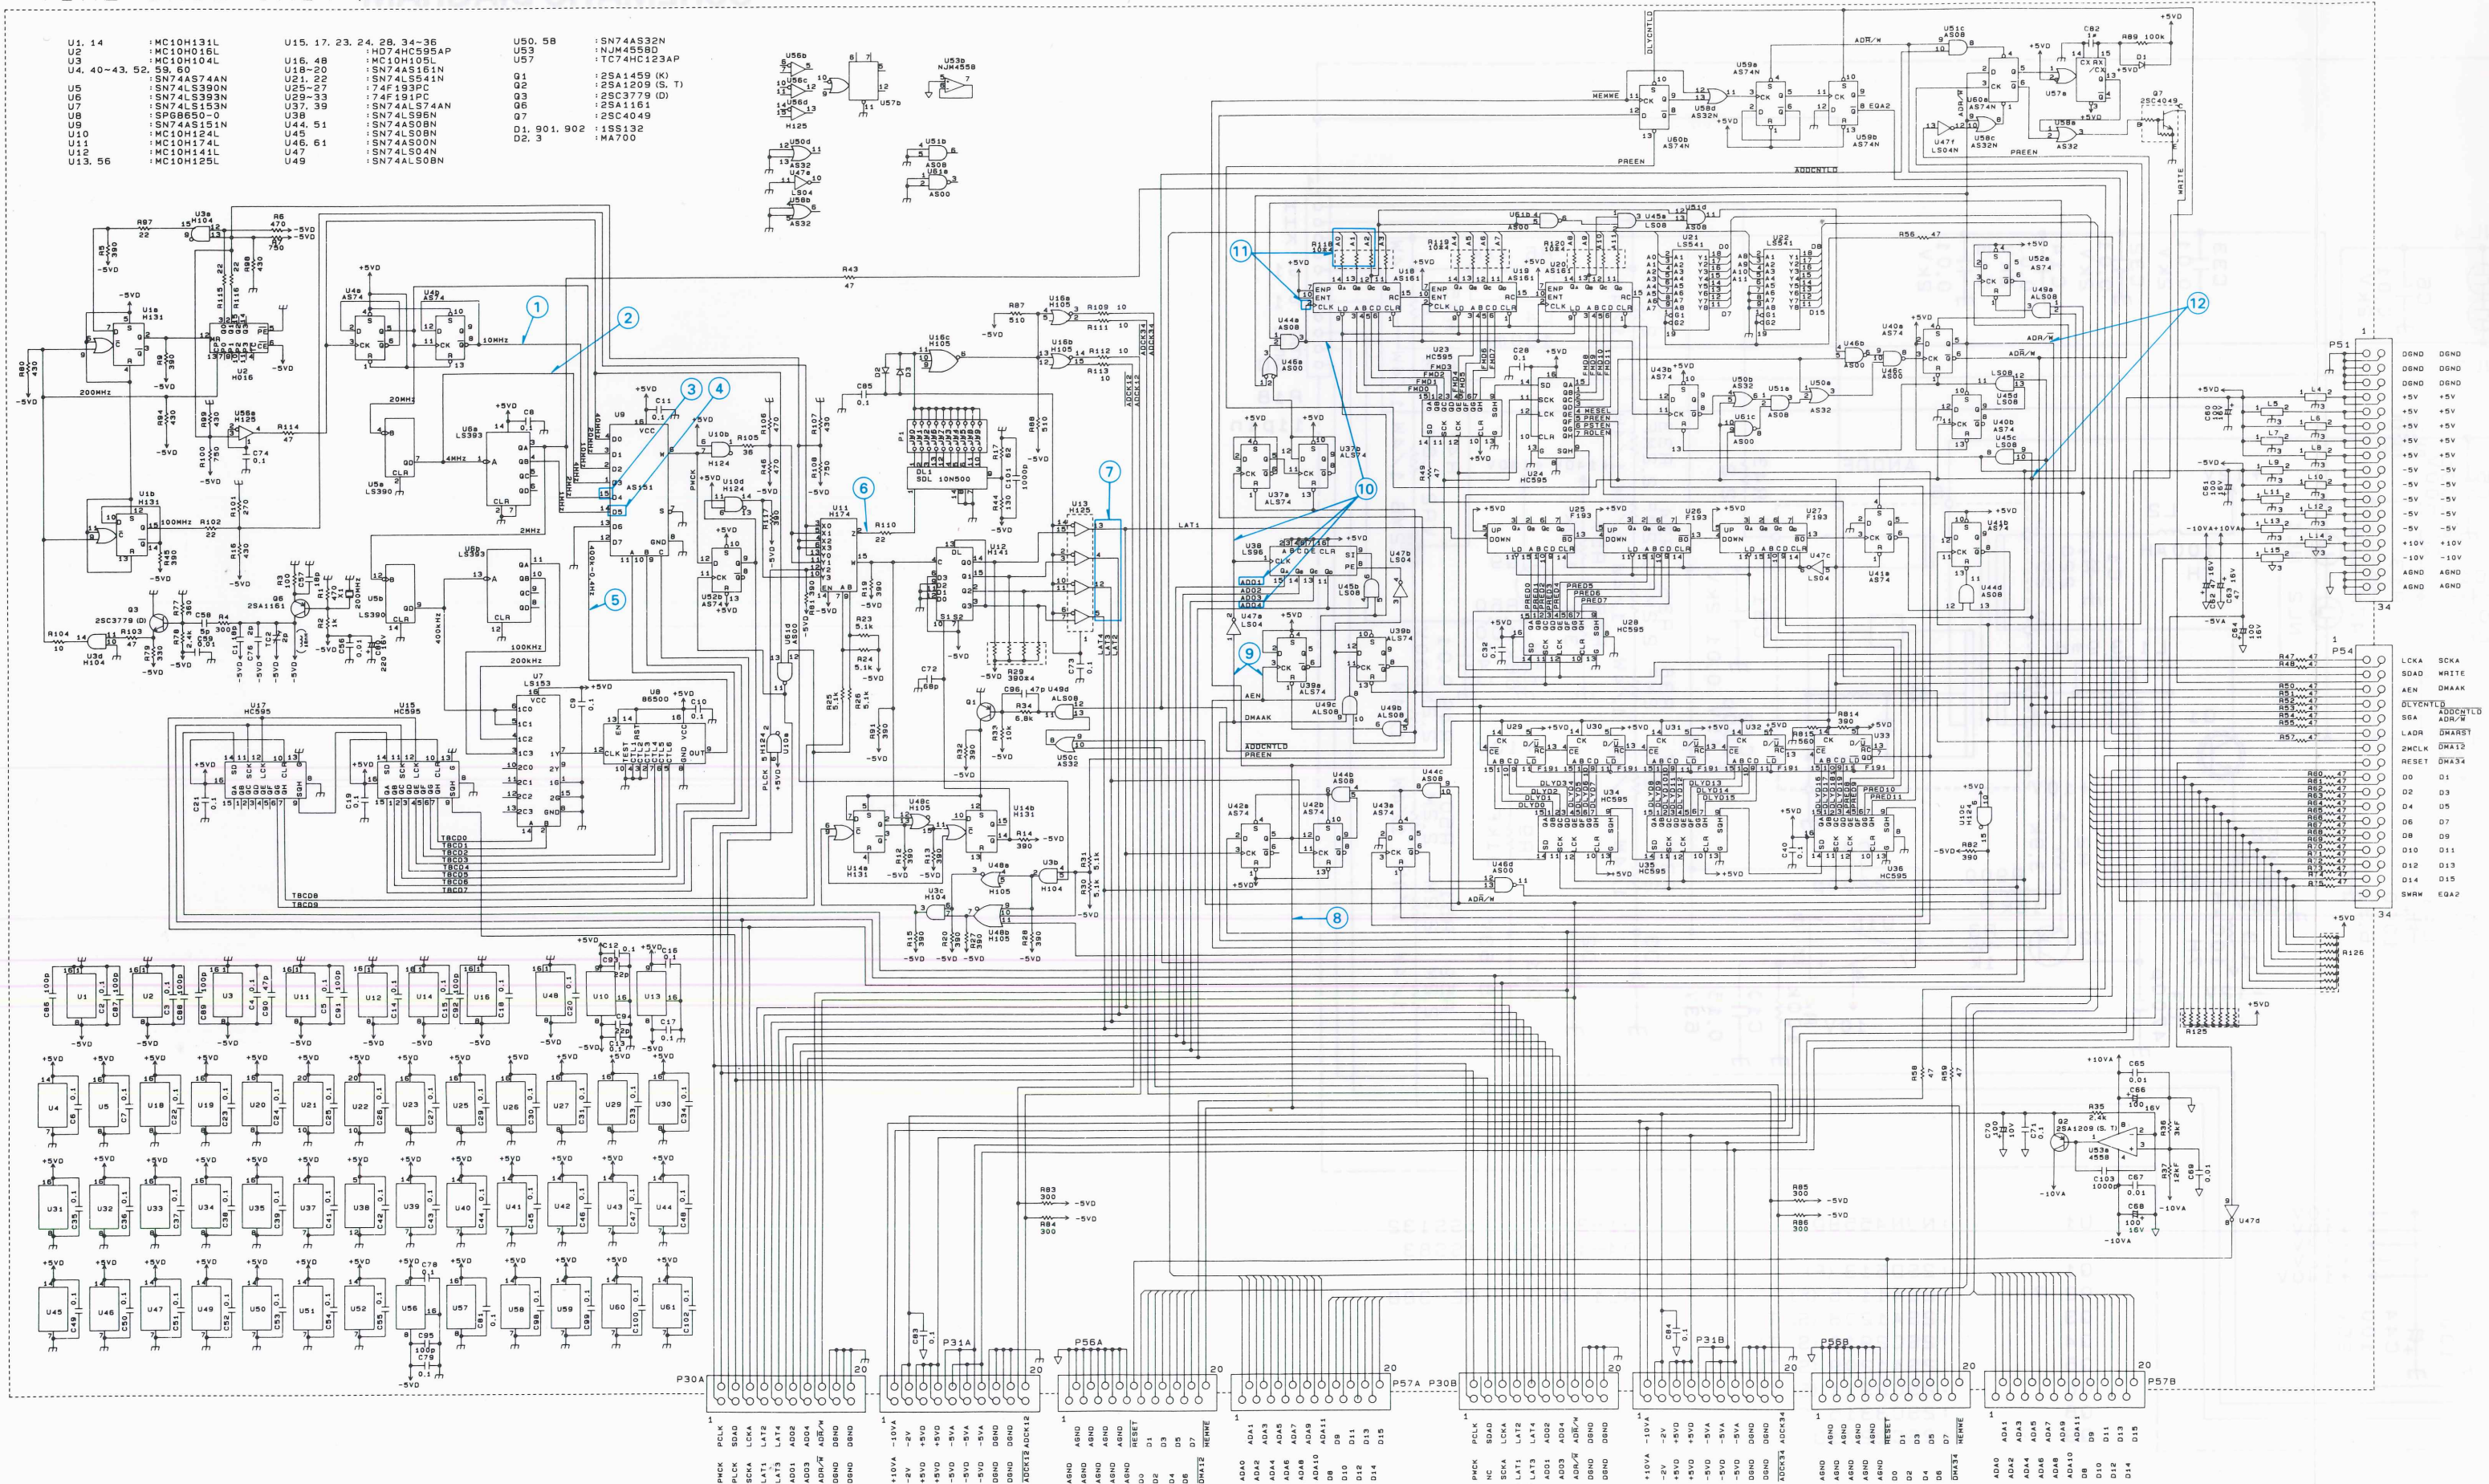

- | | | | | |
|-----------------------|---------------|----------------------------|--------------|------------------|
| U1, 14 | : MC10H131L | U15, 17, 23, 24, 28, 34-36 | U50, 58 | : SN74AS32N |
| U2 | : MC10H161L | U16, 48 | U53 | : NJM4558D |
| U3 | : MC10H104L | U18-20 | U57 | : T674HC123AP |
| U4, 40-43, 52, 59, 60 | : SN74AS74AN | U21-22 | Q1 | : 2SA1459 (K) |
| U5 | : SN74ALS30AN | U25-27 | Q2 | : 2SA1209 (S, T) |
| U6 | : SN74ALS93AN | U29-33 | Q3 | : 2SC3779 (D) |
| U7 | : SN74ALS153N | U37, 39 | Q6 | : 2SA1161 |
| U8 | : SP8860-0 | U38 | Q7 | : 2SC4049 |
| U9 | : SN74AS151N | U44, 51 | D1, 901, 902 | : 1SS132 |
| U10 | : MC10H124L | U45 | D2, 3 | : MA700 |
| U11 | : MC10H174L | U45, 61 | | |
| U12 | : MC10H141L | U47 | | |
| U13, 56 | : MC10H125L | U49 | | |


SCHEMATIC DIAGRAM

TBC UNIT

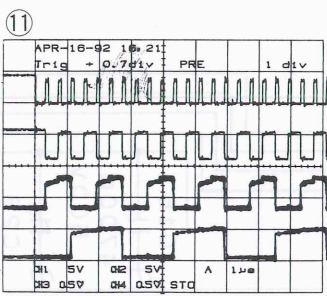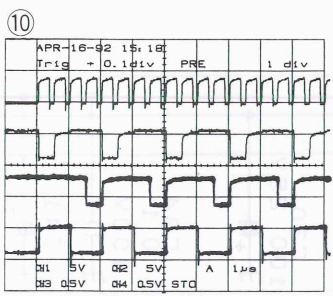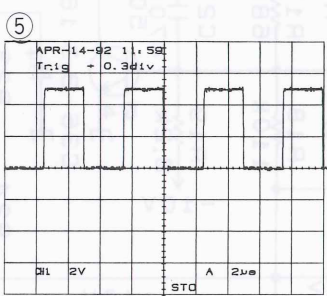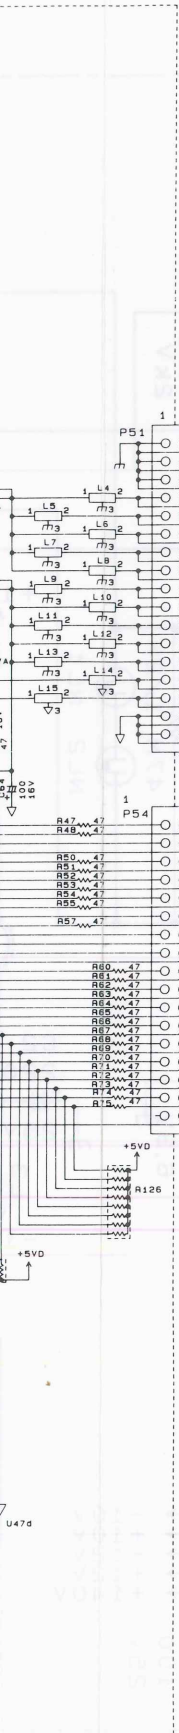

SCHEMATIC DIAGRAM

VERTICAL UNIT (X73-1900-00)

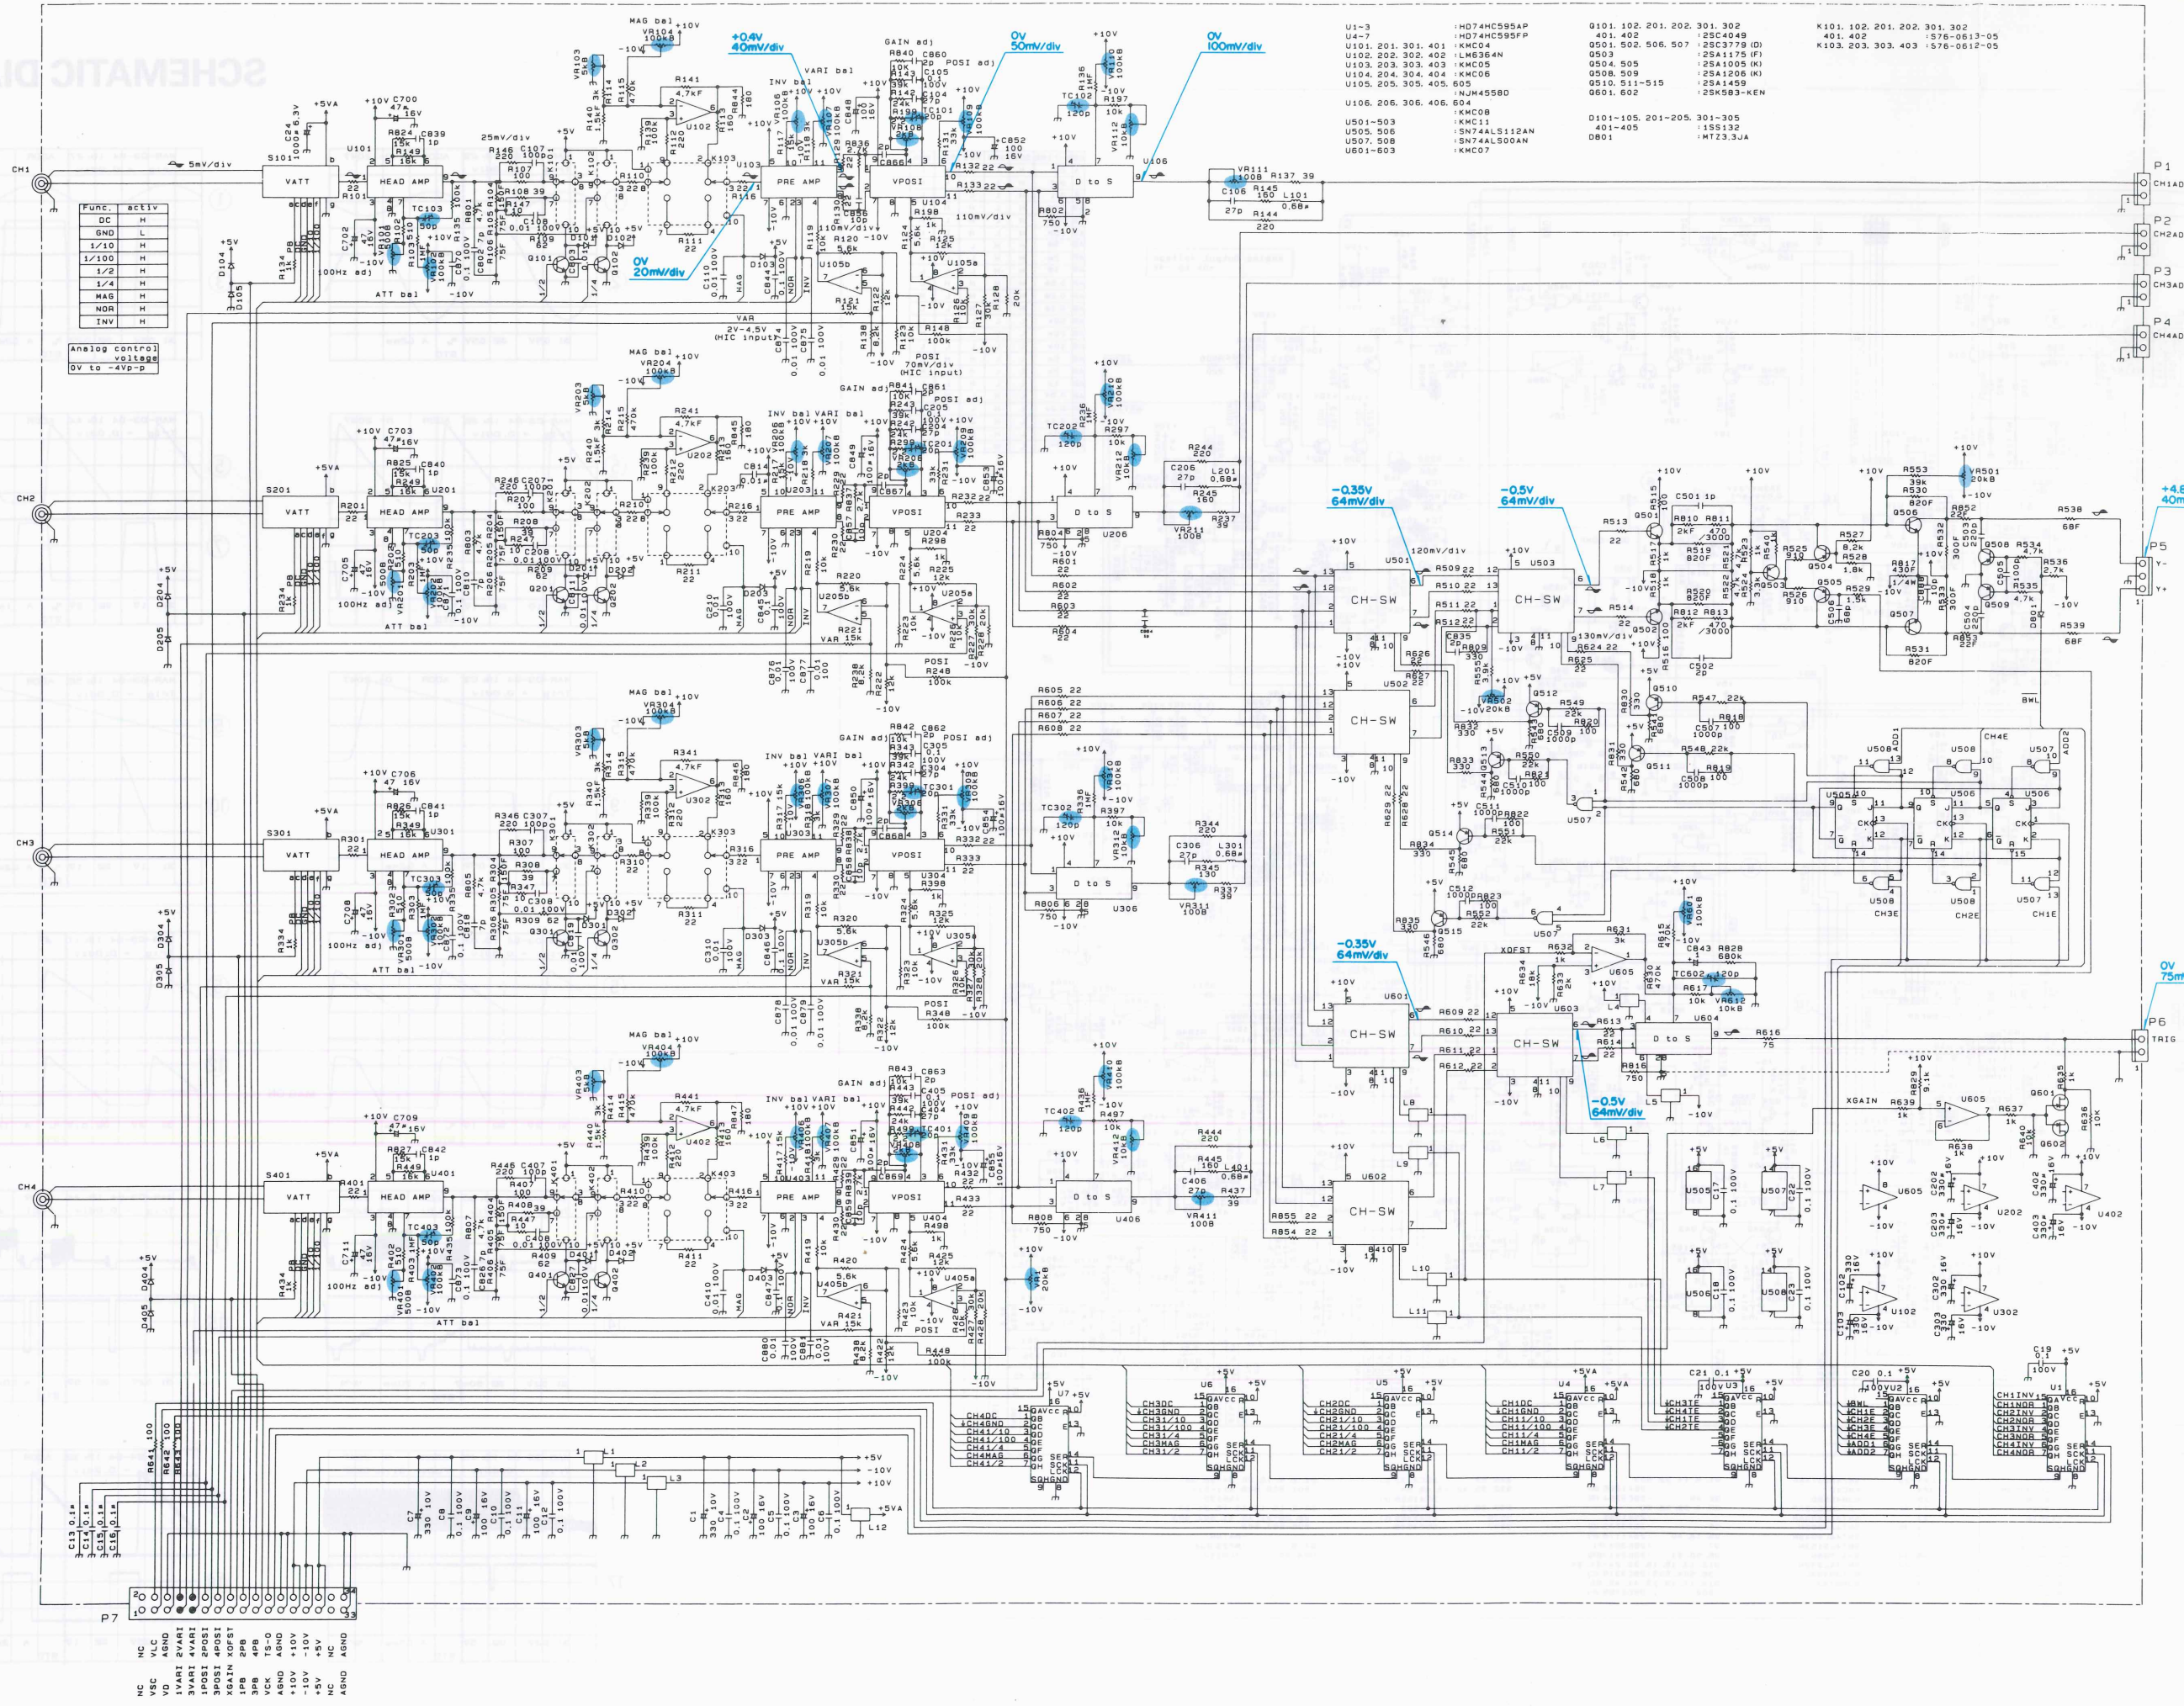

- | | | | |
|--------------------------|---------------|-------------------------------|-------------------------------|
| U1-3 | :HD74HC595AP | Q101, 102, 201, 202, 301, 302 | K101, 102, 201, 202, 301, 302 |
| U4-7 | :HD74HC595FP | 401, 402 | :25C4049 |
| U101, 201, 301, 401 | :KMC04 | 0501, 502, 506, 507 | :25C3779 (D) |
| U102, 202, 302, 402 | :LMS364N | 0503 | :25A1175 (F) |
| U103, 203, 303, 403 | :KMC05 | 0504, 505 | :25A1005 (K) |
| U104, 204, 304, 404 | :KMC06 | 0508, 509 | :25A1206 (K) |
| U105, 205, 305, 405, 605 | :5N74ALS00AN | 0510, 511-515 | :25A1459 |
| U106, 206, 306, 406, 604 | :NJM4558D | 0601, 602 | :25K583-KEN |
| U501-503 | :KMC08 | | |
| U505, 506 | :KMC11 | | |
| U507, 508 | :5N74ALS112AN | D101-105, 201-205, 301-305 | :ISS132 |
| U601-603 | :KMC07 | 0801 | :MT73.3JA |


| Func. | activ |
|-------|-------|
| DC | H |
| L | H |
| 1/100 | H |
| 1/2 | H |
| MAG | H |
| NOR | H |
| INV | H |


Analog control voltage
0V to -4Vp-p

| | | | | | |
|--------|--------|------|----|----|-----|
| NC | VLC | AGND | U6 | 16 | +5V |
| V5C | VD | AGND | U7 | 16 | +5V |
| 1VARI | 2VARI | AGND | U4 | 16 | +5V |
| 3VARI | 4VARI | AGND | U5 | 16 | +5V |
| 5POST1 | 6POST1 | AGND | U3 | 16 | +5V |
| 7POST2 | 8POST2 | AGND | U2 | 16 | +5V |
| 9IN | 10IN | AGND | U1 | 16 | +5V |
| 11B | 12B | AGND | | | |
| 13B | 14B | AGND | | | |
| 15-0 | VCK | AGND | | | |
| AGND | +10V | AGND | | | |
| +10V | +10V | AGND | | | |
| -10V | -10V | AGND | | | |
| +5V | +5V | AGND | | | |
| AGND | AGND | | | | |


102, 201, 202, 301, 302
 402 1576-0613-05
 203, 303, 403 1576-0612-05

SCHEMATIC DIAGRAM

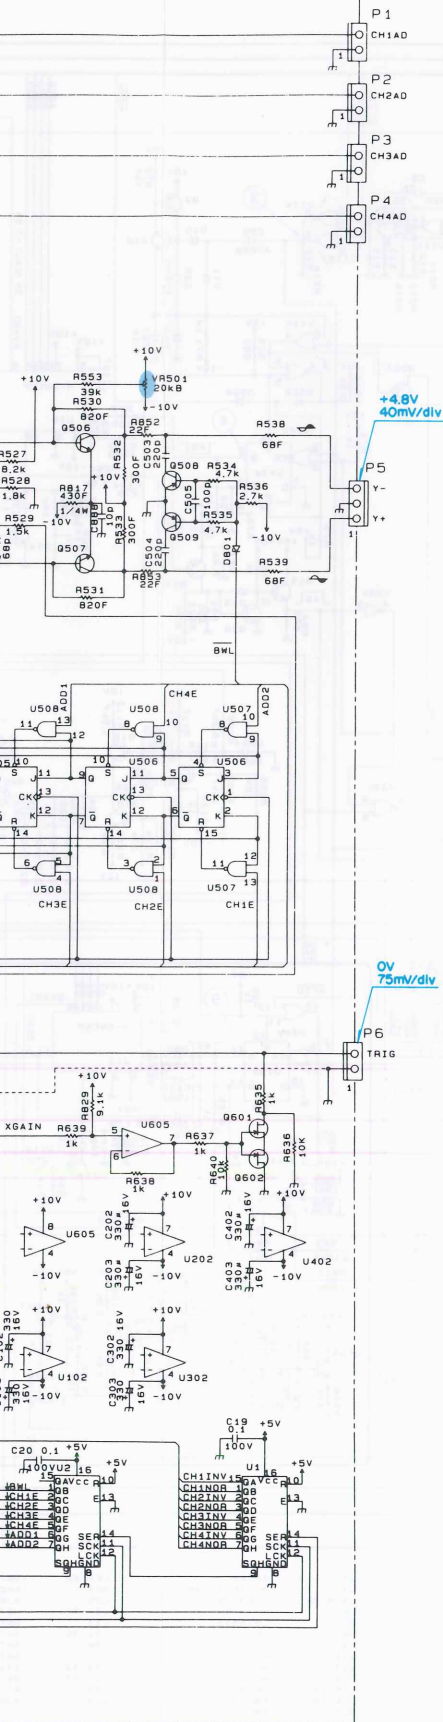

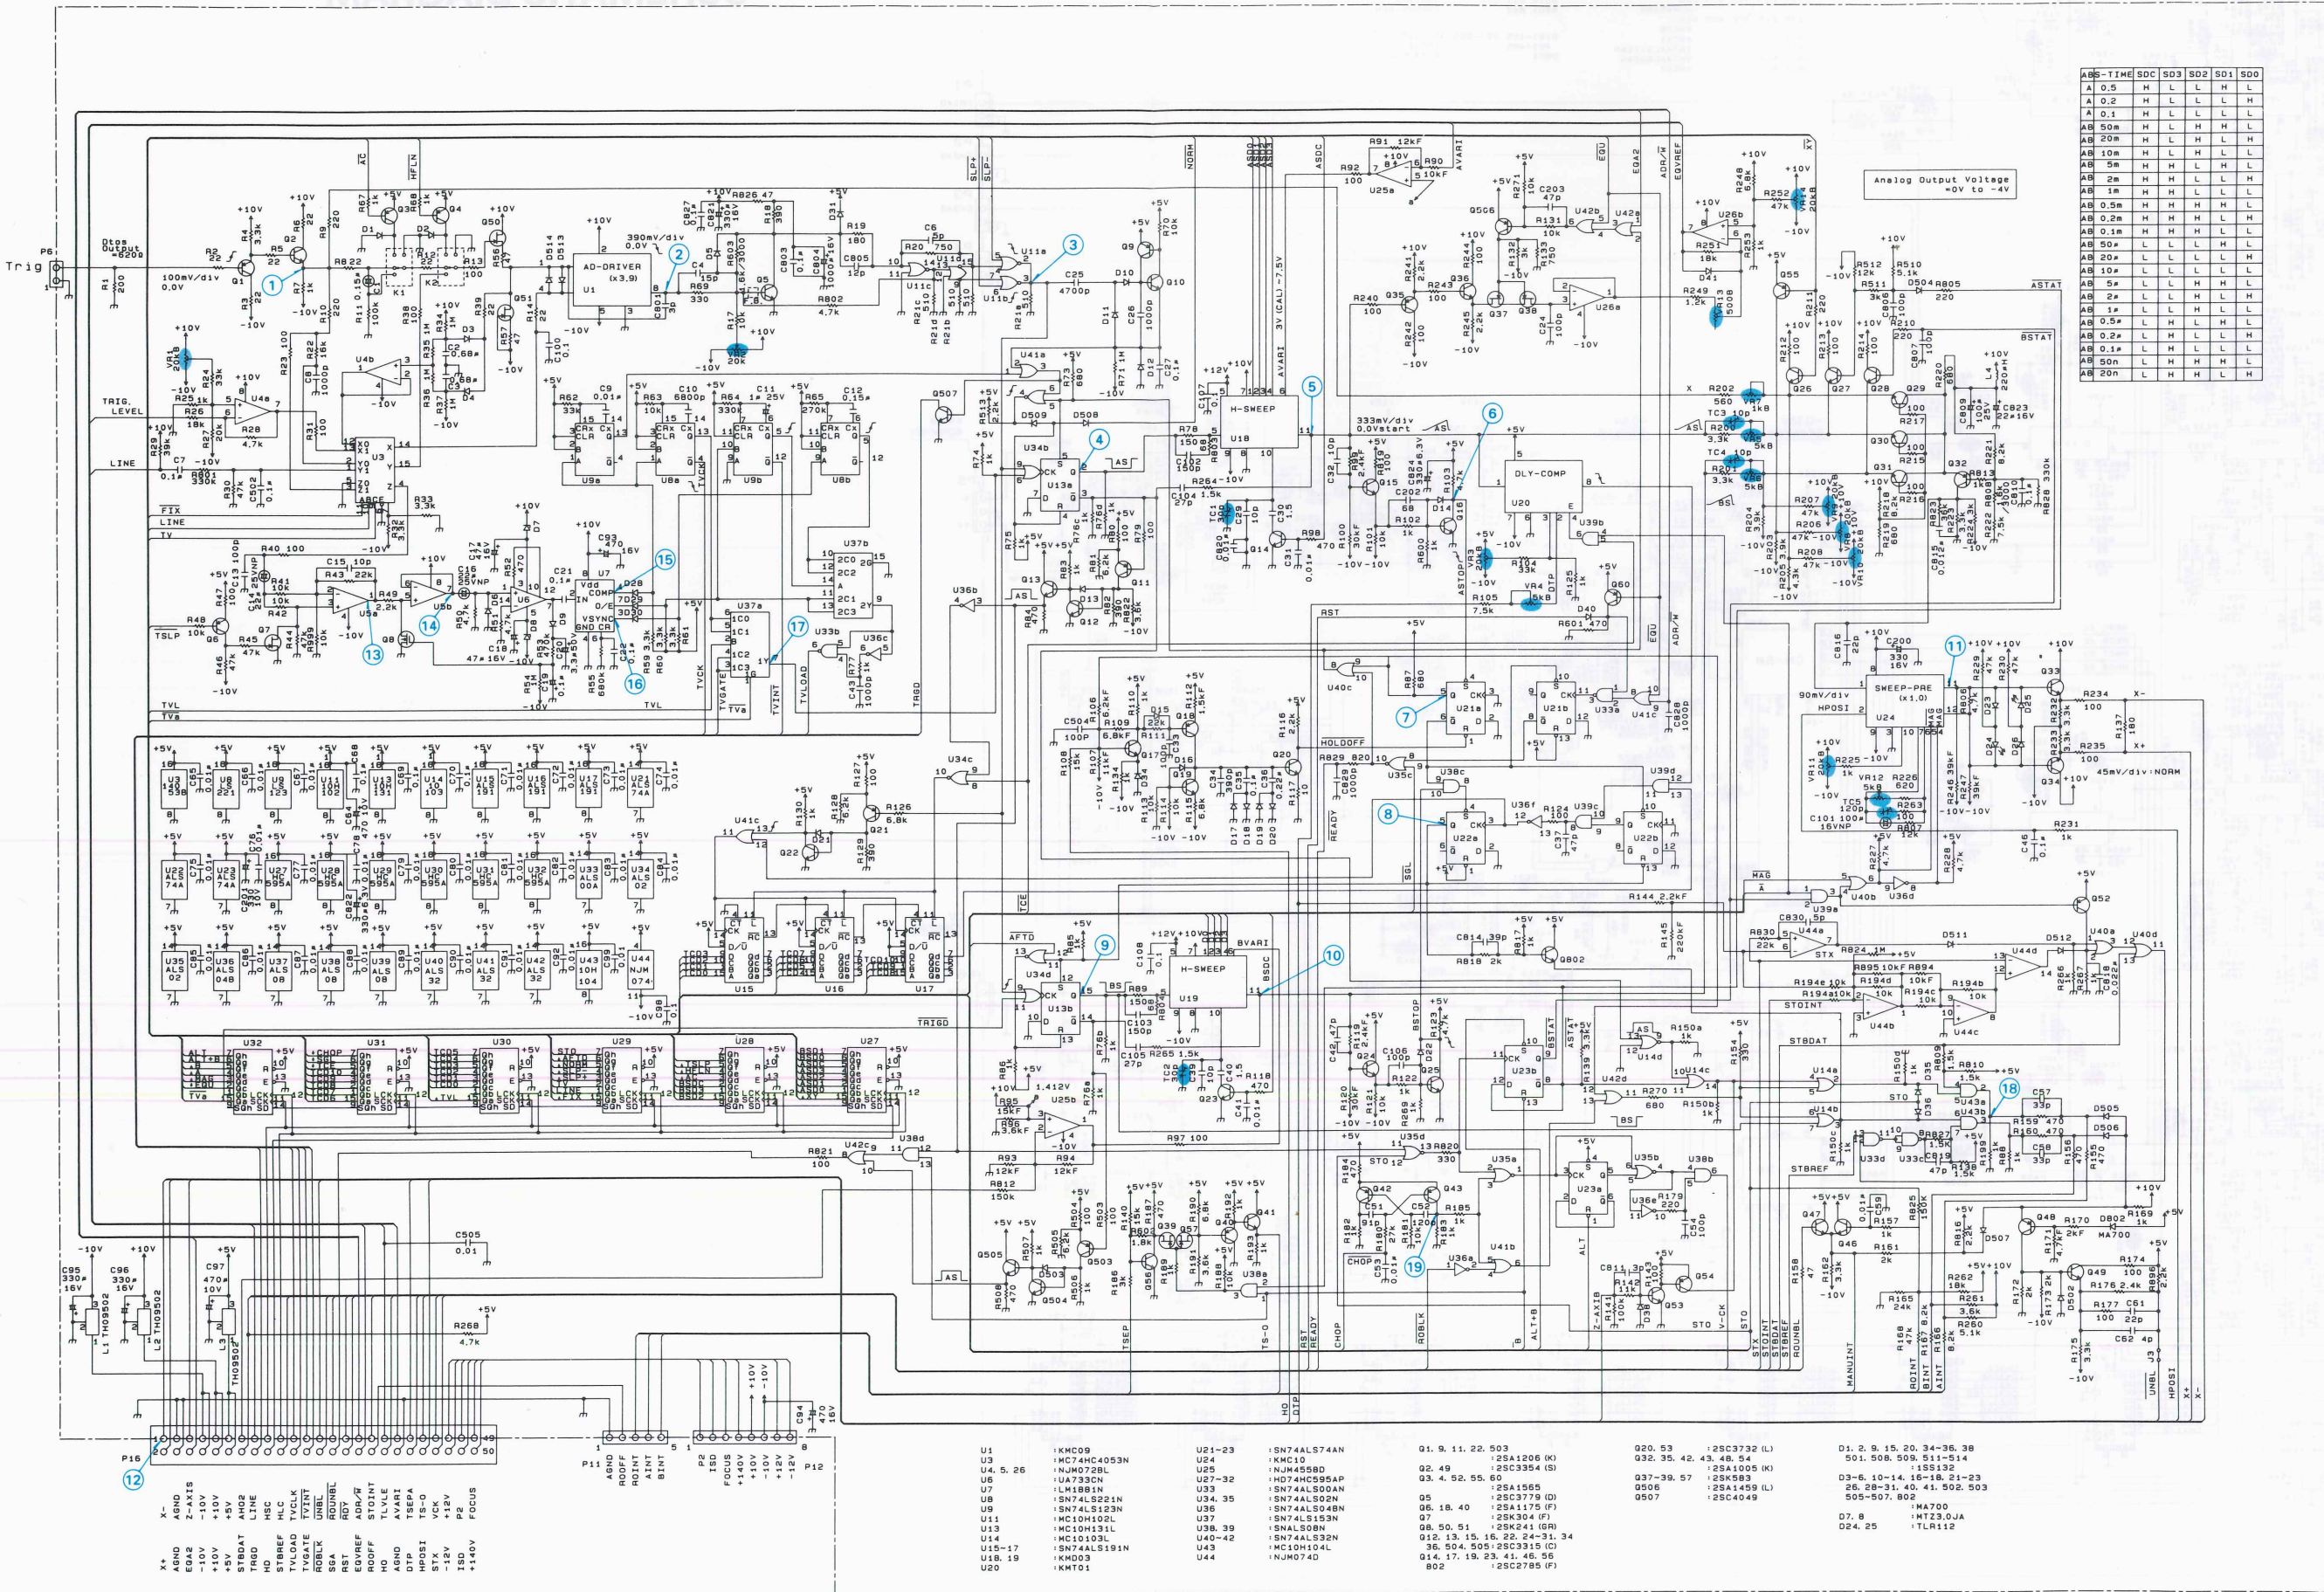

| ABS | TIME | SDC | SD3 | SD2 | SD1 | SD0 |
|---------|------|-----|-----|-----|-----|-----|
| A 0.5 | H | L | L | L | L | L |
| A 0.2 | H | L | L | L | L | H |
| A 0.1 | H | L | L | L | L | L |
| AB 50m | H | L | L | L | L | H |
| AB 10m | H | L | L | L | L | L |
| AB 5m | H | L | L | L | L | H |
| AB 2m | H | L | L | L | L | H |
| AB 0.5m | H | L | L | L | L | H |
| AB 0.2m | H | L | L | L | L | H |
| AB 0.1m | H | L | L | L | L | H |
| AB 50μ | L | L | L | L | L | L |
| AB 20μ | L | L | L | L | L | L |
| AB 10μ | L | L | L | L | L | L |
| AB 5μ | L | L | L | L | L | L |
| AB 2μ | L | L | L | L | L | L |
| AB 0.5μ | L | L | L | L | L | L |
| AB 0.2μ | L | L | L | L | L | L |
| AB 0.1μ | L | L | L | L | L | L |
| AB 50n | L | H | H | H | H | L |
| AB 20n | L | H | H | H | H | L |

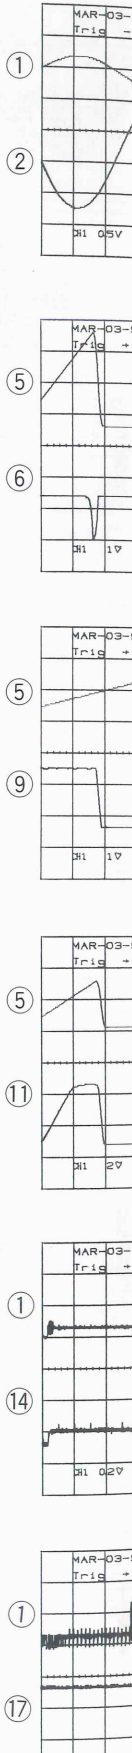

| Pin | Function |
|--------|----------|
| X- | ASND |
| X+ | EDAR |
| -10V | -10V |
| +10V | +10V |
| +5V | +5V |
| -5V | -5V |
| STOINT | STOINT |
| TRIG | TRIG |
| HD | HSC |
| HLC | HSC |
| TVLCK | TVLCK |
| TVLOAD | TVLOAD |
| TVINT | TVINT |
| ROBLK | ROBLK |
| ROUNBL | ROUNBL |
| RD | RD |
| EDVREF | EDVREF |
| ROOFF | ROOFF |
| HO | HO |
| AVARI | AVARI |
| DTP | DTP |
| TS-O | TS-O |
| STX | STX |
| VCK | VCK |
| TSO | TSO |
| P2 | P2 |
| +140V | FOCUS |



















| | |
|-----|--------------|
| U1 | 1KMC09 |
| U3 | 1M74HC4053N |
| U4 | 1NMJ072BL |
| U5 | 1UAT93CN |
| U7 | 1LM1581N |
| U33 | 1SN74ALS00AN |
| U34 | 1SN74ALS02N |
| U35 | 1SN74ALS02N |
| U36 | 1SN74ALS02N |
| U37 | 1SN74ALS153N |
| U38 | 1SNALSO8N |
| U39 | 1MC10131L |
| U41 | 1MC10131L |
| U42 | 1MC10131L |
| U43 | 1SN74ALS153N |
| U44 | 1MC10131L |
| U45 | 1KMT01 |

| | |
|---|-------------|
| 01. 9. 11. 22. 503 | 2SA1206 (K) |
| 02. 49 | 2SC3354 (S) |
| 03. 4. 52. 55. 60 | 2SA1555 |
| 05 | 2SC3779 (D) |
| 06. 18. 40 | 2SA1175 (F) |
| 07 | 2SK304 (F) |
| 08. 50. 51 | 2SK241 (FR) |
| 09. 15. 15. 15. 15. 15. 15. 15. 24-3-31. 34 | 2SA1175 (F) |
| 35. 50. 4. 505 | 2SC3315 (C) |
| 014. 17. 19. 23. 41. 46. 56 | 2SC4049 |
| 802 | 2SC2785 (F) |

| | |
|-------------------------|-------------|
| 020. 53 | 2SC3732 (L) |
| 032. 35. 42. 43. 48. 54 | 2SA1005 (K) |
| 037-39. 57 | 2SA1555 |
| 0506 | 2SA1459 (L) |
| 0507 | 2SC4049 |


| | |
|-----------------------------|-----------------------------|
| 01. 2. 9. 15. 20. 34-36. 38 | 501. 508. 509. 511-514 |
| | 15S132 |
| 03-6. 10-14. 15-18. 21-23 | 26. 28-31. 40. 41. 502. 503 |
| | 505-507. 802 |
| 07. 8 | 1M7400 |
| 024. 25 | 1MT23.0JA |
| | 1TLR12 |

SCHEMATIC DIAGRAM

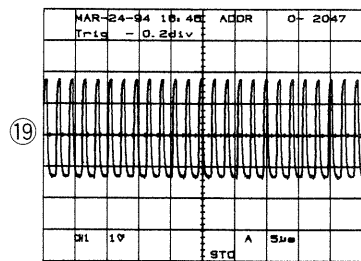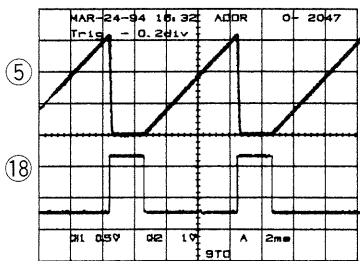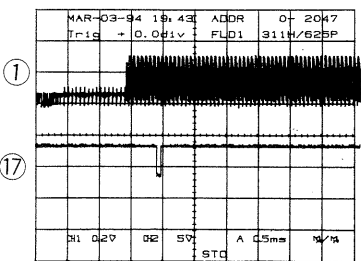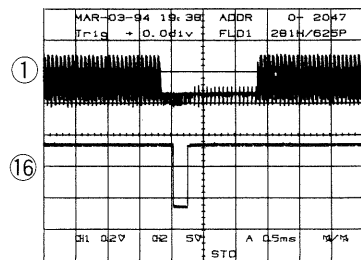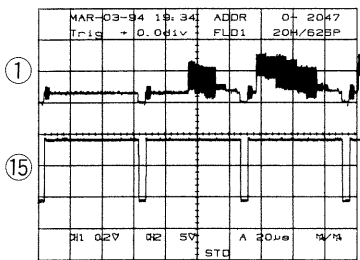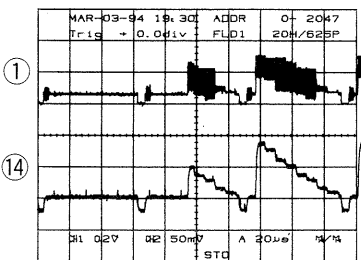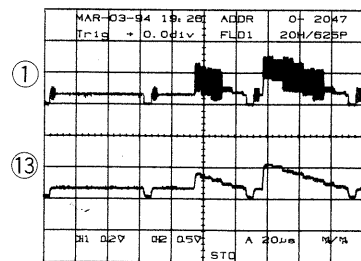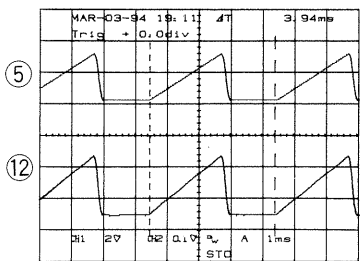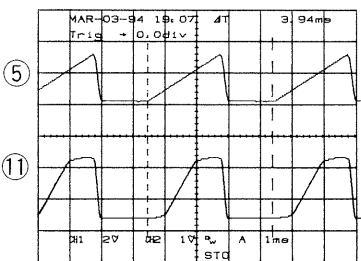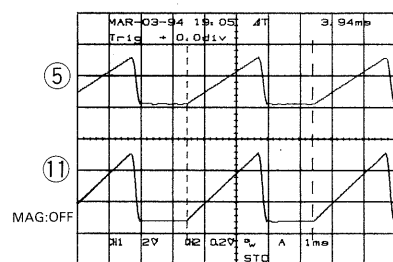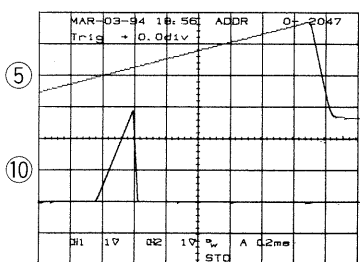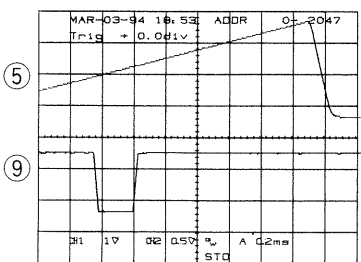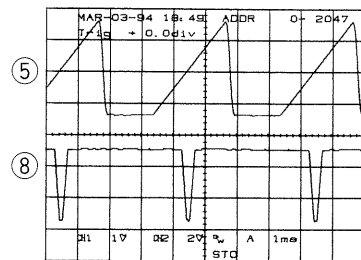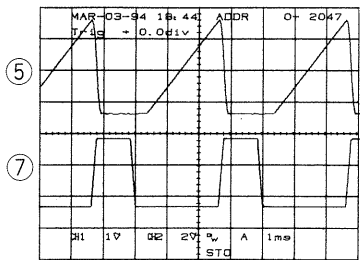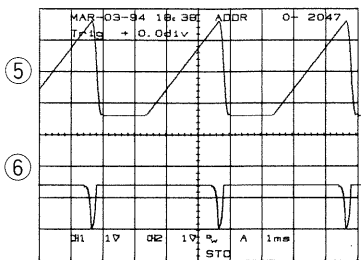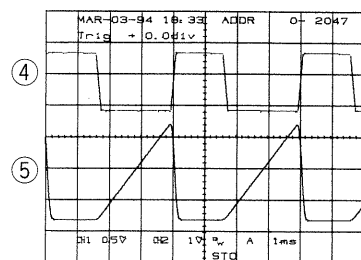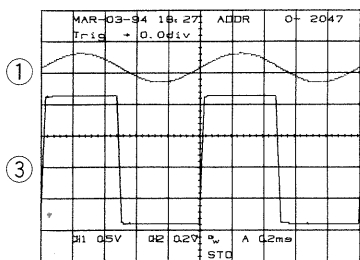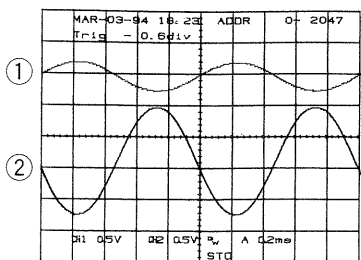

STO CPU UNIT (X77-1660-0X)

STO UNIT

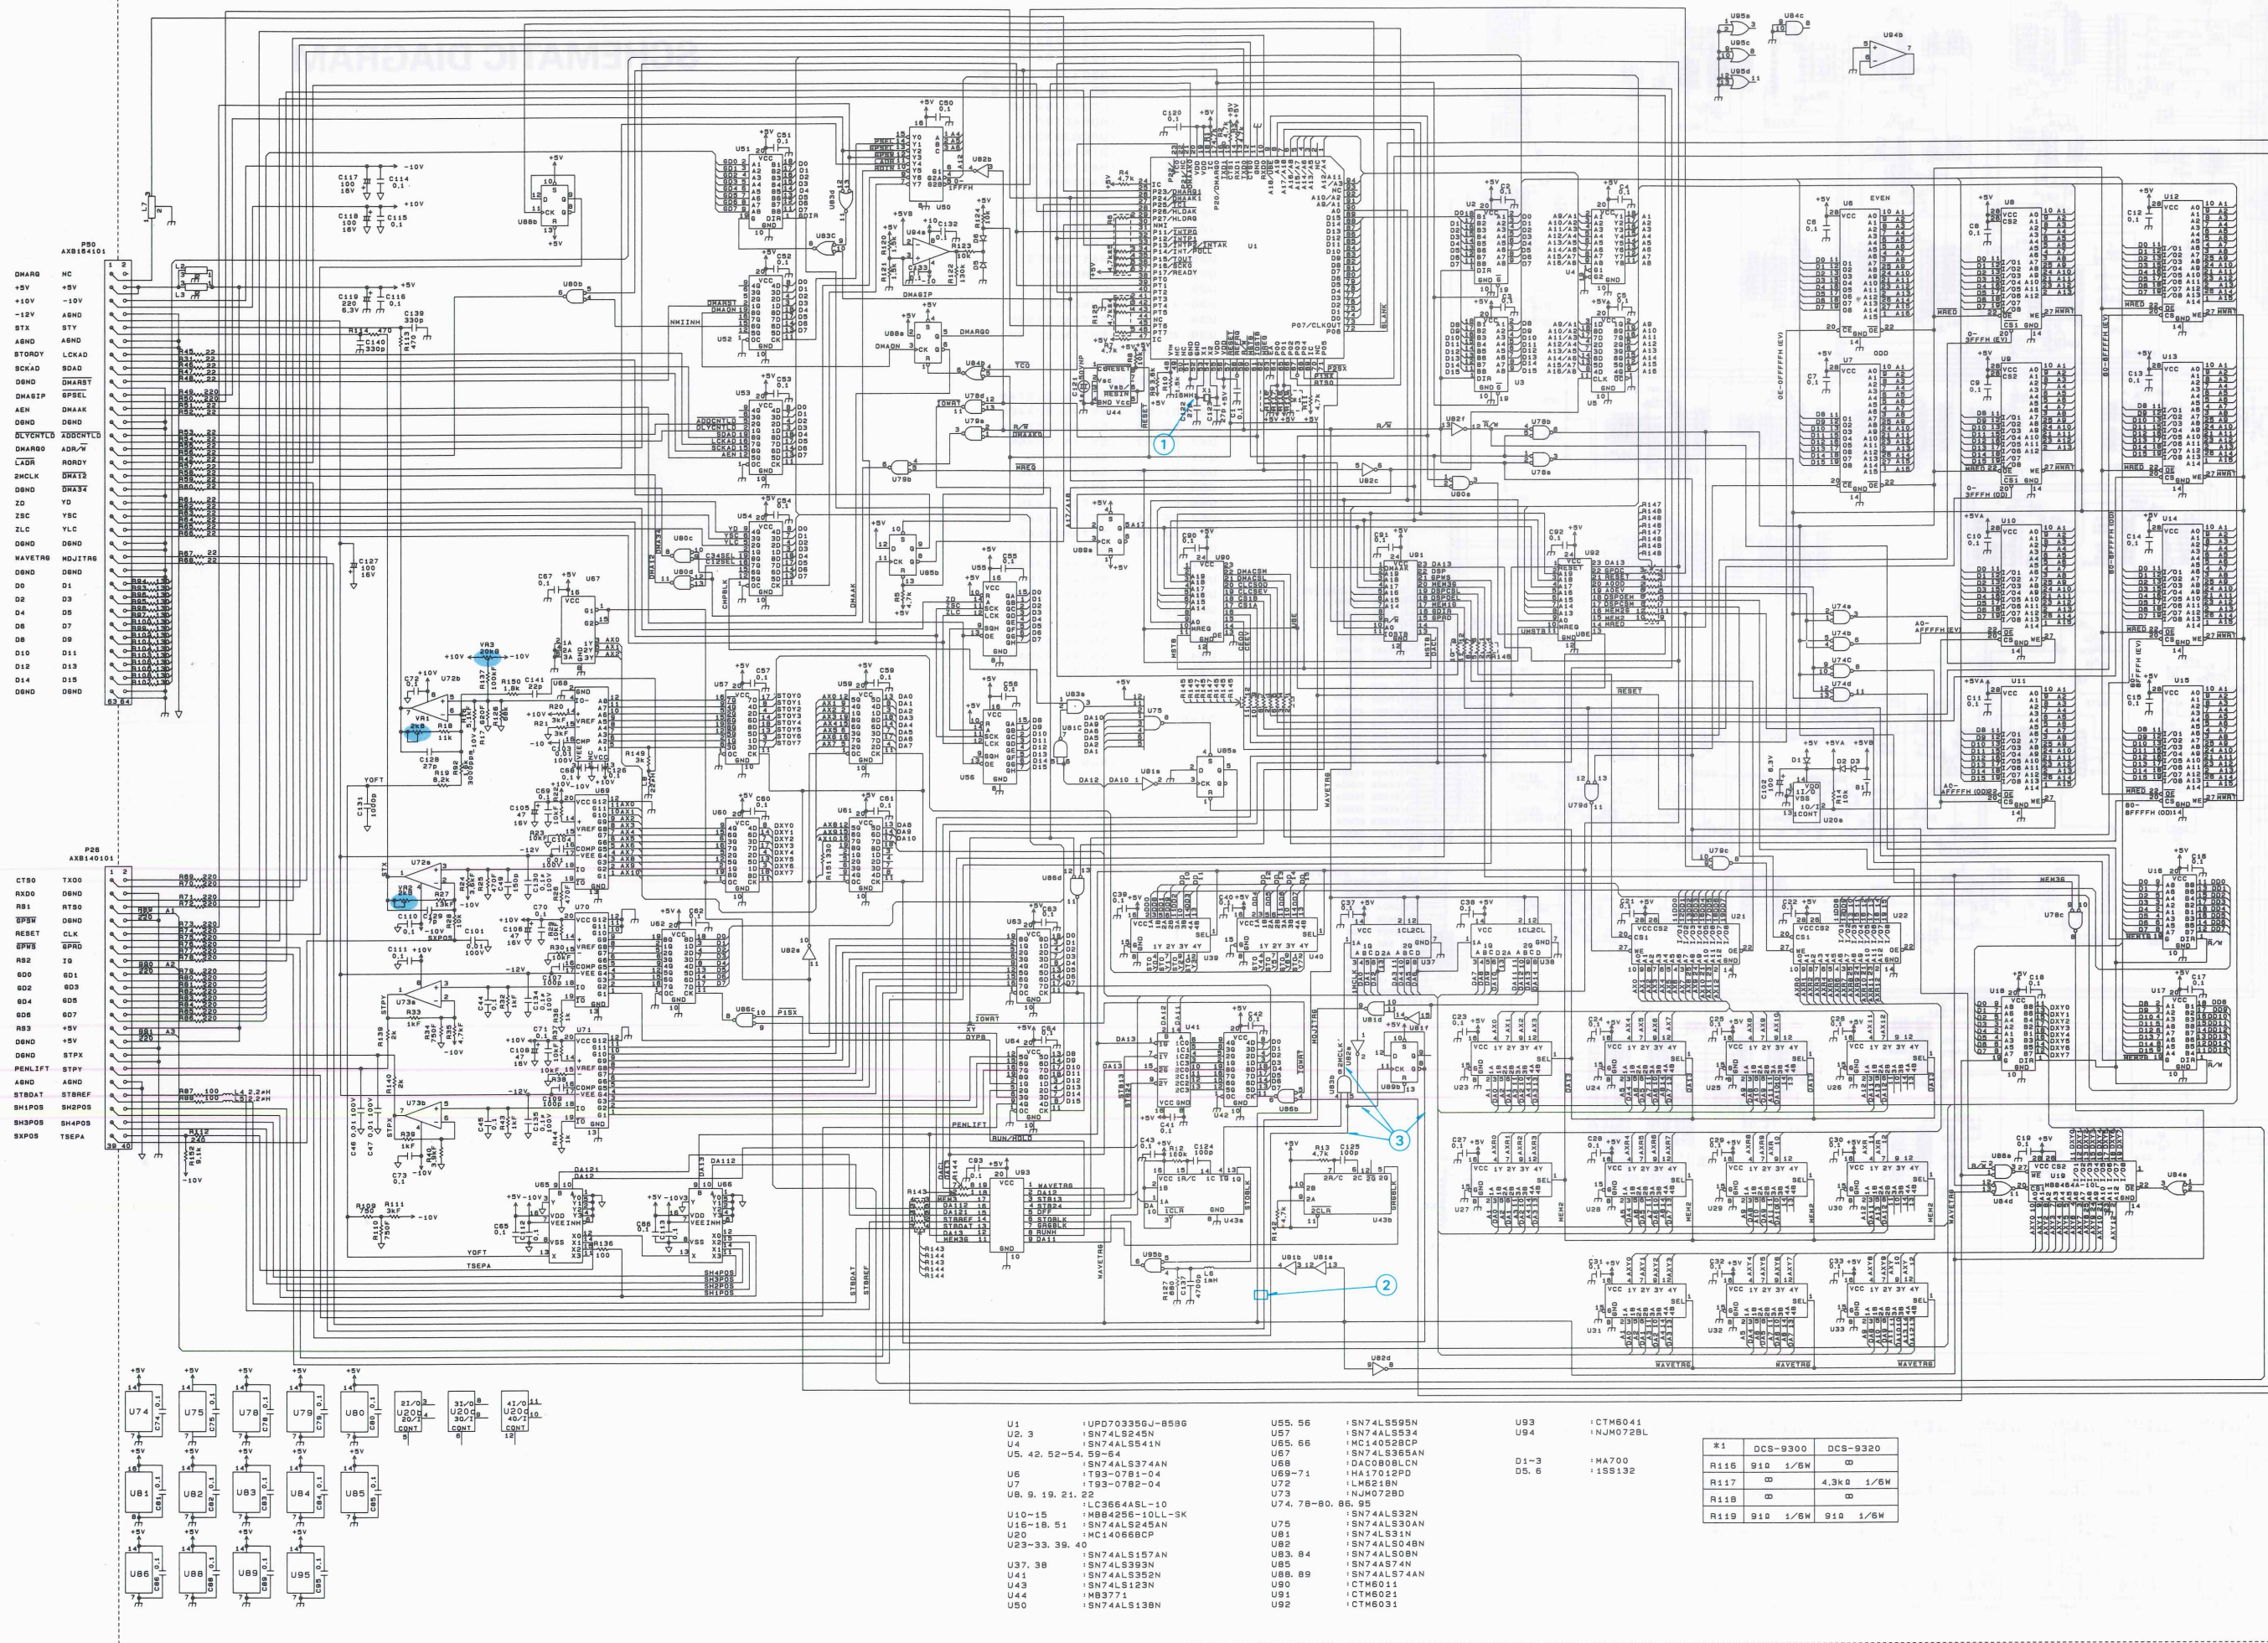

P80
AKB164101


DMARG NC
+5V +5V
+10V -10V
-12V AGND
STX STY
AGND AGND
STORDY LCKAD
SCKAD SDAD
DEND DMARST
DMARST SPSEL
AEN DMAAK
DEND DEND
OLYCHYLD XDCNYLD
DMARGO ADR-T
RORDY RORDY
2MCLK DMK12
DEND DMK12
ZD YD
Z8C Y8C
ZLC YLC
DEND DEND
MAYETAG MDJ178
DEND DEND
D0 D1
D2 D3
D4 D5
D6 D7
D8 D9
D10 D11
D12 D13
D14 D15
DEND DEND

P82
AKB140101

CT80 TXD0
RXD0 DEND
RT80
SPSW DEND
RESET CLK
SPWE SPWD
RS8 18
R00 R01
R02 R03
R04 R05
R06 R07
RS3 +5V
DEND +5V
DEND +5V
PENLFT STPY
AGND AGND
STBDAT STBRF
SH1POS SH2POS
SH3POS SH4POS
SXPOS TSEPA




- U1 :UPD70335GJ-8596
- U2,3 :SN74LS245N
- U4 :SN74ALS41N
- U5,42,52-54,59-64 :SN74ALS374AN
- U6 :T93-0781-04
- U7 :T93-0782-04
- U8,9,19,21,22 :LC3664ASL-10
- U10-15 :MB84256-10LL-SK
- U16-18,51 :SN74ALS245AN
- U20 :MC140668CP
- U23-33,39,40 :SN74ALS157AN
- U37,38 :SN74ALS32N
- U41 :SN74ALS245AN
- U43 :SN74ALS23N
- U44 :MB3771
- U50 :SN74ALS139N
- U55,56 :SN74LS595N
- U57 :SN74ALS534
- U58,56 :MC140528CP
- U57 :SN74LS365AN
- U68 :DAC0808BLCN
- U69-71 :HA17012PD
- U72 :LM8218N
- U73 :1NJM0728D
- U74,78-80,86,95 :SN74ALS32N
- U75 :SN74ALS30AN
- U81 :SN74ALS14
- U82 :SN74ALS04BN
- U83,84 :SN74ALS08N
- U85 :SN74ALS74N
- U88,89 :SN74ALS74AN
- U90 :CTM6011
- U91 :CTM6021
- U92 :CTM6031
- U93 :CTM6041
- U94 :1NJM0728L
- D1-3 :MA700
- D5,6 :1SS132

| *1 | DCS-9300 | DCS-9320 |
|------|----------|------------|
| R116 | 910 1/6W | □ |
| R117 | □ | 4.3kΩ 1/6W |
| R118 | □ | □ |
| R119 | 910 1/6W | 910 1/6W |




SCHEMATIC DIAGRAM

STO UNIT

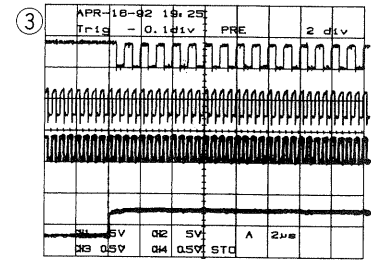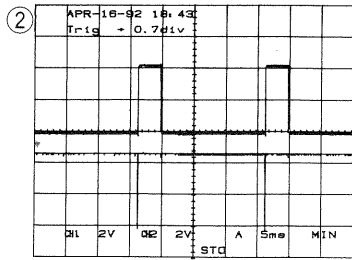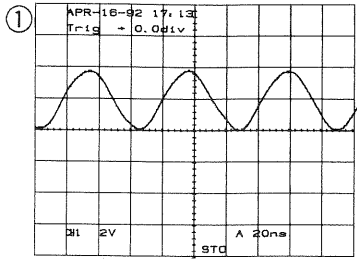

R/O UNIT (X77-1670-0X)

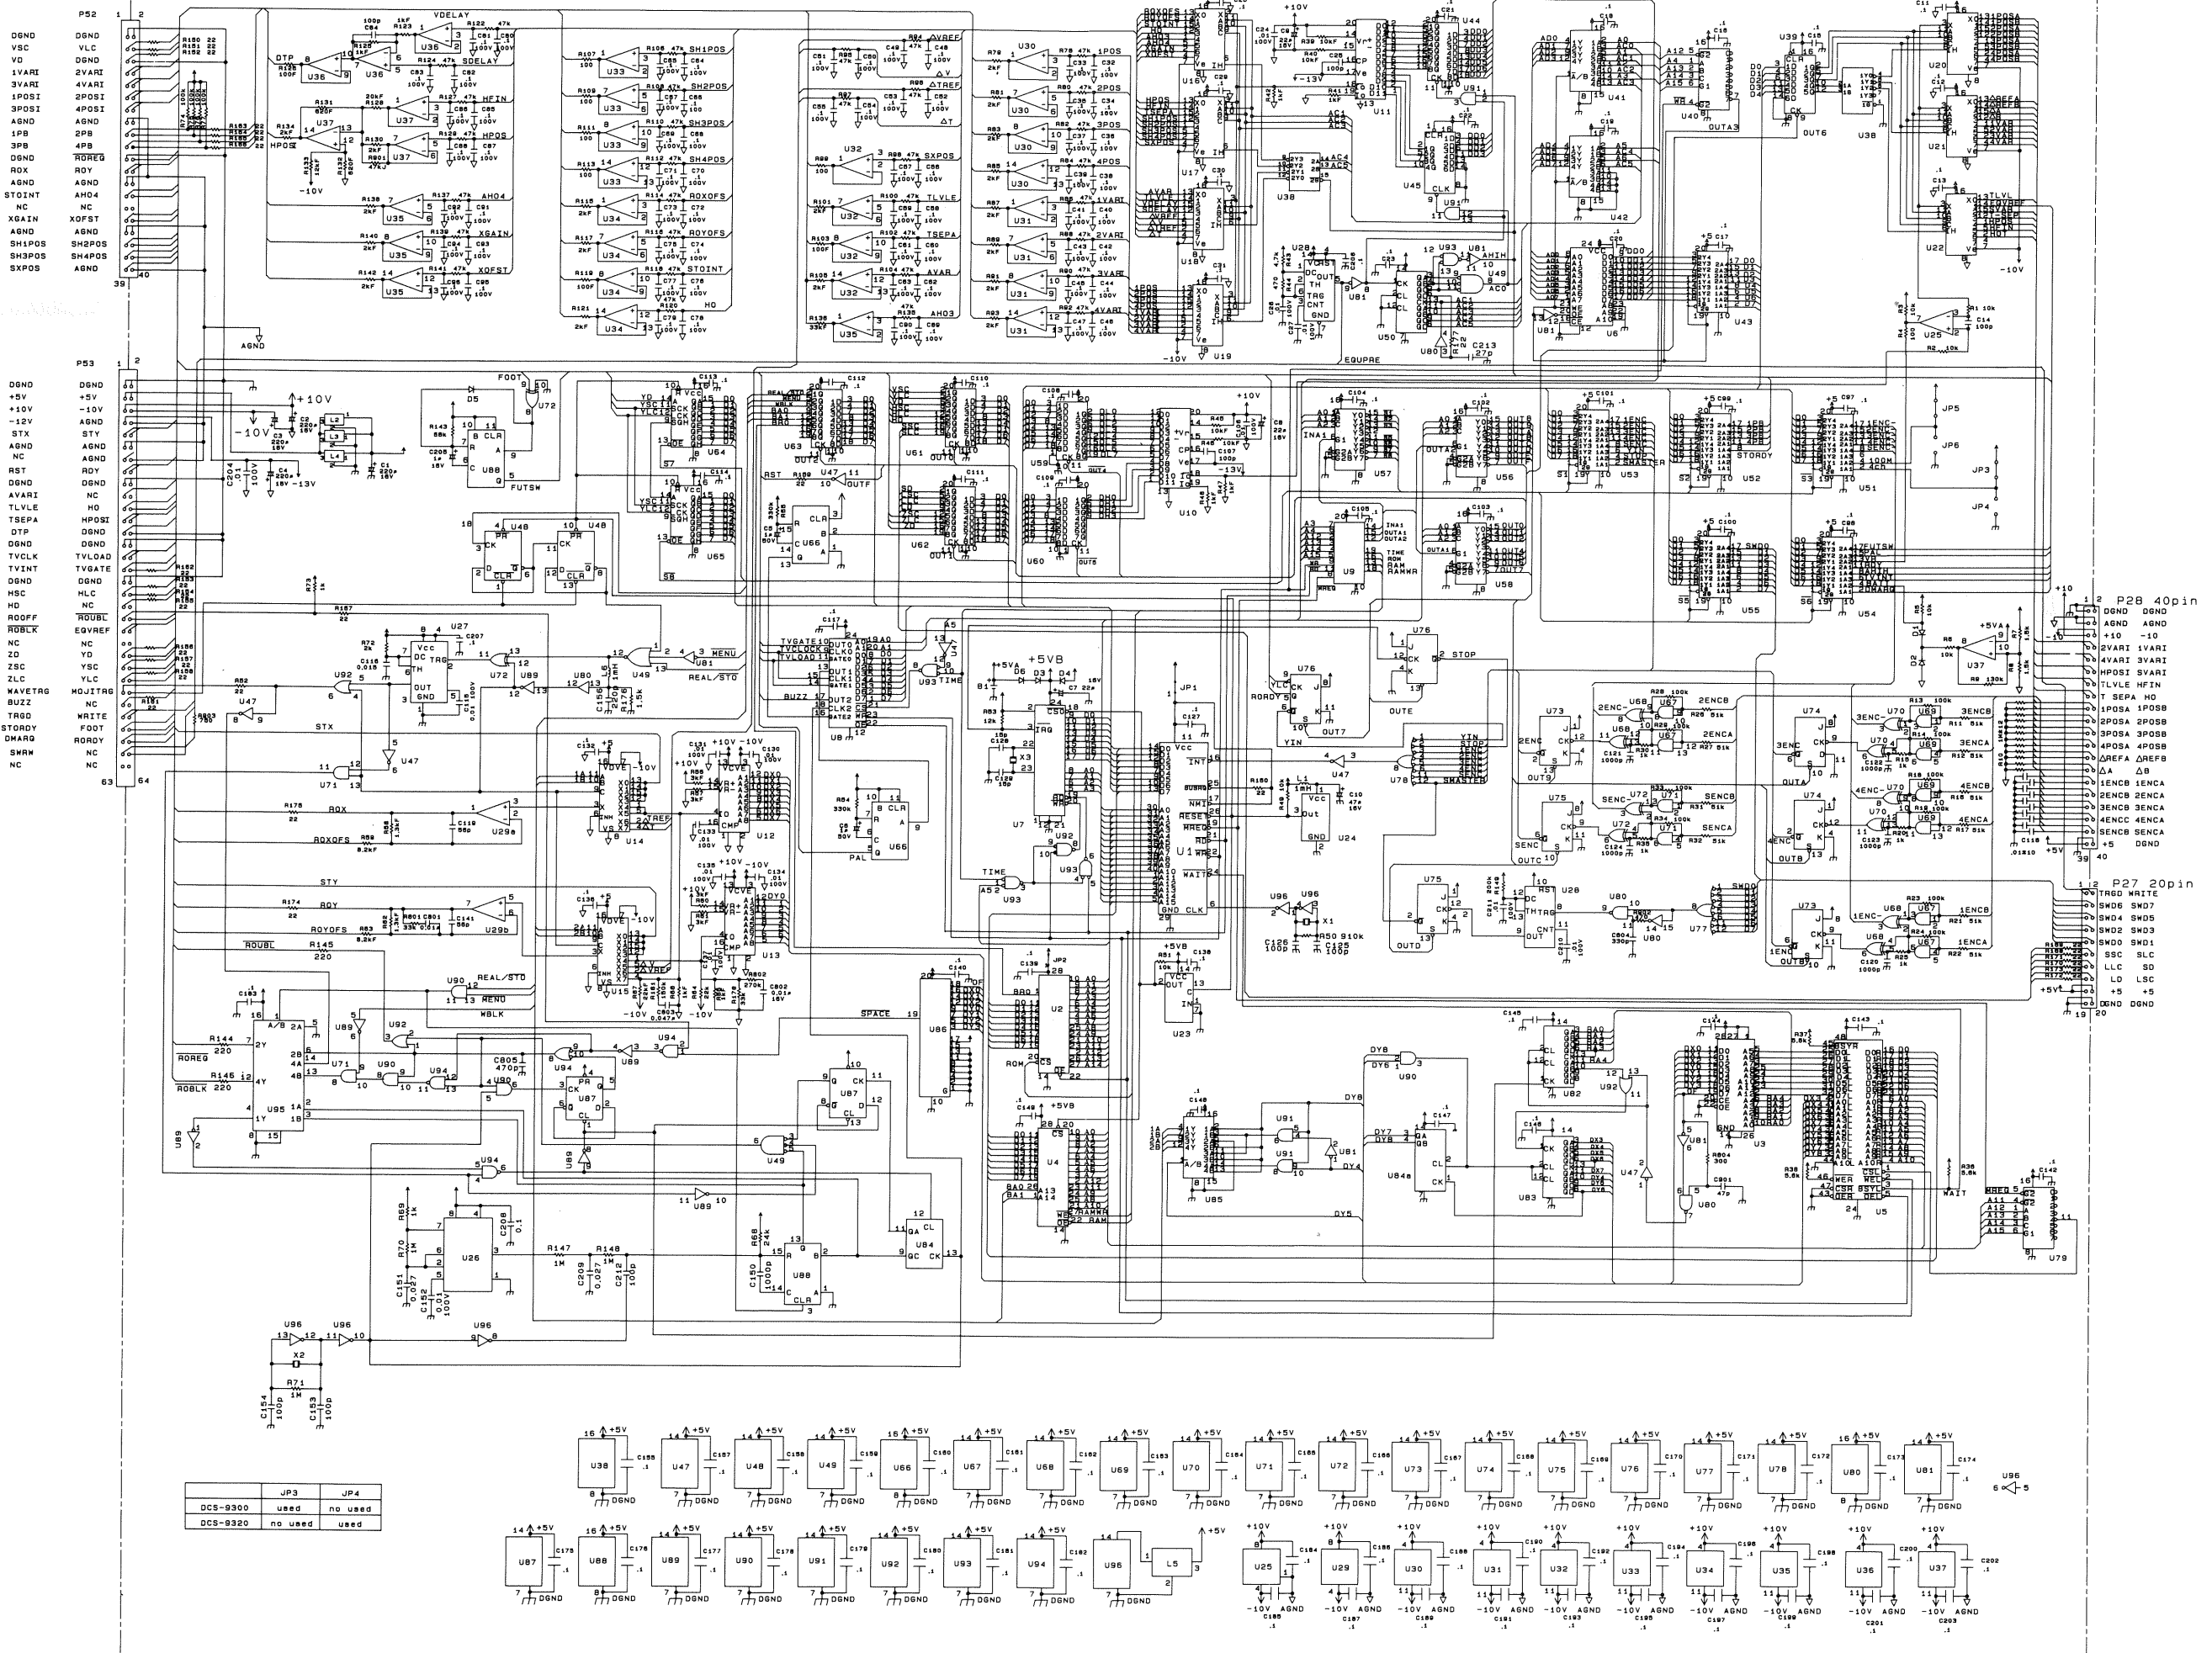


- U1 : LH0080BF
- U2 : T93-0783-04
- U3 : T93-0784-04
- U4 : M884256-10LL-S1
- U5 : M88422-12LP-G
- U6 : LC3517B5-15
- U7 : HD64610P
- U8 : UPD8253C-2
- U9 : DTM-5010
- U10, 11 : HA17012PB
- U12, 13 : DAC0808LCN
- U14-22 : MC14051BCP
- U23 : MC14066BCP
- U24 : PST518B
- U25 : LM311N
- U26, 27 : HA17555PS
- U28 : NUM5560
- U29 : LM6218N
- U30-37 : NUM074D
- U38 : SN74ALS139N
- U39, 45 : SN74ALS174N
- U40, 56-58, 79 : SN74ALS139N
- U41, 42, 85, 95 : SN74ALS157AN
- U43, 51-55 : SN74ALS244BN
- U44, 59-63 : SN74ALS374AN
- U47, 81, 89 : SN74ALS04BN
- U49 : SN74ALS27N
- U50, 82-84 : SN74ALS393N
- U64, 65 : SN74ALS595N
- U66, 88 : SN74ALS123N
- U67, 69, 71 : TC74HC08AP
- U68, 70, 72 : TC74HC86AP
- U73-76 : SN74ALS107AN
- U77, 78 : SN74ALS30AN
- U80 : SN74ALS31N
- U86 : SN74ALS688N
- U87, 48 : SN74ALS74AN
- U90, 91 : SN74ALS08N
- U92, 93 : SN74ALS32N
- U94 : SN74ALS00AN
- U96 : TC74HCU04AP

- D1-6 : 1SS132
- B1 : W09-0408-05

| | | |
|----------|---------|---------|
| | JP3 | JP4 |
| DCS-9300 | used | no used |
| DCS-9320 | no used | used |

SCHEMATIC DIAGRAM

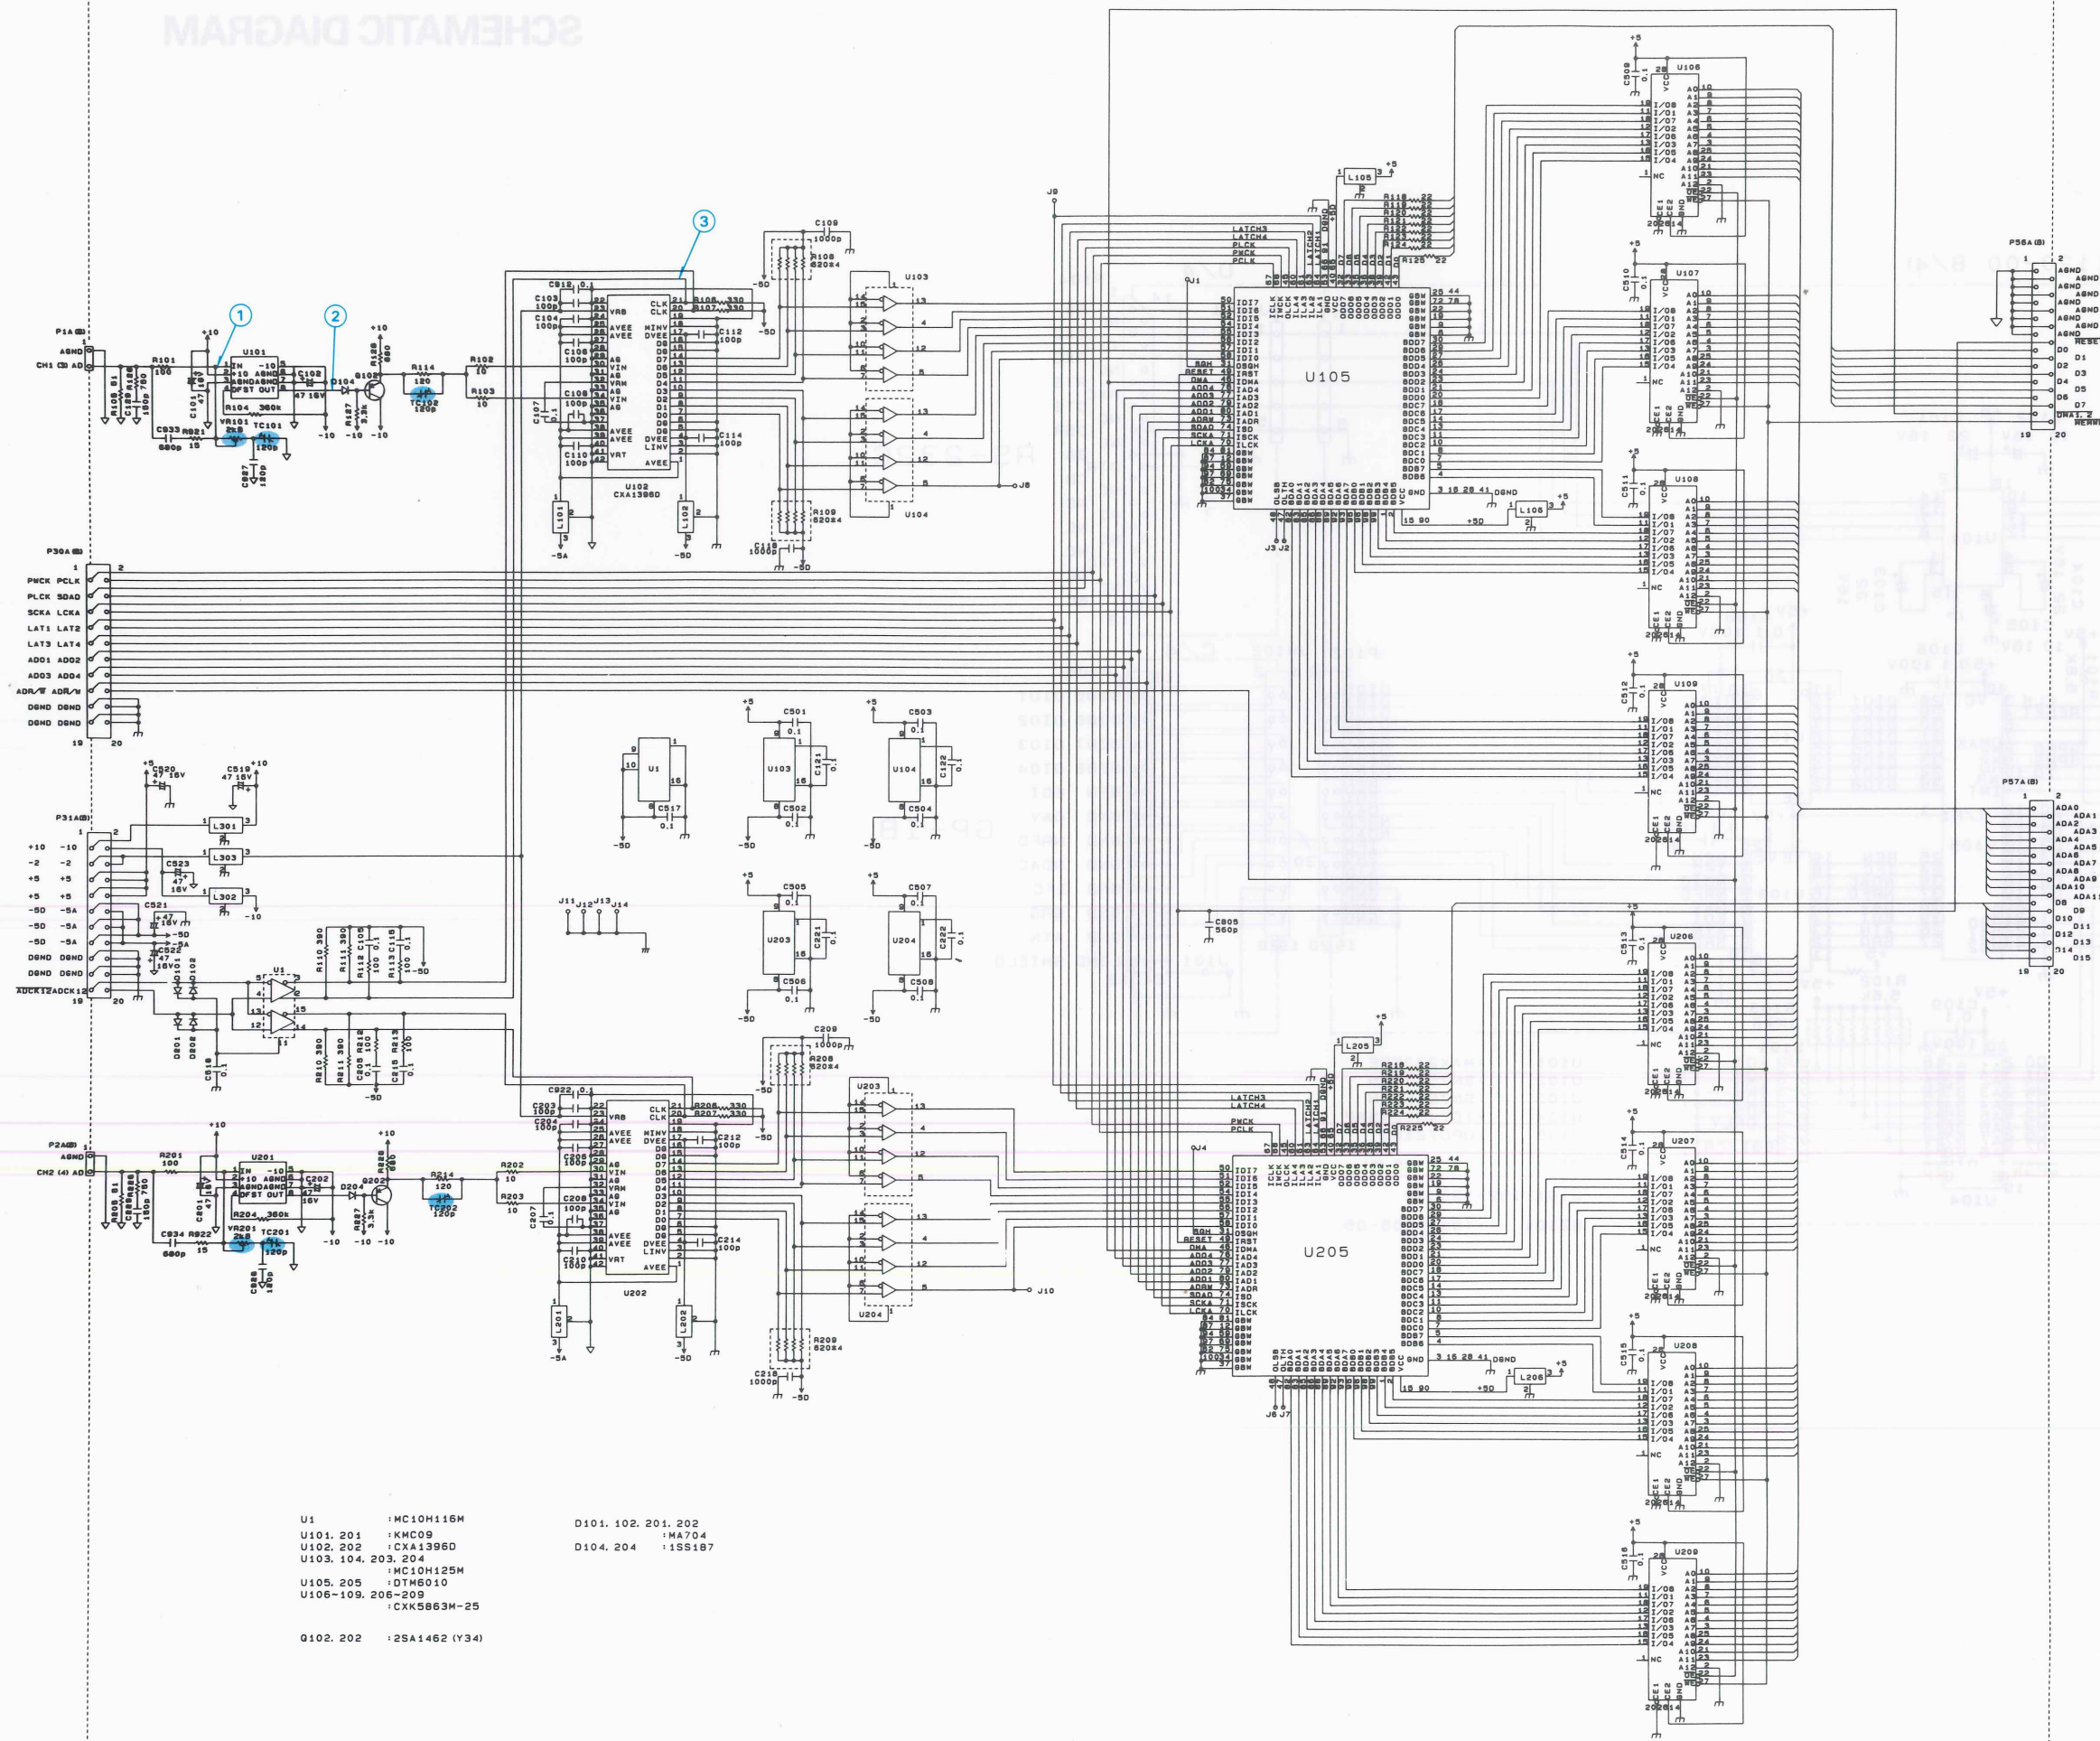



- U1 : MC10H116M
- U101, 201 : KMC09
- U102, 202 : CXA1396D
- U103, 104, 203, 204
- U105, 205 : MC10H125M
- U106-109, 206-209 : DT46D10
- : CXK5863M-25

0102, 202 : 2SA1462 (Y34)


SCHEMATIC DIAGRAM

AD UNIT

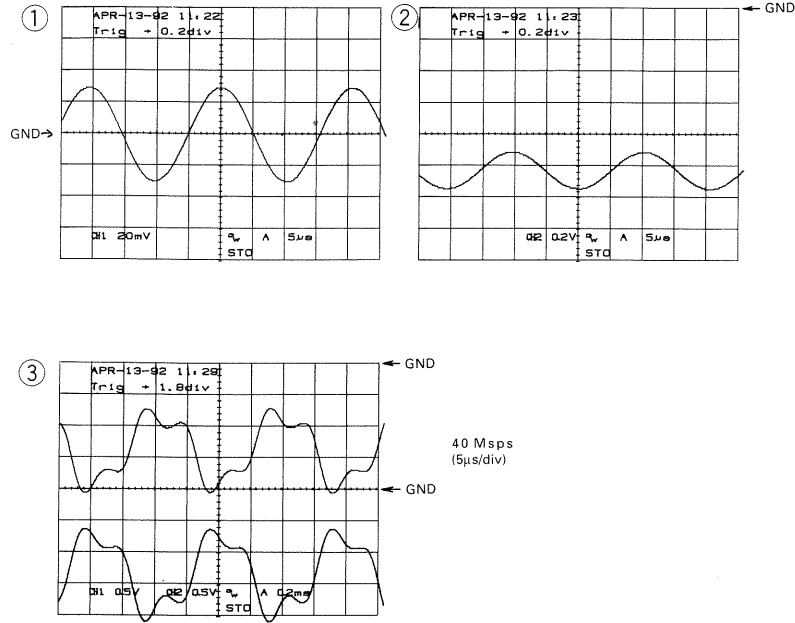

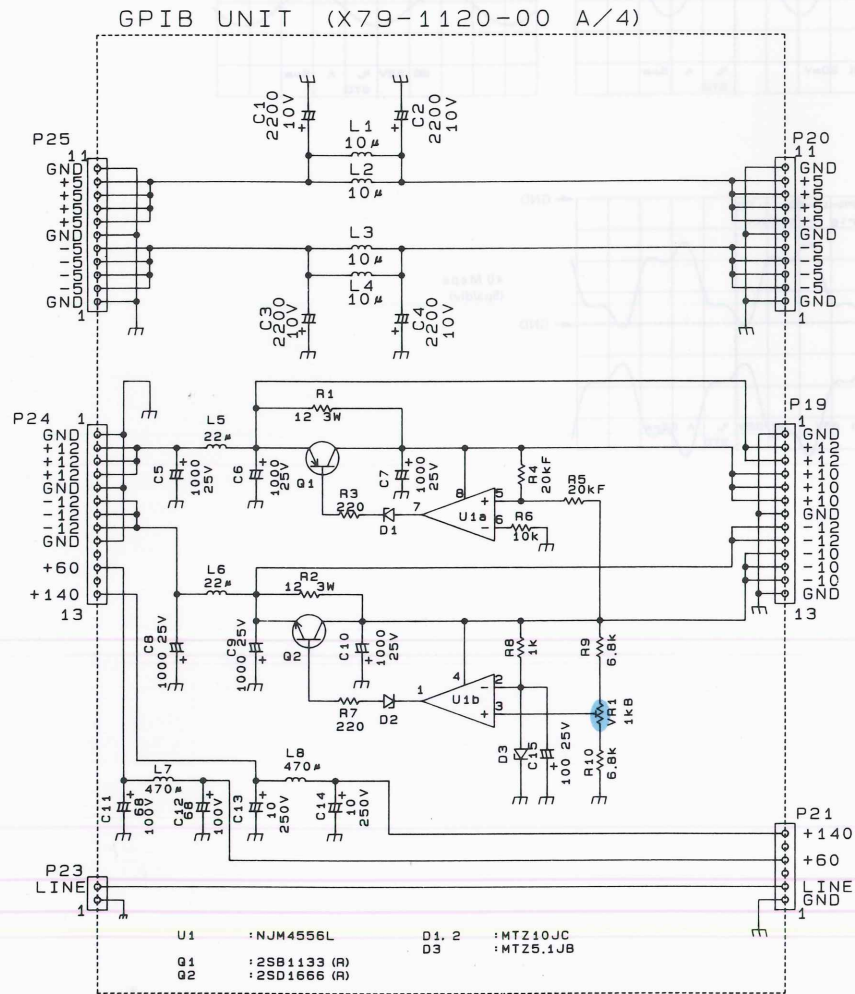

- U1 : NJM4556L
- Q1 : 2SB1133 (R)
- Q2 : 2SD1666 (R)
- D1, 2 : MTZ10JC
- D3 : MTZ5.1JB

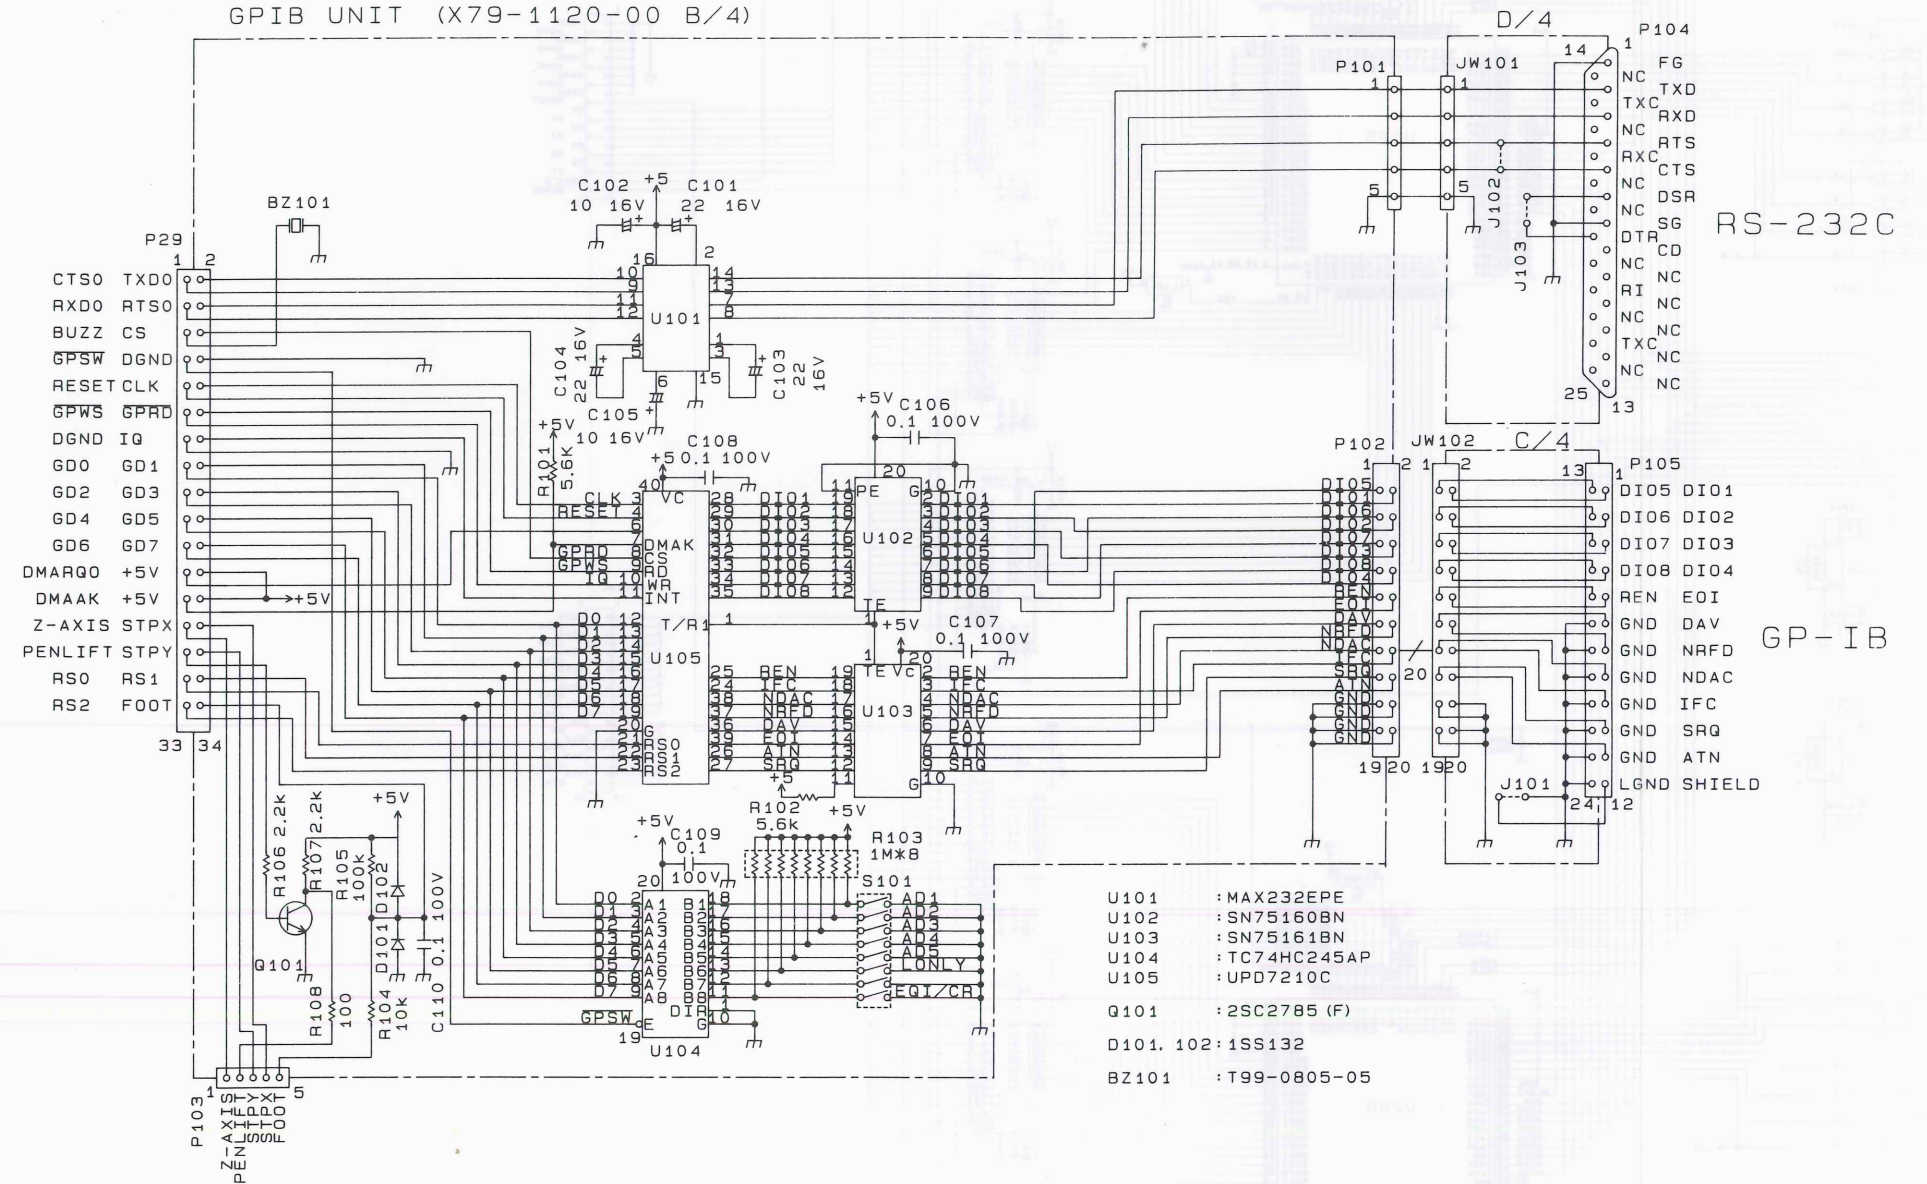


- U101 : MAX232EPE
- U102 : SN75160BN
- U103 : SN75161BN
- U104 : TC74HC245AP
- U105 : UPD7210C
- Q101 : 2SC2785 (F)
- D101, 102 : 1SS132
- BZ101 : T99-0805-05

RS-232C


GP-IB

SCHEMATIC DIAGRAM

FINAL UNIT (X80-1140-00)

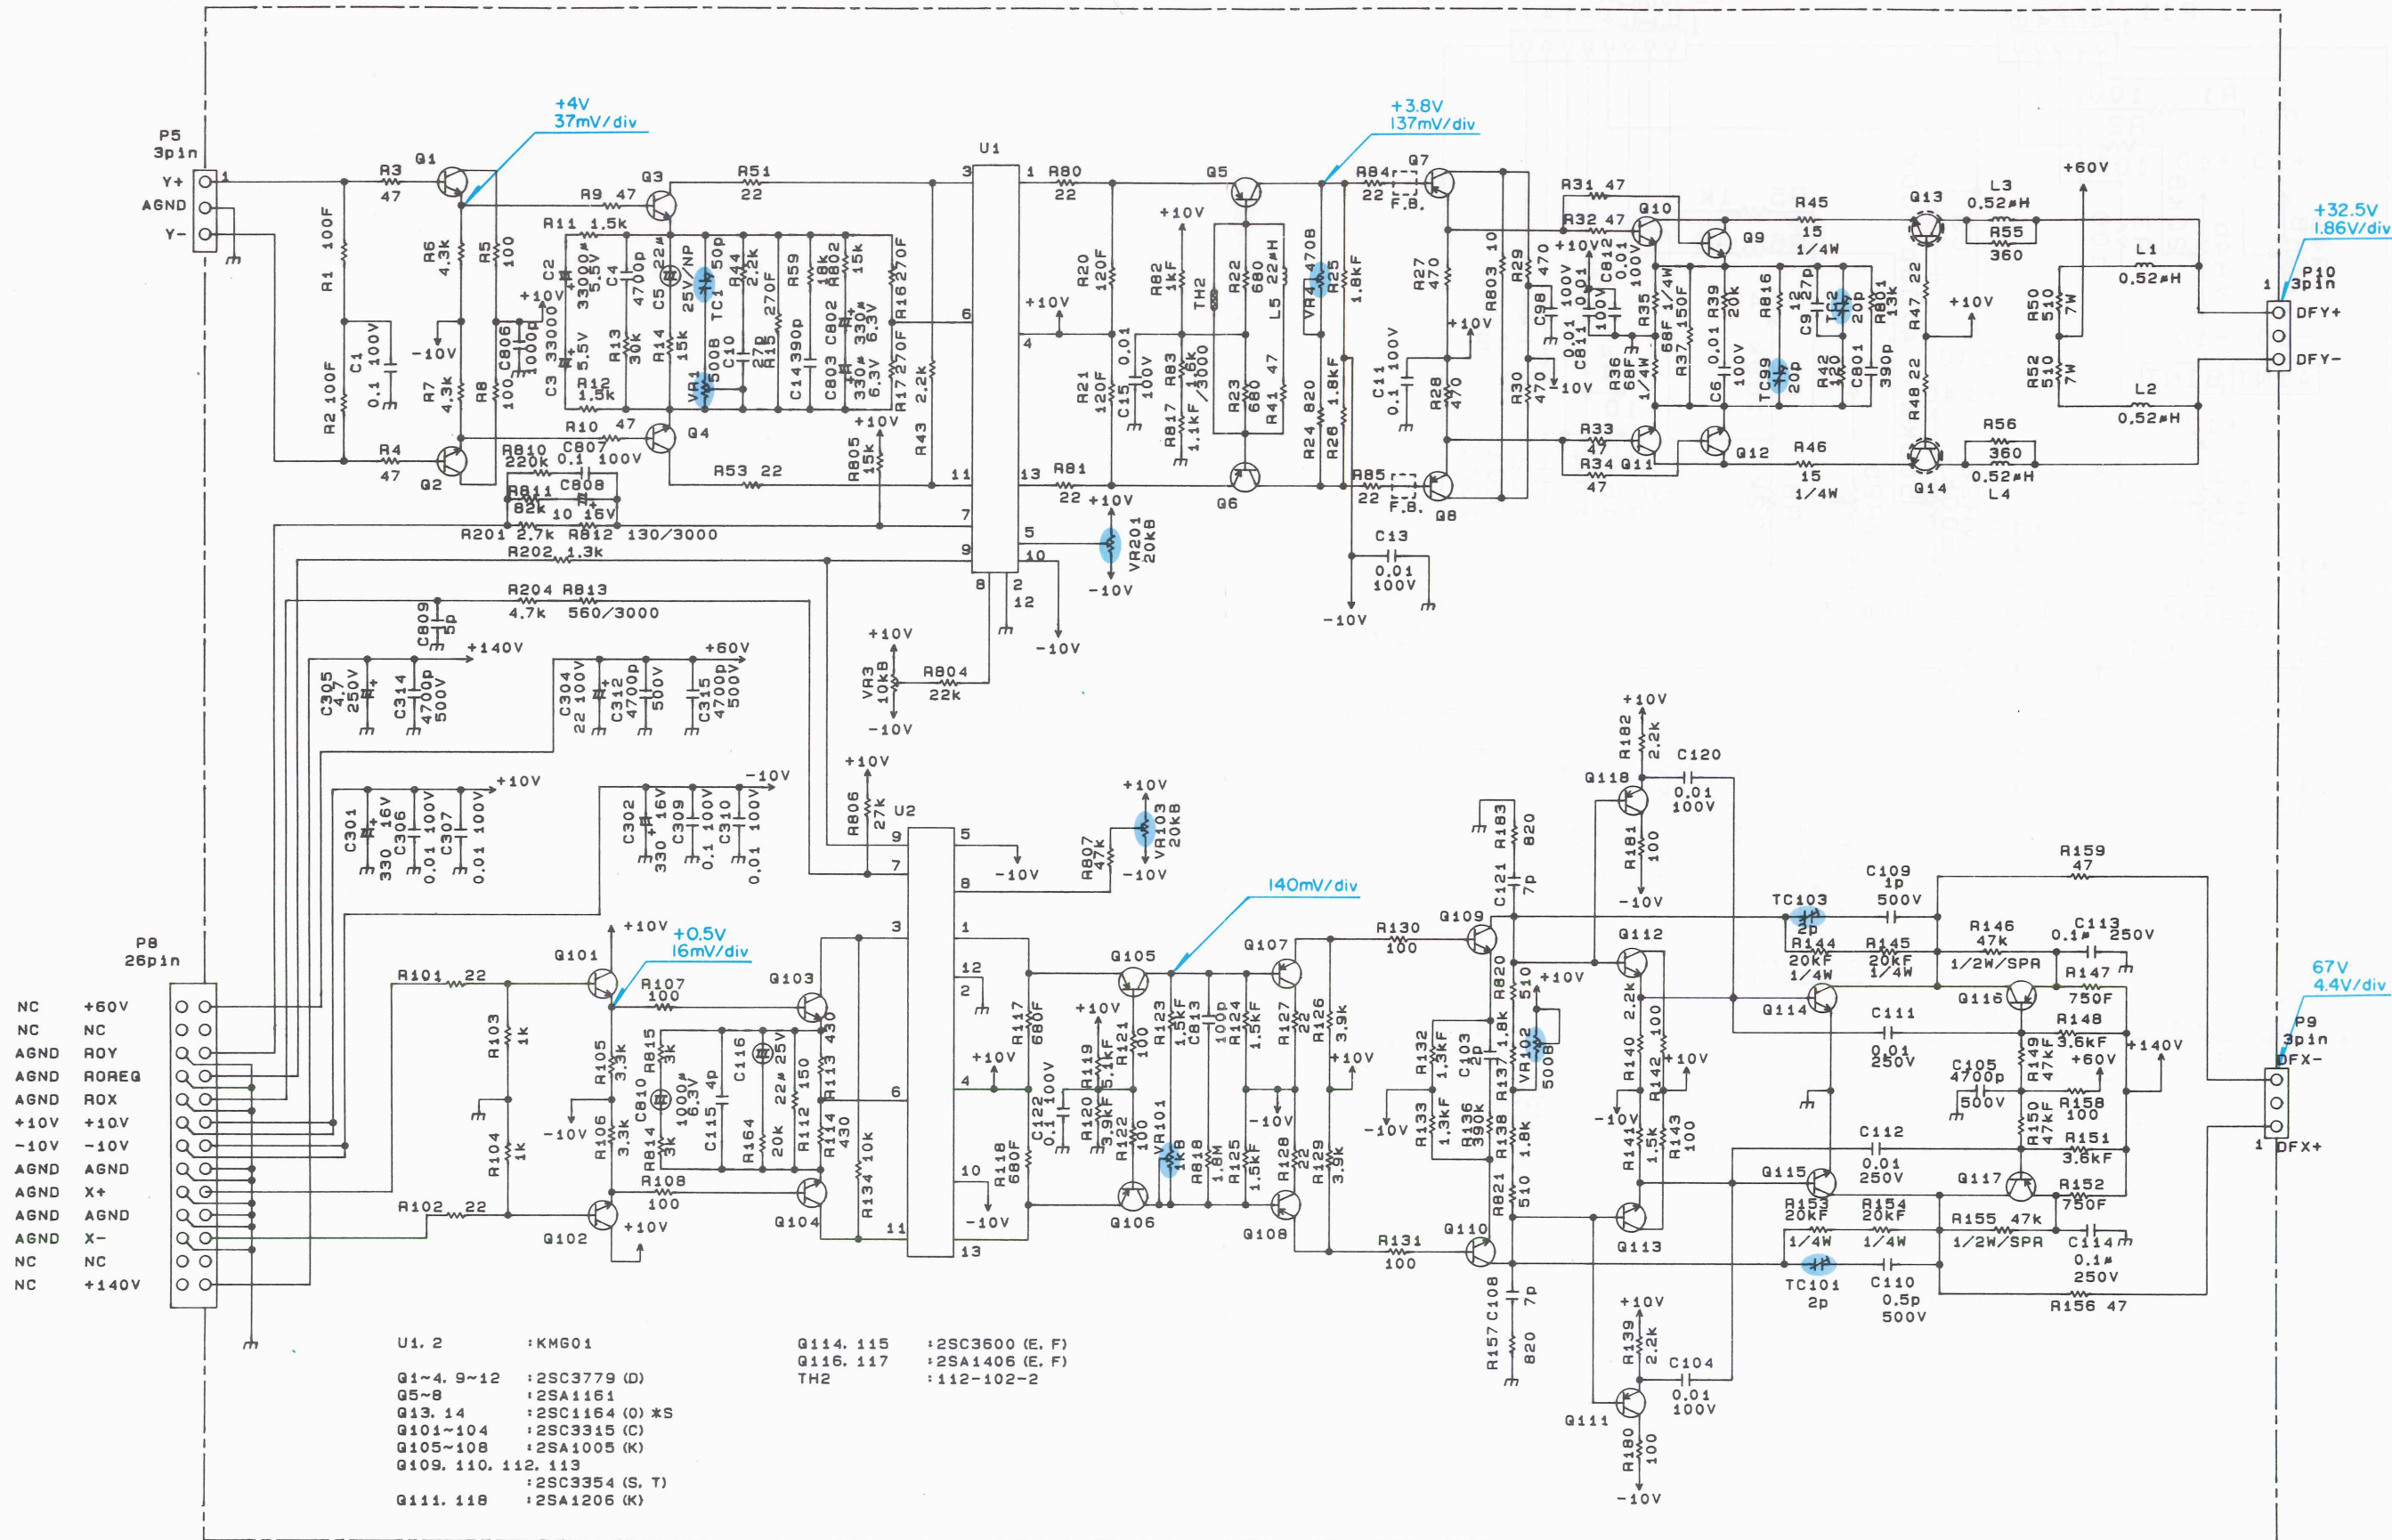


SCHEMATIC DIAGRAM

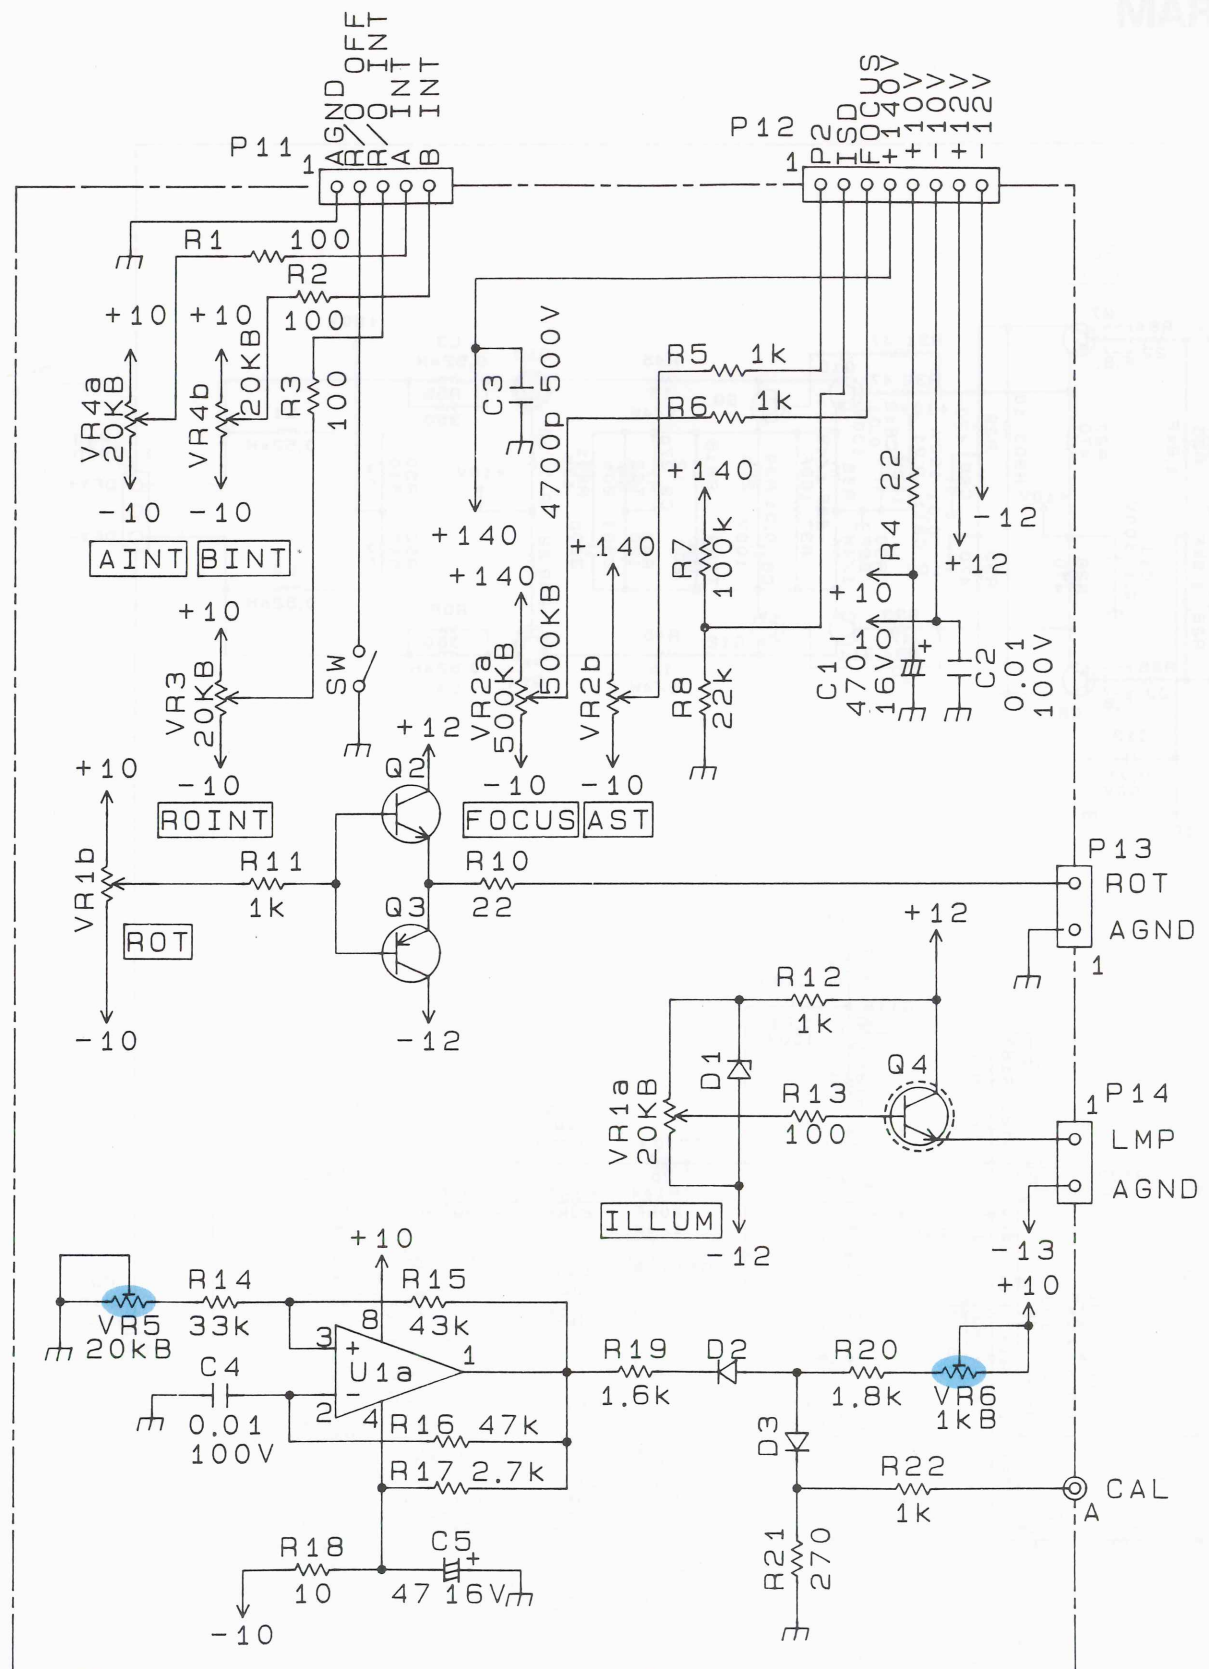

- | | |
|----------------|------------------|
| U1 : NJM4558D | Q2 : 2SC1384 (Q) |
| D1 : MTZ24JC | Q3 : 2SA684 (Q) |
| D2, 3 : 1SS132 | Q4 : 2SD1666 (S) |


SCHEMATIC DIAGRAM

ENCODER UNIT (X81-3040-00)

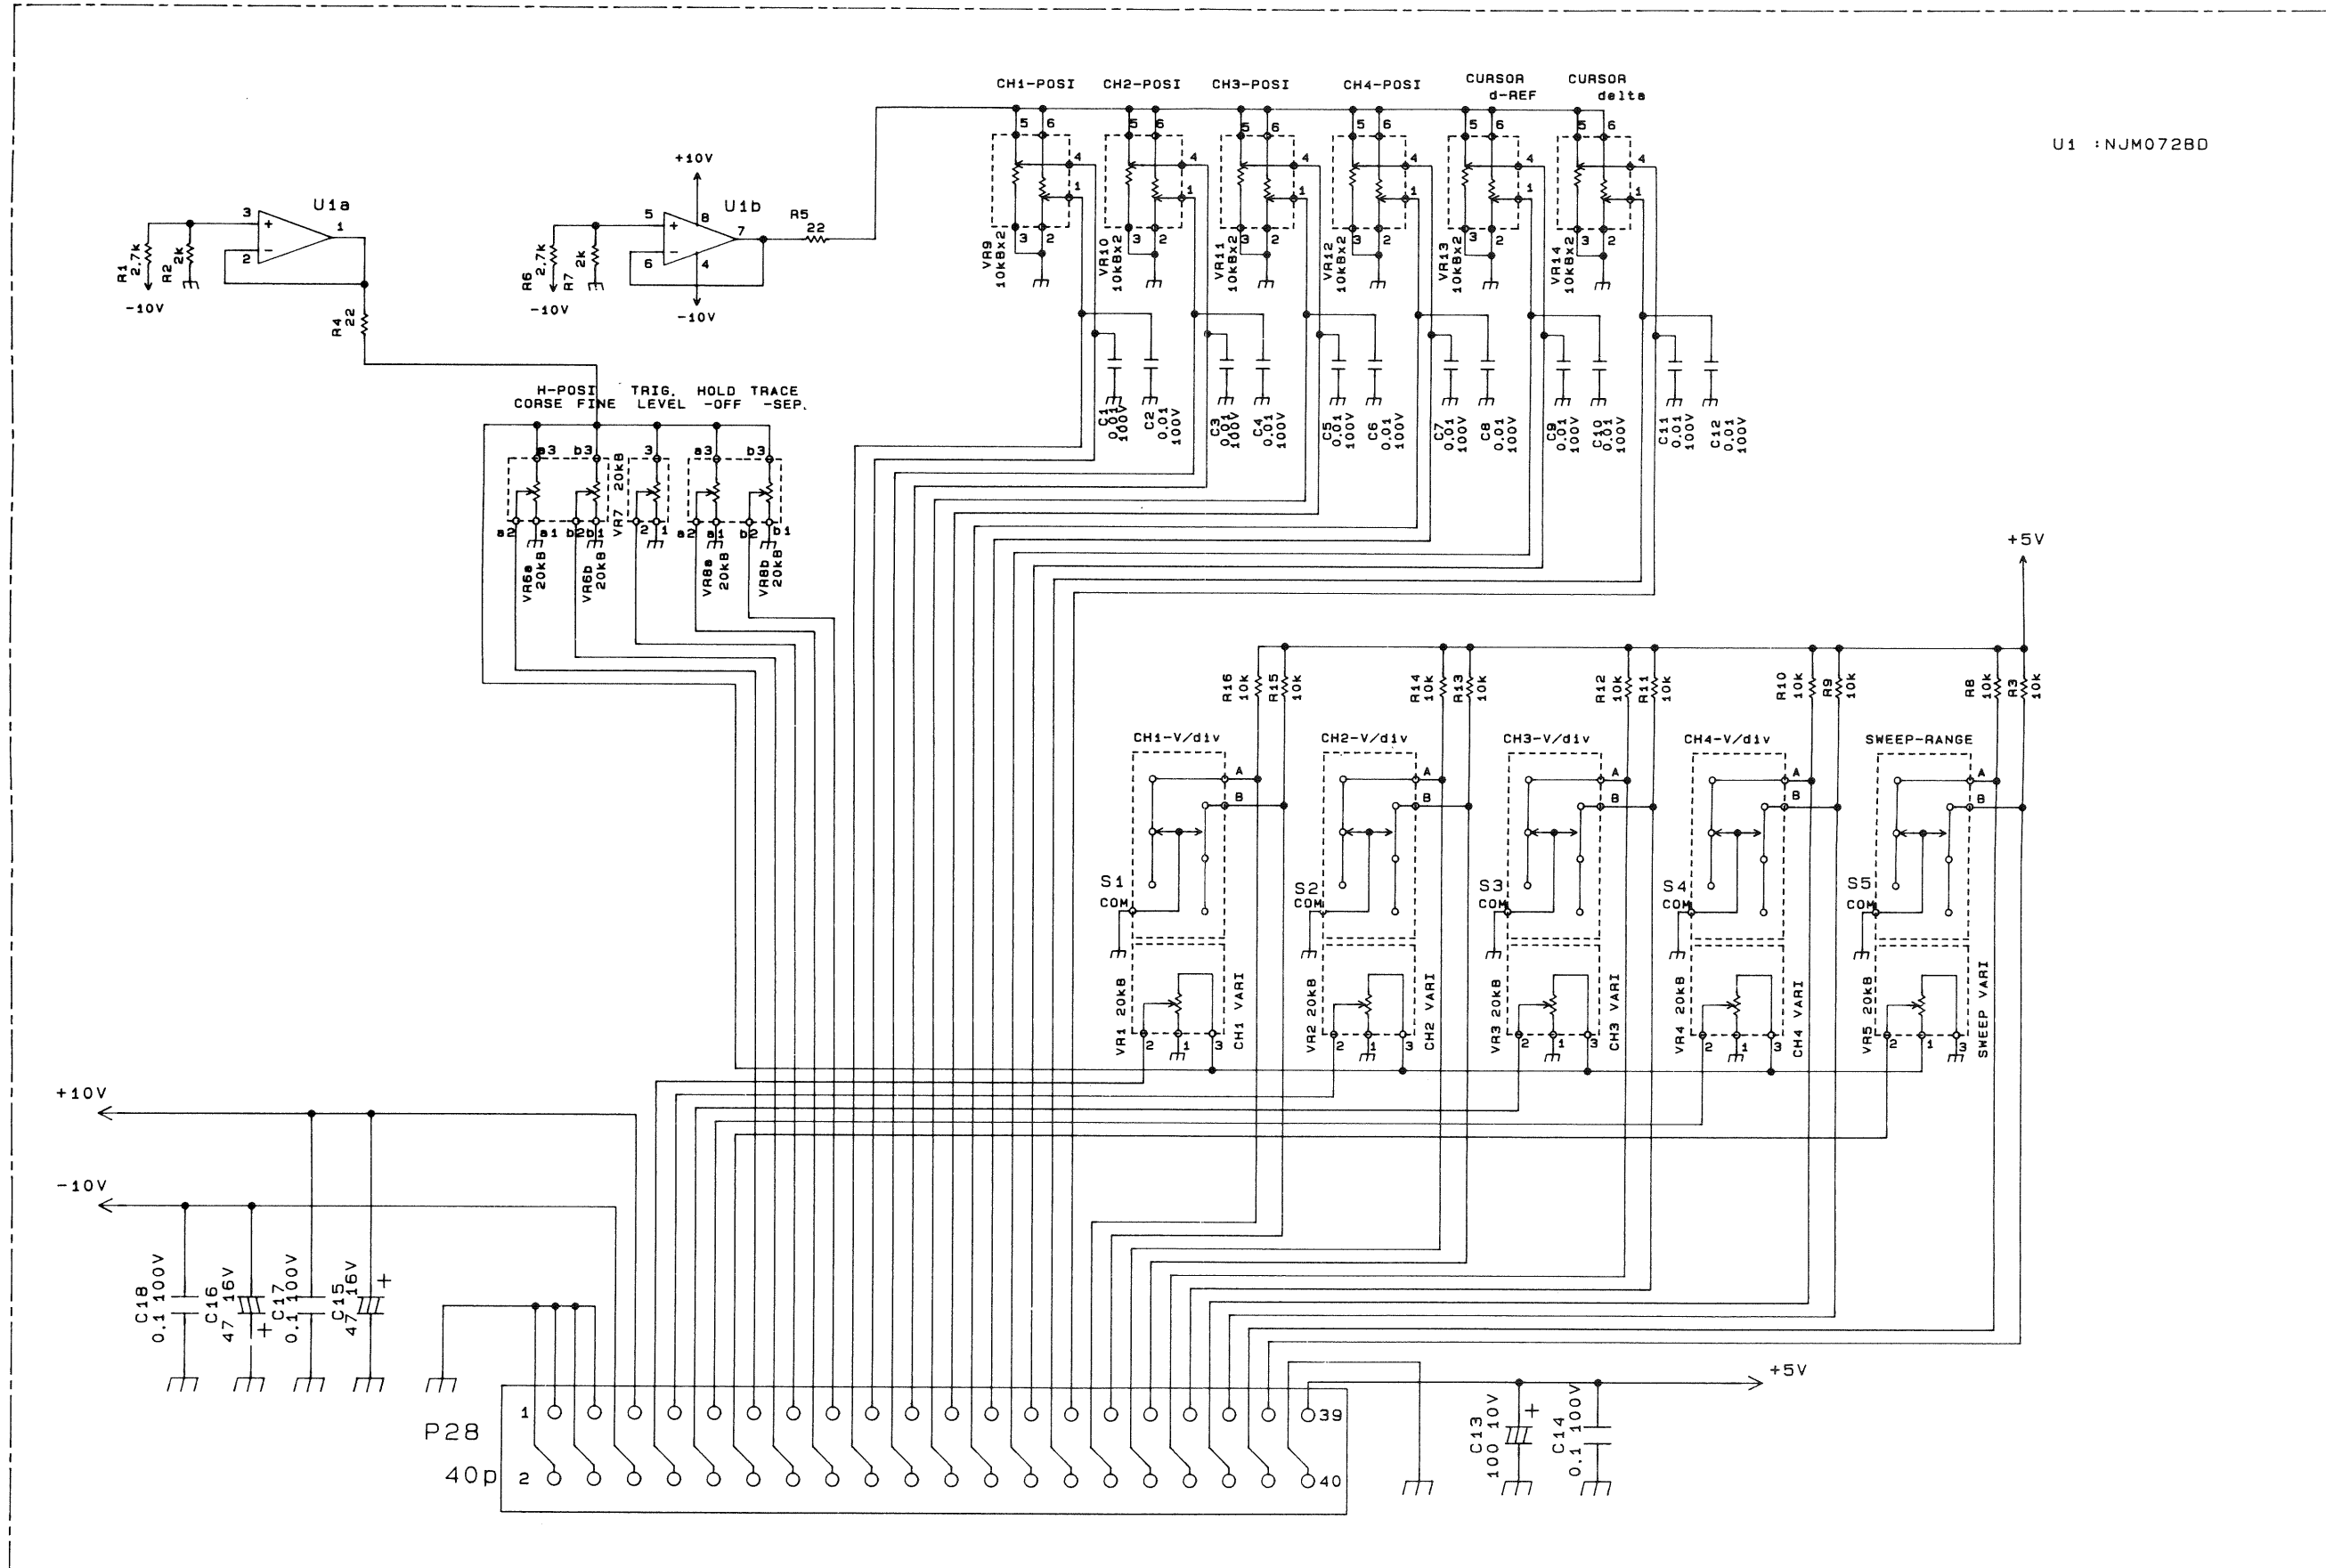

SCHEMATIC DIAGRAM


PANEL UNIT (W02-2110-08)

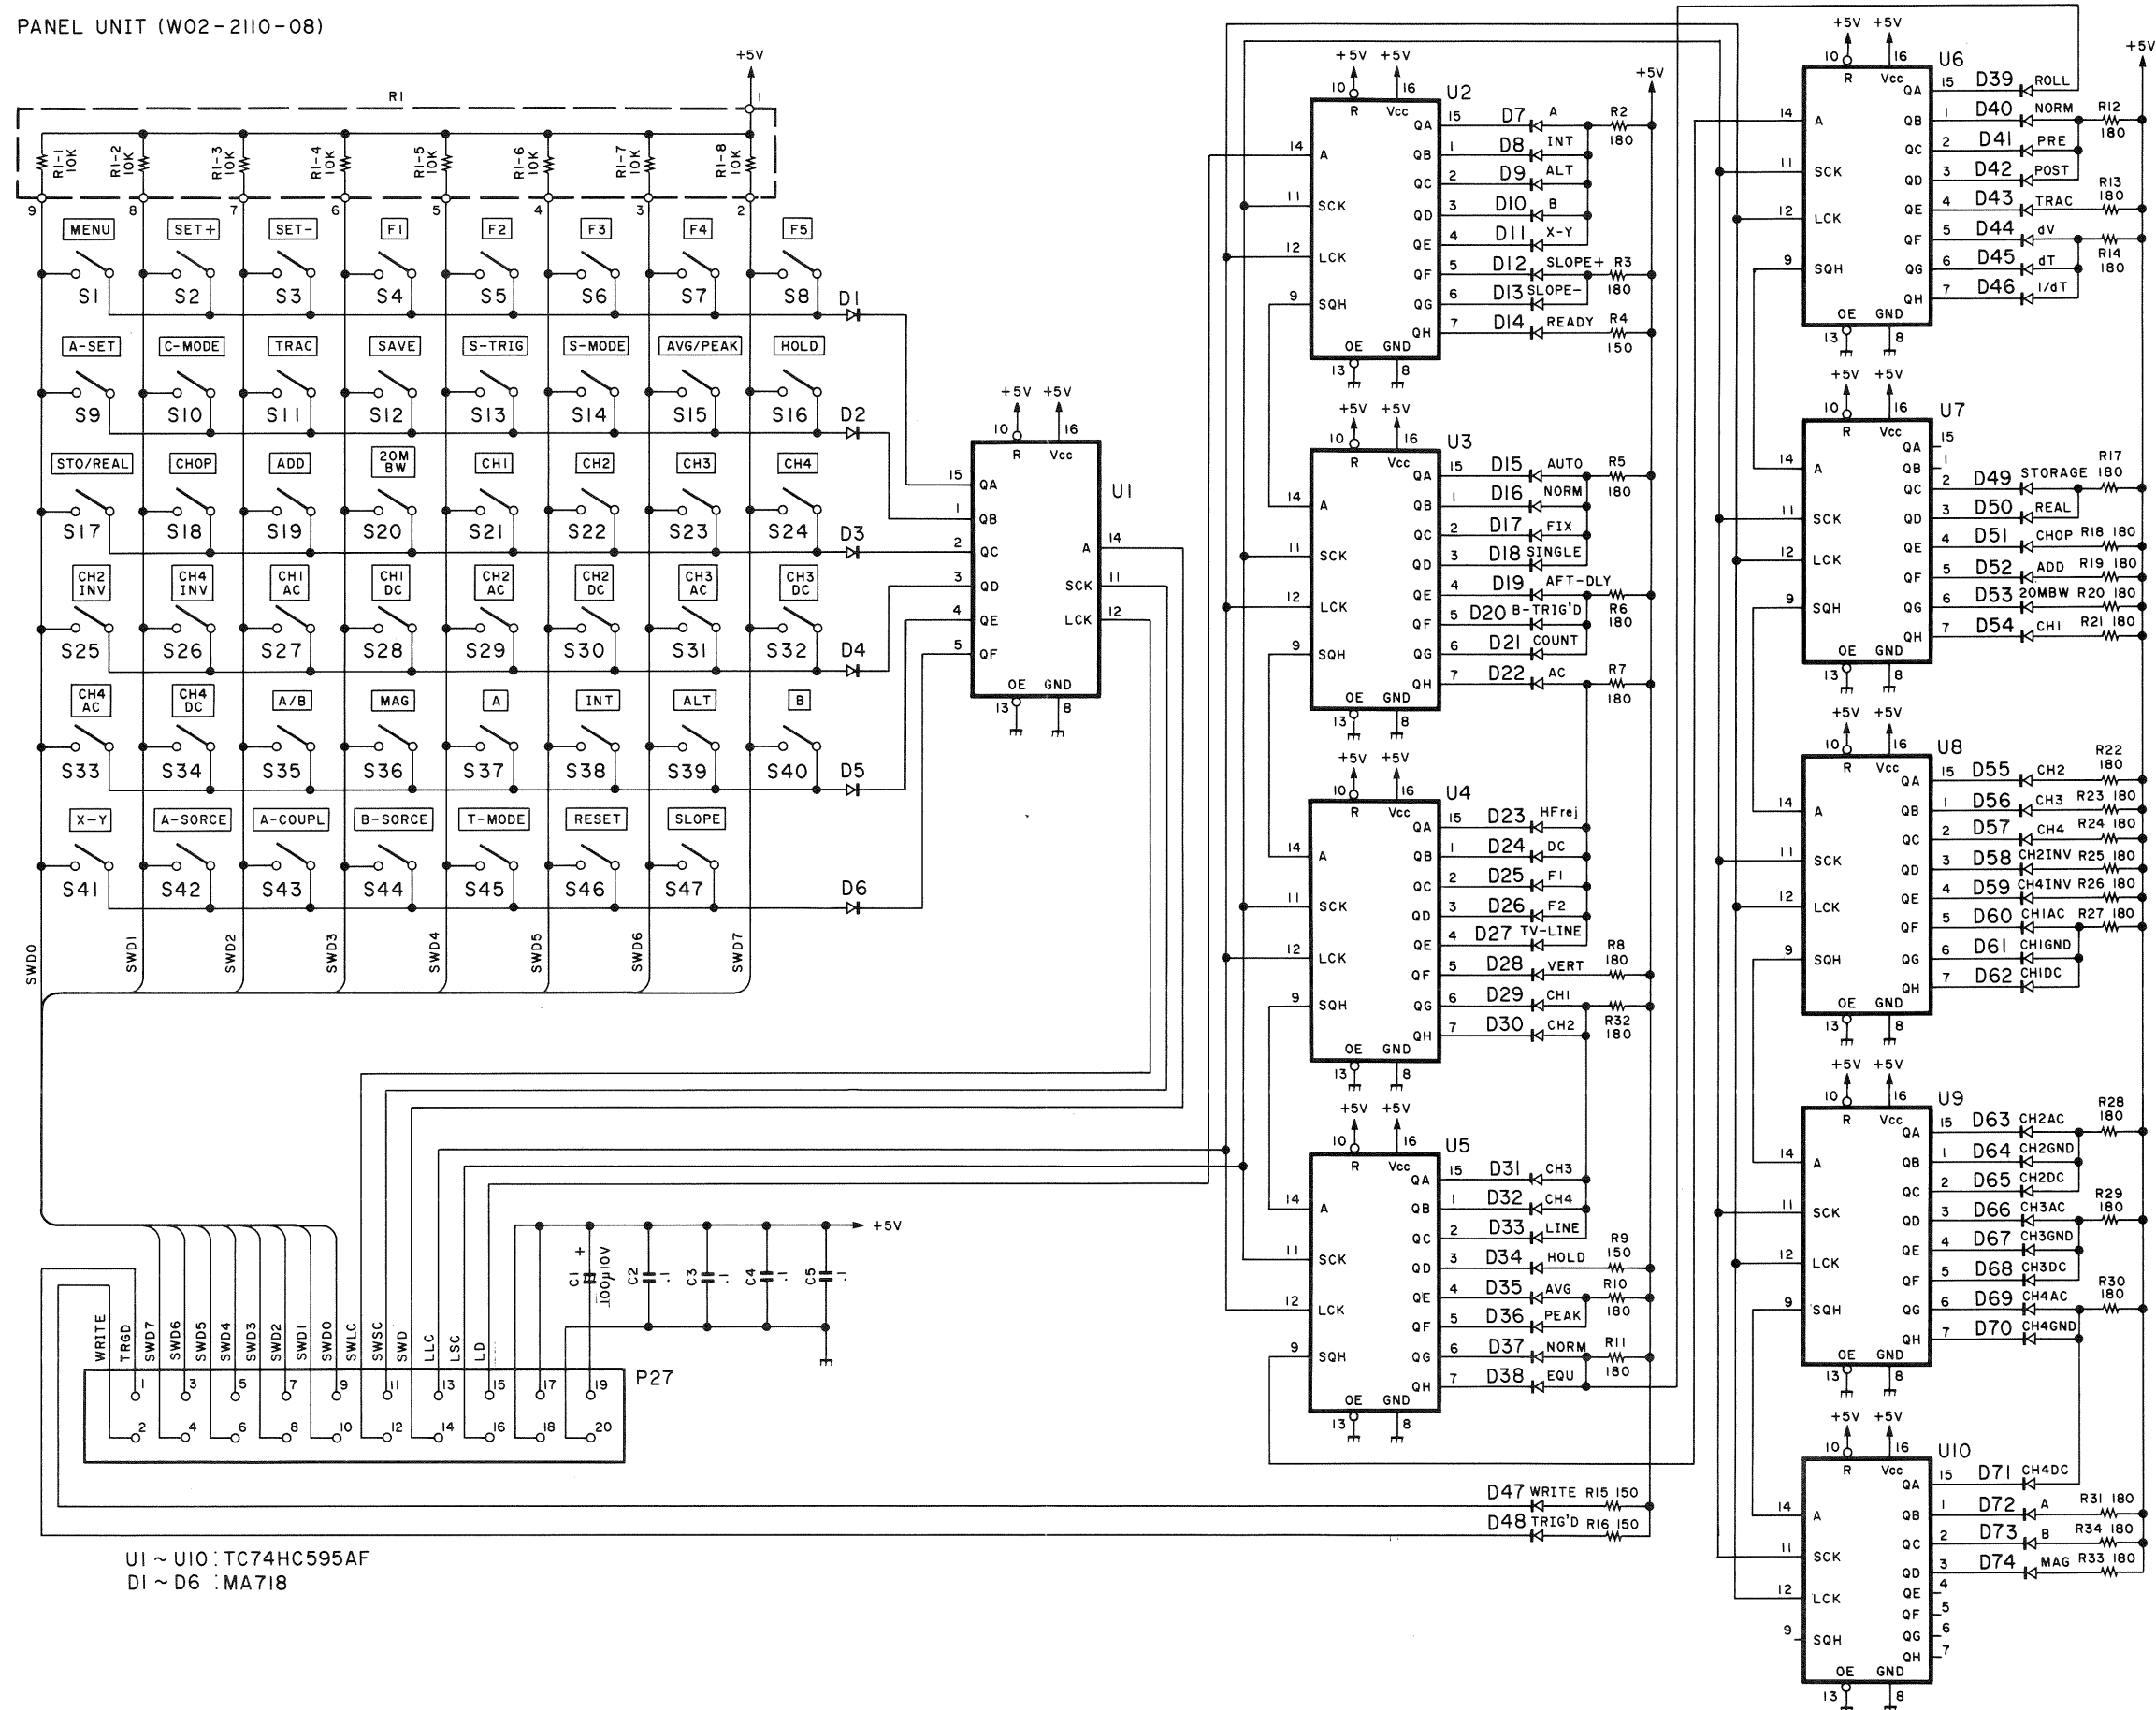

U1 ~ U10 : TC74HC595AF
 D1 ~ D6 : MA718


SCHEMATIC DIAGRAM

SWITCHING POWER SUPPLY UNIT (W02-2178-08)

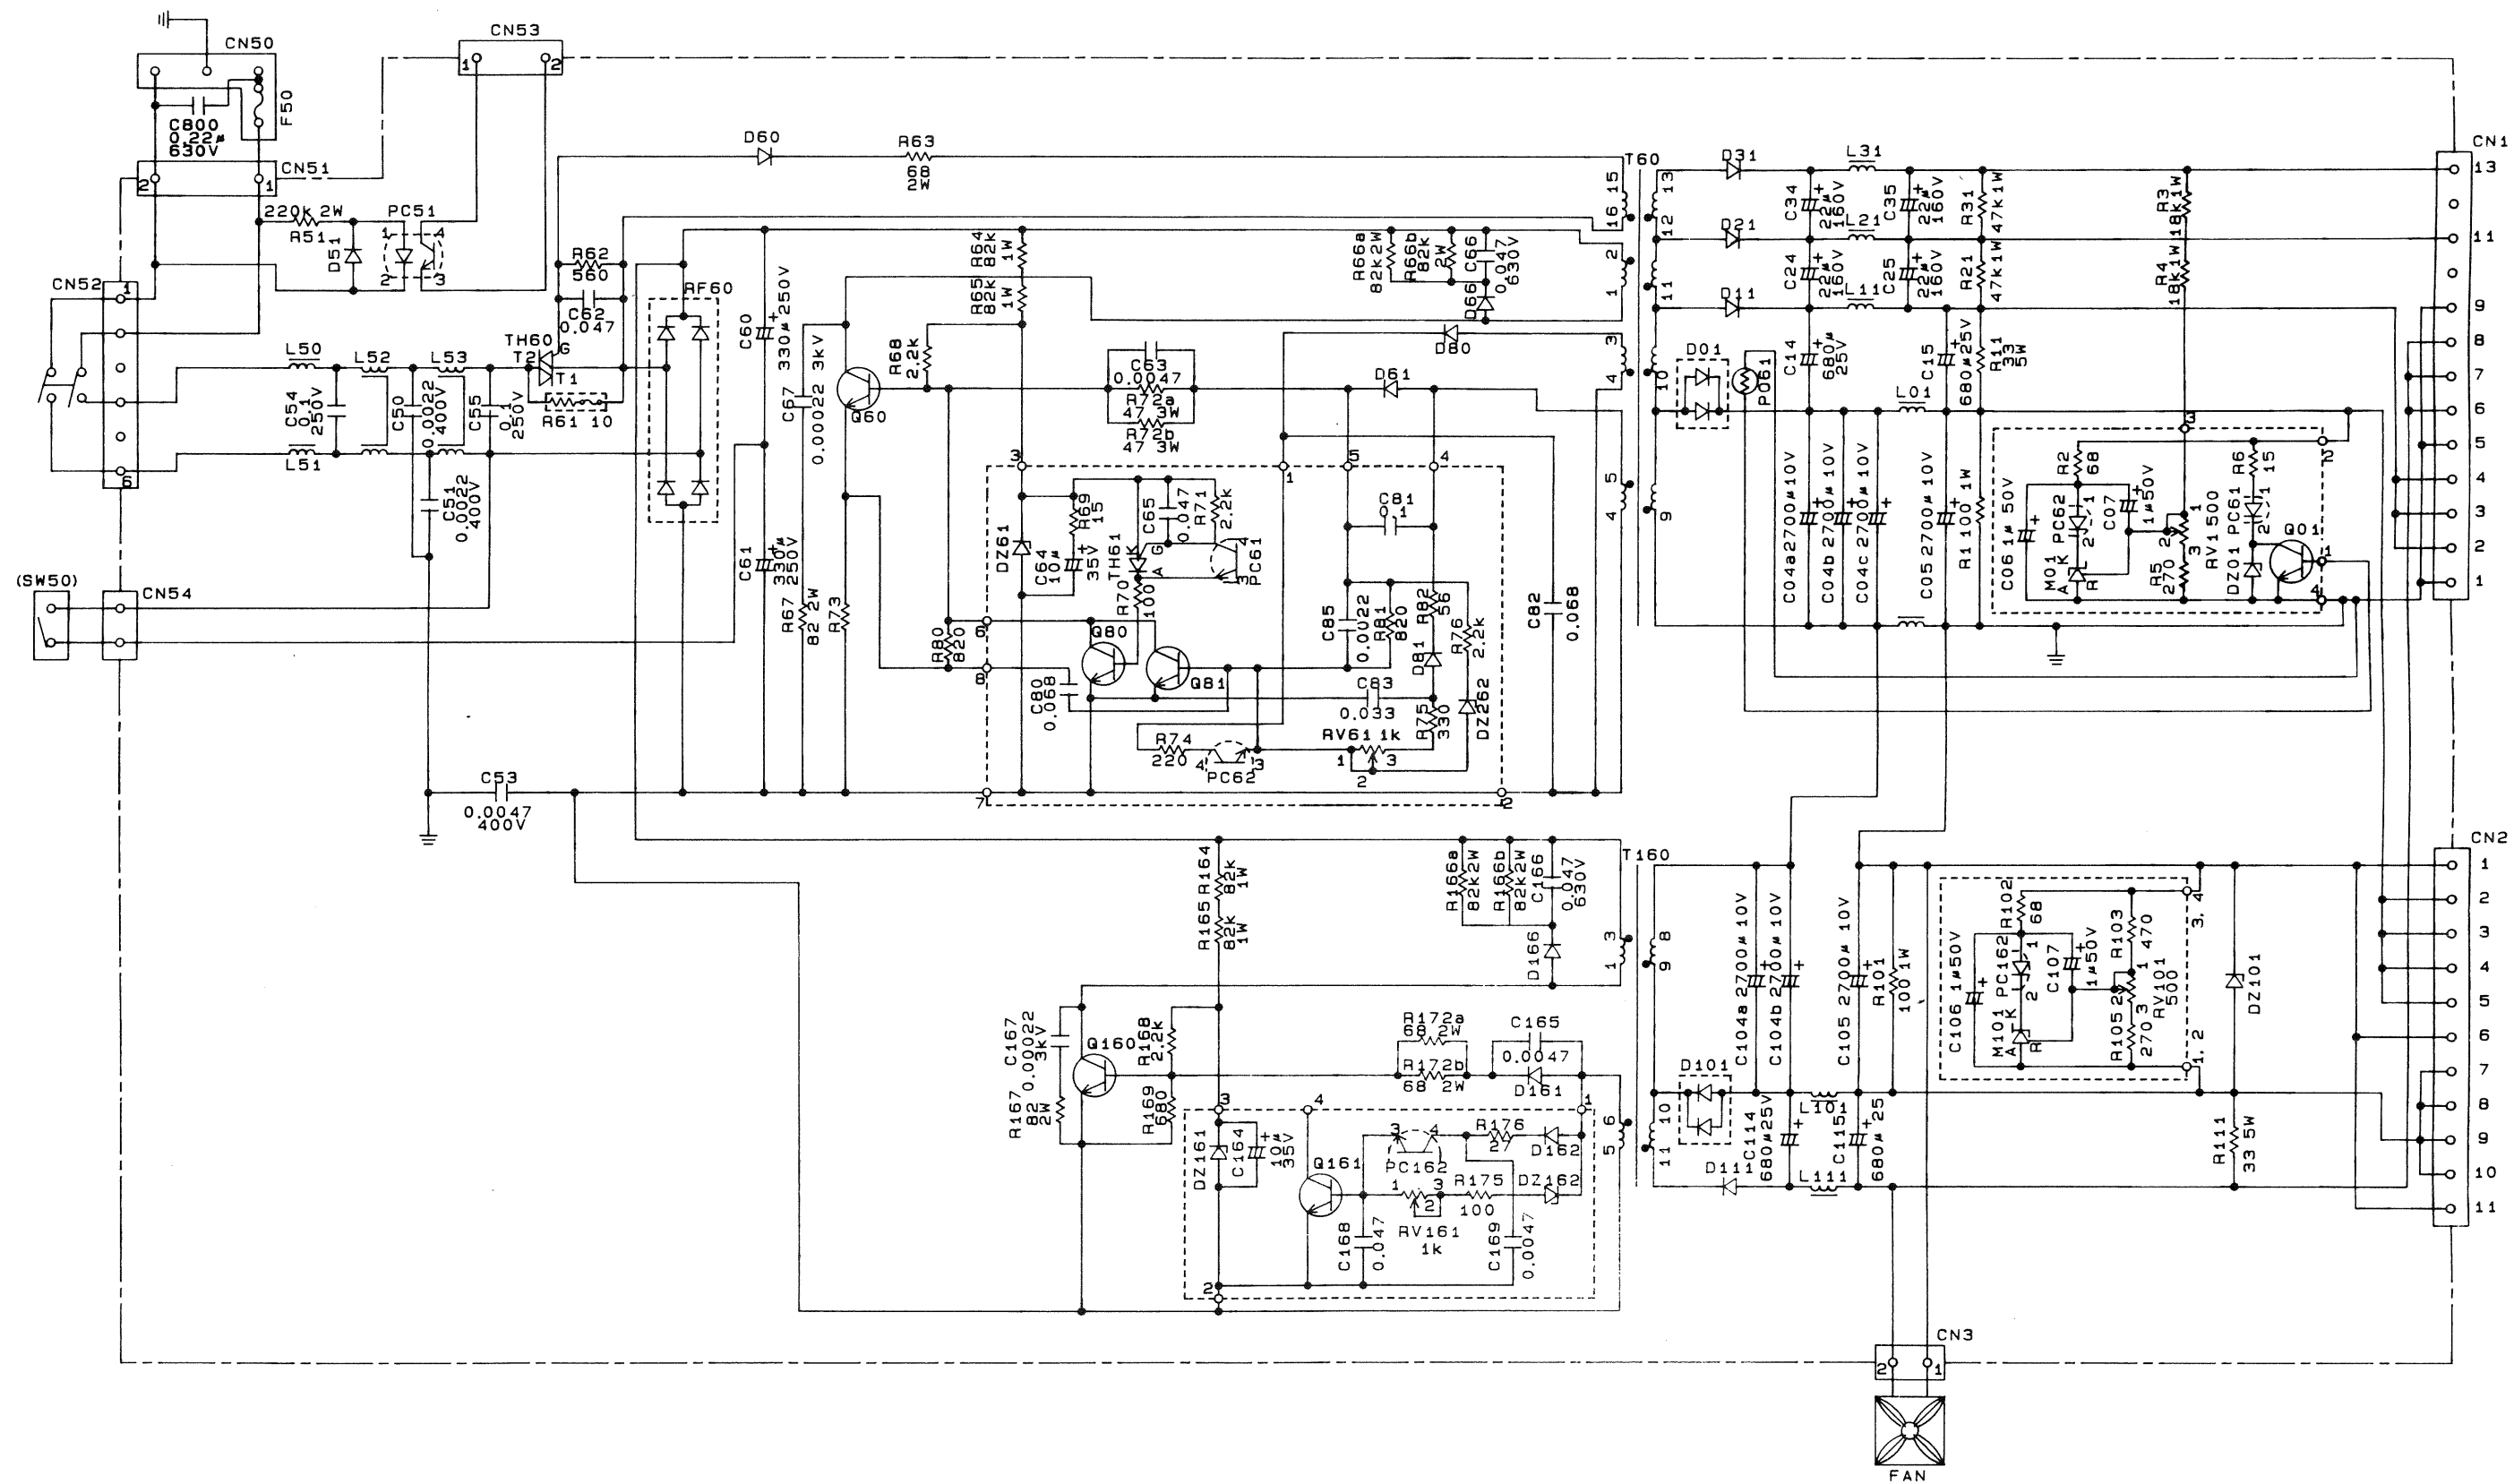


P.C. BOARD

HIGH VOLTAGE UNIT (X68-1590-00)

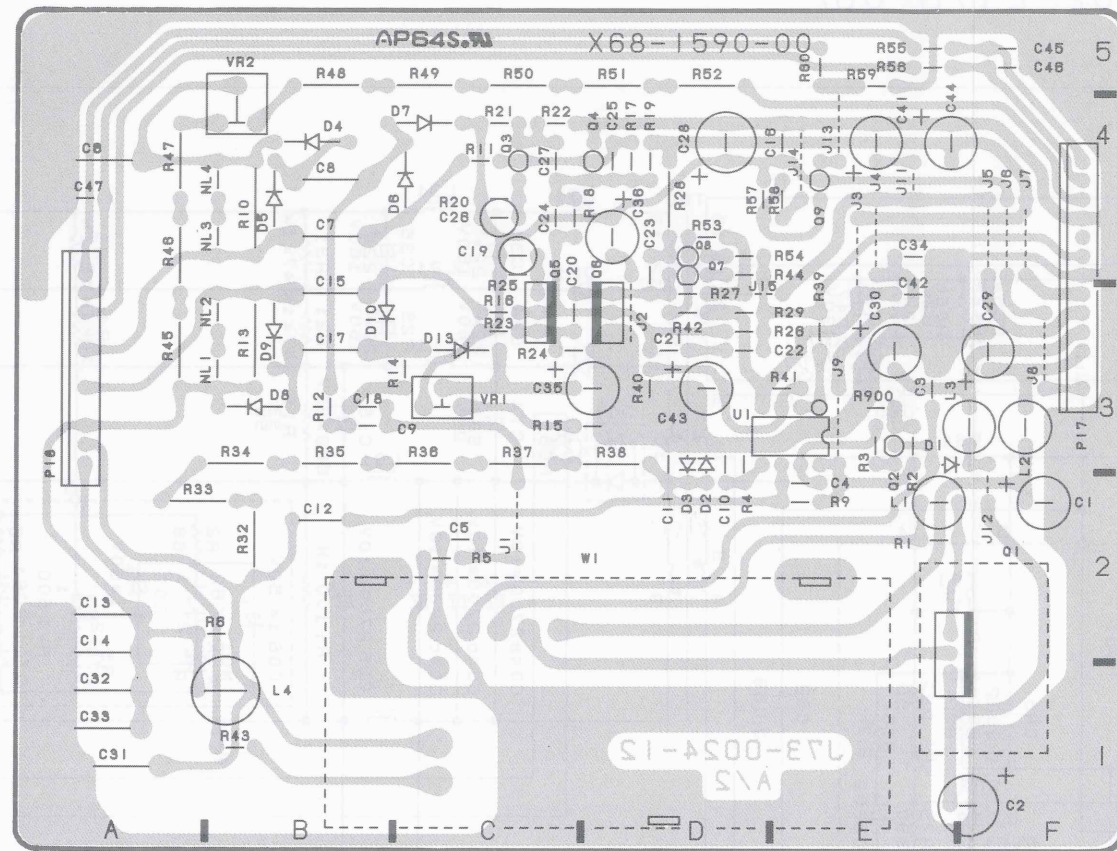


A CONNECTION UNIT (X69-1210-00)

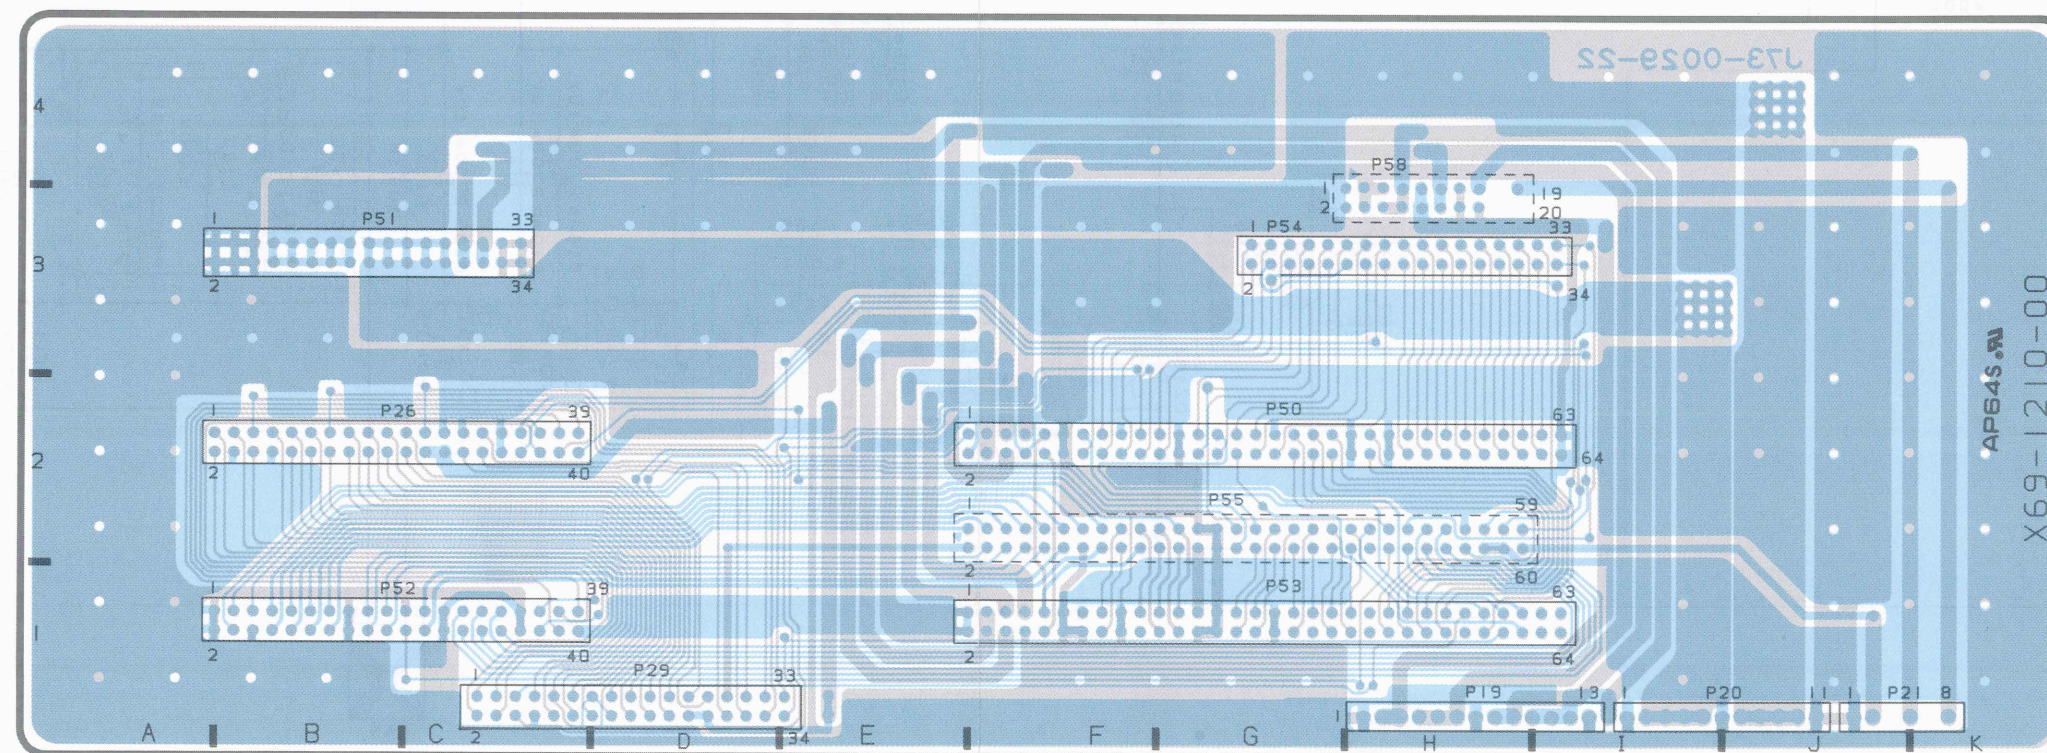

P.C. BOARD

TIME BASE UNIT (X71-1180-00)


B CONNECTION UNIT (X69-1230-00)

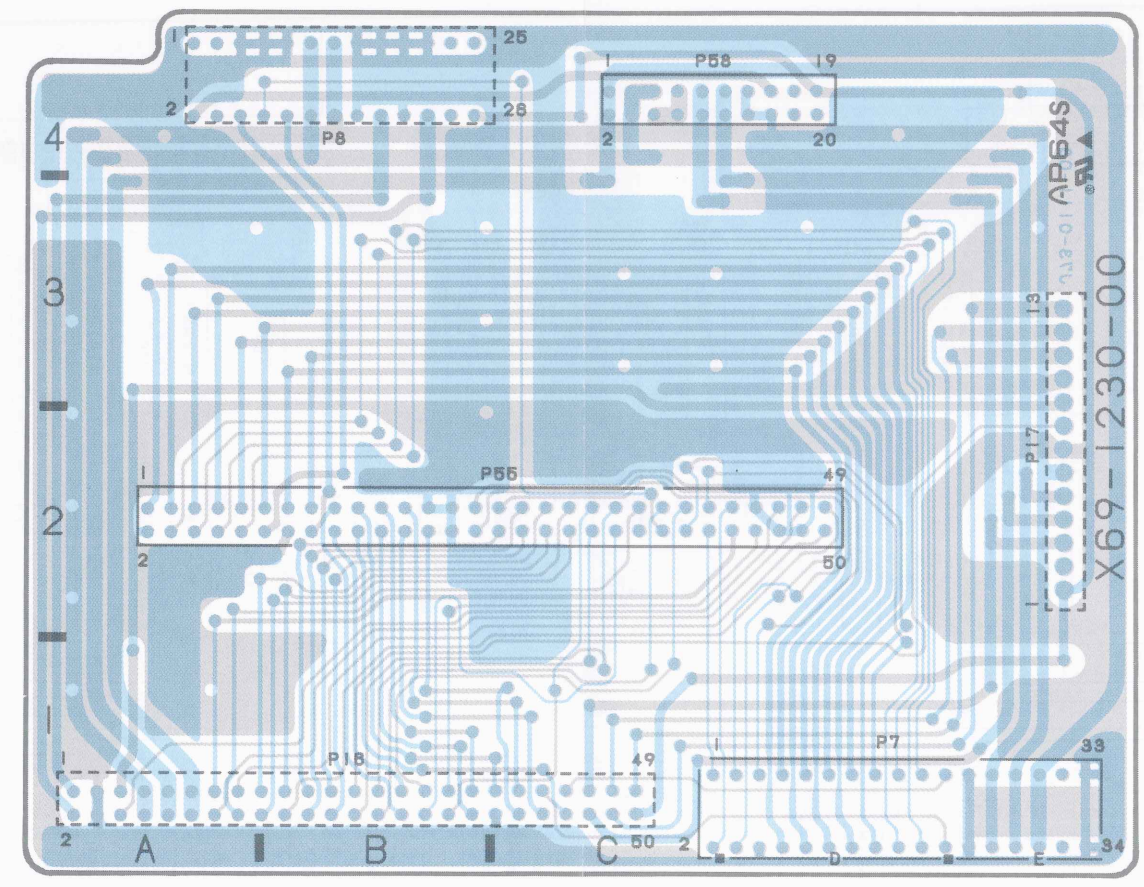

P.C. BOARD

TIME BASE UNIT (X71-1150-00)


8 CONNECTION UNIT (X89-1330-00)

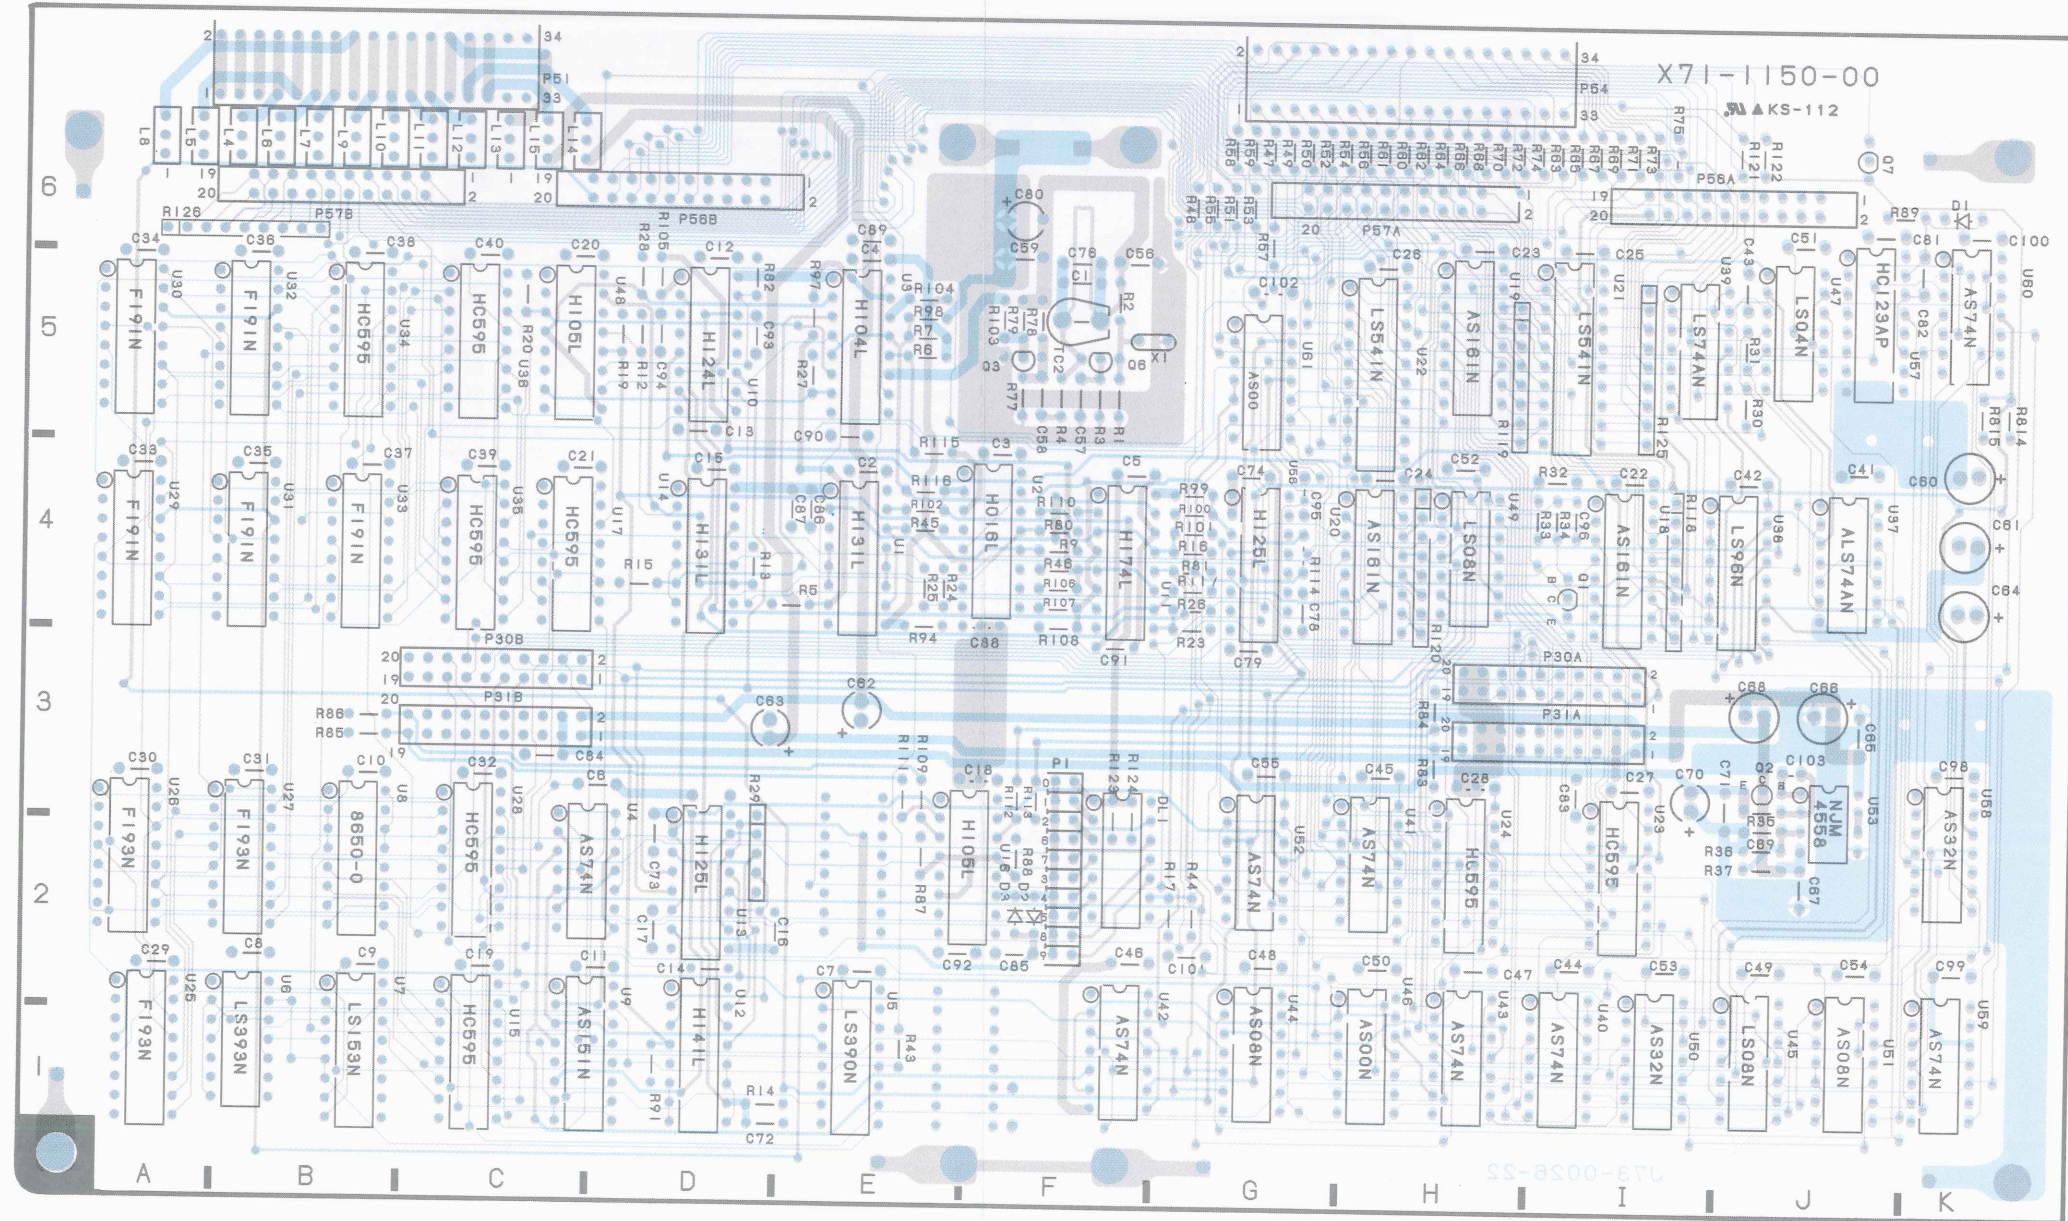

P.C. BOARD

VERTICAL UNIT (X73-1900-00)


HORIZONTAL UNIT (X73-1900-00)

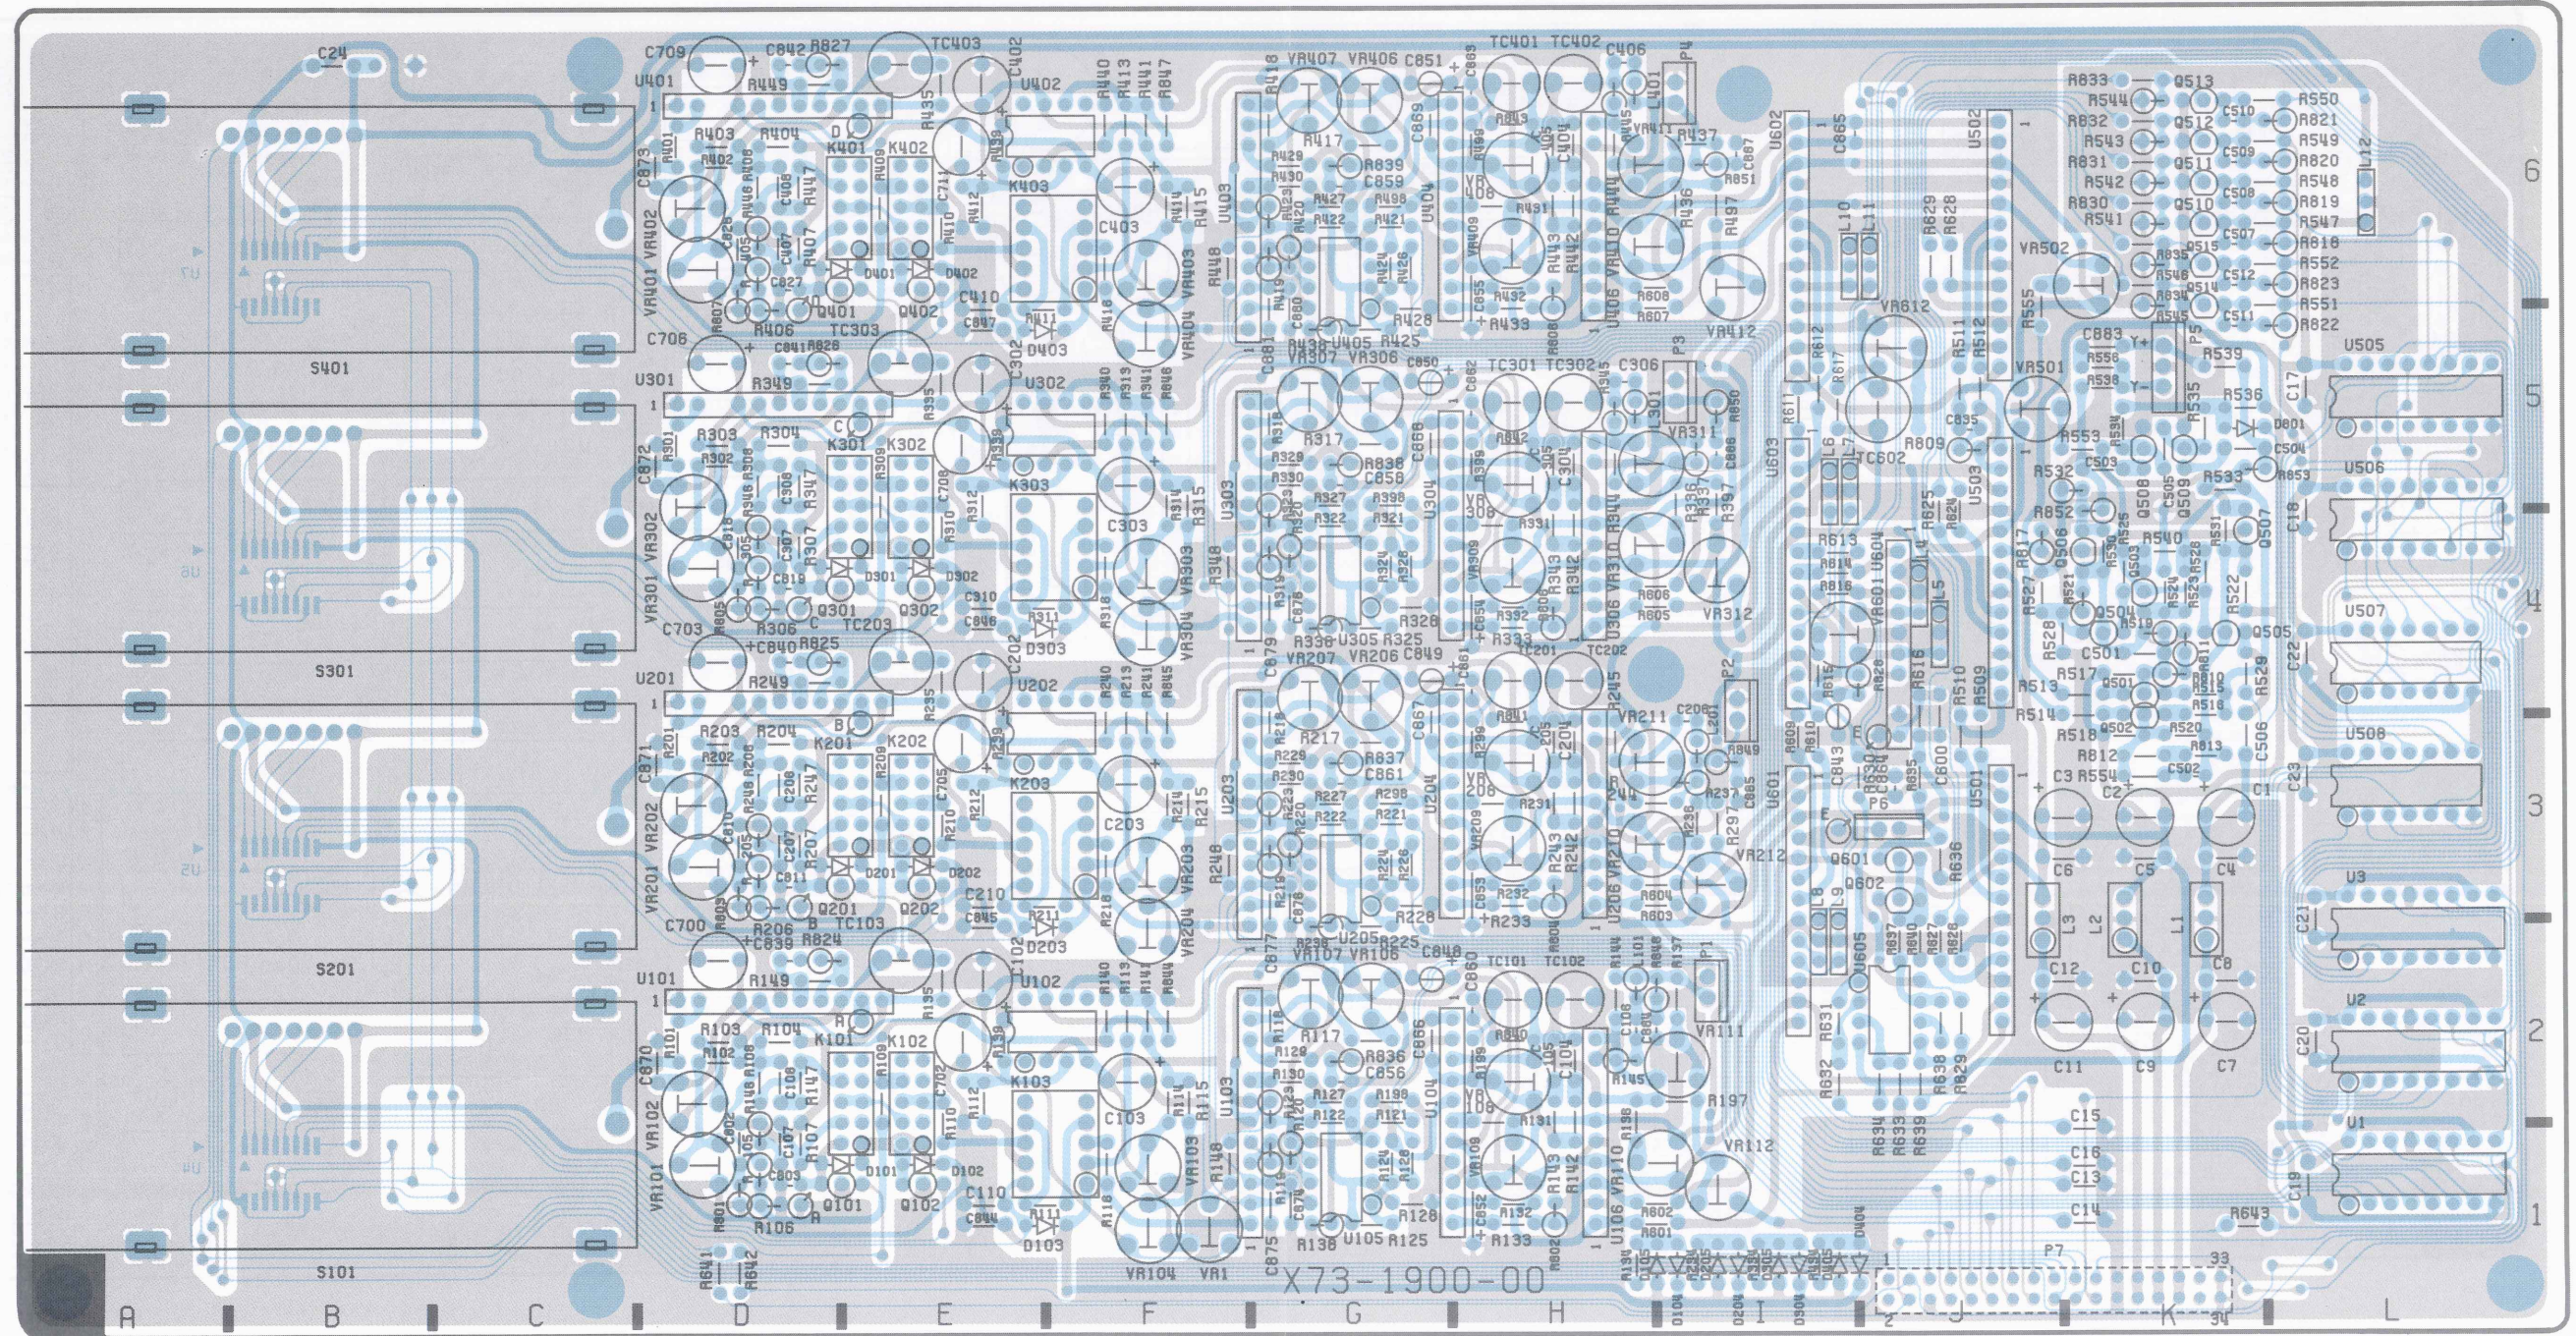

P.C. BOARD


HORIZONTAL UNIT (X74-1530-00)

VERTICAL UNIT (X73-1400-00)

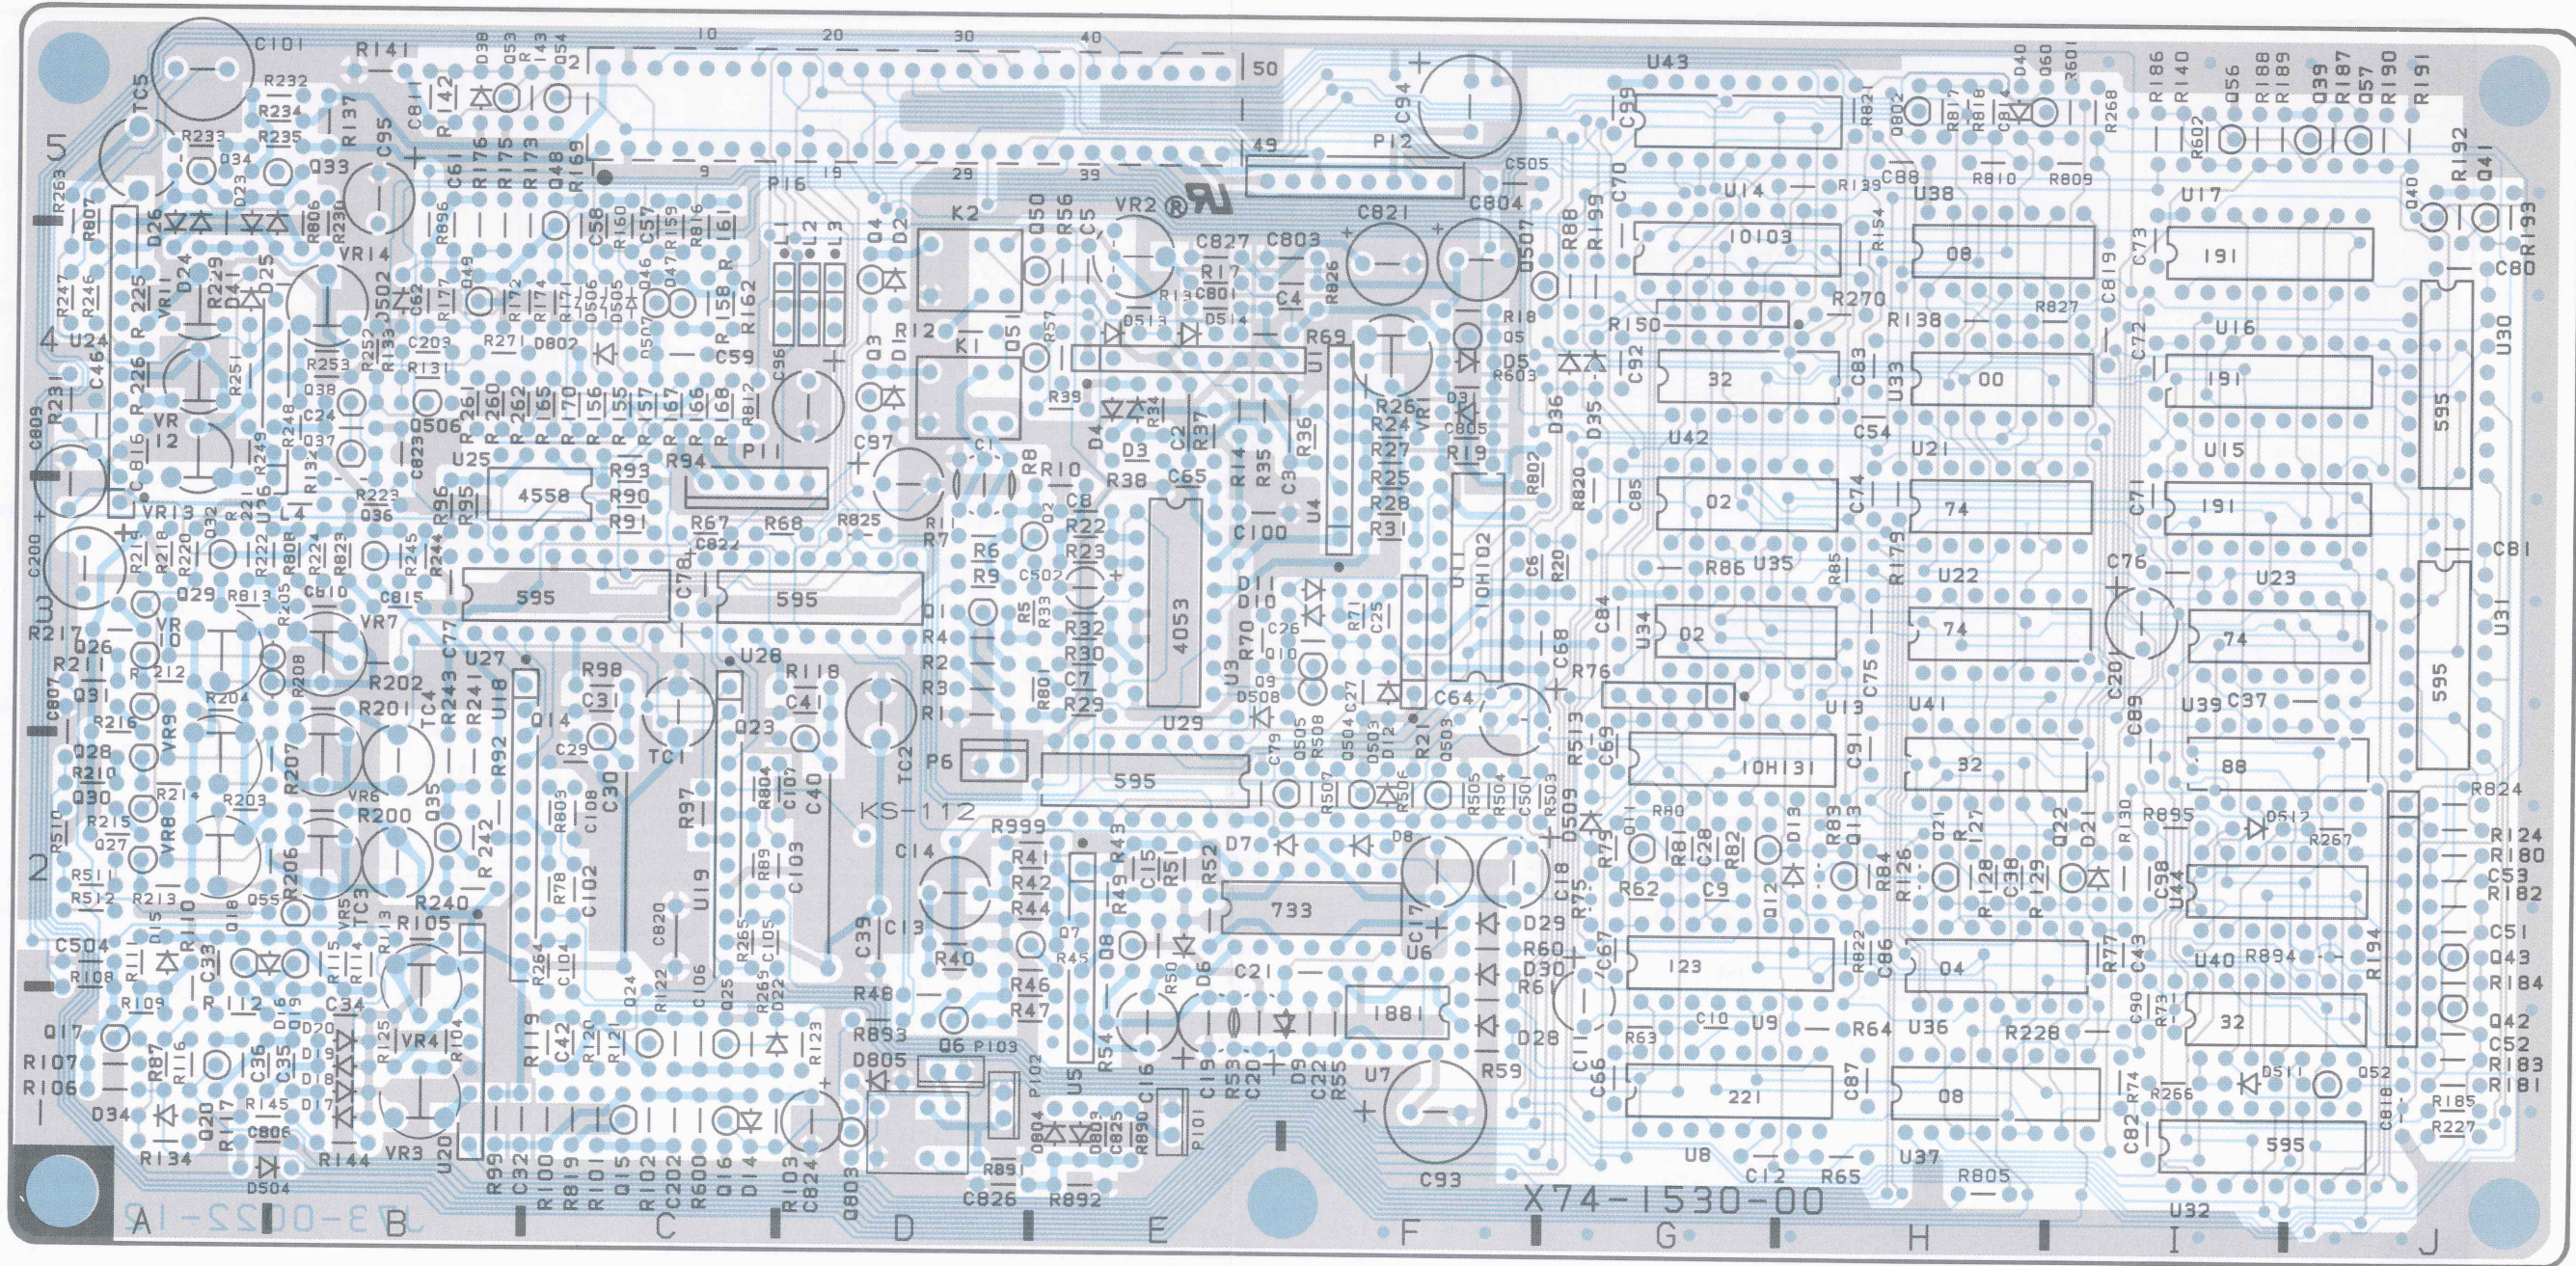


P.C. BOARD

STORAGE CPU UNIT (X77-1660-0X)

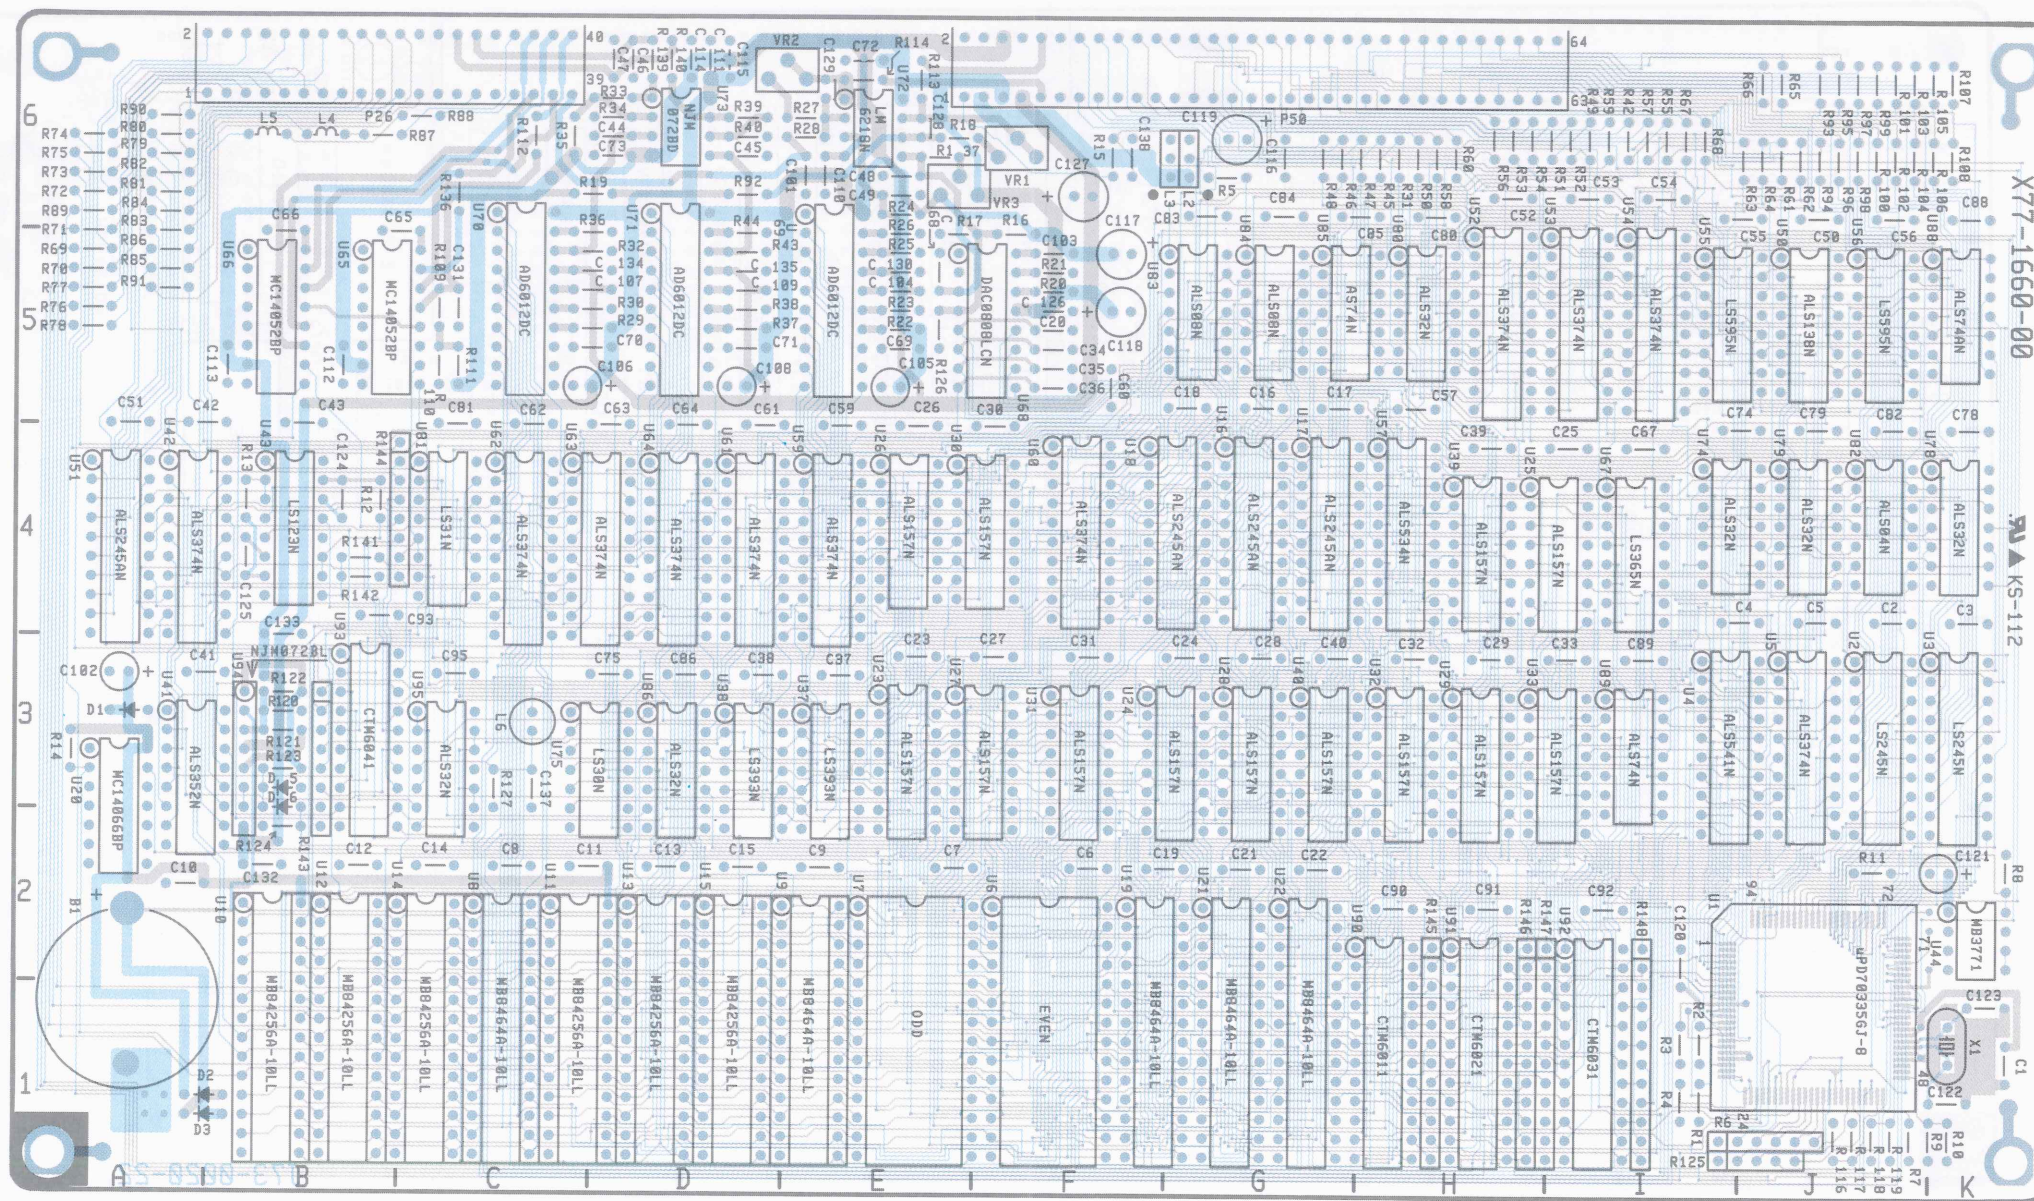


P.C. BOARD

R/O UNIT (X77-1670-0X)

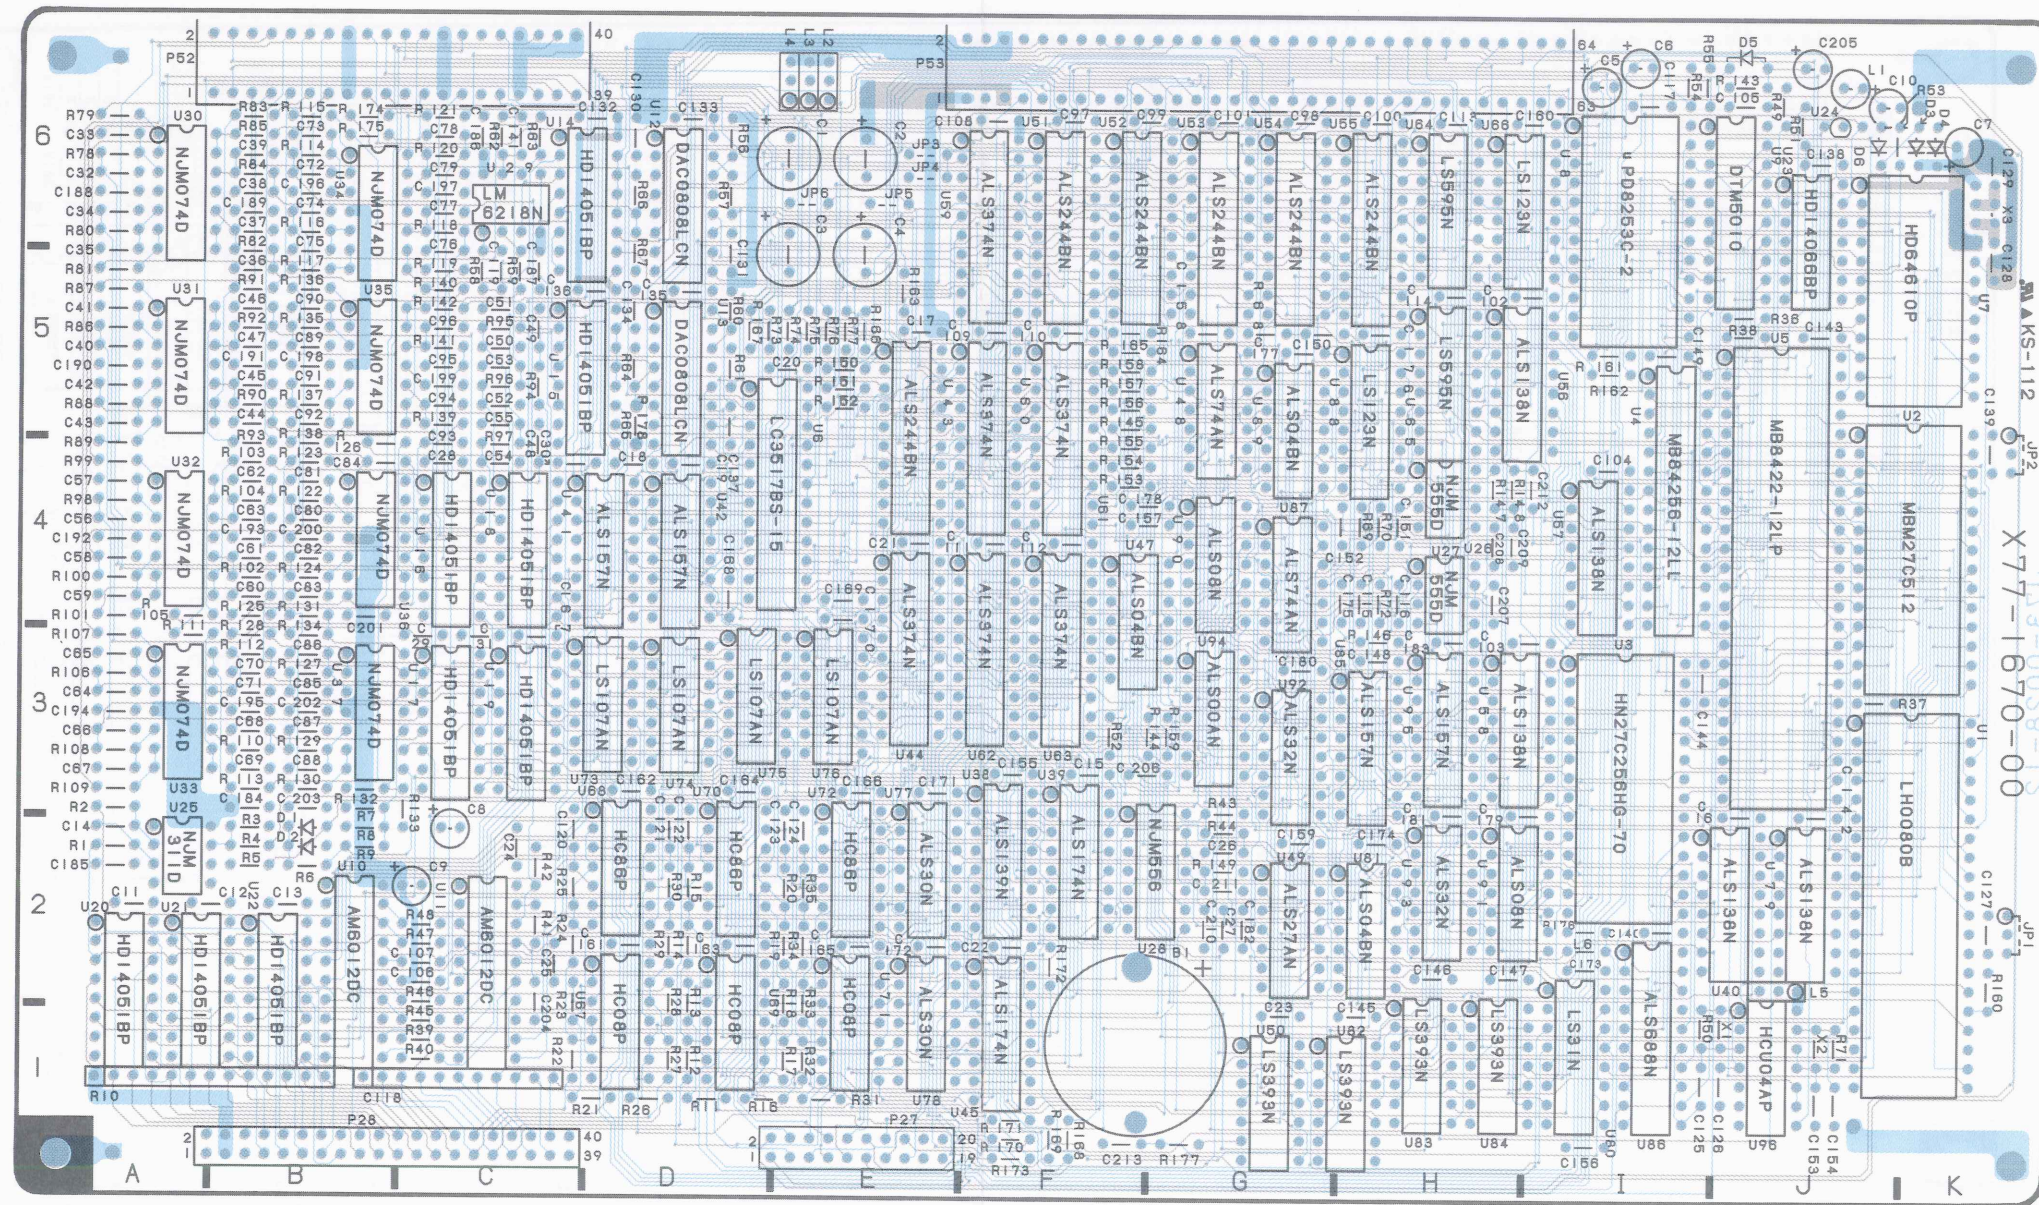


P.C. BOARD

A/D UNIT (X78-1070-00)A



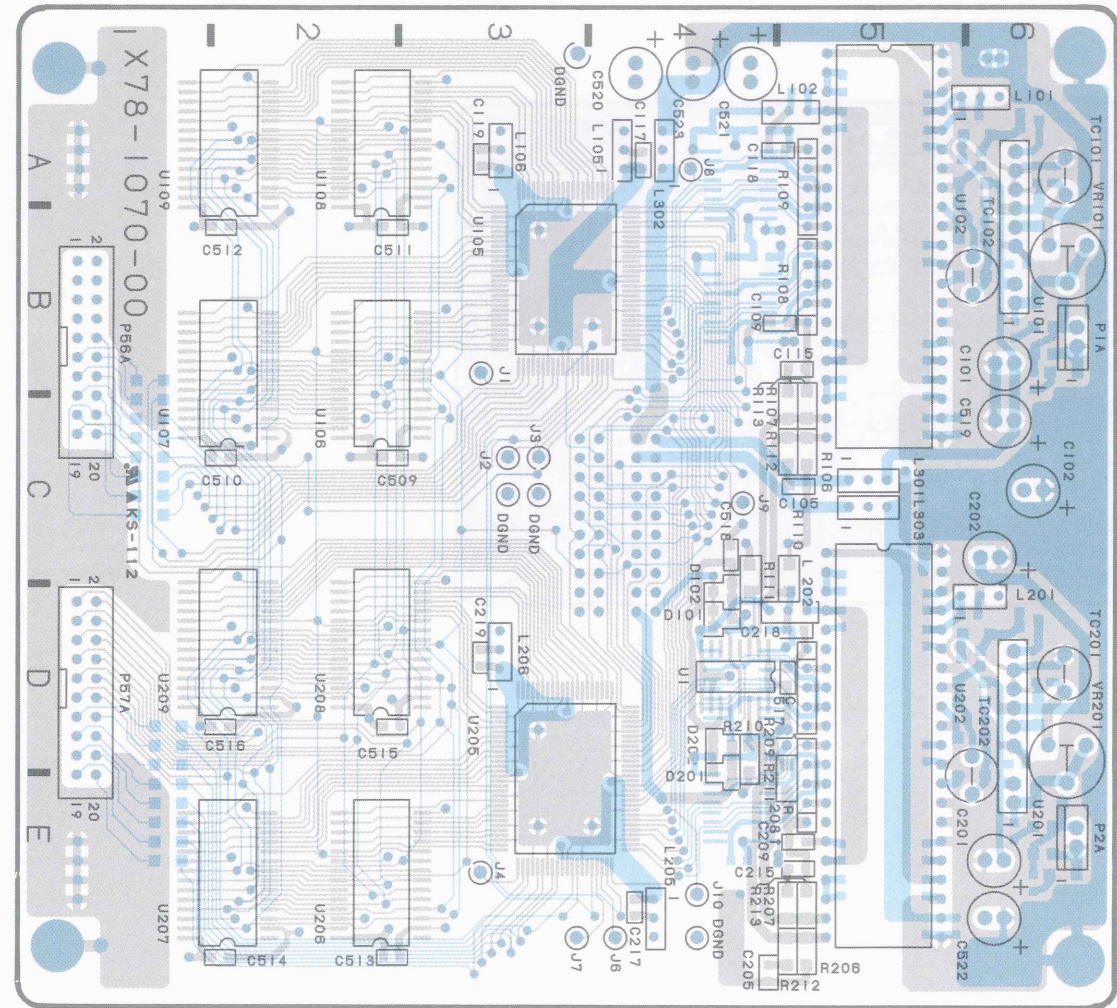


A/D UNIT (X78-1070-00)B

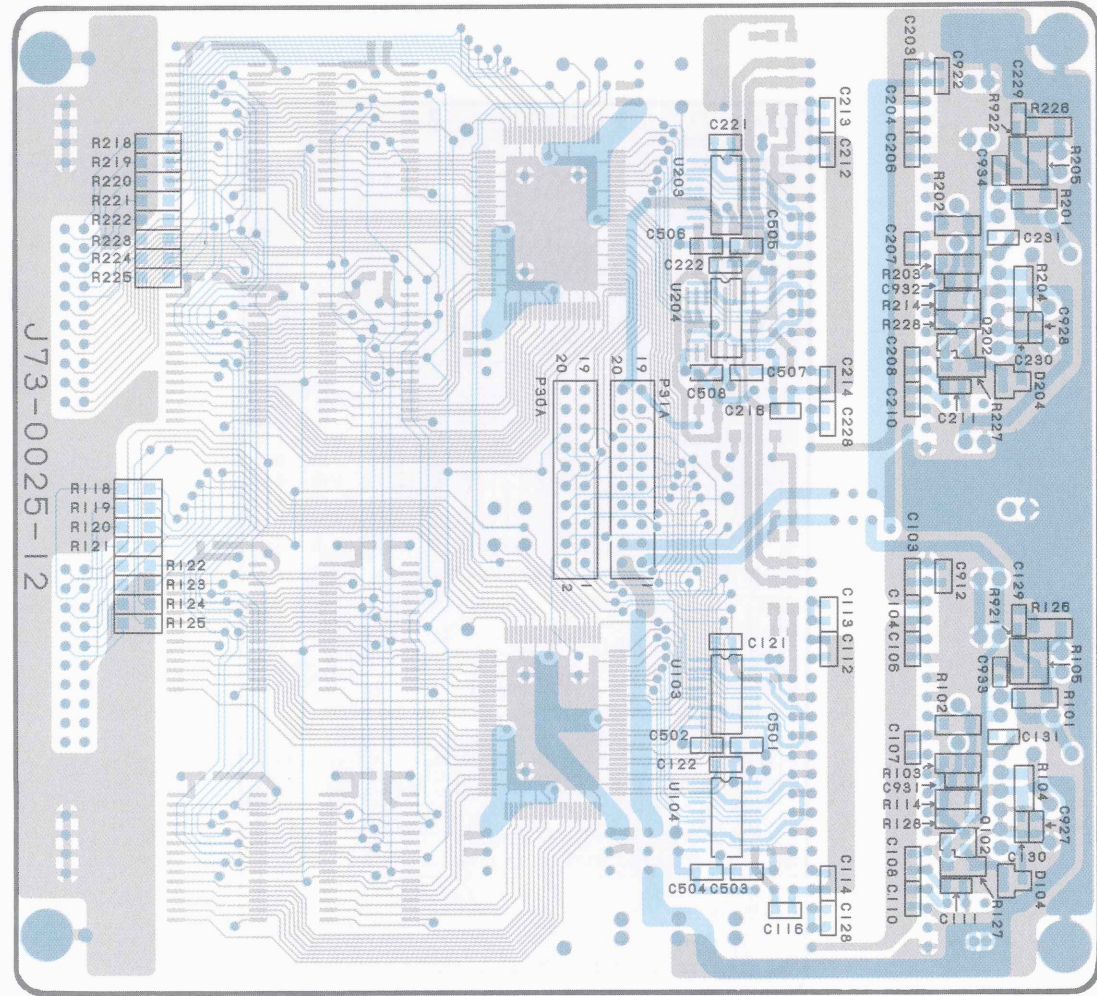


P.C. BOARD

GPIB UNIT (X79-1120-00)

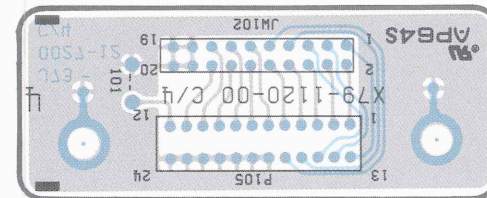
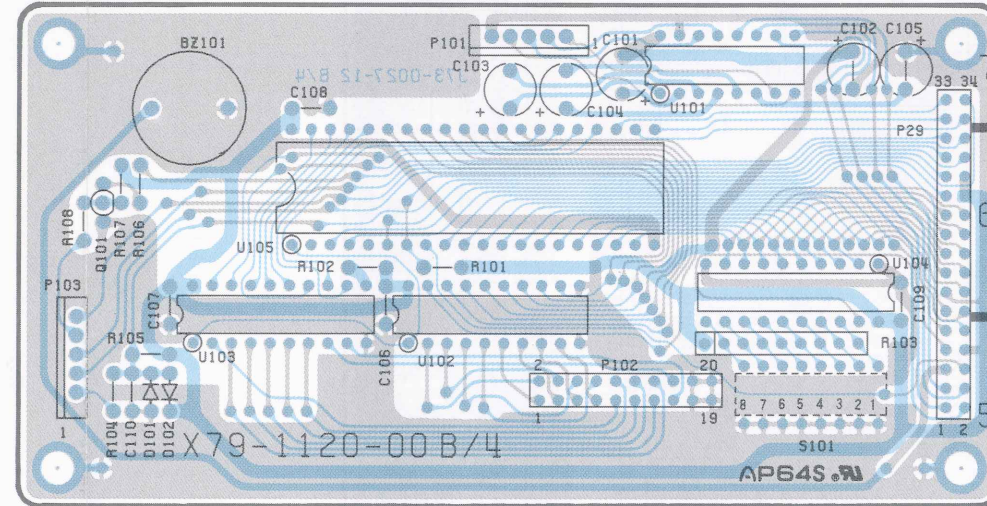
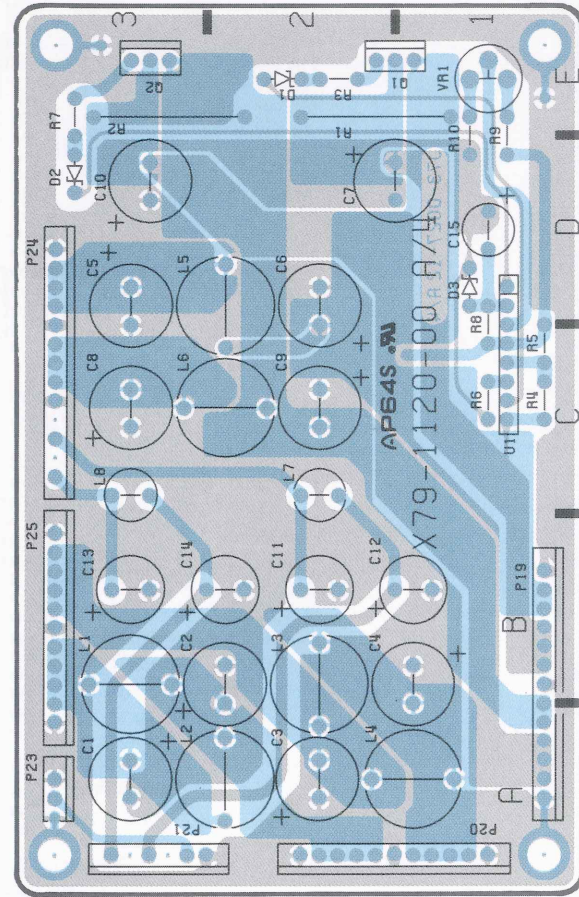


P.C. BOARD


FINAL UNIT (X80-1140-00)

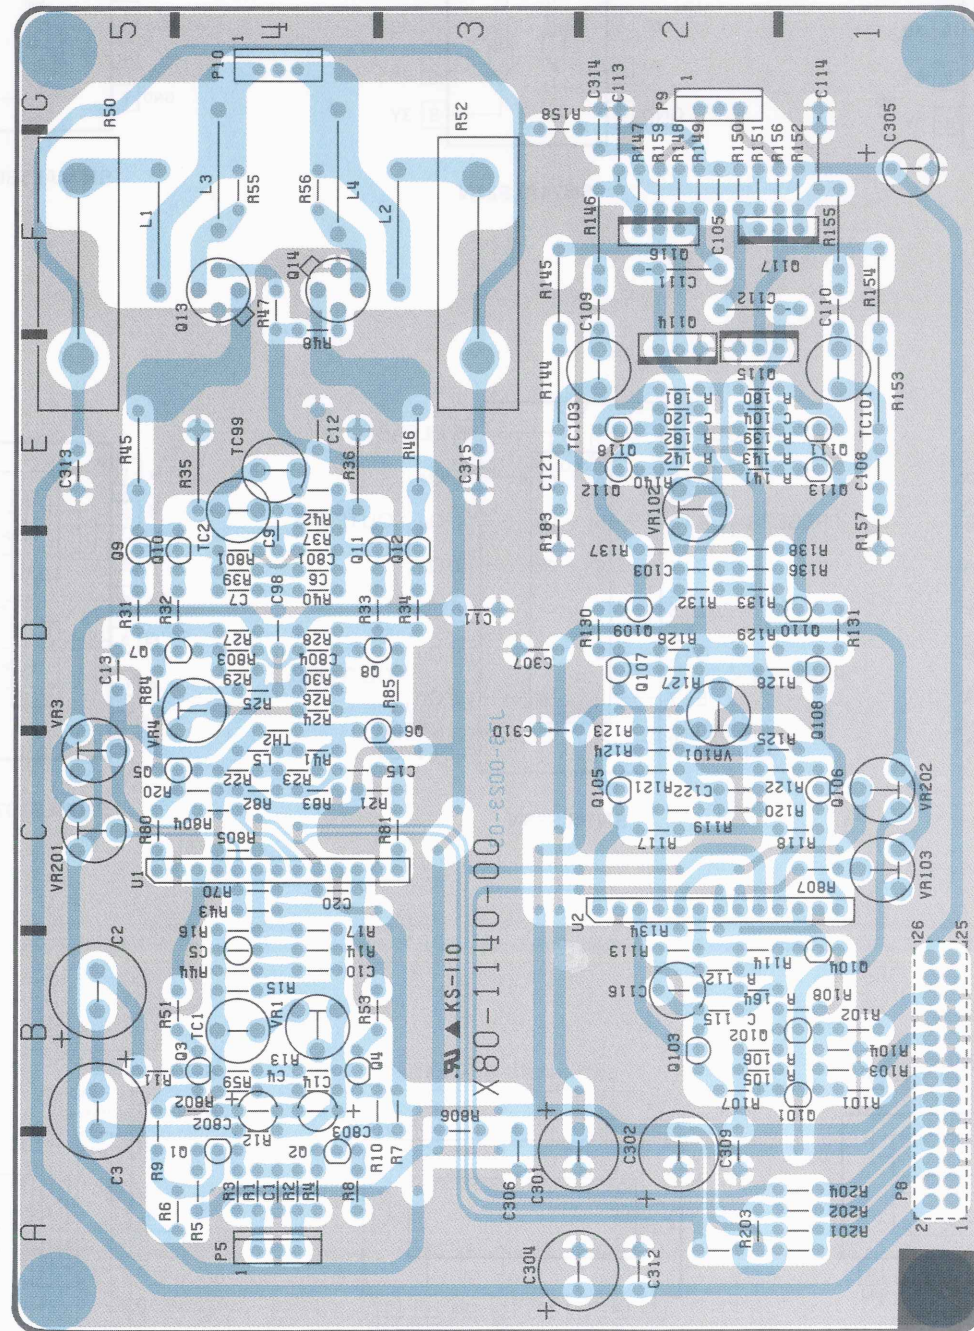

VR UNIT (X81-2900-00)

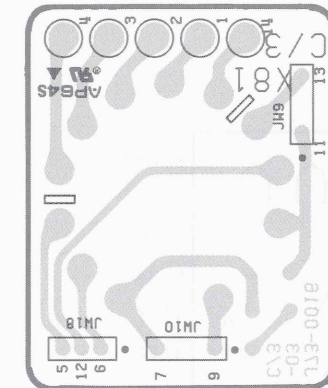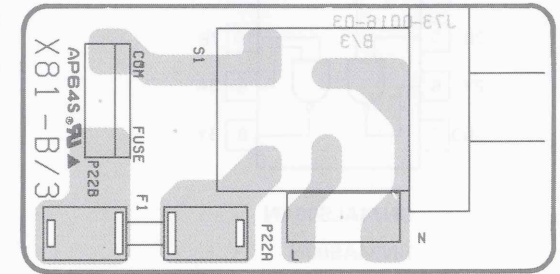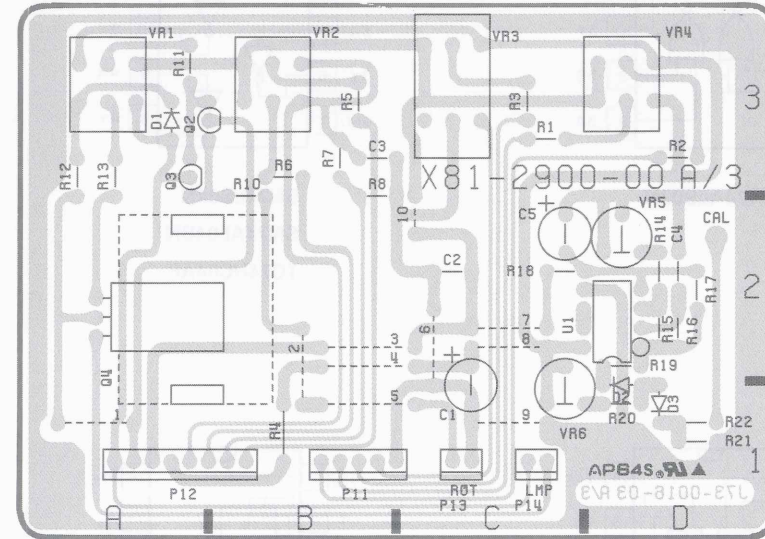


ENCODER UNIT (X81-3040-00)

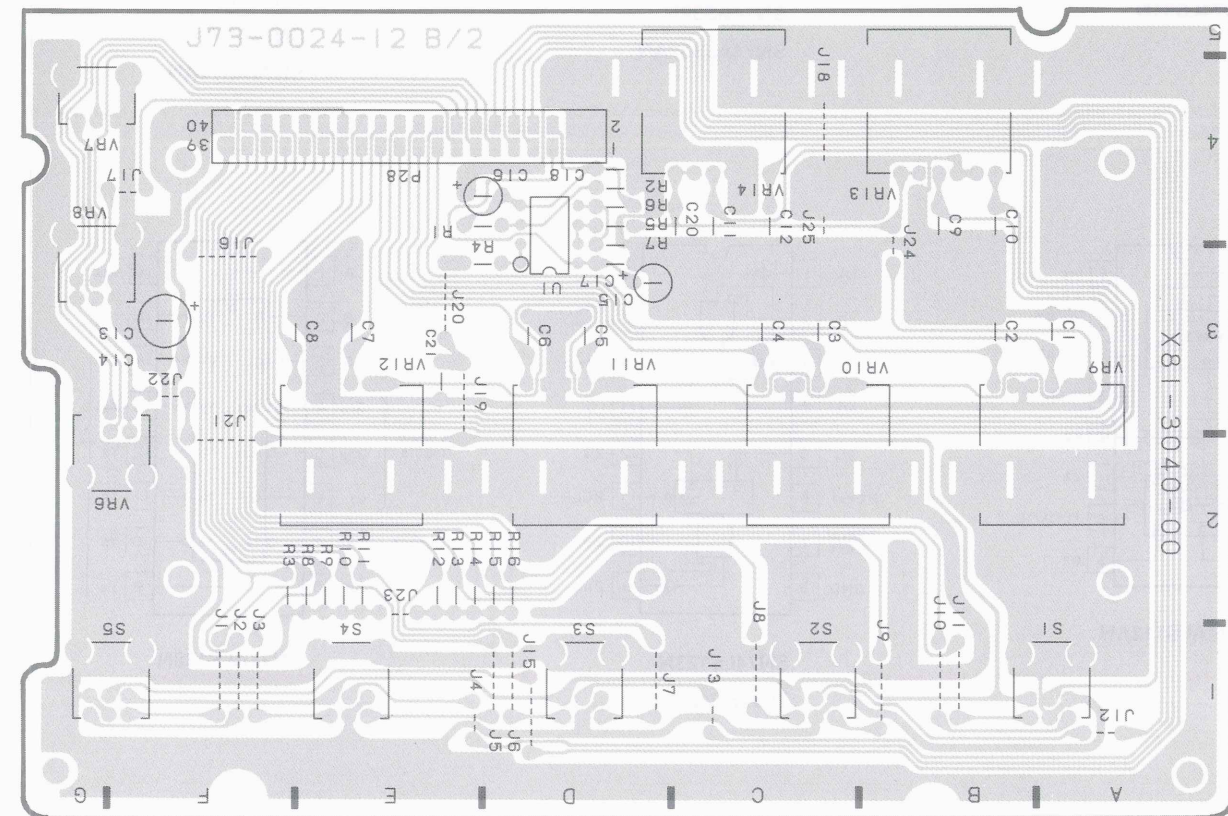


Pattern side view


SEMICONDUCTORS

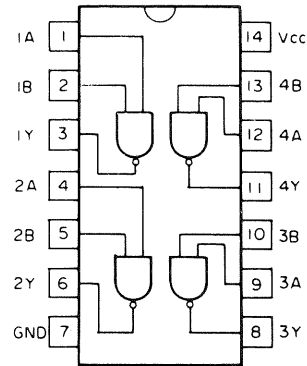


SN74ALS00AN
SN74AS00N

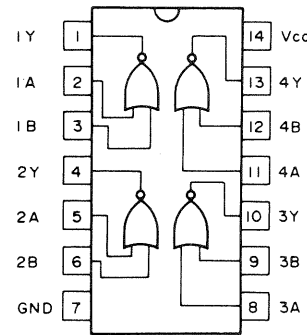


SN74ALS02N

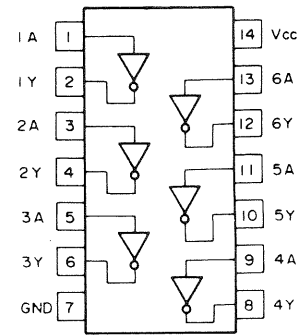


SN74LS04N
SN74AL04BN
TC74HC04AP

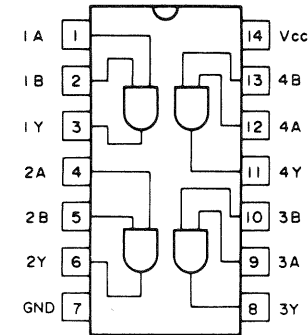


SN74AS08N
SN74LS08N
SN74ALS08N
TC74HC08AN




SN74ALS27N




SN74ALS30AN




SN74LS31N

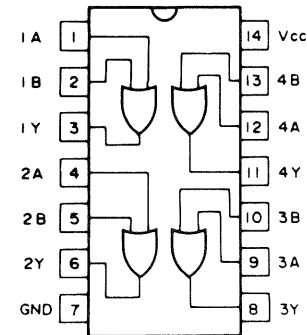


SN74AS32N
SN74ALS32AN

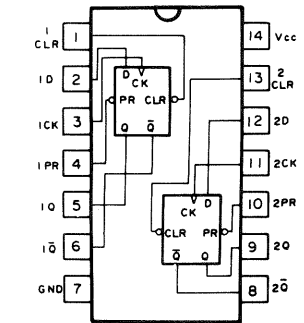


SN74ALS74AN
SN74AS74N
SN74AS74AN




TC74HC86AP

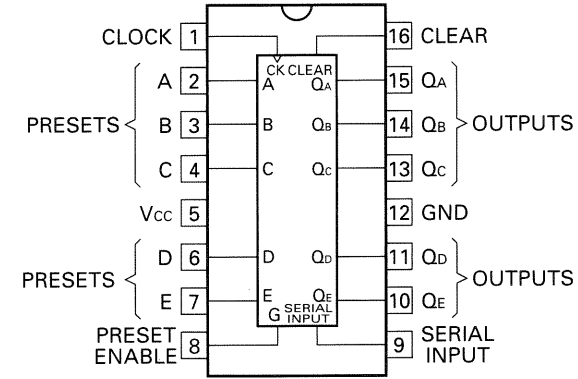


SN74LS96N




SN74LS107AN

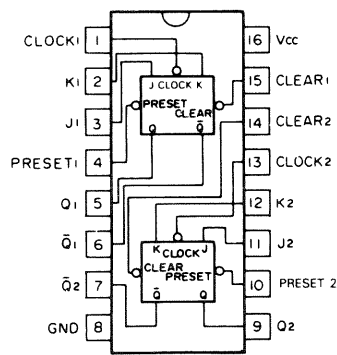


SN74ALS112AN

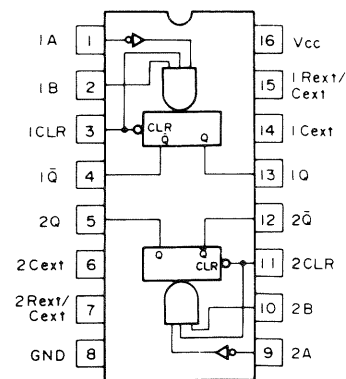


SN74LS123N
TC74HC123AP

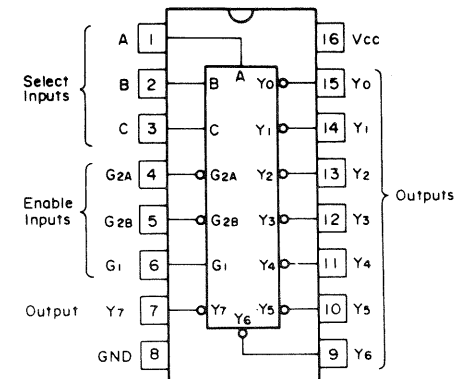


SN74ALS138N

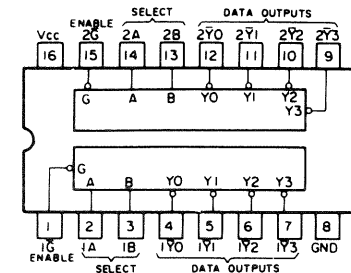

SN74ALS139N

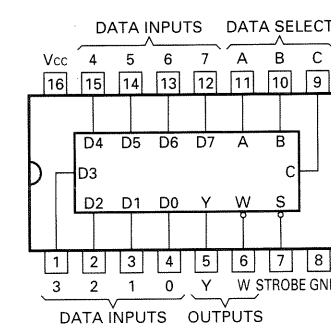


SN74AS151N

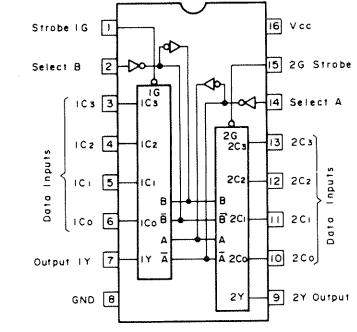


SN74LS153N


SEMICONDUCTORS

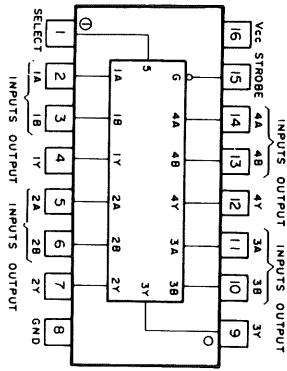


SN74ALS157AN




SN74AS161N

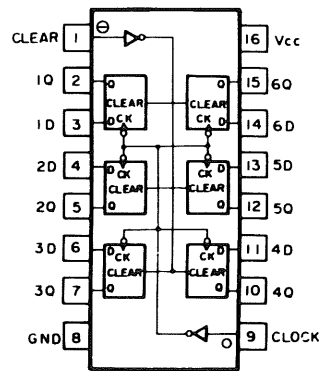


SN74ALS174N

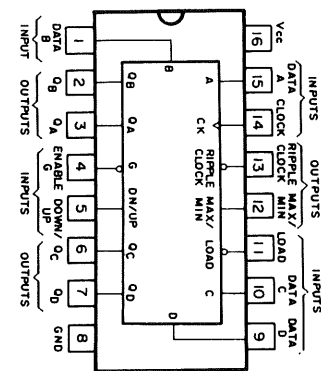


SN74ALS191N

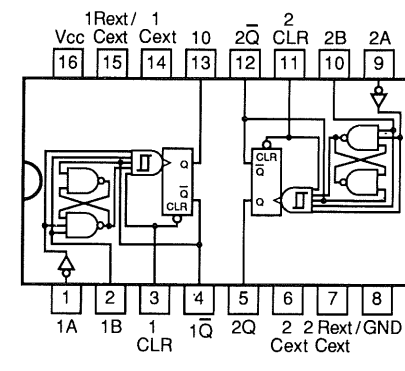


SN74LS221N

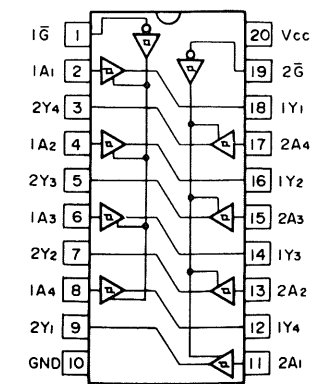


SN74ALS244BN

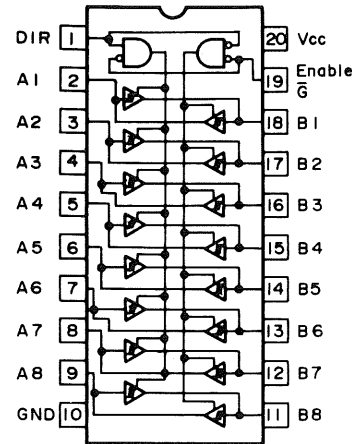


SN74LS245N
SN74ALS245AN
TC74HC245AP

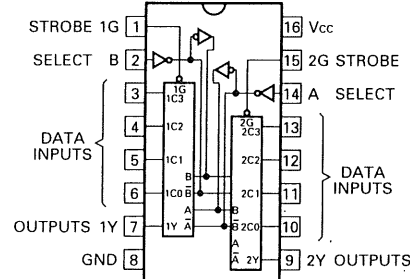


SN74ALS352N

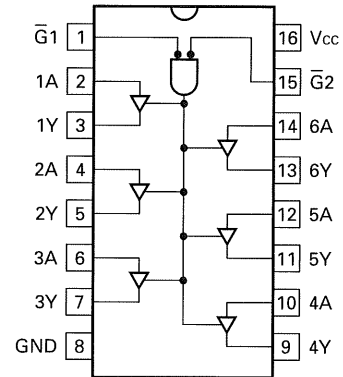


SN74LS365AN

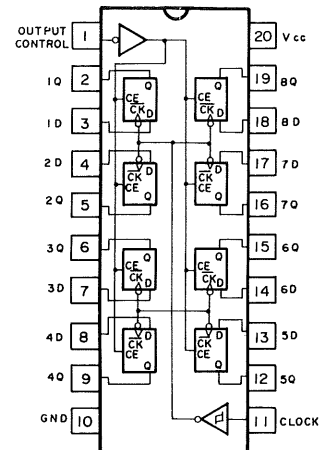


SN74ALS374AN

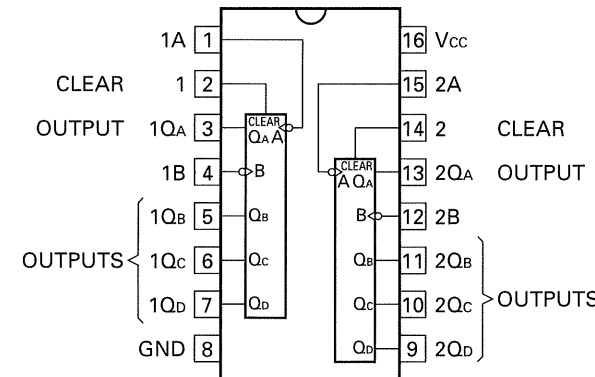


SN74LS390N

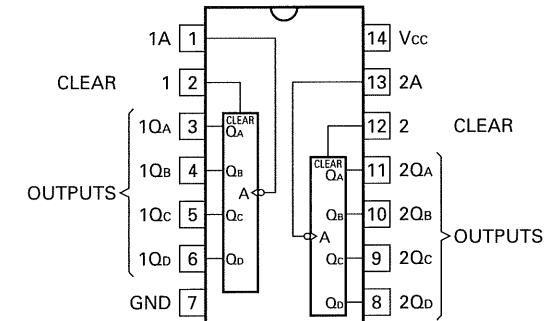


SN74LS393N

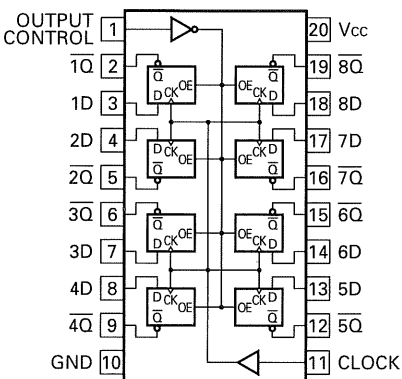


SN74ALS534AN

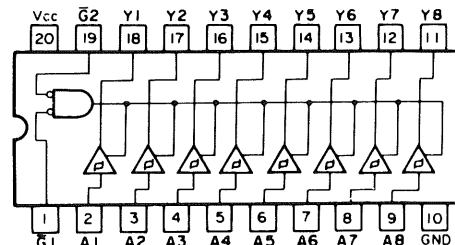


SN74ALS541N
SN74LS541N

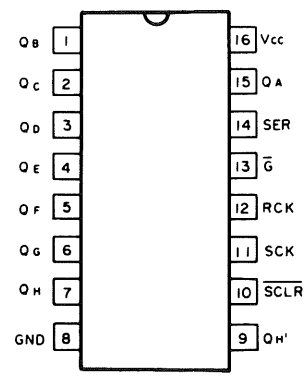


HD74HC595FP
HD74HC595AP
SN74LS595N

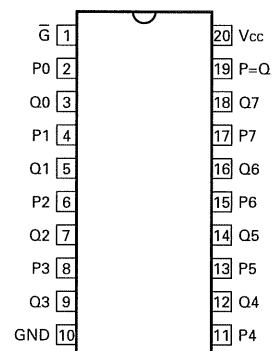

SN74ALS688N

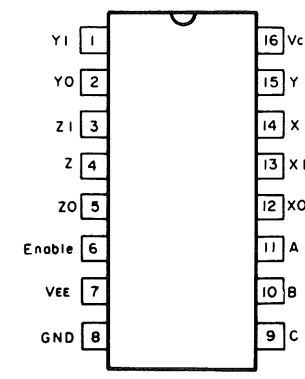


MC74HC4053N

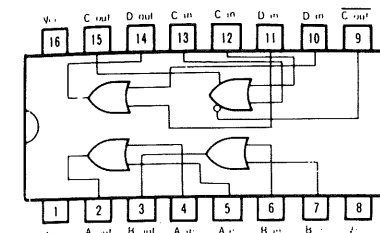


MC10103L


SEMICONDUCTORS

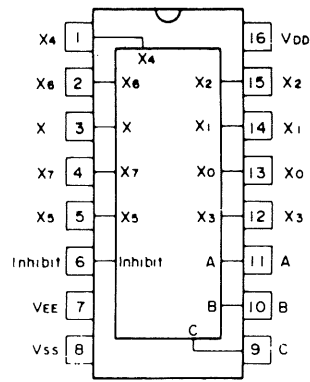


MC14051BCP

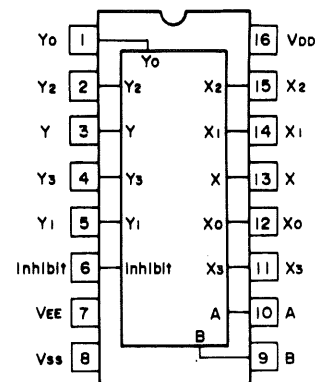


MC14052BCP

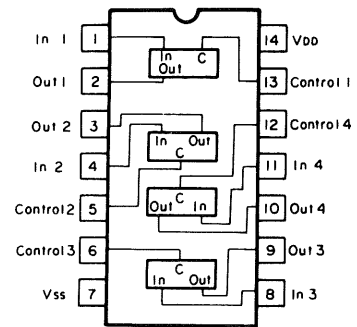


MC14066BCP

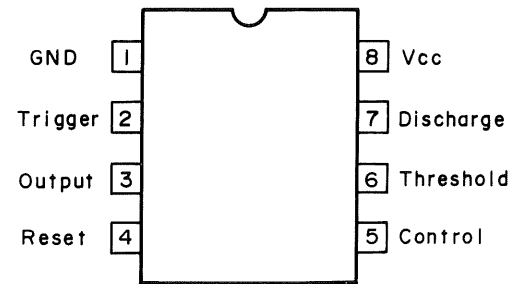


HA17555PS

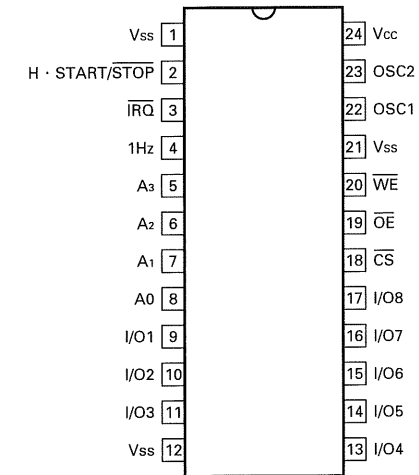


HD64610P

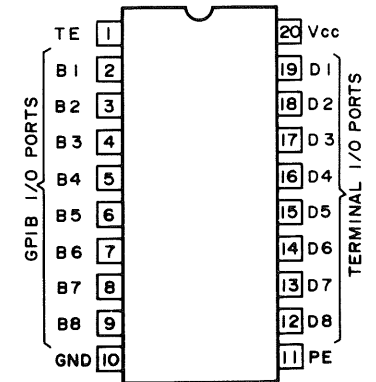


SN75160BN

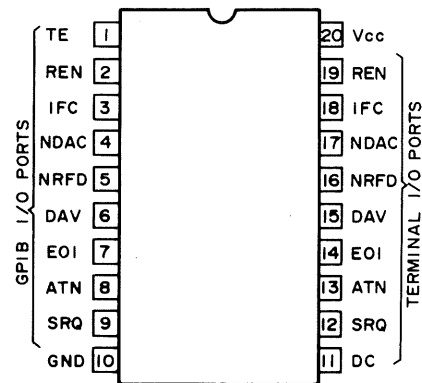


SN75161BN




74F191PC




74F193PC




MC10H016L

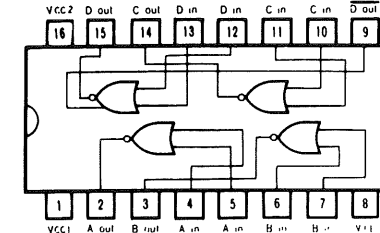


MC10H102L

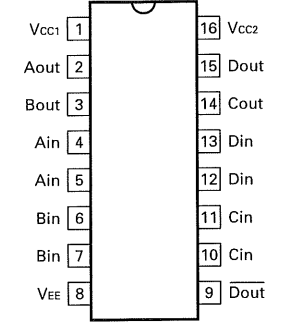


MC10H104L




MC10H105L

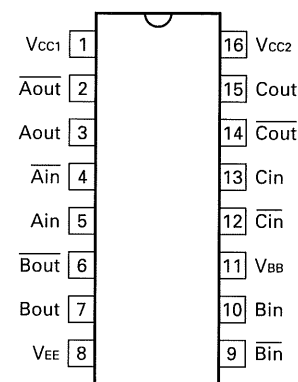


MC10H116M

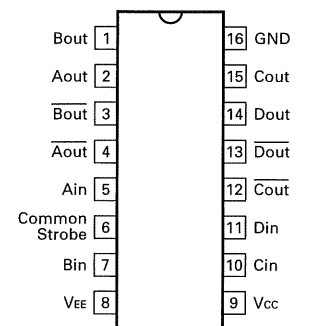


MC10H124L



MC10H125L
MC10H125M

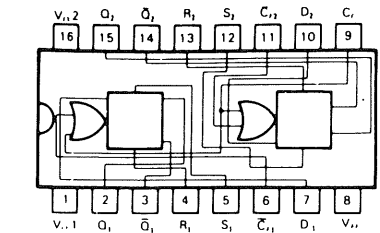


MC10H131L

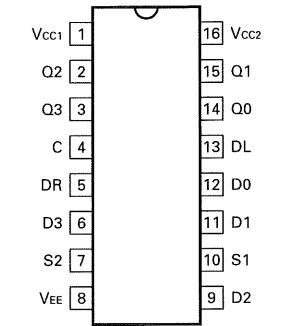


MC10H141L


SEMICONDUCTORS

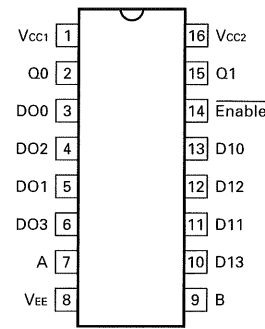


MC10H174L

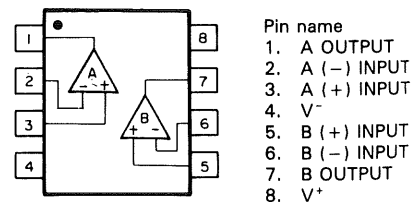


NJM072BD
NJM072BL

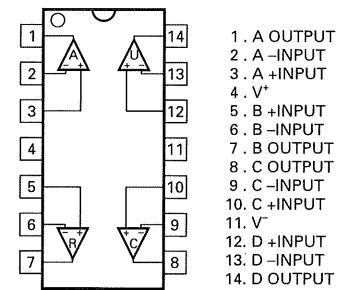

NJM074D




NJM556D

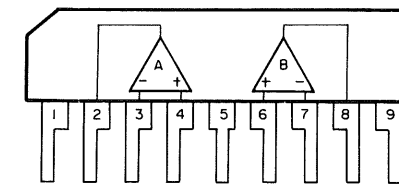


NJM4556L


- Pin name
1. V⁺
 2. A OUTPUT
 3. A - INPUT
 4. A + INPUT
 5. V⁻
 6. B + INPUT
 7. B - INPUT
 8. B OUTPUT
 9. V⁺

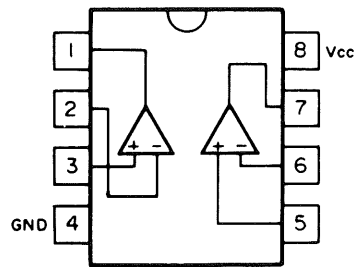


NJM4558D

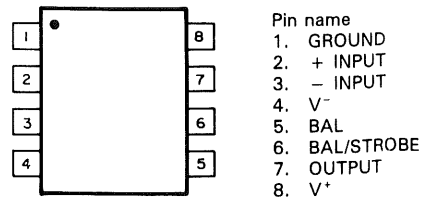


LM311N

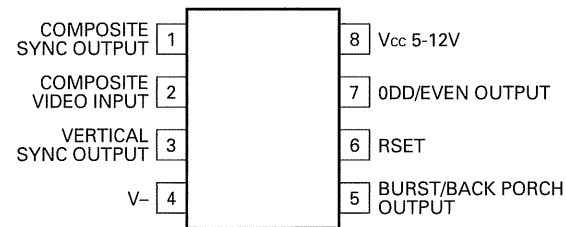


LN1881N




LM6218N

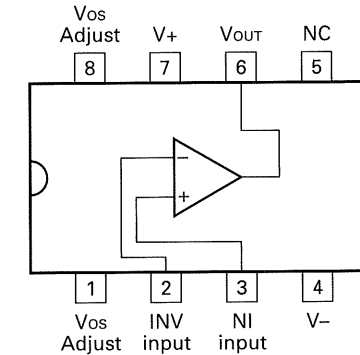


LM6364N

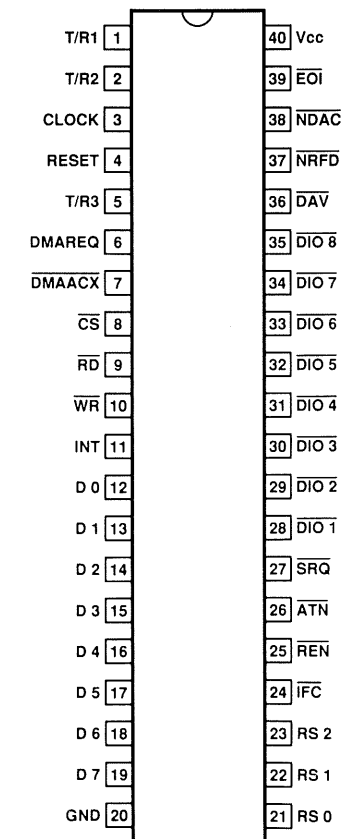


μPD7210C

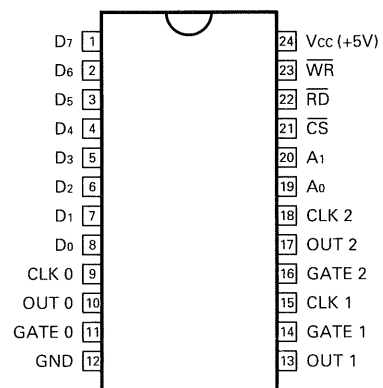


μPD8253C-2

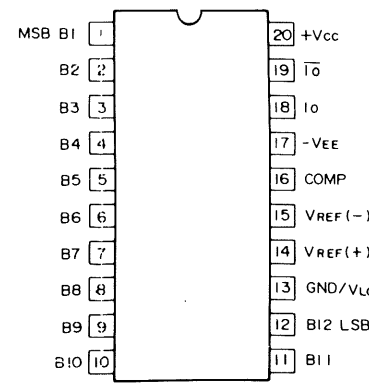

HA17012PB




μA733CN

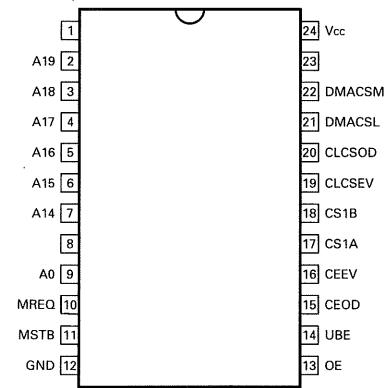


CTM6011


SEMICONDUCTORS

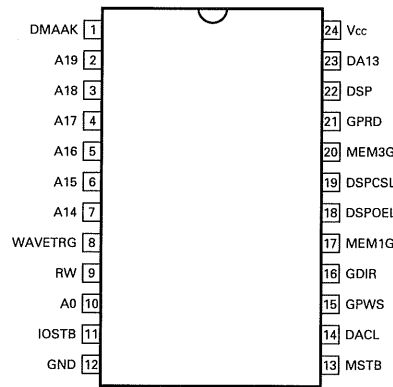


CTM6021

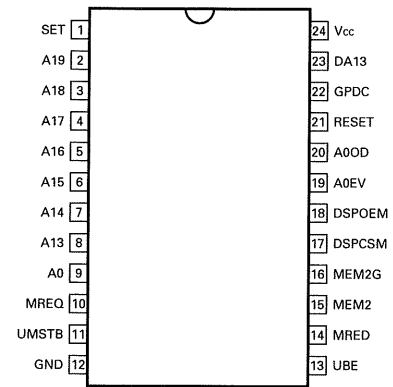


CTM6031

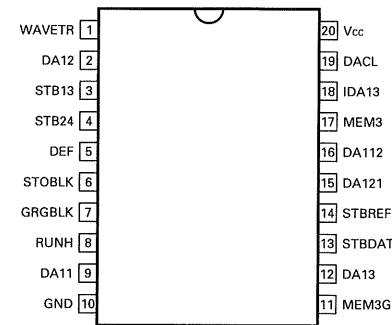


CTM6041

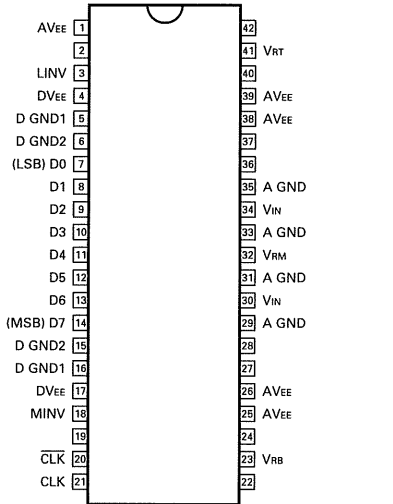


CXA1396D

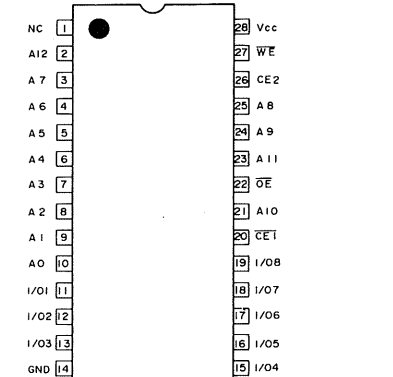


CXK5863M-25

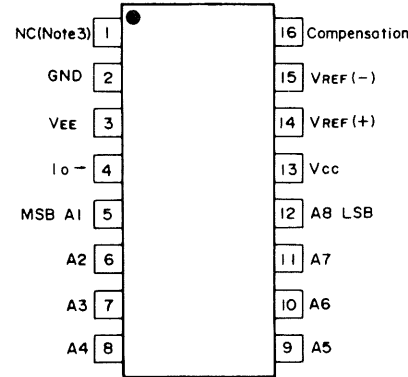

DAC0808LCN

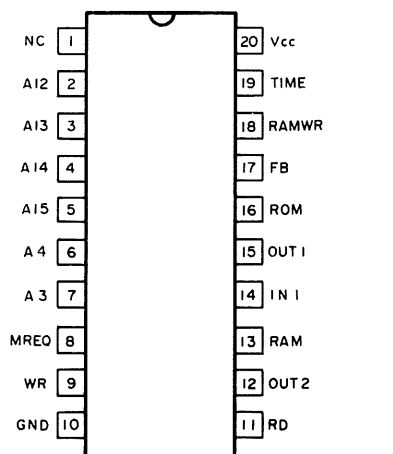


DTM-5010

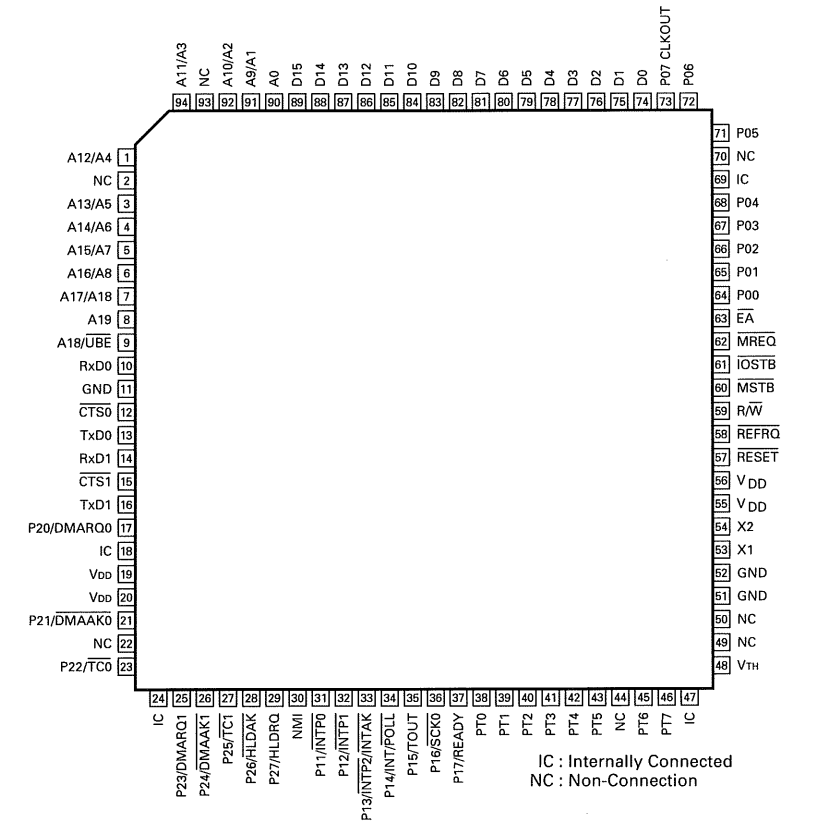


IC : Internally Connected
NC : Non-Connection

μPD70335GJ-85BG

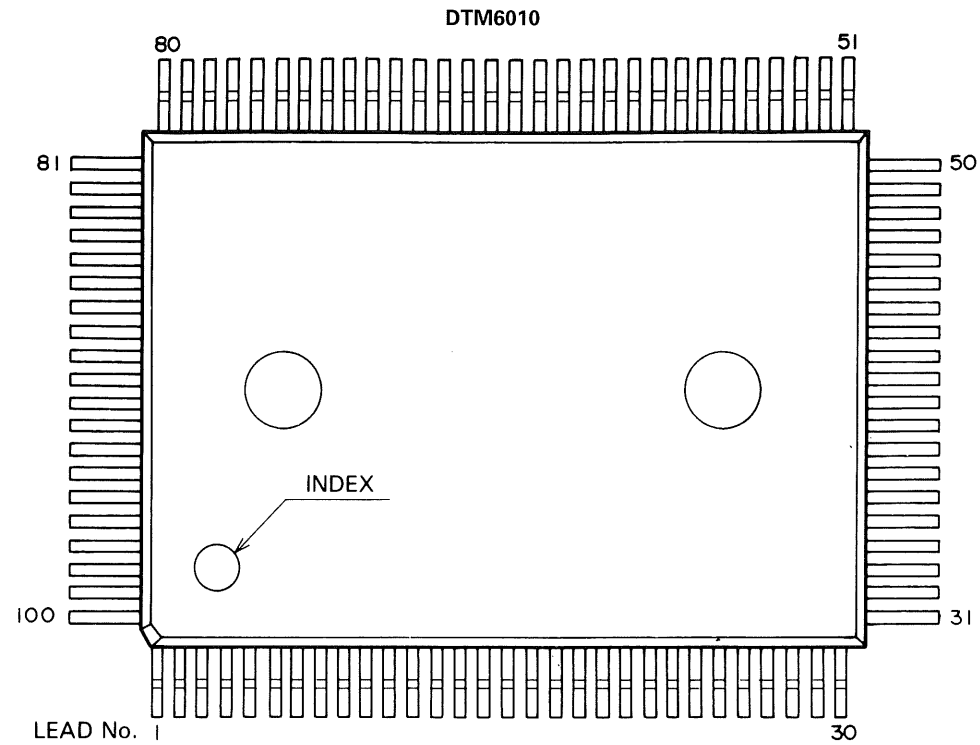


| Pin No. | Pin Name | Pin No. | Pin Name | Pin No. | Pin Name | Pin No. | Pin Name |
|---------|----------|---------|----------|---------|----------|---------|----------|
| 1 | CONT | 26 | TSD0 | 51 | GETD | 76 | DD3 |
| 2 | A13 | 27 | TSD1 | 52 | CA0 | 77 | SING |
| 3 | VDD | 28 | VDD | 53 | VDD | 78 | VDD |
| 4 | A14 | 29 | TSD2 | 54 | CA4 | 79 | R10M |
| 5 | A15 | 30 | AX2 | 55 | CA3 | 80 | 10M |
| 6 | INT0 | 31 | AX1 | 56 | CA2 | 81 | HLDF |
| 7 | VX3 | 32 | AX0 | 57 | CA1 | 82 | SGA |
| 8 | VX2 | 33 | AX3 | 58 | CD3 | 83 | ROSP |
| 9 | VX1 | 34 | HS2 | 59 | CD2 | 84 | ROD |
| 10 | VX0 | 35 | HS1 | 60 | CD4 | 85 | HLDL |
| 11 | DA0 | 36 | TDIO | 61 | CD1 | 86 | ROUB |
| 12 | DA1 | 37 | TWE | 62 | CD5 | 87 | ROB |
| 13 | DA2 | 38 | TCK1 | 63 | DC4 | 88 | ROQ |
| 14 | DA3 | 39 | TST1 | 64 | CD7 | 89 | ROED |
| 15 | VSS | 40 | VSS | 65 | VSS | 90 | VSS |
| 16 | DA4 | 41 | TST2 | 66 | DC3 | 91 | D7 |
| 17 | DA5 | 42 | TADD | 67 | DC2 | 92 | D5 |
| 18 | DA6 | 43 | TCK2 | 68 | CD6 | 93 | D3 |
| 19 | DA7 | 44 | VS2 | 69 | DC1 | 94 | D1 |
| 20 | DA8 | 45 | VS1 | 70 | DC0 | 95 | ALE |
| 21 | DA9 | 46 | VA0 | 71 | CD0 | 96 | D6 |
| 22 | ROR | 47 | VA4 | 72 | DD7 | 97 | D4 |
| 23 | ROA | 48 | VA3 | 73 | DD6 | 98 | D2 |
| 24 | LEVX | 49 | VA2 | 74 | DD5 | 99 | D0 |
| 25 | TCL | 50 | VA1 | 75 | DD4 | 100 | WR |


SEMICONDUCTORS

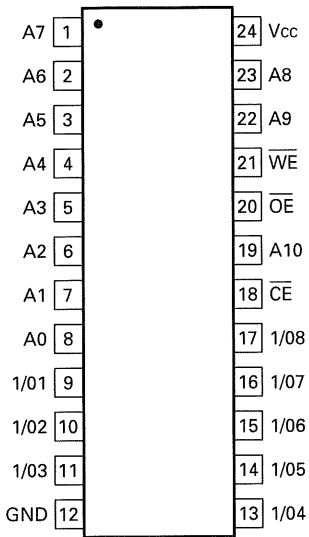


LC3517BS-15

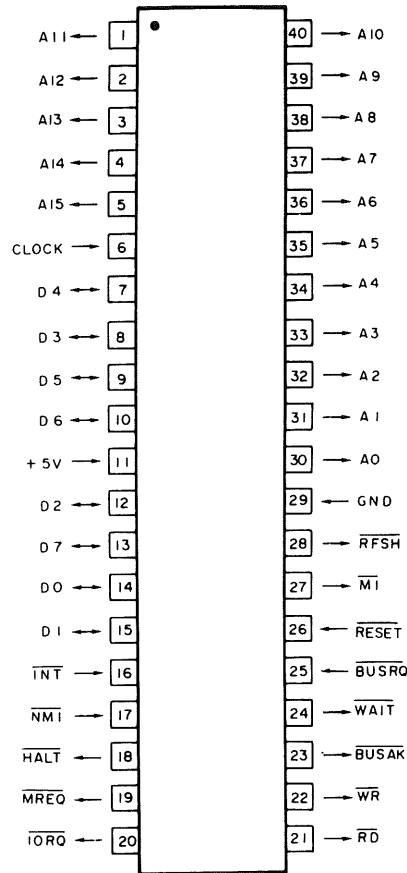


LH0080BF

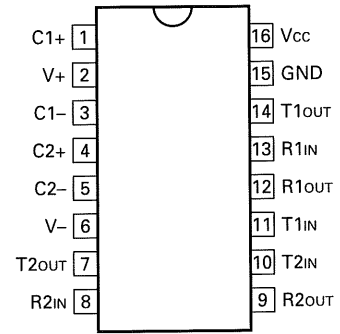

MAX232EPE



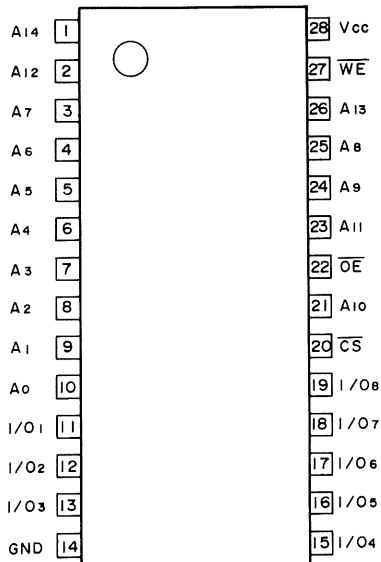


MB84256-10LL-SK

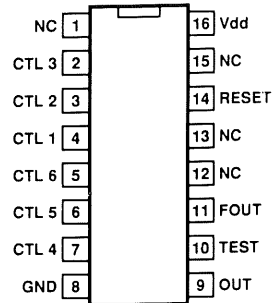


SPG-8650-0


SEMICONDUCTORS

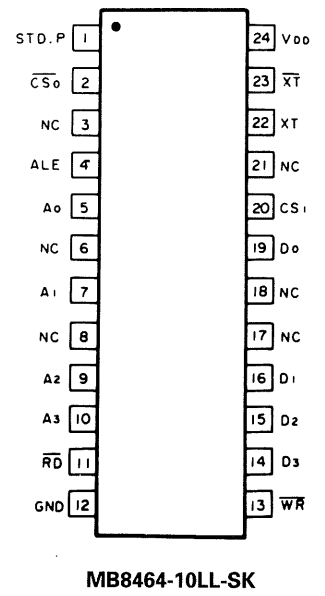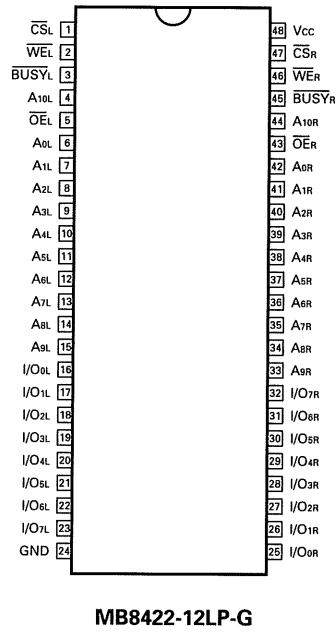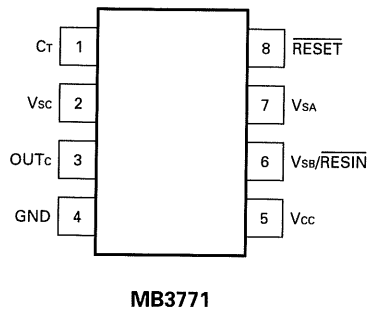


SEMICONDUCTORS




PST518B




2SA684 (Q)
2SA1005 (K)
2SA1208 (S,T)
2SC1384 (Q)
2SC2910 (S,T)




2SA1161
2SC3779 (D)




2SA1175 (F)
2SC2785 (F)
2SC3732 (L)




2SA1206 (K)




2SA1209 (S,T)
2SA1406 (E,F)
2SC2911 (S,T)
2SC3600 (E,F)




2SA1459
2SA1459 (K)
2SA1459 (L)




2SA1462 (Y34)




2SA1565
2SC4049




2SB1133 (R)
2SD613 (E)
2SD1666 (S)
2SD1666 (R)




2SC1164 (D)*S




2SC3315 (C)
2SC3354 (S)
2SC3354 (S,T)



2SK241 (GR)



2SK304 (F)



2SK583-KEN

A product of
KENWOOD CORPORATION
14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150, Japan

B51-1116-00 (MC)