


# ARVIN HOME RADIO CHASSIS RE 37.

6K8

6K7

6Q7G

6K6G

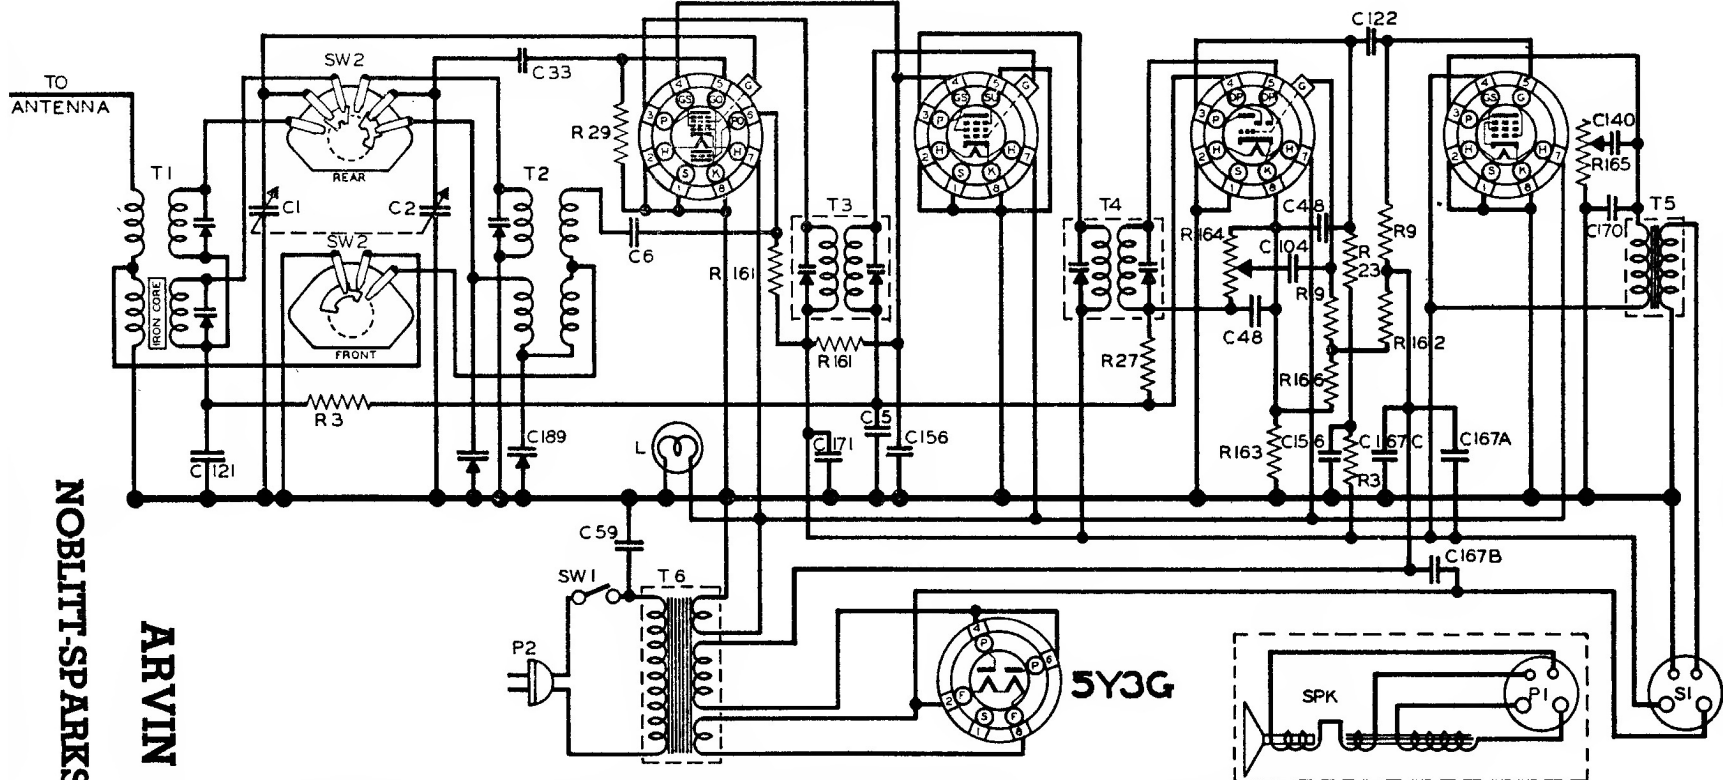

**NOBLITT-SPARKS INDUSTRIES, INC.**  
**ARVIN MODEL 78**

RESISTORS				CONDENSERS				TRANSFORMERS			MISCELLANEOUS UNITS		
R	OHMS	W	PART NO.	C	CAPACITY	VOLT	PART NO.	T	TYPE	PART NO.	SYMBOL	DESCRIPTION	PART NO.
3	100K	1/4	17-2088	1	TWO-GANG		17-18990	1	ANTENNA COILS	00-18094	L	DIAL LIGHT BULB - MAZDA 44	17-13905
9	1M	1/4	17-2080	2	VARIABLE			2	OSCILLATOR COILS		P1	SPEAKER PLUG (PART OF SPEAKER)	
23	250K	1/4	17-3011	5	.05	200	17-14015	3	FIRST I.F. COIL	00-18095	P2	LINE CORD & PLUG ASSEMBLY	17-15791E
27	2M	1/4	17-4788	6	.002	800	17-2083	4	SECOND I.F. COIL	00-18098	S1	SPEAKER SOCKET	17-13249
29	50K	1/4	17-2080	33	.00005	800	17-14047	5	OUTPUT TRANS.	00-18093	SPK	SPEAKER	17-15060
181	15K	1/2	17-14287	46	.00025	800	17-4207	6	POWER TRANS.	00-18099	SW1	AC LINE SWITCH (PART OF NO.17-18098)	
182	280	1/2	17-14288	59	.01	400	17-14815				SW2	BAND SWITCH	17-18088
183	30	1/4	17-14289	104	.01	200	17-4208						
184	500K	VC	17-18097	121	.02	200	17-14257						
185	100K	T.C.	17-18098	122	.01	400	17-2189						
186	40	1/4	17-14270	140	.02	400	17-2214						
				156	.05	400	17-4397						
				187A	10 MFD.	450							
				187B	10 MFD.	450	17-14233						
				187C	20 MFD	25							
				170	.005	400	17-14237						
				171	J	400	17-14238						
				189	0004-.0006	PAD.	17-14266						

I.F. PEAK 455 K.C.  
 BROADCAST BALANCE AT 1400 K.C.  
 PAD AT 600 K.C.  
 SHORT WAVE BALANCE AT 15 M.C.  
 CHECK AT 7 M.C.  
**NOBLITT-SPARKS INDUSTRIES, INC.,**  
 COLUMBUS, INDIANA.