


ARVIN HOME RADIO CHASSIS RE 48

12A8GT

12K7GT

12Q7GT

50L6GT

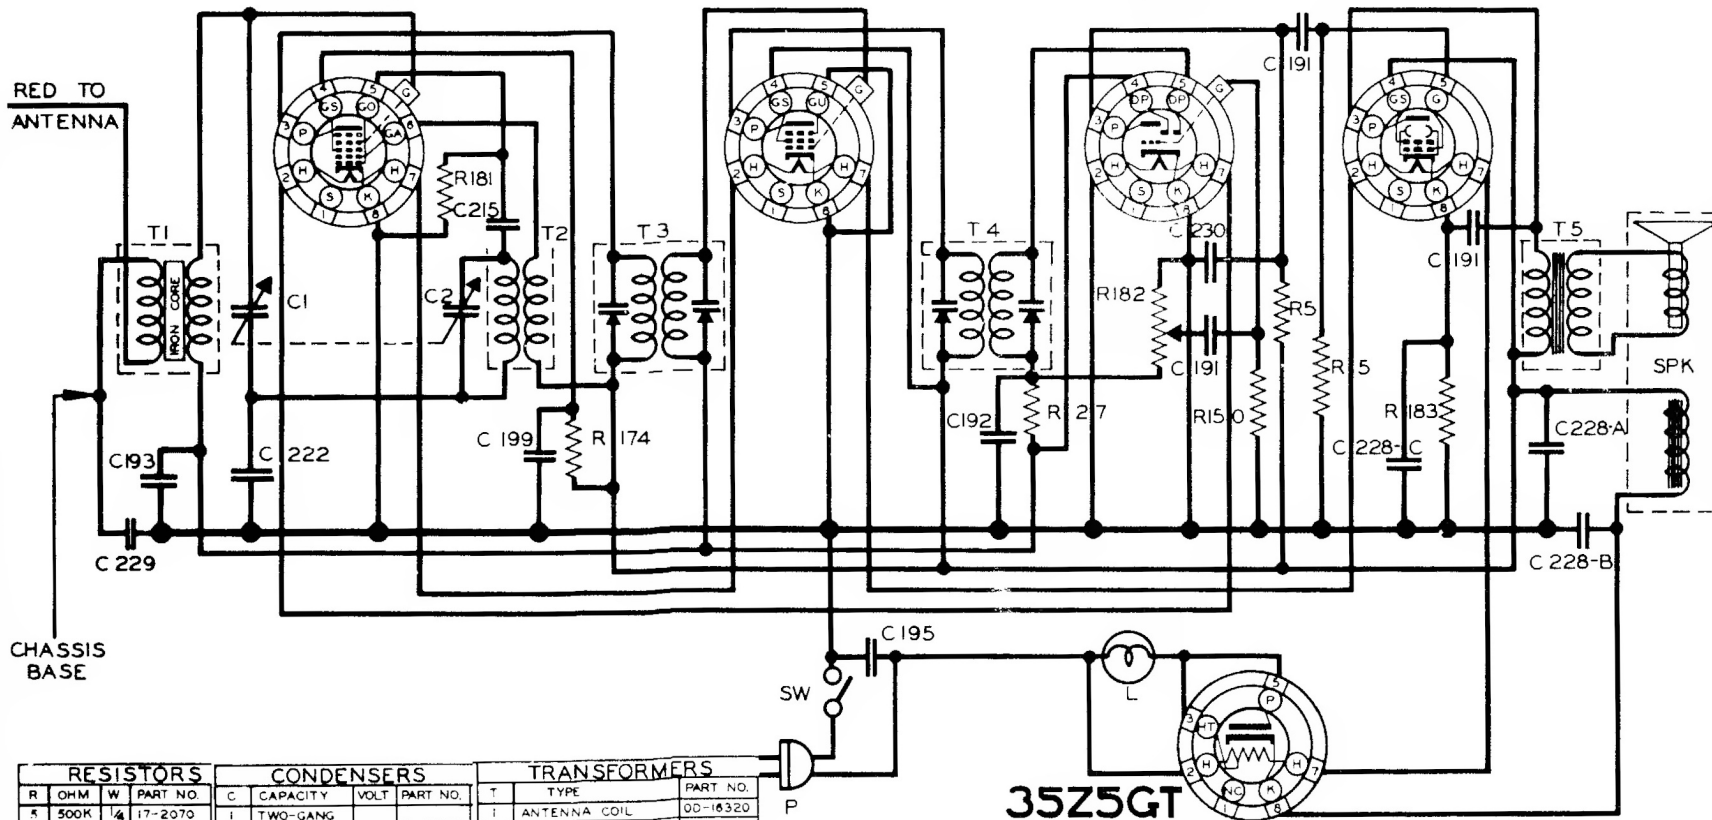

RESISTORS

| R | OHM | W | PART NO. |
|-----|------|------|----------|
| 5 | 500K | 1/4 | 17-2070 |
| 27 | 2M | 1/4 | 17-478B |
| 150 | 5M | 1/4 | 17-14242 |
| 174 | 20K | 1/4 | 17-14291 |
| 181 | 100K | 1/4 | 17-14303 |
| 182 | 1M | V.C. | 17-14315 |
| 183 | 150 | 1/4 | 17-14318 |

CONDENSERS

| C | CAPACITY | VOLT | PART NO. |
|------|----------|------|----------|
| 1 | TWO-GANG | | 17-16326 |
| 2 | VARIABLE | | |
| 191 | .01 | 400 | 17-14272 |
| 192 | .00025 | 800 | 17-14273 |
| 193 | .05 | 200 | 17-14274 |
| 195 | .05 | 400 | 17-14276 |
| 199 | .02 | 200 | 17-14283 |
| 215 | .0001 | 600 | 17-14310 |
| 222 | .2 | 400 | 17-14317 |
| 228A | 10 MFD. | 150 | |
| 228B | 20 MFD. | 150 | 17-14326 |
| 228C | 20 MFD. | 25 | |
| 229 | .02 | 400 | 17-14327 |
| 230 | .0005 | 400 | 17-14326 |

TRANSFORMERS

| T | TYPE | PART NO. |
|---|------------------|----------|
| 1 | ANTENNA COIL | 00-16320 |
| 2 | OSCILLATOR COIL | 00-16321 |
| 3 | FIRST I.F. COIL | 00-16322 |
| 4 | SECOND I.F. COIL | 00-18323 |
| 5 | OUTPUT TRANS. | 00-16324 |

35Z5GT

| MISCELLANEOUS UNITS | | |
|---------------------|-------------------------------|-----------|
| SYMBOL | DESCRIPTION | PART NO. |
| L | DIAL LIGHT BULB - MAZDA NO 51 | 17-13904 |
| P | LINE CORD & PLUG ASSEMBLY | 17-16371 |
| SPK | SPEAKER ASSEMBLY | 17-16314A |
| SW | LINE SWITCH | 17-14315 |

I.F. PEAK 455 K.C.
 BALANCE 1400 K.C. - CHECK AT 600K.C.
 NOBLITT-SPARKS INDUSTRIES, INC.,