

12SA7

12SQ7

50L6GT

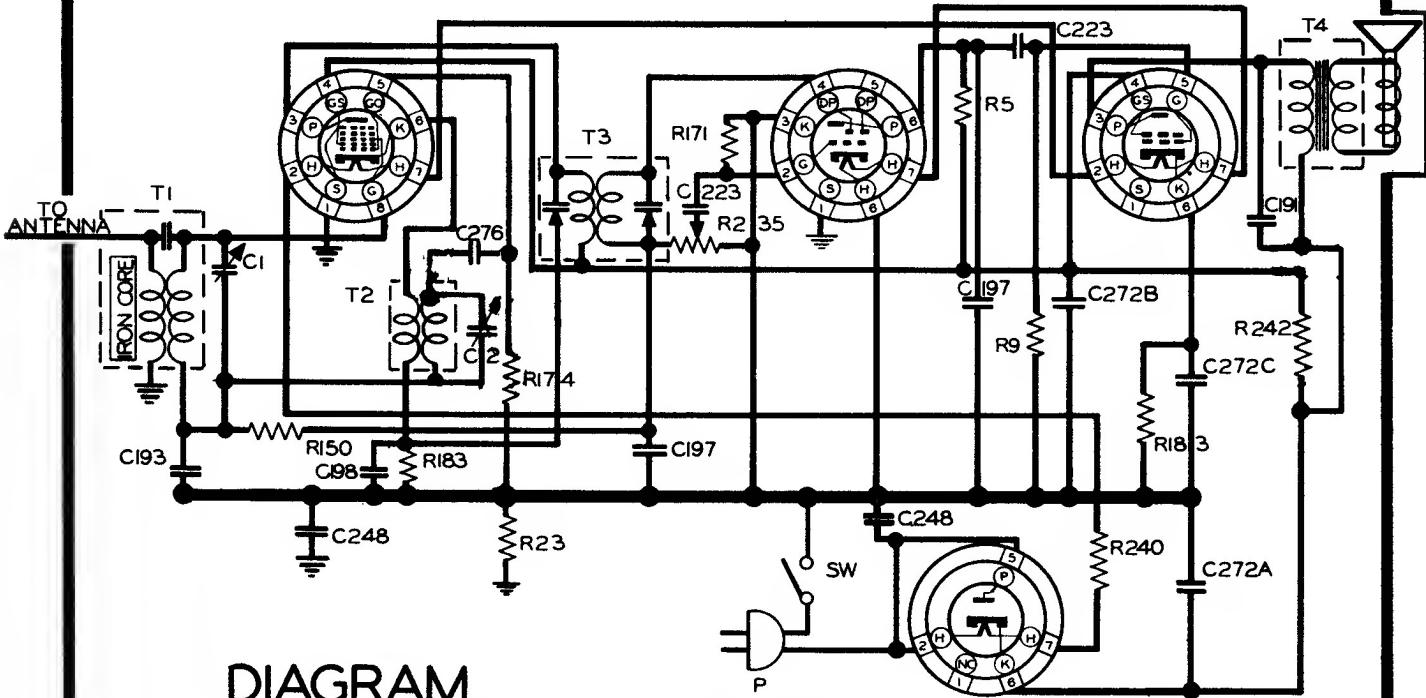


DIAGRAM
CHASSIS RE-91

35Z4GT OR
35Z5GT

RESISTORS				CONDENSERS			MISCELLANEOUS UNITS			
R	OHM	W	PART NO.	C	CAPACITY	VOLT	PART NO.	SYMBOL	DESCRIPTION	PART NO.
174	20 K.	1/4	17-14291					T1	ANTENNA COIL	00-17130
9	1 M.	1/4	17-2080	193	.05	200	17-14274	T2	OSCILLATOR COIL	00-17223
171	15 M.	1/4	17-14288	248	.05	400	17-14366	T3	I.F. COIL	00-17210
5	500K.	1/4	17-2070	198	.005	400	17-14279	T4	OUTPUT TRANSFORMER	00-17131
183	150	1/4	17-14318	223	.002	400	17-14318	SPK.	SPEAKER	17-17209
235	2 M.	V.C.	17-17117	191	.01	400	17-14272			
23	250 K.	1/4	17-3011	1	TWO GANG		17-17115			
240	47	1	17-14397	2	VARIABLE					
150	5 M.	1/4	17-14242	272A	40 MFD.	150				
242	2000	1	17-14399	272B	20 MFD.	150	17-14398			
				272C	20 MFD.	25				
				197	.0001	500	17-14278			
				276	.00005	500	17-14404			

FREQUENCY RANGE
1750 TO 540 KC.
NOBLITT-SPARKS INDUSTRIES, INC.
COLUMBUS, INDIANA

WHEN EXTERNAL ANTENNA IS USED, REMOVE THIS WIRE FROM ANTENNA CLIP AND INSERT ANTENNA WIRE.


12SA7GT

12SK7GT

12SQ7GT

50L6GT

R	OHM	W	PART NO.	C	CAPACITY	VOLT	PART NO.
240	47	1	17-14397	2	VARIABLE		
150	5 M.	1/4	17-14242	272A	40 MFD.	150	
242	2000	1	17-14399	272B	20 MFD.	150	17-14398
				272C	20 MFD.	25	
				197	.0001	500	17-14278
				276	.00005	500	17-14404

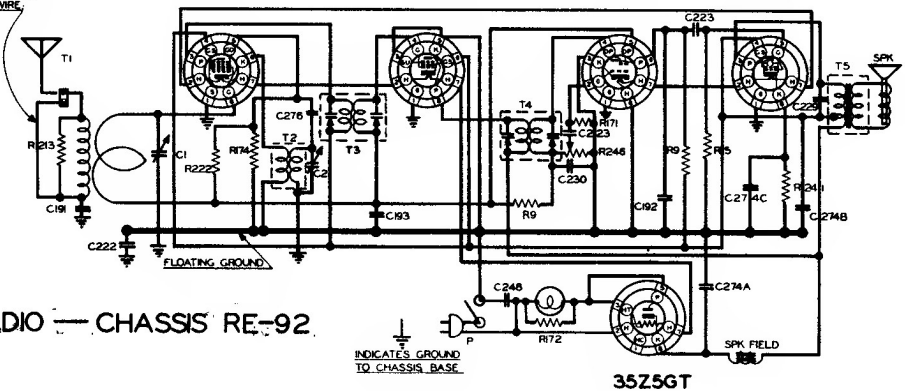

ARVIN HOME RADIO — CHASSIS RE-92.

INDICATES GROUND TO CHASSIS BASE

35Z5GT