



ENGINEERING STANDARD	DATE EFFECTIVE 10/16/84	NUMBER EST 1290
ENGINEERING DESIGN SPECIFICATION	DATE REVISED 10/23/84	PAGE 1 of 3

MODEL No. 120Ti  
ACOUSTIC & ELECTRICAL SPECIFICATION

Power Test:	-	30v I.E.C. Shaped Noise, 2 Hours.
Rated Impedance:	-	8 ohm
Minimum Impedance:		6 ohm
Impedance Curve:		
See attached curve, page 2	--	
Frequency Response (-6dB) Sine Wave on Axis		35 Hz to 27 kHz
Distortion:		
See attached curve, page 3		
Sensitivity:		89dB for 2.83v @ 1m.
Crossover Frequencies:		900Hz, 4000 Hz

PHYSICAL SPECIFICATIONS

Enclosure Volume	1.6 Cubic Feet
Mid-Range Enclosure:	80 cubic inches
Enclosure Dimensions:	24.5 inches x 14.25 in. x 11 in Deep

SYSTEM COMPONENT

Cabinet:	L120Ti (L & R)
Grille:	G120Ti
Bass Transducer	128H-1
High Frequency Transducer:	044Ti
Midrange Transducer:	104H
Crossover Network:	N120Ti

Design Engineer: Greg Timbers  
Greg Timbers

Model No. 120Ti


**JBL**

ENGINEERING STANDARD  
ENGINEERING DESIGN  
SPECIFICATION

DATE EFFECTIVE  
10/16/84  
DATE REVISED  
10/23/84


NUMBER  
REV. 1A0  
PAGE  
2 of 3

Brüel & Kjær

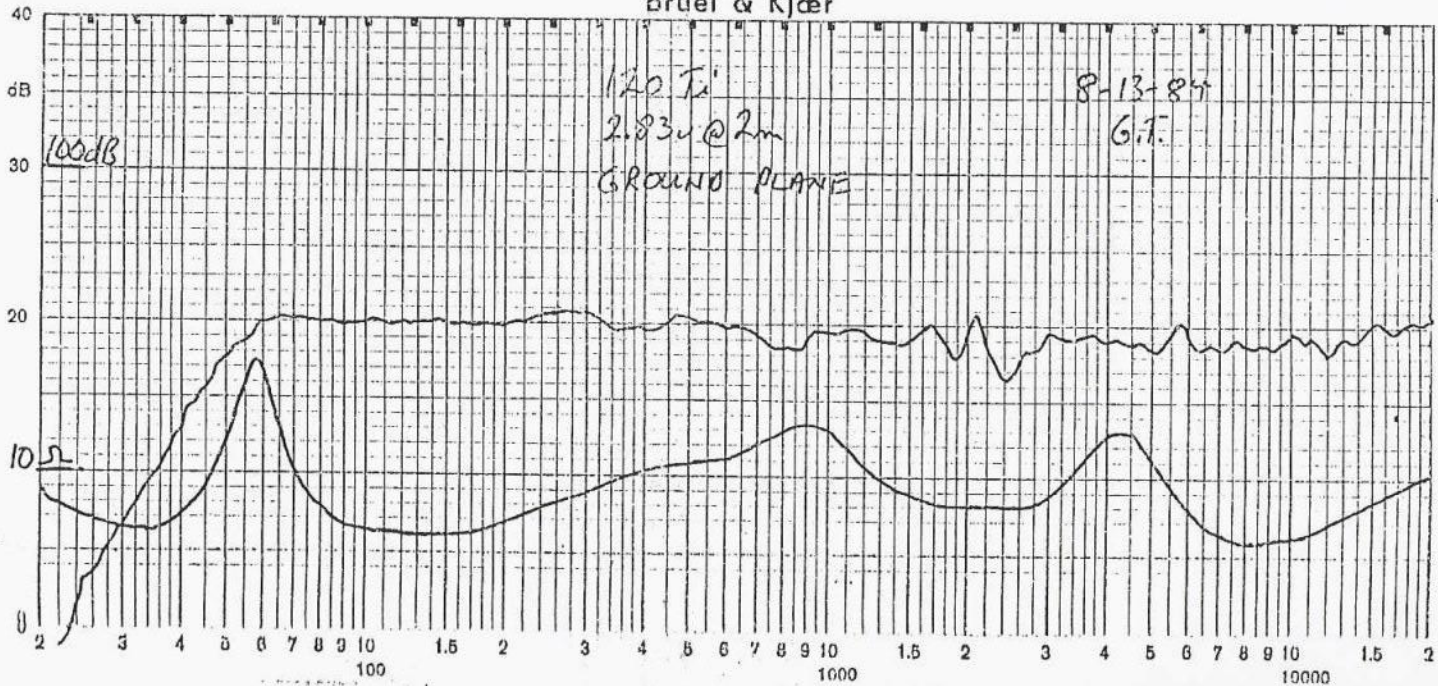

Model No. 120Ti

JBL

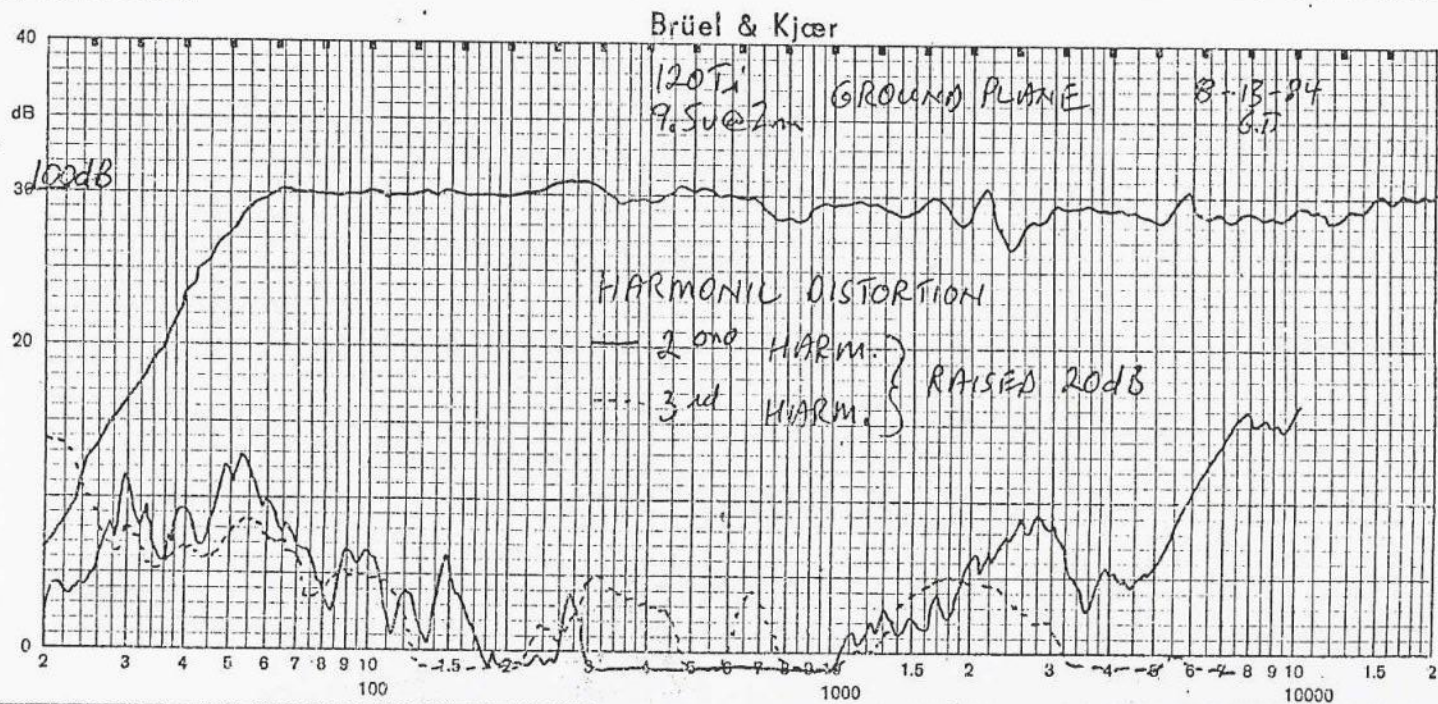

ENGINEERING STANDARD  
ENGINEERING DESIGN  
SPECIFICATION

DATE EFFECTIVE  
10/16/84  
DATE REVISED  
10/23/84

NUMBER  
EST 1290  
PAGE  
3 of 3