


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
B	4 KHZ	5 KHZ	7 KHZ	7 KHZ
	MF -10	MF -11	MF -14	
	HF -14	HF -11	HF -7	HF VAR

CIRCUIT:

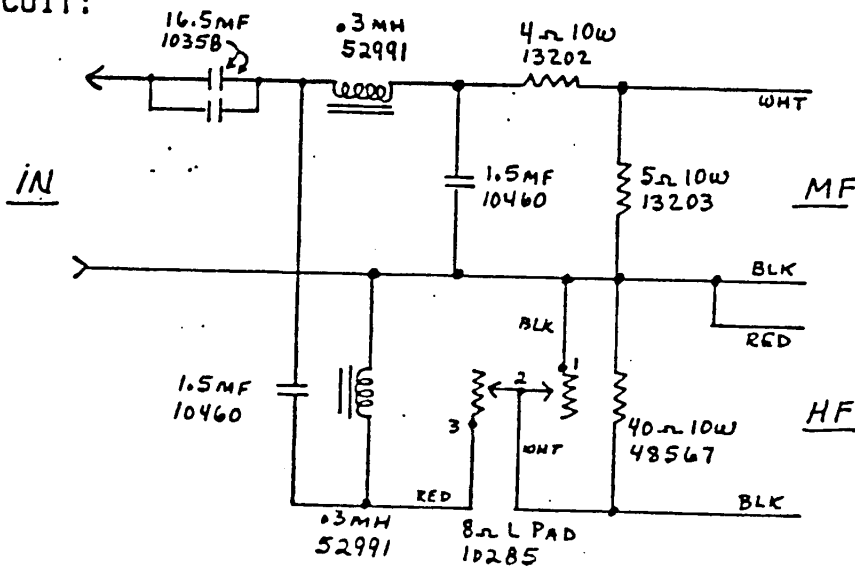

NOTES:

- ① USE STANDARD TEST FIXTURE

J	12-75
F	8-74