


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
8	300 HZ	1.1 KHZ	2 KHZ	2 KHZ
	LF 0	LF -7	LF -11	
	MF -17	MF -7	MF -4	MF VAR
8	1 KHZ	2.2 KHZ	5 KHZ	5 KHZ
	LF -5	LF -12	LF -17	
	HF -19	HF -12	HF -6	HF VAR

CIRCUIT:

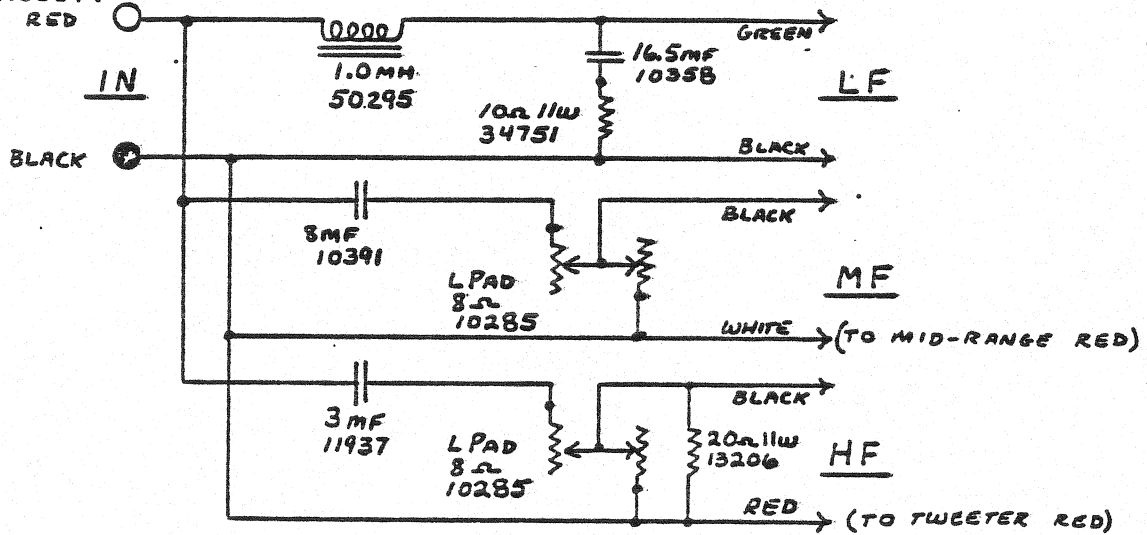

NOTES:

- ① USE STANDARD TEST FIXTURE