


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
8	600HZ	1 KHZ	1.5 KHZ	1.5 KHZ
	LF -3 HF -16.5	LF -10 HF -10	LF -16 HF -8	VAR

CIRCUIT:

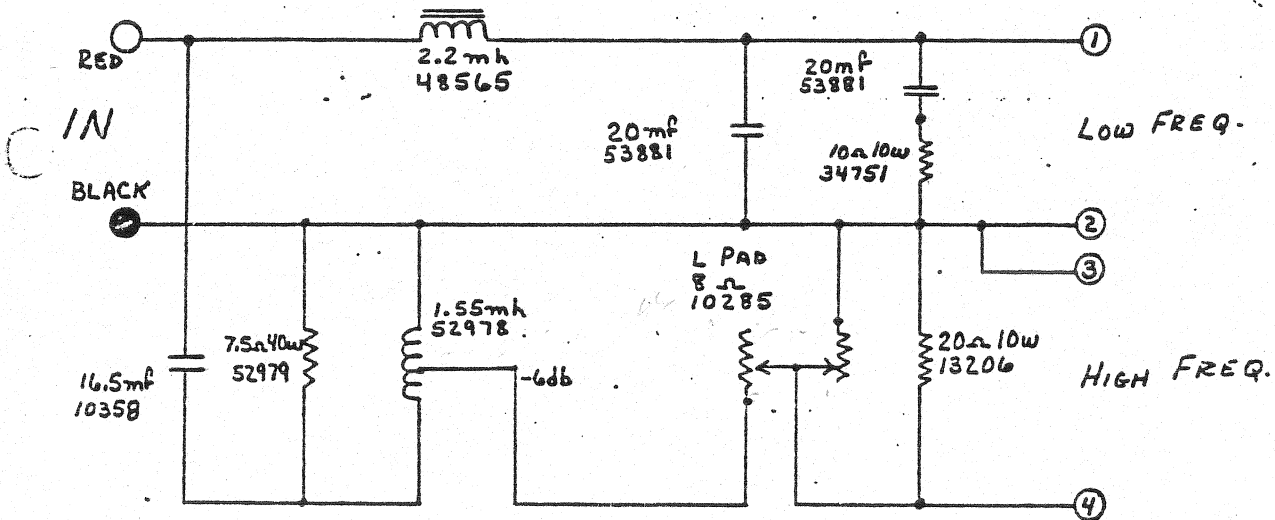

NOTES:

- ① USE STANDARD TEST FIXTURE