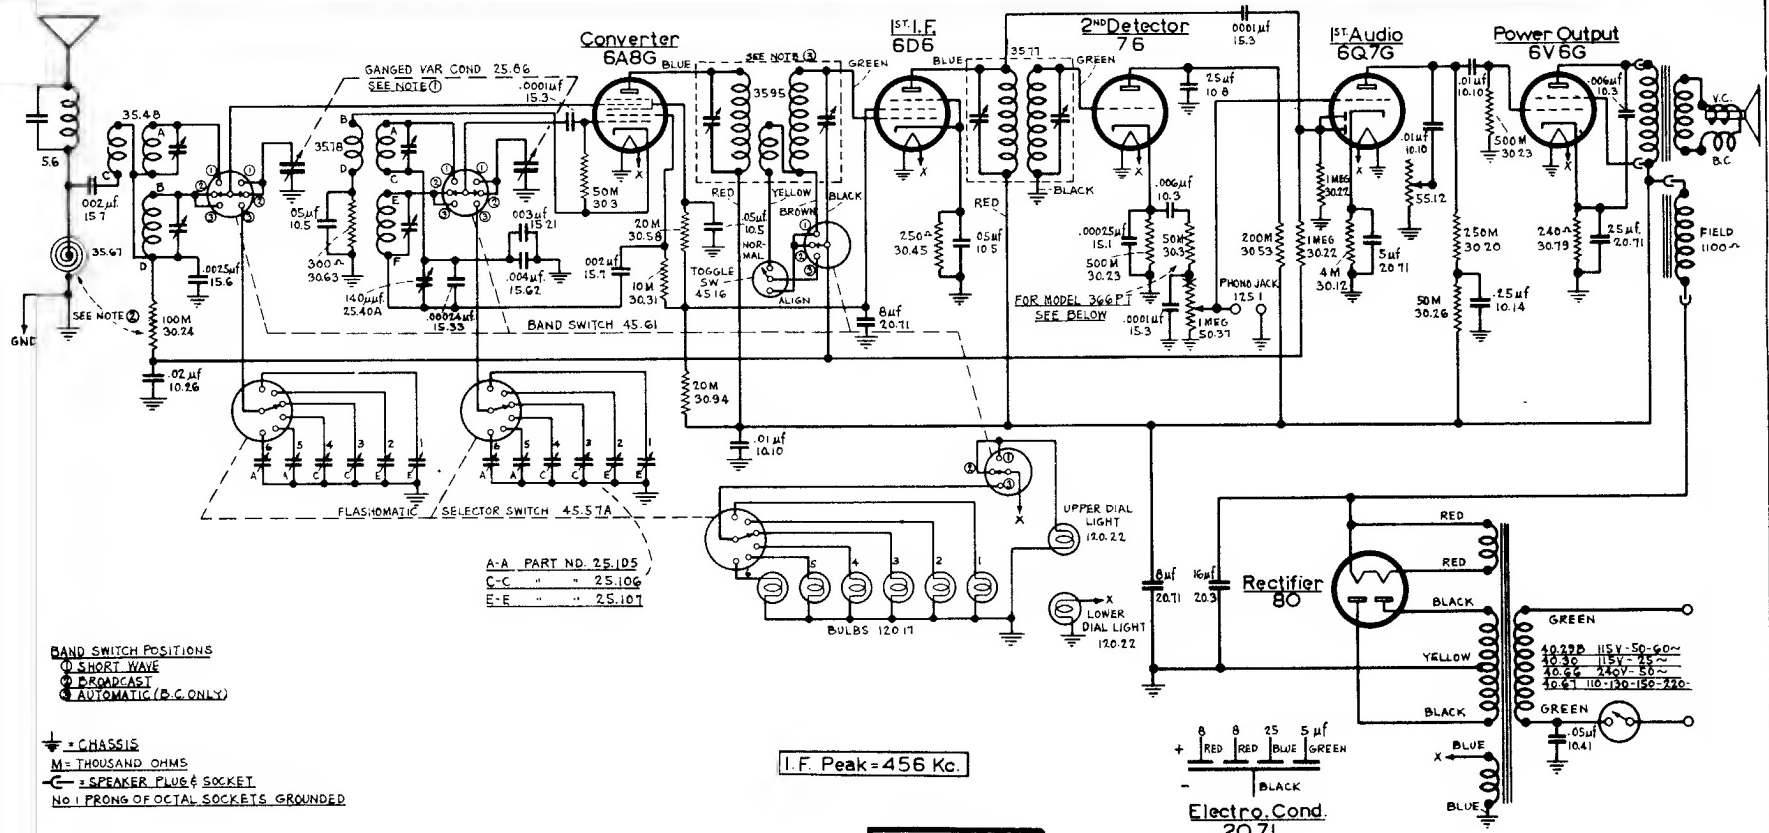

BAND SWITCH POSITIONS
① SHORT WAVE
② BROADCAST
③ AUTOMATIC (B.C. ONLY)

⏚ = CHASSIS
M = THOUSAND OHMS
⊂ = SPEAKER PLUG & SOCKET
No 1 PRONG OF OCTAL SOCKETS GROUNDED

I.F. Peak = 456 Kc.

FADA RADIO & ELECTRIC CO. LONG ISLAND CITY, N.Y.	
MODELS 366 & 366PT	
DRAWN BY MM	DATE 10-23-37
CHECKED BY	APPROVED BY 11/12/37

Model 366PT Phono Combination

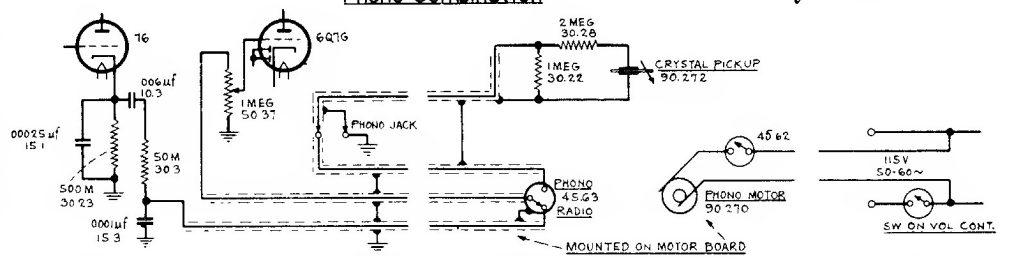

NOTE ③ ON EARLY MODELS I.F. PART NO 35.89 IS USED IN PLACE OF 35.95

Ant. Coil 35.48

A-D = .02Ω
B-D = 8.6Ω
C-D = .28Ω

Osc. Coil 35.78



A-C = .02Ω
B-D = .33Ω
E-F = 5.15Ω

1ST I.F. 35.95

PRI. BLUE-RED = 23Ω
SEC. GREEN-BROWN = 23Ω
EXP. WNDG. YELLOW-BROWN = 75Ω

2ND I.F. 35.77

PRI. BLUE-RED = 22Ω
SEC. GREEN-BLACK = 22Ω

NOTE ① ON EARLY MODELS, PART NO 25.11 IS USED IN PLACE OF PART NO. 25.86
NOTE ② ON EARLY MODELS 10M RESISTOR-PART NO 30.31 IS USED IN PLACE OF 35.67 & R.F. CHOKE 35.67 IS USED IN PLACE OF 100M-30.24