


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
8Ω	400 Hz	750 Hz	1.5 kHz	2.4 kHz
	LF-2	LF-8.2 M.F.-8.2	MF-4.2 HF-14	MF-7 HF-7
	4 kHz	7 kHz		
	HF-2	HF-0		

55029P

CIRCUIT:

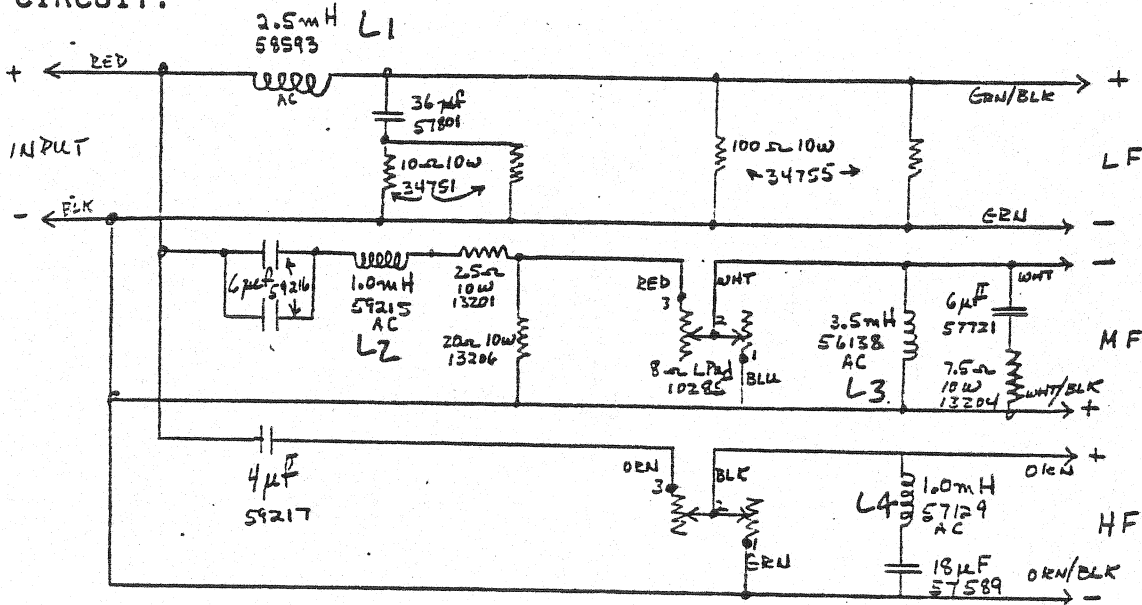

NOTES:

- ① USE STANDARD TEST FIXTURE