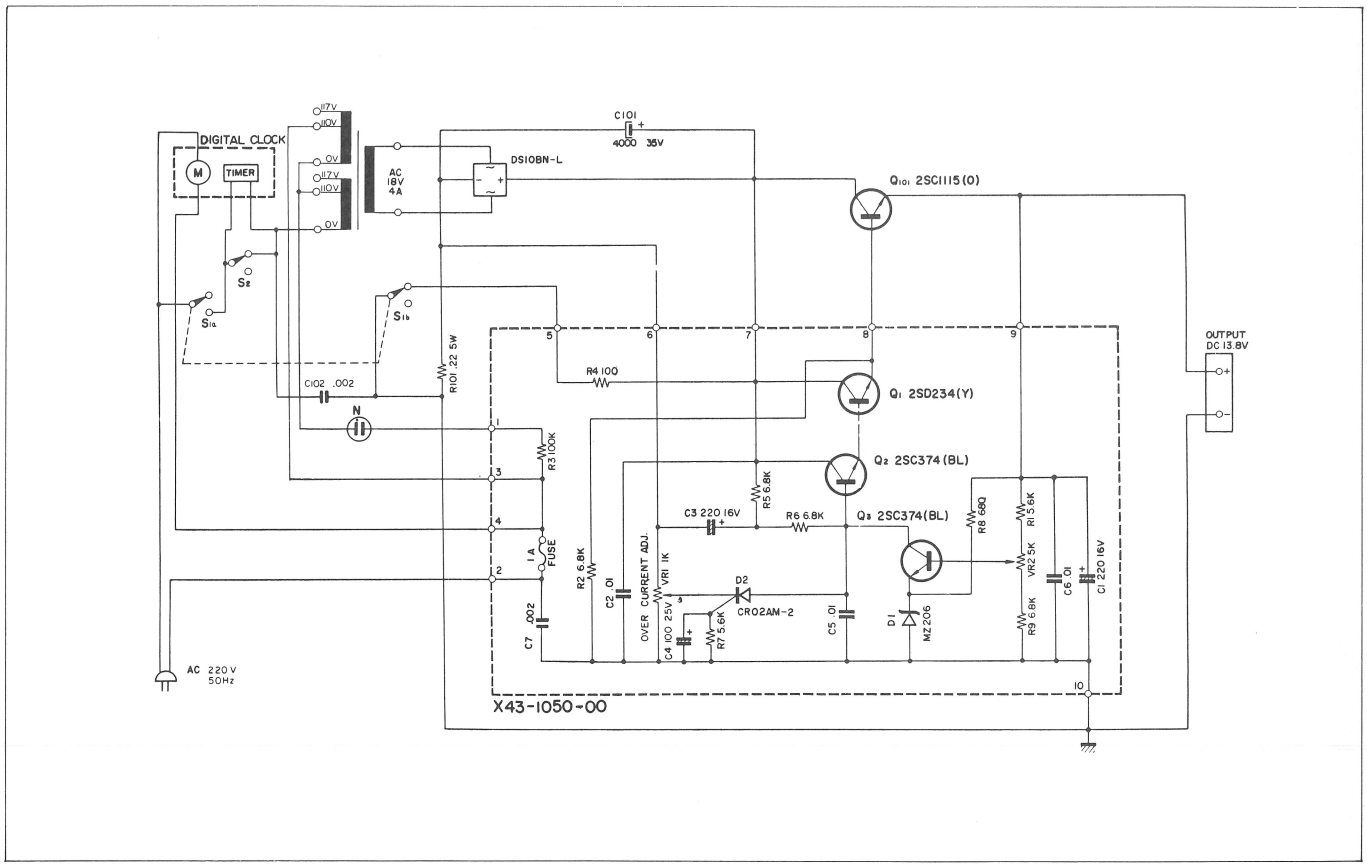

SPECIFICATIONS

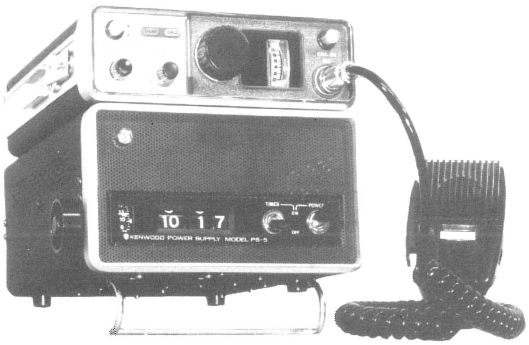

GENERAL SPECIFICATIONS

Application	Supply of stabilized DC power to the TR-7200.
Dimensions	7-1/16"(180mm)wide x 3-15/16" (100mm)high x 9-7/16"(240mm) deep
Weight	Approx. 8.36 lbs. (3.8kg)

POWER SUPPLY SECTION

Power Requirement	220V AC ±10%, 50 Hz
Output Voltage	13.8V DC
Output Current	3.2A intermittent, 2A max. continuous.
Fluctuation	±4% against an input AC voltage variation of 220V AC ±10%
Ripple Component	10 mV or less at 220V AC input and 3.2A output current at 13.8 V DC.
Ground	Negative ground

CLOCK SECTION

Clock Frequency	50 Hz
Power Consumption	Approx. 3.6 VA
Timer ON Period	60 minutes ±20 minutes
Time Set Accuracy	0 to −15 minutes or better

NOTE: The circuit and ratings may change without notice due to developments in technology.