


General Electric Model GD-60

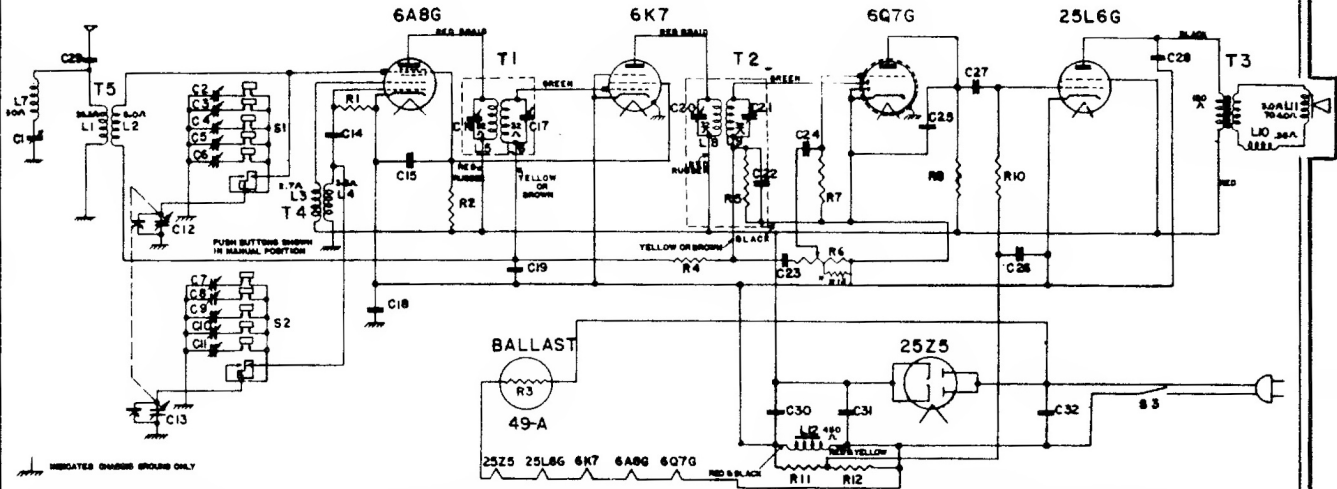

* Used on early production receivers only. For replacement purposes, use specified volume control and omit R-13

Symbol	Description	Symbol	Description	Symbol	Description
C-1	Wave Trap Trimmer, 45-145 Mmf.	C-20	Trimmer Capacitor, 50-135 Mmf.	R-7	Carbon Resistor, 15 Megohms
C-2	Selector Trimmer, 100-510 Mmf.	C-21	Trimmer Capacitor, 50-135 Mmf.	R-8	Carbon Resistor, 220,000 Ohms
C-3	Selector Trimmer, 75-410 Mmf.	C-22	Mica Capacitor, 470 Mmf.	R-10	Carbon Resistor, 470,000 Ohms
C-4	Selector Trimmer, 50-300 Mmf.	C-23	Paper Capacitor, .002 Mfd.	R-11	Carbon Resistor, 270,000 Ohms
C-5	Selector Trimmer, 50-300 Mmf.	C-24	Paper Capacitor, .002 Mfd.	R-12	Carbon Resistor, 68,000 Ohms
C-6	Selector Trimmer, 20-200 Mmf.	C-25	Mica Capacitor, 330 Mmf.	R-13	Carbon Resistor, 68,000 Ohms
C-7	Selector Trimmer, 50-300 Mmf.	C-26	Paper Capacitor, .15 Mfd.	S-1	Antenna Switch
C-8	Selector Trimmer, 50-300 Mmf.	C-27	Paper Capacitor, .005 Mfd.	S-2	Oscillator Switch
C-9	Selector Trimmer, 20-200 Mmf.	C-28	Paper Capacitor, .03 Mfd.	S-3	Power Switch combined with R-6
C-10	Selector Trimmer, 20-200 Mmf.	C-29	Paper Capacitor, .001 Mfd.	T-1	1st I.F. Transformer
C-11	Selector Trimmer, 10-100 Mmf.	C-30	Dry Electrolytic Cap., 12 Mfd.	T-2	2nd I.F. Transformer
C-12	Tuning Condenser Ant.	C-31	Dry Electrolytic Cap., 20 Mfd.	T-3	Output Transformer
C-13	Tuning Condenser Osc.	C-32	Paper Capacitor, .02 Mfd.	T-4	Oscillator Transformer
C-14	Mica Capacitor, 47 Mmf.	R-1	Carbon Resistor, 47,000 Ohms	T-5	Antenna Transformer
C-15	Paper Capacitor, .25 Mfd.	R-2	Carbon Resistor, 10,000 Ohms	L-10	Hum Buck Coil
C-16	Trimmer Capacitor, 50-135 Mmf.	R-3	Ballast Tube 49-A, 170 Ohms	L-11	Voice Coil
C-17	Trimmer Capacitor, 50-135 Mmf.	R-4	Carbon Resistor, 2.2 Megohms	L-12	Field Coil—450 Ohms (cold)
C-18	Paper Capacitor, .25 Mfd.	R-5	Carbon Resistor, 470,000 Ohms		
C-19	Paper Capacitor, 0.5 Mfd.	R-6	Volume Control, 2 Megohms		

NOTE—In some receivers a 150,000 to 390,000 ohm resistor is connected across C-18.

GENERAL INFORMATION

Model GD-60 is a compact, six-tube AC-DC superheterodyne receiver, employing six General Electric Pre-tested Tubes as described above, in a superheterodyne circuit. It incorporates a simplified trimmer tuned "Touch-Tuning" system, allowing a set up of five stations for automatic tuning. Other features of design include I.F. wave trap, automatic volume control and an improved dustproof speaker.

I.F. Alignment

Connect an output meter across the voice coil. Set the volume control for maximum.

Set test oscillator to 455 and apply signal to the control grid of the 6A8G tube through a .05 mfd. capacitor. Do not remove the grid lead from the 6A8G and keep the test oscillator output as low as possible to give a readable output. Adjust all four I.F. trimmers for maximum output.


Wave Trap Alignment

Leave the test oscillator set to 455 K.C. and connect one output lead to the receiver chassis and the other through a 250 mmf. capacitor in series with 200 ohms to the receiver antenna lead. Adjust (C-1) for minimum output.

R.F. Alignment

Use the same dummy antenna (250 mmf. and 200 ohms) with 1500 K.C. input, adjust the oscillator trimmer (C-13) and antenna trimmer (C-12) for a maximum output.

Precaution—One side of the power supply is connected to the chassis through a .25 mfd. capacitor. If signal generator is AC operated, connect a .05 mfd. capacitor in the ground side before connecting it to the receiver chassis.

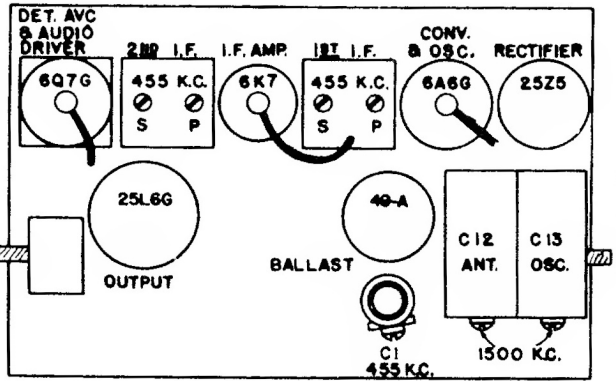

Tuning Frequency Range..... 540-1750 K.C.

Intermediate Frequency..... 455 K.C.

Electrical Power Output (120—line volts)

	AC	DC
Undistorted.....	1.2	1.0
Maximum.....	2.0	1.7

Loudspeaker—Electrodynamic

Outside Cone Diameter..... 5-inch
 Voice Coil Impedance..... 3.5 ohms at 400 cycles
 Field Coil Resistance..... 450 ohms (cold)