
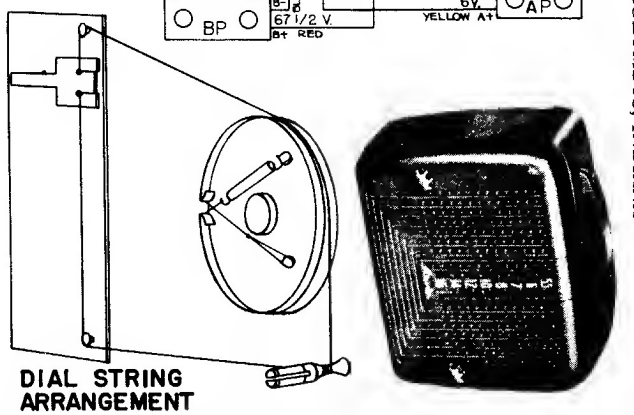


Model 240P, Chassis RE-243  
 battery portable uses a  
 similar circuit.

ARVIN RADIOS, MODELS 241P, 244P & 2410P; CHASSIS-RE-244, RE-255, RE-256, RE-259 & RE-254  
 4 TUBE, AC-DC, BATTERY, PORTABLE  
 NOBLITT-SPARKS INDUSTRIES, Inc., COLUMBUS, INDIANA

VOLTAGE MEASUREMENTS ARE MADE TO FLOATING GROUND WITH AN ELECTRONIC  
 VOLTMETER, WITH A LINE VOLTAGE OF 117 VOLTS AC AND NO SIGNAL.

\*R6 degenerative feedback resistor is used only on the Early Production of Model 241-P.  
 R4 was added and R11 relocated on Model 241-P, to reduce the temperature of the rectifier.  
 Except for R6, R4, and R11, the circuit is the same for Models 241-P and 2410-P.

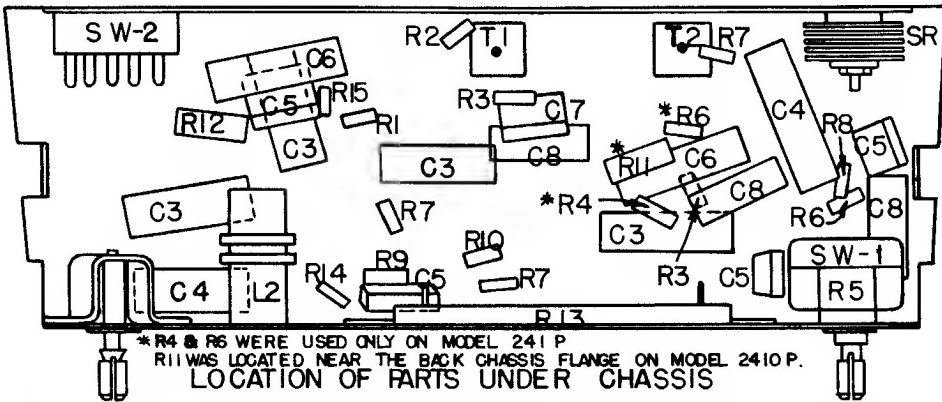

DIAL STRING  
 ARRANGEMENT