
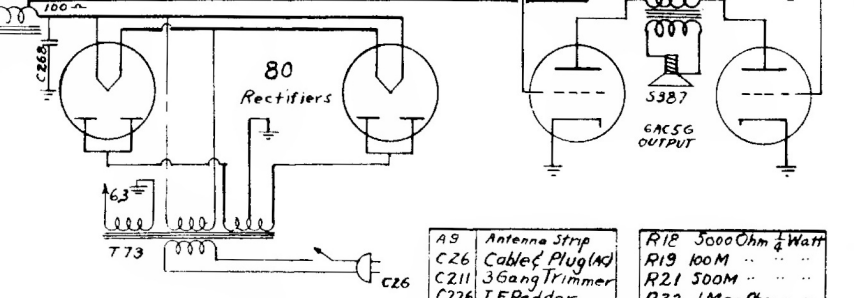


I.F. 456 KC.

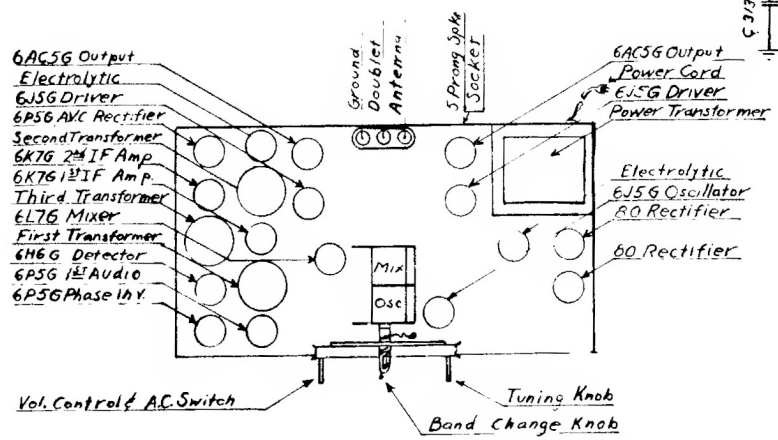

OPERATING VOLTAGES

No Signal, Volume Control Turned Off
 Line Voltage 117 Volts 60 Cycles
 Meter Used 2000 Ohms per Volt

TUBE	PLATE	SCREEN	SUP.	CATH.	HEATER
6L7 Mixer	245	85		2.4	6.0
6J5 Osc.	140			0	6.0
6K7 1st IF	245	85	2.4	4.4	6.0
6K7 2nd IF	245	85	4.4	4.4	6.0
6P5 AVC Rect.	0				6.0
6H6 2nd DET.	0				6.0
6P5 1st AF	150			9.2	6.0
6J5 Drivers	245			10	6.0
6P5 Inverter	150			9.2	6.0
6AC5 Drivers	335			0	6.0
60 Rectifiers	340 (AC)			350	4.8

- A9 Antenna Strip
- C26 Cable Plug (AC)
- C211 3Gang Trimmer
- C226 I.F. Padder
- C232 Osc Padder
- C268 24 MFD 500 V
- C269 40 MFD 350 V
- C291 250 Mica Dual
- C277 25 M MFD Mica
- C286 3000 "
- C287 200 "
- C289 12.00 "
- C302 .05 MFD 200 V
- C309 .02 MFD 400 V
- C313 25 "
- C314 .05 "
- C349 2 Gang Variable
- C363 Control Volume WS
- C401 Fish Line Cord
- K24 Knob 1 inch
- P46 Pilot Life 68V
- R11 200 Ohm 1/2 Watt
- R12 500 "
- R15 5000 "
- R17 25000 "

- R18 5000 Ohm 1/2 Watt
- R19 100M "
- R21 500M "
- R22 1 Meg Ohm "
- R23 3 "
- R25 40M Ohm 1/2 W
- R72 15M " 1 W
- S319 Spring Belt Ten.
- S301 Speaker 8"
- S333 Pointer
- S407 Coil Switch
- T73 Power Trans.
- T161 1st IF Trans.
- T162 2nd "
- T165 3rd "
- C285 2000 M MFD
- C280 100 "

In long wave sets,
 the coverage of B
 Band is from 125 to
 350 KC.

Model 14-Z-9
 Midwest Radio Corp.
 909 Broadway
 Cincinnati, Ohio

