

FADA RADIO & ELECTRIC CO., Inc.


Model P-130

Portable Receiver designed for operation from 105-125 volts, 40-60 cycles A.C. or the same voltage D.C., or 180-220 volts, 40-60 cycles A.C., or from batteries.

Frequency ranges are:
530 KC to 1650 KC,
2.3 MC to 7.6 MC, and
7.4 MC to 23.5 MC.

I.F. 456 KC.

Speaker: 5" P.M., 1.47 oz.
Alnico V Magnet.
Voice coil: 3.2 ohms.

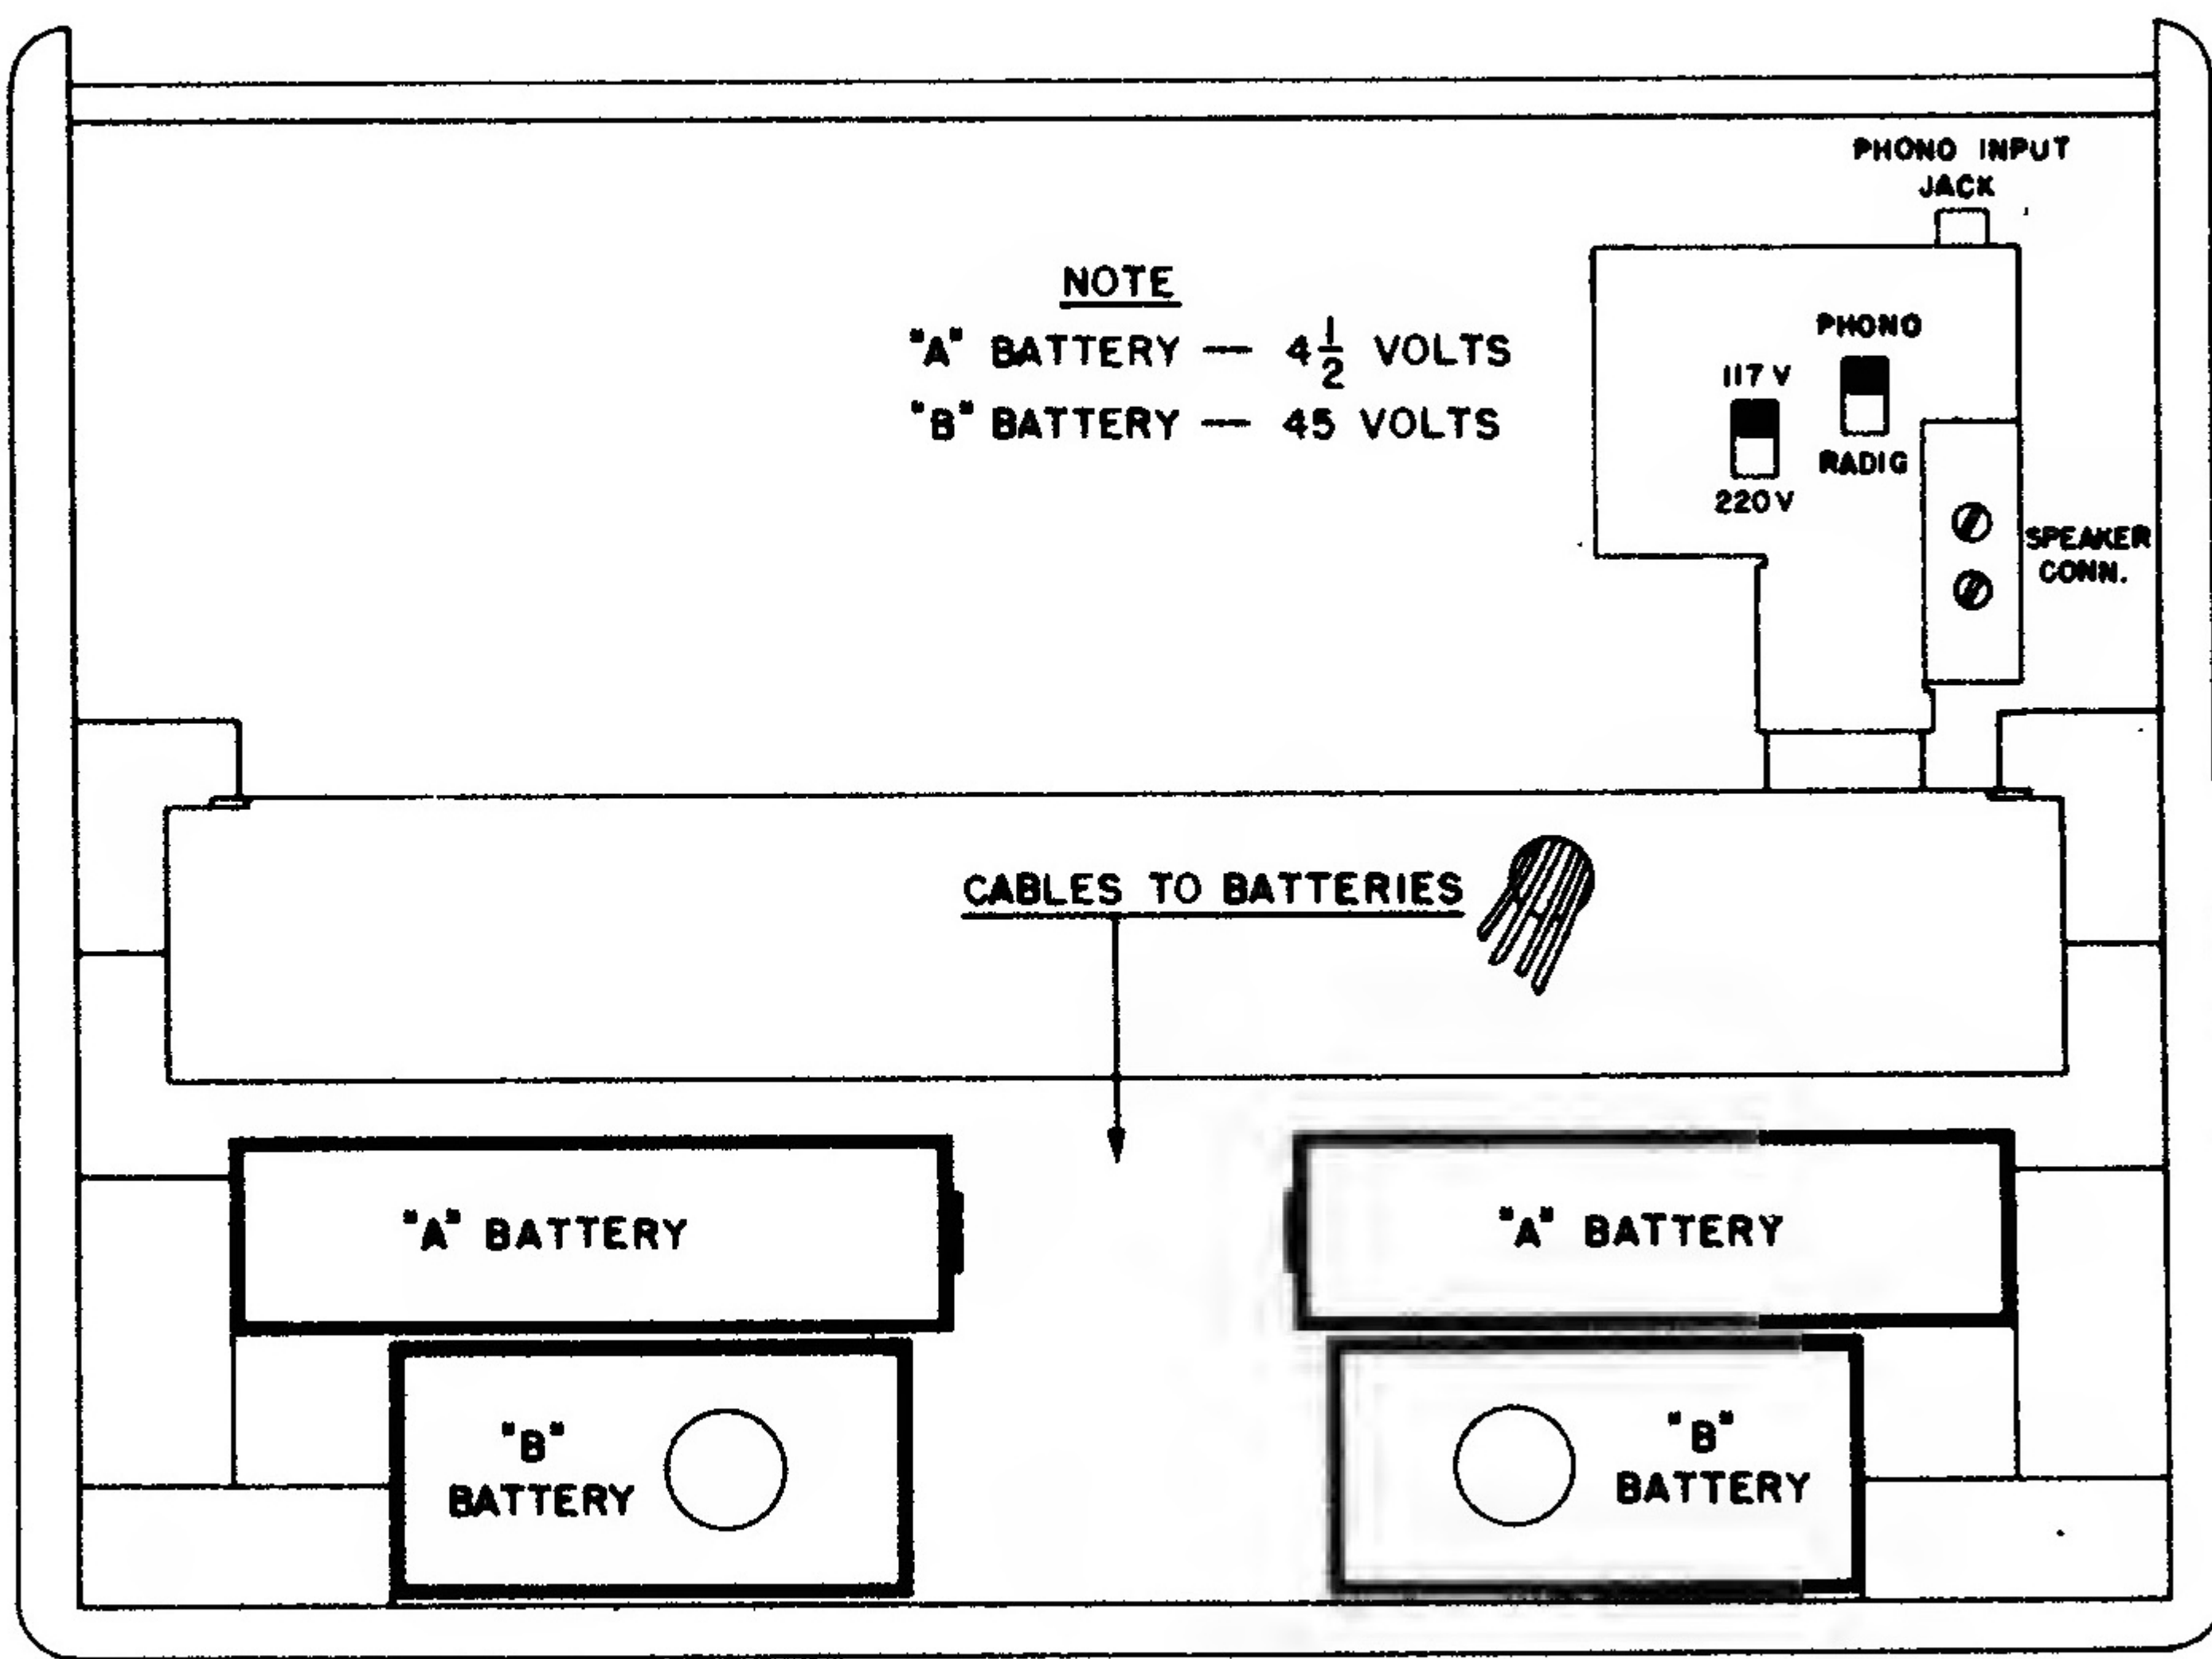

BATTERY LAYOUT P130

