

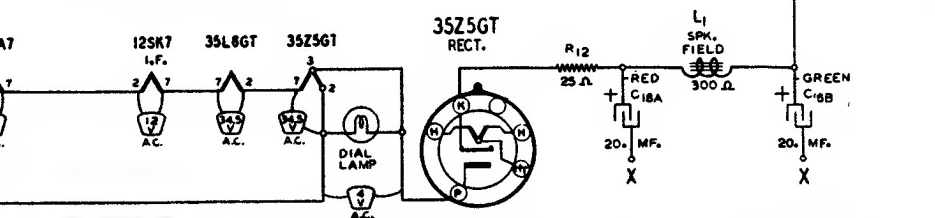


**MODEL 14WG-624A
MODEL 14WG-625A
MODEL 14WG-628A**

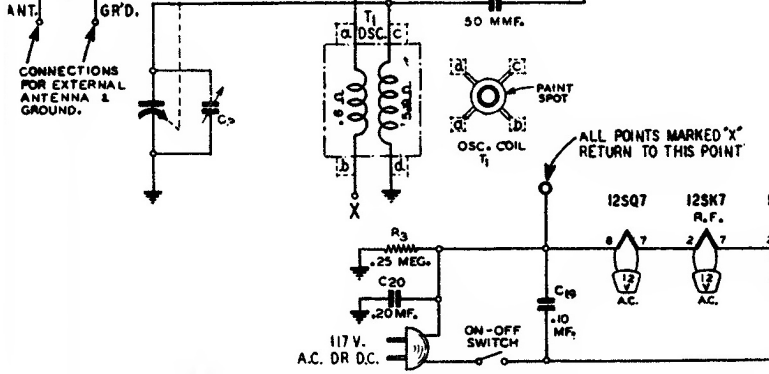

25 CYCLE MODELS
THE CAPACITY OF CONDENSERS C16A AND C16B IS DOUBLED BY ADDING AN ADDITIONAL CONDENSER UNIT OF THE SAME VALUE IN PARALLEL WITH PRESENT CONDENSER.

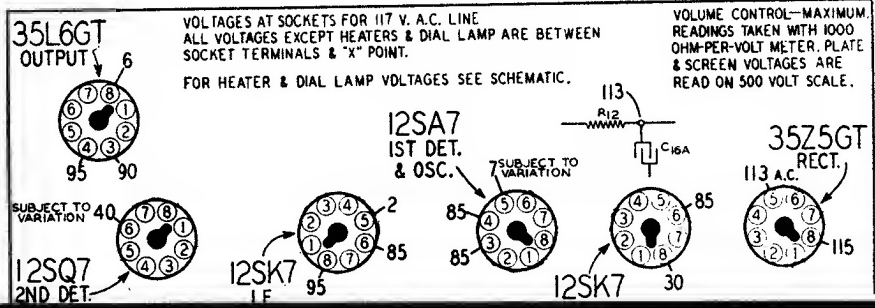

VOLTAGES AT SOCKETS FOR 117 V. A.C. LINE
ALL VOLTAGES EXCEPT HEATERS & DIAL LAMP ARE BETWEEN SOCKET TERMINALS & "X" POINT.
FOR HEATER & DIAL LAMP VOLTAGES SEE SCHEMATIC.
VOLUME CONTROL—MAXIMUM READINGS TAKEN WITH 1000 OHM-PER-VOLT METER. PLATE & SCREEN VOLTAGES ARE READ ON 500 VOLT SCALE.