


M O N T G O M E R Y W A R D

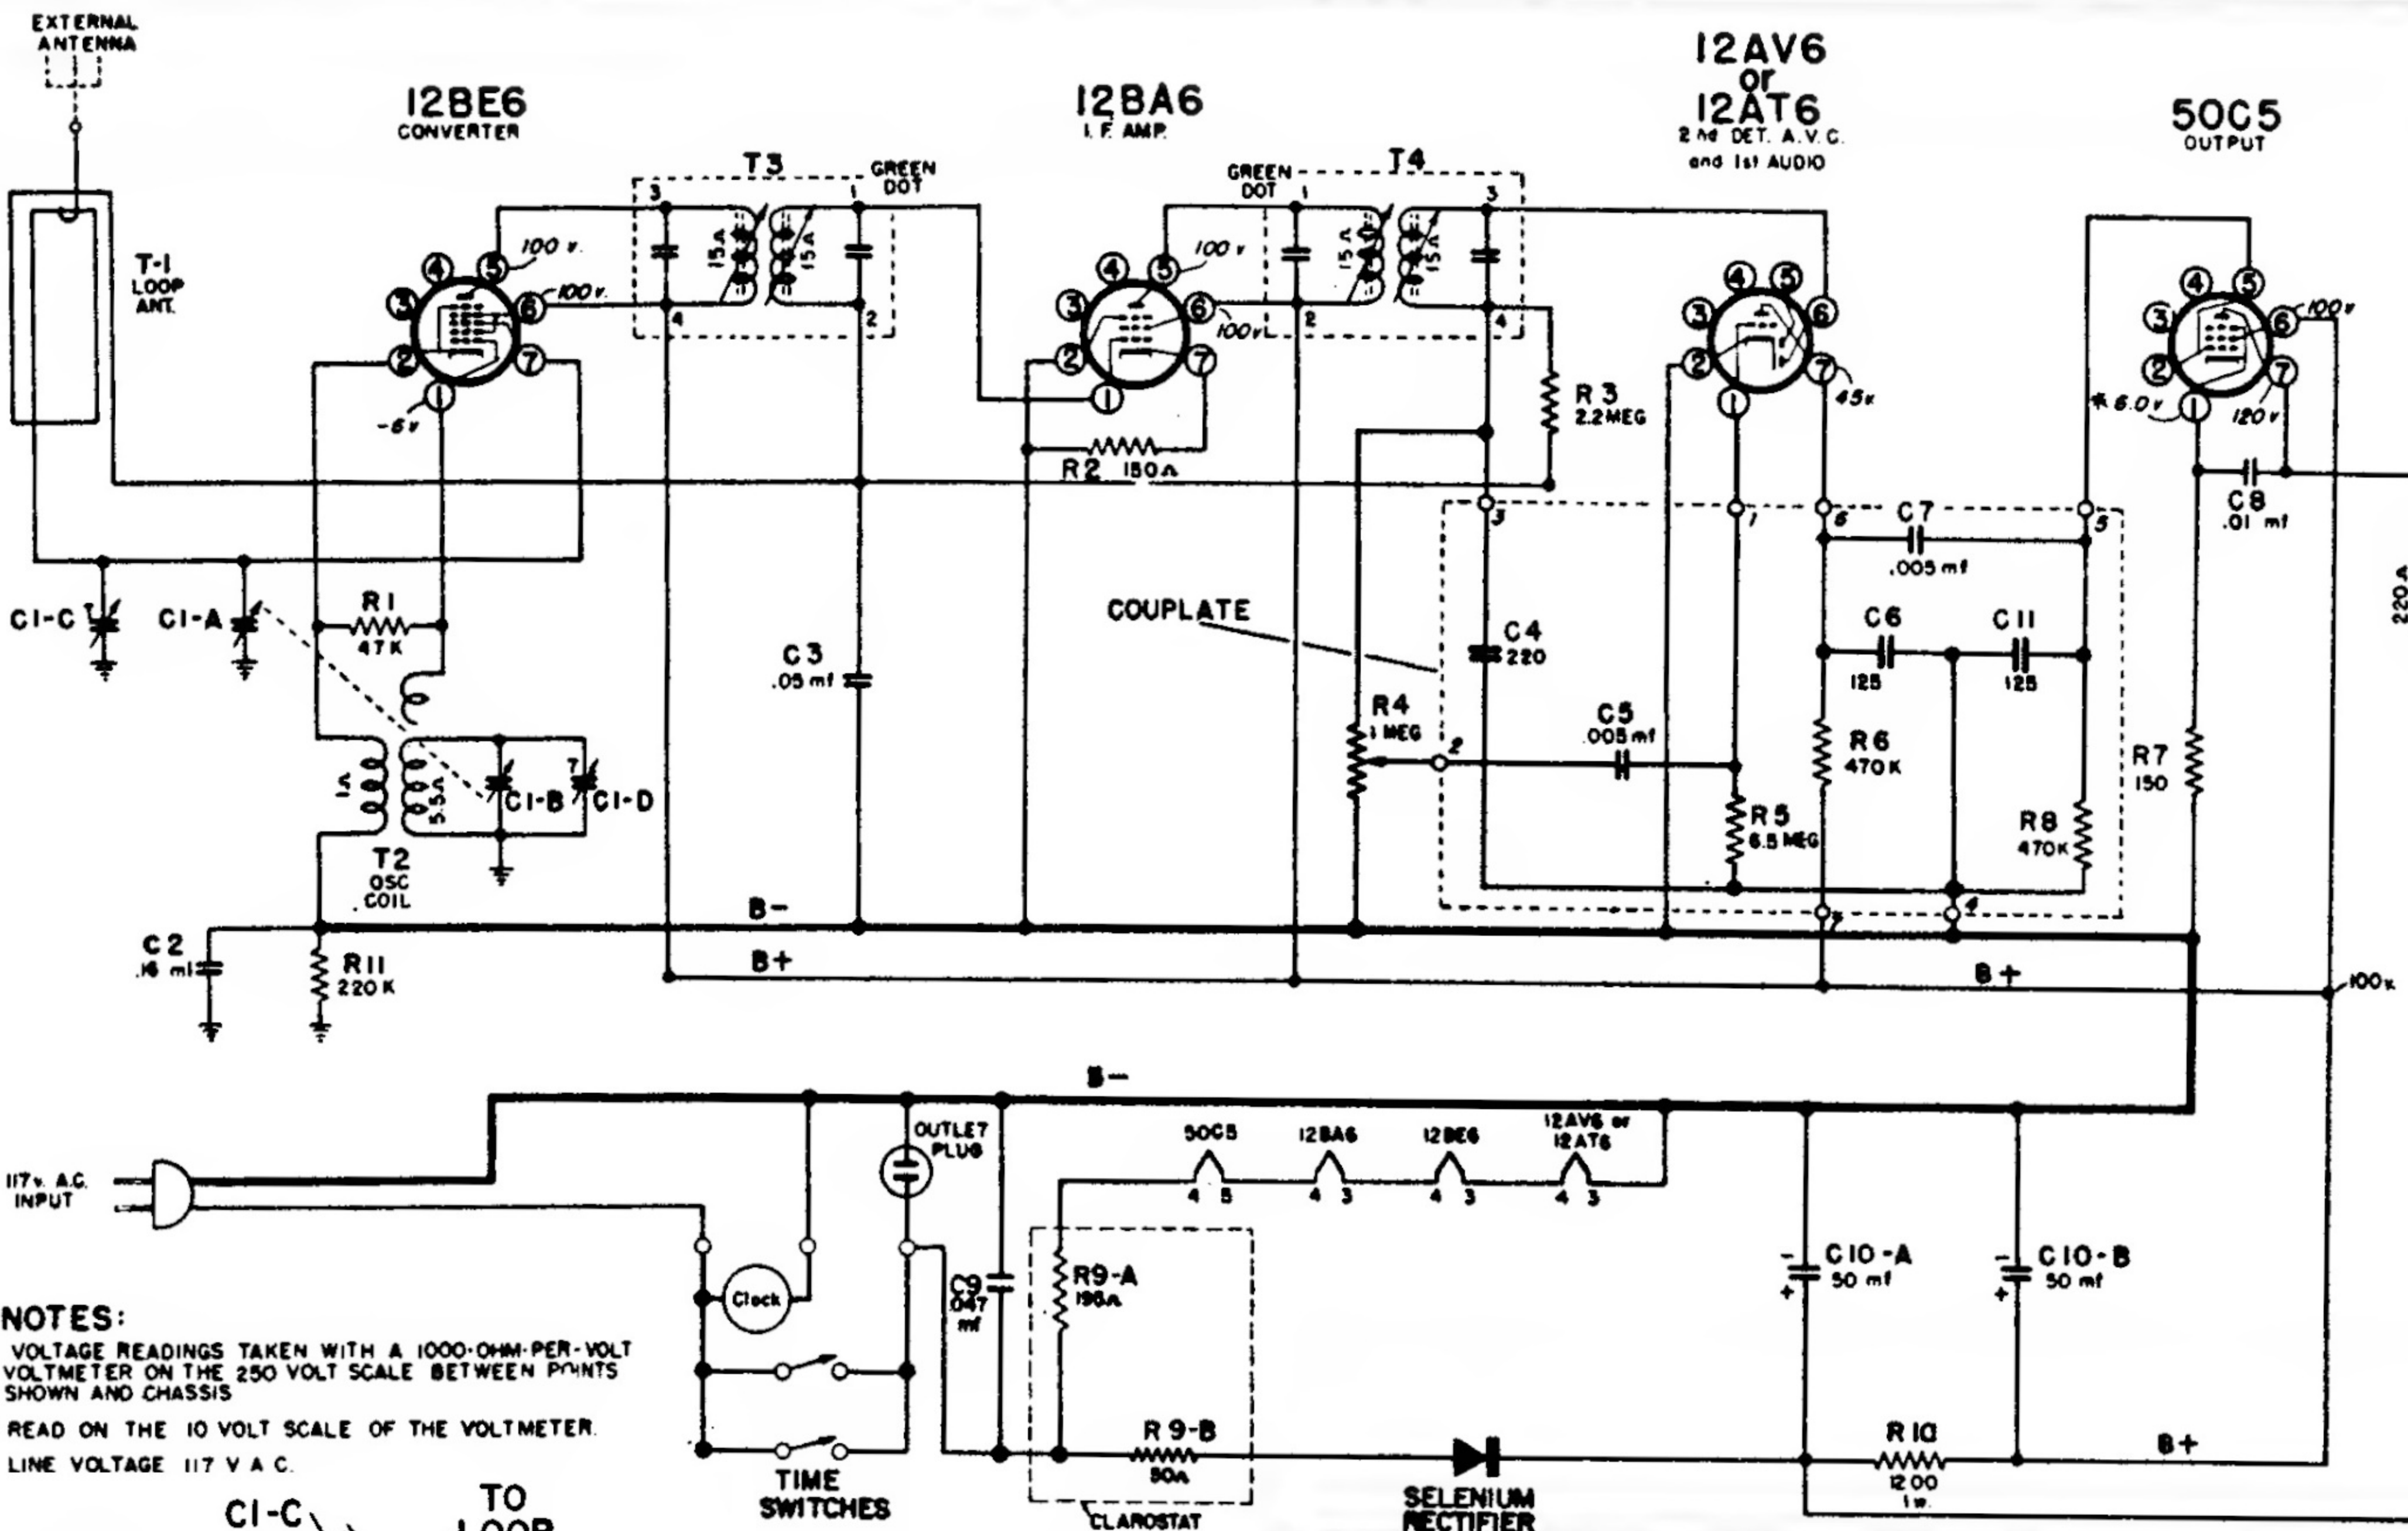

CLOCK RADIO

MODEL NOS.

15BR-1548A

15BR-1549A

25BR-1548B


25BR-1549B

Also
TRUETONE

Western Auto
Models D-2216A,
-B, D-2217A, -B,
are the same.



For alignment
information see
material under
Model 15BR-1525
on the preced-
ing page.

NOTES:
VOLTAGE READINGS TAKEN WITH A 1000-OHM-PER-VOLT
VOLTMETER ON THE 250 VOLT SCALE BETWEEN POINTS
SHOWN AND CHASSIS
* READ ON THE 10 VOLT SCALE OF THE VOLTMETER
LINE VOLTAGE 117 V A.C.

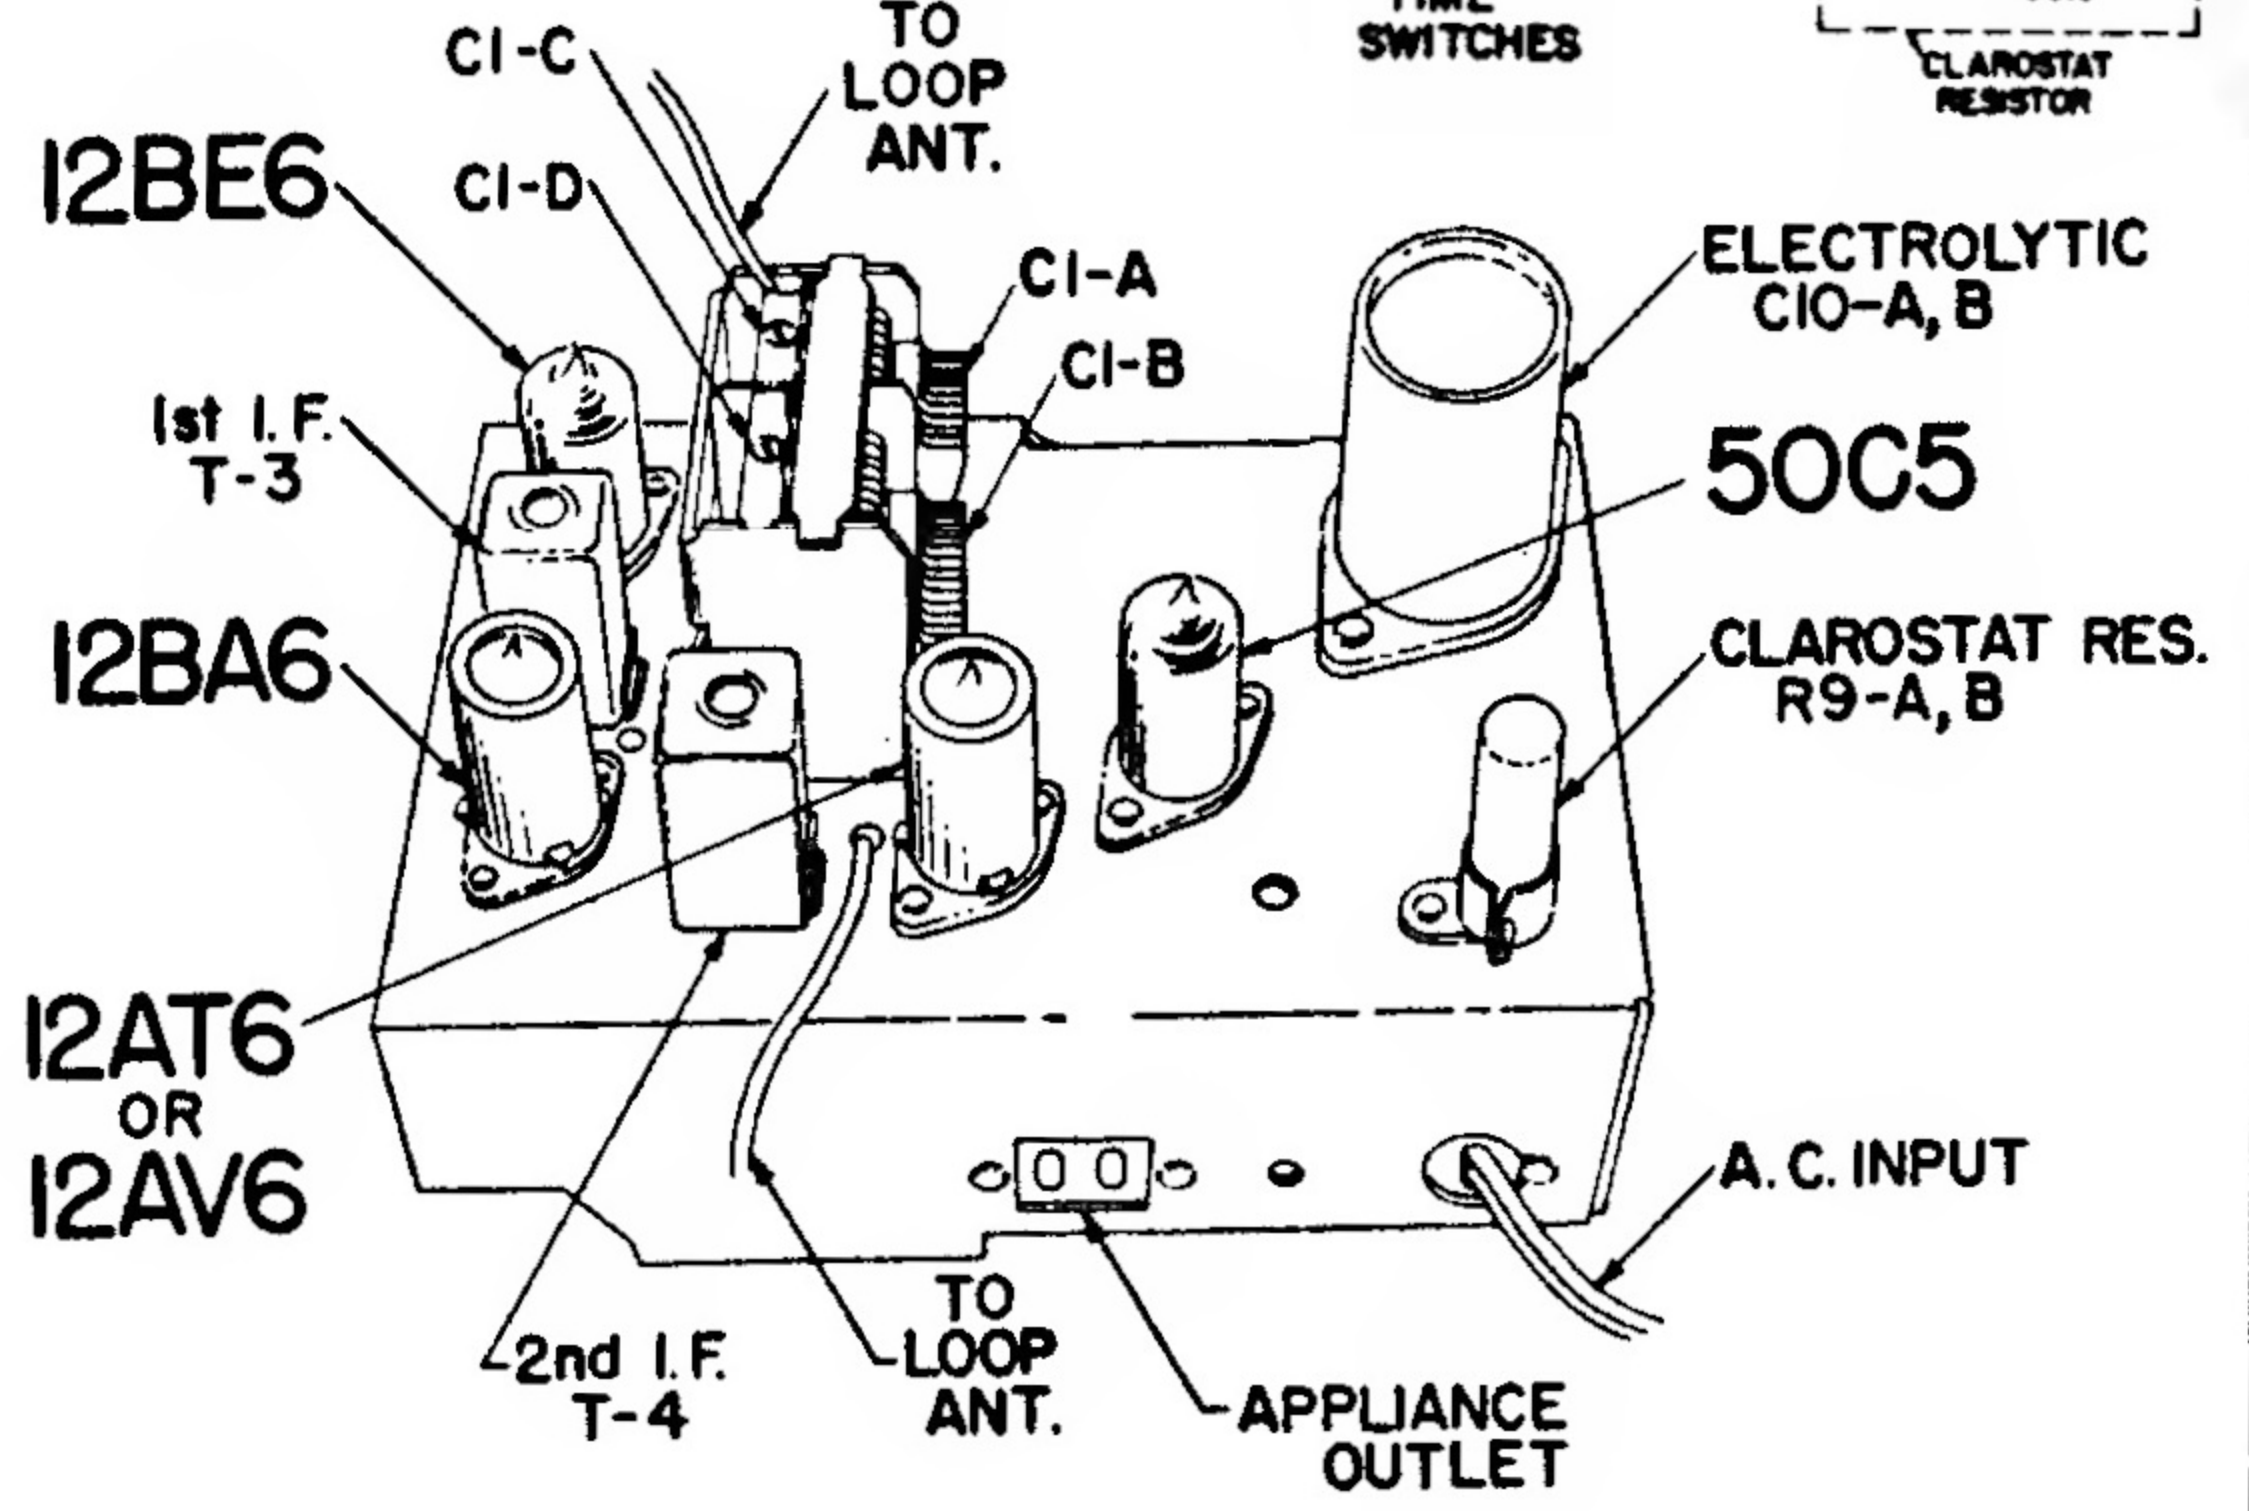


**TABLE MODEL
RADIO**

Model Nos.
15GCB-1583
15GCB-1584

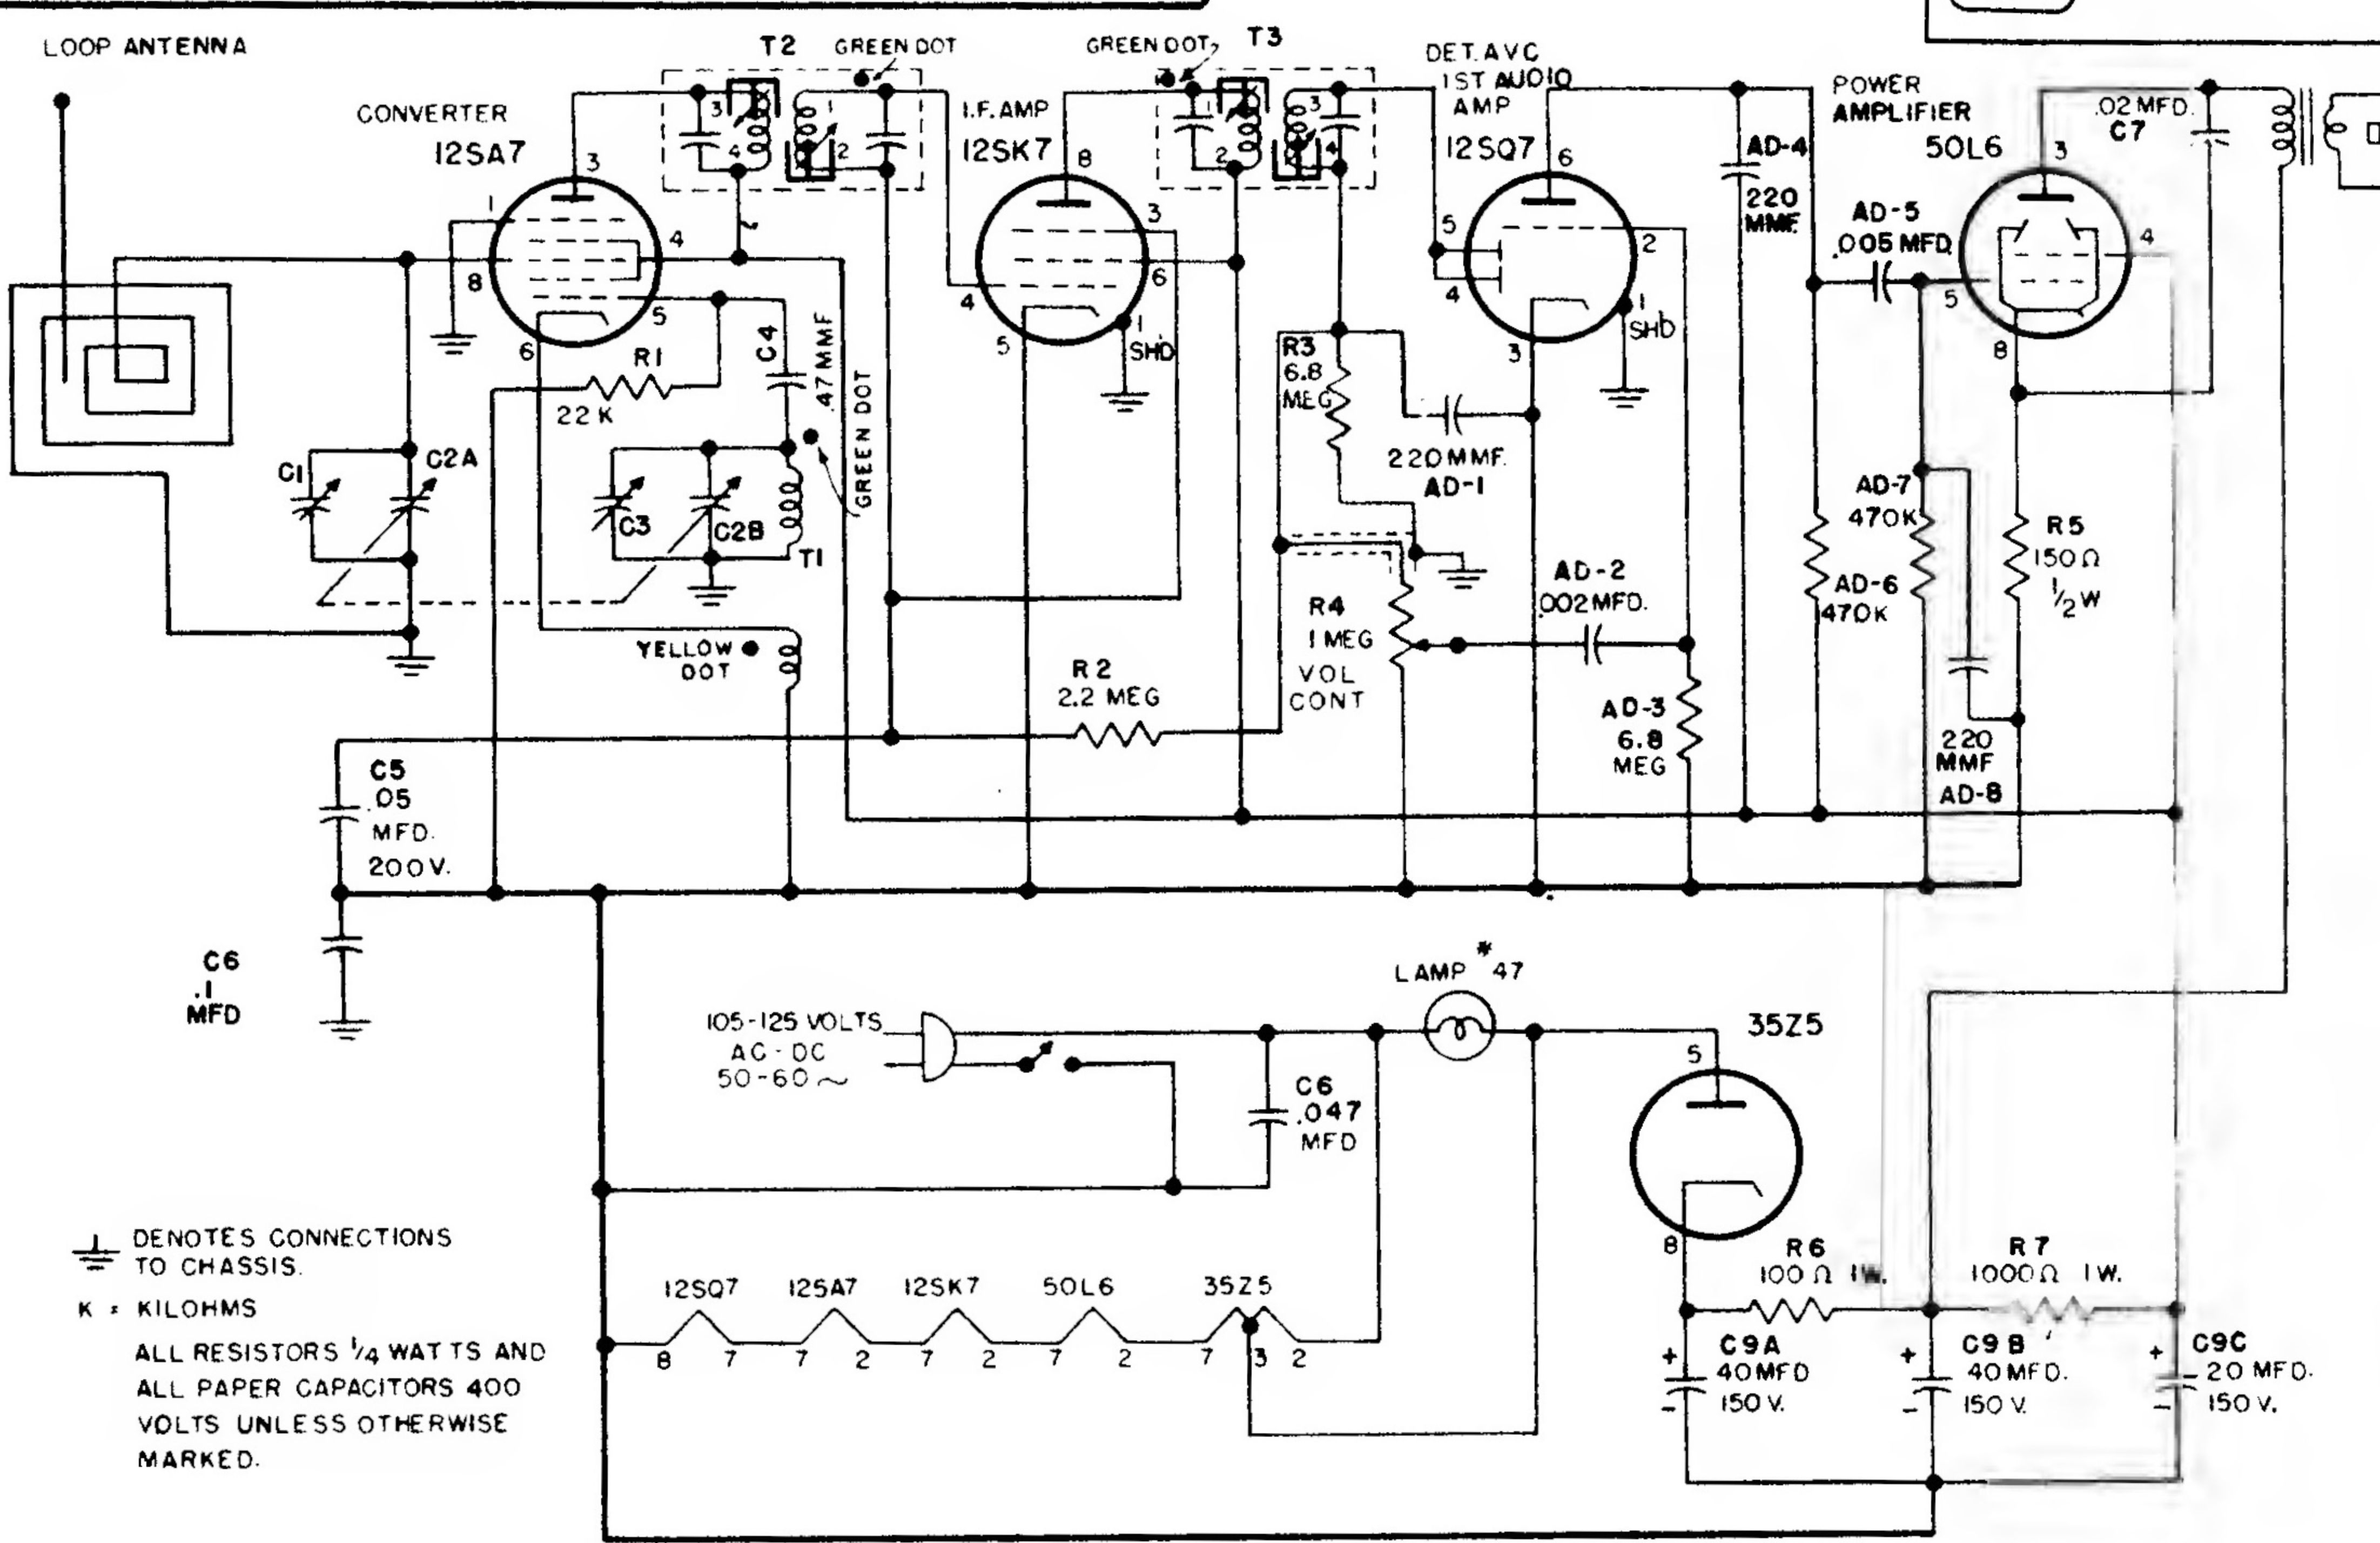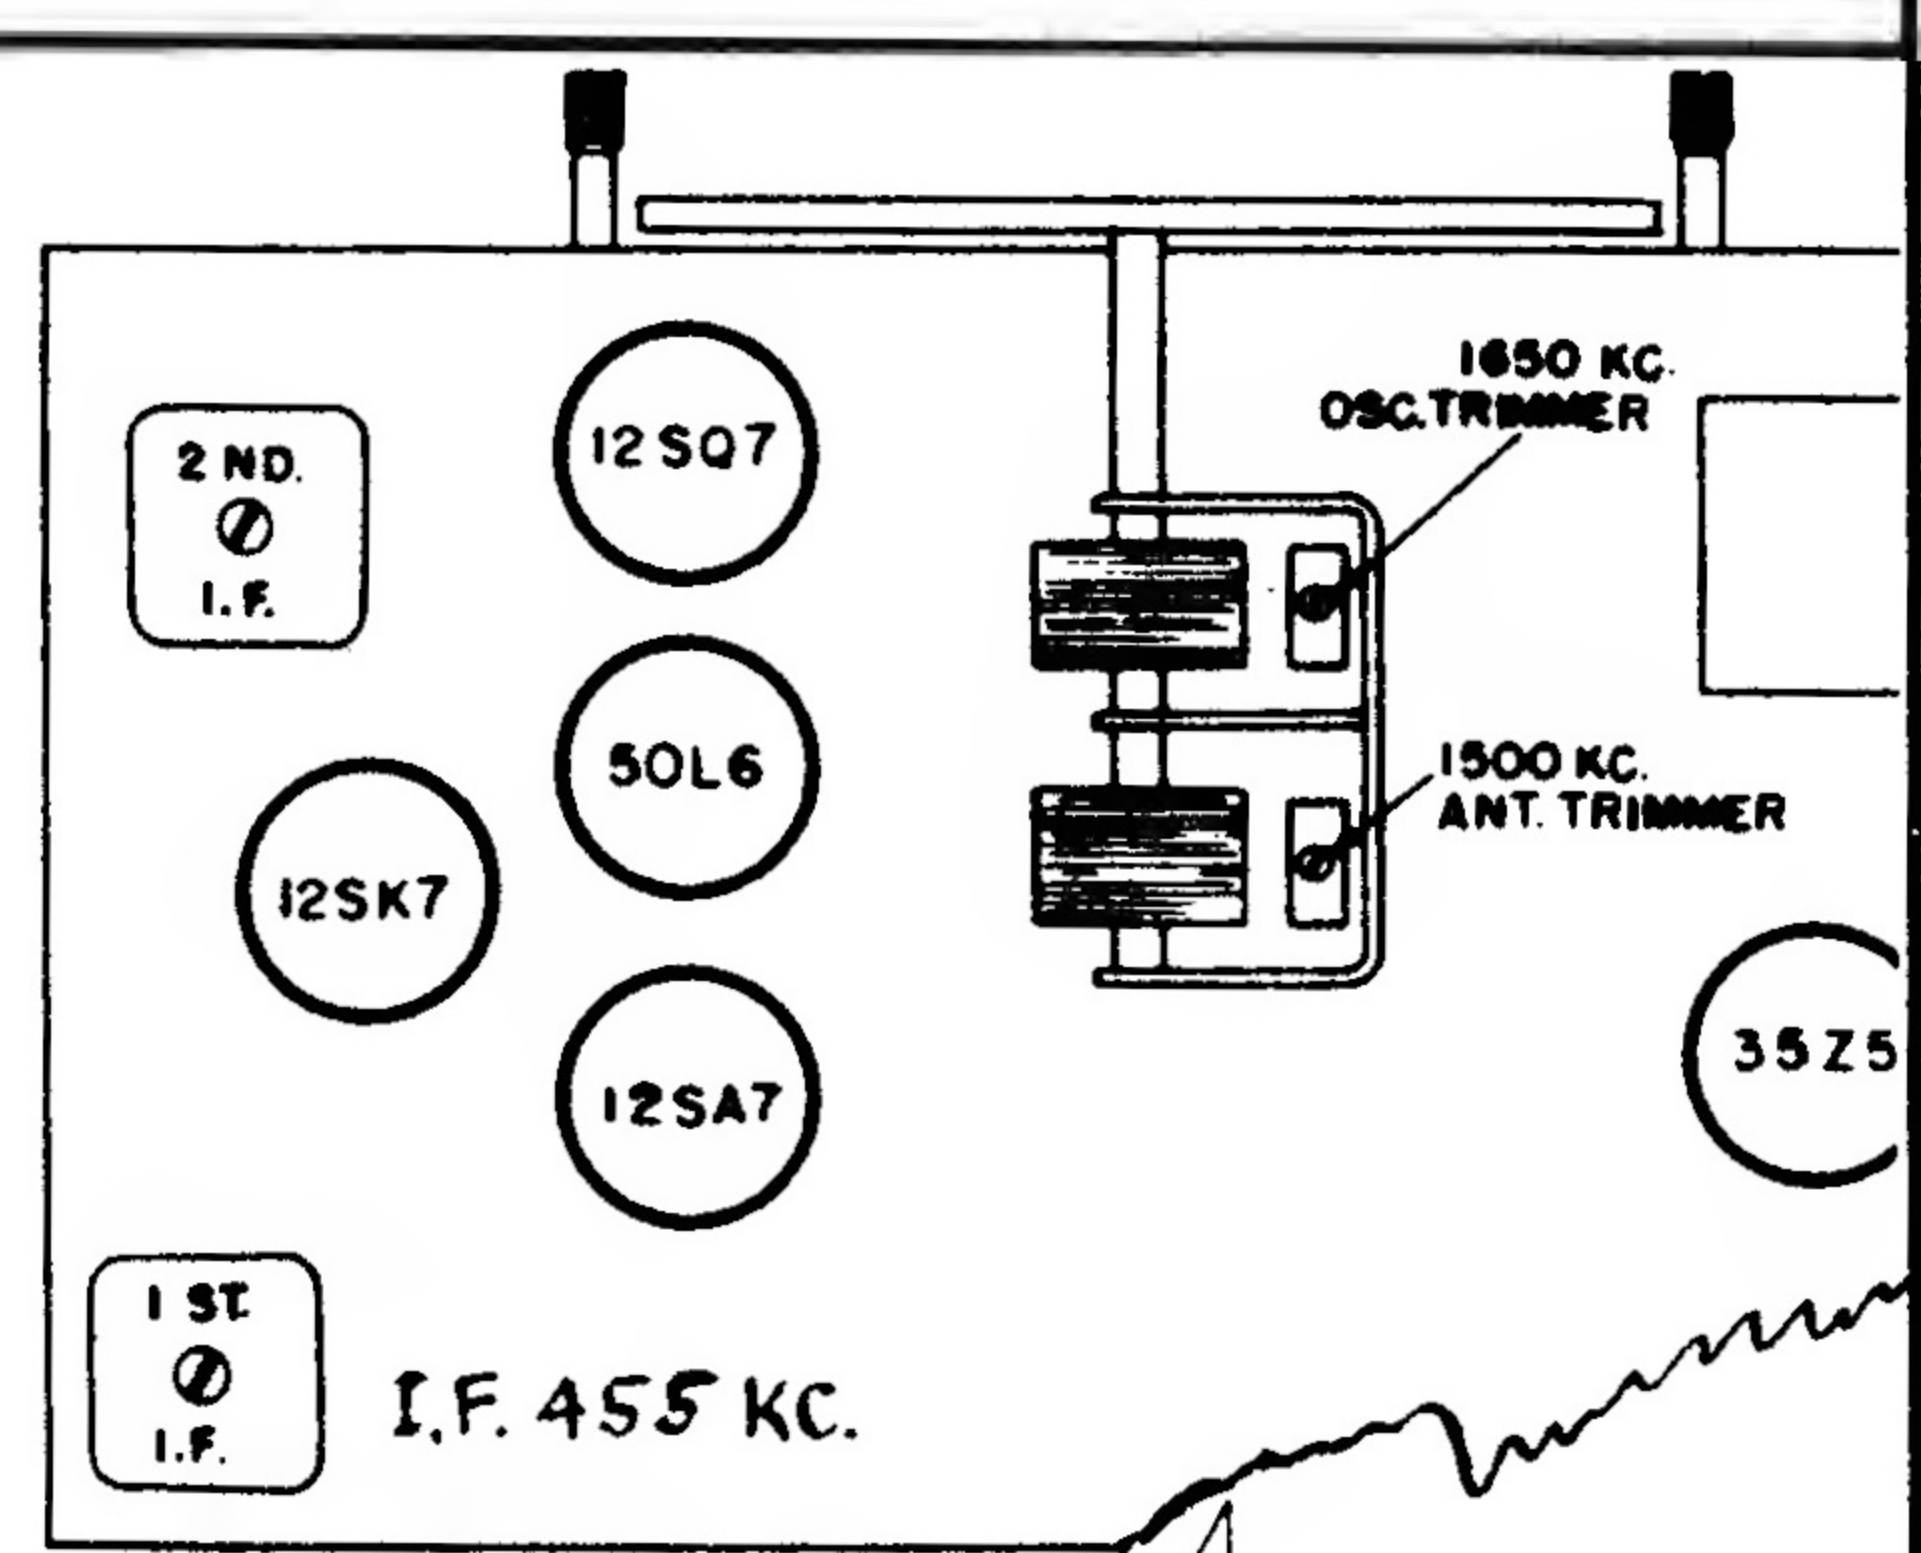

I.F. = 455 KC.
RANGE 540 - 1650 KC.
ITEMS MARKED A - D ARE
INCORPORATED IN AUDIO-
DETECTOR UNIT 10.102

⊥ DENOTES CONNECTIONS
TO CHASSIS.
K = KILOHMS
ALL RESISTORS 1/4 WATTS AND
ALL PAPER CAPACITORS 400
VOLTS UNLESS OTHERWISE
MARKED.

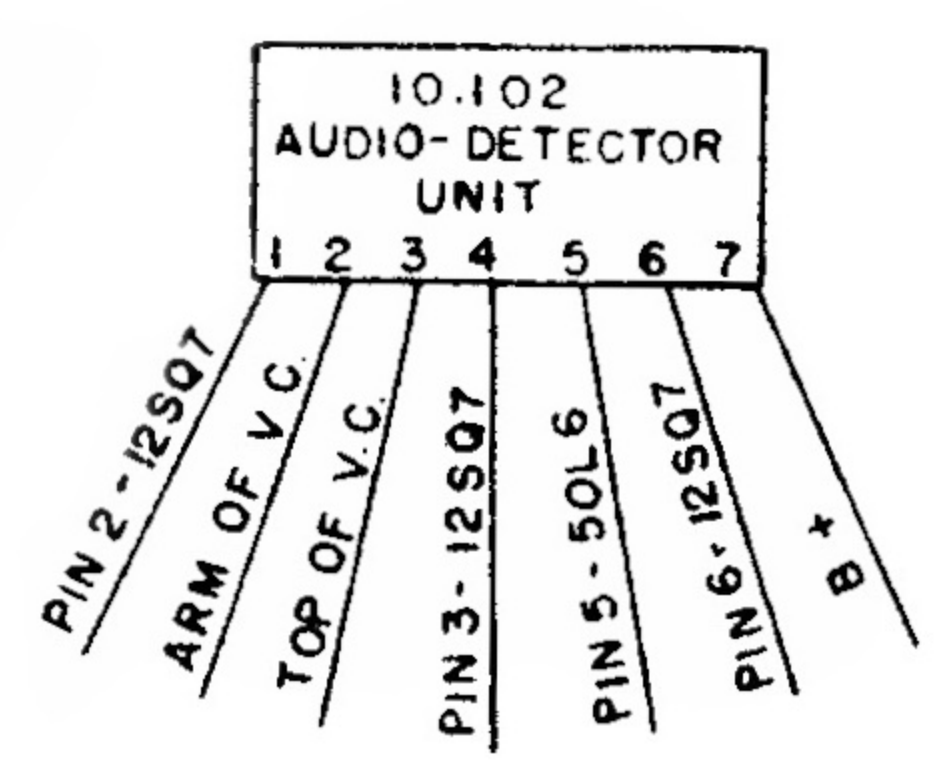

ALIGNMENT PROCEDURE

- Loop must be connected and volume set to maximum.

SIGNAL GENERATOR				TUNER SETTING	ADJUST FOR MAXIMUM OUTPUT
Frequency	Coupling Capacitor	Connection to Radio	Ground Connection		
455 kc.	.1 mf	12BE6, Pin 7	HEAVY BUSS LEAD ACROSS CENTER OF CHASSIS	Capacitor fully open (plates out of mesh)	Top and bottom Cores in output and input I.F. cans
1620 kc.	.1 mf	12BE6, Pin 7		Capacitor fully open (plates out of mesh)	Oscillator trimmer C1-D on gang
535 kc.	.1 mf.	12BE6, Pin 7		Capacitor fully closed	Check for adequate range
1400 kc.	_____	Lay generator lead near back of cabinet		Tune in 1400 kc. signal	Antenna trimmer C-1C on gang