
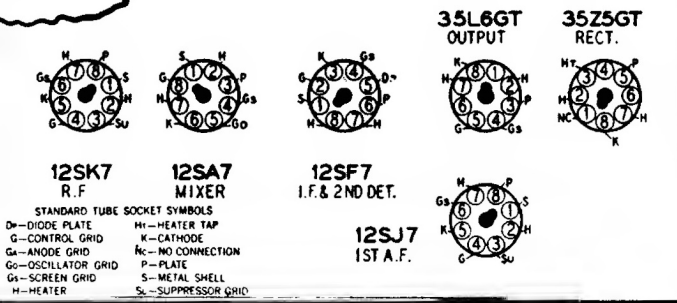


Frequency Setting	Control Grid to Receiver	Ground Connection	Coupling Capacitor	DIAL SETTING
1400 kc	Control Grid 12SF7-I.F. (Prong No. 2)	Point "X" 12SK7-R.F. (Prong No. 3)	.1 mf	1400 kc Index
455 kc	Control Grid 12SA7-1st Det. (Prong No. 8)	Same as above	.1 mf	1600 kc
1400 kc	Control Grid 12SA7-1st Det. (Prong No. 8)	Same as above	.1 mf	1400 kc Index
1400 kc	External Antenna Clip on Loop	Chassis	50 mfm	Line. See Note A

SIGNAL GENERATOR

WARDS
 MODELS 64WG-1511A, 64WG-1512A,
 64WG-1809A

NOTE: CHASSIS GROUND NOT EXTERNAL.

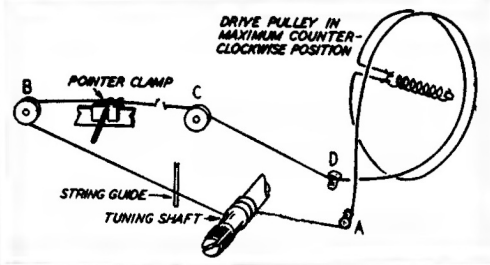

ADJUST TRIMMERS TO MAXIMUM OUTPUT IN ORDER SHOWN IN ORDER SHOWN (See Trimmer Illustration)

1st I.F. (C7) & (C8)
 2nd I.F. (C10) & (C11)
 Oscillator (C25)
 R.F. (C-6) Antenna (C-2)