


HAMILTON RADIO CORPORATION

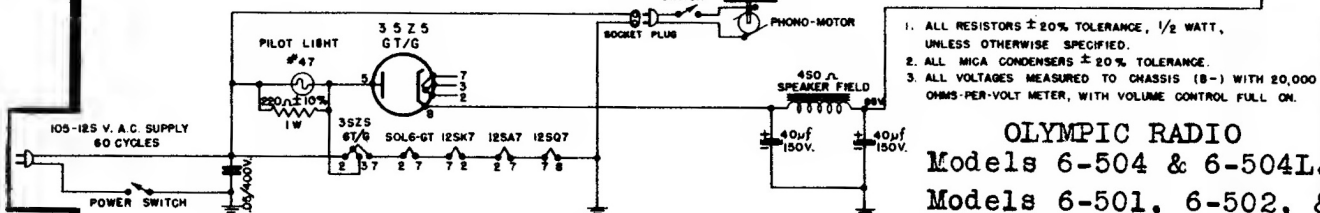

1. ALL RESISTORS $\pm 20\%$ TOLERANCE, $\frac{1}{2}$ WATT, UNLESS OTHERWISE SPECIFIED.
2. ALL MICA CONDENSERS $\pm 20\%$ TOLERANCE.
3. ALL VOLTAGES MEASURED TO CHASSIS (0-) WITH 20,000 OHMS-PER-VOLT METER, WITH VOLUME CONTROL FULL ON.

OLYMPIC RADIO
 Models 6-504 & 6-504L.
 Models 6-501, 6-502, &
 6-503 are similar.

ALIGNMENT PROCEDURE CHART

CONNECT HIGH SIDE OF SIGNAL GENERATOR TO -	SET SIGNAL GENERATOR TO -	TURN RECEIVER DIAL TO -	ADJUST THE FOLLOWING FOR MAXIMUM (KEEP SIGNAL FROM SIGNAL GENERAT. AS LOW AS POSSIBLE.)
ANTENNA SECTION TUNING CONDENSER IN SERIES WITH .1 MFD. COND.	455 KC.	FULL CLOCKWISE POSITION. (CONDENSER PLATES FULLY OPEN.)	C6, C5, C4, C3 AND REPEAT IN SAME ORDER (1st. AND 2nd. I.F. TRANSFORMERS.)
ANTENNA TERMINAL OF ANTENNA LOOP IN SERIES WITH 50 MMFD. COND.	1700 KC.	1700 KC. (170 ON DIAL)	C2 (OSCILLATOR)
	1400 KC.	MAXIMUM SIGNAL (APPROX. 140 ON DIAL)	C1 (ANTENNA)
REPEAT STEPS 2 AND 3			

