



Olympic Radio & Television Hamilton Radio Corp.

Models 6-608-110 & 6-608-220

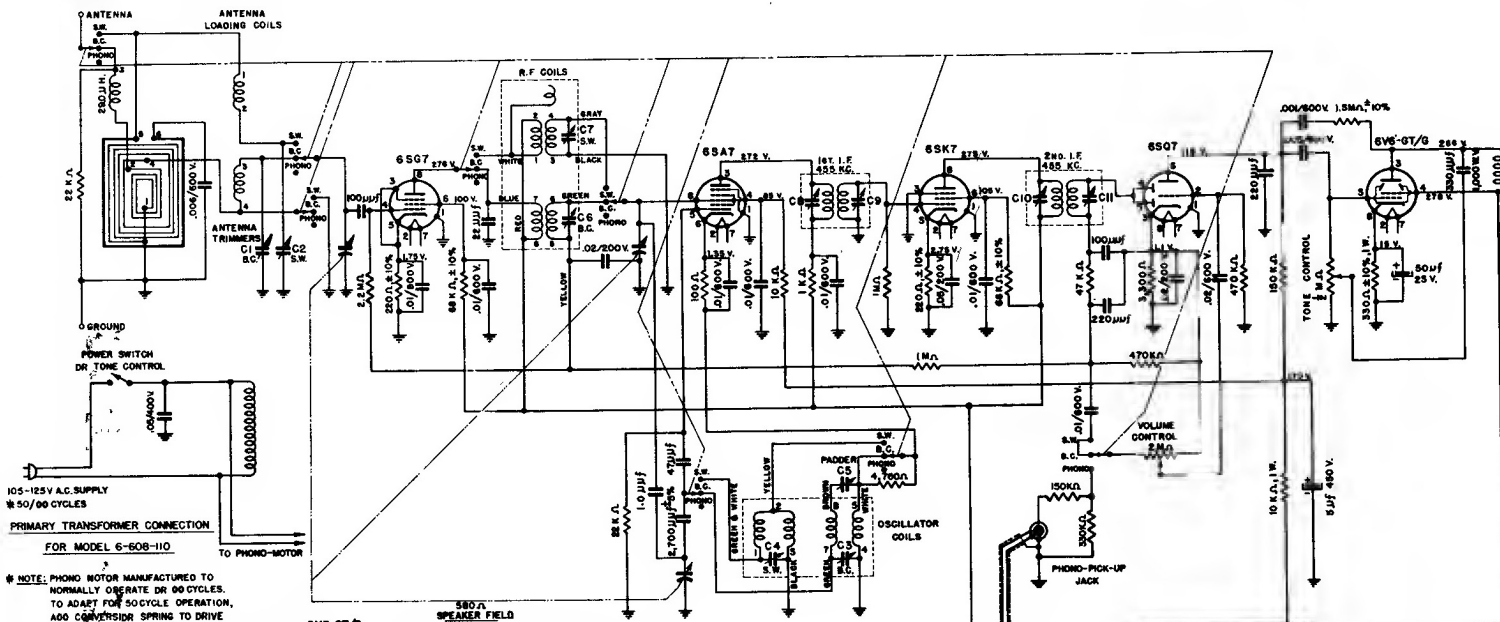



105-125V A.C. SUPPLY
#50/60 CYCLES
PRIMARY TRANSFORMER CONNECTION
FOR MODEL 6-608-110
TO PHONO-MOTOR

NOTE: PHONO MOTOR MANUFACTURED TO NORMALLY OPERATE ON 60 CYCLES. TO ADAPT FOR 50 CYCLE OPERATION, ADD CONVERTER SPRING TO DRIVE PULLEY.

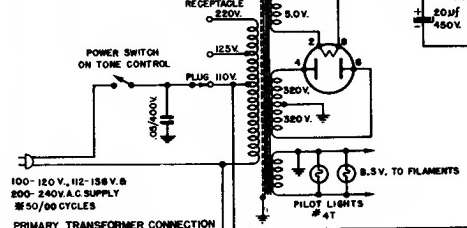

PRIMARY TRANSFORMER CONNECTION SHOWN FOR MODEL 6-608-220

- NOTES:
1. ALL RESISTORS $\pm 20\%$ TOLERANCE, $\frac{1}{2}$ WATT, UNLESS OTHERWISE SPECIFIED.
 2. ALL MICA CONDENSERS $\pm 20\%$ TOLERANCE, UNLESS OTHERWISE SPECIFIED.
 3. BAND SELECTOR SWITCH SHOWN IN BROADCAST POSITION.
 4. ALL VOLTAGES MEASURED BETWEEN POINTS INDICATED AND GROUND, WITH VOLUME CONTROL FULL ON AND WITH BAND SWITCH SET IN "B.C." POSITION, USING 20,000 OHMS-PER-VOLT METER. ALL VOLTAGE READINGS $\pm 10\%$, MEASURED WITH AN INPUT VOLTAGE OF 117 V., 60 CYCLES, A.C.
 5. TERMINAL NUMBERS ON ANTENNA LOOP CORRESPOND WITH TERMINAL LUGS ON LOOP ON BACK OF CHASSIS.

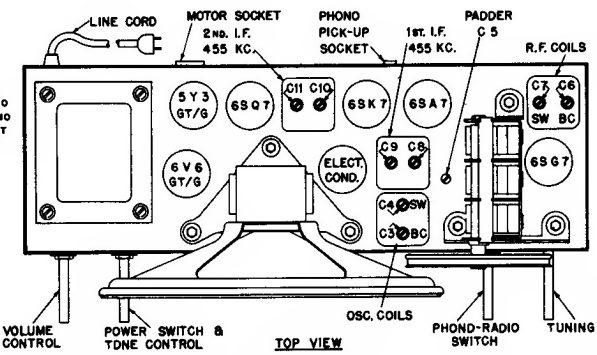

ALIGNMENT PROCEDURE CHART

STEP	SET BAND SWITCH ON	CONNECT HIGH SIDE OF SIGNAL GENERATOR TO-	SET SIGNAL GENERATOR TO-	TURN POINTER TO-	ADJUST THE FOLLOWING FOR MAXIMUM OUTPUT. (KEEP SIGNAL FROM SIGNAL GENERATOR AS LOW AS POSSIBLE).
1	B.C.	R.F. SECTION OF VARIABLE CONDENSER OR PIN 4 OF THE 6SK7 TUBE IN SERIES WITH A .1MFD., 400 VOLT CONDENSER.	465 KC.	EXTREME RIGHT HAND POSITION, (CONDENSER PLATES FULLY OPEN).	C11 AND C10 (2nd. I.F. TRANSFORMER)
2	B.C.	R.F. SECTION OF VARIABLE CONDENSER ON PIN 8 OF THE 6SA7-TUBE IN SERIES WITH A .1MFD., 400 VOLT CONDENSER.	465 KC.	EXTREME RIGHT HAND POSITION, (CONDENSER PLATES FULLY OPEN).	C9 AND C8 (1st. I.F. TRANSFORMER)
3	B.C.	REPEAT STEPS 1 AND 2			
4	B.C.	USE RADIATED SIGNAL (CONNECT BOTH SIDES OF SIGNAL GENERATOR TO RADIATION LOOP).	1700 KC.	1700 KC. CALIBRATION POINT ON DIFFUSER PLATE.	C5 (OSCILLATOR TRIMMER)
5	B.C.		1400 KC.	RESONANCE, APPROXIMATELY 1400 KC. CALIBRATION POINT ON DIFFUSER PLATE.	C8 AND C1 (R.F. AND ANTENNA TRIMMERS)
6	B.C.		800 KC.	RESONANCE, APPROXIMATELY 800 KC. CALIBRATION POINT ON DIFFUSER PLATE.	C5 (Padder) ROOK VARIABLE FOR MAXIMUM SIGNAL
7	B.C.	REPEAT STEPS 4, 5 AND 6			
8	S.W.		18 MC.	18 MC. CALIBRATION POINT ON DIFFUSER PLATE.	C4 (OSCILLATOR TRIMMER) SECOND PEAK FROM TIGHT POSITION. C7 (R.F. TRIMMER)
9	S.W.		B MC.	RESONANCE	C2 (ANTENNA TRIMMER) CHECK THAT POINTER (AT RESONANCE) COINCIDES WITH B MC. CALIBRATION POINT IF NOT REPEAT STEP 8.
10	S.W.	REPEAT STEPS 8 AND 9			

NOTE: In order to adjust the short wave oscillator trimmer accurately to the fundamental frequency and not to the image signal, turn the trimmer first to the maximum capacity position (fully tight). From this position loosen the trimmer through one peak indication on the output meter until a second peak is obtained. Adjust for maximum output on this second peak.