



**NOTE**  
 1. VOLTAGES TAKEN TO B- (⊖) FROM POINTS INDICATED WITH VI.VM.  
 2. ALL RESISTORS ± 20% TOLERANCE 1/2 WATT, CARBON UNLESS OTHERWISE SPECIFIED.

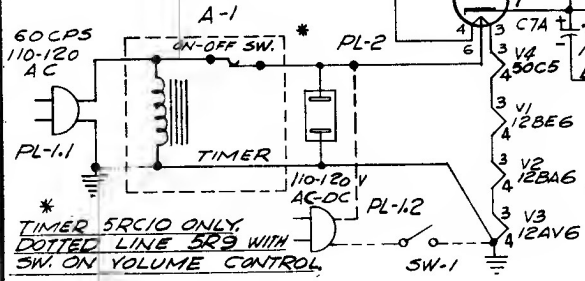

**ALIGNMENT PROCEDURE**

Each adjustment should be made using a minimum input signal. Connect test oscillator through a .01 mfd capacitor to the point indicated below. Connect ground lead of oscillator to B minus bus.

Step	Connect Test Oscillator to	Test Osc Frequency	Radio Dial Setting	Adjust
1	Pin 7, V-1 (12BE6)	455 kc	1620 kc	S-1, S-2, S-3, & S-4 for Maximum
2	Loose-couple to antenna	1620 kc	1620 kc	C1-D for Maximum
3	Loose-couple to antenna	1500 kc	Tune to oscillator	C1-B for Maximum

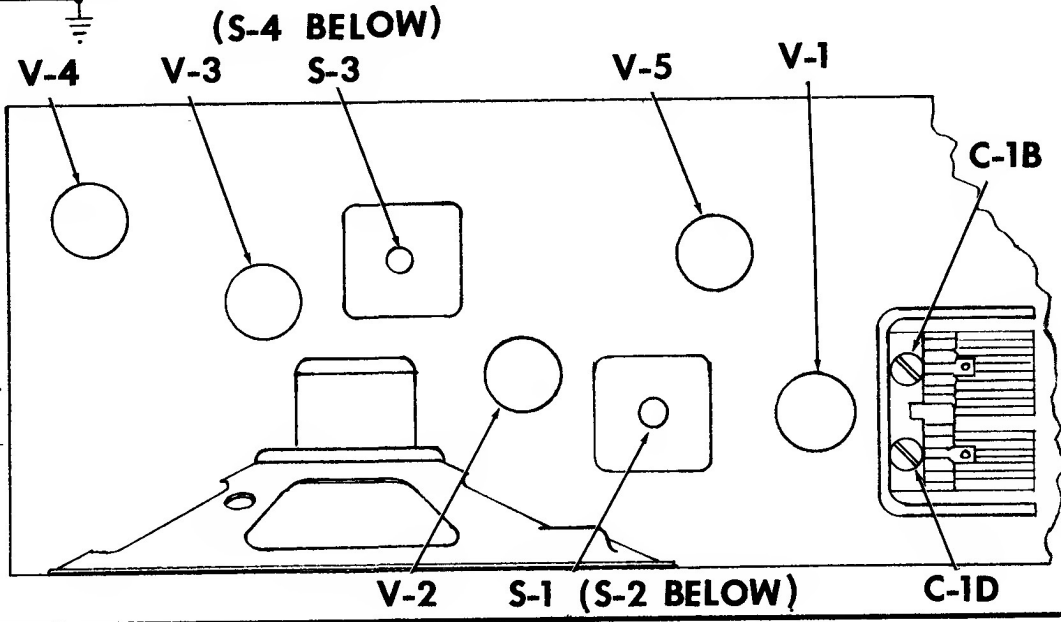

**Packard Bell**

TABLE MODEL RADIO 5R9  
CLOCK RADIO MODEL 5RC10