


SCHMATIC DIAGRAM MODEL 40-81 CODES 121 & 122.

# PHILCO

## Models 40-81, Codes 121, 122

SCHM. No.	DESCRIPTION	PART No.
1	Loop Assembly (Part of Cabinet)	10413A
2	Mica Condenser (18 mmfd.)	61-0036
3	Mica Condenser (110 mmfd.)	30-1031
4	Resistor (220,000 ohms, 1/2 watt)	33-422339
5	Oscillator Transformer	32-3277
6	Resistor (33,000 ohms, 1/2 watt)	33-333339
7	Tubular Condenser (.01 mfd.)	30-4572
8	Tuning Condenser Assembly	31-2432
9	1st I. F. Transformer Assembly	32-3285
10	Tubular Condenser (.05 mfd.)	30-4519
11	Resistor (10.0 meg., 1/2 watt)	33-510339
12	Resistor (4.7 meg., 1/2 watt)	33-547339
13	Volume Control end On-Off Switch	33-5331
14	Tubular Condenser (.004 mfd.)	30-4575
15	Resistor (4.7 meg., 1/2 watt)	33-547339
16	Mica Condenser (250 mmfd.)	61-0033
17	2nd I. F. Transformer Assembly	32-3285
18	Resistor (1.5 meg., 1/2 watt)	33-518339
19	Tubular Condenser (.004 mfd.)	30-4575
20	Resistor (4.7 meg., 1/2 watt)	33-547339
21	Resistor (650 ohms, 1/2 watt)	33-155326
22	Mica Condenser (500 mmfd.)	30-1114
23	Output Transformer	32-8062
24	Cone and Voice Coil Assembly (Speaker Part No. 36-1461-3)	36-4121
25	Electrolytic Condenser (10 mfd., 150 V.)	30-2395
26	Resistor (6600 ohms, 1/2 watt)	33-256339

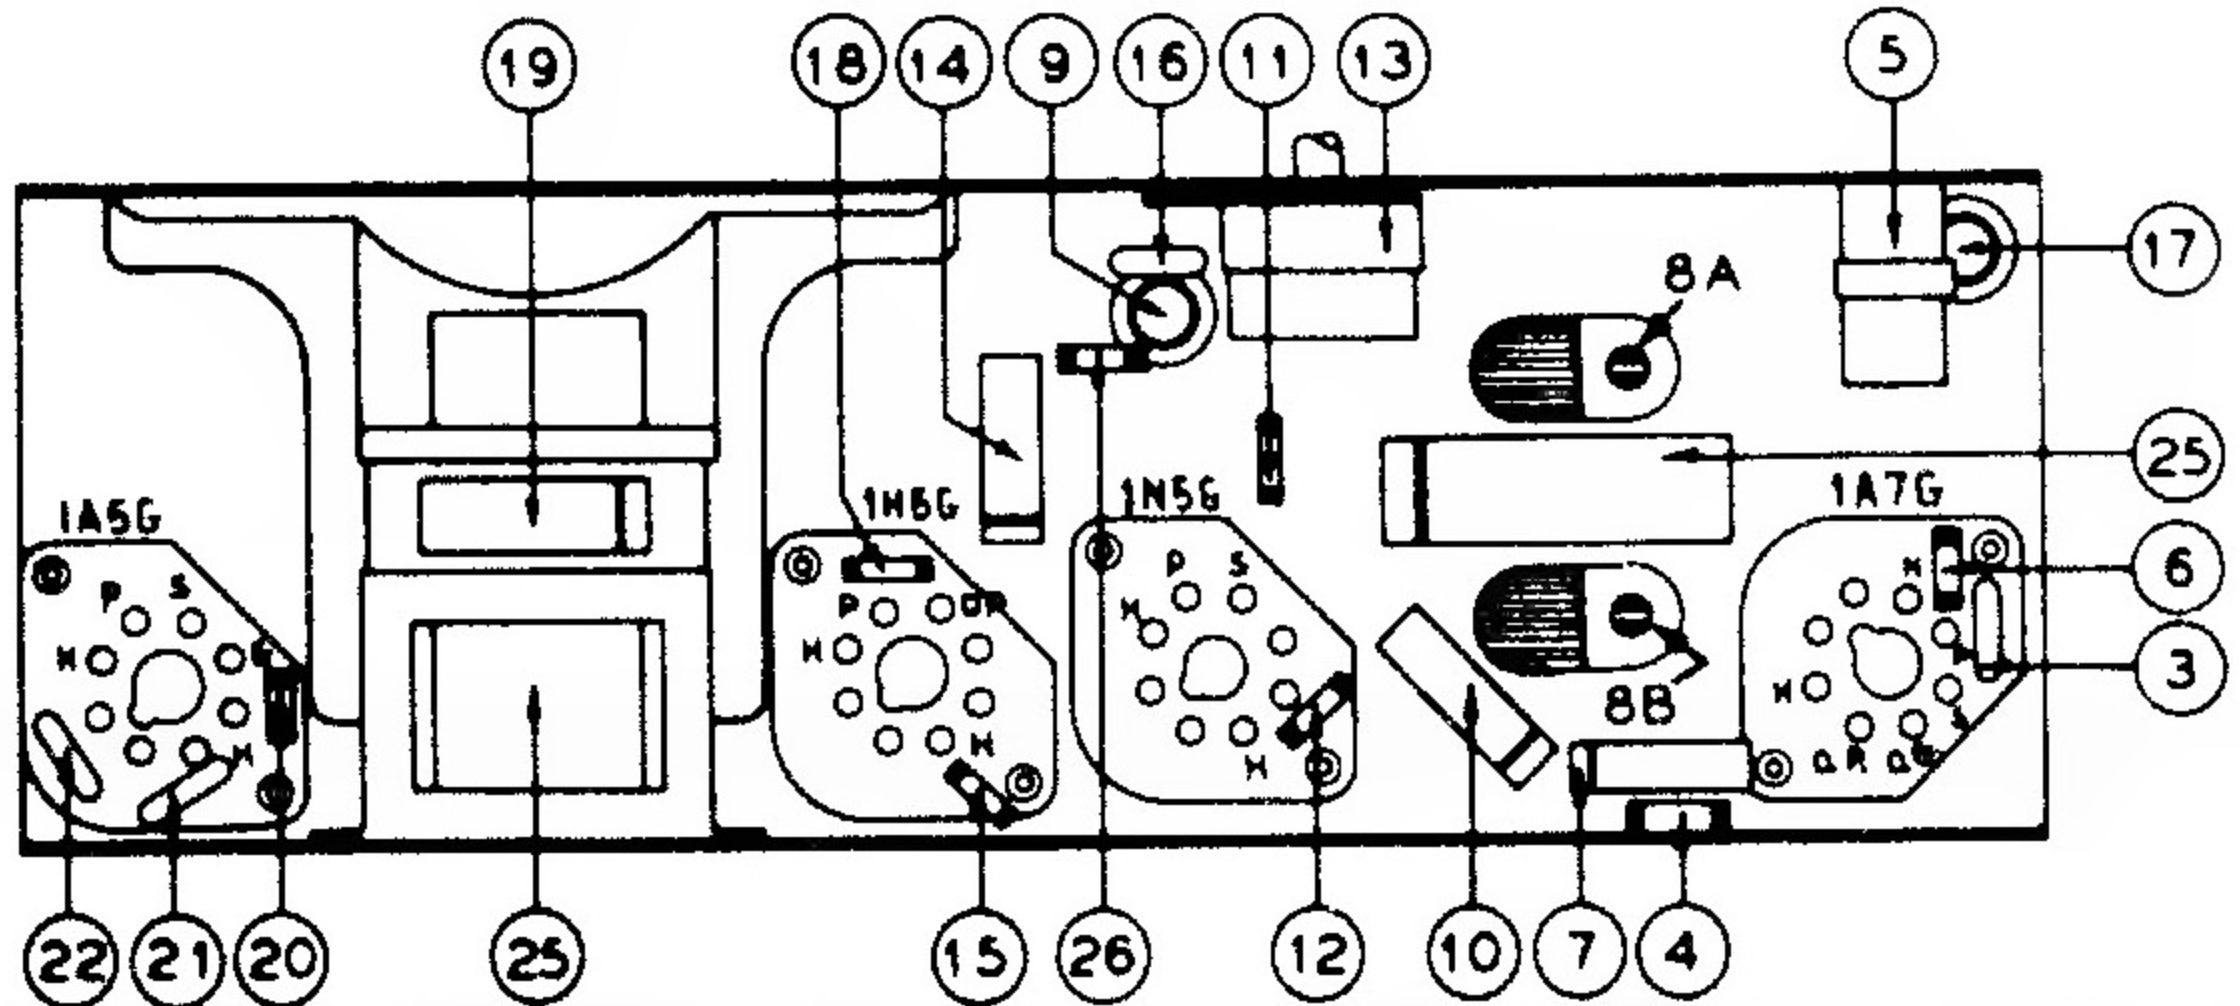

PART LOCATIONS, UNDERSIDE OF CHASSIS, MODEL 40-81