

BOTTOM VIEW OF TUBE SOCKETS.

VOLTAGES SHOULD HOLD WITHIN  $\pm 20\%$  WITH 117 V. AC SUPPLY.  
 \* MEASURED WITH CHANALYST OR VOLTOMMYST.





\* -13 V. APPROX MAX. AVC. VOLTAGE

3V. BIAS FOR GAIN DATA.


35Z5GT RECT.

Model 6X2

**RCA Victor**

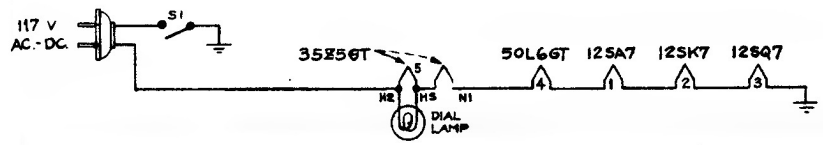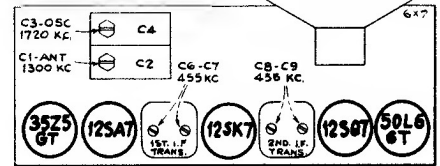

In some production, the speaker is changed from a "PM" to an "EM." The connections for the EM speaker are shown at right.

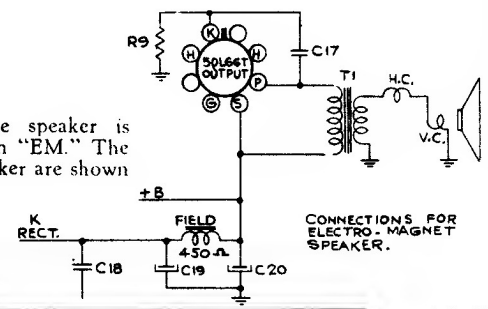

CONNECTIONS FOR ELECTRO-MAGNET SPEAKER.