


Model 40-88, Code 121

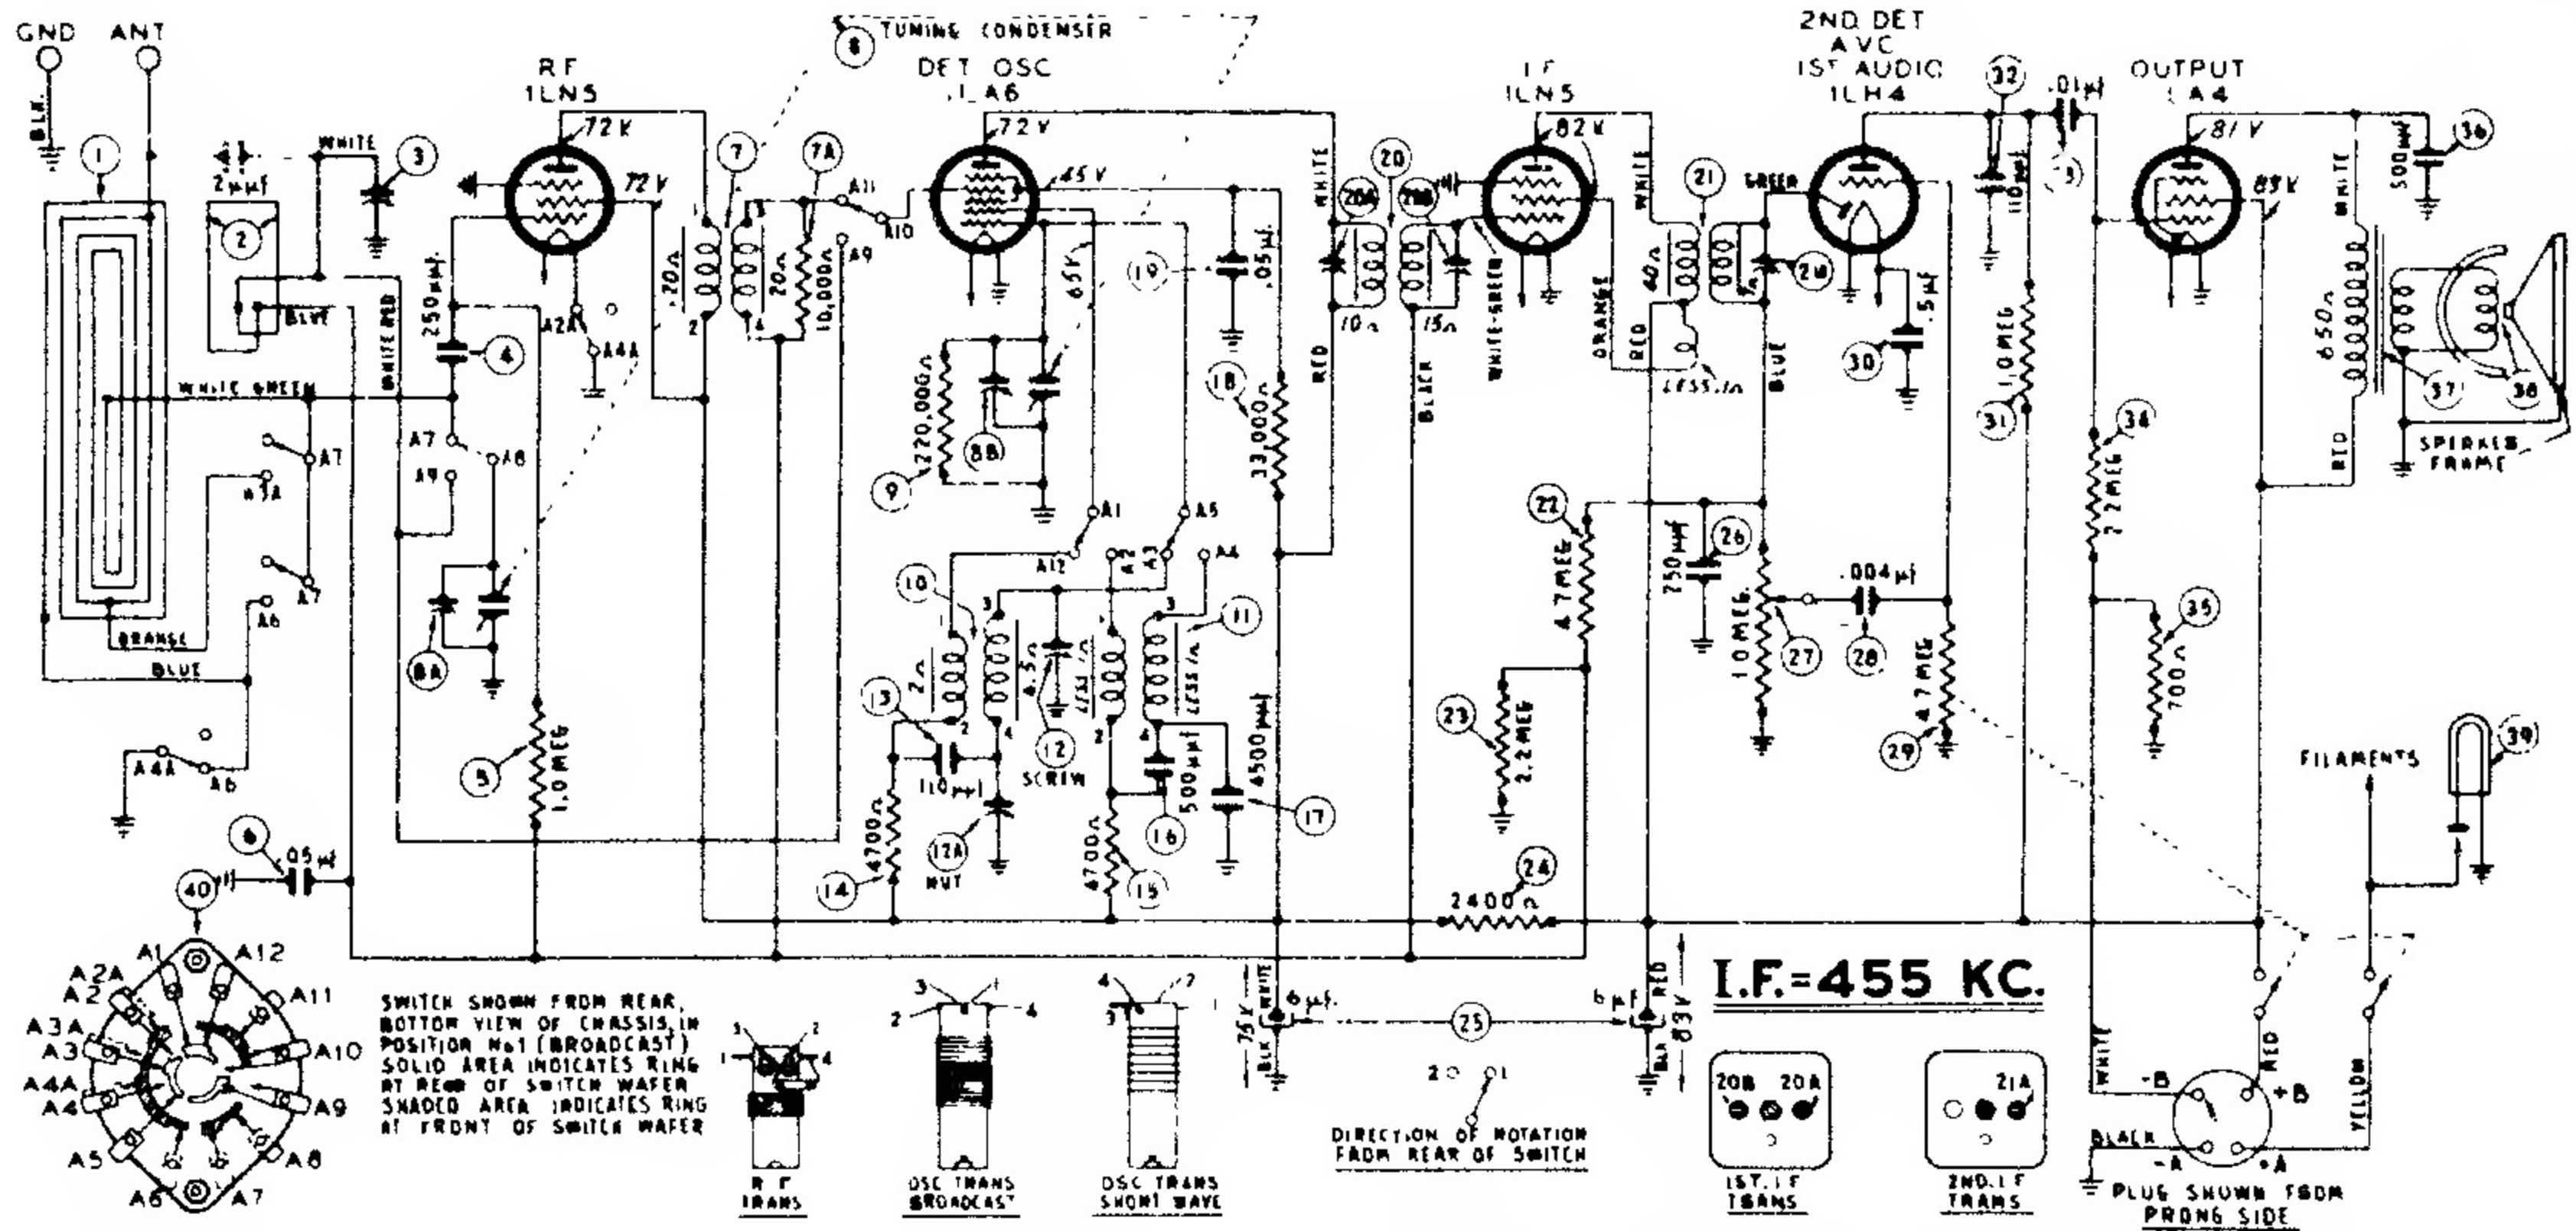

SCHE. No.	DESCRIPTION	PART No.	DESCRIPTION	PART No.	
1	Loop Assembly (Broadcast)	38-9917	19	Tubular Condenser (.05 mfd.)	30-4519
2	Loop Assembly (Short Wave)	38-9865	20	1st I. F. Transformer Assembly	32-3222
3	Compensator	31-6286	21	2nd I. F. Transformer Assembly	32-3223
4	Mica Condenser (250 mmfd.)	61-0033	22	Resistor (4.7 meg., 1/2 watt)	33-547339
5	Resistor (1.0 meg., 1/2 watt)	33-510339	23	Resistor (2.2 meg., 1/2 watt)	33-522339
6	Tubular Condenser (.05 mfd.)	30-4519	24	Resistor (2400 ohms, 1/2 watt)	33-224339
7	R. F. Transformer Assembly	32-3219	25	Electrolytic Condenser (6.5 mf., 160 V.)	30-2386
7A	Resistor (10,000 ohms, 1/2 watt)	33-310339	26	Mica Condenser (250 mmfd.)	61-0033
8	Tuning Condenser Assembly	31-2378	27	Volume Control and On-Off Switch	33-8310
9	Resistor (220,000 ohms, 1/2 watt)	33-422339	28	Tubular Condenser (.004 mfd.)	30-4578
10	Oscillator Transformer (Broadcast)	32-3249	29	Resistor (4.7 meg., 1/2 watt)	33-547339
11	Oscillator Transformer (Short Wave)	32-3220	30	Tubular Condenser (.5 mfd.)	30-4551
12	Compensator	31-6100	31	Resistor (1.0 meg., 1/2 watt)	33-510339
13	Mica Condenser (110 mmfd.)	30-1130	32	Mica Condenser (110 mmfd.)	30-1130
14	Resistor (4700 ohms, 1/2 watt)	33-247339	33	Tubular Condenser (.01 mfd.)	30-4872
15	Resistor (4700 ohms, 1/2 watt)	33-247339	34	Resistor (2.2 meg., 1/2 watt)	33-622339
16	Mica Condenser (500 mmfd.)	30-1114	35	Resistor (700 ohms, 1/2 watt)	33-170339
17	Mica Condenser (4500 mmfd.)	30-1109	36	Mica Condenser (800 mmfd.)	30-1114
18	Resistor (33,000 ohms, 1/2 watt)	33-333339	37	Output Transformer	32-8090
			38	Cone and Voice Coil Assembly (Speaker Part No. 30-1482-3)	36-4121
			39	Pilot Lamp	34-2240
			40	Wave Switch	42-1498