



PHILCO AUTO RADIO MODEL T11

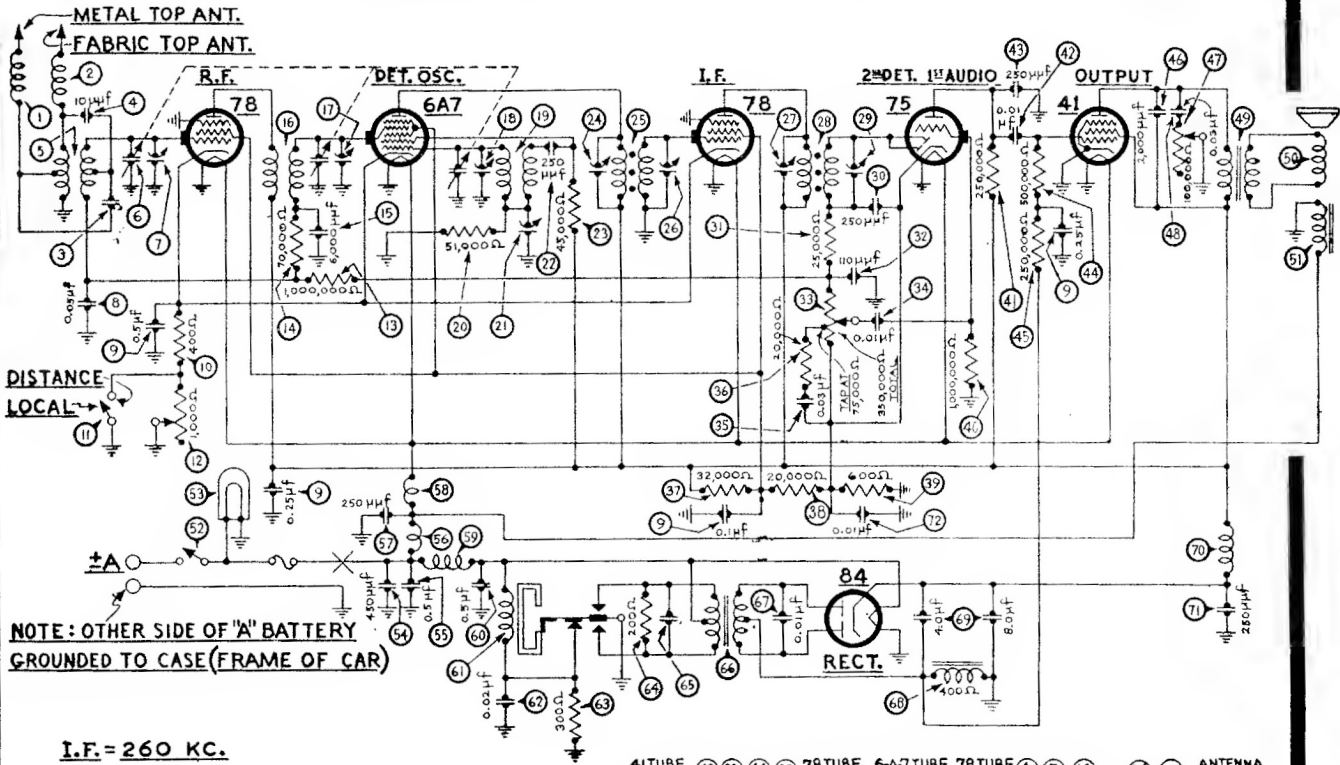

PARTS LIST

No.	Description	Part No.	No.	Description	Part No.
1	Antenna Choke	38-7210	41	Tone Control	
2	Antenna Choke	38-7210	42	Condenser (.03 mfd.)	
3	Condenser (70 mmfd.)	30-1068	43	Output Transformer	
4	Condenser (10 mmfd.)	30-1065	44	Cone & Voice Coil	
5	Antenna Transformer	32-1925	45	Field Coil Assembly	
6	Tuning Condenser	31-1674	46	On & Off Switch	
7	First Padder (on Tun. Cond.)		47	Pilot Lamp	
8	Condenser (.05 mfd.)	30-4444	48	Condenser (.5 mfd.)	
9	Condenser		49	Condenser (.5 mfd.)	
10	(.1-25-25-.5 mfd.)	30-4374	50	"A" Choke	
11	Resistor (400 ohms)	33-1211	51	Condenser (250 mmfd.)	
12	Sensitivity Control Switch	42-1140	52	Filament Choke	
13	Sensitivity Control	33-5129	53	Vibrator Choke	
14	Resistor (1,000,000 ohms)	33-510344	54	Condenser (.5 mfd.)	
15	Resistor (70,000 ohms)	33-370334	55	Vibrator	
16	Condenser (6,000 mmfd.)	30-4445	56	Condenser (.02 mfd.)	
17	R. F. Transformer	32-1926	57	Resistor (300 ohms)	
18	Second Padder (on Tun. Cond.)		58	Resistor (200 ohms)	
19	Third Padder (on Tun. Cond.)		59	Condenser (.05 mfd.)	
20	Oscillator Transformer	32-1927	60	Power Transformer	
21	Resistor (51,000 ohms)	33-351344	61	Condenser (.01 mfd.)	
22	Low Frequency Padder	31-6056	62	Filter Choke	
23	Condenser (250 mmfd.)	30-1032	63	Filter Condenser (4-8 mfd.)	
24	Resistor (45,000 ohms)	33-345344	64	R. F. Choke	
25	Padder (Pri. 1st I. F. Trans.)		65	Condenser (250 mmfd.)	
26	First I. F. Transformer	32-1260	66	Condenser (.01 mfd.)	
27	Padder (Sec. 1st I. F. Trans.)				
28	Padder (Pri. 2nd I. F. Trans.)				
29	Second I. F. Transformer	32-2164			
30	Padder (Sec. 2nd I. F. Trans.)				
31	Condenser (250 mmfd.)	30-1032			
32	Resistor (25,000 ohms)	33-325344			
33	Condenser (110 mmfd.)	30-1031			
34	Volume Control				
35	(350,000 ohms)	33-5121			
36	Condenser (.01 mfd.)	30-4124			
37	Condenser (.03 mfd.)	30-4449			
38	Resistor (20,000 ohms)	33-320334			
39	Resistor (32,000 ohms)	33-332344			
40	Resistor (20,000 ohms)	33-320334			
41	Resistor (600 ohms)	33-1212			
42	Resistor (1,000,000 ohms)	33-510344			
43	Resistor (250,000 ohms)	33-424344			
44	Condenser (.01 mfd.)	30-4145			
45	Condenser (250 mmfd.)	30-1032			
46	Resistor (500,000 ohms)	33-449344			
47	Resistor (250,000 ohms)	33-424344			
48	Condenser (2,000 mmfd.)	30-4177			

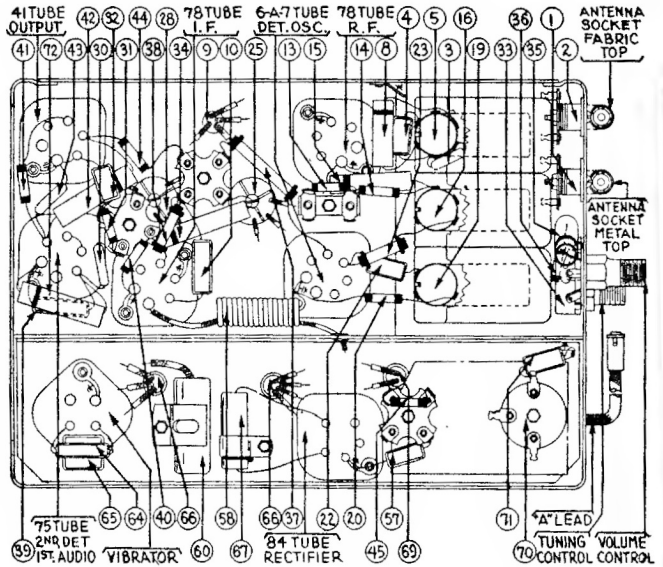

CHANGES — "Run Numbers" are stamped on the chassis sub-base for identification. These "Run Numbers" are changed consecutively as major changes are made in the Receiver wiring and parts.

- RUN No. 3 — A 250 mmfd. condenser has been added to the Receiver. One side is connected between resistors 57 and 60 and the other side to ground.
 - RUN No. 4 — The 250 mmfd. condenser added in Run No. 3 has been removed.
 - RUN No. 5 — The Antenna Transformer 5 is replaced with a new type having the same part number. It can be identified by the red and blue paint marks on the fibre.
 - RUN No. 6 — Condenser 11 has been removed from the cathode side of the "B" choke 10 and connected to the plate side of choke 10.
 - RUN No. 6A — A 250 mmfd. condenser has been added to the Receiver. One side is connected between resistors 43 and 23 and the other side to ground.
 - RUN No. 8 — Condenser 35 removed (1250 mmfd.). Part No. 30-4020 added. (.05 mfd.)
 - RUN No. 13 — The 250 mmfd. condenser that was added in Run No. 6A has been removed.
 - RUN No. 14 — Resistor 10 removed (400 ohms). Part No. 33-1225 added. (350 ohms.)
- No major changes were involved in Run Nos. 2, 7, 9, 10, 11, 12.