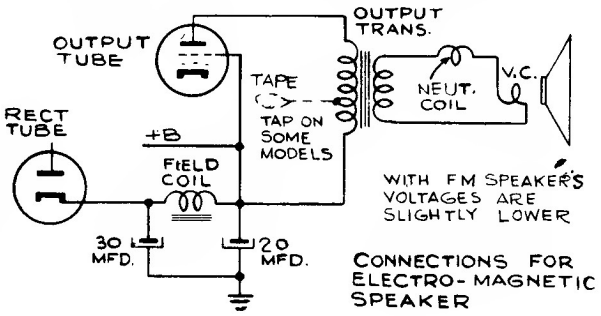

Steps	Connect high side of the test oscillator to—	Tune test osc. to—	Turn radio dial to—	Adjust the following for maximum peak output
1	Pin #8 of 12SA7 in series with 0.1 mfd.	455 kc	Quiet Point at 1,600 kc end of dial	C25, C26 2nd I-F trans. C23, C24 1st I-F trans.
2				
3	Ant. terminal in series with 220 mmf.	600 kc	600 kc "A" Band	C30 (osc.) Rock gang
4		1300 kc	1300 kc "A" Band	C28 (osc.) C20 R-F)
5		Repeat 3 Rocking gang		
6		Repeat 3, 4 and 5 ior exact cal.		
7	Ant. terminal in series with 0.1 mid.	11.8 mc	11.8 mc	C29 (osc.)* Rock gang
8	Ant. terminal in series with 47 mmf.	11.8 mc	11.8 mc	C22 (R-F) Rock gang
9	Repeat steps 7 and 8			

* Use minimum capacity peak if two can be obtained. Check for selection of correct peak by tuning receiver to approximately 10.9 mc where a weaker signal should be received.

RCA VICTOR

56X5

Chassis No. RC-1023—Mfr. No. 274

R.C.A. Victor
Model 56X10
and Radiola
Models 61-5, 61-10
are similar to
Model 56X5.

CHASSIS GROUND

INDICATES COMMON WIRING INSULATED FROM CHASSIS

K = 1000

* MEASURED WITH CHANALYST OR VOLTOHMYST.

VOLTAGES SHOULD HOLD WITHIN ±20% WITH 117 VOLT A.C. SUPPLY.

ALL VOLTAGES ARE MEASURED WITH RESPECT TO —B.

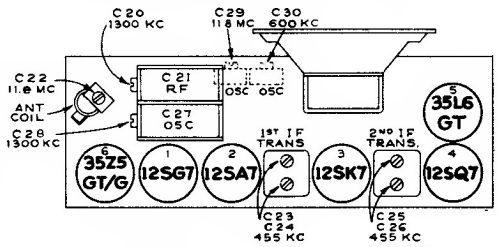

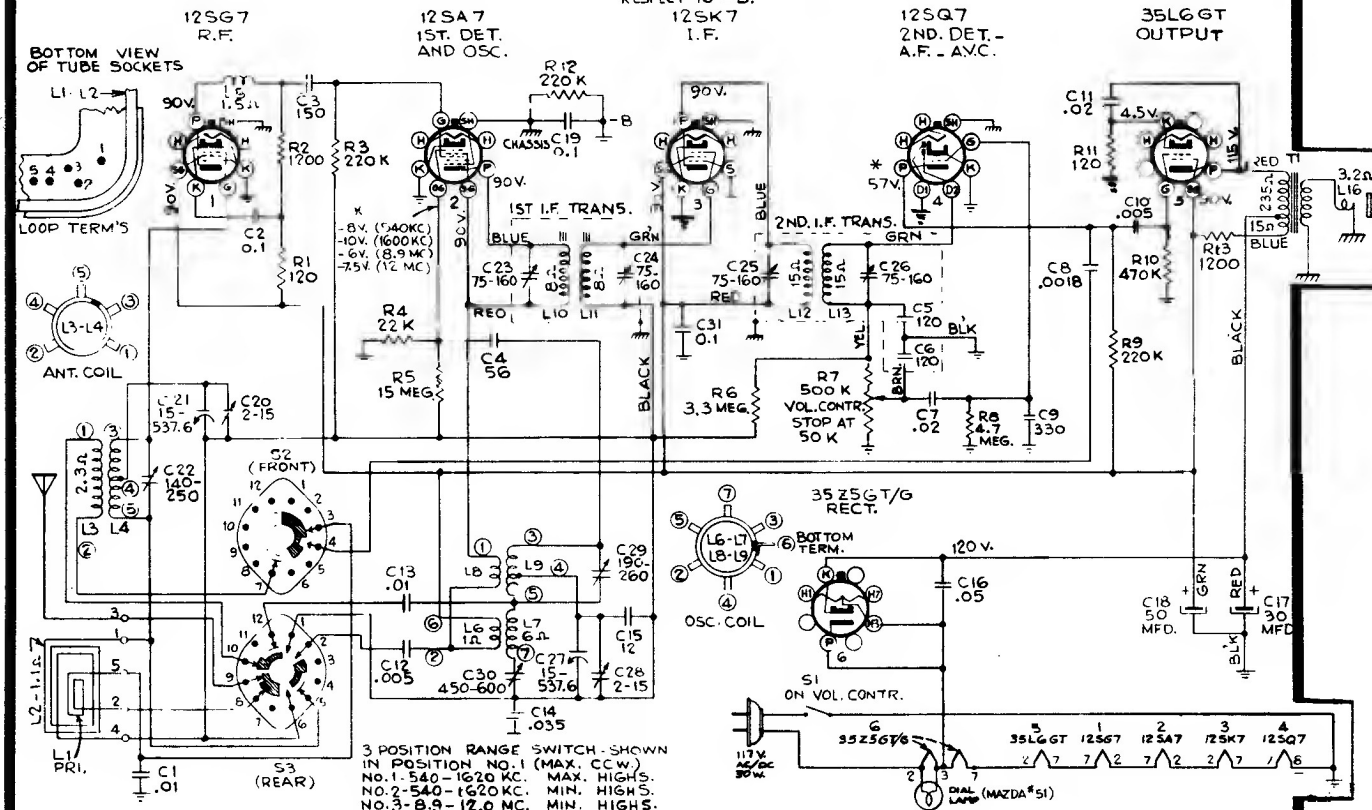

12SG7 12SA7 12SK7 12SQ7 35L6-GT/G

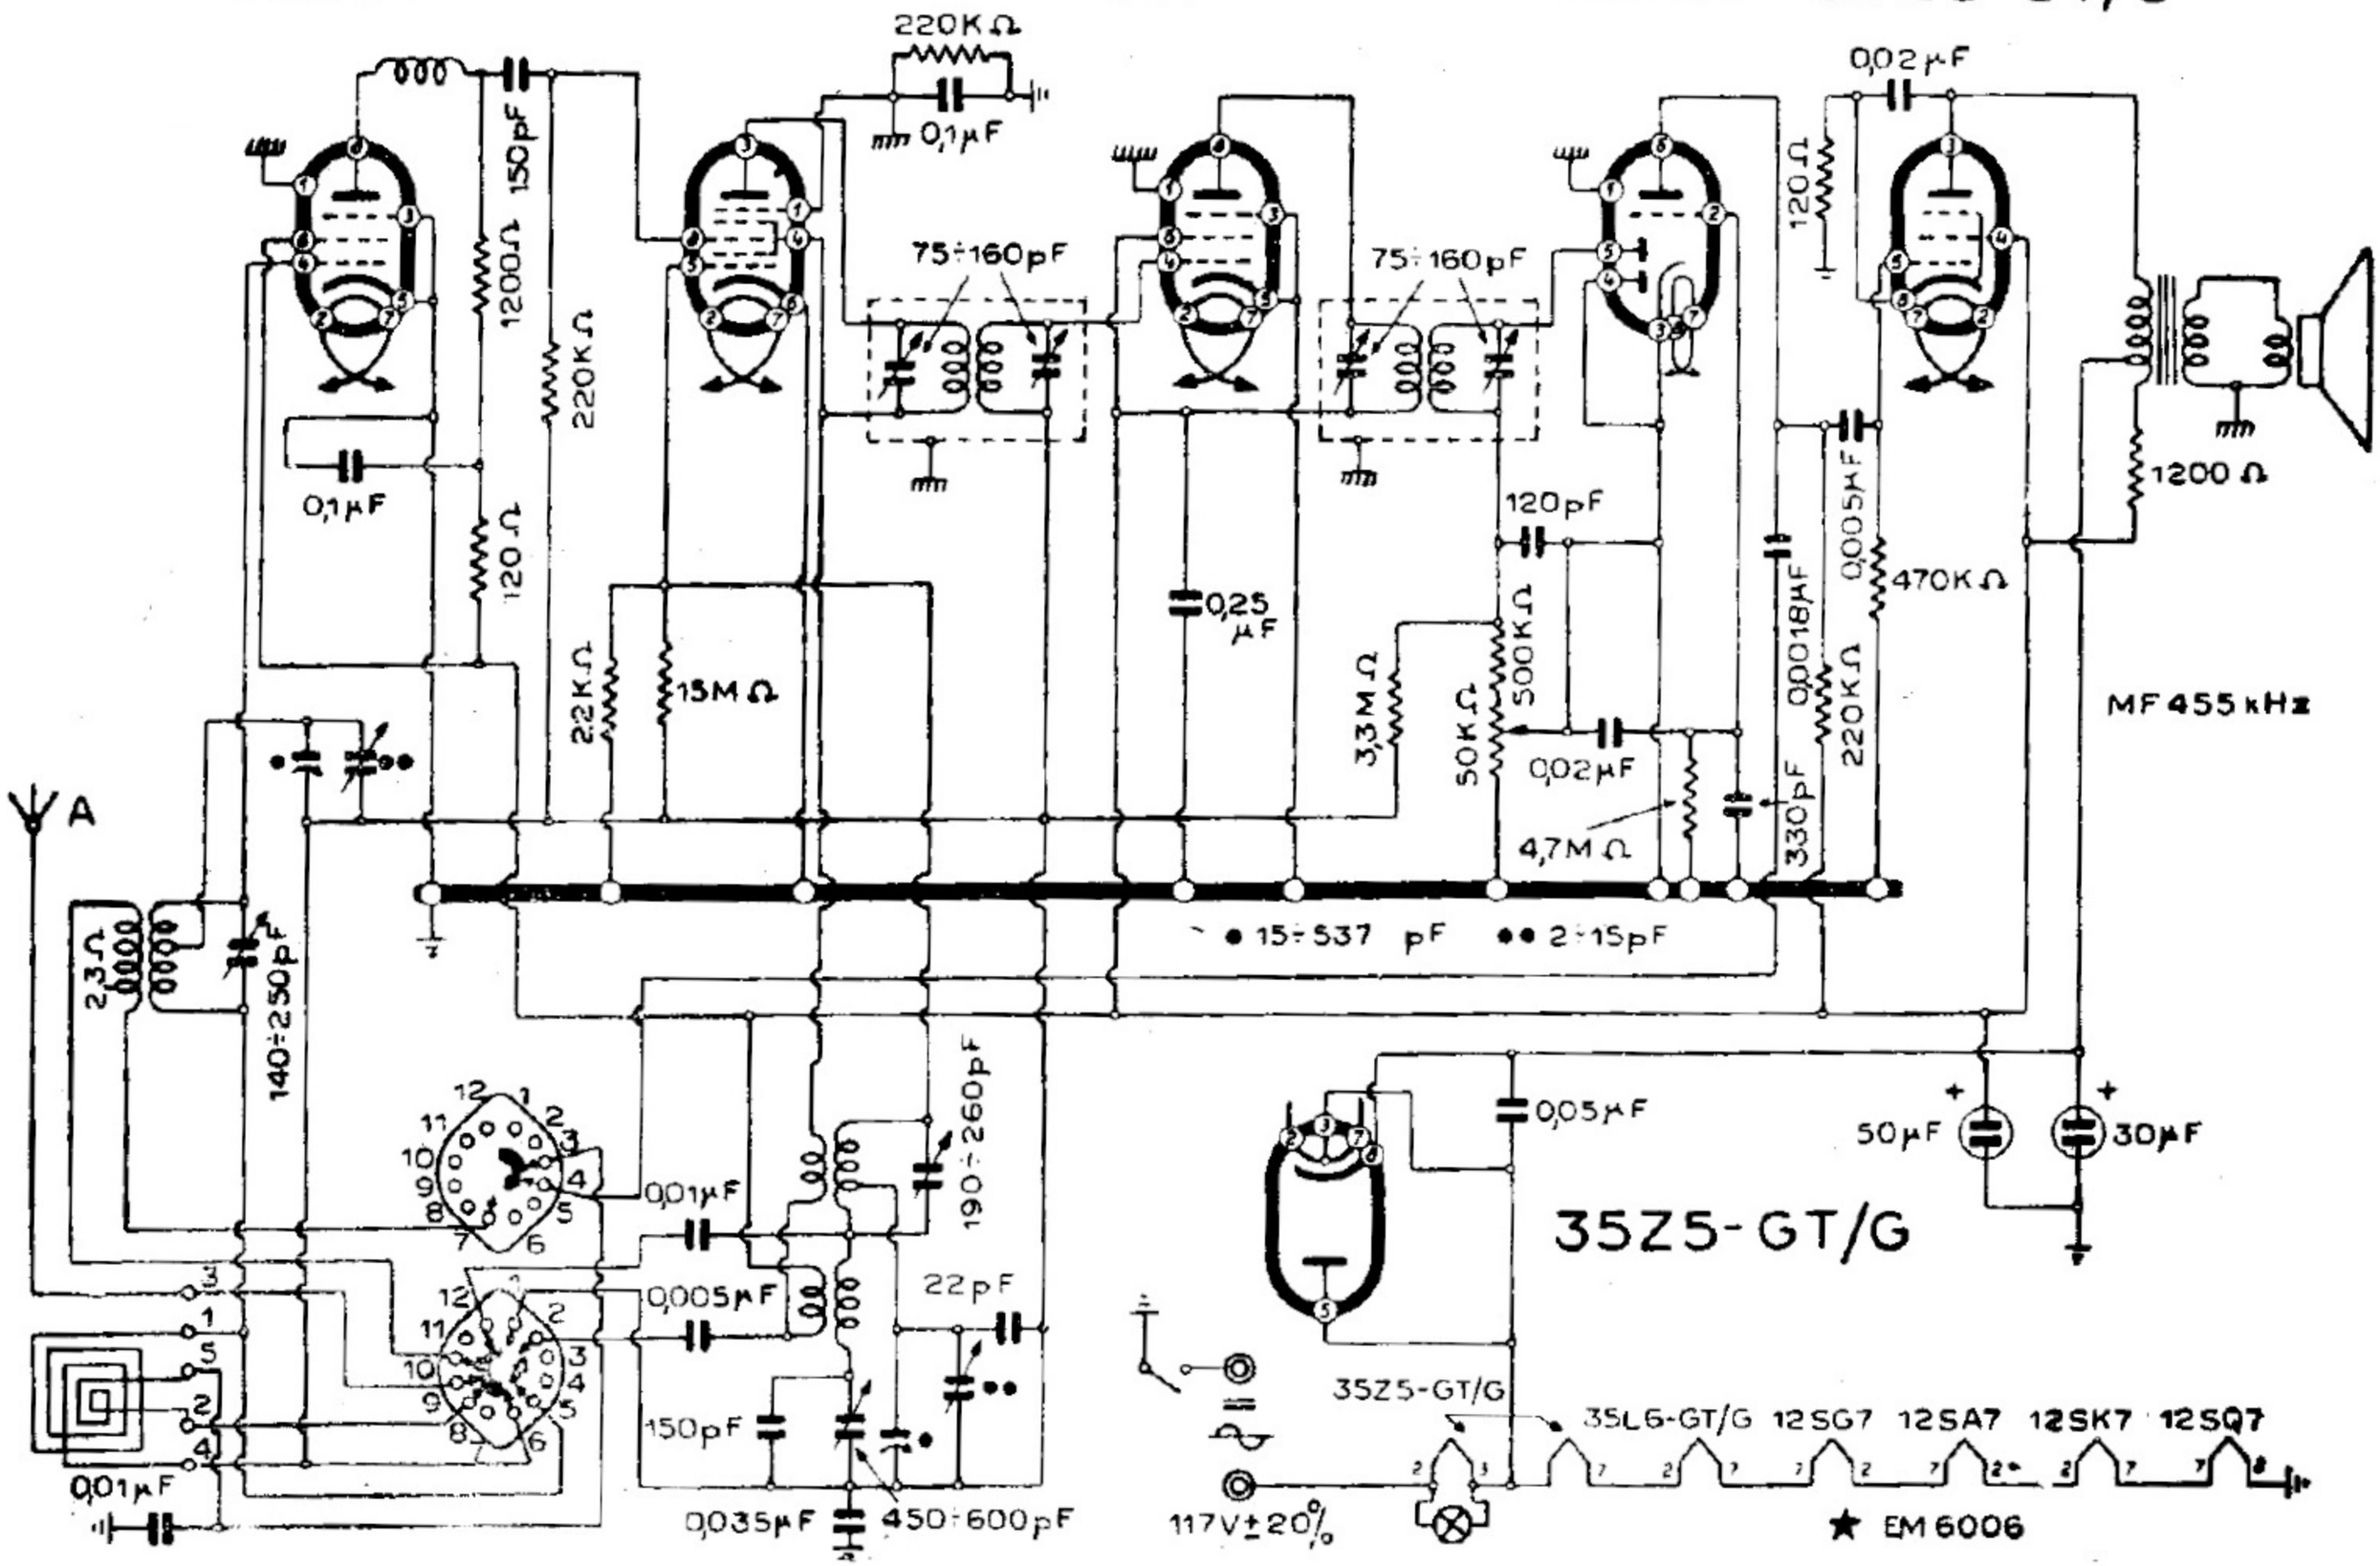

RCA - MOD. « 56 X 10 »