


DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	N-1344	.01 MFD. 400 V.	R1	N-2013	25,000 OHM VOL.
C2	N-1343	.05 MFD. 200 V.	R2	N-1418	3.5 MEG. 20% 5 W.
C3	N-1343	.05 MFD. 200 V.	R3	N-1835	6 MEG. 20% 5 W.
C4	N-1344	.01 MFD. 400 V.	R4	N-1262	1 MEG. 20% 5 W.
C5	N-1344	.01 MFD. 400 V.	R5	N-1264	.5 MEG. 20% 5 W.
C6	N-1344	.01 MFD. 400 V.	R6	N-1614	50 OHM 20% 5 W.
C7	N-1346	.05 MFD. 400 V.	R7	N-1618	80 OHM 10% 2 W.
CB		25 MFD. 150 V.	R8	N-1417	3,000 OHM 20% 5 W.
C8	N-1850	10 MFD. 150 V. } ELECT.	R9	N-1767	250 OHM 10% 5 W.
C9		20 MFD. 25 V. }	1	N-1790	ANTENNA COIL
C10			2	N-1791	R.F. COIL
	N-1855	GANG CONDENSER	3	N-2047	SPEAKER & TRANS.

Gonora  
4 TUBE T.R.F.


CHKD. W.F. APPR. *D.M.J.*  
6-11-37

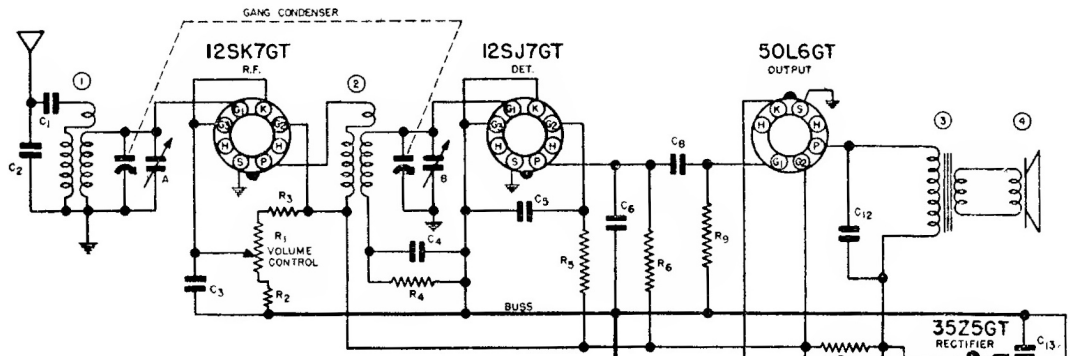

DIAG NO	PART NO	DESCRIPTION	DIAG NO	PART NO	DESCRIPTION
C1	N-1344	.01 MFD. 400 V	R1	N-3728	25,000 OHM VOL. CONT.
C2	—	20 MMFD. BUILT IN	R2	—	110 OHM 20% .5W
C3	N-1345	.05 MFD 200 V	R3	N-1684	75,000 OHM 20% .5W
C4	N-1345	.05 MFD 200 V	R4	N-1418	3.5 MEG 20% .5W
C5	N-1344	.01 MFD 400 V	R5	N-1835	6 MEG. 20% .5W
C6	N-1374	100 MMFD NICA	R6	N-1262	1 MEG 20% .5W
C7	N-2642	.09 MFD 200V 20% USED ON MODEL KFU ONLY	R7	N-1378	2 MEG 20% .5W. USED ON MODEL KFU ONLY
C8	N-1344	.01 MFD 400 V	R8	N-1787	250. OHM 10% .5W
C9	—	20 MFD 25V	R9	N-1264	5 MEG 20% .5W
C10	N-3734	15 MFD 150 V ELECTRO LYTIC	R10	N-1417	3,000 OHM 20% .5W
C11	—	40 MFD 150 V	R11	N-1618	80. OHM 10% 2W
C12	N-1344	.01 MFD. 400 V	R12	N-1742	25 OHM 20% .5W
C13	N-1346	.05 MFD. 400 V			
	N-3731	GANG CONDENSER			
			1	N-3723	ANTENNA COIL
			2	N-3733	R F COIL
			3	N-3729	OUTPUT TRANS.
			4	N-3730	SPEAKER

ON MODEL KF ALL POINTS SHOWN CONNECTED TO BUSS ARE CONNECTED DIRECTLY TO CHASSIS

"B" RF 1400 KC (LOWER TRIMMER)  
 "A" ANT 1400 KC (UPPER TRIMMER)  
 TUNING CONTROL

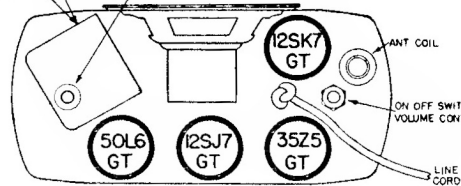

# Sonora

## 4 TUBE T.R.F.

DRWN RPK APP. 10/16/37

9-10-40