


ANT.

**12BE6
CONVERTER**

**12BA6
I.F.**

**12AT6
DET. AMP.**

**50C5
PWR.-AMP.**

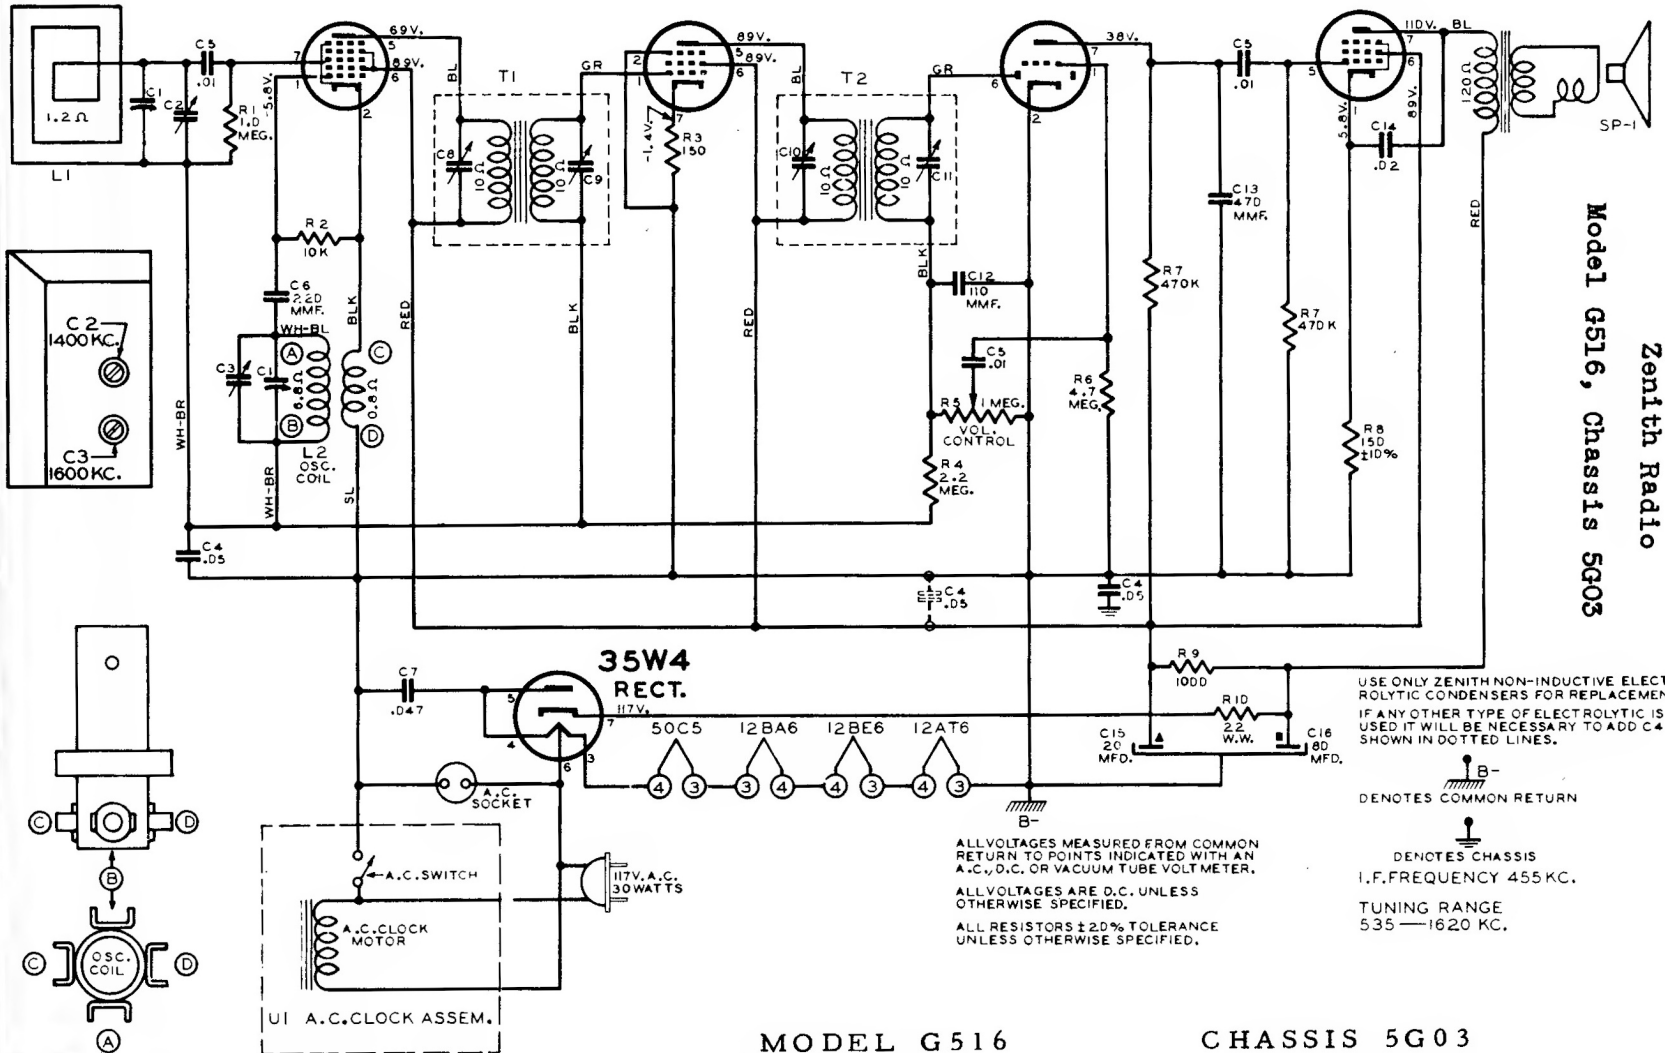

Zenith Radio
Model G516, Chassis 5G03

USE ONLY ZENITH NON-INDUCTIVE ELECTROLYTIC CONDENSERS FOR REPLACEMENT. IF ANY OTHER TYPE OF ELECTROLYTIC IS USED IT WILL BE NECESSARY TO ADD C4 SHOWN IN DOTTED LINES.

B-
DENOTES COMMON RETURN

DENOTES CHASSIS

I.F. FREQUENCY 455 KC.
TUNING RANGE
535 — 1620 KC.

ALL VOLTAGES MEASURED FROM COMMON RETURN TO POINTS INDICATED WITH AN A.C., D.C., OR VACUUM TUBE VOLT METER.
ALL VOLTAGES ARE D.C. UNLESS OTHERWISE SPECIFIED.
ALL RESISTORS ± 20% TOLERANCE UNLESS OTHERWISE SPECIFIED.

MODEL G516

CHASSIS 5G03