


DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
R1	N-4025	22,000 OHM .5W 20%	1	N-4936	ANTENNA COIL LOOP
R2	N-3663	150 OHM .5W 10%	2	N-4810	OSCILLATOR COIL
R3	N-1262	1. MEGOHM .5W 20%	3	N-4813	1ST. I.F. TRANSFORMER
R4	N-4843	.5 MEGOHM VOL. CONT	4	N-4846	2ND I.F. TRANSFORMER
R5	N-4028	6.8 MEGOHM .5W 20%	5	N-2928	4" SPEAKER WITH OUTPUT TRANSFORMER
R6	N-4026	220,000 OHM .5W 20%	6	N-4965	TRIMMER CAPACITOR
R7	N-4027	470,000 OHM .5W 20%	7	N-4967	PHONO PICKUP
R8	N-4024	220 OHM .5W 10% INSUL	8	N-3846	MOTOR
R9	N-5359	1000 OHM 1.W 10% INSUL	9	N-4972	2 GANG CONDENSER
R10	N-5403	33 OHM .5W 20% INSUL			
R11	N-4026	220,000 OHM .5W 20%			
R12	N-4988	220,000 OHM .5W 20% INS	S1	N-2408	RADIO PHONO SW.
R13	N-4087	47,000 OHM .5W 20% INS	S2	N-3140	MOTOR SW.
R14	N-5405	470,000 OHM .5W 20% INS			
C1	N-1345	.05 MFD 200V			
C2	N-1346	.05 MFD. 40DV			
C3	N-1374	.0001 MFD 500V			
C4	N-4894	.005 MFD. 600V			
C5	N-2306	.0002 MFD. 500V			
C6	N-1344	.01 MFD. 400V			
C7	N-1376	.02 MFD. 400V			
C8	N-4986	40 MFD. 150V			
C9	N-4986	40 MFD. 150V ELECT.			
C10	N-1345	.05 MFD 200V			
C11	N-1345	.05 MFD. 200V			

NOTE VOLTAGES SHOWN ARE FROM TERMINAL TO BUSS-----HEATER VOLTAGES ARE A.C. WHEN LINE VOLTAGE IS ALTERNATING.

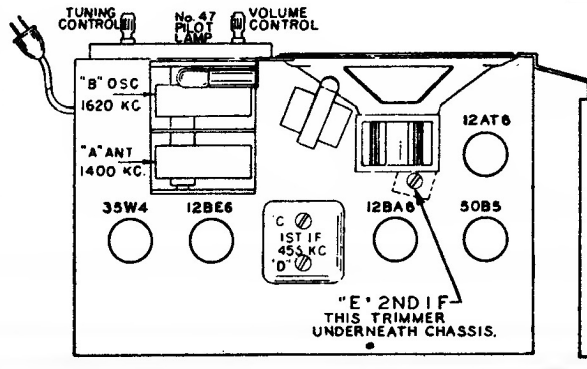

Sonora
Clear as a Bell

Models
RGMF/RGMFU (212 & 230)

LOOP