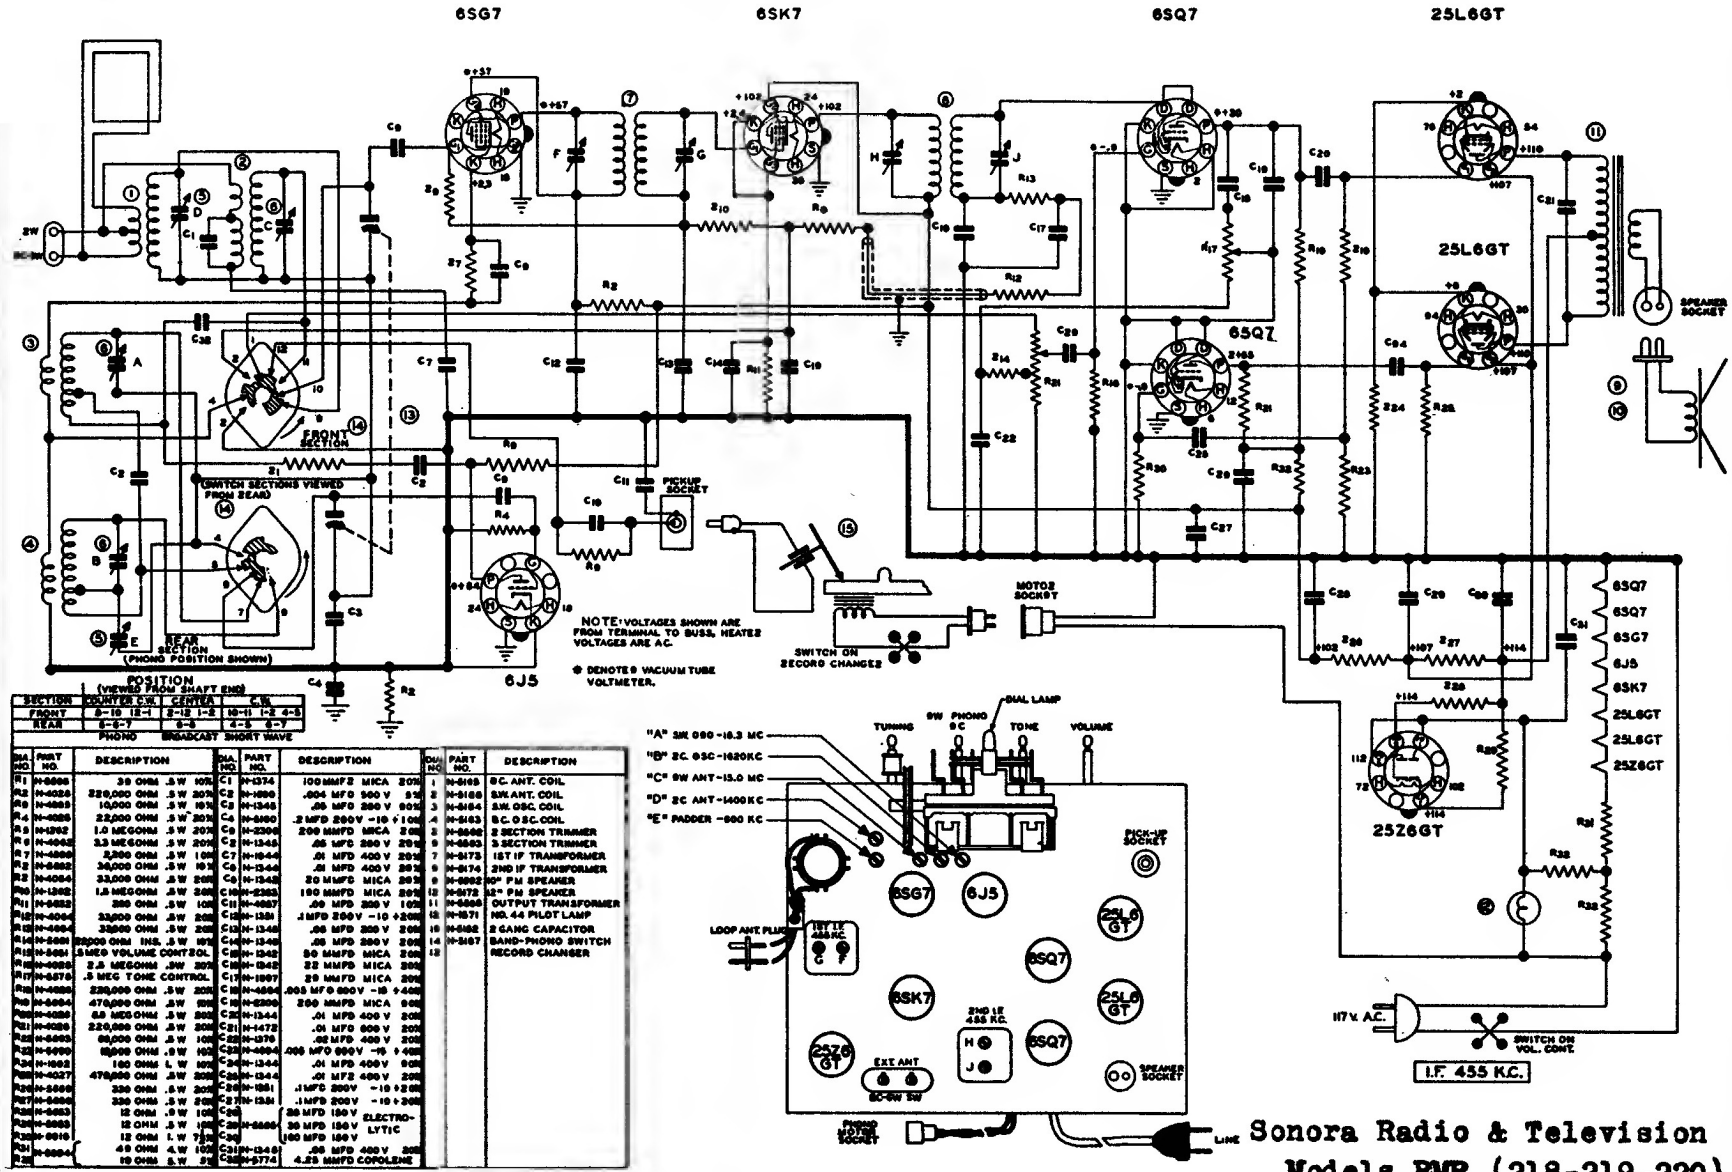

POSITION (VIEWED FROM SHAFT END)

SECTION	COUNTER C.W.		CENTER		C.W.	
FRONT	8-10	12-1	2-12	1-2	10-11	1-2 4-5
REAR	6-5-7		8-5		4-5	6-7
	PHONO		BROADCAST	SHORT WAVE		

DIA. NO.	PART NO.	DESCRIPTION
R1	N-6095	30 OHM .5 W 10%
R2	N-6035	220,000 OHM .5 W 20%
R3	N-6053	10,000 OHM .5 W 10%
R4	N-6085	22,000 OHM .5 W 20%
R5	N-1262	1.0 MEGOHM .5 W 20%
R6	N-6062	3.3 MEGOHM .5 W 20%
R7	N-6086	2,200 OHM .5 W 10%
R8	N-6052	34,000 OHM .5 W 10%
R9	N-6084	33,000 OHM .5 W 20%
R10	N-1262	1.0 MEGOHM .5 W 20%
R11	N-6052	250 OHM 1 W 10%
R12	N-6084	33,000 OHM .5 W 20%
R13	N-6084	33,000 OHM .5 W 20%
R14	N-6061	22,000 OHM INS. .5 W 10%
R15	N-6061	.5 MEG VOLUME CONTROL
R16	N-6062	2.2 MEGOHM .5W 20%
R17	N-6070	.5 MEG TONE CONTROL
R18	N-6085	220,000 OHM .5 W 20%
R19	N-6064	470,000 OHM .5 W 20%
R20	N-6080	68 MEGOHM .5 W 20%
R21	N-6035	220,000 OHM .5 W 20%
R22	N-6093	68,000 OHM .5 W 10%
R23	N-6092	68,000 OHM .5 W 10%
R24	N-1052	100 OHM 1 W 10%
R25	N-4027	470,000 OHM .5 W 20%
R26	N-6065	330 OHM .5 W 20%
R27	N-6063	330 OHM .5 W 20%
R28	N-6053	12 OHM .5 W 10%
R29	N-6053	12 OHM .5 W 10%
R30	N-6016	12 OHM 1 W 7½%
R31	N-6064	47 OHM 4 W 10%
R32		10 OHM .5 W 5%

DIA. NO.	PART NO.	DESCRIPTION
C1	N-1374	100 MMFD MICA 20%
C2	N-1896	.004 MFD 500 V 5%
C3	N-1348	.05 MFD 200 V 80%
C4	N-1880	.2 MFD 200 V -10 +100%
C5	N-2306	200 MMFD MICA 2%
C6	N-1345	.05 MFD 200 V 20%
C7	N-1844	.01 MFD 400 V 20%
C8	N-1346	.01 MFD 400 V 20%
C9	N-1348	20 MMFD MICA 20%
C10	N-2283	100 MMFD MICA 20%
C11	N-6087	.00 MFD 200 V 10%
C12	N-1381	.1 MFD 200 V -10 +20%
C13	N-1345	.05 MFD 200 V 20%
C14	N-1345	.05 MFD 200 V 20%
C15	N-1342	50 MMFD MICA 20%
C16	N-1342	22 MMFD MICA 20%
C17	N-1807	20 MMFD MICA 20%
C18	N-6064	.005 MFD 600 V -10 +40%
C19	N-1344	250 MMFD MICA 5%
C20	N-1344	.01 MFD 400 V 20%
C21	N-1472	.01 MFD 600 V 20%
C22	N-1370	.02 MFD 400 V 20%
C23	N-6064	.005 MFD 600 V -10 +40%
C24	N-1344	.01 MFD 400 V 20%
C25	N-1344	.01 MFD 400 V 20%
C26	N-1951	.1 MFD 200 V -10 +20%
C27	N-1381	.1 MFD 200 V -10 +20%
C28		25 MFD 150 V ELECTROLYTIC
C29	N-6066	30 MFD 150 V
C30		100 MFD 150 V
C31	N-1348	.05 MFD 400 V 20%
C32	N-5774	4.25 MMFD COPPERLENE

DIA. NO.	PART NO.	DESCRIPTION
1	N-6165	BC ANT. COIL
2	N-6166	SW ANT. COIL
3	N-6164	SW. OSC. COIL
4	N-6163	BC OSC. COIL
5	N-6646	2 SECTION TRIMMER
6	N-6563	3 SECTION TRIMMER
7	N-6175	1ST I.F. TRANSFORMER
8	N-6174	2ND I.F. TRANSFORMER
9	N-6002	10" P.M. SPEAKER
10	N-6172	12" P.M. SPEAKER
11	N-6648	OUTPUT TRANSFORMER
12	N-1671	NO. 44 PILOT LAMP
13	N-6182	2 GANG CAPACITOR
14	N-6167	BAND-PHONO SWITCH
15		RECORD CHANGER

Sonora Radio & Television
Models RMR (218-219-220)