


12SA7GT OSC.

FREQUENCY
ADJUSTMENT

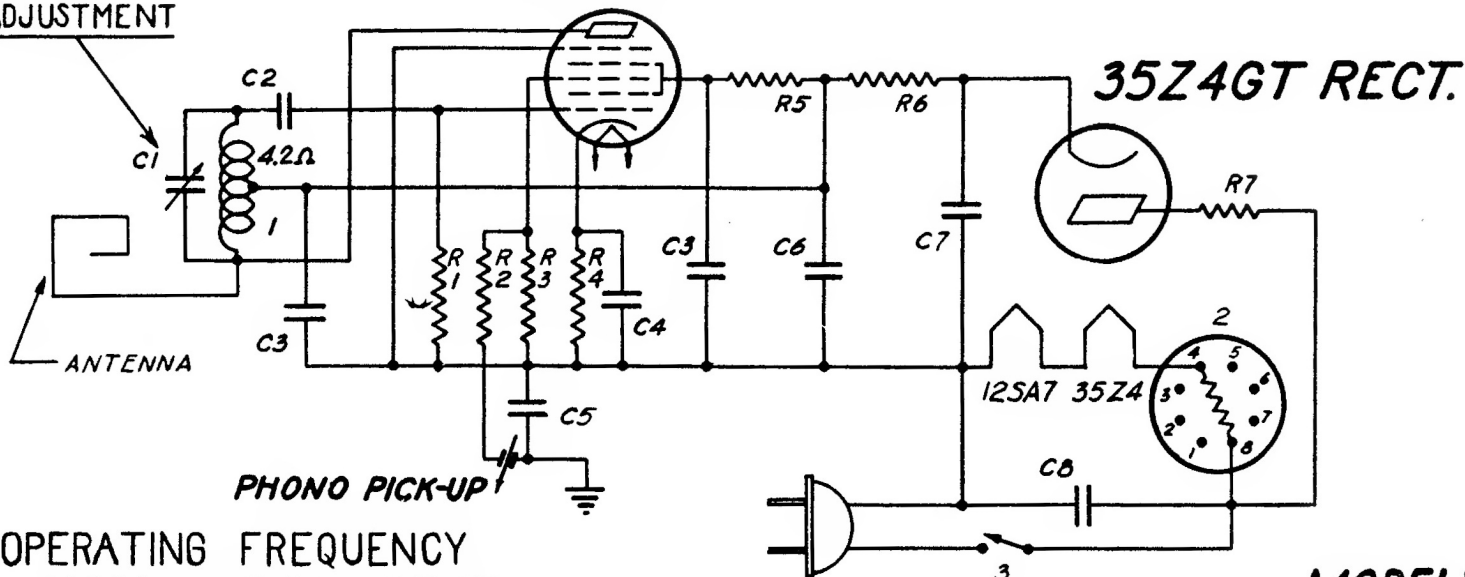

PHONO PICK-UP

OPERATING FREQUENCY
APPROXIMATELY 1540 KC.

MODELS
S-7000
S-7001
S-7002
S-7003

DIAG. N ^o	PART N ^o	DESCRIPTION	DIAG. N ^o	PART N ^o	DESCRIPTION
C1	22-690	TUNING CONDENSER	R2	63-658	390M OHM 1/4 W.
C2	22-182	.00025 MFD. 600V.	R3	63-260	100M OHM 1/4 W.
C3	22-243	.01 MFD. 400V.	R4	63-583	1000 OHM 1/4 W.
C4	22-829	.05 MFD. 200V.	R5	63-964	4700 OHM 1/2 W.
C5	22-827	.1 MFD. 200V.	R6	63-803	2200 OHM 1/2 W.
C6	22-876	8MFD. ELECTROLYTIC 150V.	R7	63-575	47 OHM 1/4 W.
C7			40 MFD. 150V.	1	56854
C8	22-670	.1 MFD. 400V.	2	100-76	BALLAST TUBE
R1	63-591	22 M OHM 1/4 W.	3	85-170	AC SWITCH

PHONOGRAPH OSCILLATOR
ZENITH RADIO CORPORATION
CHICAGO, ILL.

WIRELESS RECORD PLAYER Models S7000, S7001, S7002, S7003