


NOTE: VOLTAGES SHOWN ARE FROM TERMINAL TO BUSS. HEATER VOLTAGES ARE AC WHEN LINE VOLTAGE IS ALTERNATING

SWITCH ON VOL CONTROL

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	
C1	N-1344	.01 MFD 400V. 20%	R6	N-1262	1 MEGOHM .5W. 20%	
C2	N-1345	.05 MFD 200V. 20%	R7	N-4063	47,000 OHM .5W. 20%	
C3	N-1345	.05 MFD 200V. 20%	R8	N-5026	0.5 MEGOHM VOL. CONT.	
C4	N-2363	150 MMFD MICA 20%	R9	N-4061	47 MEGOHM .5W. 20%	
C5	N-1374	100 MMFD MICA 20%	R10	N-4027	47,000 OHM .5W. 20%	
C6	N-4894	.005 MFD 600V -15+40%	R11	N-4067	180 OHM .5W. 10%	
C7	N-4890	.0005 MFD 600V -25+80%	R12	N-4988	220,000 OHM .5W. INS. 20%	
C8	N-1344	.01 MFD 400V. 20%	R13	N-4900	1200 OHM 1W. 10%	
C9	N-1344	.01 MFD 400V. 20%	R14	N-4022	33 OHM .5W. 20%	
C10	N-3658	40 MFD 150 W.V. ELECTRO	R15	N-4628	33 OHM 1W. 10%	
C11	N-3658	40 MFD 150 W.V. LYTIC	R16	N-4028	220,000 OHM .5W. 20%	
C12	N-1346	.05 MFD 400V. 20%	R17	N-5857	62 OHM .5W. 10%	
C13	N-5190	.2 MFD 200V -10+10%	1	N-5937	LOOP COIL	
C14	N-1346	.05 MFD 400V. 20%	2	N-5286	2 GANG CONDENSER	
C15	N-1351	.1 MFD 200V -10+20%	3	N-5765	LOOP COIL	
R1	N-4063	47,000 OHM .5W. 20%	4	N-5936	2 GANG CONDENSER	
R2	N-4896	2200 OHM .5W. 10%	5	N-4872	1ST I.F. TRANSFORMER	
R3	N-4067	47,000 OHM .5W. INS. 20%	6	N-5571	2ND I.F. TRANSFORMER	
R4	N-5351	22,000 OHM .5W. INS. 20%	7	N-4875	OUTPUT TRANSFORMER	
R5	N-4066	470 OHM .5W. 10%	8	N-4868	5" SPEAKER	
				9	N-4942	TONE SWITCH
				10	N-4810	OSCILLATOR COIL

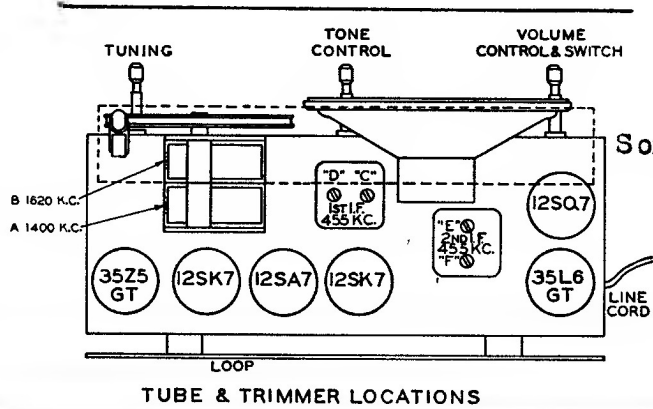

I.F. 455 KC.

Sonora Radio & Television  
Model RZ/RZU (222)

TUBE & TRIMMER LOCATIONS