


12SA7GT OSC.

35Z4GT RECT.

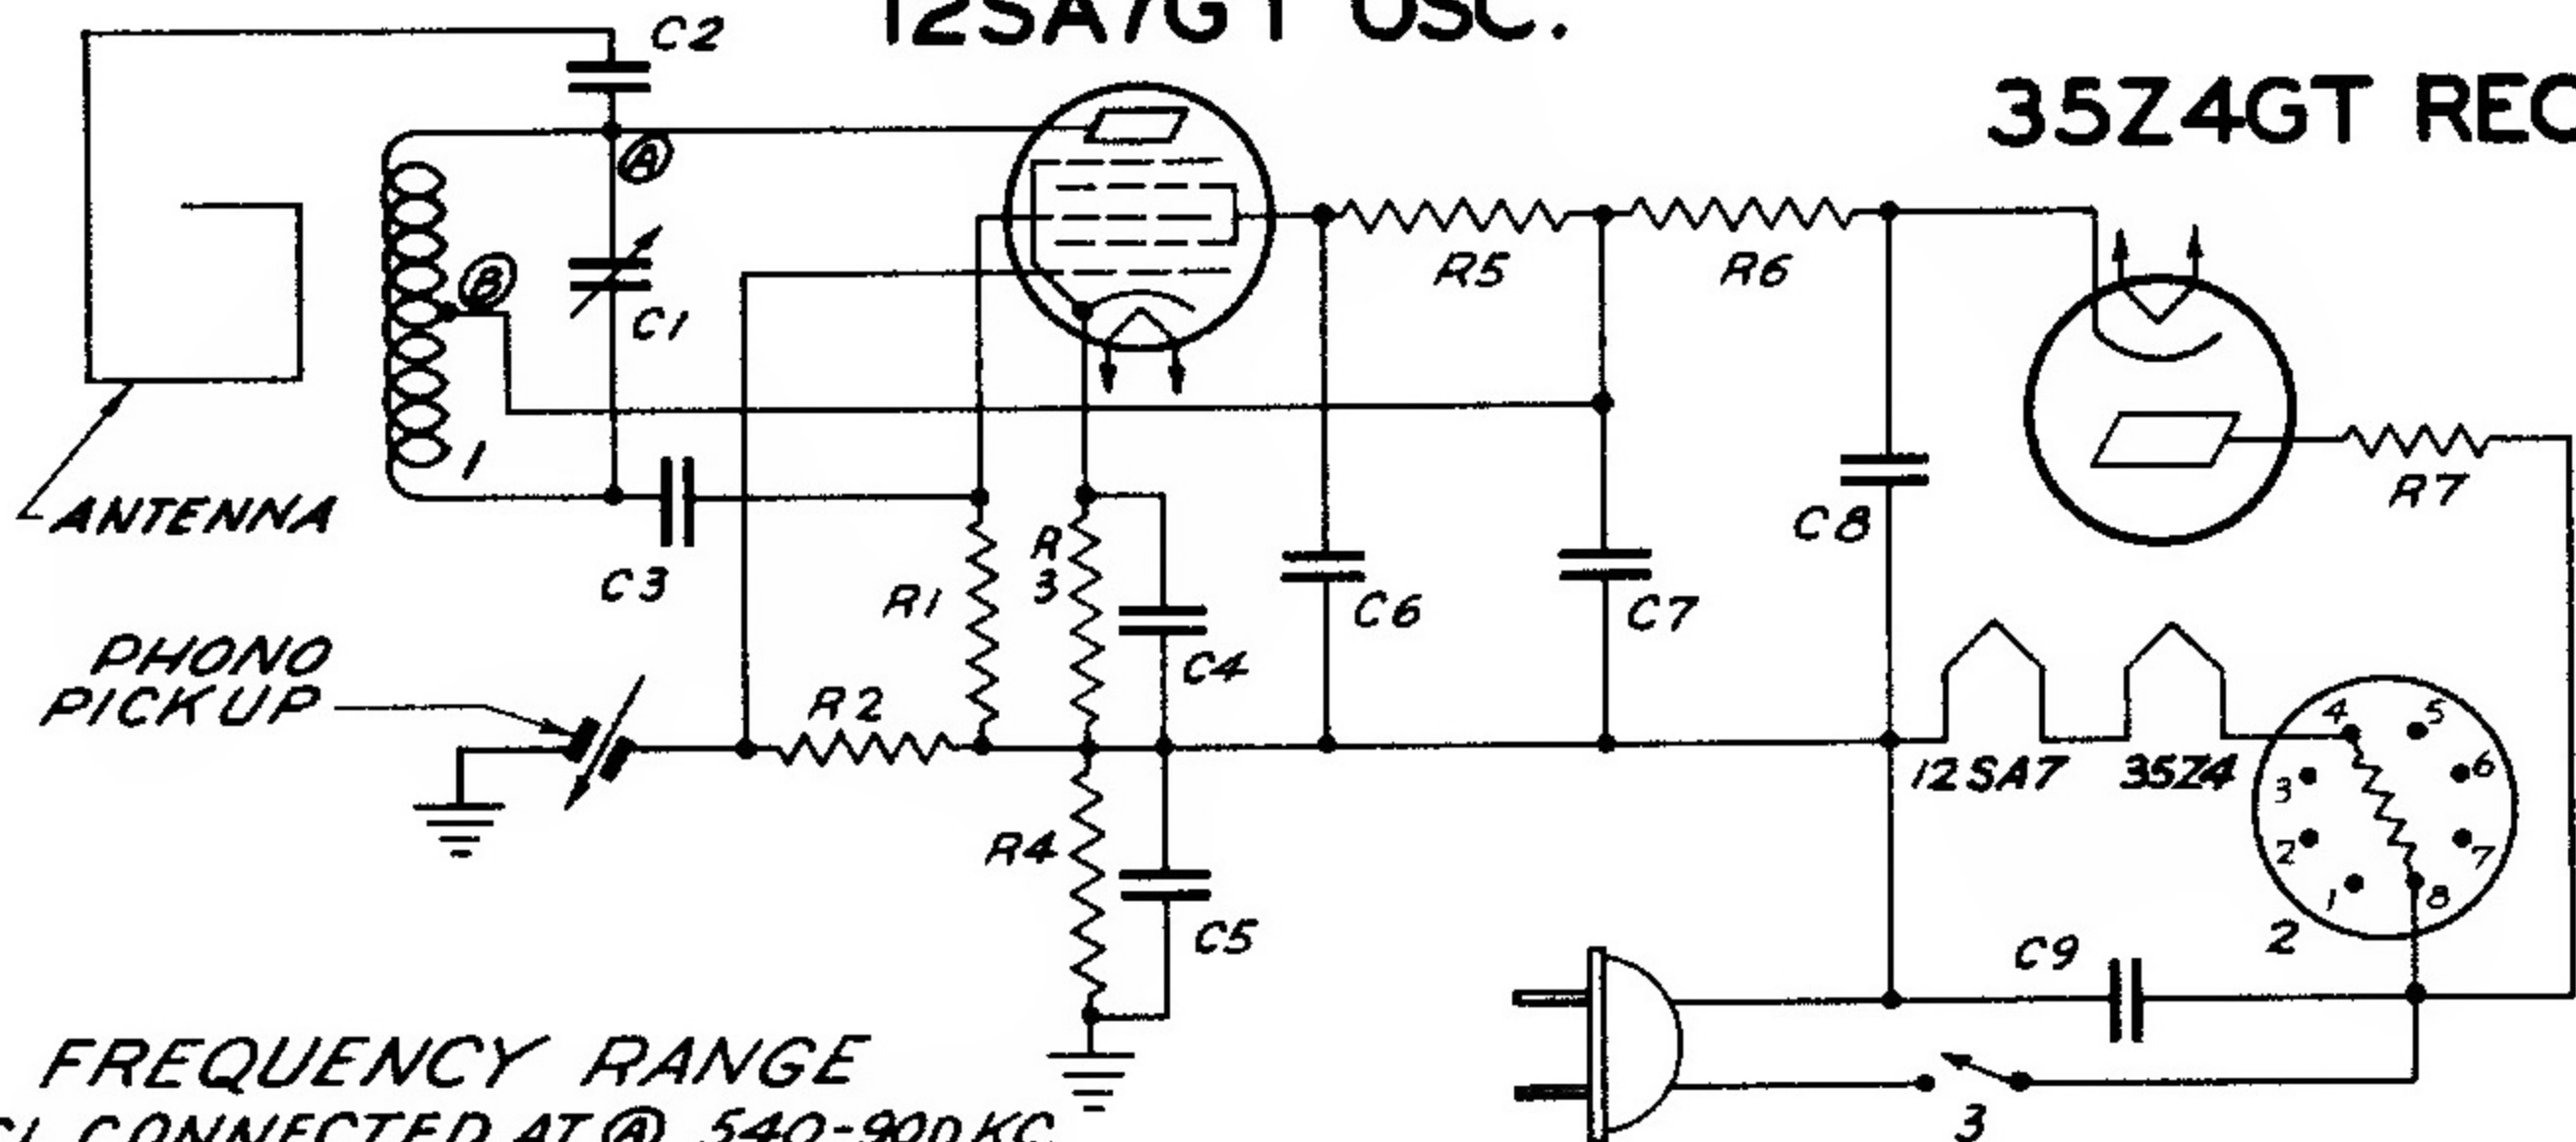

FREQUENCY RANGE
 C1 CONNECTED AT (A) 540-900KC.
 C1 CONNECTED AT (B) 900-1500KC.

MODELS
 S 8500
 S 8501

DIAG. No	PART No	DESCRIPTION	DIAG. No	PART No	DESCRIPTION
C1	22-690	TUNING CONDENSER	R3	63-701	470 OHM 1/4 W.
C2	22-162	.0001 MFD. 600V.	R4	63-296	220M OHM 1/4 W.
C3	22-182	.00025 MFD. 600V.	R5	63-964	4700 OHM 1/2 W.
C4	22-829	.05 MFD. 200V.	R6	63-803	2200 OHM 1/2 W.
C5	22-827	.1 MFD. 200V.	R7	63-375	47 OHM 1/4 W.
C6	22-243	.01 MFD. 400V.	1	S8611	OSC. COIL ASSEM.
C7	22-876	8 MFD. ELECTROLYTIC 150 V.	2	100-76	BALLAST TUBE
C8			40 MFD. " 150 V.	3	85-170
C9	22-828	.05 MFD. 400V.			
R1	63-591	22 M OHM 1/4 W.			
R2	63-271	1 MEGOHM 1/4 W.			

PHONOGRAPH OSCILLATOR
ZENITH RADIO CORPORATION