


IR5
CONVERTER

IU4
I.F.


IS5
DIODE AUDIO

3V4
OUTPUT

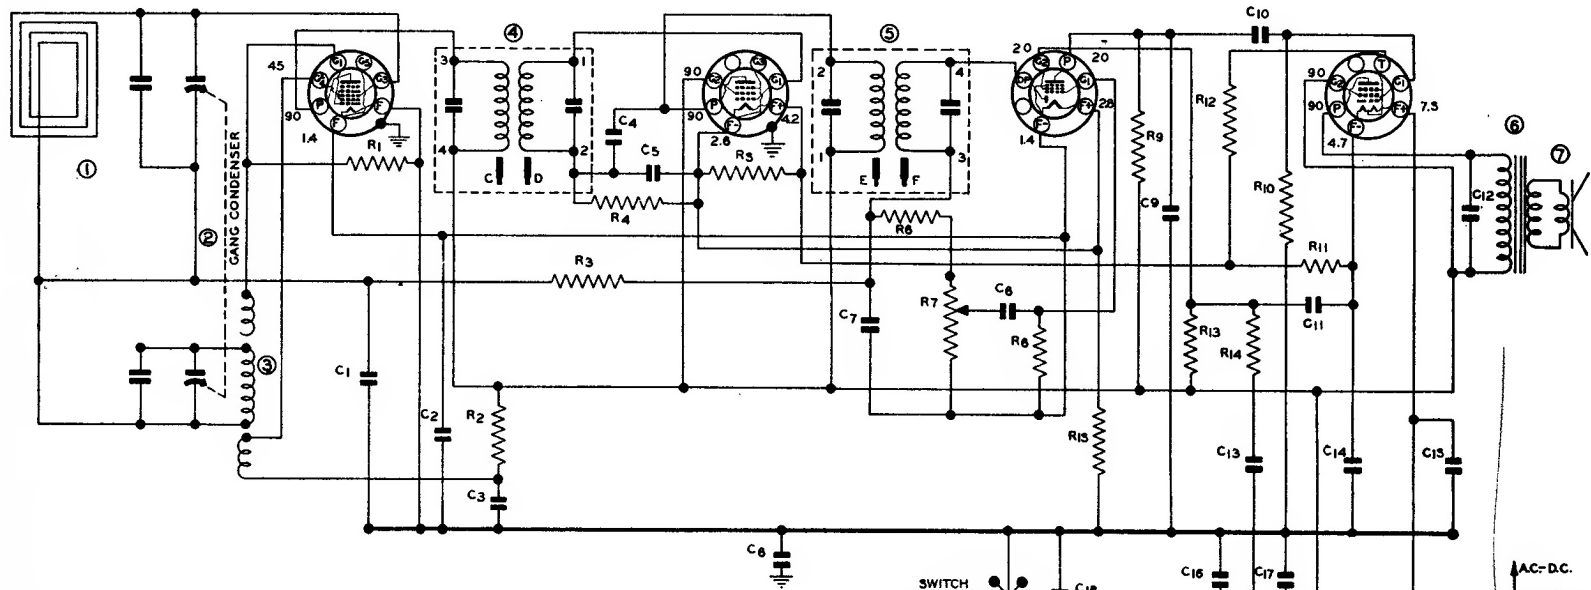

DIAL NO.	PART NO.	DESCRIPTION	DIAL NO.	PART NO.	DESCRIPTION
R1	N-2875	100,000 OHM .5W 10%	C4	N-8054	7 MMFD 500V 10%
R2	N-8012	22,000 OHM .5W 10%	C5	N-1544	.01 MFD 400V 20%
R3	N-4081	4.7 MEGOHM .8W 20%	C6	N-4857	.08 MFD 200V 10%
R4	N-4028	6.8 MEGOHM .5W 20%	C7	N-8018	100 MMFD 500V
R5	N-4087	180 OHM .5W 10%	C8	N-4884	.005 MFD 800V -18+40%
R6	N-4085	47,000 OHM .5W 20%	C9	N-8015	100 MMFD 500V
R7	N-8007	L.MEC. VOLUME CONTROL	C10	N-4884	.005 MFD 800V -15+40%
R8	N-4028	6.8 MEGOHM .5W 20%	C11	N-1345	.05 MFD 200V 20%
R9	N-2878	10 MEGOHM .5W 10%	C12	N-4884	.005 MFD 800V -15+40%
R10	N-4277	22 MEGOHM .5W 20%	C13	N-1578	.02 MFD 400V 20%
R11	N-8008	10 OHM .5W 10%	C14		100 MFD 25V
R12	N-5188	560 OHM .5W 10%	C15		100 MFD 25V ELECTRO-
R13	N-5475	3.8 MEGOHM .5W 10%	C16	N-8008	50 MFD 150V LYTIC
R14	N-8053	12 MEGOHM .5W 10%	C17		50 MFD 150V
R15	N-8052	240 OHM .5W 5%	C18	N-1348	.05 MFD 400V 20%
R16	N-8115	88 OHM .15W 10%			
R17	N-4888	2200 OHM .5W 10%			
R18	N-8008	2400 OHM .5W 5%			
R19	N-8010	18 OHM .5W 10%			
C1	N-1349	.08 MFD 200V 20%	1	N-5872	LOOP COIL
C2	N-1381	.1 MFD 200V -10+20%	2	N-5859	2 GANG CAPACITOR
C3	N-1345	.05 MFD 200V 20%	3	N-8005	OSCILLATOR COIL
			4	N-5875	1ST I.F.
			5	N-5873	2ND I.F.
			6	N-8004	OUTPUT TRANSFORMER
			7	N-5888	4" P.M. SPEAKER
			8	N-5888	SELENIUM RECTIFIER

ALL VOLTAGES SHOWN ARE MEASURED WITH A VACUUM TUBE VOLTMETER. INPUT VOLTAGE 117 A.C.

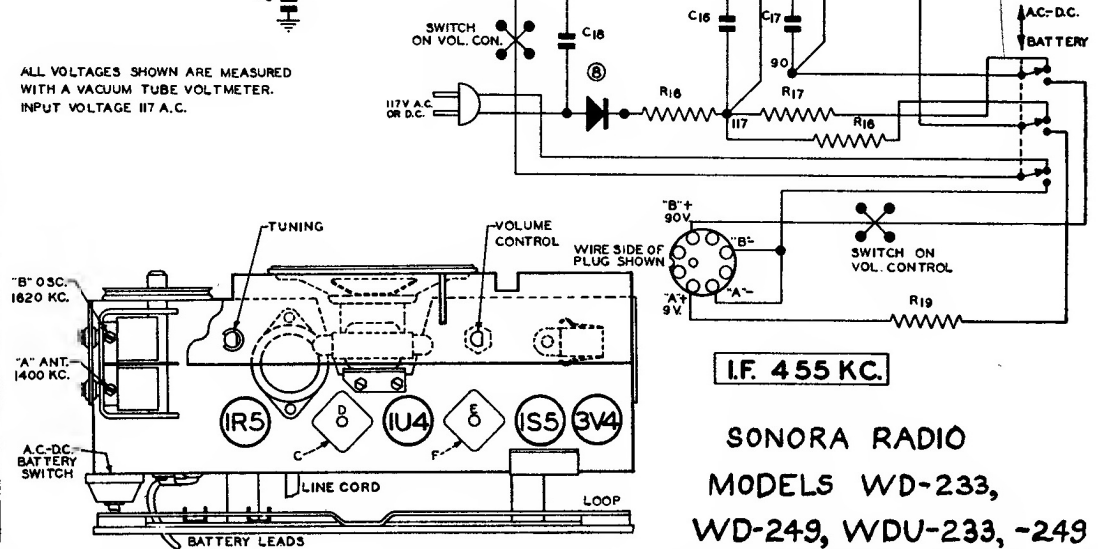

I.F. 455 KC.

SONORA RADIO
MODELS WD-233,
WD-249, WDU-233, -249