


SPARTON SUPERHETERODYNE MODEL 531-X & 532-X INTERMEDIATE FREQUENCY 456 K.C.

BOTTOM VIEW OF ALL SOCKET CONNECTIONS

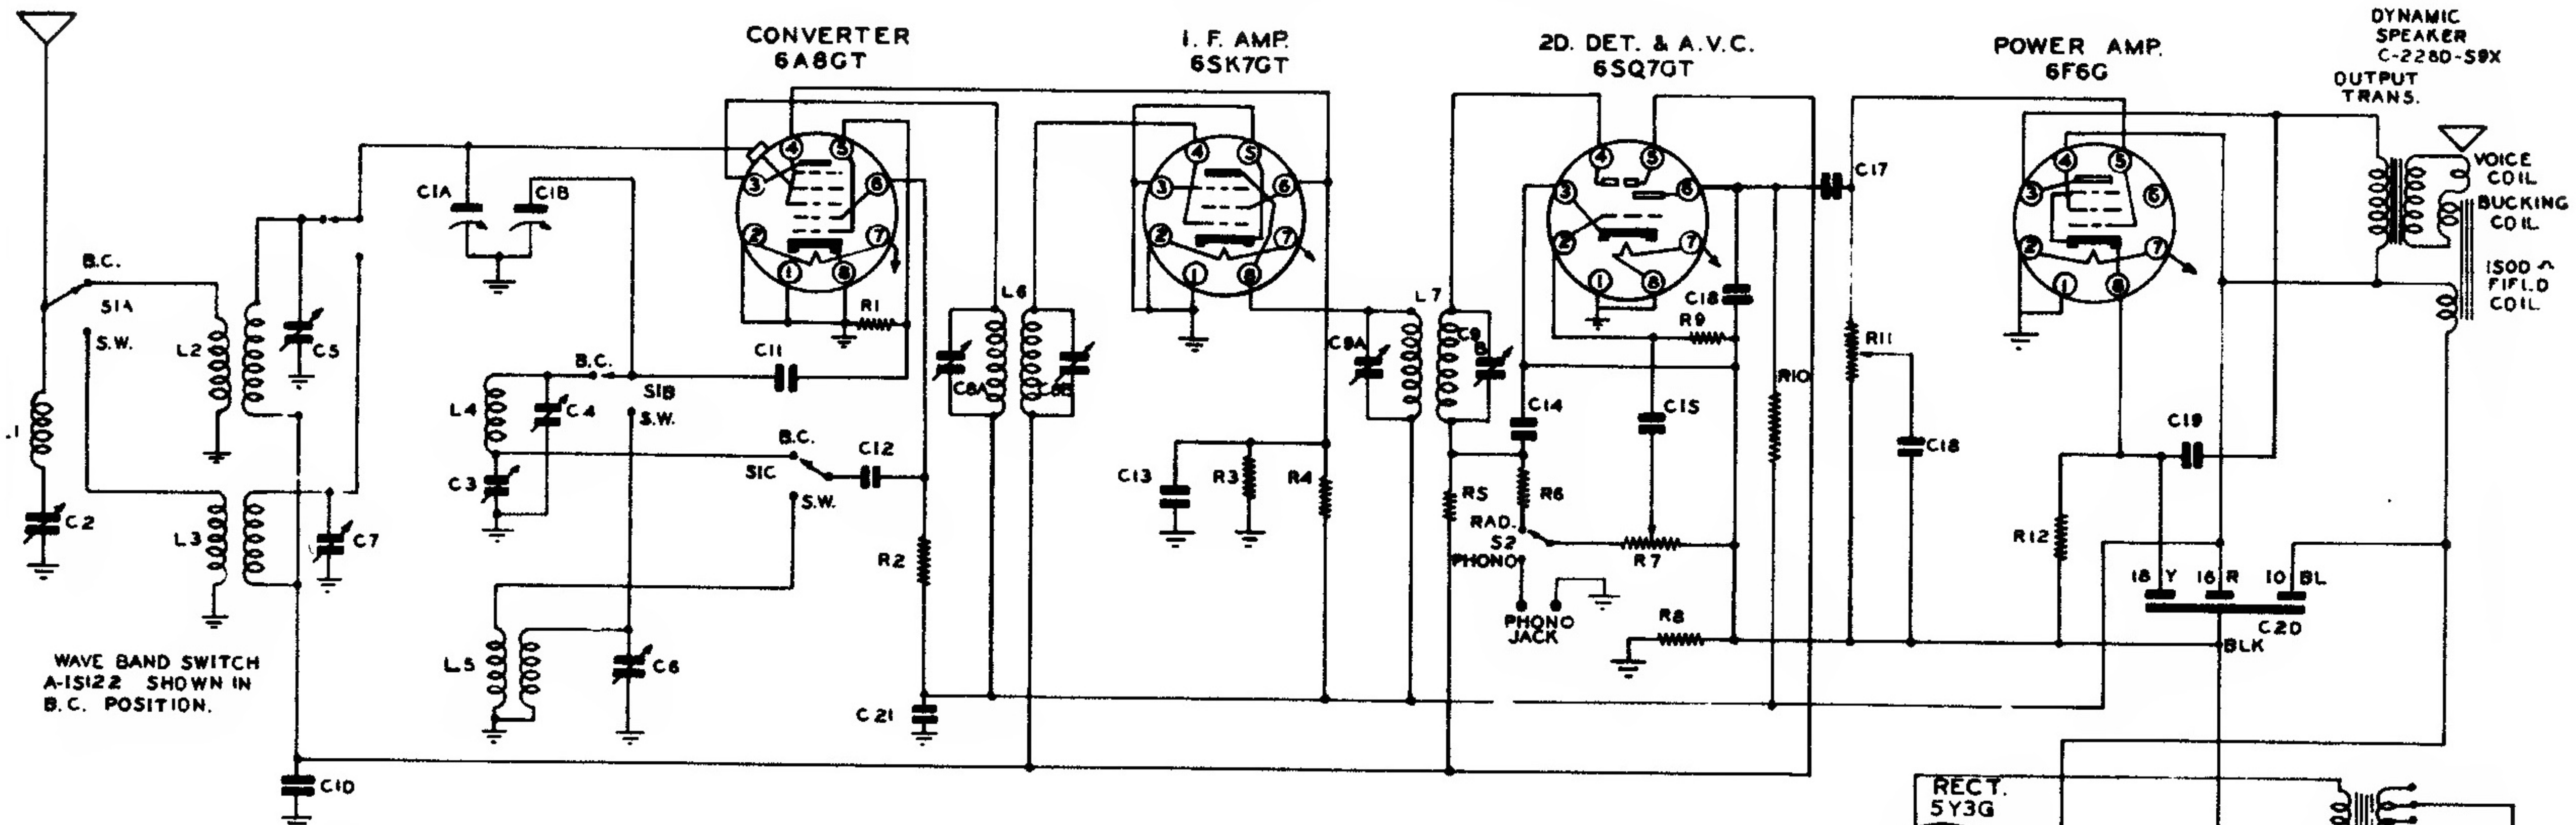


- C1A & B VARIABLE CONDENSER B-8235
- C2 I.F. REJECTOR TRIMMER
- C3 B.C. D.S.C. PADDER
- C4 B.C. OSC. TRIMMER
- C5 B.C. ANT. TRIM.
- C6 S.W. OSC. TRIM
- C7 S.W. ANT. TRIM.
- C6A & B NO. 1 I.F. TRIM.
- C9A & B NO. 2 I.F. TRIM.
- C10 .05 MFD. 600V
- C11 .50 MMFD. MOLDED
- C12 .001 MFD. 600V.

- C13 1 MFD. 400V.
- C14 250 MMFD. MOLDED
- C15 .02 MFD. 400V.
- C16 100 MMFD. MOLDED
- C17 .02 MFD. 600V.
- C18 .006 MFD. 400V.
- C19 .006 MFD. 800V.
- C20 16-16-10 MFD. ELECT.
- C21 .1 MFD. 600V.

- C-3204-36C
- C-720-319
- C-3204-22C
- C-720-339
- C-3206-22C
- C-3204-68C
- C-3208-68C
- A-14780-1
- C-3206-36C

- R1 33000 Ω .25W.
- R2 22000 Ω .5W.
- R3 47000 Ω 1W.
- R4 22000 Ω 2W.
- R5 1 MEG. .25W.
- R6 27000 Ω .25W.
- F7 .5 MEG. VOL. CONT.
- R6 56 Ω .5W.
- R9 5.6 MEG. .25W.
- R10 270000 Ω .25W.
- R11 .5 MEG. TONE CONT. & S.W.
- R12 680 Ω 1W.

- C-2795-80B
- C-2798-78C
- C-2797-62B
- C-2798-191A
- C-2795-96B
- C-2795-79B
- A-15130-5
- C-2796-47C
- C-2795-107B
- C-2795-91B
- A-15129-2
- C-2797-60B

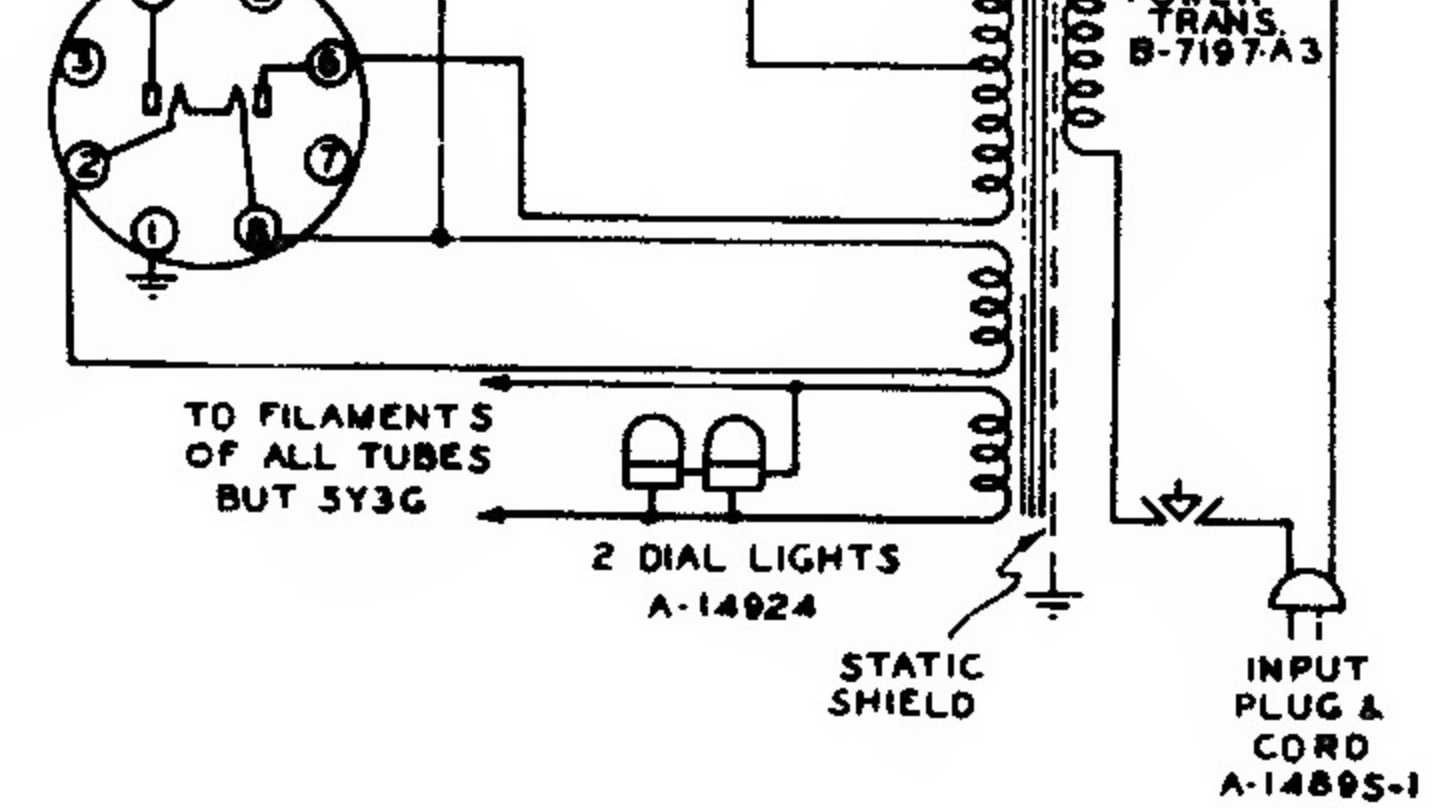

B.C. D.S.C. CIRCUIT FREQUENCY IS ABOVE
ANTENNA FREQ.
S.W. OSC. CIRCUIT FREQ IS BELOW
ANTENNA FREQ.