


STEWART-WARNER 11-5W CHASSIS

(RECEIVER MODELS 11-5W1 TO 11-5W9)

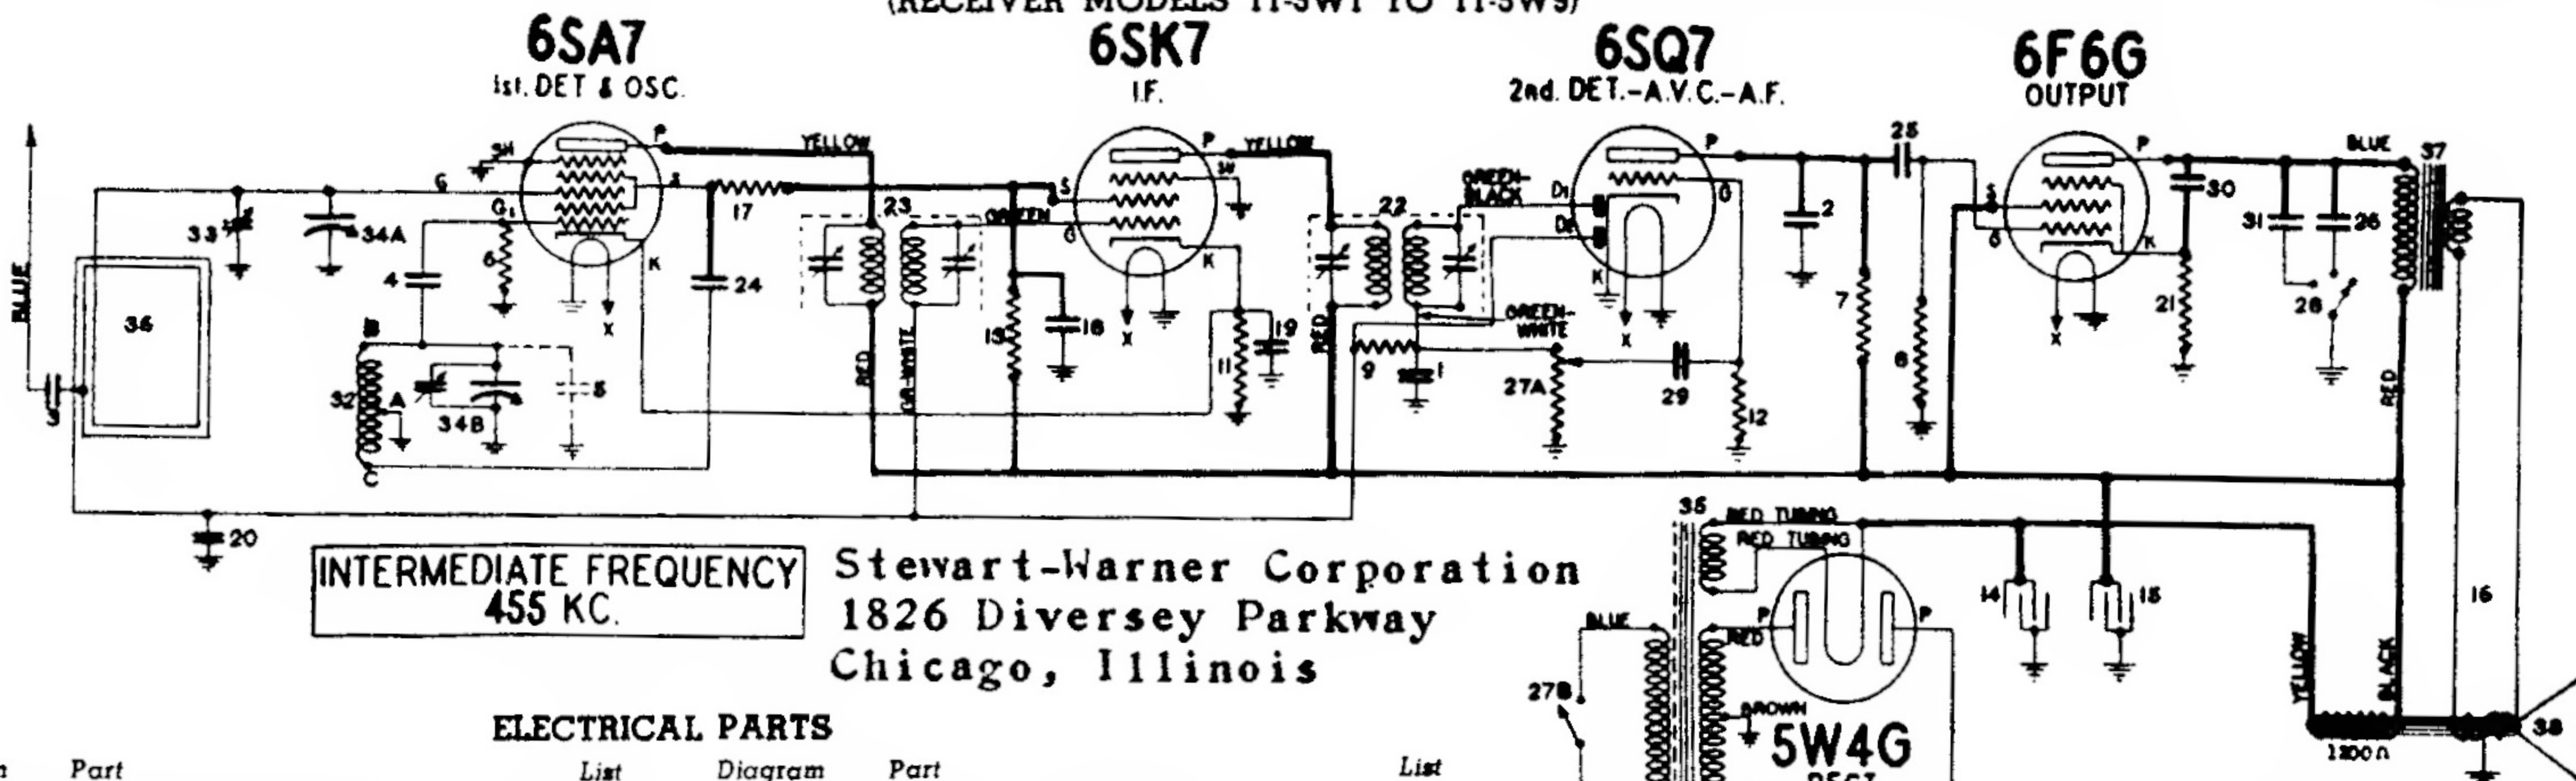

INTERMEDIATE FREQUENCY
455 KC.

Stewart-Warner Corporation
1826 Diversey Parkway
Chicago, Illinois

ELECTRICAL PARTS



Diagram Number	Part Number	Description	List Price
1-2	83539	Condenser—Mica, 260 Mmfd.	.20
3	83783	Condenser—Mica, 110 Mmfd.	.20
4	85061	Condenser—Mica, 51 Mmfd.	.15
5	85563	Condenser—Mica, 26 Mmfd. (used only on some sets)	.15
6	110552	Resistor—Carbon, 47,000 Ohms, 1/4 Watt	.12
7-8	110553	Resistor—Carbon, 220,000 Ohms, 1/4 Watt	.12
9	110580	Resistor—Carbon 3.3 meg. 1/4 W.	.12
10	110629	Dial Light—6.3 Volt (Mazda No. 44)	.15
11	112874	Resistor—Carbon—220 Ohms. 1/4 Watt	.15
12	112975	Resistor—Carbon—10 Meg. 1/4 W.	.12
13	112997	Resistor—Carbon—22,000 Ohms. 1 Watt	.15
14-15	114258	Condenser—Electrolytic—8 mfd., 450 Volt	.98
16	U-115114	Speaker—Dynamic (5")	4.50
17	116068	Resistor—680 Ohms. 1/4 Watt	.12
18-19	116625	Condenser—.1 Mfd., 600 Volt	.25
20	116819	Condenser—.05 Mfd., 600 Volt	.20
21	116978	Resistor—420 Ohm—1/2 Watt Wire Wound	.15
22	119024	Transformer—2nd I. F.	1.15
23	119042	Transformer—1st I.F.	1.10
24-25-26	118193	Condenser—.01 Mfd., 600 Volt	.15
27A-27B	119629	Vol. Control—(1 meg.) & Switch	1.30
28	119630	Tone Switch	.65
29-30	119817	Condenser—.004 Mfd., 600 Volt	.15
31	119880	Condenser—.04 Mfd., 600 Volt	.20

Diagram Number	Part Number	Description	List Price
32	119954	Coil—Oscillator	.36
33	160346	Condenser—Trimmer	.18
34A-34B	160347	Condenser—Variable Tuning	2.30
35	160367	Transformer—Power (50-60 Cycle)	3.60
	181230	Transformer—Power (25 Cycle)	3.90
36	160368	Loop Antenna (Complete)	.80
37	U-160458	Transformer—Output for U-115114 Speaker	1.50
38	U-160459	Cone & Voice Coil for U-115114 Speaker	1.50

MISCELLANEOUS PARTS

Part Number	Description	List Price
160452	Cabinet Back	\$.17
114955	Clamp—Dial Cord	.01
112745	Clip—Coil Mounting	.01
113019	Clip—Dial Scale Retaining	.01
116948	Cord—Dial Drive	.18
160349	Dial Scale	.30
119591	Dial Window	.24
160356	Knob—Push On	.10
160354	Pilot Lamp Socket	.10
160355	Pointer	.14
81145	Retaining Ring for Drive Shaft	.50
83624	Screw—Self Tapping 8x1/4	.01
116690	Socket—Octal Base	.12
117078	Socket—Octal with Special Gndg. Lug	.12
111090	Spacer—Steel	.02
114968	Spring—Dial Cord Tension	.03
119615	Tuning Shaft	.07
111456	Washer—For Tuning Shaft	.50

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

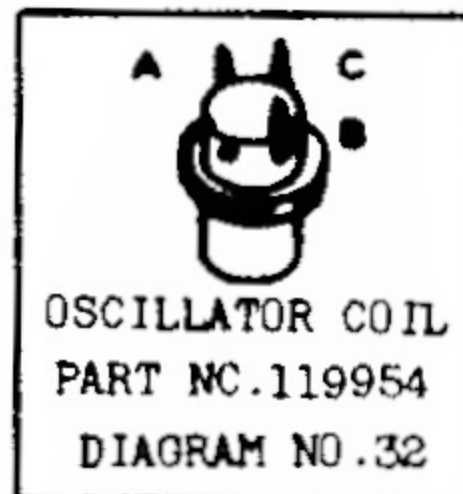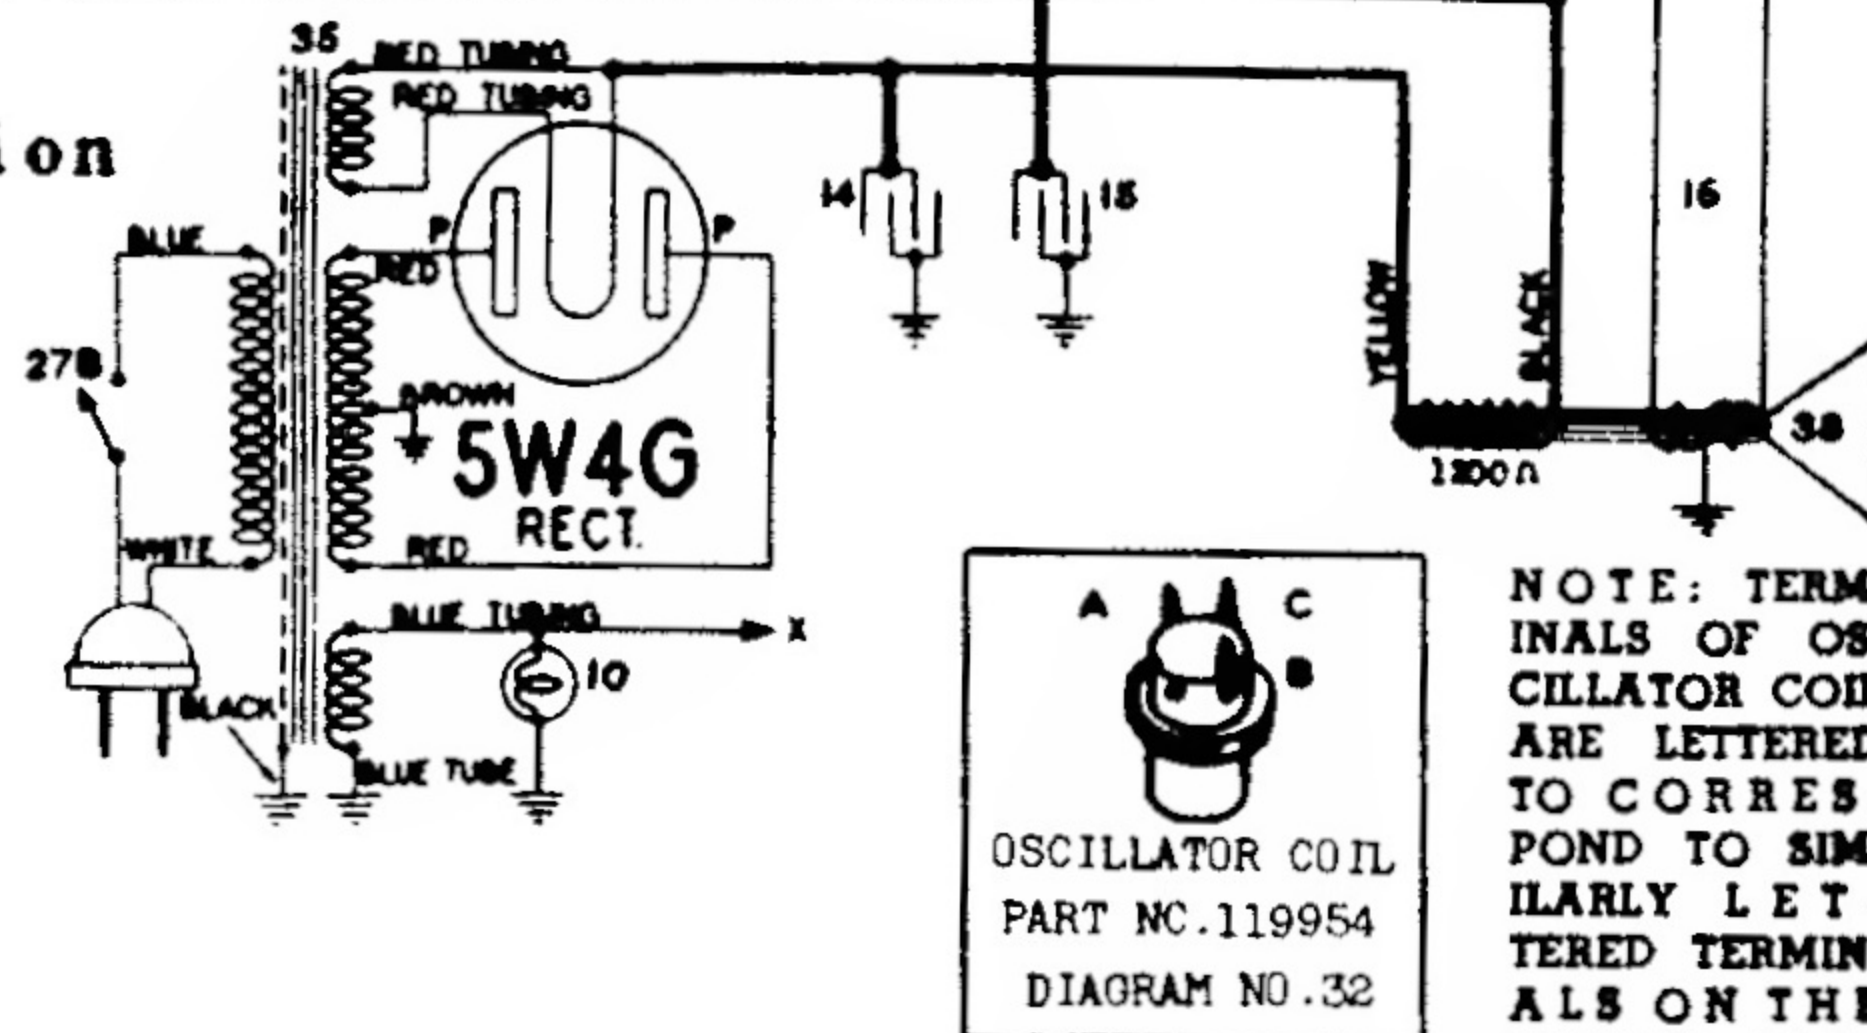


NOTE: TERMINALS OF OSCILLATOR COIL ARE LETTERED TO CORRESPOND TO SIMILARLY LETTERED TERMINALS ON THE CIRCUIT DIAGRAM.

SOCKET VOLTAGES

VOLTAGE ON FULL WITH NO SIGNAL

DIAL TUNED TO 540 KC

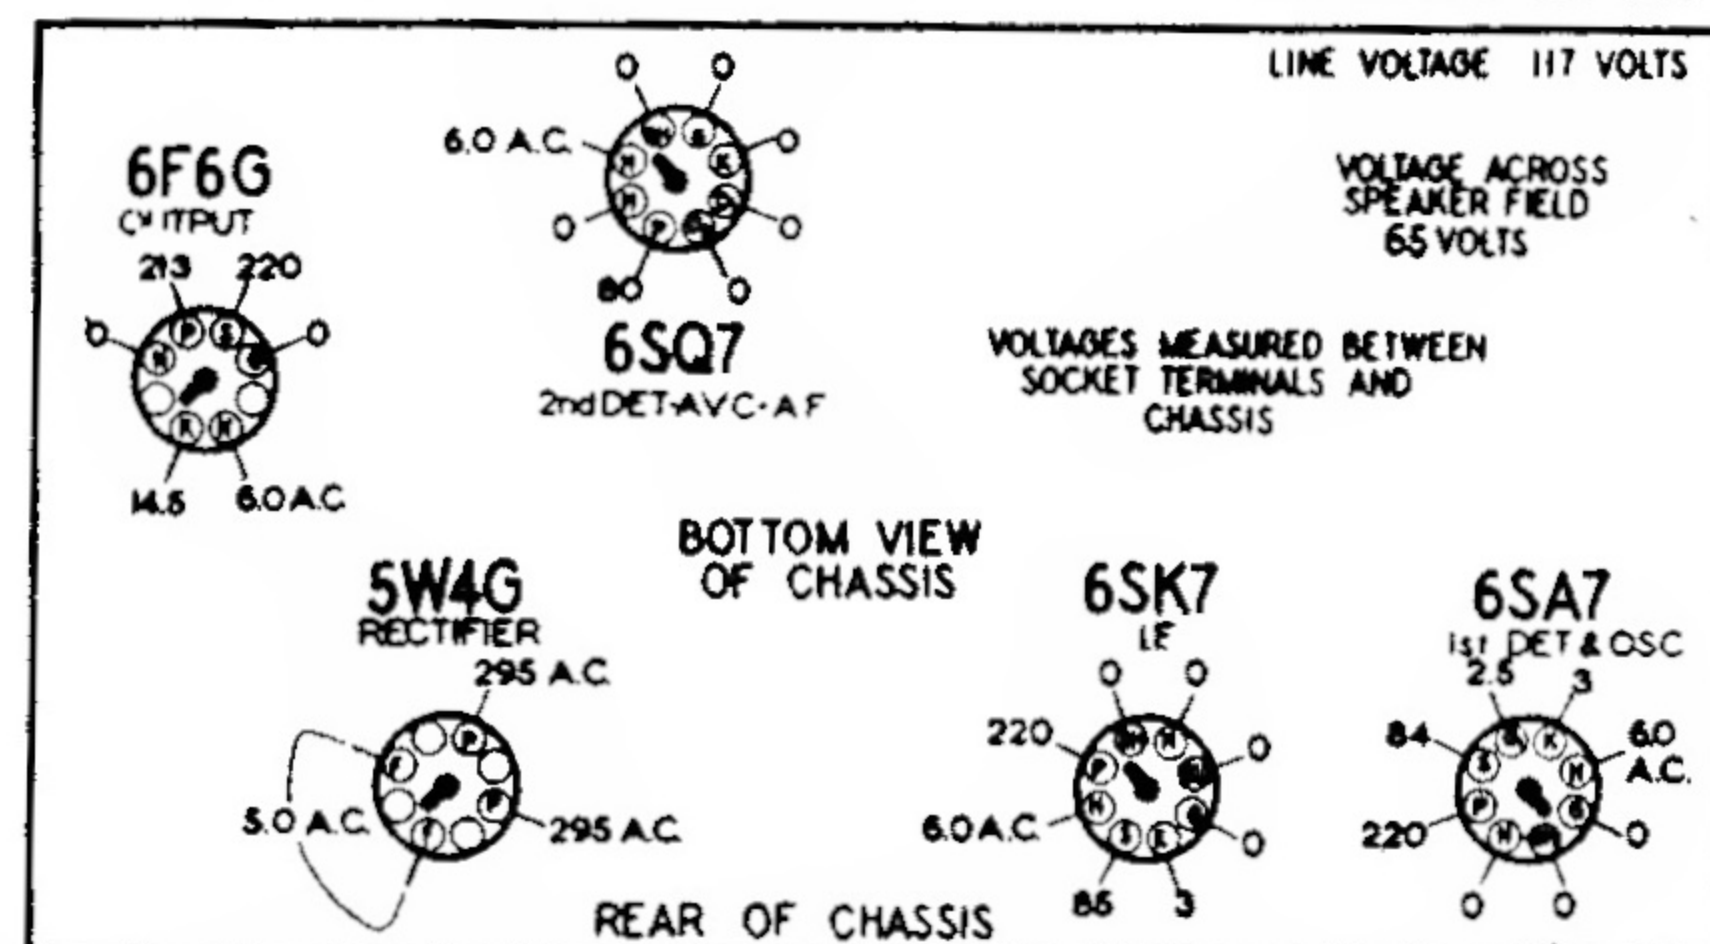

USE A 1000 OHM PER VOLT — VOLTMETER