


Part No.	DESCRIPTION	Qty	Part No.	DESCRIPTION
C1	25 MFD	600V	20-31	ANTENNA CHOKE
C2	487	05 MFD	544-9	ANTENNA COIL ASSEM
C3	224	1 MFD	22-13	TUNING METER
C4	121	25 MFD	34421	OSCILLATING COIL ASSEM
C5	170	1 MFD	34420	DETECTOR COIL ASSEM
C6	456	0012 MFD	95-353	1ST I.F. TRANSFORMER
C7	243	01 MFD	95-354	2ND I.F. TRANSFORMER
C8	289	50 MFD	20-135	RF PLATE CHOKE
C9	250	03 MFD	95-356	POWER CHOKE
C10	182	00025 MFD	95-360	AUDIO TRANSFORMER
C11	147	0005 MFD	95-93	BAND SELECTOR SWITCH
C12	485	008 MFD	95-91	SENSITIVITY CONT. SWITCH
C13	188	02 MFD	95-92	TONE CONTROL SWITCH
C14	182	0001 MFD	95-39	PHONOGRAPH SWITCH
C15	435	02 MFD	44-7	PHONOGRAPH JACK
C16	307	10 MFD DRY ELEC COND	28V	POWER TRANS 115V 50-60 CYCLE
C17	384	0015 MFD	95-395	POWER TRANS 250V 50-60 CYCLE ALL VOLTAGE
C18	205	200-550 MFD OSC PADDER		
C19	480	35 OHM VARIABLE COND		
C20	504	8 MFD NET ELEC COND 600V	450V	
C21	506	16 MFD NET ELEC COND	250V	
C22	493	815 MFD DRY ELEC COND 60V	450V	
C23	405	10 MFD DRY ELEC COND	50V	
C24	229	008 MFD	600V	
C25	408	2-35 MFD TRIMMER		
R1	43-278	99.4 OHMS	1/4 W	
R2	309	700 OHMS	1/4 W	
R3	280	48 M OHMS	1/4 W	
R4	261	9900 OHMS	1/4 W	
R5	293	990 M OHMS	1/4 W	
R6	373	11 M OHMS	1/4 W	
R7	280	100 M OHMS	1/4 W	
R8	385	300 M OHMS	1/4 W	
R9	523	2 MEG OHMS	1/4 W	
R10	300	990 OHMS	1/4 W	
R11	322	2 MEG OHM VOLUME CONT 5W	1/2 W	
R12	316	CAND OHM RES/STOP		
C26	22-234	1/2 MFD NET ELEC COND 250V	450V	
C27	122-502	1/2 MFD DRY ELEC COND 250V	450V	
C28		1/2 MFD DRY ELEC COND 250V	450V	

NOTE—
 *R2-R10 99.4 MFD DRY
 ELECTROLYTIC REPLACES
 **R12 R2-R10 **R2-R10
 1/2 MFD DRY ELECTROLYTIC
 REPLACES **R2-R10 NET
 ELECTROLYTIC IN MODEL
 10-S-147 END TABLE

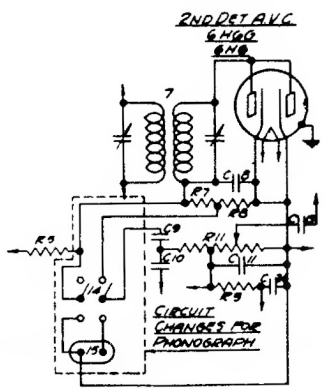

SPEAKER	MODEL
49-146 8"	103-190
49-147 12"	103-156
	103-180
	103-147
49-156 12"	103-153
	103-157

(Chassis No. 1004)

I.F. FREQUENCY 456 KC.
10 TUBE SUPERHETERODYNE — 3 BAND
CHASSIS NO 1004

ZENITH RADIO CORPORATION

Models 10-S-30, 10-S-155, 10-S-156, 10-S-160, 10-S-147, 10-S-153, 10-S-157.