


# Models 10S669-10S690

Chassis No. 10B1-10B2


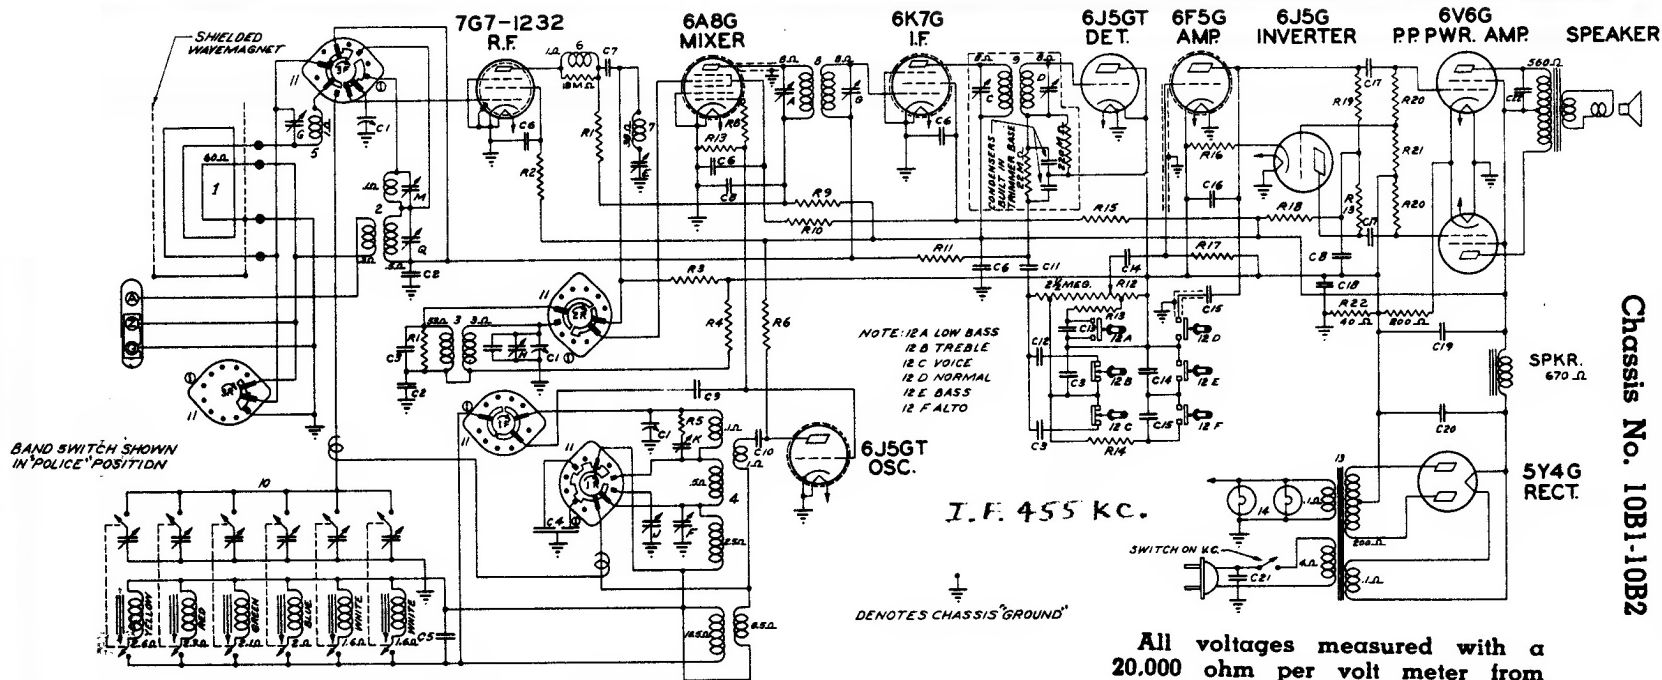


All voltages measured with a 20,000 ohm per volt meter from chassis to socket contact indicated.

All voltages are positive D.C. unless marked otherwise.

Volume control full on.

QMG NO	PART NO	DESCRIPTION	QMG NO	PART NO	DESCRIPTION	QMG NO	PART NO	DESCRIPTION
C1	EE-1232	THREE GANG VARIABLE				R21	63-640	47M OHM
C2	EE-289	.05 MFD.	800K	R1	63-587	4700 OHM		1/4 W
C3	EE-470	.00015 MFD.	600K	R2	63-595	100 M OHM		1/4 W
C4	EE-1039	DUAL PADDER		R3	63-590	15M OHM		1/4 W
C5	EE-968	COMPENSATING COND.		R4	63-599	10M OHM		1/4 W
C6	EE-828	.05 MFD.	450K	R5	63-576	62 OHM		1/4 W
C7	EE-467	.0005 MFD.	600K	R6	63-591	15 M OHM		1/4 W
C8	EE-825	.1 MFD.	400K	R7	63-581	470 OHM		1/4 W
C9	EE-127	.85 M MFD.	600K	R8	63-605	1000 OHM		1/4 W
C10	EE-182	.00025 MFD.	600K	R9	63-643	18M OHM		1/4 W
C11	EE-327	.02 MFD.	600K	R10	63-271	1 MEG OHM		1/4 W
C12	EE-354	.00085 MFD.	600K	R11	63-275	VOLUME CONTROL		1/4 W
C13	EE-229	.005 MFD.	600K	R12	63-599	47M OHM		1/4 W
C14	EE-492	.002 MFD.	600K	R13	63-716	68M OHM		1/4 W
C15	EE-448	.004 MFD.	600K	R14	63-189	39 M OHM		1/4 W
C16	EE-854	.0005 MFD.	600K	R15	63-525	2200 OHM		1/4 W
C17	EE-171	.05 MFD.	600K	R16	63-376	15 MEG OHM		1/4 W
C18	EE-321	.1 MFD.	600K	R17	63-594	68M OHM		1/4 W
C19	EE-108	.20 MFD. ELECTROLYTIC	450K	R18	63-520	220 M OHM		1/4 W
C20	EE-104	.002 MFD.	600K	R19	63-627	550 M OHM		1/4 W
C21	EE-469	.01 MFD.	600K	R20				

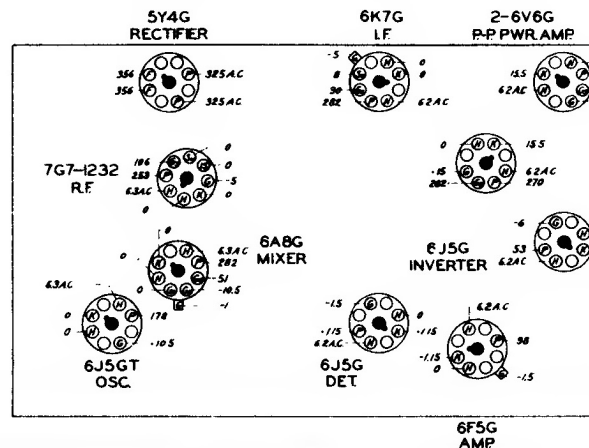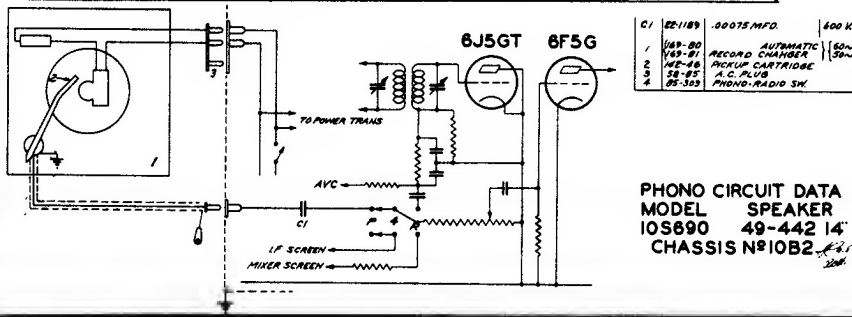

SOCKET VOLTAGES—BOTTOM VIEW

Zenith Radio