


TYPE	VAL.	DESCRIPTION	QTY
C1	2-303	5 MFD	600V
C2	487	05 MFD	400V
C3	70	1	400V
C4	289	10 MFD	600V
C5	187	25 MFD	600V
C6	212	05 MFD	600V
C7	486	0012	600V
C8	249	01	400V
C9	05	05	200V
C10	508	TRIMMER COND	
C11	285	10 MFD	600V
C12	205	200-550 MFD PAPER	
C13	304	0015 MFD	600V
C14	409	3 GANG VARIABLE	
C15	182	00025 MFD	600V
C16	147	0005	400V
C17	408	02	400V
C18	162	3001	300V
C19	195	02	600V
CR0	509	10 MFD DRY ELEC COND	
CR1	506	16 NET	250V
CR2	229	005 MFD TUBULAR	600V
CR3	485	005	600V
CR4	125	8 MFD NET ELEC COND	450V
CR5	294	16	450V
CR6	304	5	450V
CR7	408	10 . DRY . COND	20V
R1	69276	29 M OHM	1/4W
R2	97	800	1/4W
R3	295	90 M	1/4W
R4	208	12 M	1/4W
R5	466	90	1/4W
R6	582	5100	1/4W
R7	590	8	1/4W
R8	280	48 M	1/4W
R9	303	700	1/4W

QTY	PART	DESCRIPTION	VAL
2	R10	100 M OHMS	1/4W
1	R11	300 M	1/4W
1	R12	2 M OHM VOL CONT 3 SW.	
1	R13	531	1/4W
1	R14	2 M OHM	1/4W
1	R15	250	1/4W
1	R16	20 OHM	1/4W
1	R17	201	1/4W
1	2071	ANTENNA CHOKE	
2	20135	R.F. PLATE	
3	122-14	TUNING METER	
3	34845	ANTENNA COIL ASSEM	
5	54546	DETECTOR	
6	54567	OSCILLATOR	
7	54887	I.F. DETECTOR	
8	54888	I.F. OSCILLATOR	
9	93380	1ST I.F. TRANS	
10	93369	2ND I.F. TRANS	
11	93567	AUDIO	
12	93370	POWER - 115V 50-60 CYCLE	
13	93593	POWER - 25 CYCLE FULL WAVE	
14	8592	TONE CONT SWITCH	
15	8592	SENSITIVITY CONT SW	
16	93586	POWER CHOKE	
17	85509	PHONO SWITCH	
18	44-7	1/4" JACK	
18	84-24	BAND SELECTOR SWITCH	

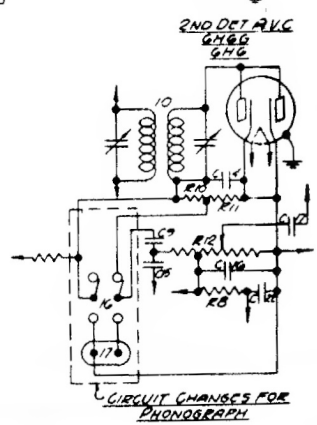

NOTE - #2 SPEAKER FIELD IS AUTOMATICALLY SUBSTITUTED FOR 4925 OHM SECTION OF RANDOM RESISTOR WHEN SPEAKER PLUG IS INSERTED IN SET.

SPEAKER MODEL
 NR1 49-149 12" 12-U-159
 NR1 49-150 12" 12-U-159
 NR2 49-150 6" 12-U-159

I.F. FREQUENCY 456 KC
 12 TUBE SUPERHETERODYNE - 4 BAND
 CHASSIS NO 1203

ZENITH RADIO CORP.

Models 12-U-158, 12-U-159. (Chassis No. 1203)