




### ALIGNMENT PROCEDURE

OPERATION	CONNECT OSCILLATOR TO	DUMMY ANTENNA	INPUT SIG. FREQUENCY	SET DIAL AT	TRIMMERS	PURPOSE
1	Converter Grid	.5 Mfd.	455 Kc.	600 Kc.	C-6, C-7, C-8, C-9	Align I. F.
2	One turn loop Coupled loosely to wave magnet	--	1600 Kc.	1600 Kc.	C-4	Set Oscillator to Dial Scale.
3	"	--	1400 Kc.	1400 Kc.	C-2	Align Antenna Stage

# ZENITH

**MODELS 5D011-5D027**  
**CHASSIS No. 5C01**

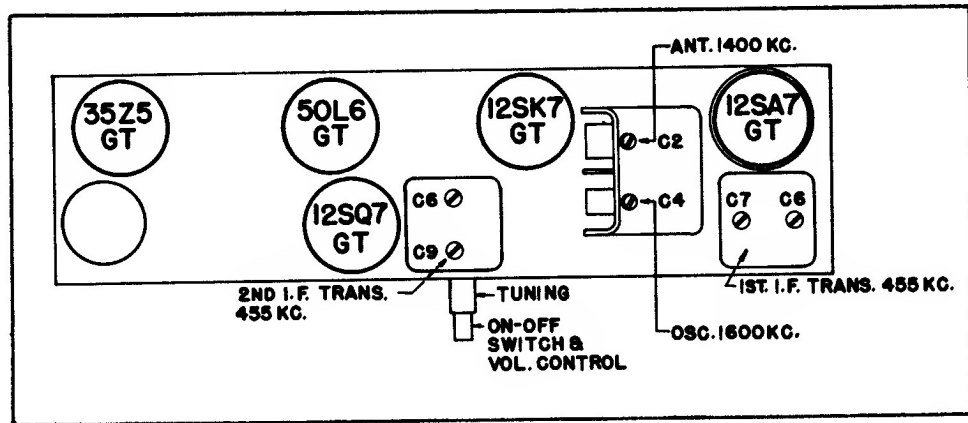

TUBE AND TRIMMER LOCATION

