


Models 6G638-6G660

Zenith Radio

Chassis No. 6B09

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	22-1217	THREE-GANG VARIABLE	C20	22-243	.01 MFD.	R13	63-584	68M OHM
C2	22-1123	.01 .75MFD.	C21	22-227	.1 MFD.	R14	63-1259	TWO-SECTION CONDENSER
C3	22-327	.02 MFD.	C22	22-234	200MFD. ELECTROLYTIC	R15	63-605	1000 OHM
C4	22-229	.05 MFD.	C23	22-298	40 MFD.	R16	63-976	15 MEGOHM
C5	22-247	110 MFD. ELECTROLYTIC				R17	63-580	330 OHM
C6	22-128	20 MFD.				R18	63-1057	870 OHM WIREWOUND
C7	22-128	30 MFD.				R19	63-597	470 M OHM
C8	22-259	50 M MFD.				R20	63-591	22 M OHM
C9	22-305	5 M MFD.	F1	63-602	4.7 MEGOHM	1	59688	ANTENNA COIL ASSEMBLY
C10	22-930	QUAL PADDER	F2	63-529	10M OHM	2	59690	DETECTOR COIL
C11	22-355	.002 MFD.	F3	63-529	10M OHM	3	89689	OSCILLATOR COIL
C12	22-1017	.05 MFD.	R3	63-600	2.2 MEGOHM	4	95-821	12 I.F. TRANSFORMER
C13	22-354	.00035 MFD.	R4	63-654	180 M OHM	5	95-822	22 I.F.
C14	22-470	.00015 MFD.	R5	63-577	100 OHM	6	85-292	BAND SELECTOR SWITCH
C15	22-229	.005 MFD.	R6	63-593	47 M OHM	7	59887	1 MEGOHM
C16	22-448	.004 MFD.	R7	63-640	2200 OHM	8	59986	10 MEGOHM
C17	22-492	.002 MFD.	R8	63-1260	140 OHM WIREWOUND	9	63-1260	140 OHM WIREWOUND
C18	22-162	.0001 MFD.	R9	63-271	1 MEGOHM	10	63-604	10 MEGOHM
C19	22-287	.001 MFD.	R10	63-604	10 MEGOHM	11	63-1260	VOLUME CONTROL
			R11	63-1260	VOLUME CONTROL	12	63-1260	VOLUME CONTROL

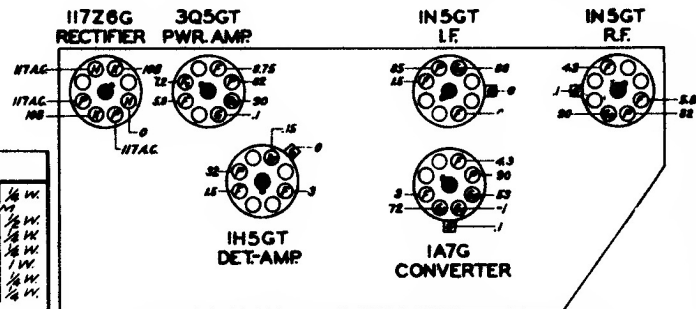

SOCKET VOLTAGES—BOTTOM VIEW

All voltages measured with a 20,000 ohm per volt meter from chassis to socket contact indicated.