


NOTE:  
10A TREBLE  
10B BASS

DENOTES CHASSIS "GROUND"

SW. ON V.C.

CHASSIS	MODEL	SPEAKER
6A05	6 S546	49-388 6"
6A05	6 S556	49-390 10"
6A05R	6 S532	49-438 6"

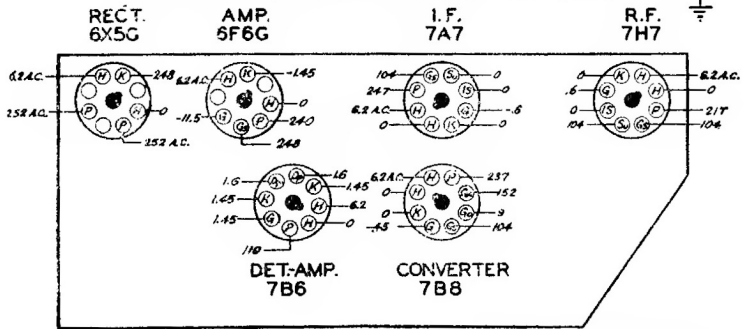

BAND SWITCH SHOWN IN  
AUTOMATIC POSITION

I.F. FREQUENCY 455 KC.  
6 TUBE SUPERHETERODYNE  
CHASSIS N<sup>o</sup> 6A05 & 6A05R 2 BAND A.C.  
ZENITH RADIO CORPORATION  
CHICAGO, ILL.

**Circuit Diagram**  
**Model 6S532**  
**Chassis No. 6A05R**

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	22-1044	TWO GANG VARIABLE	C19	22-138	.2 MFD. 6A05	R15	63-597	470 M OHM	A		1 <sup>ST</sup> I.F. TRANS. PRI.
C2	22-289	.50 MFD.				R16	63-654	180 M OHM	B		1 <sup>ST</sup> I.F. - SEC.
C3	22-829	.05 MFD.				R17	63-656	270 M OHM	C		2 <sup>ND</sup> I.F. - PRI.
C4	22-826	.05 MFD.							D		2 <sup>ND</sup> I.F. - SEC.
C5	22-162	.0001 MFD.	R1	63-637	4700 OHM				E	22-1015	WAVE TRAP
C6	22-182	.00025 MFD.	R2	63-593	47 M OHM				F	22-1048	BROADCAST OSCILLATOR
C7	22-860	COMPENSATING COND.	R3	63-150	10 M OHM				G	22-462	BROADCAST ANTENNA
C8	22-1022	.005 MFD.	R4	63-593	1000 OHM				J	22-1023	BROADCAST PIPPER
C9	22-1034	.5 MFD. ELECTROLYTIC	R5	63-599	1.5 MEG OHM				K		SHORT WAVE OSC. (ON GANG)
C10			R6	63-102	15 M OHM				M	22-1048	SHORT WAVE ANTENNA
C11	22-1036	.1 MFD.	R7	63-110	8200 OHM						
C12	22-827	.1 MFD.	R8	63-719	47 M OHM						
C13	22-189	.02 MFD.	R9	63-719	470 M OHM						
C14	22-289	.005 MFD.	R10	63-153	VOLUME CONTROL						
C15	22-492	.005 MFD.	R11	63-109	42 OHM WIREWOUND						
C16	22-854	.0005 MFD.	R12	63-624	68 OHM						
C17	22-448	.004 MFD.	R13	63-976	15 MEG OHM						
C18	22-830	.02 MFD.	R14	63-296	220 M OHM						
						R15	63-597	470 M OHM			
						R16	63-654	180 M OHM			
						R17	63-656	270 M OHM			