


## SPECIFICATIONS

<b>Input voltage:</b>	120/220/240V AC $\pm$ 10%, 50/60Hz
<b>Output voltage:</b>	13.8V DC (standard voltage)
<b>Output current:</b>	20 A (25% duty cycle) 15A (50% duty cycle)
<b>Continuous load current:</b>	10 A max. (including external output terminal)
<b>Output voltage fluctuation:</b>	Within $\pm 0.7$ V at AC 120V, 220V, 240V $\pm$ 10% (Load current: 15A) Within 0.7 V between 2–15 A load. (No-load output voltage: Less than 16V at 120V/220/240V. AC)
<b>Ripple voltage.</b>	Less than 20 mV (rms) at 13.8V, output current 15A.
<b>Power consumption:</b>	Approx. 480 W (at 120/220/240V AC. 13.8V DC, 20A)
<b>Dimensions:</b>	173 (6-13/16) W x 95 (3-3/4)H x 245 (9-5/8) D mm (inch)
<b>Weight:</b>	Approx. 7 kg (15.4 lbs.)

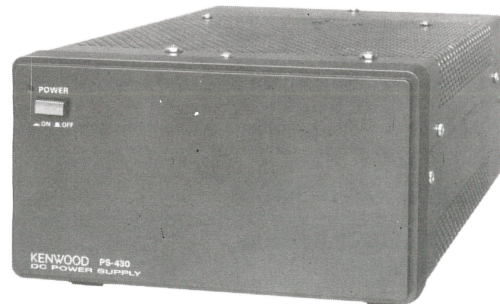


# PS-430

# KENWOOD

# SCHEMATIC DIAGRAM/PC BOARD



## ADJUSTMENT

1. Connect the load and set the current to 15A.
2. Adjust output voltage to 13.8V ± 0.4V with VR1.

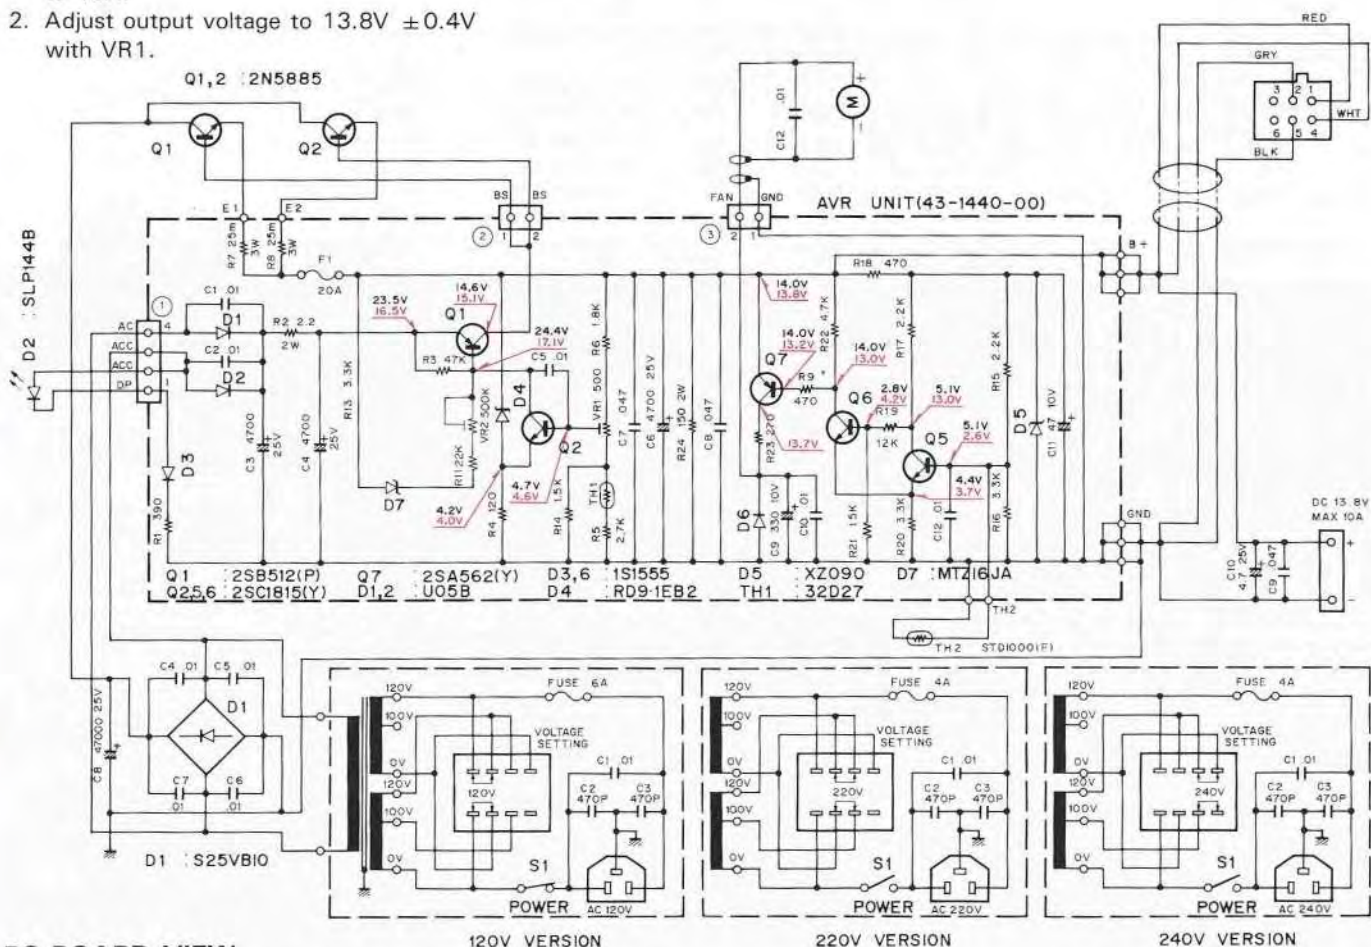

## PC BOARD VIEW

### AVR UNIT (X43-1440-00) Component side view

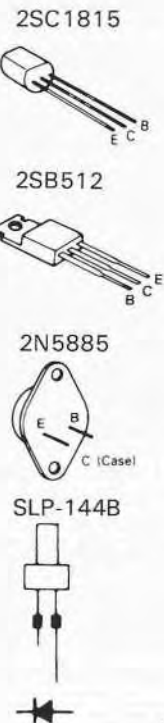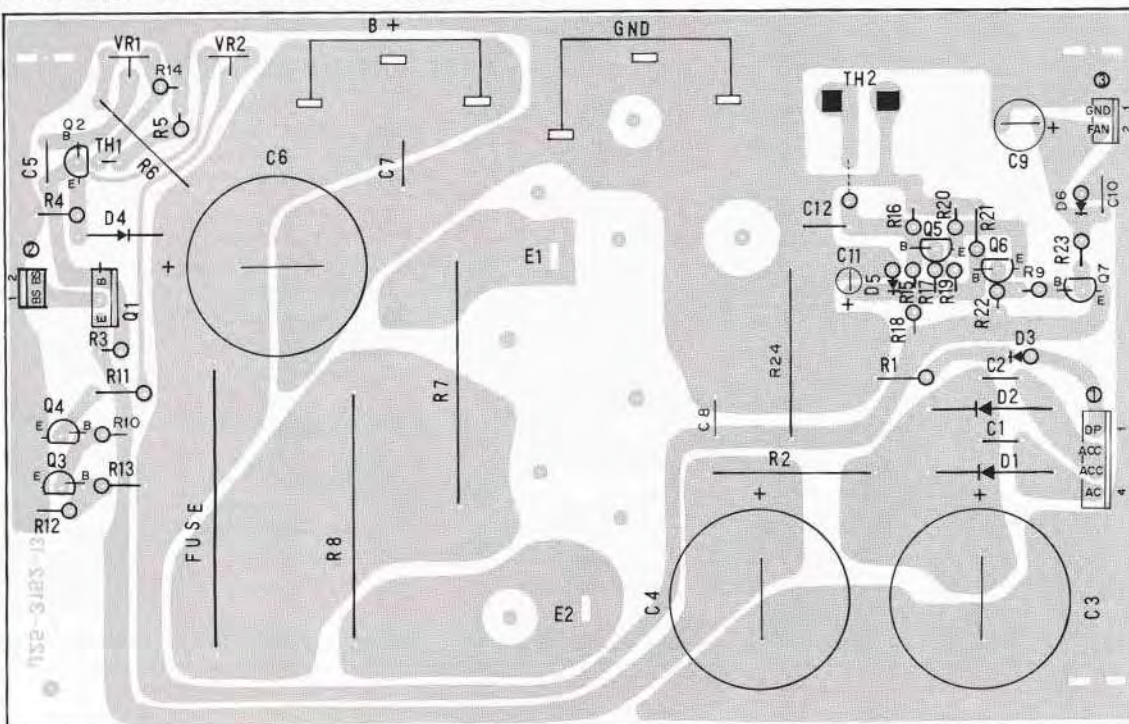

# SPECIFICATIONS/PARTS LIST

## SPECIFICATIONS

<b>Input voltage:</b>	120/220/240V AC±10%, 50/60Hz
<b>Output voltage:</b>	13.8V DC (standard voltage)
<b>Output current:</b>	20 A (25% duty cycle) 15A (50% duty cycle)
<b>Continuous load current:</b>	10 A max. (including external output terminal)
<b>Output voltage fluctuation:</b>	Within ±0.7 V at AC 120V, 220V, 240V±10% (Load current: 15A) Within 0.7 V between 2-15 A load. (No-load output voltage: Less than 16V at 120V/220/240V, AC)
<b>Ripple voltage.</b>	Less than 20 mV (rms) at 13.8V, output current 15A.
<b>Power consumption:</b>	Approx. 480 W (at 120/220/240V AC, 13.8V DC, 20A)
<b>Dimensions:</b>	173 (6-13/16) W x 95 (3-3/4)H x 245 (9-5/8) D mm (inch)
<b>Weight:</b>	Approx. 7 kg (15.4 lbs.)

## PARTS LIST

### SEMICONDUCTOR

N : New parts

Item	Re- marks	Name	Item	Re- marks	Name	
<b>Diode</b>		1S1555	<b>Thermistor</b>		32D27	
		S25VB10				
		U05B		<b>TR</b>		2N5885
<b>Zener diode</b>		RD9.1EB2			2SB512(P)	
<b>LED</b>		SLP144B			2SC1815(Y)	

Part No.	Re- marks	Description	Ref. No.
<b>PS-430 GENERAL</b>			
A01-0937-02	N	Case (upper)	
A01-0938-12	N	Case (lower)	
A20-2461-03	N	Panel	<b>K,M,W,X</b>
A20-2462-03	N	Panel	<b>T</b>
B39-0407-04		Spacer x 2	
B40-2634-04	N	Name plate	
B41-0626-14	N	Voltage sheet 120V	<b>K</b>
B41-0627-14	N	Voltage sheet 220V	<b>M,W</b>
B41-0630-04	N	Voltage sheet 240V	<b>T,X</b>
B42-1733-04		Voltage sheet	
B42-1770-04	N	Current indication sheet	<b>M,T,W,X</b>
B46-0404-00		Warranty card	<b>K</b>
B50-4014-00	N	Instruction manual	<b>K,M,W,X</b>
B50-4015-00	N	Instruction manual	<b>T</b>
CE04W1E4R7M	E	4.7 25V	C10
CK45E2H103P	C	0.01 500V x 4	C4-7
CK45F1H473Z	C	0.047 x 2	C9,11
C90-0865-05	N	E 4700 25V	C8
C91-0079-05		C 0.01	C1
C91-0496-05		C 470P x 2	C2,3
E18-0351-05		3P Inlet	
E20-0282-05		2P terminal plate	
E22-0472-05		Lug plate	
E23-0015-04		GND lug	
E23-0425-05		Lug terminal	
E30-1643-15		AC cord	<b>K,M</b>
E30-1644-15		AC cord	<b>T</b>

Part No.	Re- marks	Description	Ref. No.
E30-1645-05		AC cord	<b>W</b>
E30-1647-05		AC cord	<b>X</b>
E31-0500-05		Cable with plug	
F01-0786-03	N	Heat sink plate	
F01-0787-13	N	Heat sink	
F05-4022-05		Fuse 4A	<b>K</b>
F05-4022-05		Fuse 4A x 2	<b>M,T,W,X</b>
F05-6021-05		Fuse 6A x 2	<b>K</b>
F05-6021-05		Fuse 6A	<b>M,T,W,X</b>
F07-0817-04	N	Fan cover	
F09-0405-24		Fan	
H01-4451-04	N	Packing carton (inside)	<b>K,M,W,X</b>
H01-4452-04	N	Packing carton (inside)	<b>T</b>
H10-2567-02	N	Packing fixture (F)	
H10-2568-02	N	Packing fixture (R)	
H12-1319-04	N	Cushion	
H20-0276-03		Protective cover	
H25-0105-04		Protective bag	
J02-0323-05		Foot x 2	
J02-0427-04	N	Assistant foot	
J13-0033-15		Fuse holder	
J42-0403-05		Cord bushing	
J42-0434-05	N	Rubber bushing x 3	
K29-0758-04		Push knob	
L01-8166-05	N	Power transf.	
S29-2406-05		Voltage selector switch	S2
S40-1404-05	N	Power switch	S1
S59-1407-15		Thermostat	TM1
T42-0005-15		Fan motor	
X43-1400-00	N	AVR unit	

Part No.	Re- marks	Description	Ref. No.	Q'ty
<b>AVR UNIT (X43-1440-00)</b>				
CE04W1C470M		E 47 16V	C9	1
CK45F1H103Z	C	0.01	C1,2,5	3
CK45F1H473Z	C	0.047	C7,8	2
C90-0814-05	E	4700 25V	C3,4,6	3
E23-0022-04		Terminal		6
E23-0046-04		Square terminal		2
E40-0273-05		Mini connector 2P		2
E40-0473-05		Mini connector 4P		1
J31-0502-04		PC board collar		4
J42-0428-05		PC board bushing		4
R12-0427-05		Trim. pot. 500Ω(B)	VR1	1
RS14AB3A181J		MF 180Ω 1W	R9	1
RS14GB3D4R7J		MF 4.7Ω 2W	R2	1
R92-0663-05	N	Cement 0.025Ω 3W	R7,8	2