




Allied Radio Corp.
Chicago, Ill.

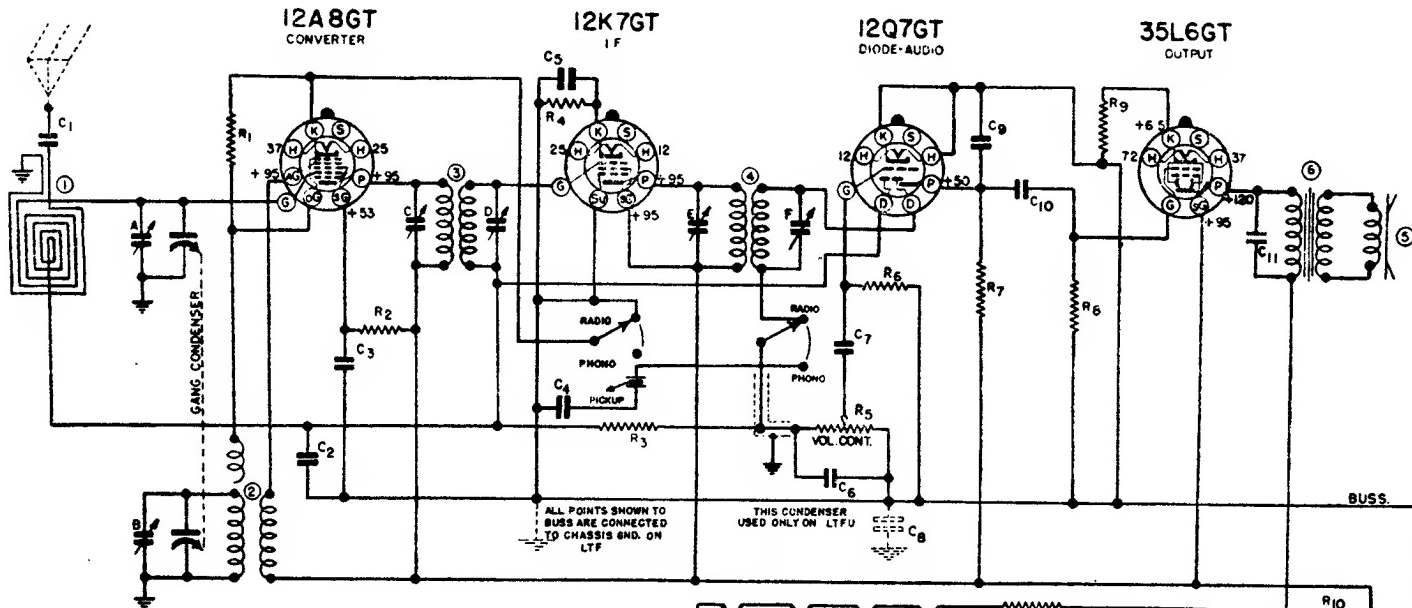

NOTE VOLTAGES SHOWN ARE FROM TERMINAL TO BUSS. HEATER VOLTAGES ARE A.C. WHEN LINE VOLTAGE IS ALTERNATING.

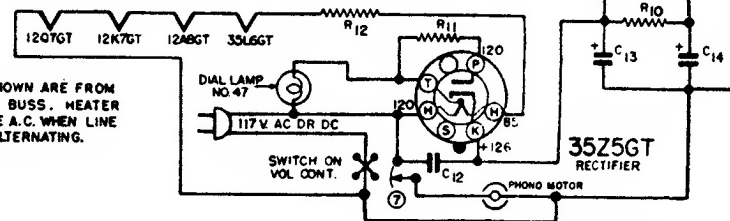

DIAG NO.	PART NO.	DESCRIPTION	DIAG NO.	PART NO.	DESCRIPTION
R1	N-1260	50,000 OHM .5W. 20%	C10	N-1344	.01 MFD. 400 V.
R2	N-1259	15,000 OHM .5W. 20%	C11	N-1376	.02 MFD. 400 V.
R3	N-1262	1 MEGOHM .5W. 20%	C12	N-1346	.05 MFD. 400 V.
R4	N-2487	20 OHM .5W. 20%	C13	N-3114	40 MFD. 150V. ELECTRO.
R5	N-3045	.05 MEGOHM VOL. CON.	C14	N-3114	25 MFD. 150 V.
R6	N-1263	10 MEGOHM .5W. 20%	1	N-3041	LOOP ANTENNA COIL
R7	N-1377	200,000 OHM .5W. 20%	2	N-1452	OSCILLATOR COIL
R8	N-1264	500,000 OHM .5W. 20%	3	N-3043	1ST. I.F. TRANSFORMER
R9	N-1616	250 OHM .5W. 10%	4	N-3044	2ND. I.F. TRANSFORMER
R10	N-1257	2,000 OHM .5W. 20%	5	N-2624	5" P.M. SPEAKER
R11	N-1742	25 OHM .5W. 20%	6	N-3568	OUTPUT TRANSFORMER
R12	N-1618	80 OHM 2W. 10%	7	N-4136	PHONO MOTOR SWITCH
C1	N-1344	.01 MFD. 400 V.	N-3046	2 GANG CONDENSER	
C2	N-1345	.05 MFD. 200 V.	N-3550	RADIO-PHONO SWITCH	
C3	N-1345	.05 MFD. 200 V.	N-4168	CRYSTAL PICK-UP	
C4	N-2642	.09 MFD. 200 V.	N-3143	PHONO MOTOR & TURNTABLE	
C5	N-1351	.1 MFD. 200 V.			
C6	N-1374	.0001 MFD. MICA			
C7	N-1344	.01 MFD. 400 V.			
C8	N-3080	22 MFD. 200 V.			
C9	N-1447	.0005 MFD. 400 V.			

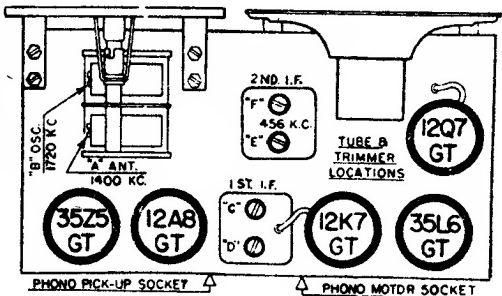

I.F. 456 KC.

D-170

5 TUBE AC-DC
SUPERHETERODYNE
SINGLE BAND
PHONO COMBINATION

Allied Radio Corp.
(Sonora Radio make)